



(22) Date de dépôt/Filing Date: 2002/03/14

(41) Mise à la disp. pub./Open to Public Insp.: 2003/09/14

(51) Cl.Int.⁷/Int.Cl.⁷ A47C 3/03, A47C 1/027


(71) Demandeur/Applicant:
LEGGETT & PLATT LTD., CA

(72) Inventeurs/Inventors:
MATERN, GERARD J., CA;
PATTON, ARTHUR A., CA

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : ACTIONNEUR DE COMMANDE DE FAUTEUIL AVEC ILLUSTRATION

(54) Title: CHAIR CONTROL ACTUATOR WITH DEPICTION

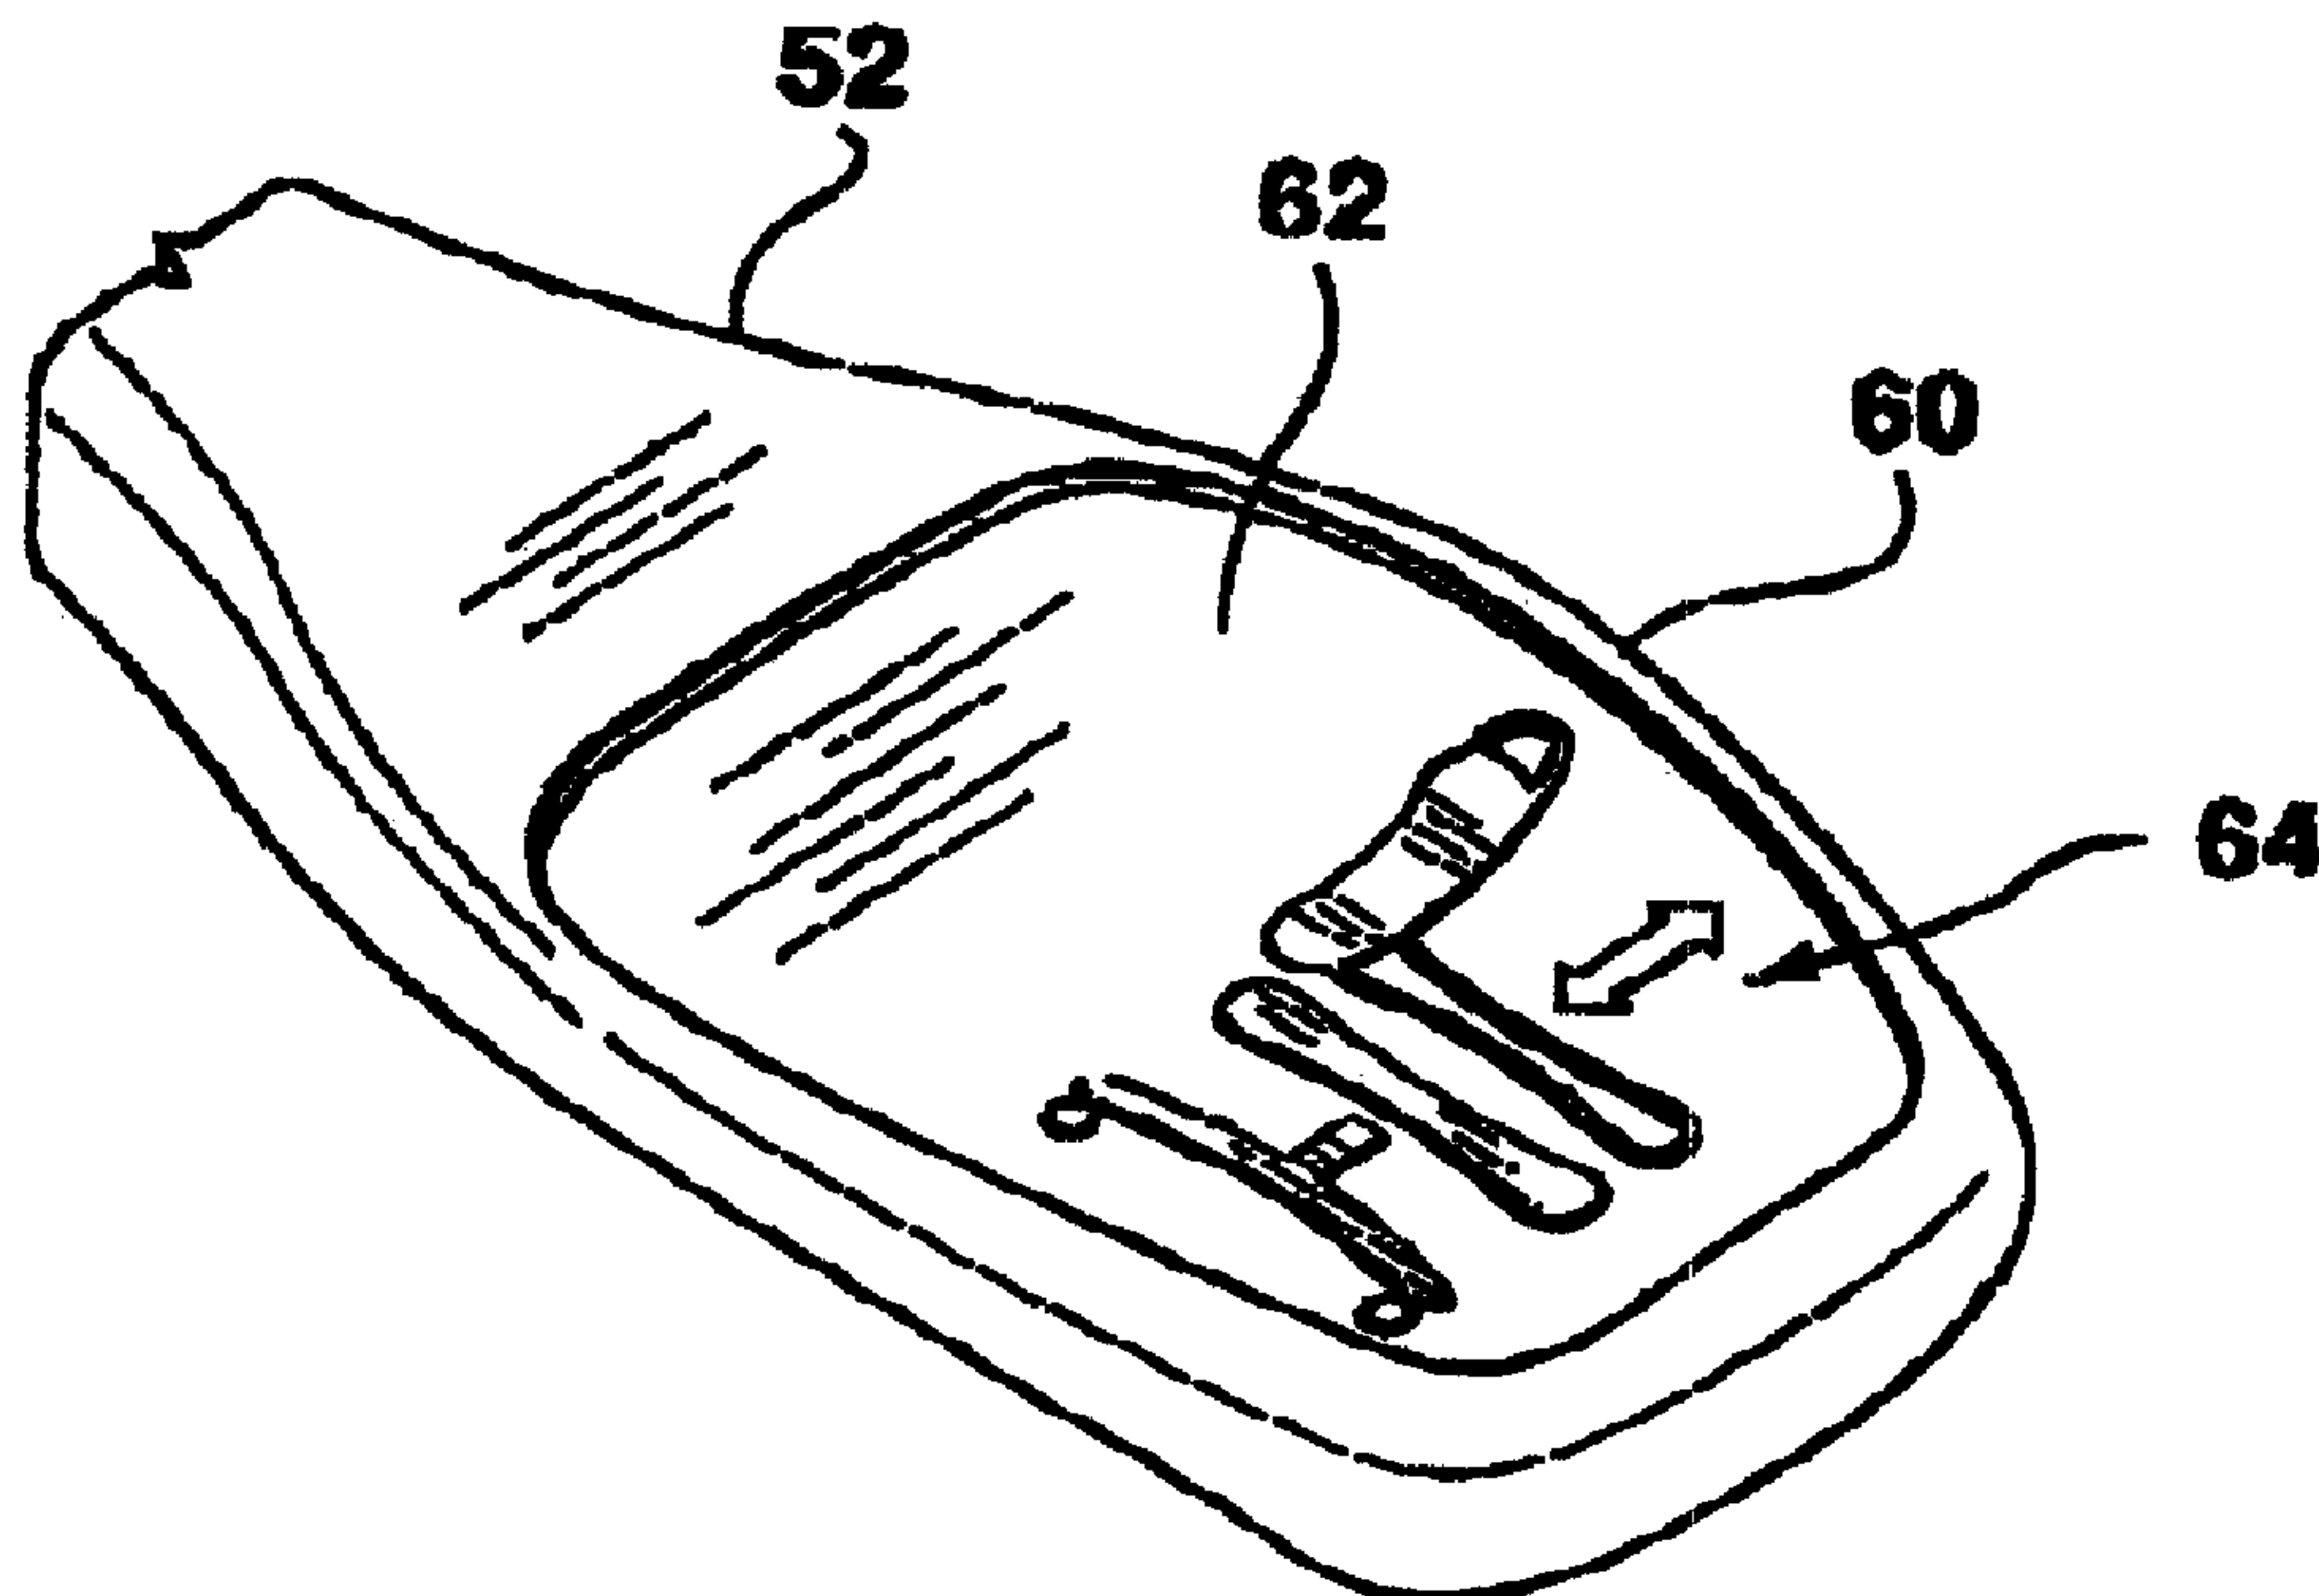

(57) Abrégé/Abstract:

A chair control actuator, such as a chair control paddle, is provided with a surface relief. The surface relief depicts a chair in two different positions illustrative of different chair positions which may result from use of said actuator. The surface relief has solid relief areas depicting a first of the two positions and outline relief areas depicting a second of the two positions.

ABSTRACT

A chair control actuator, such as a chair control paddle, is provided with a surface relief. The surface relief depicts a chair in two different positions illustrative of different chair positions which may result from use of said actuator. The surface relief has solid relief areas depicting a first of the two positions and outline relief areas depicting a second of the two positions.

CHAIR CONTROL ACTUATOR WITH DEPICTION

BACKGROUND OF THE INVENTION

5

This invention relates to a chair control actuator.

10 In an effort to accommodate a wide range of user's preferences and physical characteristics, adjustable chairs have been manufactured with an increasing number of possible adjustments. Each new adjustment feature typically requires a new actuator. For modern office chairs, the result can be a chair control festooned with actuators. In consequence, a new or infrequent user of a chair may engage in considerable experimentation before succeeding in effecting desired chair adjustments.

15 US6,227,615 to Newhouse addresses this problem by providing a card with a pictorial guide for operating the adjustable chair. A device mounts the card to the bottom of the seat of the chair and allows the card to move between an extended position wherein the pictorial guide is visible to an occupant of the chair and a retracted position wherein the pictorial guide is not visible to the occupant of the chair. Also, the mounting device holds the card so that the
20 orientation of the pictorial guide corresponds to the orientation of the controls for adjusting the chair when the card is in the extended position.

The approach of Newhouse, while helpful, requires that a user know of the existence of the card and be able to properly correlate the depiction of the controls with the actual controls.
25 Additionally, the approach is dependent upon the pictorial guide not becoming dislodged from the chair.

Therefore, there remains a need for chair controls that are easily understood by a user even given wear and tear on the chair.

30

SUMMARY OF INVENTION

A chair control actuator, such as a chair control paddle, is provided with a surface relief. The surface relief depicts a chair in two different positions illustrative of different chair positions which may result from use of the actuator. The surface relief has solid relief areas depicting a first of the two positions and outline relief areas depicting a second of the two positions.

The invention also contemplates a chair control mechanism having such chair control actuators.

Other features and advantages will become apparent upon review of the following description in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the figures which disclose example embodiments of the invention:

figure 1 is a side view of a chair to which the teachings of this invention may be applied,

figure 2 is a perspective view of the chair control mechanism of the chair of **figure 1**,

figure 3 is a top perspective view of the end of an actuator of the chair control mechanism of **figure 2**,

figure 4 is a bottom perspective view of the actuator end of **figure 3**,

figure 5 is a top view of the actuator end of **figure 3**,

figure 6 is a bottom view of the actuator end of **figure 3**,

figure 7 is a side view of the actuator end of **figure 3**,

figure 8 is an end view of the actuator end of **figure 3**,

figure 9 is a cross-sectional view along the lines IX-IX of **figure 5**, and

figures 10 to 12 are top views of other actuator ends.

DETAILED DESCRIPTION

Turning to **figure 1**, a chair **20** has a base **22**, seat **24**, and backrest **26** each joined to chair control mechanism **30**. More particularly, turning to **figure 2** along with **figure 1**, the chair control mechanism **30** has a main frame **32** with a cylindrical opening **34** which receives the end of air cylinder **28** of the base **22** of chair **20**. A seat plate **36** and a back bracket **38** of the chair control are pivotably mounted to the main frame **32**. The seat plate **36** has mounting flanges **40** to allow the mounting of seat **24** to the seat plate. The back bracket **38** receives the arm **29** of backrest **26** in order to mount the backrest of the chair.

Chair control mechanism **30** has a number of actuators including actuators **50**, **52**, and **54**. Actuator **50** has two positions, one which locks seat plate **36** in a fixed orientation with respect to main frame **32** and the other which frees the seat plate to pivot with respect to the main frame. Thus, with actuator in its unlocking position, the seat of chair **20** is free to tilt forwardly or rearwardly with respect to the base **22** of the chair. Actuator **52** has a raised, inactive, position, and a lowered position whereat the actuator depresses the valve control finger (not shown) of the air control cylinder **28** thereby allowing a height adjustment of a chair having the chair control mechanism **30**. Actuator **54** has two positions, one which locks the backrest bracket **38** in fixed orientation with respect to main frame **32** and the other which frees the back bracket to pivot with respect to the main frame. Thus, with actuator **54** in its unlocking position, the backrest **26** of chair **20** is free to tilt rearwardly with respect to the base of the chair.

Figures 3 to 9 show the paddle-shaped end **60** of actuator **52**. With reference to **figures 3, 5, 7, and 9**, it will be apparent that the top surface of actuator end **60** has a recessed area **62** with a surface relief **64**, being a pictograph of chair **20** (**figure 1**), in two different positions. The two positions are illustrative of different chair positions which may result from use of actuator **52**. The surface relief **62** has solid relief areas **122**, **124**, and **126** pictorially representing, respectively, the base, seat, and backrest of chair **20**. The surface relief also has outline relief areas **224**, **226** depicting, respectively, the seat and a portion of the backrest of the chair in a second position. Each outline area is formed by a wall that is in relief. Thus, outline relief area **224** is a wall outlining the shape of the seat and outline relief area **226** is a

wall outlining a portion of the backrest. As will be apparent, the solid relief areas include portions of the chair **20** which are not controlled by actuator **52**.

By utilising solid relief areas to depict the chair in one position and outline areas to depict it in another, the two different positions of the chair are contrasted and, therefore, easily understood. Furthermore, given that this contrast is in relief, a user may be able to sufficiently discern the pictograph by touch. Thus, the pictograph can be, in effect, a type of Braille allowing a user to find a proper actuator without having to look down at the actuator.

The actuator also has a solid surface relief **150** depicting a double-headed arrow oriented to indicate a direction of change between the first position of the chair seat (relief **124**) and the second position of the chair seat (relief **224**).

As will be apparent from **figure 9**, the surface relief **64** is integrally formed with the end **60** of the actuator. In consequence, the relief will normally endure for the useful life of the actuator. One suitable material for the end of the actuator is glass-filled nylon.

With reference to **figures 4** and **6 to 8**, it will be apparent that the bottom surface of the actuator end **60** has a lip **66** with a pair of finger receiving notches **68**. These assist a user in comfortably grasping the actuator.

Figure 10 illustrates the surface relief **364** of actuator **50**. Solid relief portions **322**, **324**, and **326** pictographically depict the base, seat, and back of chair **20** (**figure 1**). Outline relief portions **424a**, **424b** depict the seat in a second position. Double-headed arrow **350** illustrates the direction of motion of the seat of chair **20** between the positions illustrated by relief portion **324** and that represented by relief portions **424a**, **424b**. Thus, the surface relief **364** illustrates possible adjustments to the chair with the actuator **50**.

Figure 11 illustrates the surface relief **564** of actuator **54**. Solid relief portions **522**, **524**, and **526** pictographically depict the base, seat, and back of chair **20** (**figure 1**). Outline relief portions **626a**, **626b** depict the back in a second position. Double-headed arrow **550** illustrates the direction of motion of the back of chair **20** between the positions illustrated by

relief portion **526** and that represented by relief portions **626a**, **626b**. Thus, the surface relief **564** illustrates possible adjustments to the chair with the actuator **54**.

Other chair controls could be equally represented in the manner described. For
5 example, a chair control which allowed simultaneous tilting of the seat and back of chair **20** could be as depicted by the relief **764** of actuator **80** of **figure 12**.

Other modifications will be apparent to those skilled in the art and, therefore, the invention is defined in the claims.

WHAT IS CLAIMED IS:

1. A chair control actuator comprising:
a surface relief depicting a chair in two different positions illustrative of different chair positions which may result from use of said actuator, said surface relief having solid relief areas depicting a first of said two positions and outline relief areas depicting a second of said two positions.
2. The actuator of claim 1 wherein said solid relief areas include portions of said depicted chair not controlled by said actuator.
3. The actuator of claim 1 further comprising a surface relief depicting a double-headed arrow oriented to indicate a direction of change between said first of two positions and said second of two positions.
4. The actuator of claim 1 further comprising a recessed area, said surface relief extending within said recessed area.
5. The actuator of claim 1 wherein said actuator has a paddle-shaped end bearing said surface relief.
6. The actuator of claim 5 wherein a top surface of said paddle-shaped end bears said surface relief.
7. The actuator of claim 6 wherein a bottom surface of said paddle has a lip with a pair of finger receiving notches.
8. A chair control paddle actuator comprising:
a surface relief depicting a chair in two different positions illustrative of different chair positions which may result from use of said actuator, said surface relief having solid relief areas depicting a first of said two positions and outline relief areas depicting a second of said two positions.

9. A chair control mechanism, comprising:
a plurality of chair control actuators, each actuator having a surface relief depicting a chair in two different positions illustrative of different chair positions which may result from use of said each actuator, said surface relief having solid relief areas depicting a first of said two positions and outline relief areas depicting a second of said two positions.
10. The control mechanism of claim 9 wherein said solid relief areas include portions of said depicted chair not controlled by said actuator.
11. The control mechanism of claim 10 wherein each said actuator further comprises a surface relief depicting a double-headed arrow oriented to indicate a direction of change between said first of two positions and said second of two positions.
12. The control mechanism of claim 11 wherein each said actuator further comprises a recessed area, said surface relief extending within said recessed area.
13. The control mechanism of claim 12 wherein said each actuator has a paddle-shaped end bearing said surface relief.
14. The control mechanism of claim 13 wherein a top surface of said paddle-shaped end bears said surface relief.
15. The control mechanism of claim 14 wherein a bottom surface of said paddle has a lip with a pair of finger receiving notches.

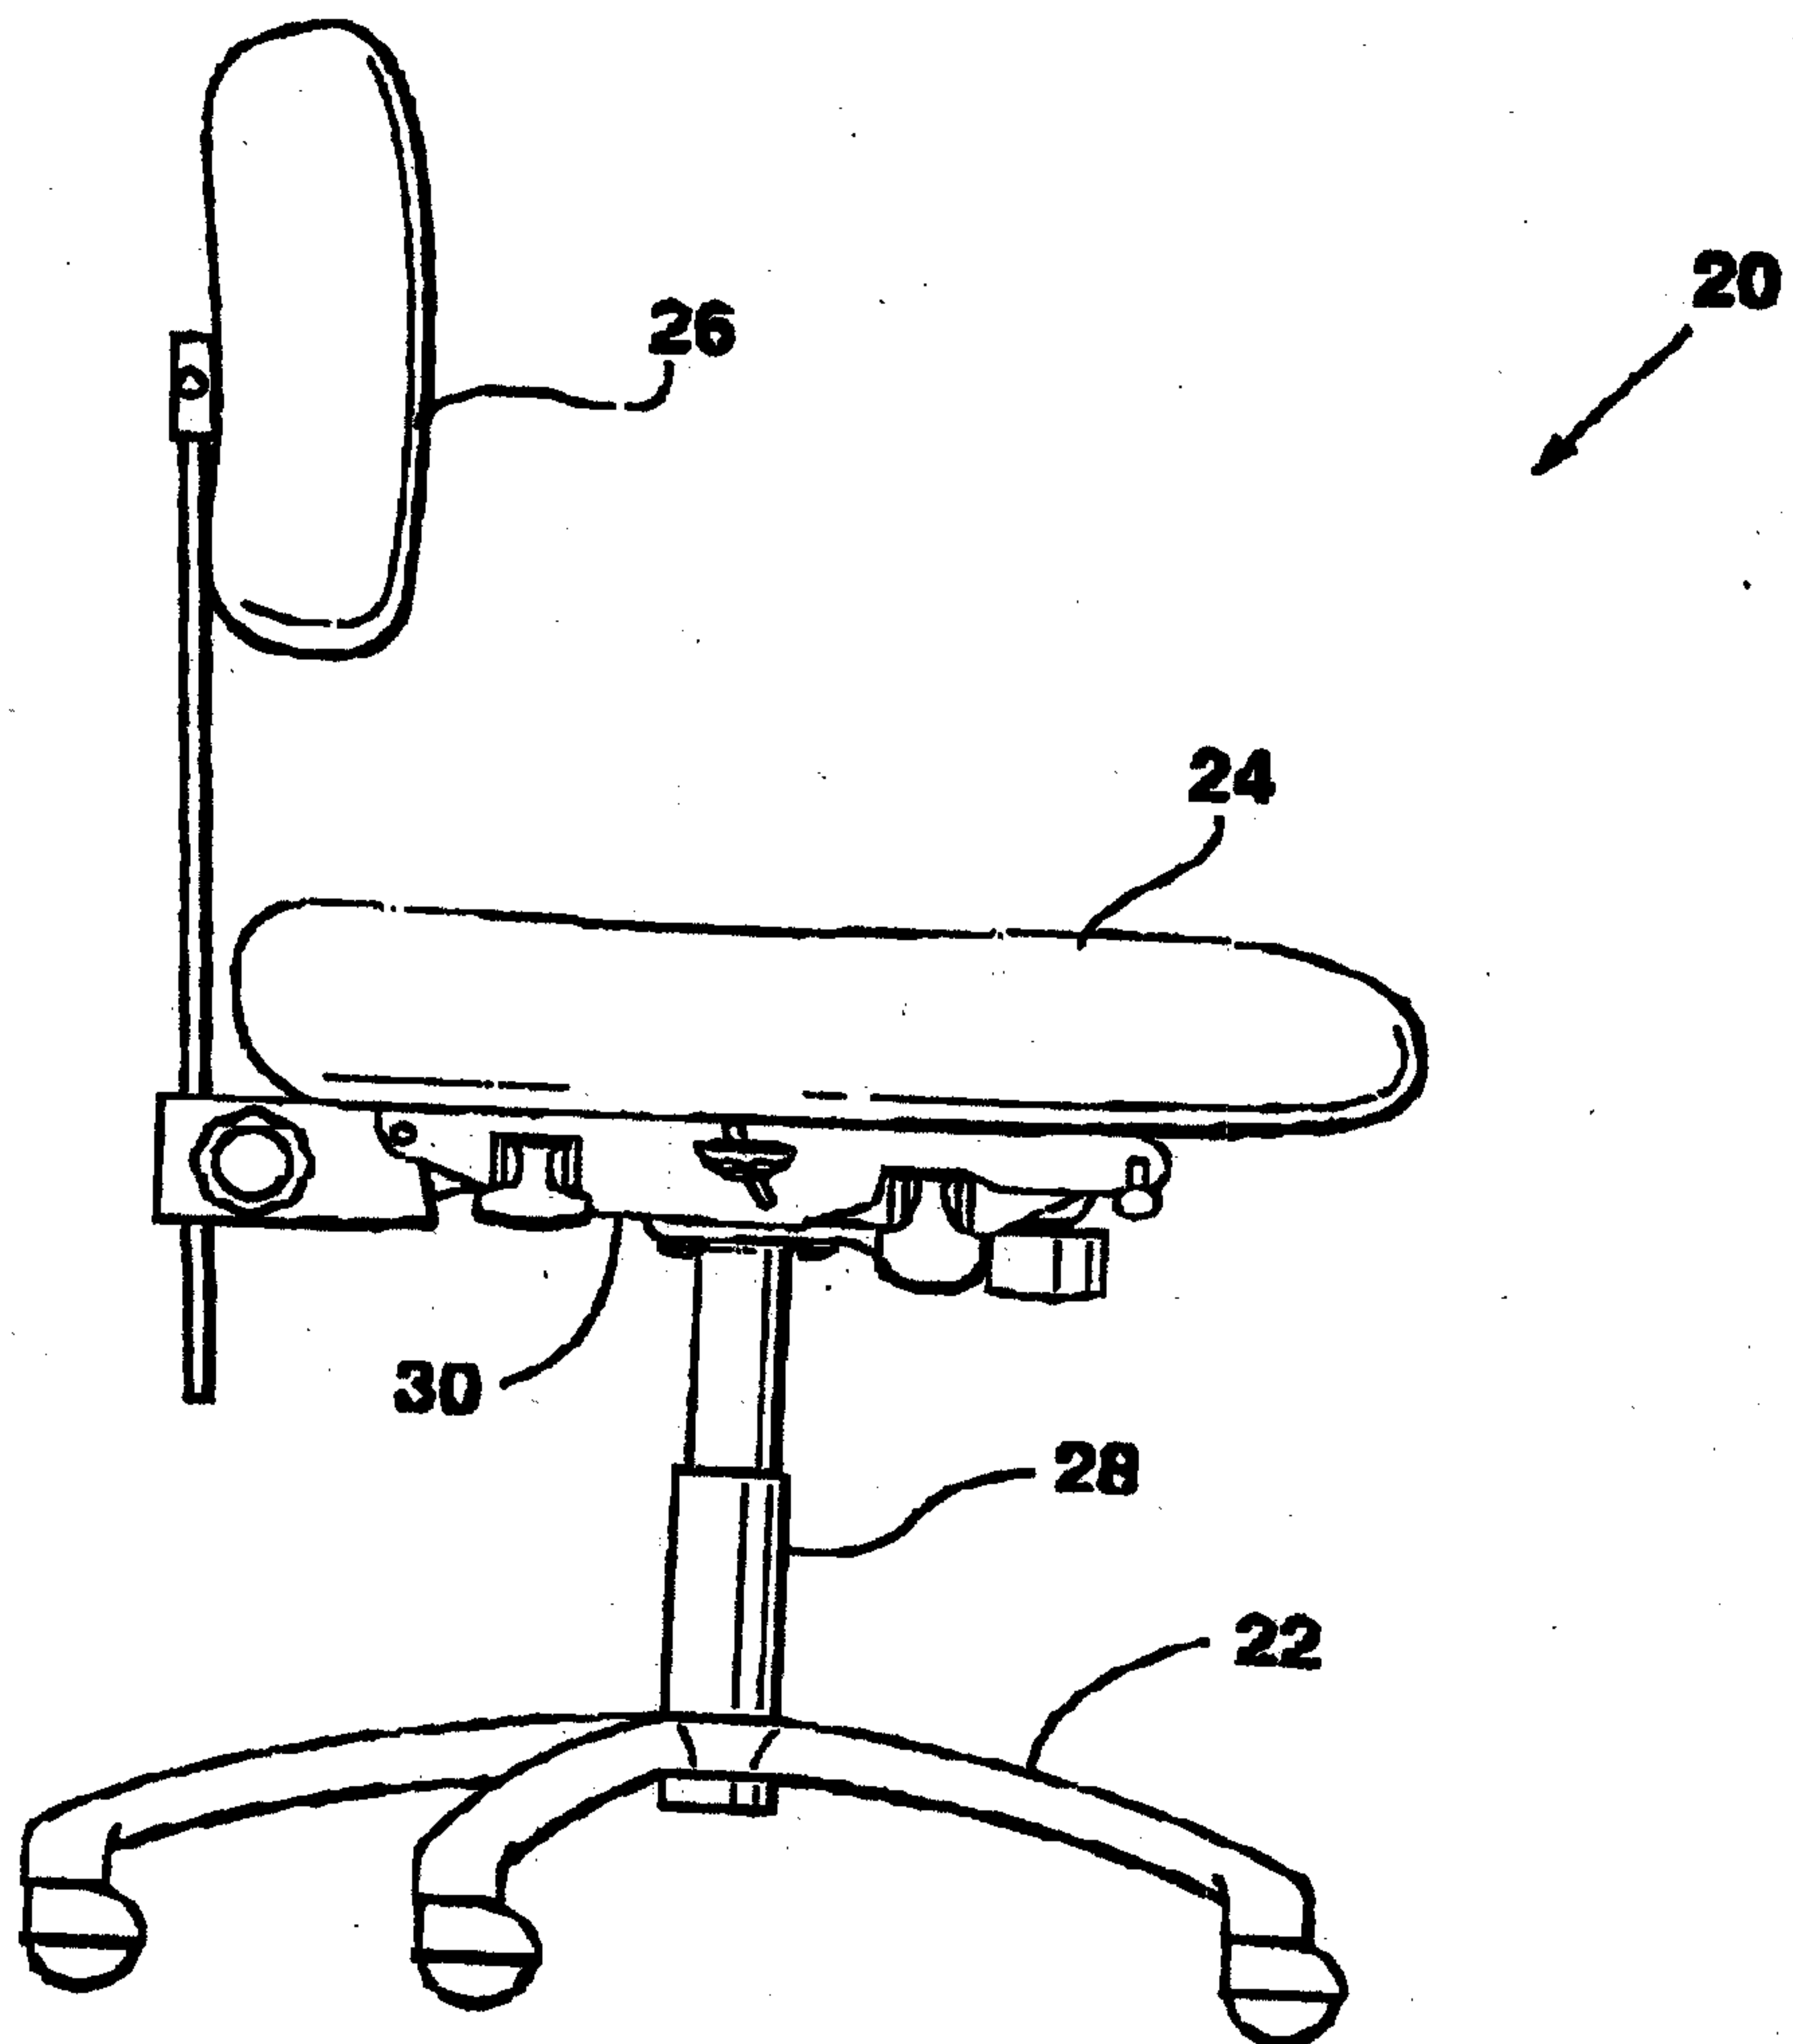


FIG. 1

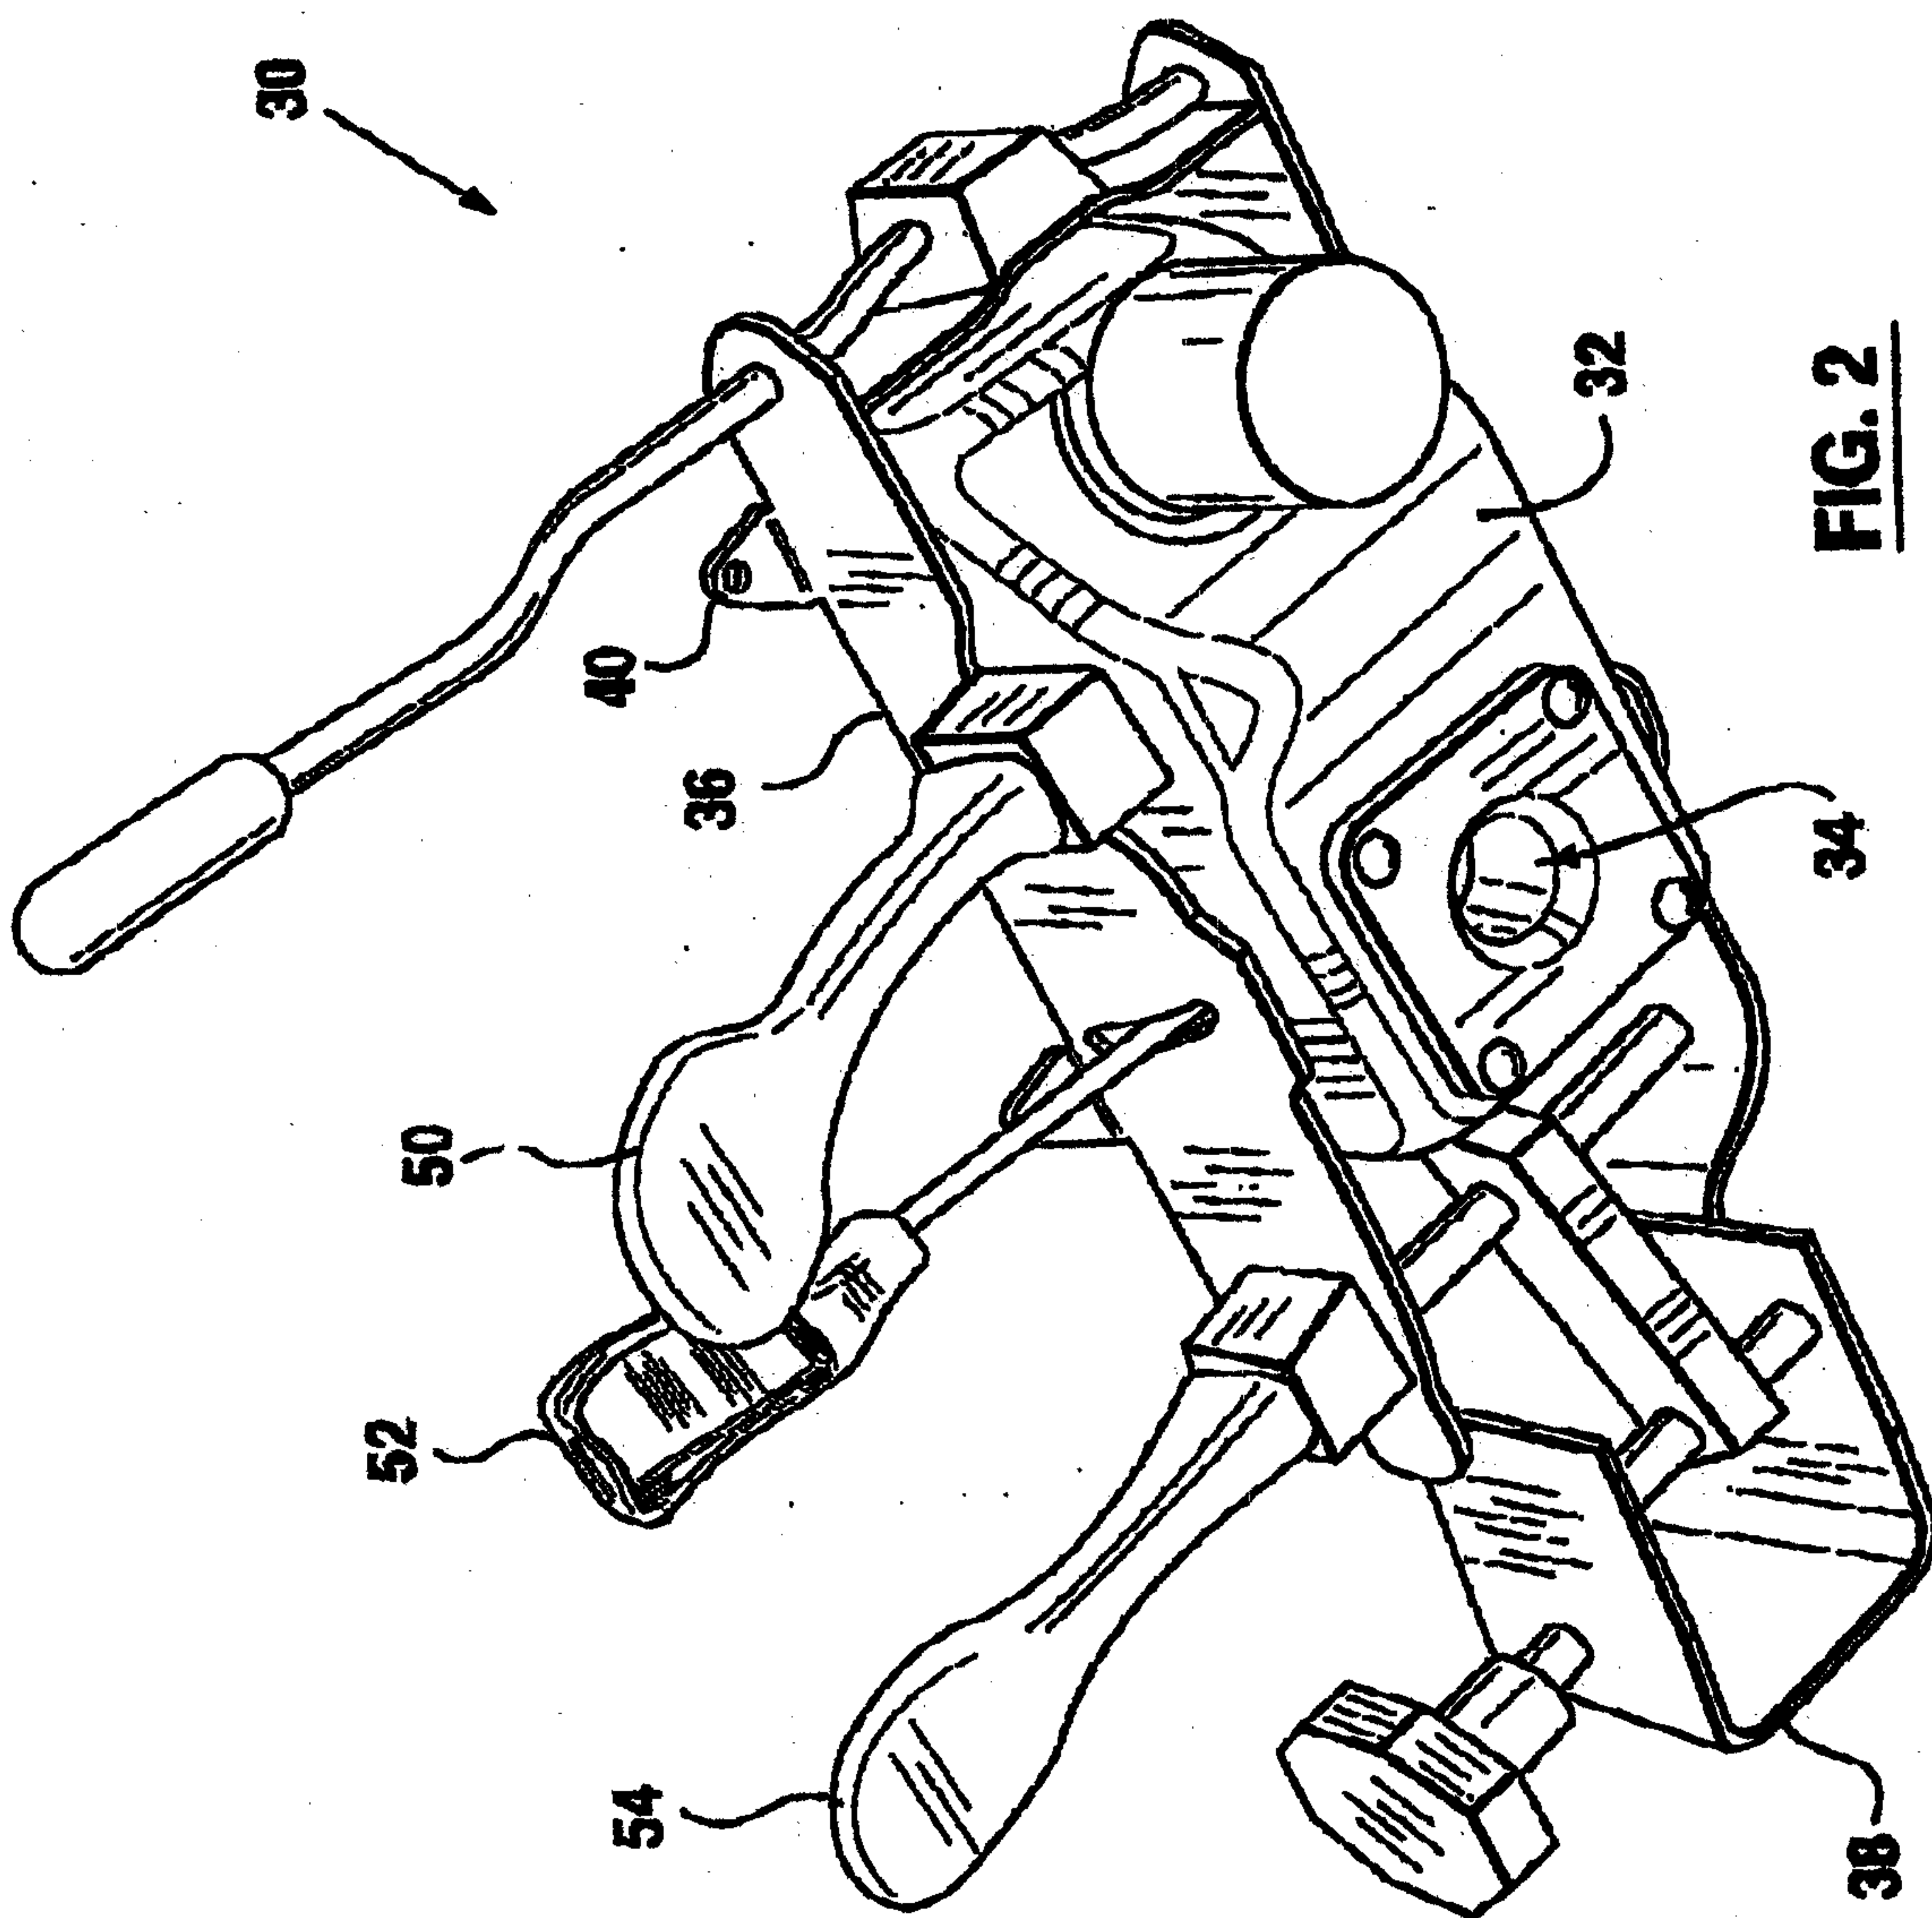


FIG. 2

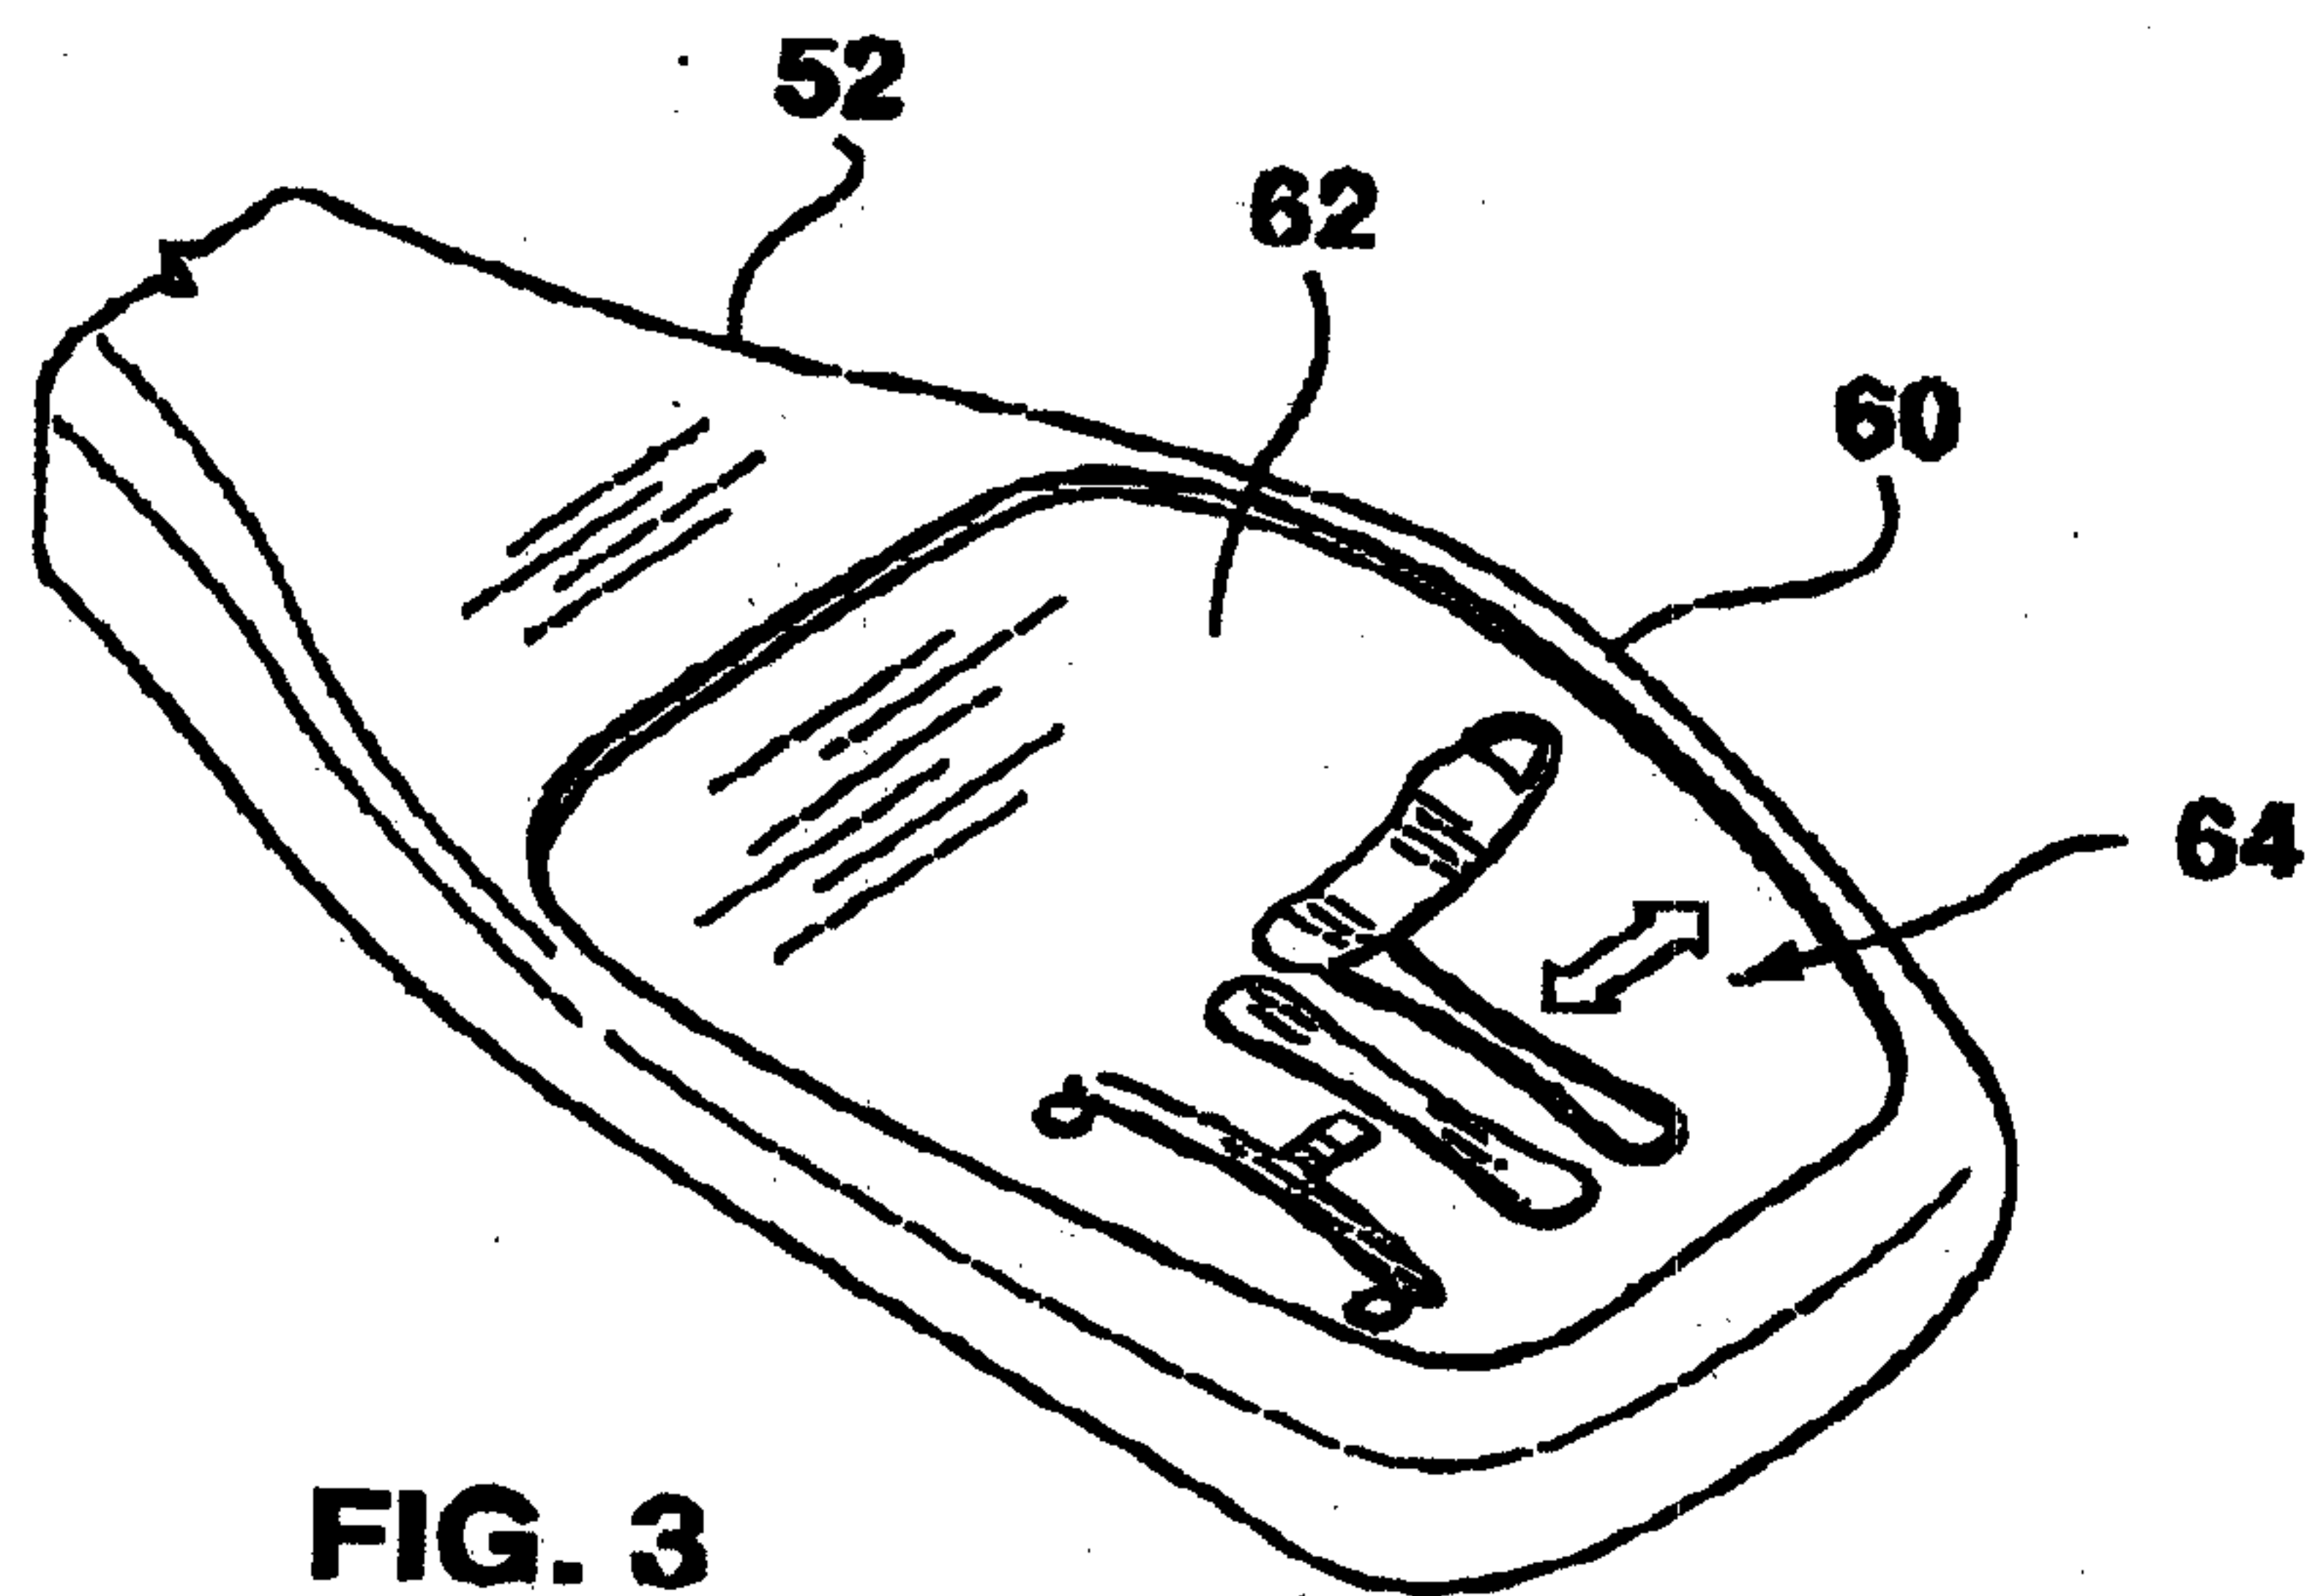


FIG. 3

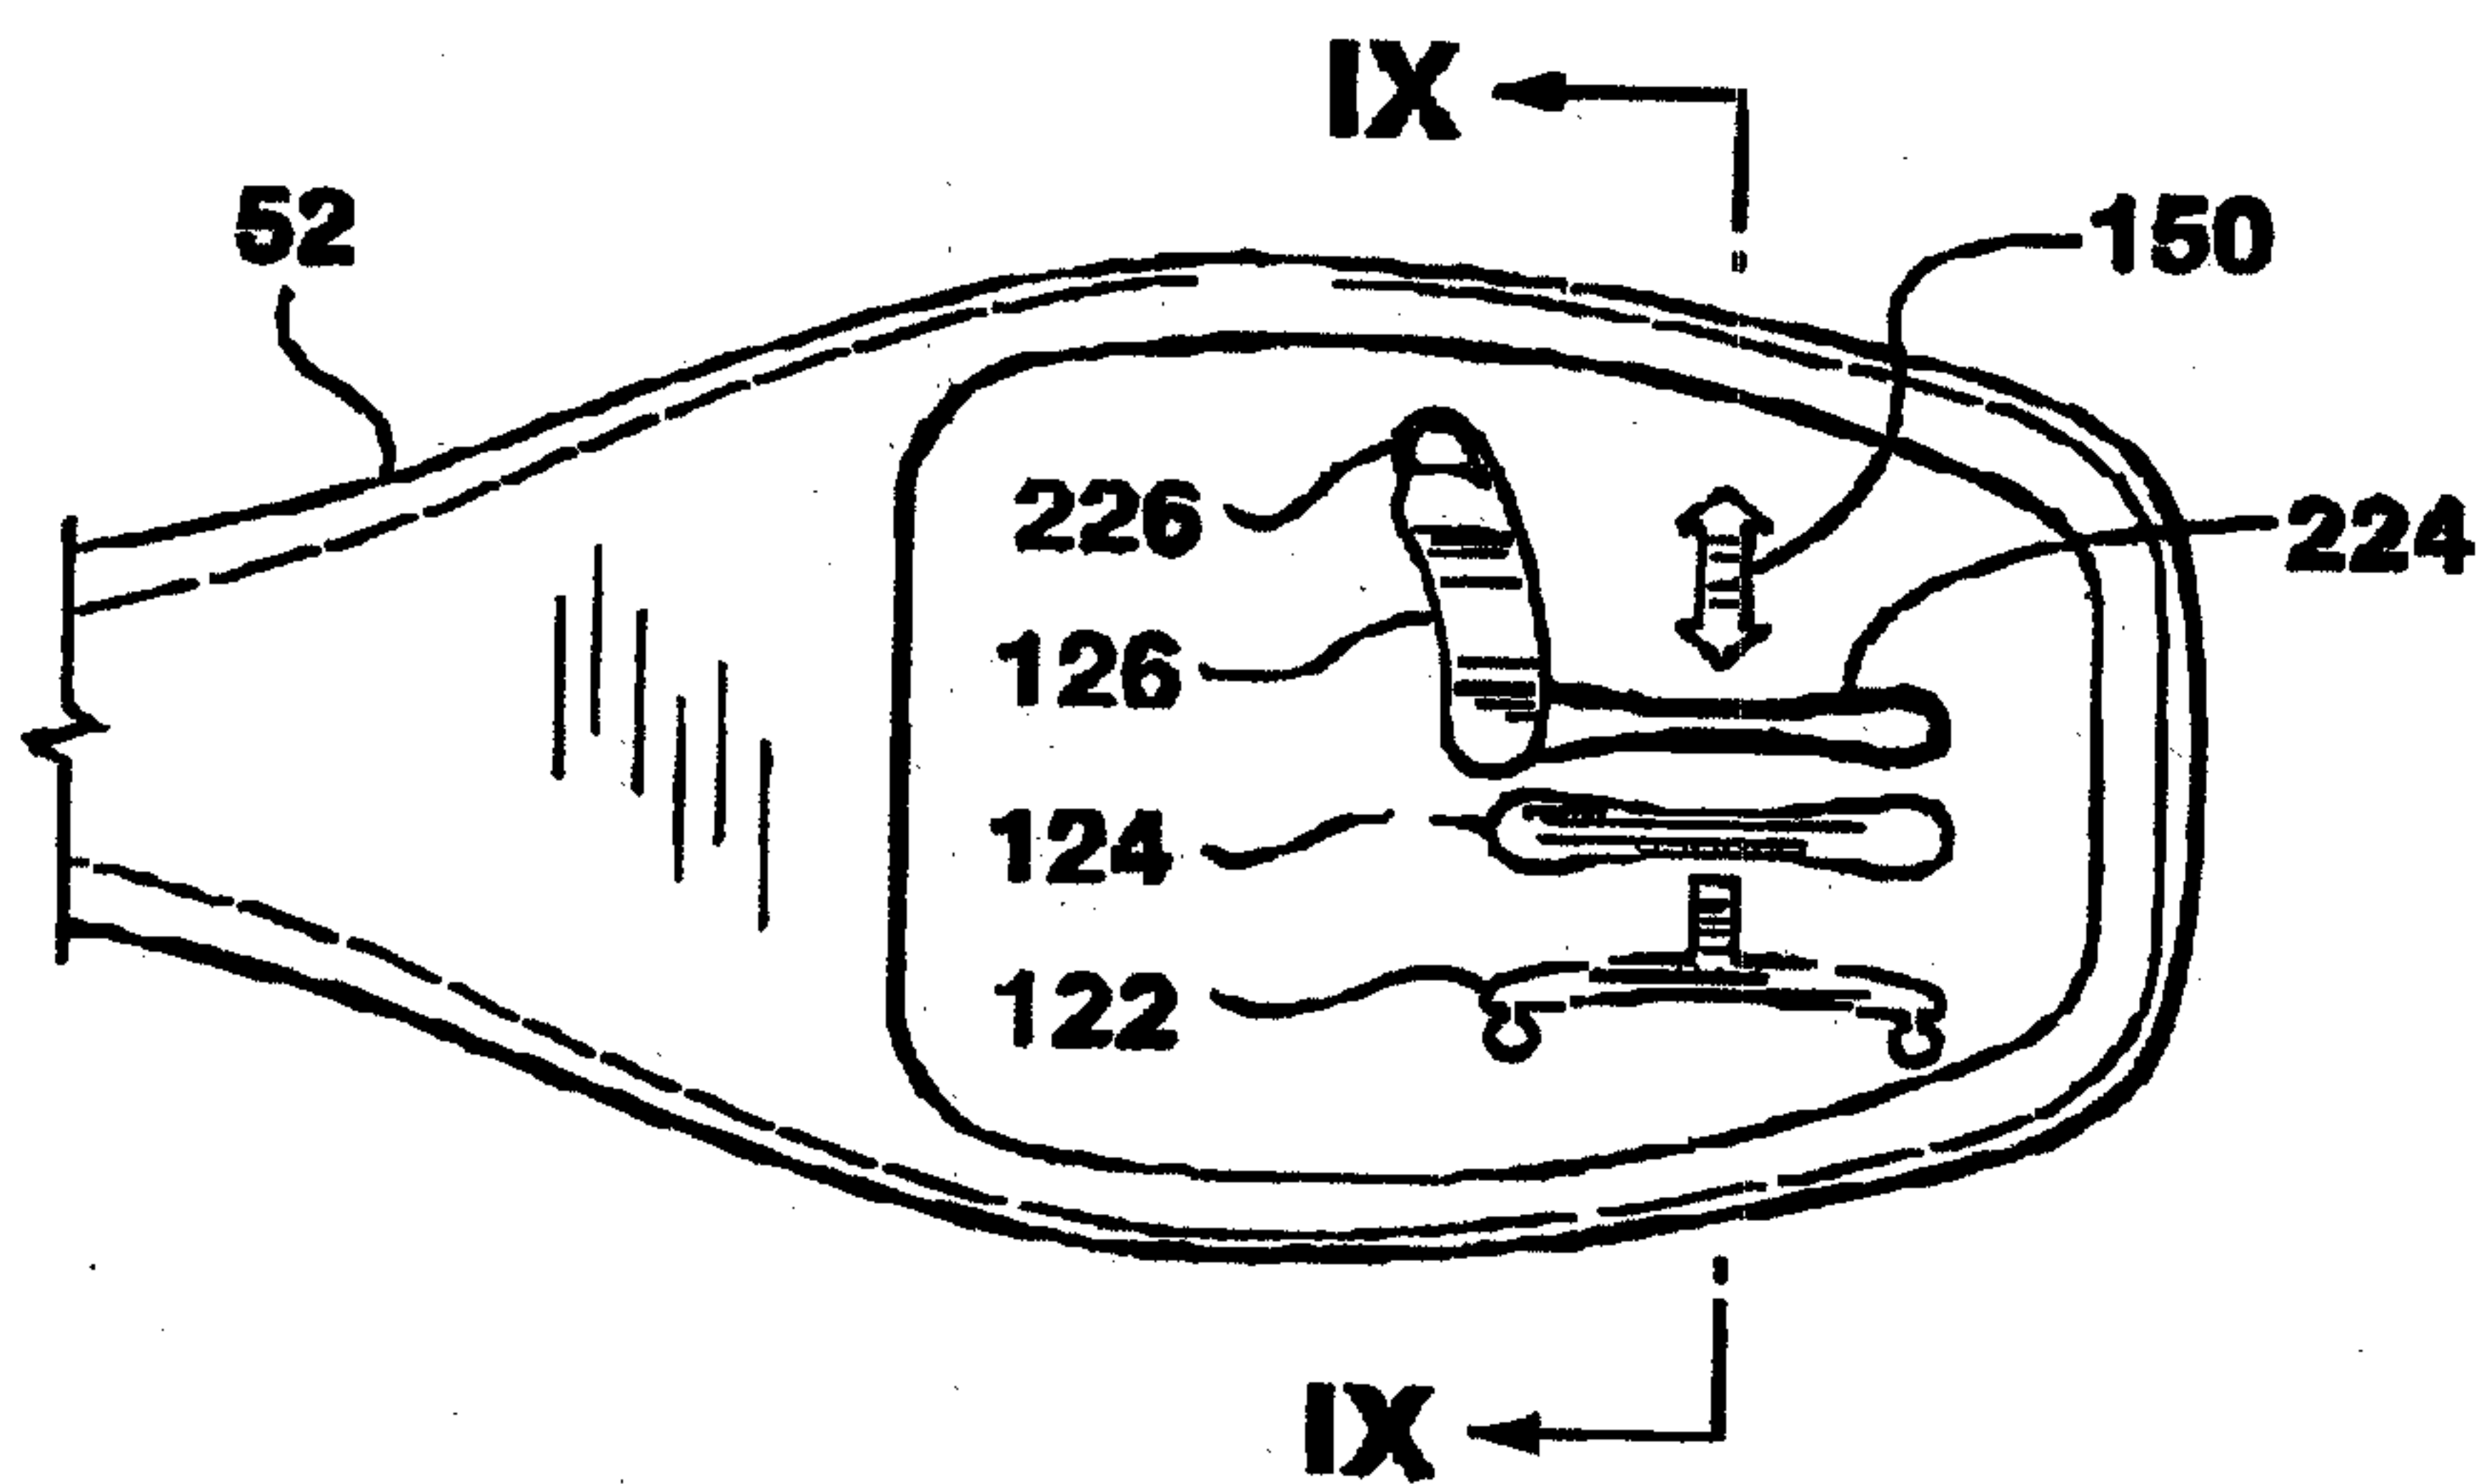


FIG. 5

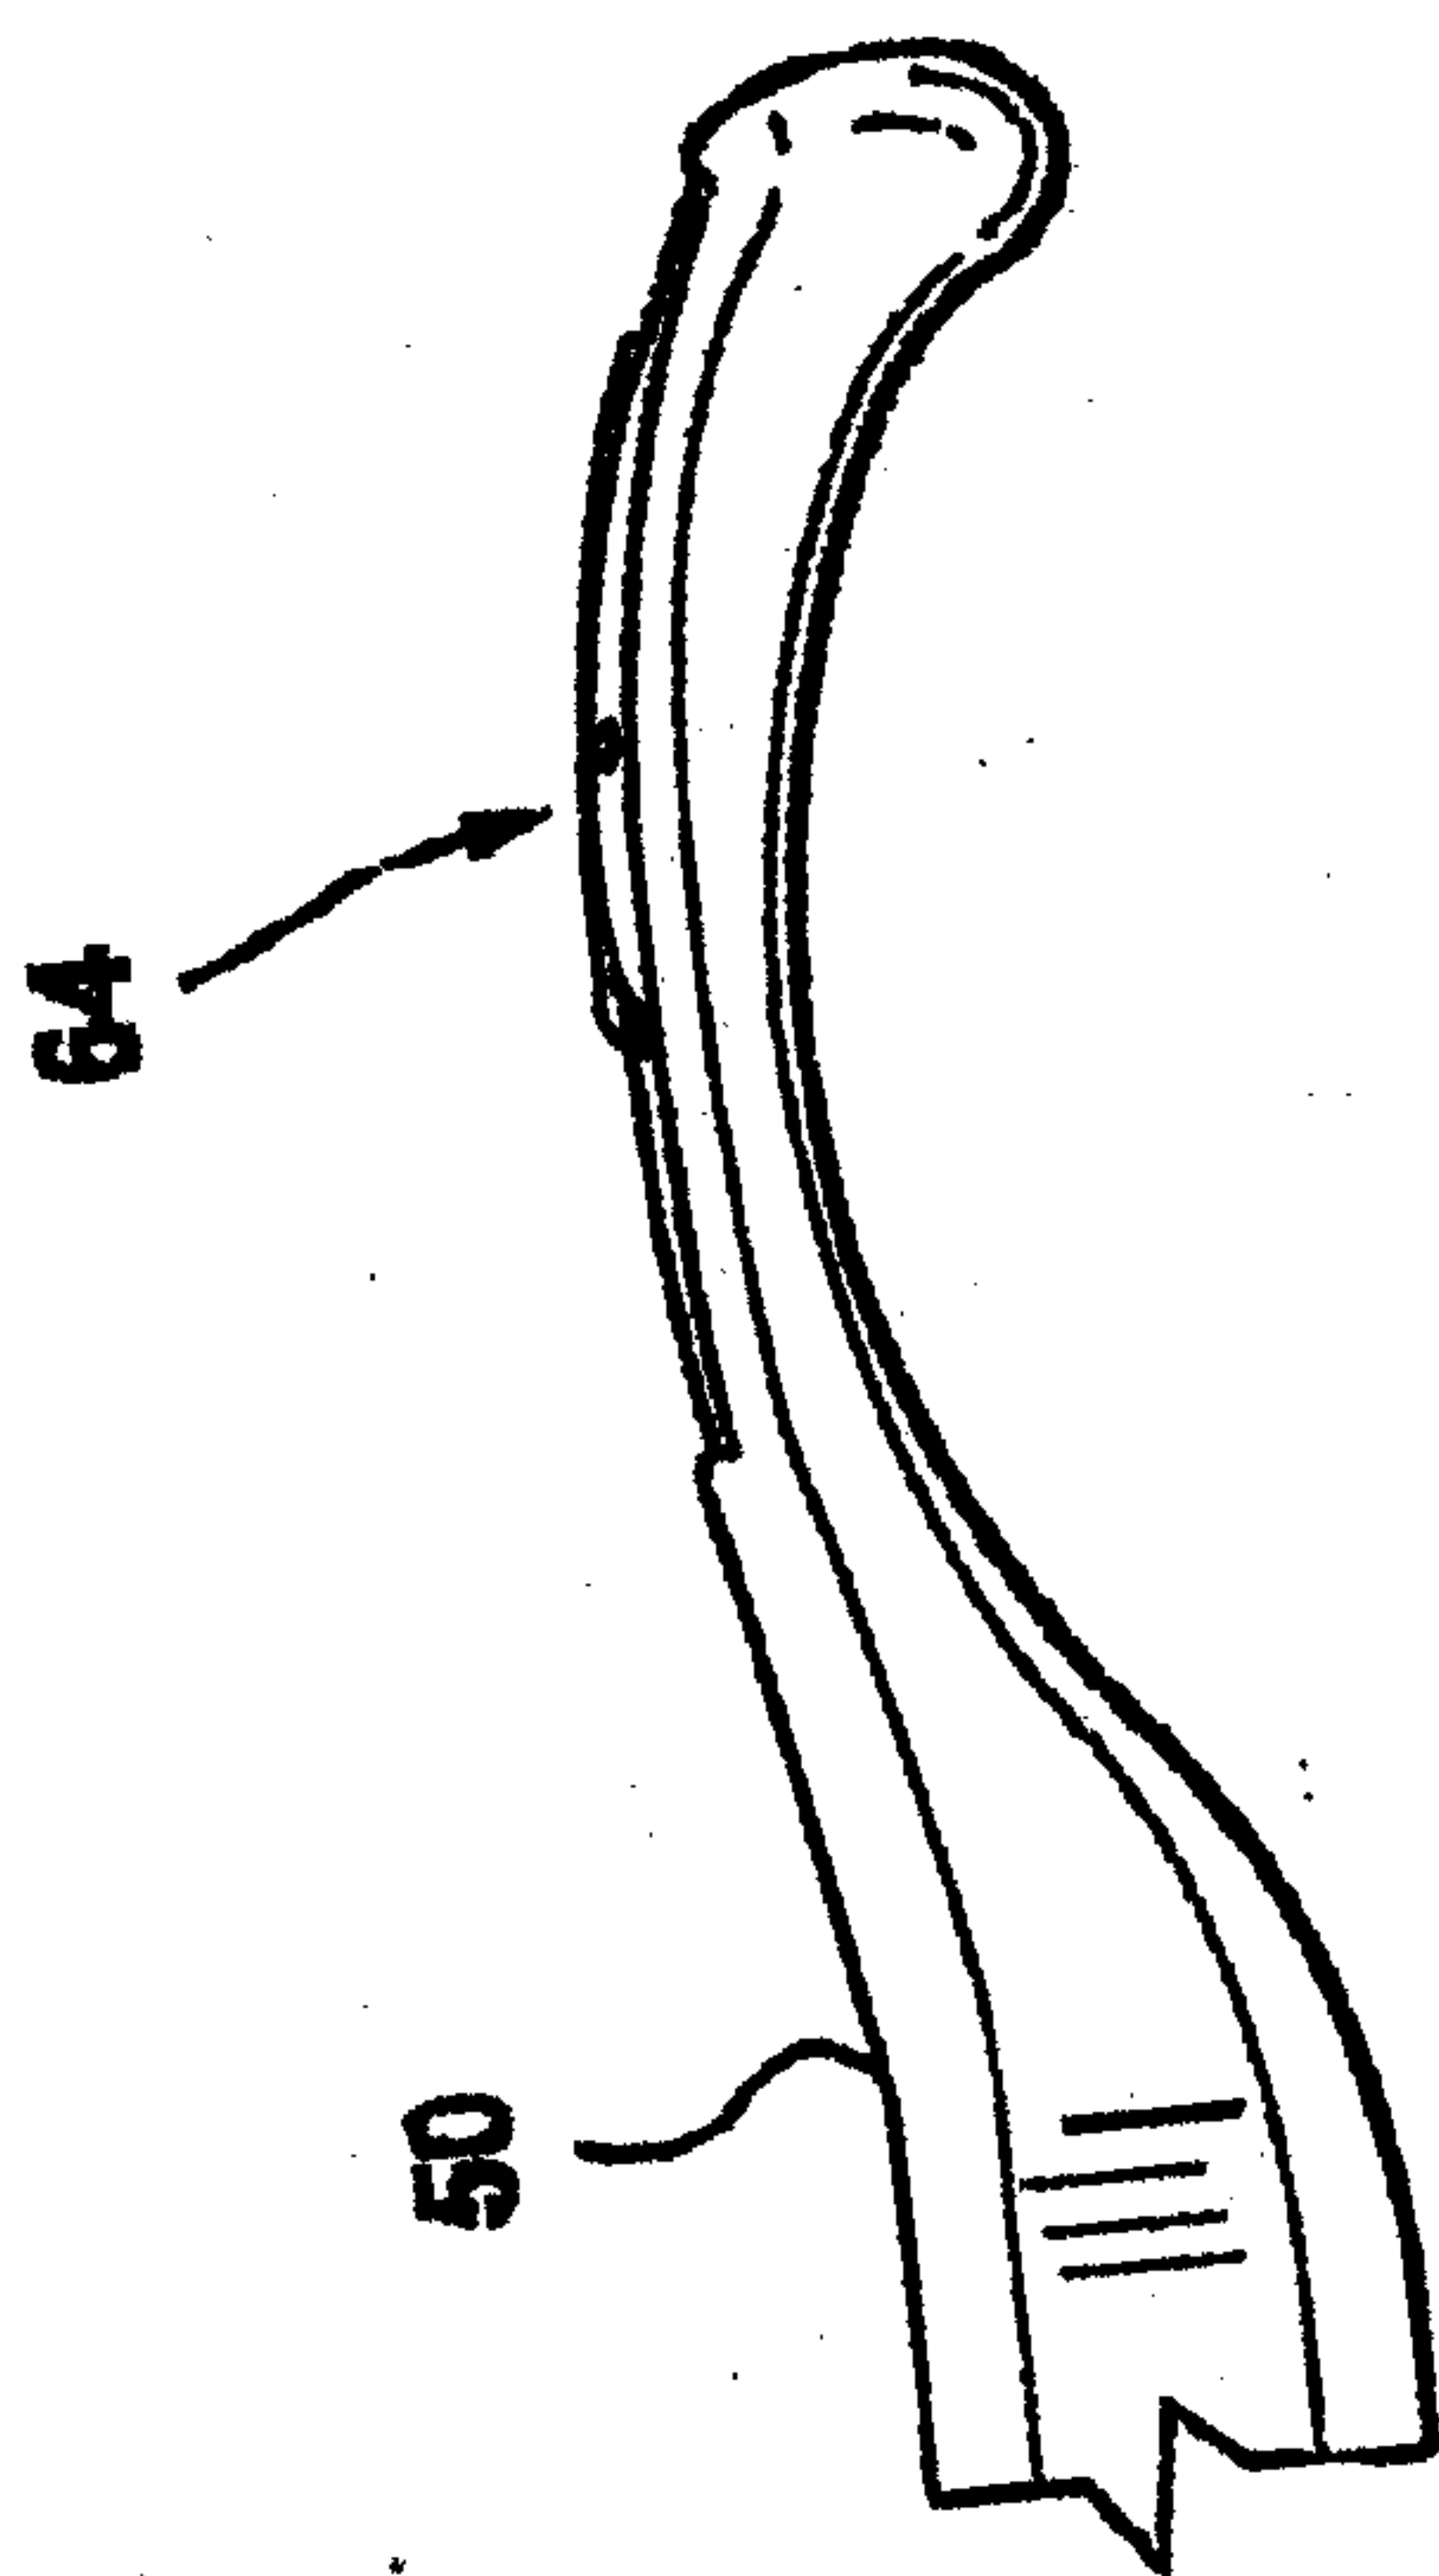


FIG. 7

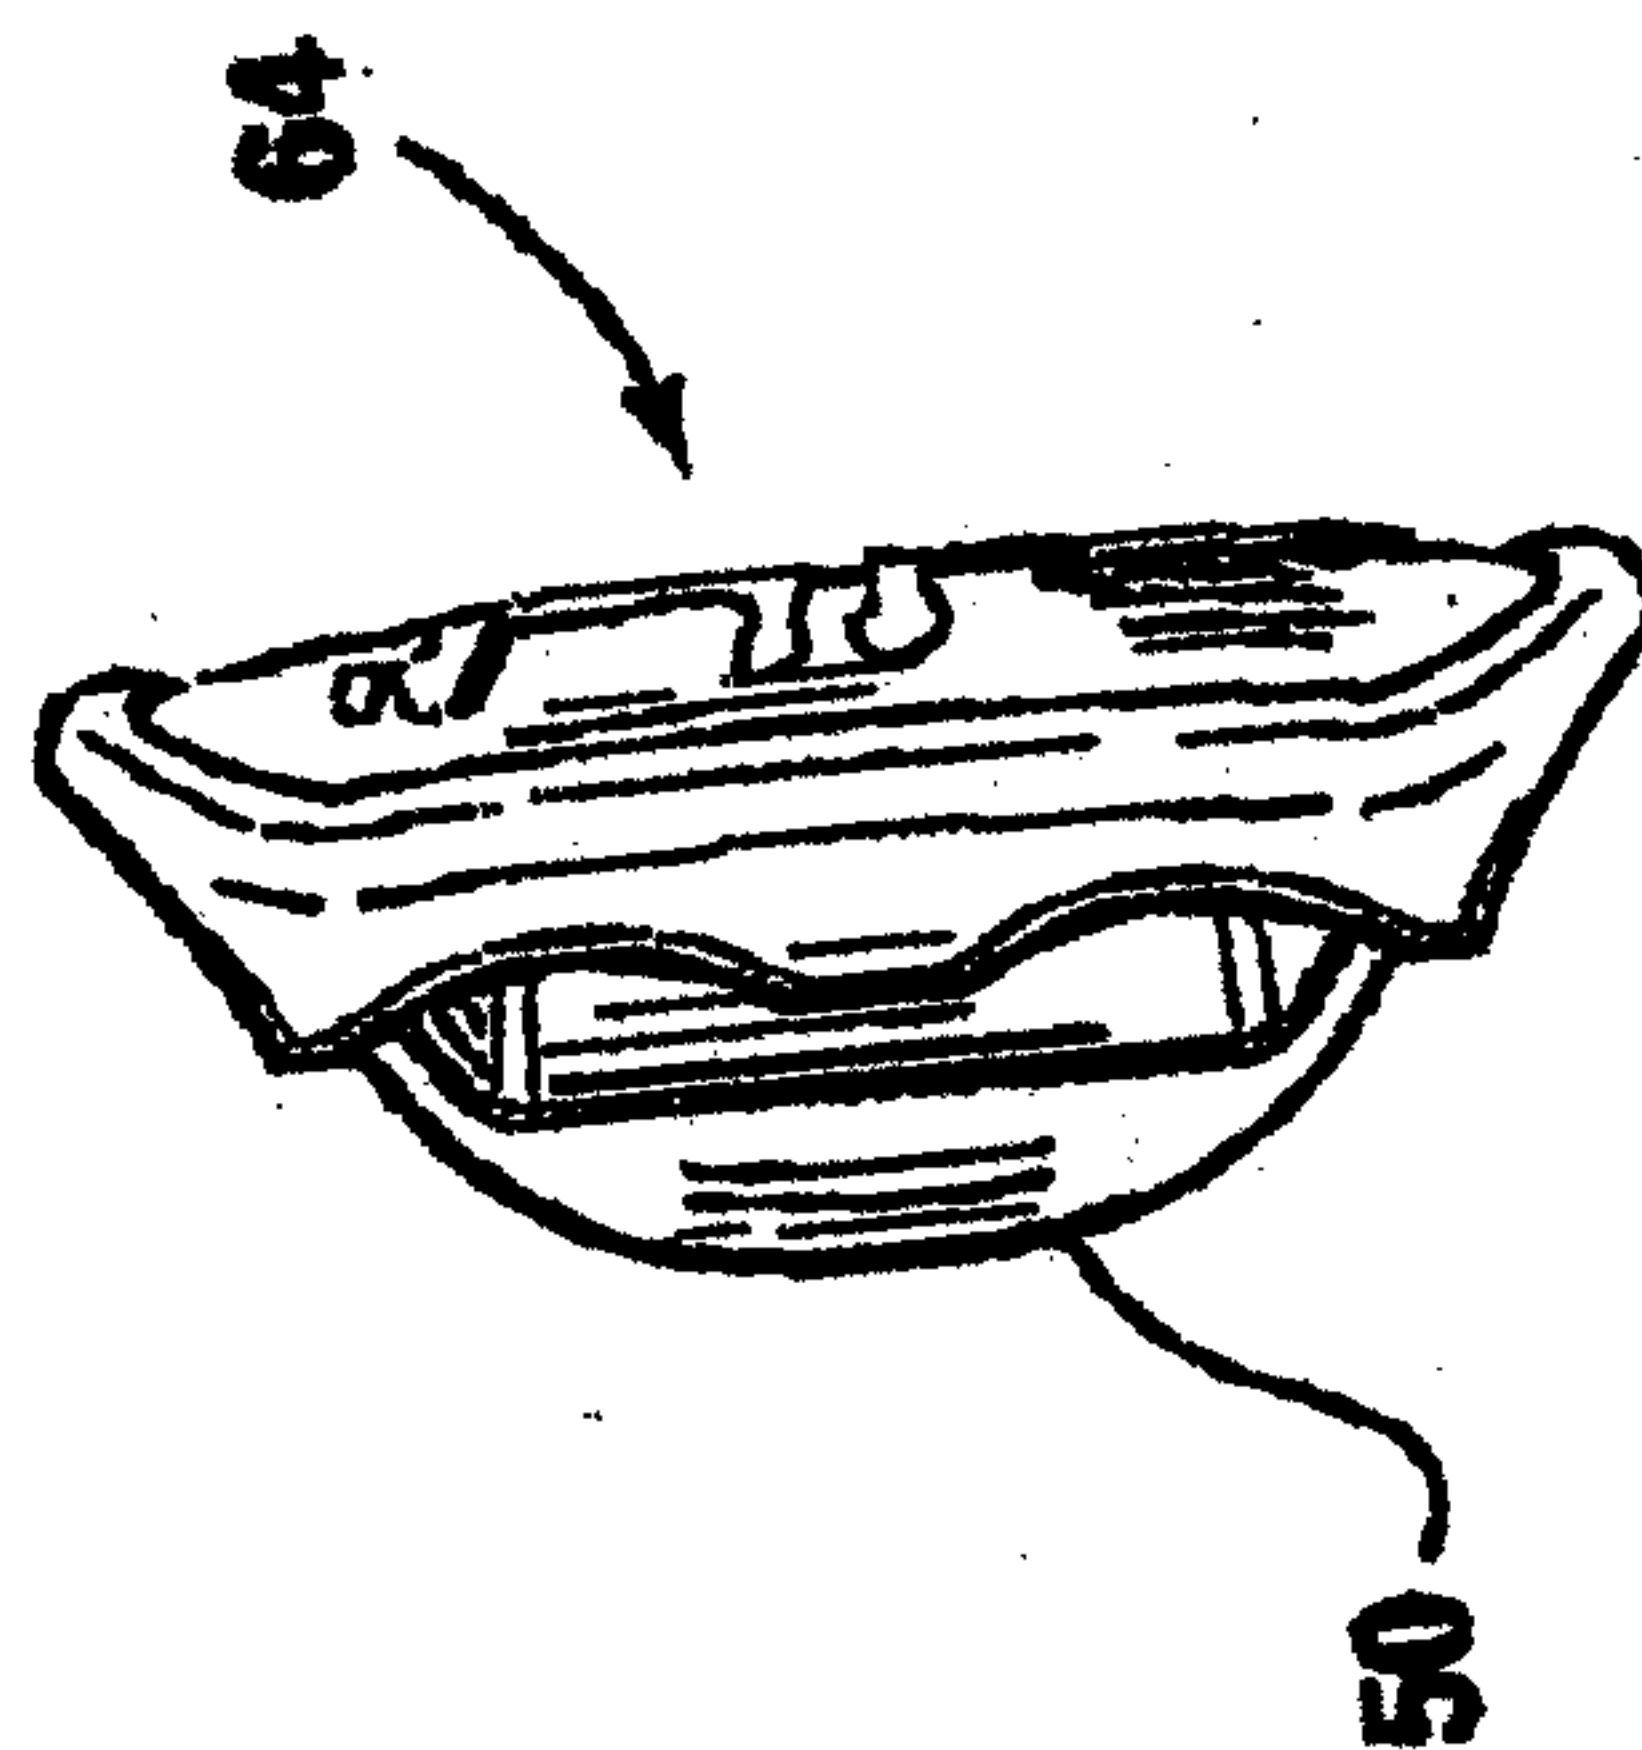


FIG. 8

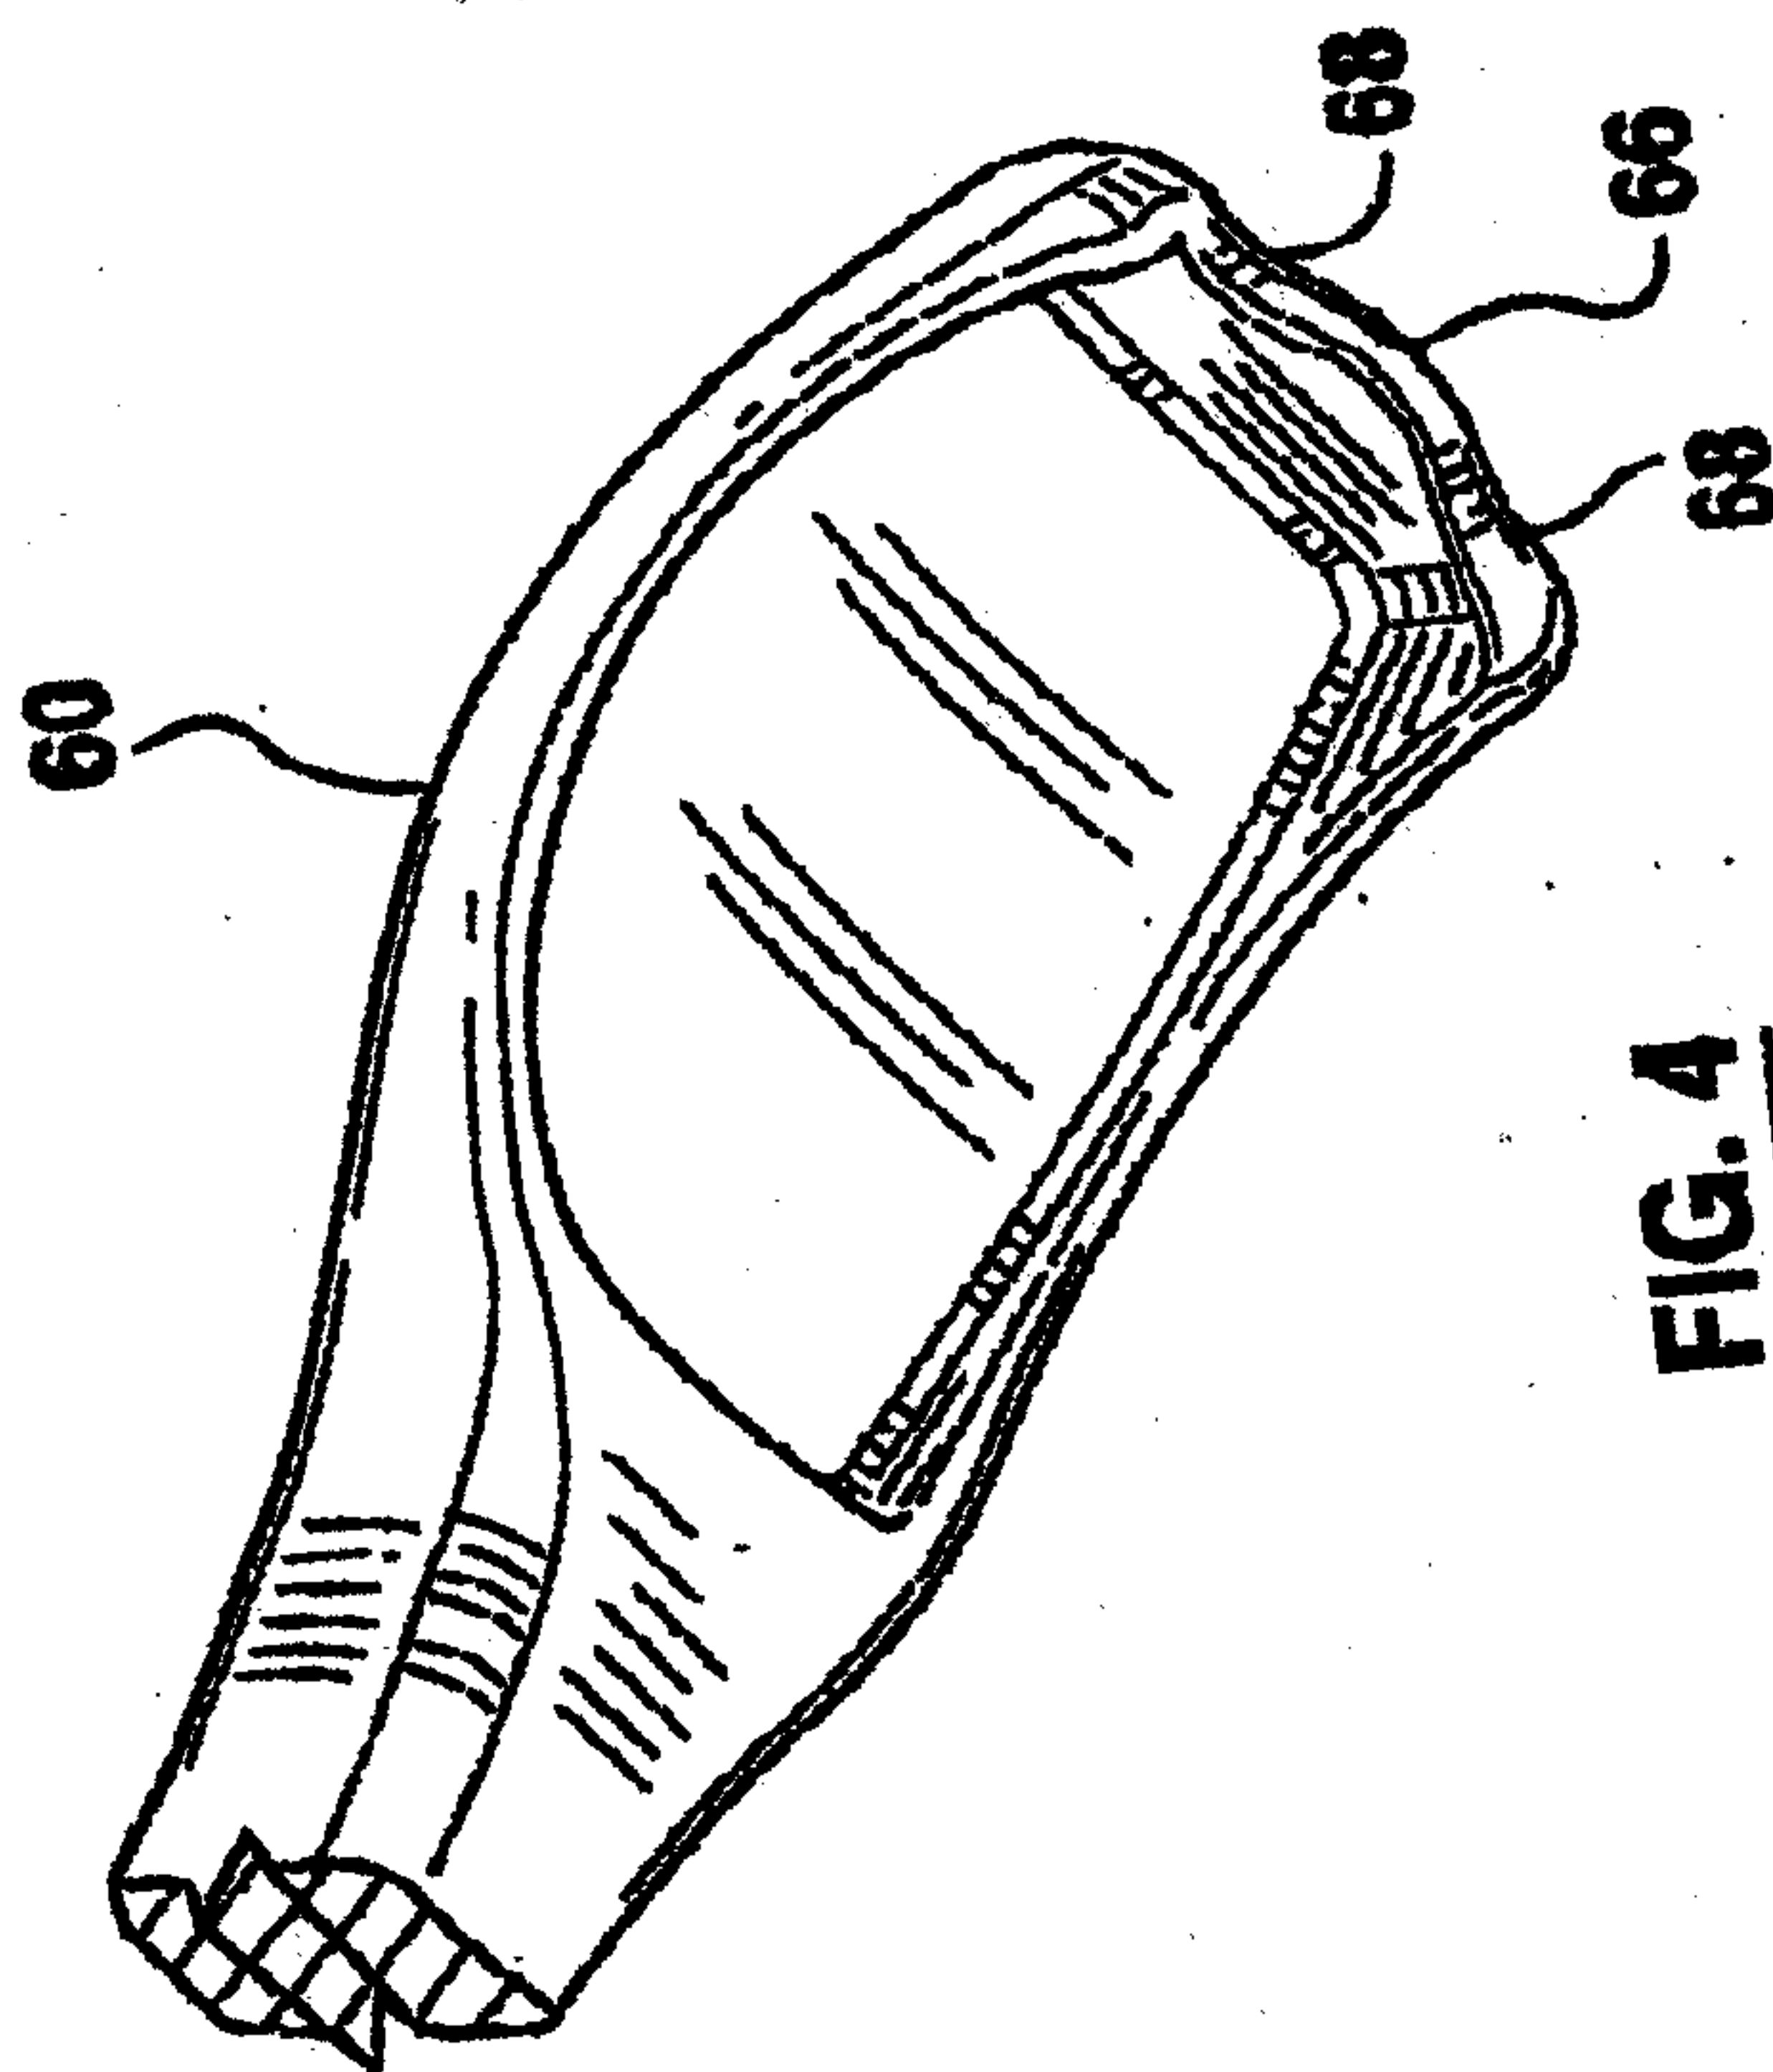


FIG. 4

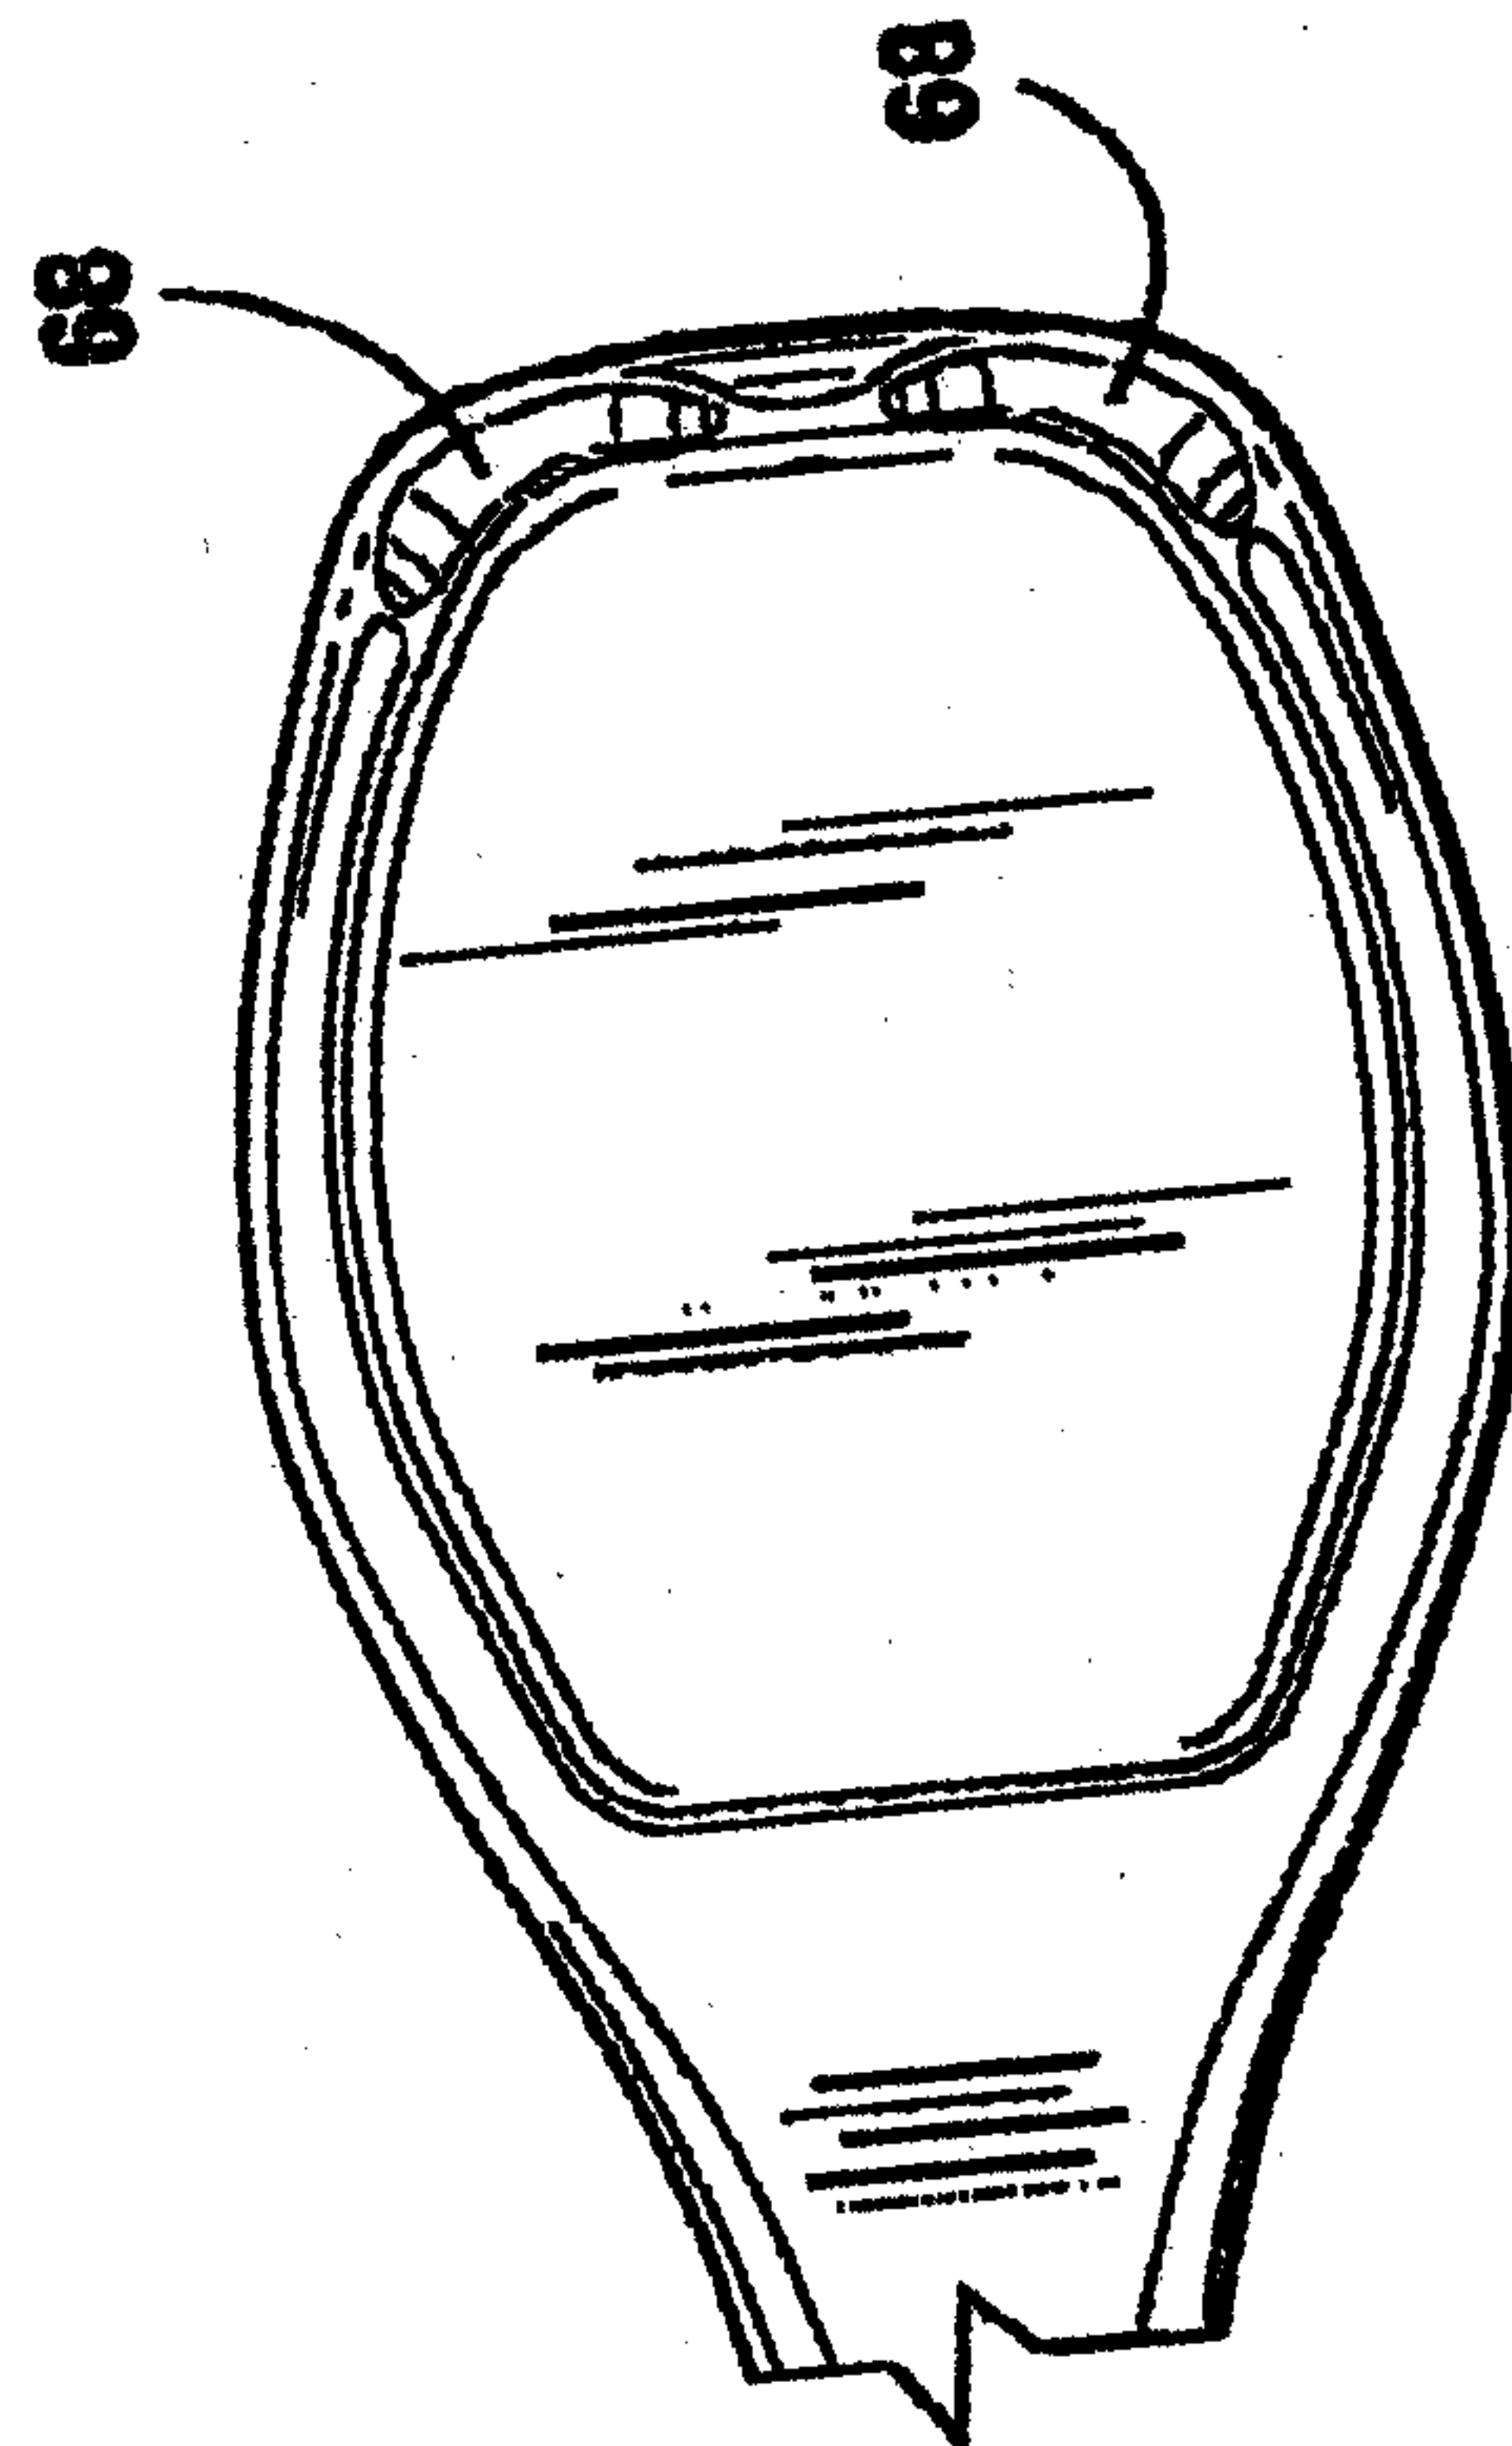


FIG. 6

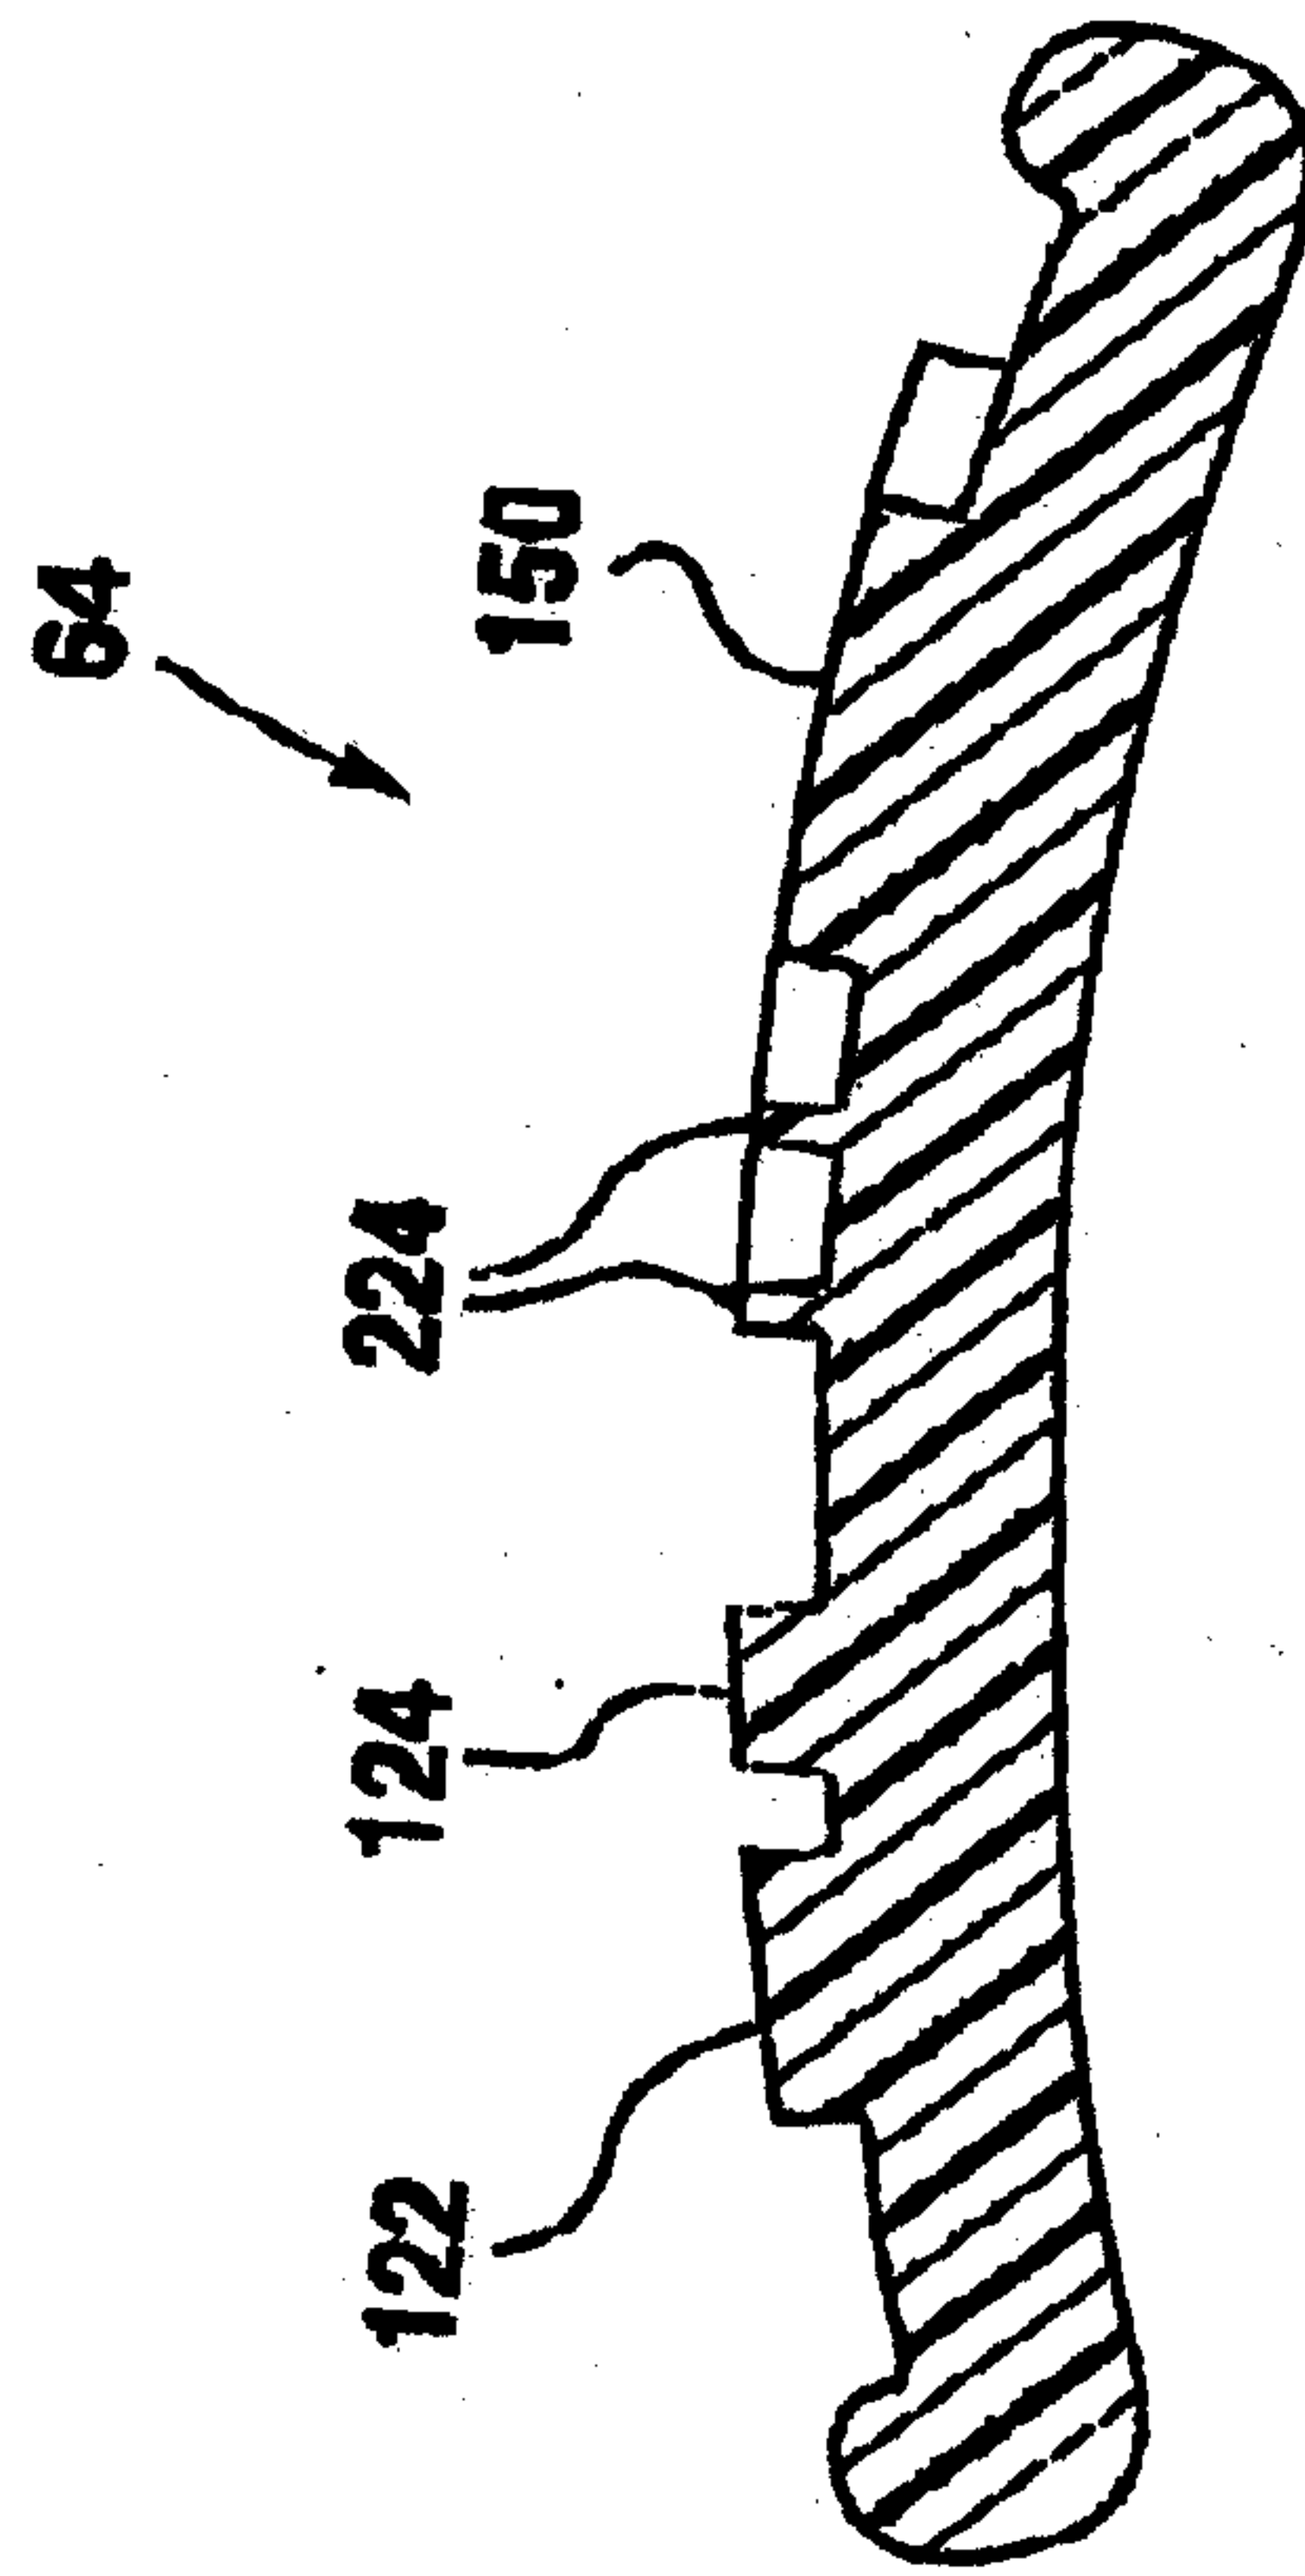


FIG. 9

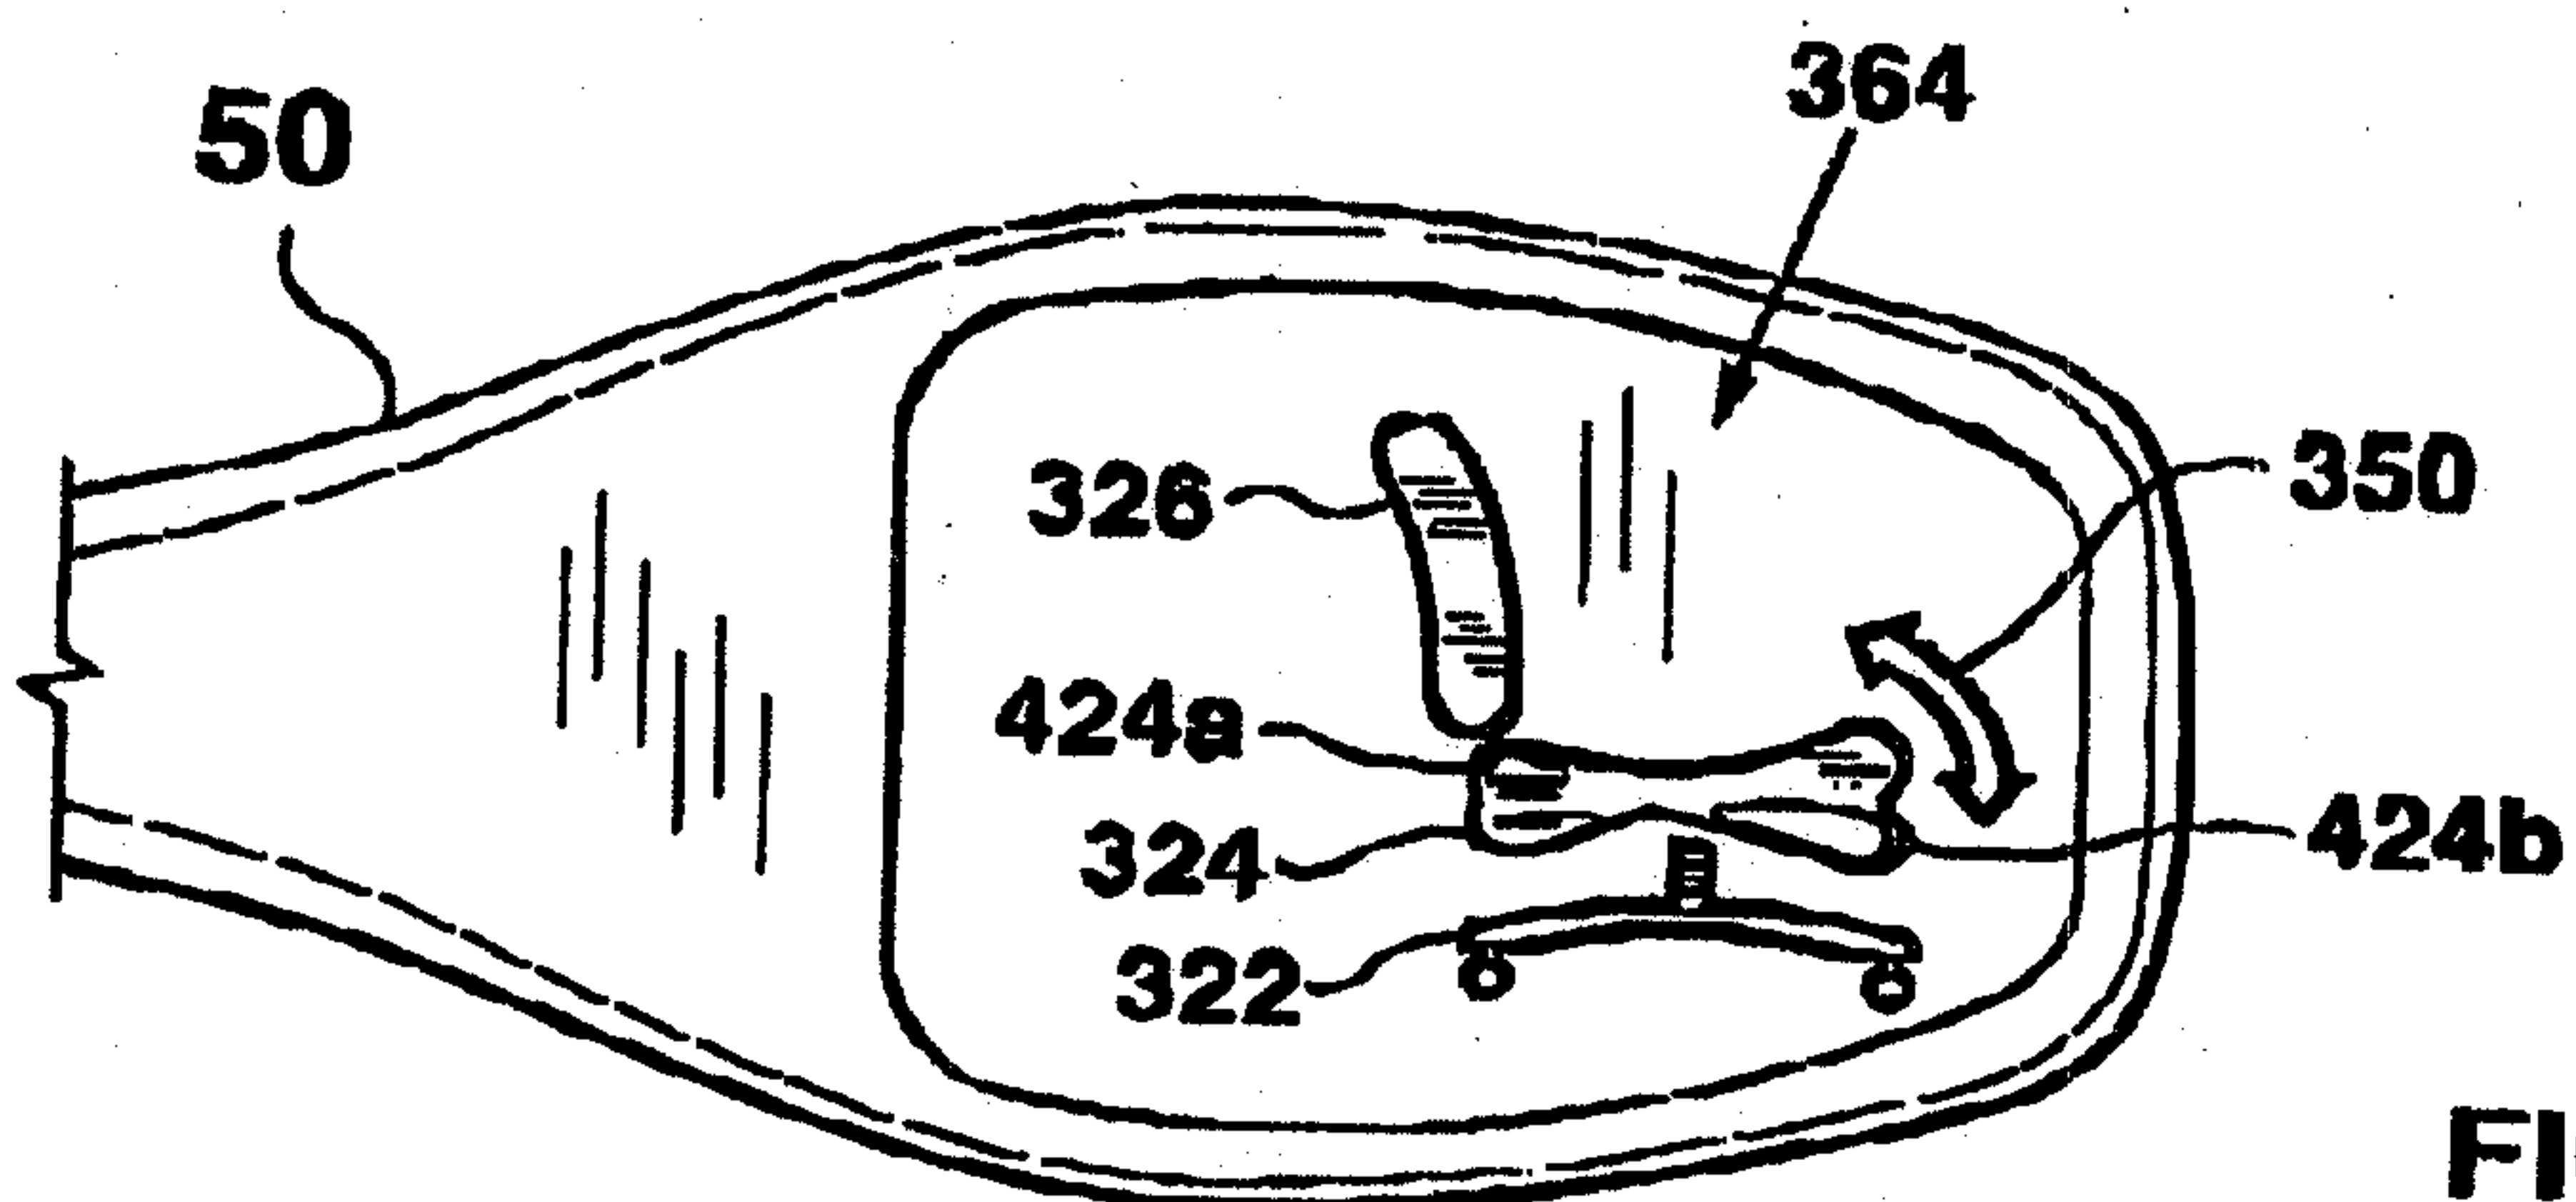


FIG. 10

FIG. 11


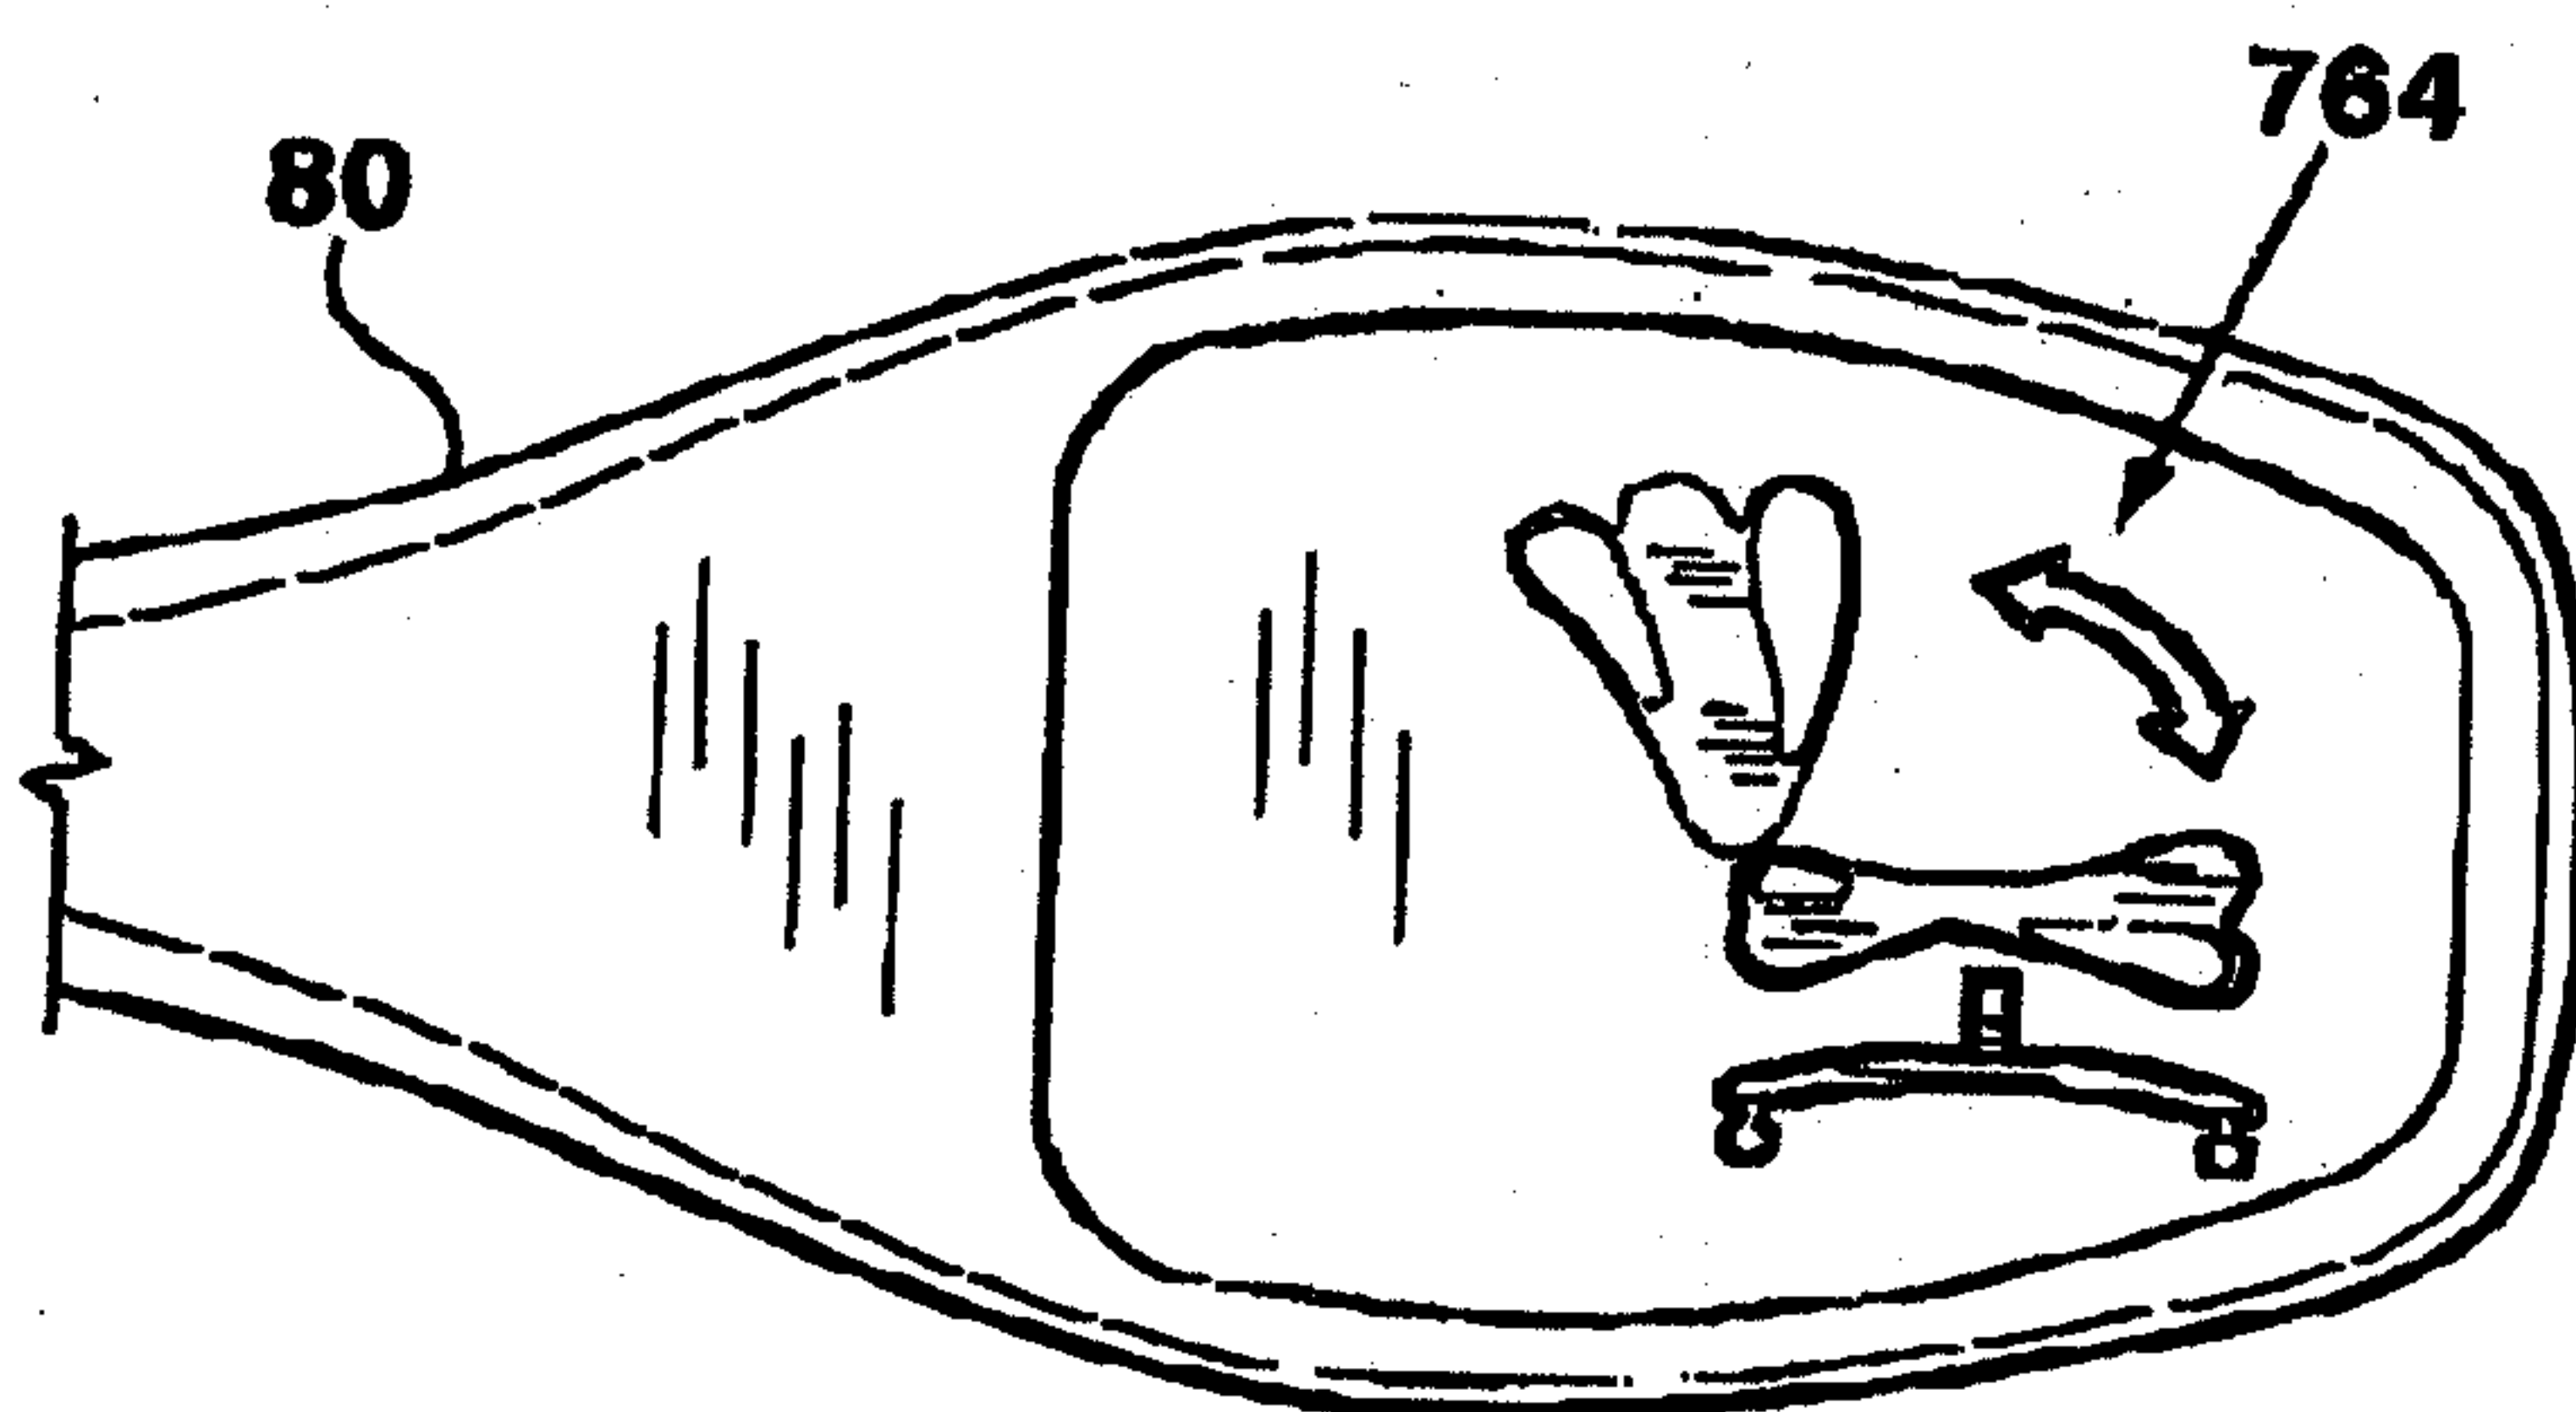


FIG. 12

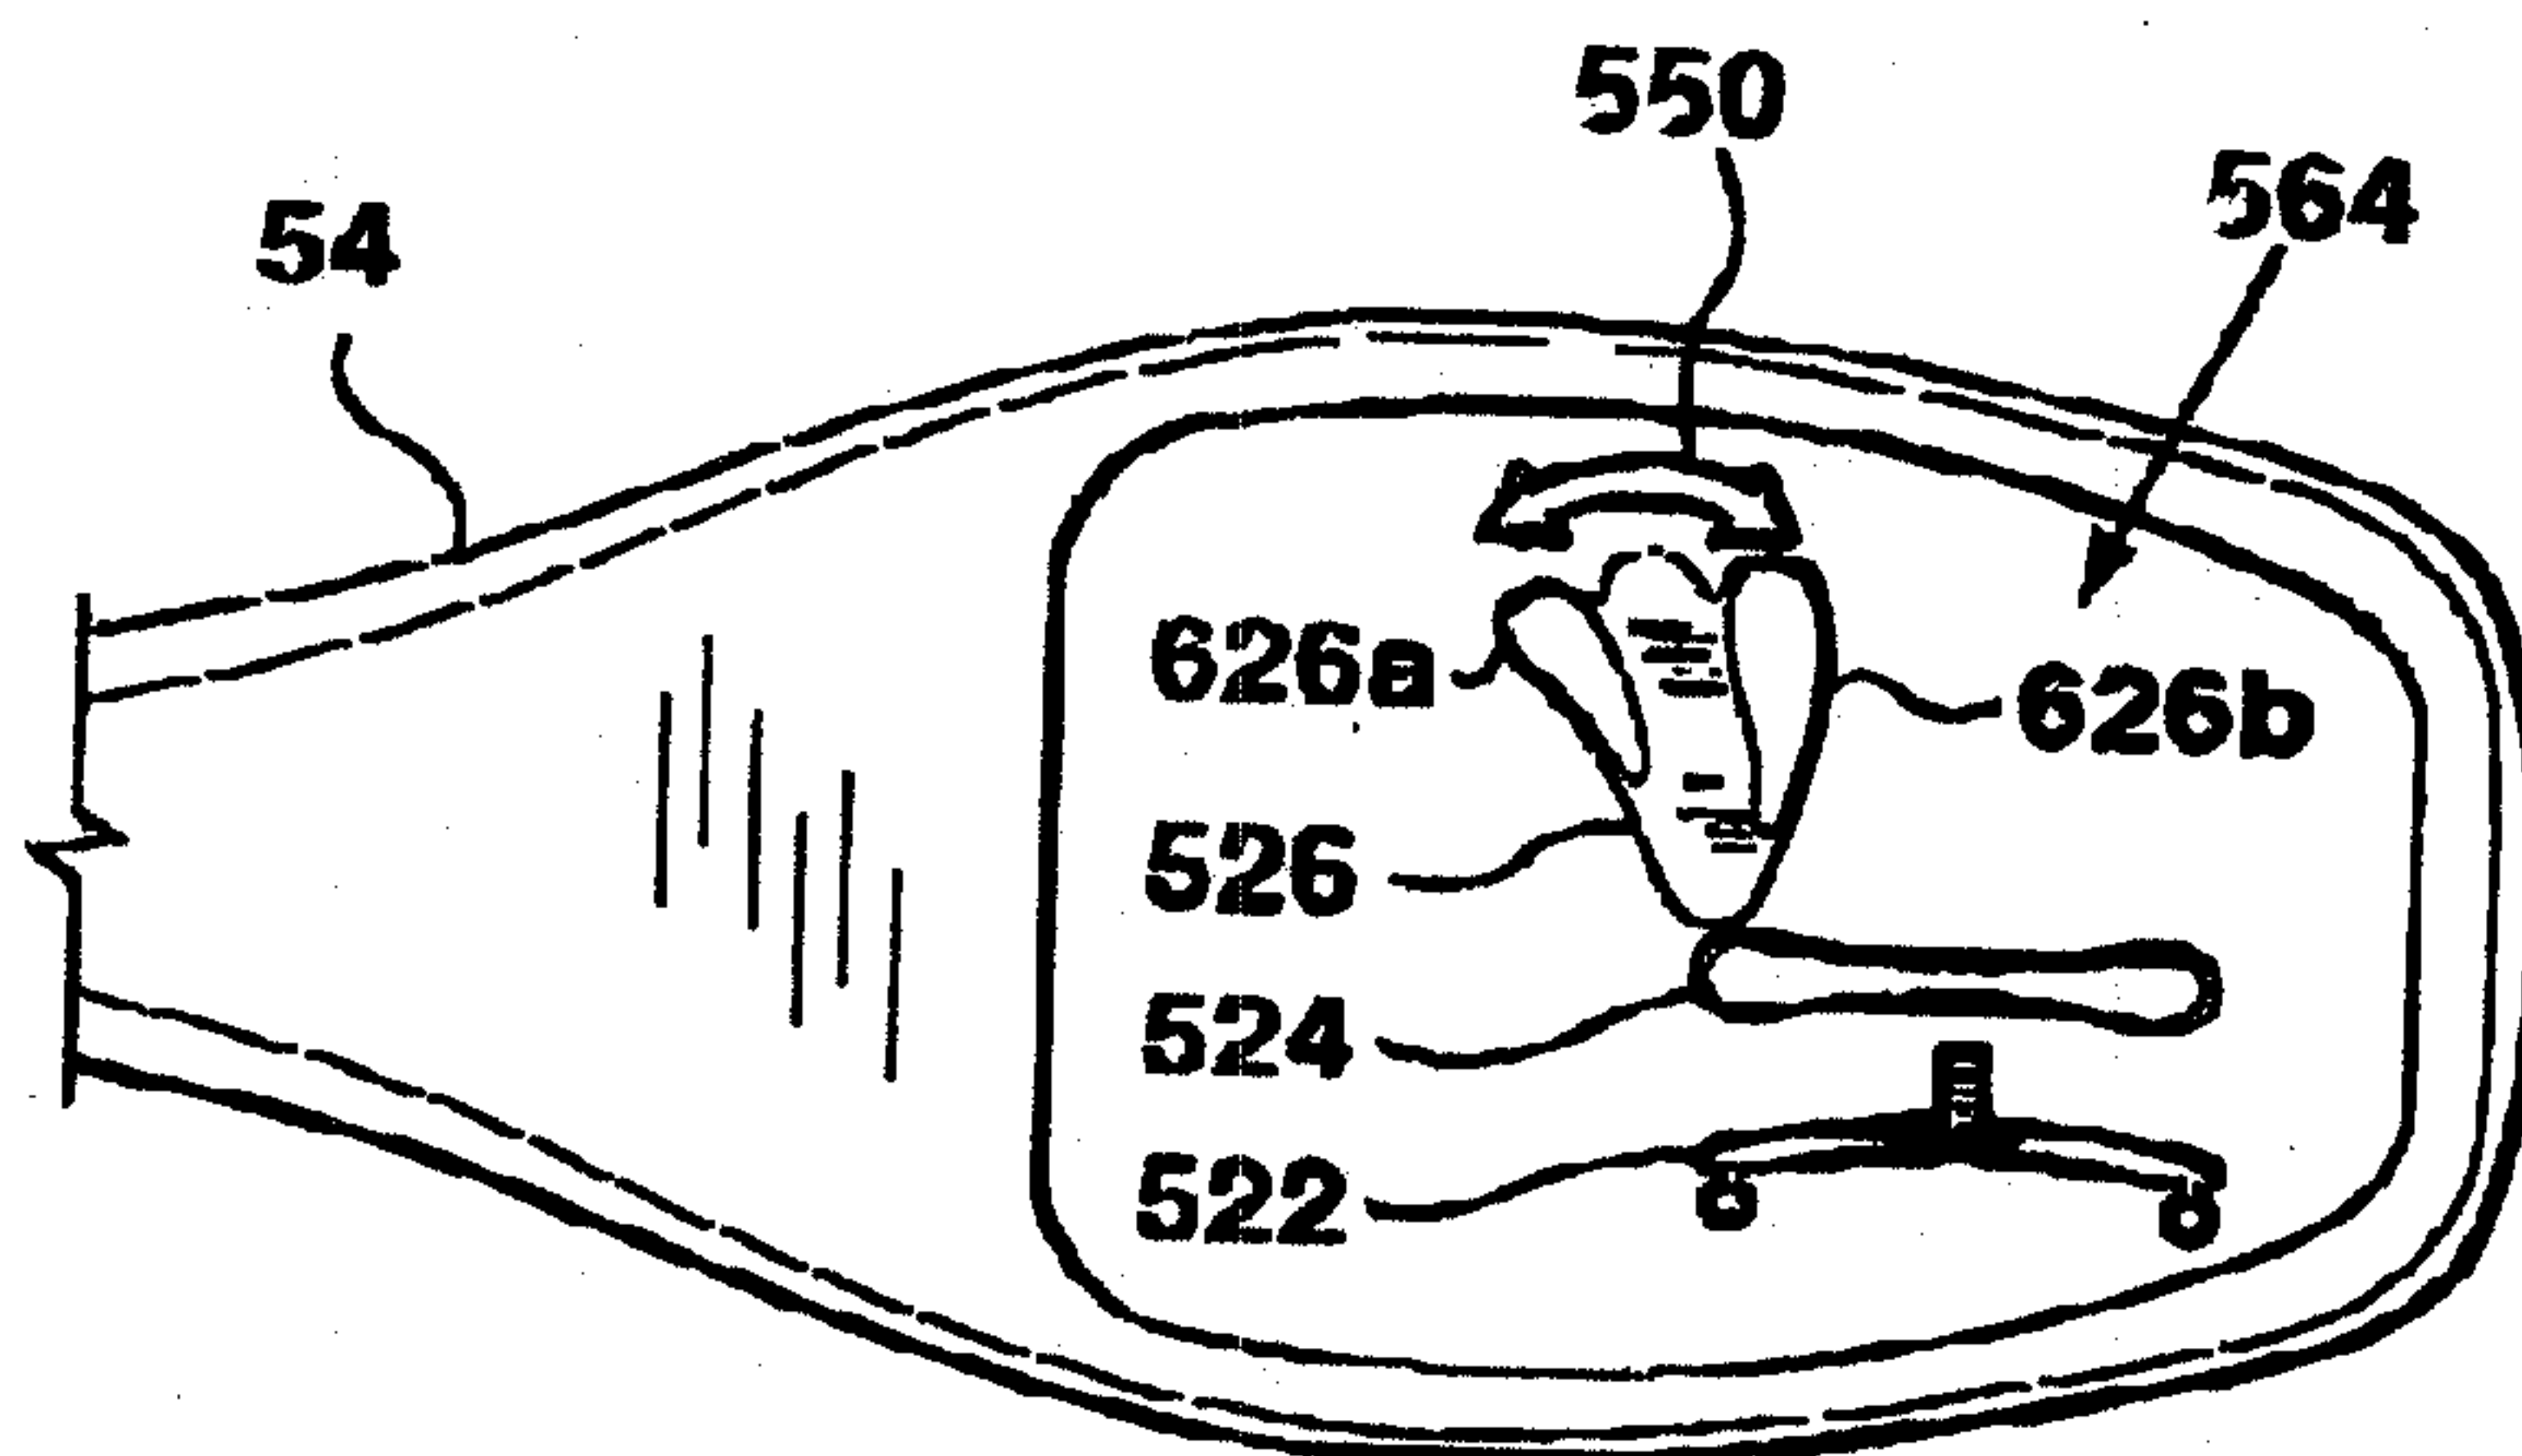