

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 240 404 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**03.12.2003 Bulletin 2003/49**

(51) Int Cl.7: **E21B 15/02, B63B 35/44,  
E21B 7/06, E21B 21/06**

(21) Application number: **00985640.2**

(86) International application number:  
**PCT/GB00/04899**

(22) Date of filing: **20.12.2000**

(87) International publication number:  
**WO 01/048351 (05.07.2001 Gazette 2001/27)**

### (54) SUBSEA WELL INTERVENTION VESSEL

U-BOOT ZUM STEUERN EINES BOHRLOCHKOPFES  
NAVIRE D'INTERVENTION POUR PUITS SOUS-MARIN

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV RO**

• **JONES, Colin  
N-1369 Stabekk (NO)**

(30) Priority: **23.12.1999 GB 9930450**

(74) Representative: **Allman, Peter John et al  
MARKS & CLERK,  
Sussex House,  
83-85 Mosley Street  
Manchester M2 3LG (GB)**

(43) Date of publication of application:  
**18.09.2002 Bulletin 2002/38**

(56) References cited:

**WO-A-97/42393 WO-A-99/49172  
GB-A- 2 162 880 US-A- 3 802 209**

(73) Proprietor: **Multi Operational Service Tankers Inc.  
Panama (PA)**

• **NAKAGAWA: "Application of aerated-fluid  
drilling in deepwater" SPE, no. 52787, 9 - 11  
November 1999, pages 1-6, XP002167680  
Amsterdam**

(72) Inventors:  
• **HAYNES, Anthony, Patrick  
N-1397 Nesoya (NO)**

EP 1 240 404 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

[0001] The present invention relates to a subsea well intervention vessel.

[0002] Hydrocarbon production wells are established by using a rotating drill assembly. A rotating drill assembly is driven from the surface, generally in the case of a subsea well from a rig mounted on a platform positioned over the well. The platform can be mounted on the seabed or may be a semi-submersible assembly the location of which can be maintained in all but the most extreme conditions. After completion of drilling, the well is lined with tubing to enable hydrocarbon liquids to flow through the tubing from any hydrocarbon reserve into which the tubing extends. In some formations, hydrocarbon fluids and water occupy the same reservoir, the hydrocarbon fluids forming a layer on top of the water. If the production tubing of a well penetrates the formation initially occupied by the hydrocarbon fluids, as fluid flows to the well tubing the phenomenon known as "water coning" can occur, that is the interface between the hydrocarbon liquids and water slopes upwards towards the well. This effect results from pressure gradients established within the reservoir formation as a result of fluid flow through the formation to the well tubing. If the tip of the cone-shaped interface reaches the well tubing, large volumes of water will enter the well tubing, reducing the rate of hydrocarbon liquid production and increasing the costs of separating the produced hydrocarbon fluids from the water.

[0003] In wells where water coning has become a problem, it is known to conduct further drilling operations so as to prevent or minimise water cone generation. For example, a bottom hole drilling assembly can be used to drill lateral passageways into the hydrocarbon liquid-bearing formation. This can be achieved by using conventional drilling techniques, but such techniques demand the shutting down of the well and often require the removal of the tubing lining the well. This involves substantial costs and risks. In addition, the hydrocarbon liquid bearing formation can be damaged by drilling fluids required for the additional drilling operations.

[0004] In order to avoid the possibility of loss or damage to a well resulting from drilling interventions, an advanced drilling technology has been developed which allows technically difficult drilling to be achieved without substantial risk of damage to the formation. The technique is referred to as "underbalanced" drilling. With underbalanced drilling, the well is live (positive pressure at the surface) at all times. This can be achieved by either using a lightweight drilling fluid or relying upon gas lift control using a purpose-built blow out preventer assembly. A clean drilling fluid is pumped down the well, and this mixes with the formation fluids that are allowed to flow up the well, that flow transporting the rock cuttings to the surface. The five phases (gas, oil, formation water, drilling fluid and drilling solids) are then separated. On land this is a straightforward process as space

is not at a premium. The equipment however is large and has not been thought suited for offshore operations.

[0005] Underbalanced drilling can be conducted using either conventional rotary drilling or coiled tubing drilling. In the UK sector of the North Sea four wells have been drilled using underbalanced rotary drilling but this has only been possible using relatively large fixed (sea-bed-supported) platforms. On land, coiled tubing drilling has been used. In these known applications, a long seamless pipe which is stored on a drum is pushed into the well by an injector against the live well pressure. A turbine drill is mounted on the bottom end of the pipe and hydraulic pressure is delivered to the turbine drill through the pipe. This drives the turbine and permits drilling to take place. The small diameter of the pipe (typically 1 to 2 7/8") makes it possible for the pipe to pass through existing well-lining tubing (normally referred to as completions) so that it is not necessary to incur the substantial costs and risks of removing such tubing.

[0006] Light intervention vessels are available which make it possible to conduct operations such as well servicing, e.g. well logging and general maintenance. Such vessels however cannot be considered appropriate platforms for interventions requiring drilling as they are not sufficiently stable for such operations and furthermore could not operate underbalanced drilling as they are too small to handle the volumes of material that result in such drilling. Furthermore, light intervention vessels require large capital investments as compared with the returns that can be generated, particularly as they are highly vulnerable to bad weather such that intervention costs are relatively high and utilisation time is relatively low. It would of course be possible to use a semi-submersible for well interventions but semi-submersibles cannot be used as yet for underbalanced drilling. Even such an approach would require support vessels to receive the produced liquids and solids.

[0007] WO9949172 describes an offshore drilling system where a subsea well is drilled from a dynamically positionable tanker using a rotating drill.

[0008] Nakagawa "Application of aerated-fluid drilling in deepwater" SPE, no. 52787, 9-11 November 1999, pages 1 to 6, XP 002167680 Amsterdam discusses an offshore well which is drilled using aerated fluid technology. However, Nakagawa acknowledges that operation of the system is not underbalanced.

[0009] Accordingly no attempts have been made to use underbalanced coiled tubing drilling from floating units.

[0010] It is an object of the present invention to provide a subsea well intervention vessel capable of re-entering existing production wells in a manner which allows well interventions to be performed without removing the well from its production mode and without polluting the subsea production system with well intervention effluent, e.g. drilling solids.

[0011] According to the present invention, there is provided a subsea well intervention vessel comprising

a dynamically positionable tanker and direct well intervention equipment mounted on the deck of the tanker, the direct well intervention equipment including equipment for underbalanced non-rotating drilling and hydrocarbon liquid separation coupled to storage tanks of the tanker such that separated hydrocarbon liquids can be stored in the tanker.

**[0012]** The invention also provides a method for conducting off-shore underbalanced drilling, wherein a tanker having direct well intervention equipment mounted on its deck is dynamically positioned over a riser extending from a subsea well, the well intervention equipment is coupled to the riser, and underbalanced non-rotating drilling is performed, the resultant multi-phase mixture being separated on the tanker and separated hydrocarbon liquids being stored in storage tanks of the tanker.

**[0013]** The term "non-rotating drilling" is used herein to include any drilling in which there is no rotation of the drill string including but not limited to underbalanced drilling using a rotary drill head powered through a non-rotating drill string.

**[0014]** The well intervention equipment may be mounted on a superstructure above the main deck of a conventional shuttle tanker. Coiled tubing equipment may be mounted adjacent a skid deck which may be displaced to an outboard position over a well riser to which the coiled tubing equipment is to be connected. Thus a well intervention can be achieved by dynamically positioning the shuttle tanker adjacent a well riser, moving the skid deck to the outboard position, coupling the coiled tubing equipment to the riser, and performing the necessary interventions in the well to which the riser is connected, fluids and solids produced during the coiled tubing drilling process being separated by equipment mounted on the superstructure and hydrocarbon liquids being transferred from the separation equipment to the shuttle tanker storage hold.

**[0015]** As an alternative to providing a skid deck displaceable to an outboard position, the drilling equipment could be mounted adjacent a moon pool extending through the tanker deck.

**[0016]** Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic representation taken from an available document showing the phenomenon of water coning;

Figure 2 is a further illustration taken from a published document showing the results of coiled tubing drilling in the structure of Figure 1 so as to improve the rate of production of hydrocarbon liquids; Figure 3 is a side view of a known North Sea shuttle tanker incorporating direct well intervention equipment in accordance with the present invention;

Figure 4 is a schematic layout diagram of the direct well intervention equipment shown in side view in

Figure 3; and

Figure 5 is a schematic illustration of a tanker which defines moon pools through which coiled tubing drilling can be performed;

**[0017]** Referring to Figure 1, this illustrates a series of strata incorporating a hydrocarbon bearing stratum 1 which lies over a water bearing stratum 2. A well 3 is drilled through the strata 1 and 2. Pressure within the hydrocarbon liquid and water is such that flow is established to the well 3. As a result of that flow a "water cone" 4 is defined around the well 3 and as a result a conical interface 5 is established between the hydrocarbon liquid and water. If the well 3 is lined with steel tubing down to the top of the strata 1, and the water cone reaches to adjacent the lined portion of the well, large volumes of water will be produced. Clearly this is highly disadvantageous and therefore it is known to intervene in wells which suffer from the water coning effect. Figure 2 illustrates the results of such an intervention.

**[0018]** Referring to Figure 2, a branch well 6 is shown as being drilled into the stratum 1. Drilling such a branch 6 can substantially improve the proportion of produced liquids made up by hydrocarbon liquids. It is well known to form a branch such as the branch 6 of Figure 2 using coiled tubing drilling techniques. It is necessary however when using such techniques to maintain underbalanced conditions (that is maintain a positive pressure at the top of the well 3) in order to avoid drilling solids damaging the well. Such techniques have never been used off-shore because the volume of material generated can only be handled in large installations.

**[0019]** Figure 3 illustrates a shuttle tanker embodying the present invention. Figure 3 is based on a drawing extracted from "First Olsen Tankers" and shows a shuttle tanker of the type widely used in the North Sea. The only modification made to the standard shuttle tanker is the mounting of a superstructure 7 above the main deck of the tanker, for example at a height of approximately 3m so as to clear the installed deck pipes and vents. On that superstructure all the equipment necessary for direct well intervention is mounted, including a crane 8. The detailed layout of the equipment mounted on the superstructure 7 of Figure 3 is shown in Figure 4.

**[0020]** Referring to Figure 4, a skid deck 9 is centrally mounted on the superstructure 7 adjacent a gantry crane 10. Coiled tubing drilling equipment 11 of conventional form is mounted adjacent the gantry crane 10. A separator assembly 12 and ancillary drilling support equipment assembly 13 are also mounted on the superstructure 7. All other equipment relied upon to achieve the required direct well intervention is also mounted on the superstructure 7. The separator assembly 12 is coupled to an appropriately positioned flare stack, for example at the stem of the vessel (not shown) and to the storage tanks of the tanker so as to enable produced hydrocarbon fluids to be stored for subsequent transport.

**[0021]** In use, the tanker is dynamically positioned adjacent a subsea well riser. The skid deck 9 is then moved to an outboard position (not shown) over the riser to enable the coiled tubing equipment 11 to be coupled to the riser. Appropriate interventions can then be made via the riser and in particular coiled tubing drilling can be conducted in a manner which produces a multiphase mixture that is subsequently separated into its different phases in the separator assembly 12.

**[0022]** The system described with reference to Figures 3 and 4 represents a breakthrough in offshore drilling, testing, waste disposal and well maintenance. The tanker cargo holds can be used for the collection of produced oil during underbalanced drilling. The system can give direct access to test subsea wells for extended durations. The system can be used for an extended water injection test and also allows for the disposal of waste into a subsea well. Existing systems in contrast cannot perform coiled tubing drilling and cannot collect produced oil, requiring a separate shuttle tanker in the event that oil is being produced during drilling.

**[0023]** Furthermore the original features of the shuttle tanker are maintained and therefore the vessel can still be employed in the charter market when not being used for direct well interventions. As a result the invention offers a solution to the problem of achieving direct well interventions with coiled tubing drilling without the major costs associated with building and operating specialist vessels.

**[0024]** A standard North Sea specified shuttle tanker with dynamic positioning can be readily chartered and fitted with a new deck above the installed deck pipes and vents. On that deck appropriate equipment can be installed such as:

- A skid mounted derrick riser handling unit with subsea control panel;
- Stumps for the subsea well intervention equipment;
- A pipe rack;
- Coiled tubing reels, control unit and power pack;
- Cementing unit and blender;
- Production test equipment including choke manifold, heater treater, separators, degassing boot and gas flare;
- Tanks for kill mud;
- A closed circulation system for handling drilling mud and drilled solids during underbalanced drilling;
- Storage tanks for chemical and solid wastes;
- Craneage for subsea equipment and supplies;
- Remote controlled vehicles for working and observation tasks;
- Water supplies for cooling and fire fighting services;

**[0025]** It is probably the case that there are of the order of 2000 subsea completions currently operative. With the present invention, such completions could be made accessible for of the order of 100,000 US dollars per day in contrast with currently quoted costs of the

order of 200,000 to 300,000 US dollars per day. Thus the invention dramatically affects the technical capability of the offshore industry in the context of the financial constraints which face that industry.

**[0026]** Coiled tubing drilling solutions include a cost-effective bottom assembly for standard mud systems and a wireline-based bottom hole assembly that fully exploits the benefits of through-tubing drilling, including use of foam and air systems. The present invention allows onshore underbalanced drilling technology to be transferred offshore without requiring extended equipment development. It also permits the production of significant volumes of hydrocarbons without requiring additional storage vessels, thereby reducing demands on cash flow whilst simultaneously avoiding damage to a well as a result of drilling operations. The motion characteristics of a relatively large shuttle tanker are more suited for delicate underbalanced drilling operations than the available relatively smaller and more buoyant alternative vessels. This extends the amount of time that weather permits operation and reduces fatigue stress on the coiled tubing where it is fed from the tanker to the subsea well riser. The invention also allows wells to be properly cleaned after interventions, thereby avoiding polluting the sometimes sensitive production system. Drilling waste can be managed in an optimal fashion, and all this can be achieved in relative safety given the large deck space available. All of these advantages are unavailable if using either a conventional semi-submersible vessel or a conventional purpose-built well intervention vessel.

**[0027]** In the embodiment of the invention described with reference to Figures 3 and 4, components necessary for the operation of the invention are mounted on a skid deck which can be moved to an outboard position. In an alternative arrangement illustrated in Figure 5, such components are mounted adjacent moon pools extending through the structure of an otherwise conventional tanker.

**[0028]** Referring to Figure 5, two moon pools 13 and 14 extend vertically through the structure of a modified shuttle tanker. Three cranes 15, 16 and 17 can extend over the moon pools and areas indicating cargo manifolds 18, a derrick module 19, and a lay down area 20. Area 21 houses gas compression and process units, area 22 a flare boom, area 23 a flare knock-out drum skid, and area 24 a further lay down area served by a crane 25.

**[0029]** Taking a standard double hull shuttle tanker, the modifications required to produce the vessel schematically illustrated in Figure 5 which can function in accordance with the present invention would be an upgrade of the dynamic positioning capability, installation of a first moon pool (8m<sup>2</sup>) for intervention work, installation of a second moon pool (4m<sup>2</sup>) for remotely operated vehicle work, mounting of cranes, process equipment and lay down areas for deck-mounted equipment, and the mounting of flare facilities and associated utili-

ties.

## Claims

1. A subsea well intervention vessel comprising a dynamically positionable tanker and direct well intervention equipment (11) mounted on a deck (7) of the tanker, **characterised in that** the direct well intervention equipment (11) includes equipment for underbalanced non-rotating drilling and hydrocarbon liquid separation (12) coupled to storage tanks of the tanker such that separated hydrocarbon liquids can be stored in the tanker.
2. A vessel according to claim 1, wherein the well intervention equipment (11) is mounted on a superstructure (7) above the main deck of a shuttle tanker.
3. A vessel according to claim 1 or 2, wherein coiled tubing drilling equipment (11) is mounted adjacent a skid deck (9) which may be displaced to an outboard position over a well riser to which the coiled tubing drilling equipment (11) is to be connected.
4. A vessel according to claim 1 or 2, wherein coiled tubing drilling equipment (11) is mounted adjacent a moon pool (13, 14) located over a well riser to which the coiled tubing drilling equipment is to be connected.
5. A method for conducting off-shore underbalanced drilling, wherein a tanker having direct well intervention equipment (11) mounted on its deck is dynamically positioned over a riser extending from a sub-sea well (3), **characterised in that** the well intervention equipment (11) is coupled to the riser, and underbalanced non-rotating drilling is performed, the resultant multi-phase mixture being separated on the tanker and separated hydrocarbon liquids being stored in storage tanks of the tanker.

## Patentansprüche

1. Schiff für den Eingriff in Unterwasser-Bohrlöcher, das ein dynamisch positionierbares Tankschiff und auf einem Deck (7) des Tankschiffs angebrachte Ausrüstung (11) zum unmittelbaren Bohrlocheingriff umfaßt, **dadurch gekennzeichnet, daß** die Ausrüstung (11) zum unmittelbaren Bohrlocheingriff Ausrüstung (12) zum unterausgeglichenen nicht-rotierenden Bohren und Trennen von Kohlenwasserstoff-Flüssigkeiten einschließt, gekoppelt an Lagertanks des Tankschiffs, so daß getrennte Kohlenwasserstoff-Flüssigkeiten im Tankschiff gelagert werden können.

2. Schiff nach Anspruch 1, bei dem die Ausrüstung (11) zum Bohrlocheingriff auf einem Überbau (7) oberhalb des Hauptdecks eines Shuttletankschiffs angebracht wird.

3. Schiff nach Anspruch 1 oder 2, bei dem Schlangenrohr-Bohrausrüstung (11) angrenzend an ein Verschiebedeck (9) angebracht wird, das zu einer Außenbordposition über einer Bohrloch-Steigleitung verschoben werden kann, mit dem die Schlangenrohr-Bohrausrüstung (11) verbunden werden soll.
4. Schiff nach Anspruch 1 oder 2, bei dem Schlangenrohr-Bohrausrüstung (11) angrenzend an eine Öffnung (13, 14) für Ölauftnahme im Schiffsboden angebracht wird, die sich über einer Bohrloch-Steigleitung befindet, mit der die Schlangenrohr-Bohrausrüstung verbunden werden soll.
5. Verfahren zum Durchführen von unterausgeglichenem Offshore-Bohren, bei dem ein Tankschiff mit auf seinem Deck angebrachter Ausrüstung (11) zum unmittelbaren Bohrlocheingriff dynamisch über einer Steigleitung positioniert wird, die sich von einem Unterwasserbohrloch (3) erstreckt, **dadurch gekennzeichnet, daß** die Ausrüstung (11) zum Bohrlocheingriff an die Steigleitung gekoppelt wird und unterausgeglichenes nichtrotierendes Bohren durchgeführt wird, wobei die resultierende Mehrphasenmischung auf dem Tankschiff getrennt wird und getrennte Kohlenwasserstoff-Flüssigkeiten in Lagertanks des Tankschiffs gelagert werden.

## Revendications

1. Navire d'intervention pour puits sous-marin comprenant un navire-citerne à positionnement dynamique et un équipement d'intervention directe sur le puits (11) monté sur un pont (7) du navire-citerne, **caractérisé en ce que** l'équipement d'intervention directe sur le puits (11) englobe un équipement pour le forage non rotatif en sous-pression et la séparation des hydrocarbures liquides (12) couplé aux réservoirs de stockage du navire-citerne, de sorte que les hydrocarbures liquides séparés peuvent être stockés dans le navire-citerne.
2. Navire selon la revendication 1, dans lequel l'équipement d'intervention sur le puits (11) est monté sur une superstructure (7) au-dessus du pont principal d'un pétrolier-navette.
3. Navire selon les revendications 1 ou 2, dans lequel un équipement de forage à colonne enroulée (11) est monté près d'un pont coulissant (9) pouvant être déplacé vers une position extérieure au-dessus d'un tube ascenseur du puits sur lequel l'équipement

ment de forage à colonne enroulée ( 11 ) doit être raccordé.

4. Navire selon les revendications 1 ou 2, dans lequel l'équipement de forage à colonne enroulée (11) est monté près d'un puits central (13, 14) agencé au-dessus d'un tube ascenseur du puits sur lequel l'équipement de forage à colonne enroulée doit être raccordé. 5

10

5. Procédé d'exécution d'un forage sous-marin en sous-pression, dans lequel un navire-citerne comportant un équipement d'intervention directe sur le puits (11) monté sur son pont est positionné de manière dynamique au-dessus d'un tube ascenseur s'étendant à partir d'un puits sous-marin (3), **caractérisé en ce que** l'équipement d'intervention sur le puits ( 11 ) est couplé au tube ascenseur, un forage non rotatif en sous-pression étant exécuté, le mélange à plusieurs phases résultant étant séparé sur le navire-citerne, les hydrocarbures liquides séparés étant stockés dans les réservoirs de stockage du navire-citerne. 15 20

25

30

35

40

45

50

55

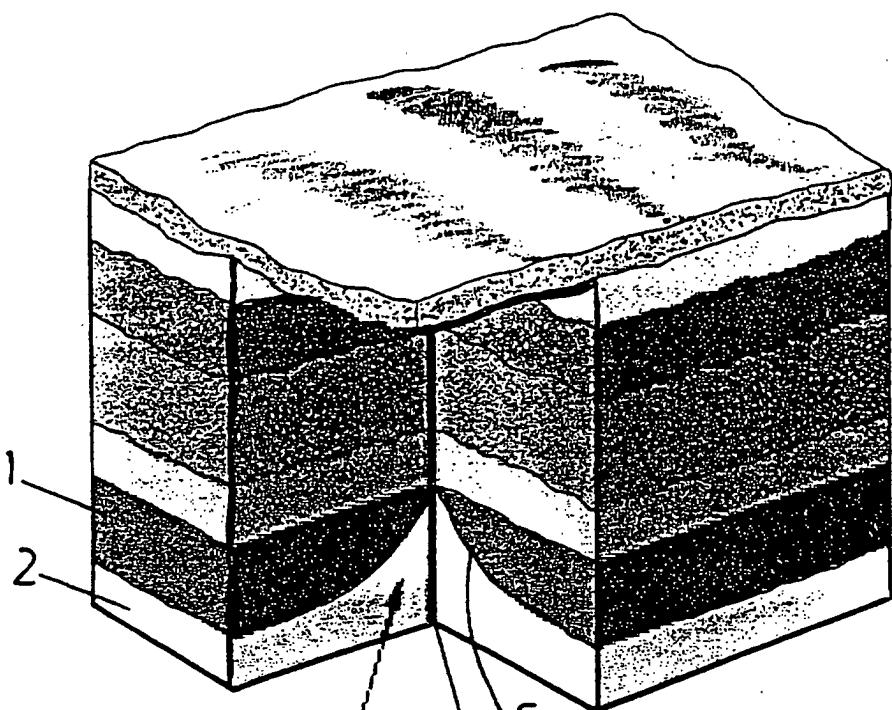


FIG. 1

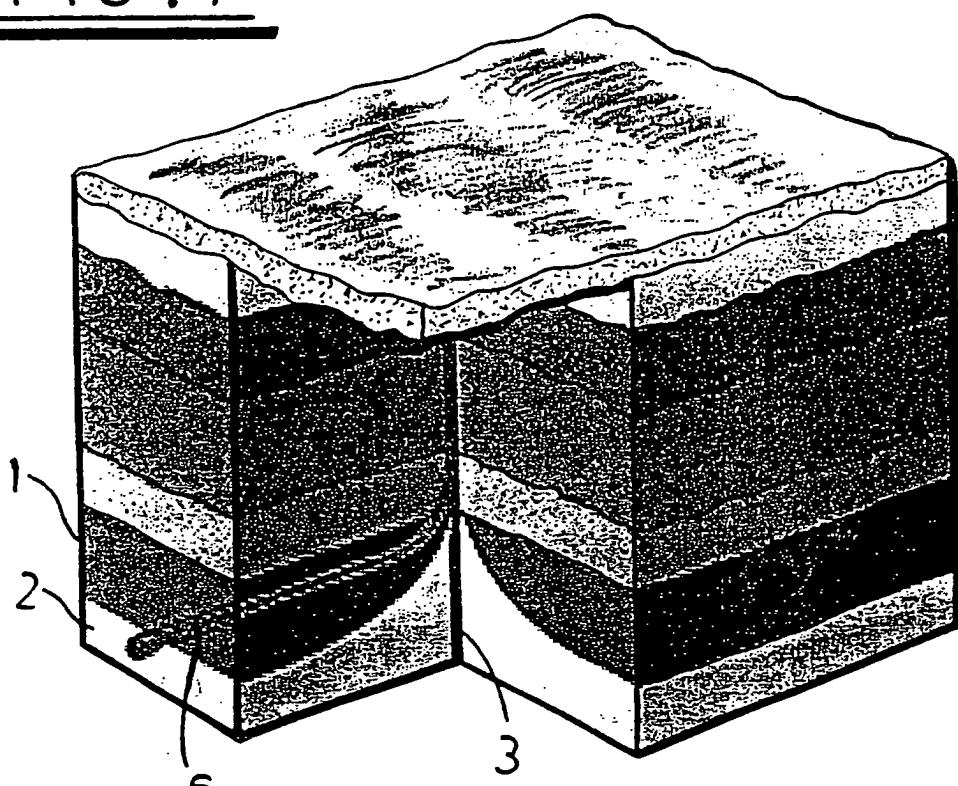


FIG. 2

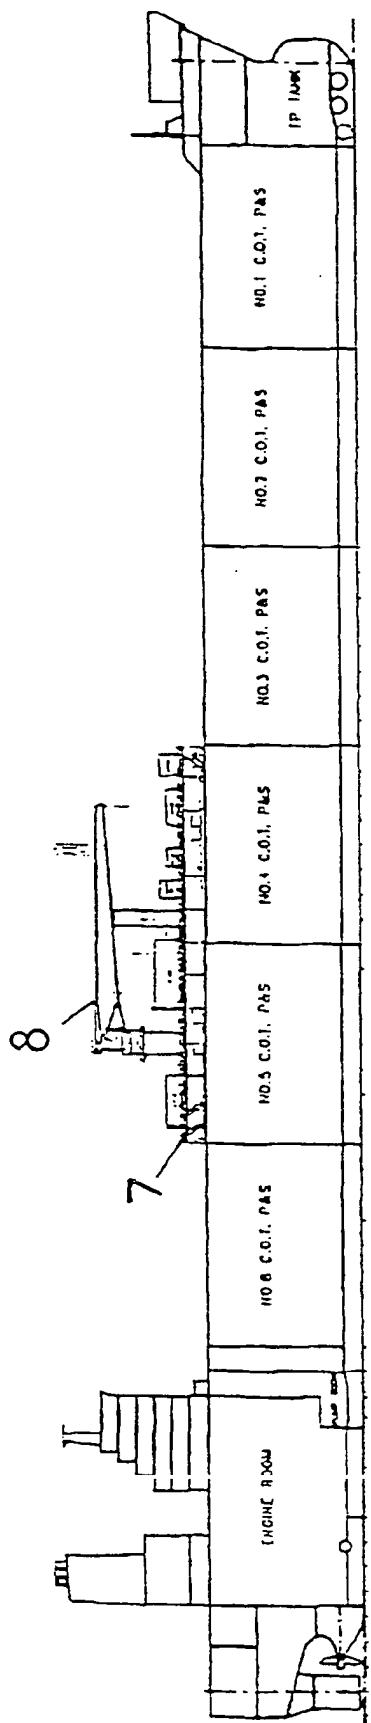


FIG. 3

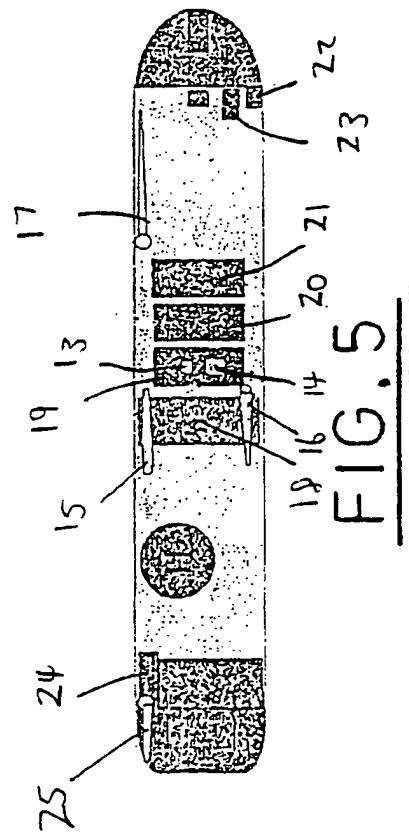
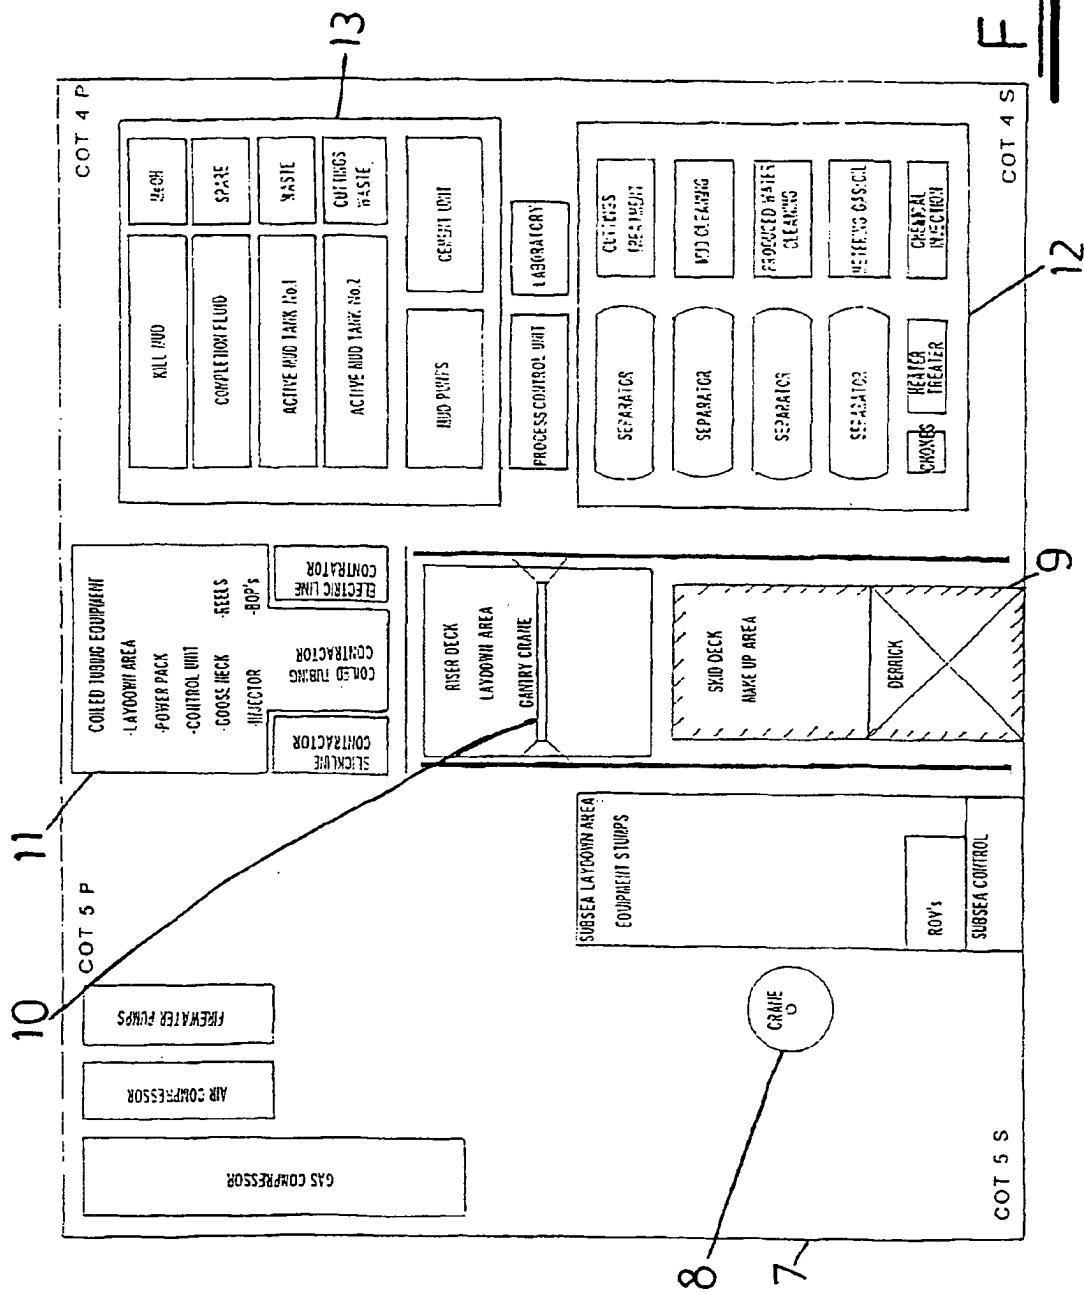


FIG. 5

FIG. 4

REGISTER ENTRY FOR EP1240404

European Application No EP00985640.2 filing date 20.12.2000

Priority claimed:  
23.12.1999 in United Kingdom - doc: 9930450

PCT EUROPEAN PHASE

PCT Application PCT/GB2000/004899 Publication No WO2001/048351 on  
05.07.2001

Designated States AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Title SUBSEA WELL INTERVENTION VESSEL

Applicant/Proprietor

MULTI OPERATIONAL SERVICE TANKERS INC., 53rd Street, Urbanizacion Obarrio,  
Swiss Tower, 16th floor, Panama, Panama [ADP No. 70384797001]

Inventors

ANTHONY PATRICK HAYNES, Jon Smorsv 4, N-1397 Nesoya, Norway  
[ADP No. 70384805001]

COLIN JONES, Kyrres Vei 3, N-1369, Stabekk, Norway [ADP No. 08361768001]

Classified to

E21B B63B

Address for Service

MULTI OPERATIONAL SERVICE TANKERS INC., 53rd Street, Urbanizacion Obarrio,  
Swiss Tower, 16th floor, Panama, Panama [ADP No. 70384797001]

EPO Representative

PETER JOHN ALLMAN, MARKS & CLERK, Sussex House, 83-85 Mosley Street,  
Manchester, M2 3LG, United Kingdom [ADP No. 50292929001]

Publication No EP1240404 dated 18.09.2002

Publication in English

Examination requested 30.05.2002

Patent Granted with effect from 03.12.2003 (Section 25(1)) with title SUBSEA  
WELL INTERVENTION VESSEL

---

31.10.2003 EPO: Search report published on 13.06.2002

Entry Type 25.11 Staff ID. RD06 Auth ID. EPT

25.02.2004 Notification of change of Address For Service name and address of  
MULTI OPERATIONAL SERVICE TANKERS INC., 53rd Street, Urbanizacion  
Obarrio, Swiss Tower, 16th floor, Panama, Panama

[ADP No. 70384797001]

to

MARKS & CLERK, Sussex House, 83-85 Mosley Street, MANCHESTER, M2  
3LG, United Kingdom [ADP No. 00000018004]

dated 24.02.2004. Official evidence filed on EP REG MAIN

Entry Type 7.1 Staff ID. RIB Auth ID. A1

\*\*\*\*\* END OF REGISTER ENTRY \*\*\*\*\*

OA80-01  
EP

OPTICS - PATENTS

04/05/04 10:40:36  
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER EP1240404

PROPRIETOR(S)

Multi Operational Service Tankers Inc., 53rd Street, Urbanizacion  
Obarrio, Swiss Tower, 16th floor, Panama, Panama

DATE FILED 20.12.2000

DATE GRANTED 03.12.2003

DATE NEXT RENEWAL DUE 20.12.2004

DATE NOT IN FORCE

DATE OF LAST RENEWAL

YEAR OF LAST RENEWAL 00

STATUS PATENT IN FORCE  
\*\*\*\*\* END OF REPORT \*\*\*\*\*