

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 October 2007 (18.10.2007)

PCT

(10) International Publication Number
WO 2007/118074 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2007/065857

(22) International Filing Date: 3 April 2007 (03.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/398,786 6 April 2006 (06.04.2006) US
11/686,591 15 March 2007 (15.03.2007) US

(71) Applicant (for all designated States except US):
HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 20555 S.H. 249, Houston, Texas 77070 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCMANUS, Richard, J.** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330 (US). **COURTENAY, Silke** [CA/US]; 16399 W. Bernardo, San Diego, California 92127-1899 (US). **BANGARU, Sandeep, K.** [US/US]; 16399 W. Bernardo, San Diego, California 92127-1899 (US). **WEBB, Steven, L.** [US/US]; 16399 W. Bernardo, San Diego, California 92127-1899 (US).

(74) Agents: **HAYMOND, Bradley, W.** et al.; Hewlett-Packard Company, Intellectual Property Administration, P.O. Box 272400 Mail Stop 35, Fort Collins, Colorado 80527-2400 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INKJET RECORDING MEDIUM AND METHOD OF MAKING THE SAME

(57) Abstract: An inkjet recording medium (10, 10', 10", 10'") includes a substrate (12), a base layer (14), and a porous ink receiving layer (16). The base layer (14) is established on at least one surface (S₁) of the substrate (12), and the porous ink receiving layer (16) is established on the base layer (14). The base layer (14) includes calcined clay present in an amount ranging from about 25% to about 75% by dry weight.

WO 2007/118074 A2

5

INKJET RECORDING MEDIUM AND METHOD OF MAKING THE SAME

CROSS REFERENCE TO RELATED APPLICATION

10 This application is a continuation-in-part of U.S. Patent Application Serial No. 11/398,786, filed on April 6, 2006, which is incorporated by reference herein in its entirety.

BACKGROUND

15 The present disclosure relates generally to an inkjet recording medium and to methods of making the same.

Media suitable for use with inkjet printing often include one or more coating layers that are configured to enhance, for example, ink uptake, print performance, glossiness, or other properties. Some media coatings include ink receiving layers that are highly absorptive. Such layers may be capable of
20 handling relatively large volumes of ink, however, their thickness may deleteriously affect inkjet performance. The combination of thick ink receiving layers and printed ink may, in some instances, result in bleed, coalescence, relatively poor color saturation and optical density, flooding and relatively poor drytime.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Features and advantages of embodiments of the present disclosure will become apparent by reference to the following detailed description and drawings, in which like reference numerals correspond to similar, though not
30 necessarily identical components. For the sake of brevity, reference numerals or features having a previously described function may not necessarily be described in connection with other drawings in which they appear.

Fig. 1 is a schematic cross-sectional view of an embodiment of the inkjet recording medium having a base layer and a porous ink receiving layer;

Fig. 2 is a schematic cross-sectional view of another embodiment of the inkjet recording medium having a base layer, an intermediate layer, and a porous ink receiving layer;

Fig. 3 is a schematic cross-sectional view of still another embodiment of the inkjet recording medium having a substrate coating and a backcoat;

Fig. 4 is a schematic cross-sectional view of the embodiment of the inkjet recording medium shown in Fig. 1 with a backcoat;

Fig. 5 is a schematic cross-sectional view of the embodiment of the inkjet recording medium shown in Fig. 2 with a backcoat; and

Fig. 6 is a schematic cross-sectional view of a further embodiment of the inkjet recording medium having base and porous ink receiving layers on both substrate surfaces.

DETAILED DESCRIPTION

Embodiments of the inkjet recording medium and system disclosed herein advantageously include relatively thin layers (i.e., base layer and ink receiving layer(s)). These layers advantageously have a lower coatweight than thick imaging layers (i.e., layers having a thickness greater than about 30 gsm). It is believed that the combination of the lower coatweights and the materials used to form the thin layers enhances inkjet performance. Enhanced inkjet performance may include increased color saturation, reduced bleed, reduced coalescence, reduced drytime, increased ink uptake, and combinations thereof.

It is to be understood that the terms "disposed on", "deposited on", "established on" and the like are broadly defined herein to encompass a variety of divergent layering arrangements and assembly techniques. These arrangements and techniques include, but are not limited to (1) the direct attachment of one material layer to another material layer with no intervening material layers therebetween; and (2) the attachment of one material layer to another material layer with one or more material layers therebetween, provided that the one layer being "disposed on", "deposited on", or "established on" the

other layer is somehow "supported" by the other layer (notwithstanding the presence of one or more additional material layers therebetween). The phrases "directly deposited on", "deposited directly on" or "established directly on" and the like are broadly defined herein to encompass a situation(s) wherein a given material layer is secured to another material layer without any intervening material layers therebetween. Any statement used herein which indicates that one layer of material is on another layer is to be understood as involving a situation wherein the particular layer that is "on" the other layer in question is the outermost of the two layers relative to incoming ink materials being delivered by the printing system of interest. It is to be understood that the characterizations recited above are to be effective regardless of the orientation of the recording medium materials under consideration.

Referring now to Fig. 1, an embodiment of the inkjet recording medium 10 includes a substrate 12, a base layer 14, and a porous ink receiving layer 16. The substrate 12 may be any cellulose-based paper, photobase paper (non-limitative examples of which include polyethylene or polypropylene extruded on one or both sides of paper), synthetic papers (a non-limitative example of which includes those manufactured by YUPO Corporation America, Chesapeake, VA), or combinations thereof. The substrate 12 may be laminated/extruded with a substrate coating (shown as reference numeral 20 in Fig. 3). One non-limitative example of a suitable substrate coating 20 is an ink-impermeable coating layer, such as, for example, polyethylene. It is further contemplated that both sides of the substrate 12 may be coated with the substrate coating 20. In an embodiment, a layer of gelatin may further be deposited on the polyethylene ink-impermeable coating layer.

The base layer 14 is established on at least one surface S_1 , S_2 of the substrate 12. In the embodiment shown in Fig. 1, the base layer 14 is established on one surface S_1 . In another embodiment, the base layer 14 is established on both of the substrate surfaces S_1 , S_2 (see Fig. 4). The base layer 14 may be established via any suitable process, including, but not limited to roll-coating, conventional slot-die processing, blade coating, slot-die cascade coating, curtain coating and/or other comparable methods including those that

use circulating and non-circulating coating technologies. In some instances, spray-coating, immersion-coating, and/or cast-coating techniques may be suitable for establishing the base layer 14.

In an embodiment, the base layer 14 includes calcined clay (a pigment) present in an amount ranging from about 25% to about 75% by dry weight. In another embodiment, the calcined clay amount ranges from about 35% to about 60%, by dry weight. Without being bound to any theory, it is believed that the calcined clay provides an absorption characteristic to the base layer 14. In an embodiment, the calcined clay has an oil absorption according to ASTM D281-95 of greater than 100 grams of oil per 100 grams of pigment. Non-limiting examples of calcined clay include ANSILEX 93, manufactured by Englehard Corp., Iselin, NJ, or NEOGEN 2000, manufactured by Imerys Pigments, Inc., Roswell, GA.

The base layer 14 may also include other pigments. Examples of such pigments include, but are not limited to inorganic pigments (e.g., kaolin clay, calcium carbonate (e.g., precipitated calcium carbonate), aluminum trihydrate, titanium dioxide, or combinations thereof), polymeric or plastic pigments (e.g., polystyrene, polymethacrylates, polyacrylates, copolymers thereof, and/or combinations thereof), and/or combinations thereof. Non-limiting examples of plastic pigments include those that are commercially available from The Dow Chemical Company, Midland, MI (such as, 722HS, 756A and 788A lattices), and those that are commercially available from Rohm & Hass, Philadelphia, PA (such as ROPAQUE® HP-1055 and ROPAQUE® HP-543P). In an embodiment, the pigments are precipitated calcium carbonates, and in another embodiment, the pigments are calcium carbonates with an aragonite crystal structure and a high aspect ratio (non-limitative examples of which include OPACARB A-40, which is commercially available from Specialty Minerals Inc., Bethlehem, PA. In still another embodiment, the pigment is an ultrafine kaolin clay having a median equivalent spherical diameter (esd) of less than about 650 nm, as determined by a Microtrac-UPA150 (available from Nikkiso Co., Ltd.) laser light scattering device).

In an embodiment, the inorganic pigments are present in the base layer 14 in an amount ranging from about 30% to about 60% by dry weight of the base layer 14. In another embodiment, the polymeric or plastic pigments are present in the base layer 14 in an amount ranging from about 1% to about 4% by dry weight.

A non-limiting example of the base layer 14 includes aragonite precipitated calcium carbonate with the calcined clay present in a ratio ranging from 3:7 to 7:3.

The base layer 14 may also include one or more binders. Non-limiting examples of such binders include poly(vinyl alcohol), polyvinylacetates, polyacrylates, polymethacrylates, polystyrene-butadiene, polyethylene-polyvinylacetate copolymers, starch, casein, gelatin, and/or copolymers thereof, and/or combinations thereof. Other additives, such as, for example, optical brighteners, defoamers, wetting agents, rheology modifiers, and/or the like, and/or combinations thereof may be added to the base layer 14.

Embodiments of the base layer 14 have a coatweight ranging from about 5 gsm to about 40 gsm. Other embodiments of the base layer 14 have a coatweight ranging from about 15 gsm to about 30 gsm; and still other embodiments of the base layer 14 have a coatweight ranging from about 18 gsm to about 25 gsm.

Fig. 1 also depicts the porous ink receiving layer 16 established on the base layer 14. In an embodiment, the porous ink receiving layer 16 includes silica, alumina, hydrous alumina (which includes but is not limited to boehmite and pseudo-boehmite), calcium carbonate, and/or combinations thereof.

Generally, the porous ink receiving layer 16 has a coatweight ranging from about 2 gsm to about 30 gsm. Other embodiments of the porous ink receiving layer 16 have a coatweight ranging from about 3 gsm to about 10 gsm. It is to be understood that the porous ink receiving layer 16 may be established via any suitable deposition technique/manufacturing process, including, but not limited to roll-coating, conventional slot-die processing, blade coating, slot-die cascade coating, curtain coating and/or other comparable methods including those that use circulating and non-circulating coating

technologies. In certain instances, spray-coating, immersion-coating, and/or cast-coating techniques may be suitable.

One non-limiting example of the porous ink receiving layer 16 includes treated silica or treated fumed silica. In an embodiment, the silica or fumed silica is treated with an inorganic treating agent and a monoaminoorganosilane treating agent. This type of treated layer is described in more detail in U.S. Patent Application Serial No. 11/257,960, filed October 24, 2005, which is incorporated by reference herein in its entirety. This treated silica porous ink receiving layer 16 has a coatweight ranging from about 3 gsm to about 15 gsm.

Another non-limiting example of the porous ink receiving layer 16 includes a combination of boehmite and a binder material (e.g., poly(vinyl alcohol, polyvinyl acetate, polyvinylacrylate, polyvinylacrylate esters, polyvinylmethacrylate, polyvinylmethacrylate esters, mixtures and/or copolymers of the monomers used in the previously mention polymers, and/or combinations thereof). This embodiment of the porous ink receiving layer 16 has a coatweight ranging from about 0.5 gsm to about 30 gsm.

Fig. 2 depicts another embodiment of the inkjet recording medium 10'. In this embodiment, an intermediate layer 18 is established between the porous ink receiving layer 16 and the base layer 14. While a single intermediate layer 18 is shown in Fig. 2, it is to be understood that any number of intermediate layers 18 may be included between the porous ink receiving layer 16 and the base layer 14.

Generally, the one or more intermediate layer(s) 18 may include silica (e.g., fumed, precipitated, gel or colloidal silica), alumina, hydrous alumina, calcium carbonate, and/or combinations thereof. Embodiments of the intermediate layer(s) 18 have coatweights ranging from about 0 gsm to about 30 gsm; or more preferably between about 3 gsm and about 15 gsm. As a non-limiting example, the intermediate layer 18 includes silica (a non-limiting example of which includes the previously described treated silica), and has a coatweight ranging from about 5 gsm to about 10 gsm. In this example, the porous ink receiving layer 16 may include boehmite and have a coatweight less than or equal to about 4 gsm.

Referring now to Fig. 3, another embodiment of the inkjet recording medium 10'' is depicted. In this embodiment, the previously described substrate coating 20 is disposed between the substrate surface S_1 and the base layer 14. It is to be understood that the substrate coating 20 may also be established on the other substrate surface S_2 . Non-limiting examples of the substrate coating 20 include the previously described ink impermeable materials (e.g., polyethylene), silica, alumina, calcined clay, calcium carbonate, kaolin clay, sodium silicates, calcium silicates and/or the like, and/or combinations thereof.

In the embodiment shown in Fig. 3, a backcoat 22 is established on the substrate surface S_2 that is opposed to the substrate surface S_1 having the substrate coating 20 established thereon. The backcoat 22 may be added to achieve reduced curling of the substrate 12, optimal picking performance (i.e., a single substrate 12 is easily removed from a stack of substrates 12, and optimal stacking performance. Non-limiting examples of materials suitable for forming the backcoat 22 include those materials suitable for the substrate coating 20.

Figs. 4 and 5 depict the embodiments of the inkjet recording medium 10, 10' of Figs. 1 and 2, respectively, having a backcoat 22 established thereon. As shown in the Figures, the backcoat 22 is established on the substrate surface S_2 that is opposed to the substrate surface S_1 having the base layer 14 established thereon. It is believed that the backcoat 22 improves curl and friction of the embodiment(s) of the inkjet recording medium 10, 10'.

Fig. 6 depicts still another embodiment of the inkjet recording medium 10'''. In this embodiment, base layers 14 are established on both substrate surface S_1 , S_2 , and porous inkjet receiving layers 16 are established on each of the base layers 14. It is to be understood that the materials, additional layers (18, 20, 22) and processes disclosed herein in reference to the other embodiments are suitable for forming the embodiment of the inkjet recording medium 10'''.

In any of the embodiments disclosed herein, the gloss of the inkjet recording medium 10, 10', 10'', 10''' may be obtained by calendering the entire medium 10, 10', 10'', 10''', by calendering the base layer 14 before establishing

the porous ink receiving layer 16, or by calendering the intermediate layer 18 before establishing the ink receiving layer 16.

An embodiment of the inkjet recording system disclosed herein includes an embodiment of the inkjet recording medium 10, 10', 10'', 10''' and an inkjet
5 ink configured to be established on the inkjet recording medium 10, 10', 10'', 10'''. In an embodiment of a method for using embodiment(s) of the inkjet ink system, the ink is established on at least a portion of the medium 10, 10', 10'', 10''' to form an image. The amount of the ink established depends, at least in part, on the desirable image to be formed. The image may include
10 alphanumeric indicia, graphical indicia, or combinations thereof.

Non-limiting examples of suitable inkjet printing techniques include thermal inkjet printing, piezoelectric inkjet printing, or continuous inkjet printing. Suitable printers include portable thermal or piezoelectric inkjet printers (e.g., handheld printers, arm mountable printers, wrist mountable printers, etc.),
15 desktop thermal or piezoelectric inkjet printers, continuous inkjet printers, or combinations thereof.

To further illustrate embodiment(s) of the present disclosure, an example is given herein. It is to be understood that this example is provided for illustrative purposes and is not to be construed as limiting the scope of the
20 disclosed embodiment(s).

EXAMPLE

An embodiment of the inkjet recording medium disclosed herein was prepared with a base layer including 0.6% (dry weight) of a surfactant, 4.3% (dry
25 weight) of plastic pigment, 51.2% (dry weight) of calcium carbonate, 34.1% (dry weight) of calcined clay, 9.4% (dry weight) of styrene-butadiene binder, and 0.4% (dry weight) of poly(vinyl alcohol). The coatweight of the base layer was about 20 gsm. A silica porous ink receiving layer (having a coatweight of about 7 gsm) was established on the base layer.

30 A comparative medium was prepared with a calcium carbonate base coat, and a silica porous ink receiving layer (coatweight ~ 7 gsm) established on the calcium carbonate base coat.

Ink was established on each of the embodiments of the medium disclosed herein (referred to as "medium") and the comparative medium (referred to as "comparative medium") using an inkjet printer. The bleed, optical density, and gamut were measured for each sample.

5 Eight different samples of the medium and the comparative medium were tested for bleed. Various color combinations were printed together, and the bleed was measured in milliliters. The maximum bleed for ink printed on the medium was about 5 ml, whereas the maximum bleed for ink printed on the comparative medium was about 9 ml. Half of the mediums had reduced bleed
10 compared to the comparative medium, and three of the mediums had substantially the same bleed results as the comparative medium. These results indicate that the majority of the mediums tested exhibited either better or comparable bleed results as compared to the bleed on the comparative medium.

15 The results for optical density and gamut are shown in Tables 1 and 2, respectively.

Table 1: Optical Density

Sample	Black Optical Density (K OD)
Medium	2.3
Medium	2.3
Medium	2.3
Comparative Medium	1.72
Comparative Medium	1.73
Comparative Medium	1.73

20 As depicted in Table 1, the black optical density was greater on the medium than on the comparative medium. Without being bound to any theory, it is believed that these results are due, at least in part, to the specific combination of the base layer and the porous ink receiving layer of the embodiment(s) of the medium disclosed herein.

25

Table 2: Gamut Volume

Sample	Gamut Volume
Medium	410794
Medium	417383
Medium	416384
Comparative Medium	287854
Comparative Medium	292130
Comparative Medium	287551

As depicted in Table 2, the gamut volume of the ink was greater on the medium than on the comparative medium. Without being bound to any theory, it is believed that the gamut results are due, at least in part, to the specific combination of the base layer and the porous ink receiving layer of the embodiments of the medium disclosed herein.

While several embodiments have been described in detail, it will be apparent to those skilled in the art that the disclosed embodiments may be modified. Therefore, the foregoing description is to be considered exemplary rather than limiting.

What is claimed is:

1. An inkjet recording medium (10, 10', 10'', 10'''), comprising:
a substrate (12);
5 a base layer (14) established on at least one surface (S_1) of the substrate (12), the base layer (14) including calcined clay present in an amount ranging from about 25% to about 75% by dry weight; and
a porous ink receiving layer (16) established on the base layer (14).
- 10 2. The inkjet recording medium (10, 10', 10'', 10''') as defined in claim 1, further comprising at least one intermediate layer (18) established between the base layer (14) and the porous ink receiving layer (16).
- 15 3. The inkjet recording medium (10, 10', 10'', 10''') as defined in claim 2 wherein the at least one intermediate layer (18) includes fumed silica treated with an inorganic treating agent and a monoaminoorganosilane treating agent, and wherein the porous ink receiving layer (16) includes boehmite or pseudo-boehmite.
- 20 4. The inkjet recording medium (10, 10', 10'', 10''') as defined in any of claims 1 through 3 wherein the base layer (14) further includes a pigment selected from kaolin clay, calcium carbonate, polymeric pigments, aluminum trihydrate, titanium dioxide, and combinations thereof.
- 25 5. The inkjet recording medium (10, 10', 10'', 10''') as defined in any of claims 1, 2 and 4 wherein the porous ink receiving layer (16) includes silica, alumina, hydrous alumina, calcium carbonate, or combinations thereof.
- 30 6. The inkjet recording medium (10, 10', 10'', 10''') as defined in claim 5 wherein the porous ink receiving layer (16) includes silica treated with an inorganic treating agent and a monoaminoorganosilane treating agent.

7. The inkjet recording medium (10, 10', 10'', 10''') as defined in any of claims 1 through 6 wherein a printed indicia is formed when an inkjet ink is established on the inkjet recording medium (10, 10', 10'', 10'''), and wherein the printed indicia or the inkjet recording medium (10, 10', 10'', 10''') exhibits a characteristic selected from enhanced color saturation, reduced bleed, reduced coalescence, reduced drytime, enhanced ink uptake, and combinations thereof.

8. The inkjet recording medium (10, 10', 10'', 10''') as defined in any of claims 1 through 7, further comprising a backcoat (22) established on at least one other surface (S_2) of the substrate (12), the at least one other surface (S_2) being opposed to the at least one surface (S_1) upon which the base layer (14) is established.

9. A method of making an inkjet recording medium (10, 10', 10'', 10'''), comprising:

establishing a base layer (14) on a substrate surface (S_1 , S_2), the base layer (14) including calcined clay present in an amount ranging from about 25% to about 75% by dry weight; and

establishing a porous ink receiving layer (16) on the base layer (14).

10. The method as defined in claim 9, further comprising providing an aqueous suspension that is used to form the base layer (14), the aqueous suspension including:

the calcined clay present in an amount ranging from about 25% to about 75% by dry weight; and

a pigment selected from kaolin clay, calcium carbonate, polymeric pigments, aluminum trihydrate, titanium dioxide, or combinations thereof.

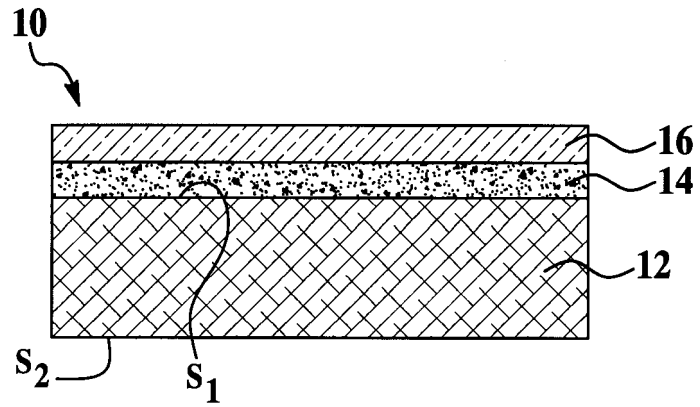


FIG. 1

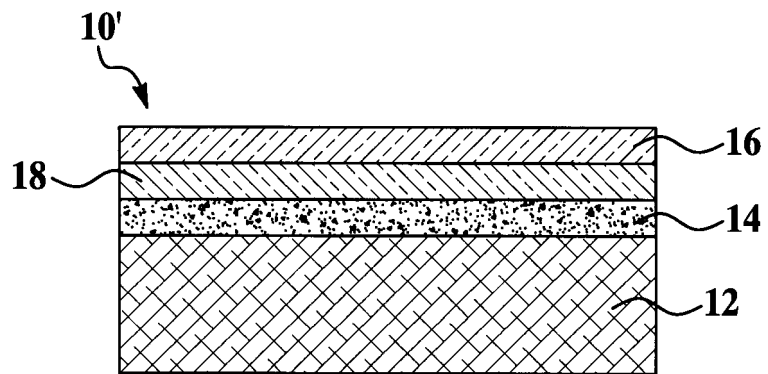


FIG. 2

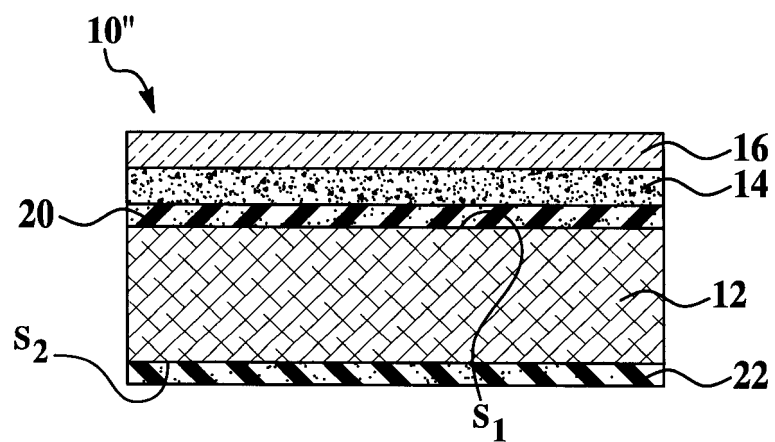


FIG. 3

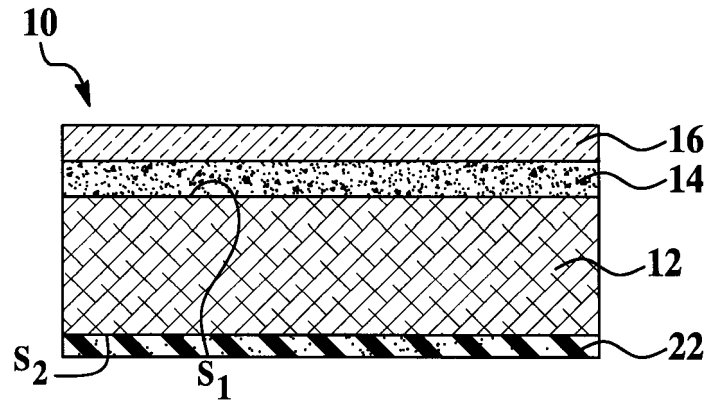


FIG. 4

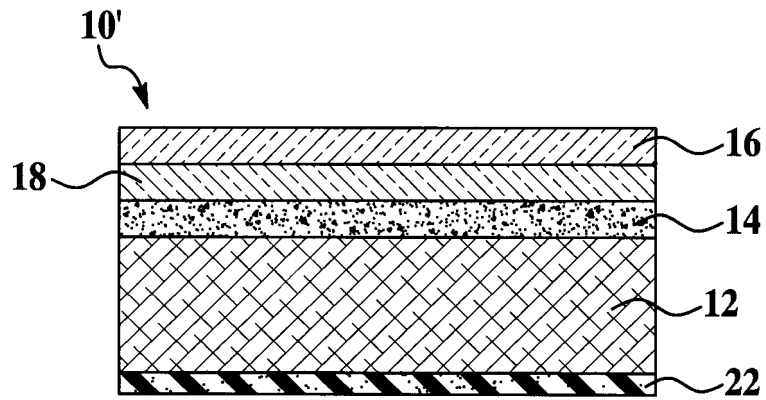


FIG. 5

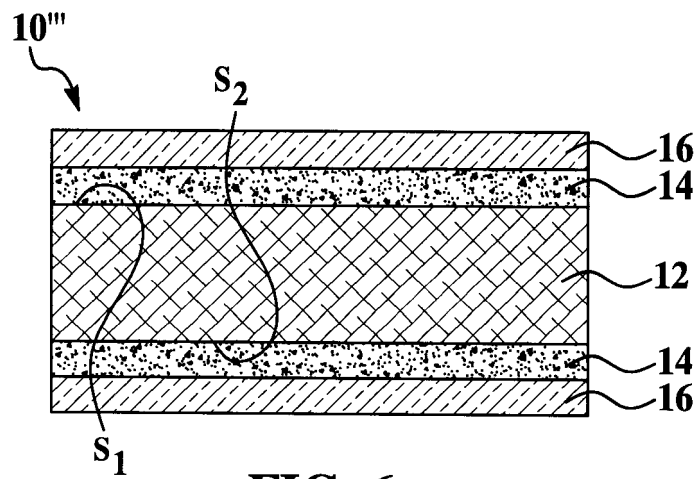


FIG. 6