




(86) Date de dépôt PCT/PCT Filing Date: 2014/07/14	(51) Cl.Int./Int.Cl. <i>G02B 6/38</i> (2006.01)
(87) Date publication PCT/PCT Publication Date: 2015/07/23	(72) Inventeurs/Inventors:
(45) Date de délivrance/Issue Date: 2018/03/13	YAN, XIONGWEI, CN;
(85) Entrée phase nationale/National Entry: 2016/07/11	LAN, XIAOBO, CN;
(86) N° demande PCT/PCT Application No.: CN 2014/082157	FU, XIN, CN;
(87) N° publication PCT/PCT Publication No.: 2015/106550	HU, JIANPENG, CN;
(30) Priorité/Priority: 2014/01/14 (CN201410016155.4)	CHEN, SHIRONG, CN;
	XIONG, YU, CN
	(73) Propriétaire/Owner:
	HUAWEI TECHNOLOGIES CO., LTD., CN
	(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : CONNECTEUR DE FIBRES OPTIQUES ET SYSTEME DE COMPOSANTS DE CONNECTEUR DE FIBRES OPTIQUES
(54) Title: OPTICAL FIBER CONNECTOR AND OPTICAL FIBER CONNECTOR COMPONENT SYSTEM

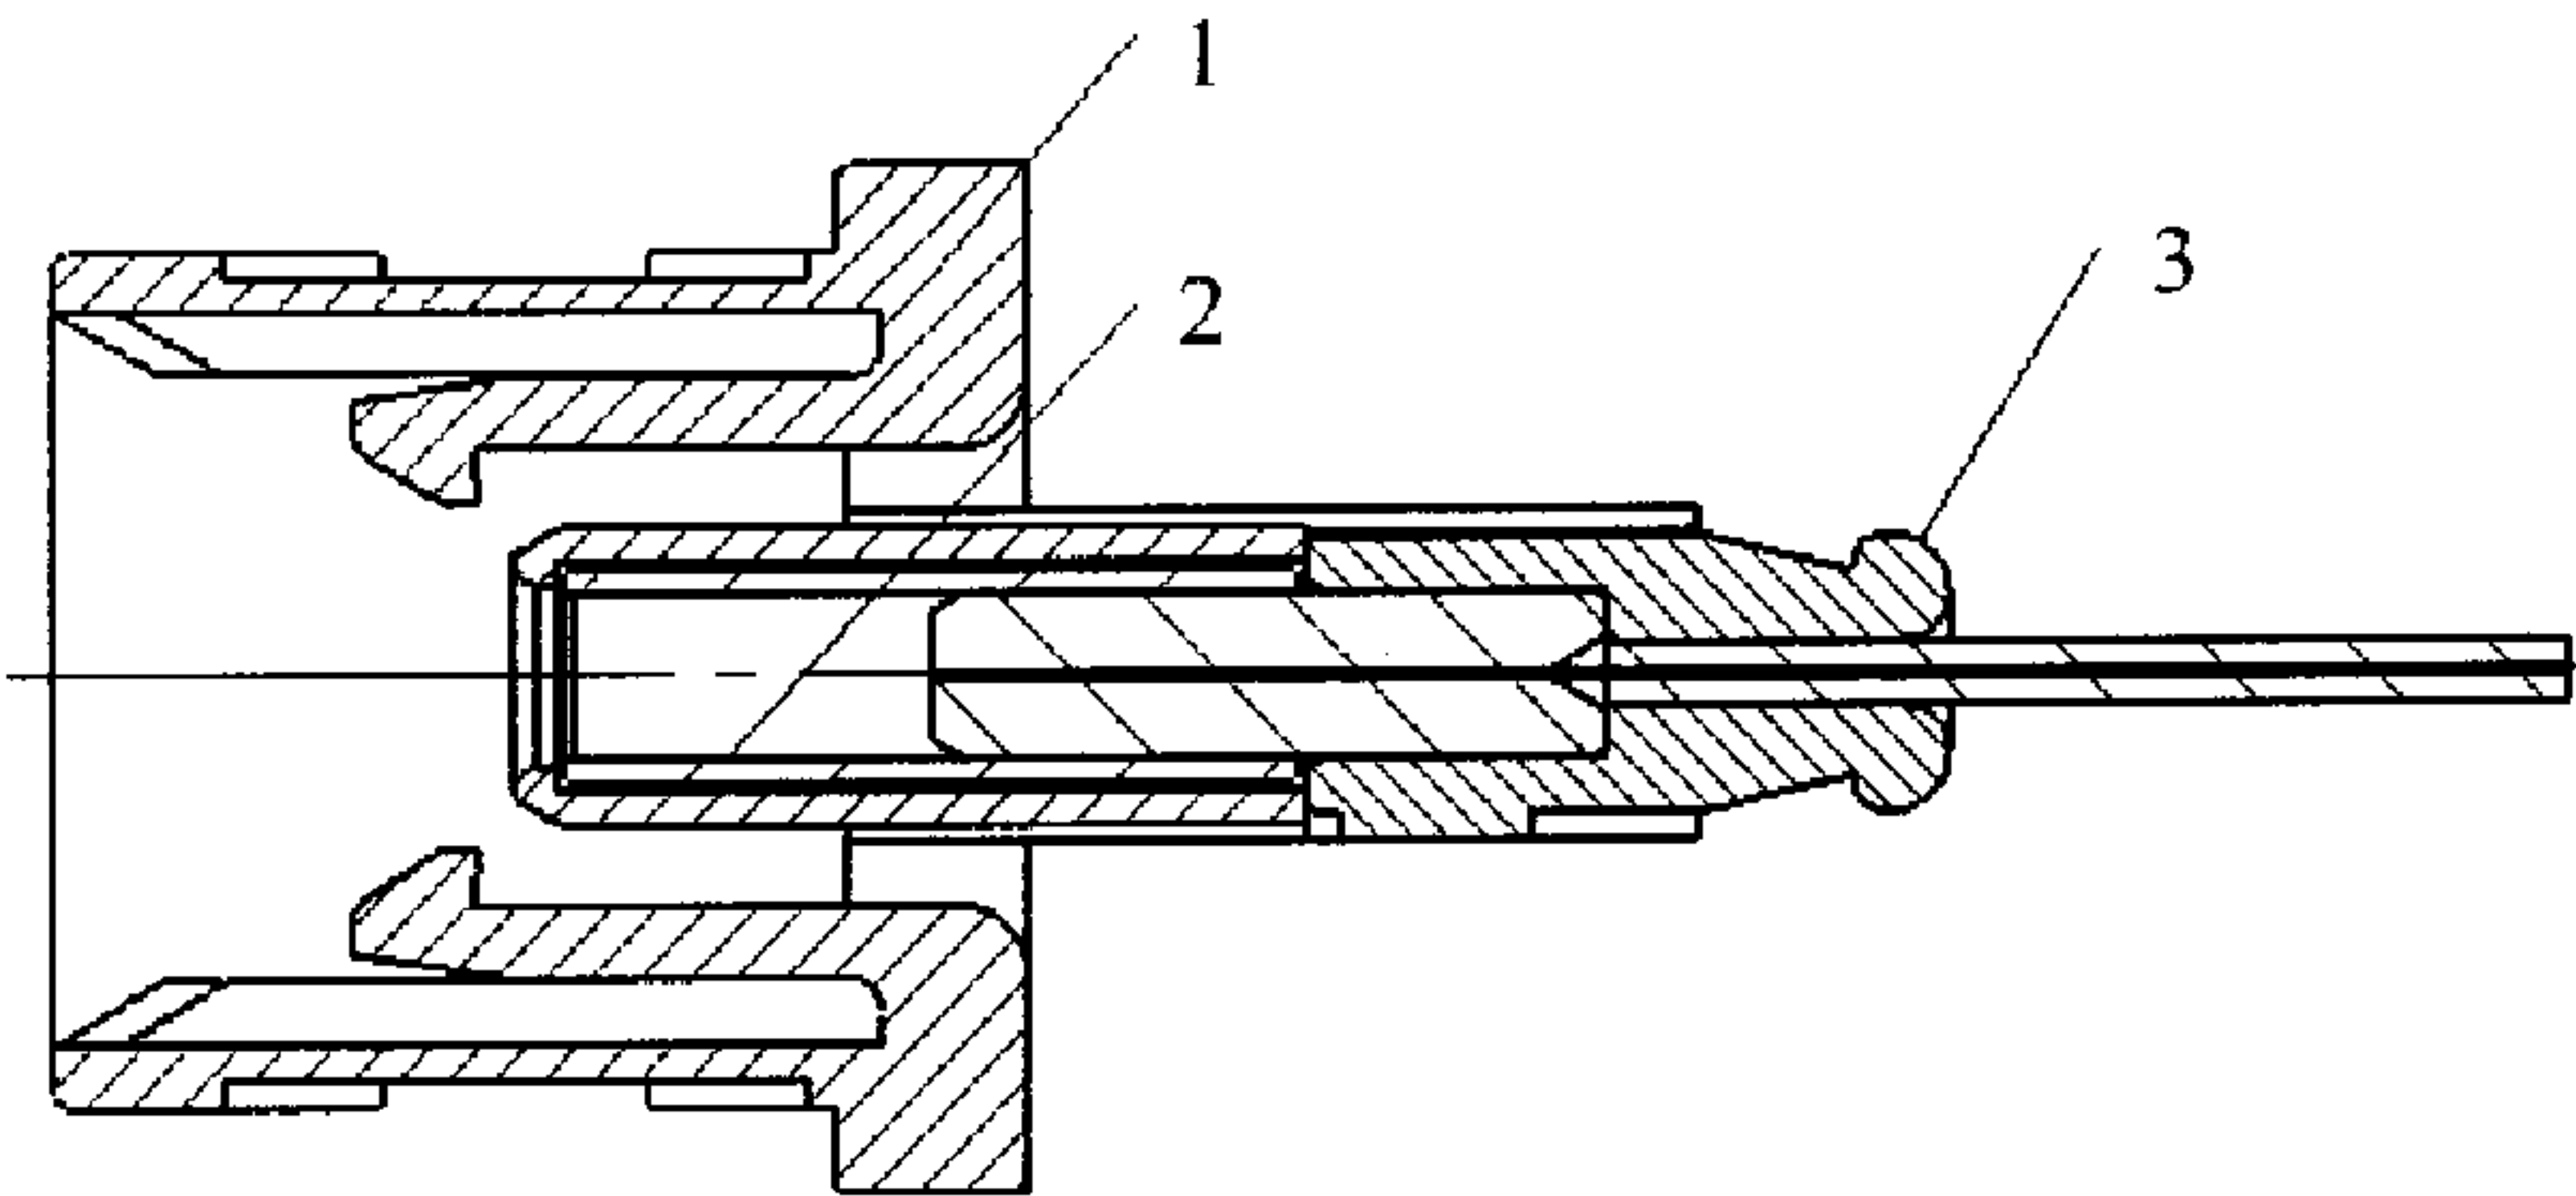

(57) **Abrégé/Abstract:**
Embodiments of the present invention disclose an optical fiber connector, including a main body (1), a sleeve (2), and a plug (3). The main body (1) includes a first cube and a second cube that are formed by means of injection molding, where a first cavity (10) is disposed inside the first cube, and the first cavity (10) is used to adapt to an optical fiber sub-assembly inserted from a first end face of the first cube; at least two hook-like structures (11) are formed, by means of injection molding, on the first cube extending from a second end face that is parallel to the first end face into the first cavity (10), and the hook-like structures (11) are used to tightly lock the optical fiber sub-assembly when the optical fiber sub-assembly is inserted from the first end face. The optical fiber connector provided in the present invention can reduce the number of parts, lower manufacturing costs, and shorten installation time.

ABSTRACT

Embodiments of the present invention disclose an optical fiber connector, including a main body (1), a sleeve (2), and a plug (3). The main body (1) includes a first cube and a second cube that are formed by means of injection molding, where a first cavity (1o) is disposed inside the first cube, and the first cavity (1o) is used to adapt to an optical fiber sub-assembly inserted from a first end face of the first cube; at least two hook-like structures (1n) are formed, by means of injection molding, on the first cube extending from a second end face that is parallel to the first end face into the first cavity (1o), and the hook-like structures (1n) are used to tightly lock the optical fiber sub-assembly when the optical fiber sub-assembly is inserted from the first end face. The optical fiber connector provided in the present invention can reduce the number of parts, lower manufacturing costs, and shorten installation time.

OPTICAL FIBER CONNECTOR AND OPTICAL FIBER CONNECTOR COMPONENT SYSTEM

TECHNICAL FIELD

[0001] The present invention relates to the computer telecommunications communications
5 field, and in particular, to an optical fiber connector and an optical fiber connector component
system.

BACKGROUND

[0002] An optical fiber connector is a passive component for implementing a flexible
connection between optical fibers. Most optical fiber connectors include two individual
10 optical fiber sub-assemblies and one individual optical fiber adapter. The two optical fiber
sub-assemblies are inserted into two ends of the optical fiber adapter, locking mechanisms on
the optical fiber adapter and the optical fiber sub-assemblies cooperate with each other to
fasten the optical fiber sub-assemblies, and a ceramic ferrule (a ferrule includes an optical
fiber) at a front end of the two optical fiber sub-assemblies is inserted into a ceramic sleeve
15 inside the optical fiber adapter, so as to implement an interconnection of an optical fiber. All
the optical fiber sub-assemblies and optical fiber adapter on two sides are separate, and can be
inserted and removed.

[0003] In an existing optical fiber connector, more parts are used for each optical fiber,
leading to relatively high costs and relatively long installation time required.

20

SUMMARY

[0004] In view of this, embodiments of the present invention provide an optical fiber
connector, which is used to solve the foregoing technical problems, and can reduce used parts,
lower manufacturing costs, and shorten installation time.

[0005] According to a first aspect, an optical fiber connector includes a main body (1), a sleeve (2), and a plug (3), where

the main body (1) includes a first cube and a second cube that are formed by means of injection molding, where a first cavity (1o) is disposed inside the first cube and the first cavity (1o) is used to adapt to an optical fiber sub-assembly inserted from a first end face of the first cube;

at least two hook-like structures (1n) are formed, by means of injection molding, on the first cube extending from a second end face into the first cavity (1o), and the hook-like structures (1n) are used to tightly lock the optical fiber sub-assembly when the optical fiber sub-assembly is inserted from the first end face;

a first part of the second cube is accommodated in the first cavity (1o) of the first cube, and is fastened to the first cube by means of injection molding; a second part of the second cube extends along an axial direction, and protrudes on the first cube, where the axial direction indicates a direction from the first end face to the second end face; and

the second cube has a third cavity (1i) that traverses along an axial direction, where the third cavity (1i) is used to accommodate the sleeve (2); and the hook-like structures (1n) and the first part of the second cube form a first gap, where the gap is used for demolding.

[0006] In a first possible implementation manner of the first aspect, a first notch (1h) and a square hole (1k) are disposed in the third cavity (1i), and used to lock the plug (3) when the plug (3) is inserted into the third cavity (1i).

[0007] In a second possible implementation manner of the first aspect, a guiding gap (1a) is opened on an upper wall outside the first cube, and is used to limit an inserting direction of the inserted optical fiber sub-assembly.

[0008] In a third possible implementation manner of the first aspect, a recess (1b) is disposed on two side walls and a lower wall outside the first cube.

[0009] In a fourth possible implementation manner of the first aspect, two stub wings (1d) are symmetrically disposed on two side surfaces of the first cube.

[0010] In a fifth possible implementation manner of the first aspect, a second notch (1j) is disposed on a side surface of the third cavity.

[0011] In a sixth possible implementation manner of the first aspect, two grooves (11) are disposed on a lower surface of the second cube and close to a root part of the first cube.

[0012] In a seventh possible implementation manner of the first aspect, the optical fiber connector further includes a mounting accessory (4) that is fastened to the main body (1) by using the grooves (11).

[0013] In an eighth possible implementation manner of the first aspect, bosses (4c) are disposed at the top and the bottom of an interior of a square hole of the mounting accessory (4), where the bosses (4c) are used to be installed as a whole with the grooves (11) by clamping and fastening.

[0014] According to a second aspect, an optical fiber connector component system is provided, including a panel, where multiple optical fiber connectors are mounted on the panel in an inserting manner and each optical fiber connector has a structure according to the first aspect and any one of possible implementation manners of the first aspect.

[0015] The optical fiber connector provided in the present invention can reduce the number of parts, lower manufacturing costs, and shorten installation time.

BRIEF DESCRIPTION OF DRAWINGS

[0016] To describe the technical solutions in the embodiments of the present invention more clearly, the following briefly introduces the accompanying drawings required for describing the embodiments. Apparently, the accompanying drawings in the following description show merely some embodiments of the present invention, and persons of ordinary skill in the art may still derive other drawings from these accompanying drawings without creative efforts.

[0017] FIG. 1 is a three-dimensional schematic exploded view of a first implementation manner of an optical fiber connector according to the present invention;

[0018] FIG. 2 is a schematic diagram of assembly of the optical fiber connector shown in FIG. 1;

[0019] FIG. 3 is a sectional view of the optical fiber connector shown in FIG. 2;

[0020] FIG. 4 is a sectional view of another direction of the optical fiber connector shown

in FIG. 2;

[0021] FIG. 5 is an axonometric view of a main body shown in FIG. 1;

[0022] FIG. 6 is a three-dimensional sectional view of the main body shown in FIG. 5;

[0023] FIG. 7 is a sectional view of the main body shown in FIG. 5;

5 [0024] FIG. 8 is a forward schematic diagram of the main body viewed from a back end in FIG. 5;

[0025] FIG. 9 is a schematic diagram of a plug shown in FIG. 1;

[0026] FIG. 10 is a three-dimensional sectional view of the plug shown in FIG. 9;

[0027] FIG. 11 is an axonometric view of a plastic card attached when an optical fiber
10 connector in the present invention is used for panel mounting;

[0028] FIG. 12 is a schematic diagram of assembly of the plastic card shown in FIG. 11 and an optical fiber connector in the present invention;

[0029] FIG. 13 is a three-dimensional schematic exploded view of a core tunable solution embodiment of an optical fiber connector according to the present invention;

15 [0030] FIG. 14 is a schematic diagram of the plug shown in FIG. 9 according to an angled physical contact (APC) embodiment; and

[0031] FIG. 15 is a schematic diagram of an embodiment in which there are a Lucent connector (LC) interface and an LC plug shown in FIG. 1.

DESCRIPTION OF EMBODIMENTS

20 [0032] The following clearly and completely describes the technical solutions in the embodiments of the present invention with reference to the accompanying drawings in the embodiments of the present invention. Apparently, the described embodiments are merely a part rather than all of the embodiments of the present invention. All other embodiments obtained by persons of ordinary skill in the art based on the embodiments of the present
25 invention without creative efforts shall fall within the protection scope of the present invention.

[0033] The following describes the present invention by using an optical fiber connector to which an square connector (SC) adapts. Because interface standards of an existing optical

fiber connector include standards of an SC, an LC, an ferrule connector (FC) , and another connector, such as ST, D4, DIN, MU, MTRJ, and E2000. An embodiment of the present invention is described by using an SC as an example. The present invention is definitely applicable to other standard connectors described above, and a new connector can be obtained
5 by modifying simply according to an idea of this embodiment of the present invention, which is protected by the patent application.

[0034] Refer to FIG. 1 to FIG. 8, which are a socket-type optical fiber connector according to an embodiment of the present invention. The optical fiber connector includes three components: a main body 1, a sleeve 2, and a plug 3, where the main body 1 includes a first
10 cube and a second cube that are formed by means of injection molding, where a first cavity 1o is disposed inside the first cube and the first cavity 1o is used to adapt to an optical fiber sub-assembly inserted from a first end face of the first cube;

at least two hook-like structures 1n are formed, by means of injection molding, on the first cube extending from a second end face that is parallel to the first end face into the
15 first cavity 1o, and the hook-like structures 1n are used to tightly lock the optical fiber sub-assembly when the optical fiber sub-assembly is inserted from the first end face; a first part of the second cube is accommodated in the first cavity 1o of the first cube, and is fastened to the first cube by means of injection molding; a second part of the second cube extends along an axial direction, and protrudes on the first cube, where the axial direction
20 indicates a direction from the first end face to the second end face; the second cube has a third cavity 1i that traverses along an axial direction, where the third cavity 1i is used to accommodate the sleeve 2; and the hook-like structures 1n and the first part of the second cube form a first gap, where the gap is used for demolding.

[0035] The main body 1 may also be referred to as a socket 1. The sleeve 2 is a general
25 component, is the same as a sleeve of a standard SC adapter, and is generally made of zirconia ceramic materials, where an inner hole is ground precisely, and there is a notch on a circumference. Tiny elastic deformation may occur on the sleeve 2, and effect of the sleeve 2 is to keep a ferrule of the plug 3 and a ferrule of an externally connected connector to be coaxial, so that loss of an interconnection of an optical fiber is lowest. The plug 3 is a simple
30 plug including the ferrule, a ferrule flange and a tightly packaged fiber.

[0036] Specifically, refer to FIG. 2, FIG. 3, and FIG. 4, which are an assembly diagram and sectional views in two directions according to the present invention. After assembly, the sleeve 2 is located inside a circular cavity at a center of the main body 1; the plug 3 is fastened by using an accommodation cavity and a positioning structure on the main body 1; and the plug is prevented from being removed by depending on a flip structure including upper and lower bosses on the plug 3 and a square hole on the main body. A ferrule at a front end of the plug 3 is inserted into the sleeve 2; and a front end face of the ferrule exactly reaches a medium surface, and is located at a position about half a length of the sleeve 2, so as to ensure that a contact surface of the plug 3 and an externally inserted standard SC is located on the medium surface. An interface integrally facing outwards in the present invention is a standard SC adapter interface and can directly accommodate insertion of a standard SC, so as to complete an interconnection of an optical fiber.

[0037] Certainly, persons of ordinary skill in the art may also complete a transformation design of an external interface of the main body 1 according to a standard LC adapter interface, a standard FC adapter interface, or another standard adapter interface, so that the external interface can directly accommodate insertion of a standard LC, a standard FC, or another standard connector, so as to complete an interconnection of an optical fiber.

[0038] Refer to FIG. 5, FIG. 6, FIG. 7, and FIG. 8, which are the main body 1 in this embodiment of the present invention. An external form of the part is comprised of two interconnected cubes, where a larger first cube is similar to a half of a structure of a standard SC adapter in shape, and serves as a standard SC adapter interface, and a smaller second cube is used to accommodate and fasten the plug 3. As shown in FIG. 6, there is a first cavity 1o inside the first cube, where the first cavity 1o may be of a square shape or a cylindrical shape, there is a cylinder 1q at a center of the first cavity 1o, a cylinder-shaped second cavity 1r is disposed at a center of the cylinder 1q and is used to accommodate the sleeve 2; a step 1p is at a front end of the second cavity 1r and is used to prevent the sleeve 2 from being removed from the front end; and a positioning step 1s is at a back end of the second cavity 1r and is used for axial positioning when the plug 3 is inserted, so that the front end face of the ferrule of the plug 3 is exactly located on a medium surface at half a length of the second cavity 1r. Two cantilevers 1t (referring to FIG. 7) are symmetrically distributed on two sides of the

cylinder 1q and located in the first cavity 1o, top ends of the two cantilevers 1t are barbs 1n and bosses 1m (referring to FIG. 6 and FIG. 7). The cylinder 1q, two cantilevers 1t, two barbs 1n, and two bosses 1m in the present invention form a lock cylinder structure similar to an SC adapter, and are integrated with a housing of the cavity 1o; and the barbs 1n and the bosses 1m at the top ends of the two cantilevers 1t can be demolded from two sides of the second cube in a manufacturing aspect. For specific demolding space, refer to FIG. 8. The main body 1 is symmetrical by using a vertical middle plane as a symmetrical plane, where demolding space on one side is a cavity surrounded by 1g, 1e, 1u, and 1v. It may be seen from FIG. 8 that, the cavity may be used for demolding, and all the barbs 1n and the upper and lower bosses 1m can be seen in this viewing direction. Therefore, a demolding obstacle does not exist. In the present invention, the first cube, the first cavity 1o, the cylinder 1q and the internal sleeve 2, the cantilevers 1t, and the barbs 1n and the bosses 1m on the cantilevers 1t together form an SC adapter interface that can accommodate insertion of a standard SC and lock the SC. An exterior of the first cube also has some characteristics similar to a standard SC adapter. As shown in FIG. 5, a guiding gap 1a is opened on an upper wall, and cooperates with a guiding key on a common SC to limit that an inserting direction of the SC is unique. A relatively shallow recess (1b) is reserved on two side walls and a lower wall outside the first cube, and is used, when it is necessary, to mount a metal card frequently used by the standard SC adapter, so that the optical fiber connector in the present invention can be mounted on a panel. Two stub wings 1d are symmetrically disposed on two side surfaces of the first cube, which facilitates playing fastening and positioning roles when the present invention is integrated into another component. The two stub wings 1d are similar to two "short ears" of a common SC "short ear" adapter. A gap 1c is disposed at a mid-upper part of the two stub wings 1d, which facilitates fastening in some special application scenarios, for example, the gap 1c is used for cooperating with another structural component, and the main body 1 and the whole connector can be fastened to a circuit board.

[0039] Referring to FIG. 5, there is a third cavity 1i interconnected with the second cavity 1r (referring to FIG. 6) inside the second cube, where the third cavity 1i is used to accommodate the plug 3. There are a wider first notch 1h and a narrower second notch 1j on two sides of the third cavity 1i, where a width of the first notch 1h is slightly greater than a

width of a guiding key 31a (referring to FIG. 9) on the plug 3, and a width of the second notch 1j is less than the width of the guiding key 31a, so that an inserting direction of the plug 3 can only be unique, and this structure can have fool-proof effect for an angled physical contact (APC) plug for which an inserting direction needs to be limited. Meanwhile, the first notch 1h and the second notch 1j enable upper and lower sides of the third cavity 1i to be similar to a cantilever structure, which may cause elastic deformation, so as to facilitate insertion of the plug 3. Square through holes 1k are opened on an upper surface and a lower surface of the second cube, and the square holes 1k cooperate with upper and lower bosses 31b (referring to FIG. 9) on an external circular surface of the plug 3 to prevent the plug 3 from being removed. The third cavity 1i, the first notch 1h, and the square holes 1k form a structure that accommodates insertion of the plug 3 and locks the plug 3. Two small grooves 1l are reserved on the upper surface and lower surface of the second cube and close to a root part of the first cube, and are used to mount, when it is necessary, a plastic card accessory 4 (referring to FIG. 11 and FIG. 12) equipped in the present invention. An external form of the second cube may be a square shape in this solution, and may also be constructed into a circular shape or another shape.

[0040] Refer to FIG. 9 and FIG. 10, which are an assembly diagram and a sectional view of the plug 3 according to the present invention. The plug 3 is fastened to form a whole by using a ferrule flange 31, a ferrule 32, and a tightly packaged fiber 33 after common connector manufacturing processes, such as glue spreading, fiber threading, curing, and ferrule end face grinding, so as to form a simple connector. Referring to FIG. 9, a front section of the ferrule flange 31 is a cylinder 31c, a section of a transition circular conical surface 31d is adjacent to the cylinder 31c, and a step surface 31e is connected to the circular conical surface 31d. The present invention is generally used in an application scenario in which the plug 3 is not frequently inserted and removed. However, when the plug 3 needs to be inserted and removed occasionally, a simple tool may be equipped, and the step surface 31e is used to remove the plug 3. Two bosses 31b are symmetrically disposed at the top and the bottom of an external circular surface of the cylinder 31c, and cooperate with the square holes 1k (referring to FIG. 5) on the main body 1 to fasten the plug 3. A boss guiding key 31a is disposed on one side of the cylinder 31c, is used to limit an inserting direction of an APC plug,

and plays a role the same as that of a positioning key on a housing of a standard SC. Referring to FIG. 10, a larger first circular hole 31f and a smaller second circular hole 31g are disposed at a center of an interior of the ferrule flange 31. The first circular hole 31f is interconnected with the second circular hole 31g. The first circular hole 31f is used to hold a ferrule 32, and cooperates with the ferrule 32 by means of interference fit or adhesive dispensing reinforcement. The second circular hole 31g is used to hold the tightly packaged fiber 33, and is bonded with the tightly packaged fiber by means of adhesive injection. A relatively large rounding 31h is disposed at an outlet of the second circular hole 31g, which enables the tightly packaged fiber 33 to perform better transition when being bended. The ferrule 32 at a front end of the plug is the same as a ferrule of a common SC, and is generally made of zirconia ceramic materials currently. A front end face 32a of the ferrule needs to be ground precisely. A shape of the end face may be ground to a ultra physical contact (UPC) shape and an APC shape that are the same as shapes of a UPC end face and an APC end face of a standard SC respectively. For the APC plug 3, refer to FIG. 14. A main characteristic thereof lies in that: the front end face 32a of the ferrule is an oblique plane and generally has an 8-degree angle with a vertical plane, and an oblique direction of an oblique angle in the present invention needs to be in a same direction with a radial direction of the guiding key 31a. Referring to FIG. 10, the tightly packaged fiber 33 at a back end of the plug is generally a 0.9 mm (millimeter) tightly packaged fiber. There is a 0.125 mm bare fiber at a center of the tightly packaged fiber 33. The bare fiber passes through a micro hole at a center of the ferrule to reach the front end face 32a of the ferrule, and is ground precisely together with the end face 32a of the ferrule. When the present invention is applied to an optical fiber or cable with another dimension, only simple improvement needs to be performed on the second circular hole 31g of the ferrule flange 31 and an optical cable fastening manner or a corresponding accessory needs to be added, which also falls within the protection scope of the present invention.

[0041] Refer to FIG. 11 and FIG. 12, which are a plastic mounting accessory 4 designed in the present invention. In some application scenarios, the present invention may need to be directly inserted into a square hole on a mounting panel for fastening. Therefore, two small grooves 11 (as shown in FIG. 5) are reserved on the main body 1, and bosses 4c are disposed

at the top and the bottom of an interior of the square hole of the mounting accessory 4, and form a whole with the grooves 11 by champing and fastening (whole effect is shown in FIG. 12). When the present invention is inserted into the reserved square hole on the mounting panel, elastic deformation occurs on cantilevers 4a on two sides, which leads to smooth insertion. When the present invention is inserted in place, the cantilevers 4a flicks off to clamp and fasten the panel between two surfaces 4b and 1w, so as to achieve an objective of fastening the connector.

[0042] Refer to FIG. 13, a cooperation structure of the main body 1 and the ferrule flange 31 of the plug 3 in the first embodiment of the present invention is changed simply to obtain a main body 10 and a plug 30 (ferrule flange 310), so as to enable the present invention to be applicable to an application in which there is a core tuning requirement. Specifically, a third cavity of a second cube of the main body 10 is changed to a square cavity 10i, and widths of a first notch 10h and a second notch 10j on two sides of the third cavity 10i are equal, and are slightly greater than widths of bosses 310b on the plug 30. A front end of the ferrule flange 310 of the plug 30 is changed to a cube 310c. A same boss 310b is disposed on each of four surfaces at a periphery of the cube 310c. The bosses 310b cooperate with square holes 10k on the main body 10 to prevent the plug 30 from being removed. In this way, after simple change, the plug 30 may be inserted into the square cavity 10i of the main body 10 in four directions for fastening, so that a fool-proof function of limiting that an inserting direction is unique is canceled in the first embodiment. However, core tuning may be performed on the plug 30 by using a core tuner, and an eccentric direction of a fiber core in the plug 30 is measured by using a concentricity tester (or is referred to as a core tuner) frequently used in the industry, a main body is inserted for fastening by keeping the eccentric direction in a direction when a deviation of 0 degree $\pm$ 50 degrees exists between the eccentric direction and a direction of a guiding gap 10a of the main body 10, which is similar to a frequently used core tuning process and applicable to a high-grade optical fiber connector with a lower interchangeability insertion loss requirement.

[0043] Refer to FIG. 14, which is a plug 3a in a second implementation manner of the present invention, structures of the plug 3a provided in the second implementation manner and the plug 3 (referring to FIG. 9 and FIG. 10) provided in a first implementation manner are

basically the same, implementation functions thereof are similar, and a difference thereof lies in that: an end face 32a of a ferrule in the plug 3a is an APC end face, which can improve return loss performance of an interconnection of an optical fiber in an actual application.

[0044] In this implementation manner, the APC end face 32a of the ferrule is ground to an 8-degree oblique angle, and in a direction of an entire circumference, an oblique direction is consistent with a direction of a guiding key 31a (a direction shown in FIG. 14).

[0045] Refer to FIG. 15, a form of an interface of a first half of the main body 1 of the present invention may be modified simply according to an LC interface standard; and a part cooperating with a ferrule flange is adjusted simply, so as to obtain a main body 100 adapting to a standard LC. A sleeve and a ferrule is changed to an LC sleeve and an LC ferrule, and a structure of a ferrule flange is modified simply to adapt to the ferrule, so that an LC integrated socket-type connector is obtained, where both the number of parts and a connection relationship of the parts of the LC integrated socket-type connector are the same as those in the present invention.

[0046] An embodiment of the present invention further discloses an optical fiber connector component system, including a panel, where multiple optical fiber connectors described above are mounted on the panel in an inserting manner, and an optical fiber sub-assembly adapting to the optical fiber connector may be an SC, LC, and FC optical fiber sub-assembly, and may also be another type of optical fiber sub-assembly.

[0047] An optical fiber connector provided in an embodiment of the present invention can reduce the number of parts, lower manufacturing costs, and shorten installation time.

[0048] Finally, it should be noted that the foregoing embodiments are merely intended for describing the technical solutions of the present invention other than limiting the present invention. Although the present invention is described in detail with reference to the foregoing embodiments, persons of ordinary skill in the art should understand that they may still make modifications to the technical solutions described in the foregoing embodiments or make equivalent replacements to some technical features thereof, without departing from and scope of the technical solutions of the embodiments of the present invention.

CLAIMS

What is claimed is:

1. An optical fiber connector, comprising a main body, a sleeve, and a plug, wherein
the main body comprises a first cube and a second cube that are formed by means of
5 injection molding, wherein a first cavity is disposed inside the first cube and the first cavity is
used to adapt to an optical fiber sub-assembly inserted from a first end face of the first cube;
at least two hook-like structures are formed, by means of injection molding, on the first
cube extending from a second end face that is parallel to the first end face into the first cavity,
and the hook-like structures are used to tightly lock the optical fiber sub-assembly when the
10 optical fiber sub-assembly is inserted from the first end face;
a first part of the second cube is accommodated in the first cavity of the first cube, and is
fastened to the first cube by means of injection molding; a second part of the second cube
extends along an axial direction, and protrudes on the first cube, wherein the axial direction
indicates a direction from the first end face to the second end face; and
15 the second cube has a third cavity that traverses along an axial direction, wherein the
third cavity is used to accommodate the sleeve; and the hook-like structures and the first part
of the second cube form a first gap, wherein the gap is used for demolding,
wherein a first notch and a square hole are disposed in the third cavity, and the first notch
and the square hole are configured to lock the plug when the plug is inserted into the third
20 cavity.
2. The optical fiber connector according to claim 1, wherein a guiding gap is opened on
an upper wall outside the first cube, and the guiding gap is configured to limit an inserting
direction of the inserted optical fiber sub-assembly.
3. The optical fiber connector according to any one of claims 1 to 2, wherein a recess is
25 disposed on side walls and a lower wall outside the first cube.
4. The optical fiber connector according to any one of claims 1 to 3, wherein stub wings
are symmetrically disposed on two side surfaces of the first cube.
5. The optical fiber connector according to any one of claims 1 to 4, wherein a second

notch is disposed on a side surface of the third cavity.

6. The optical fiber connector according to any one of claims 1 to 5, wherein two grooves are disposed on an upper surface and a lower surface of the second cube and close to a root part of the first cube.

5 7. The optical fiber connector according to claim 6, wherein the optical fiber connector further includes a mounting accessory that is fastened to the main body by using the grooves.

8. The optical fiber connector according to claim 7, wherein bosses are disposed, at the top and the bottom of an interior of a square hole of the mounting accessory, and the bosses are used to be installed as a whole with the grooves by fastening.

10 9. An optical fiber connector component system, comprising a panel, wherein multiple optical fiber connectors are mounted on the panel, and each optical fiber connector has the structure according to any one of claims 1 to 8.

1/6

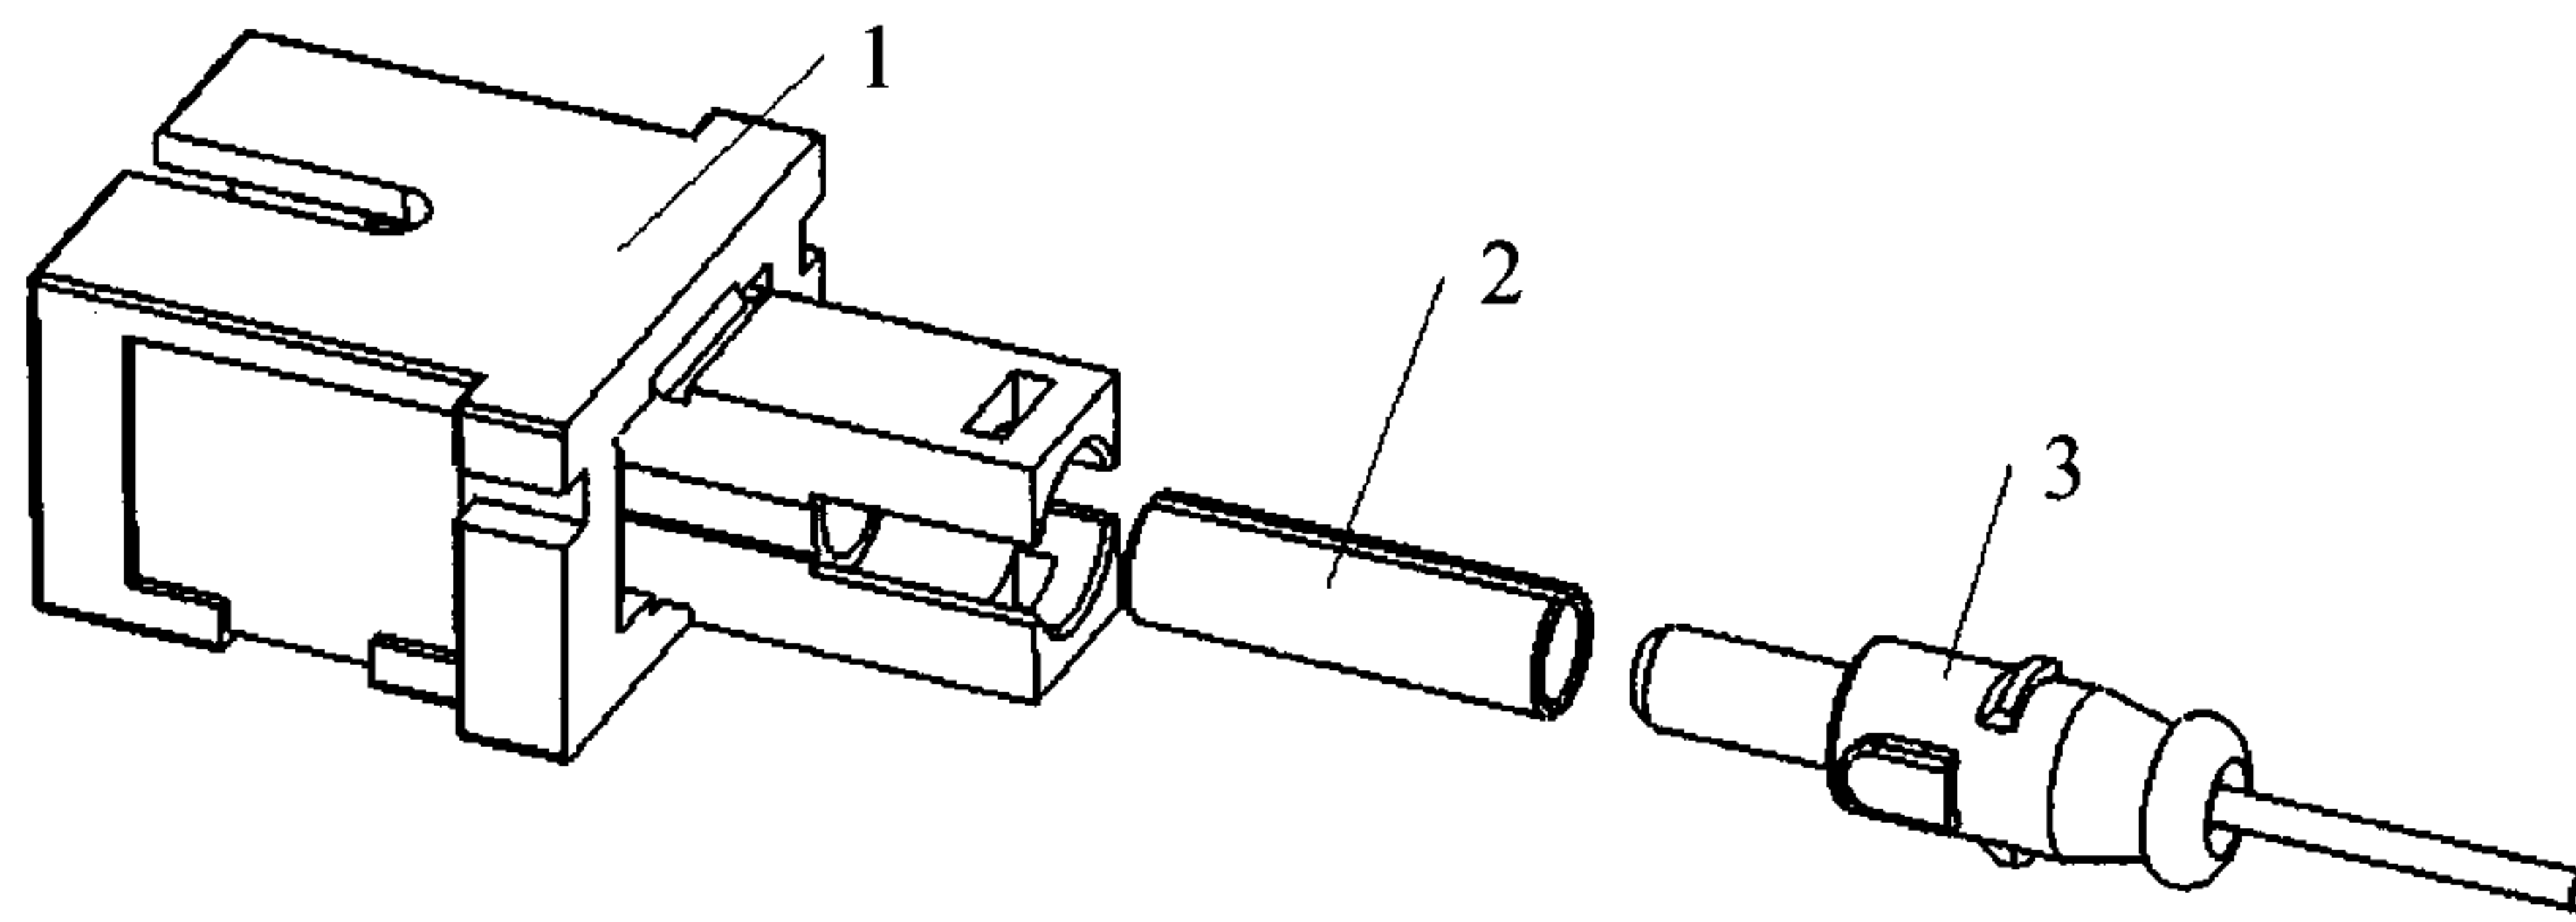


FIG. 1

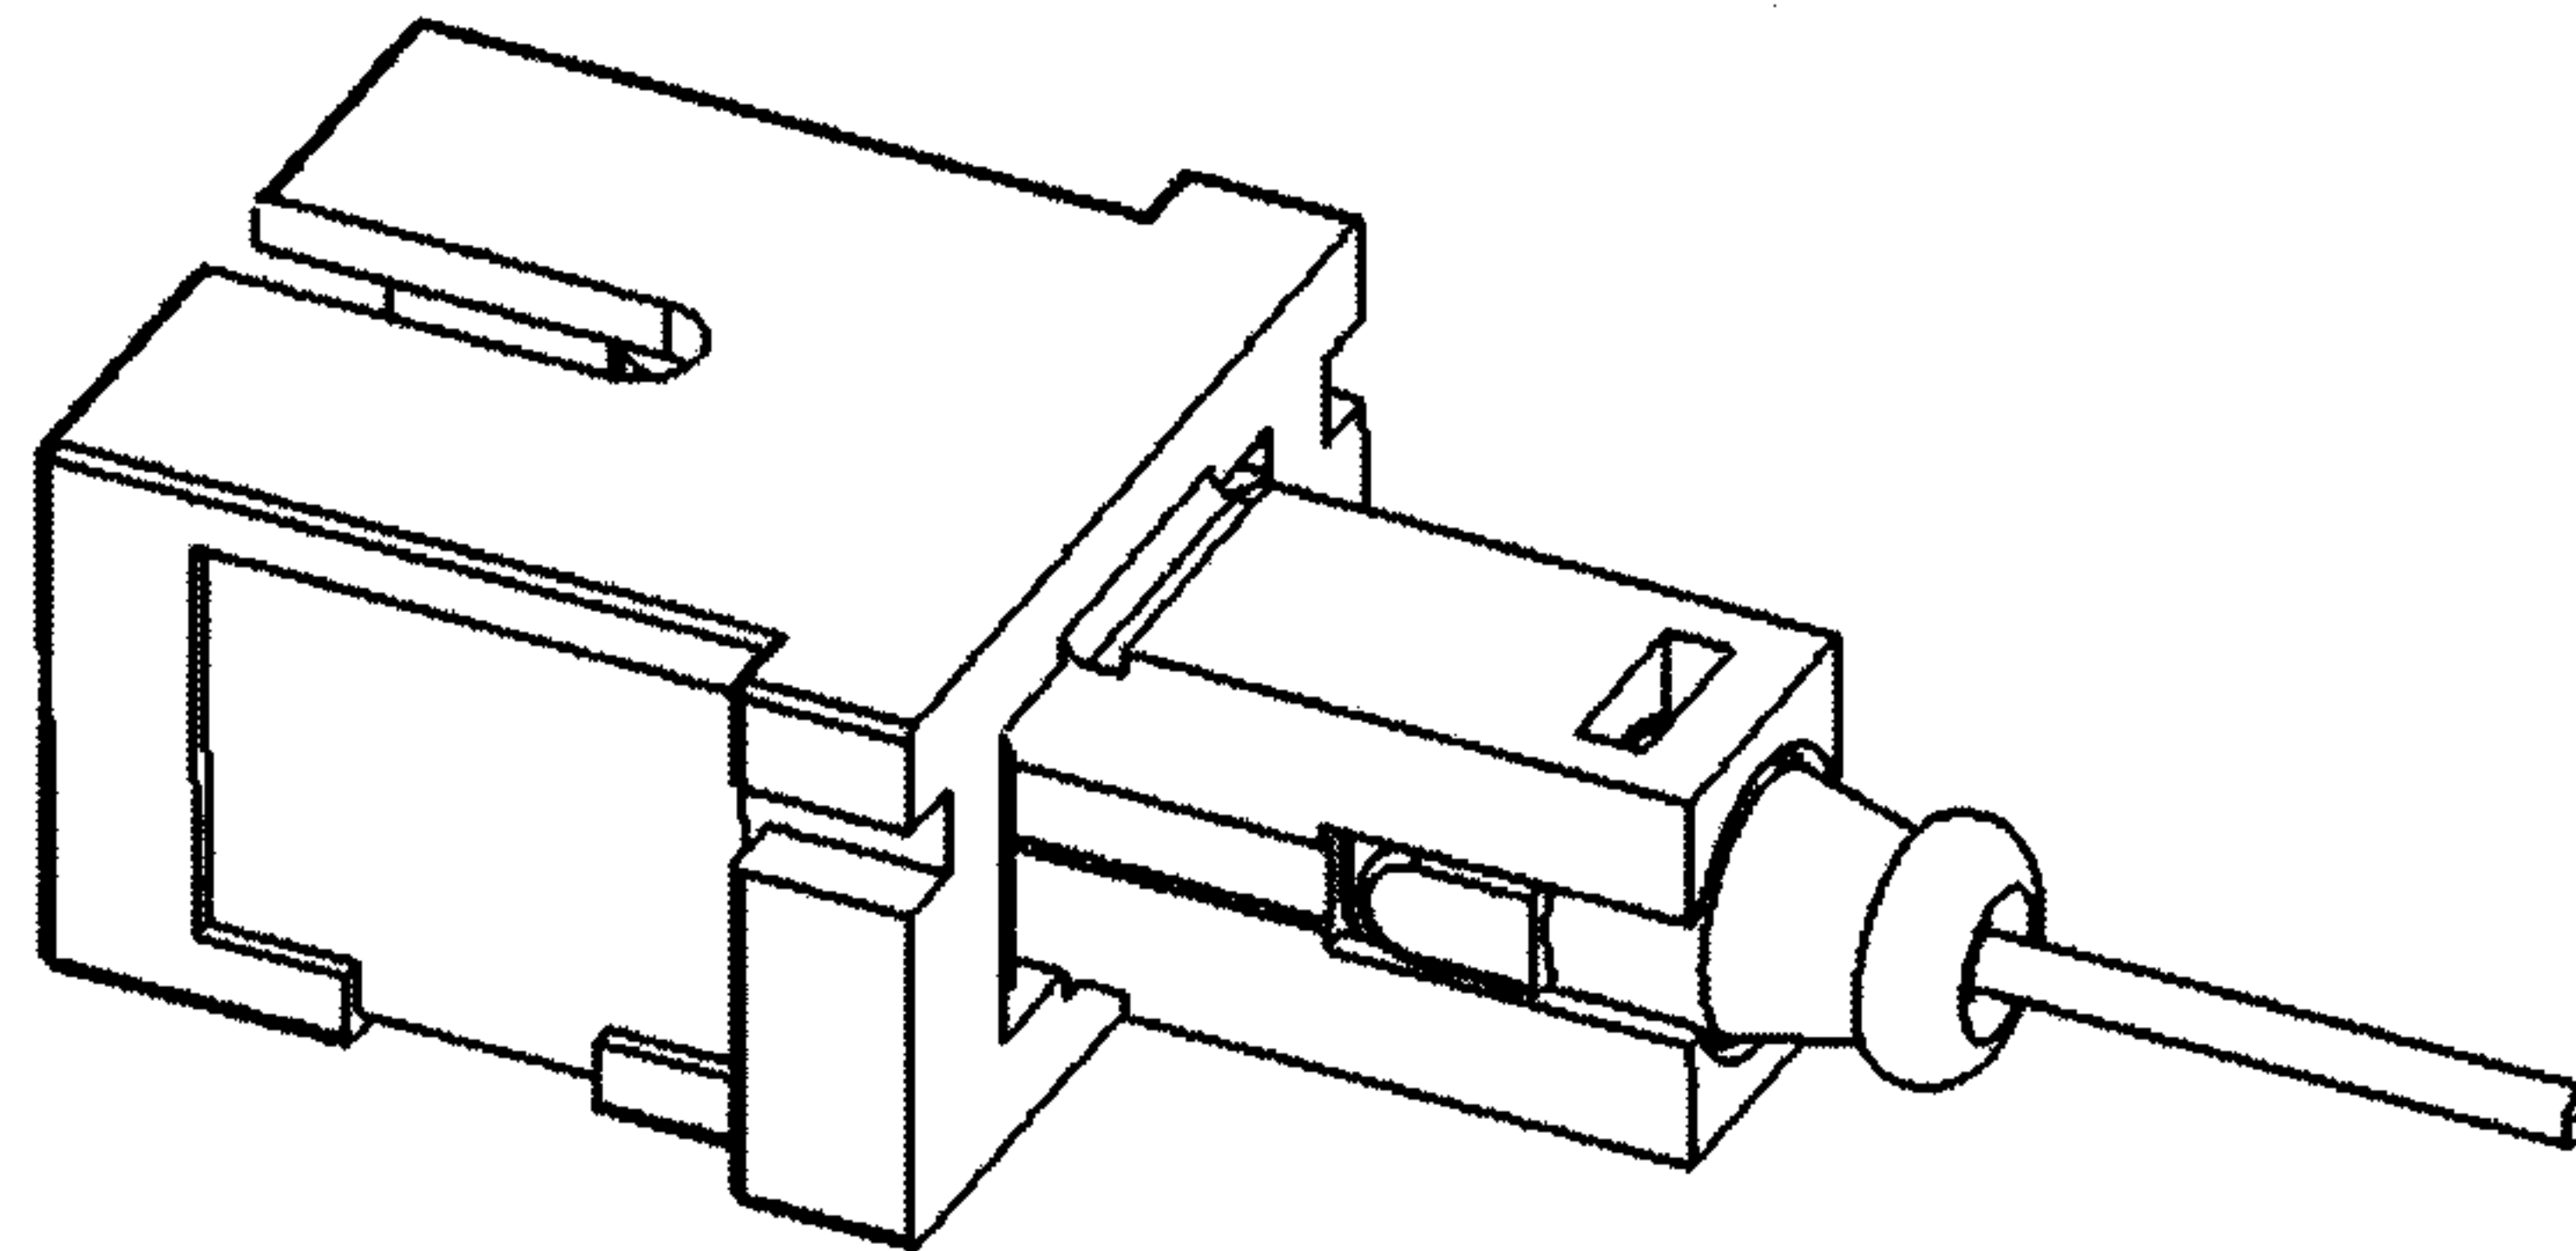


FIG. 2

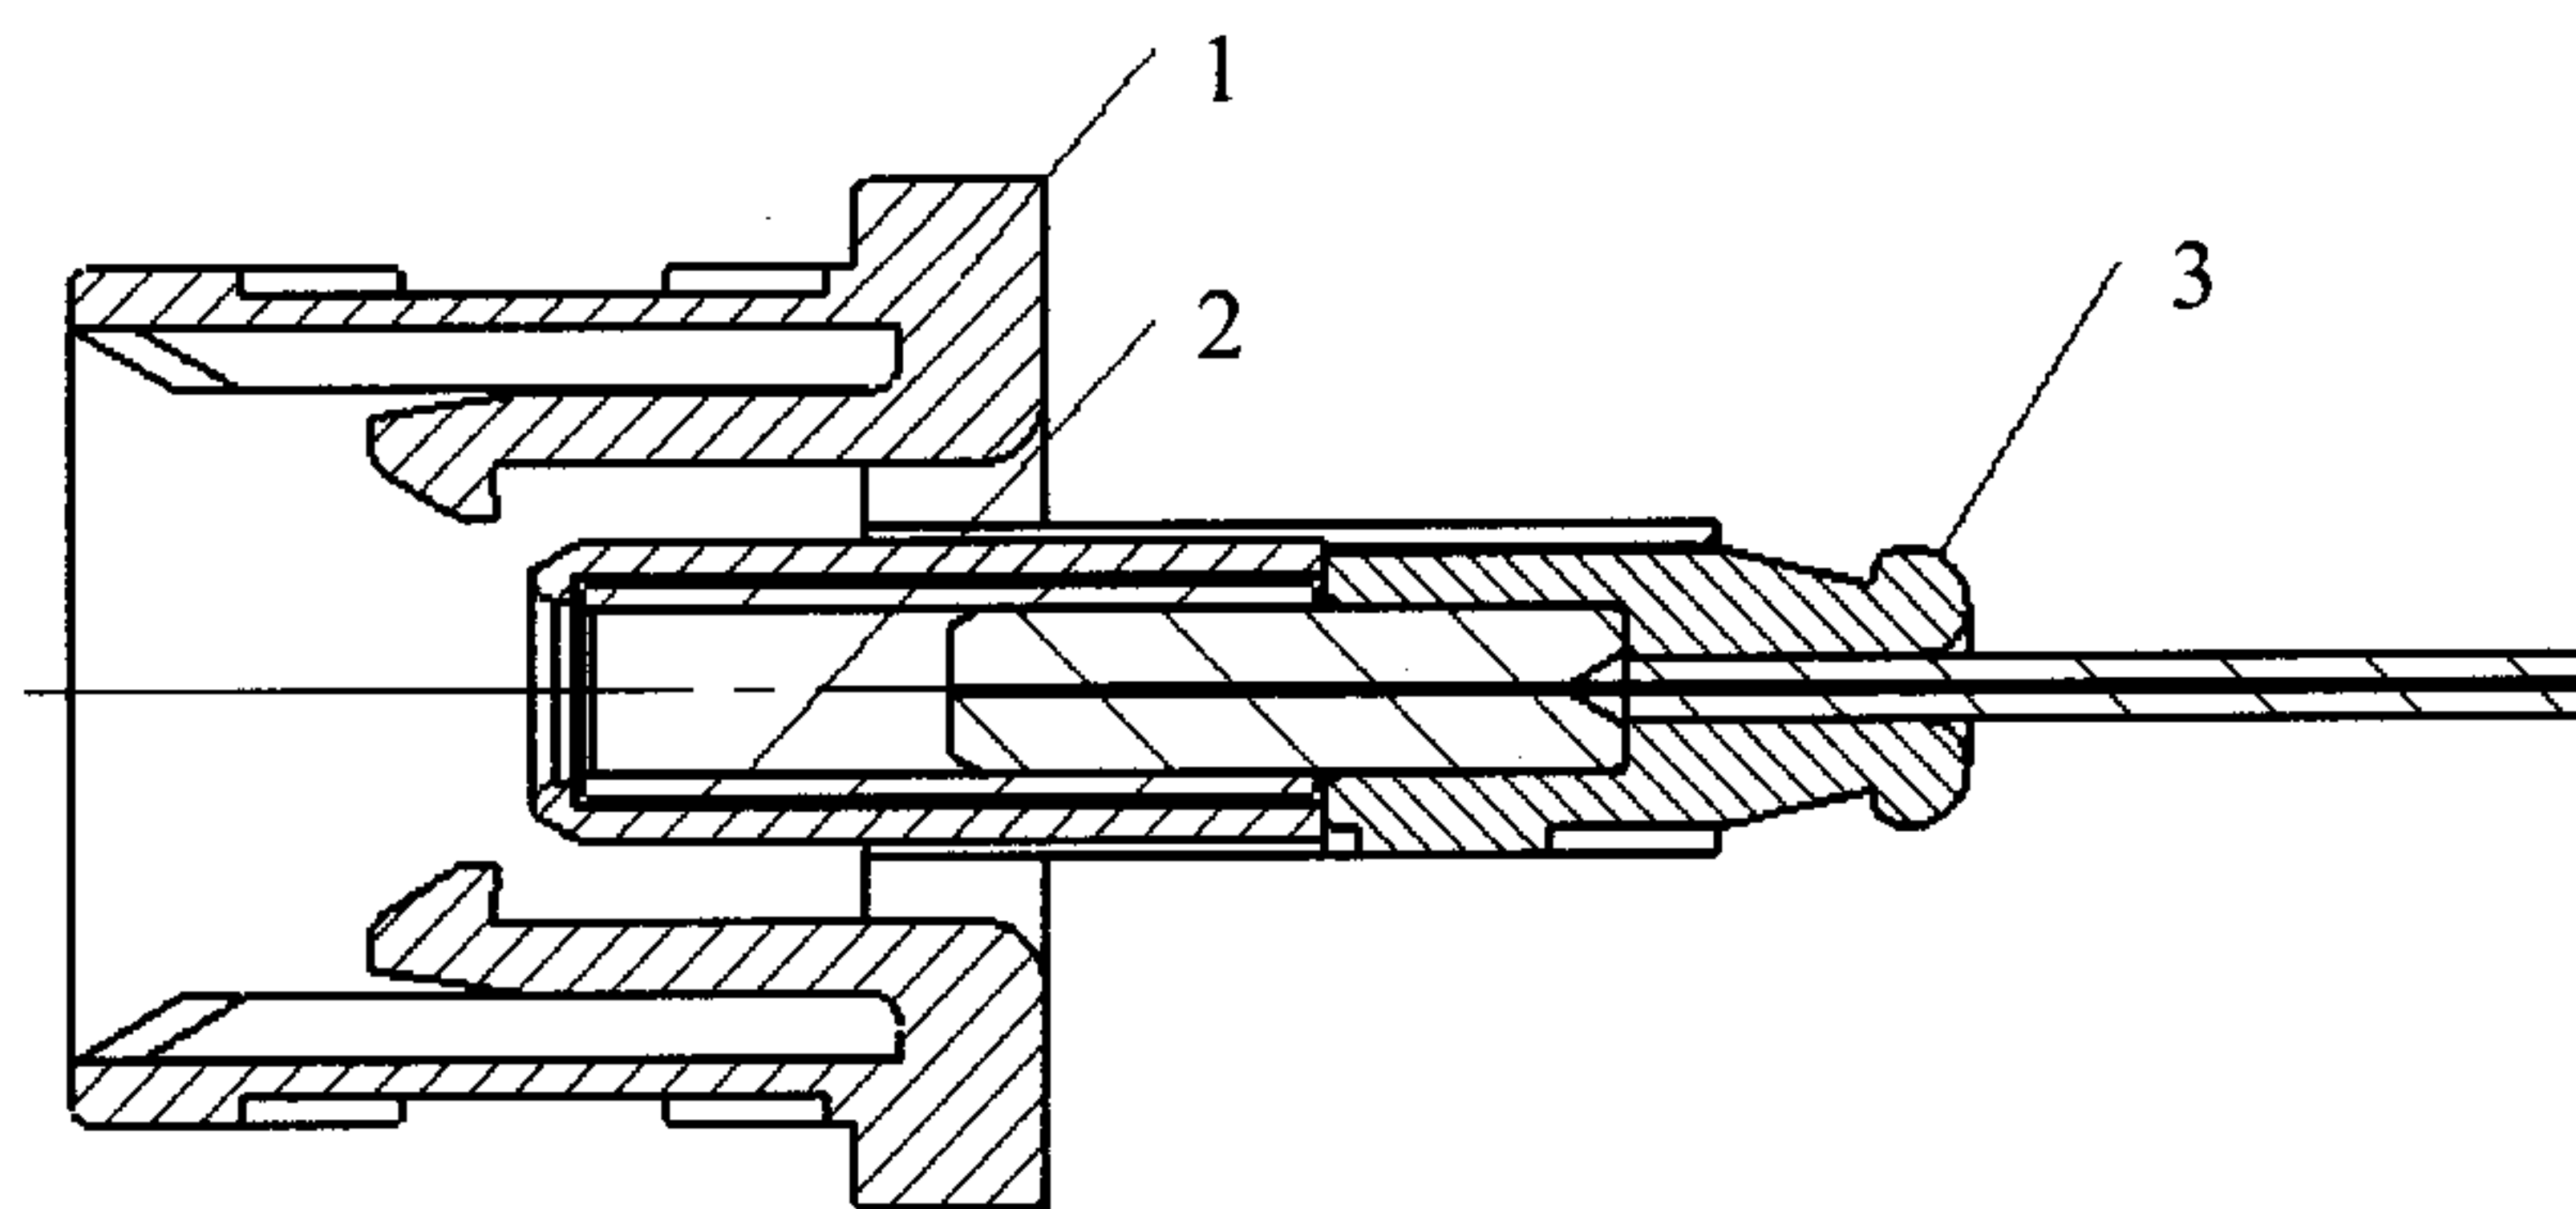


FIG. 3

2/6

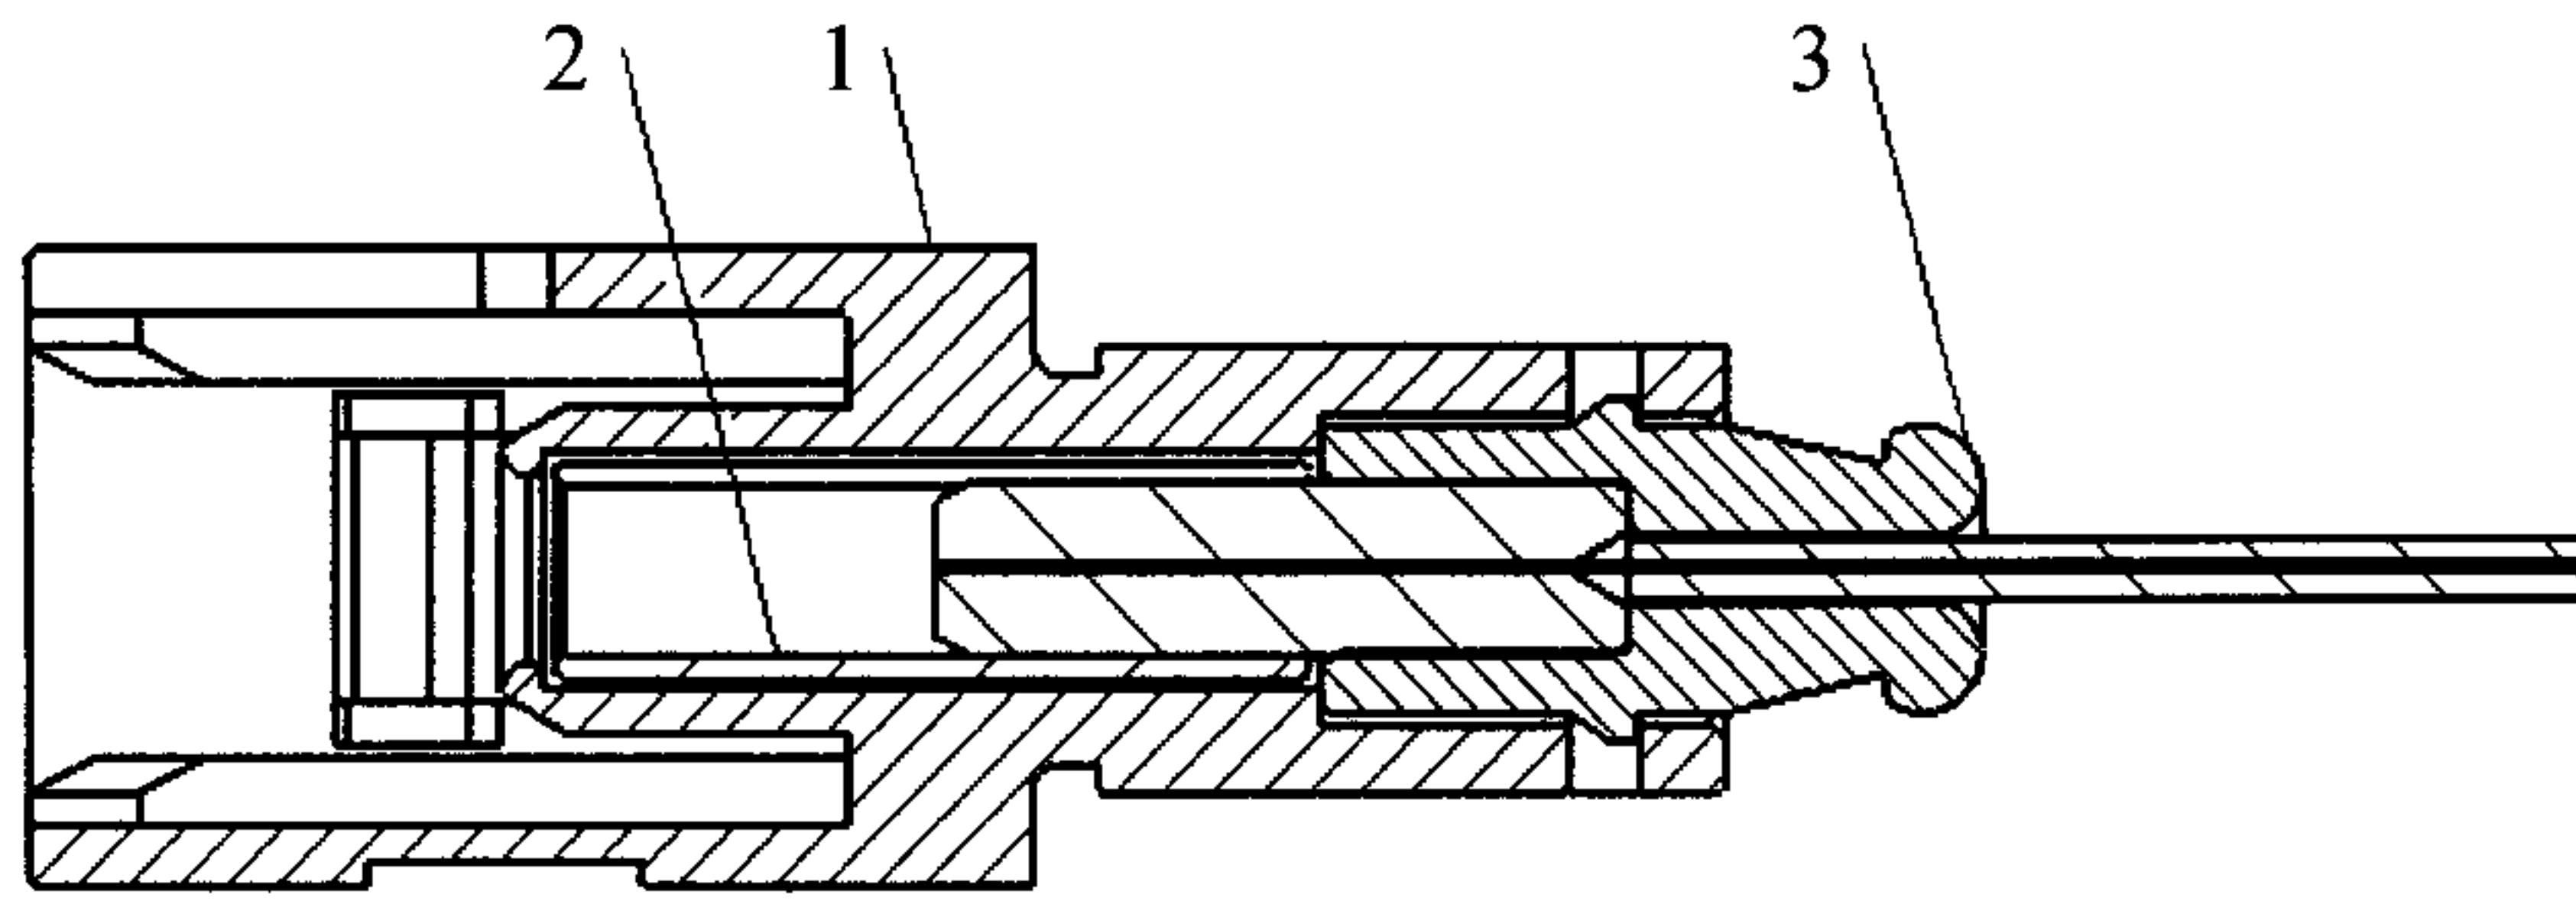


FIG. 4

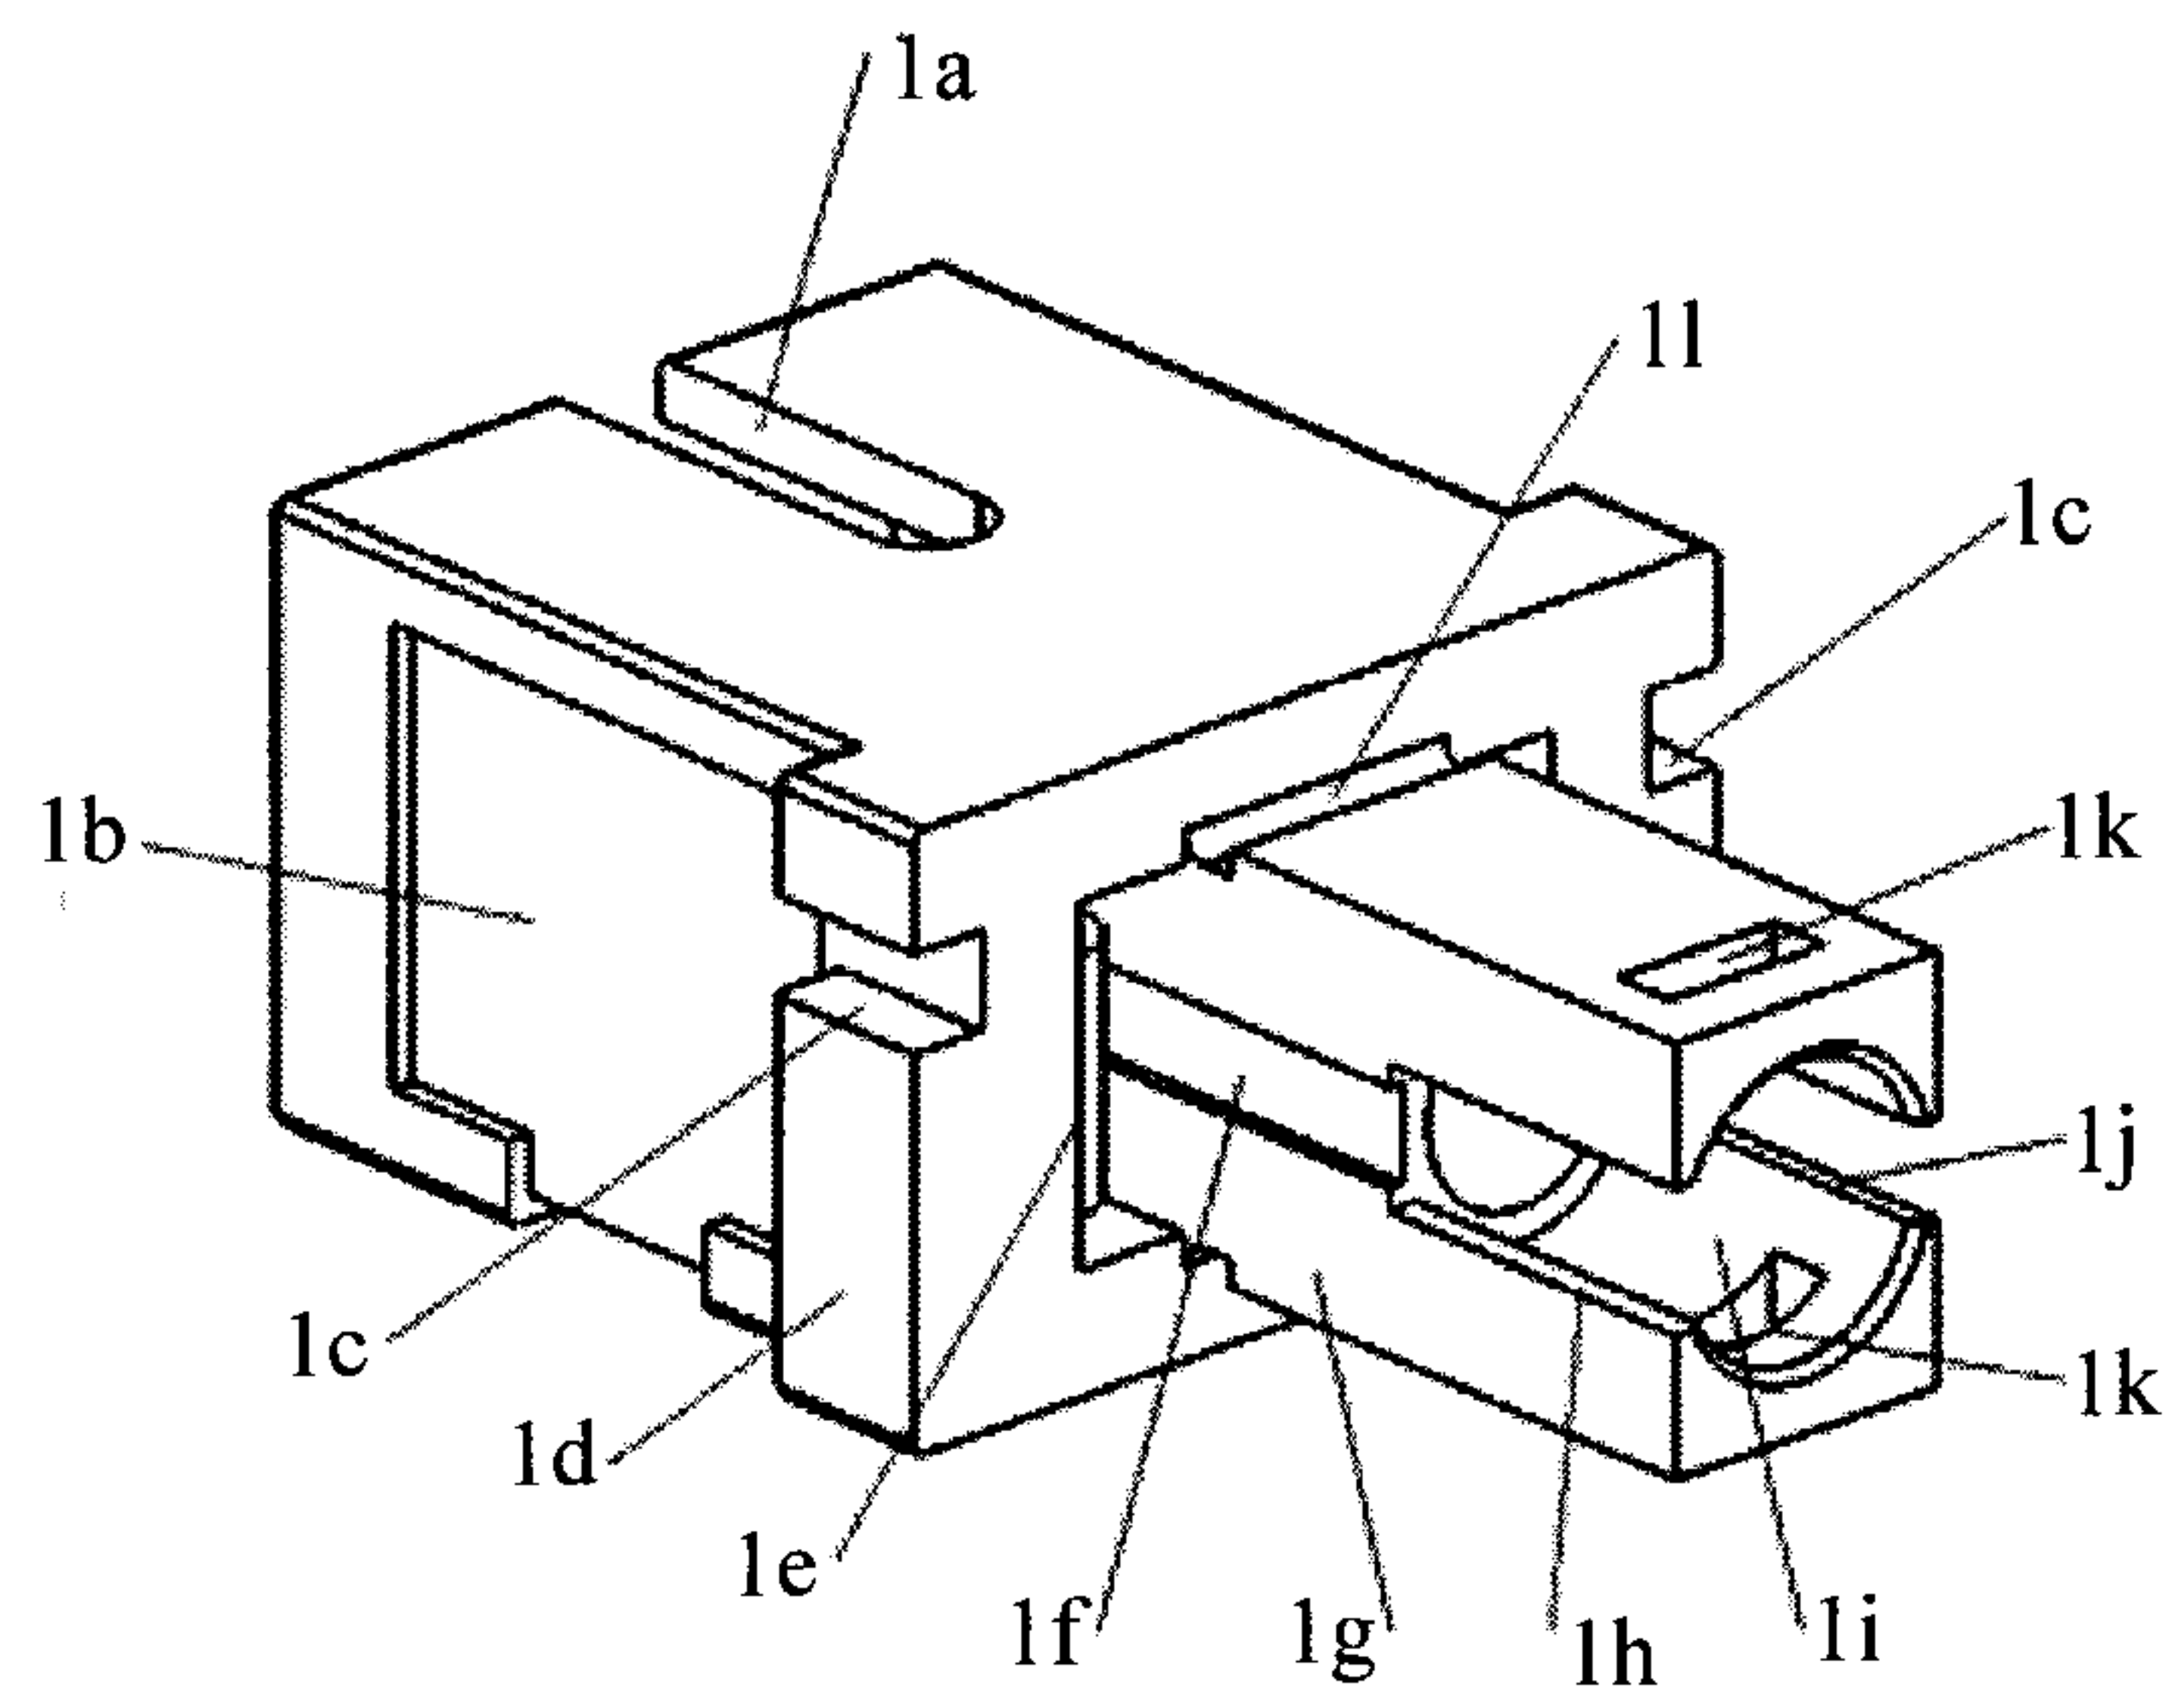


FIG. 5

3/6

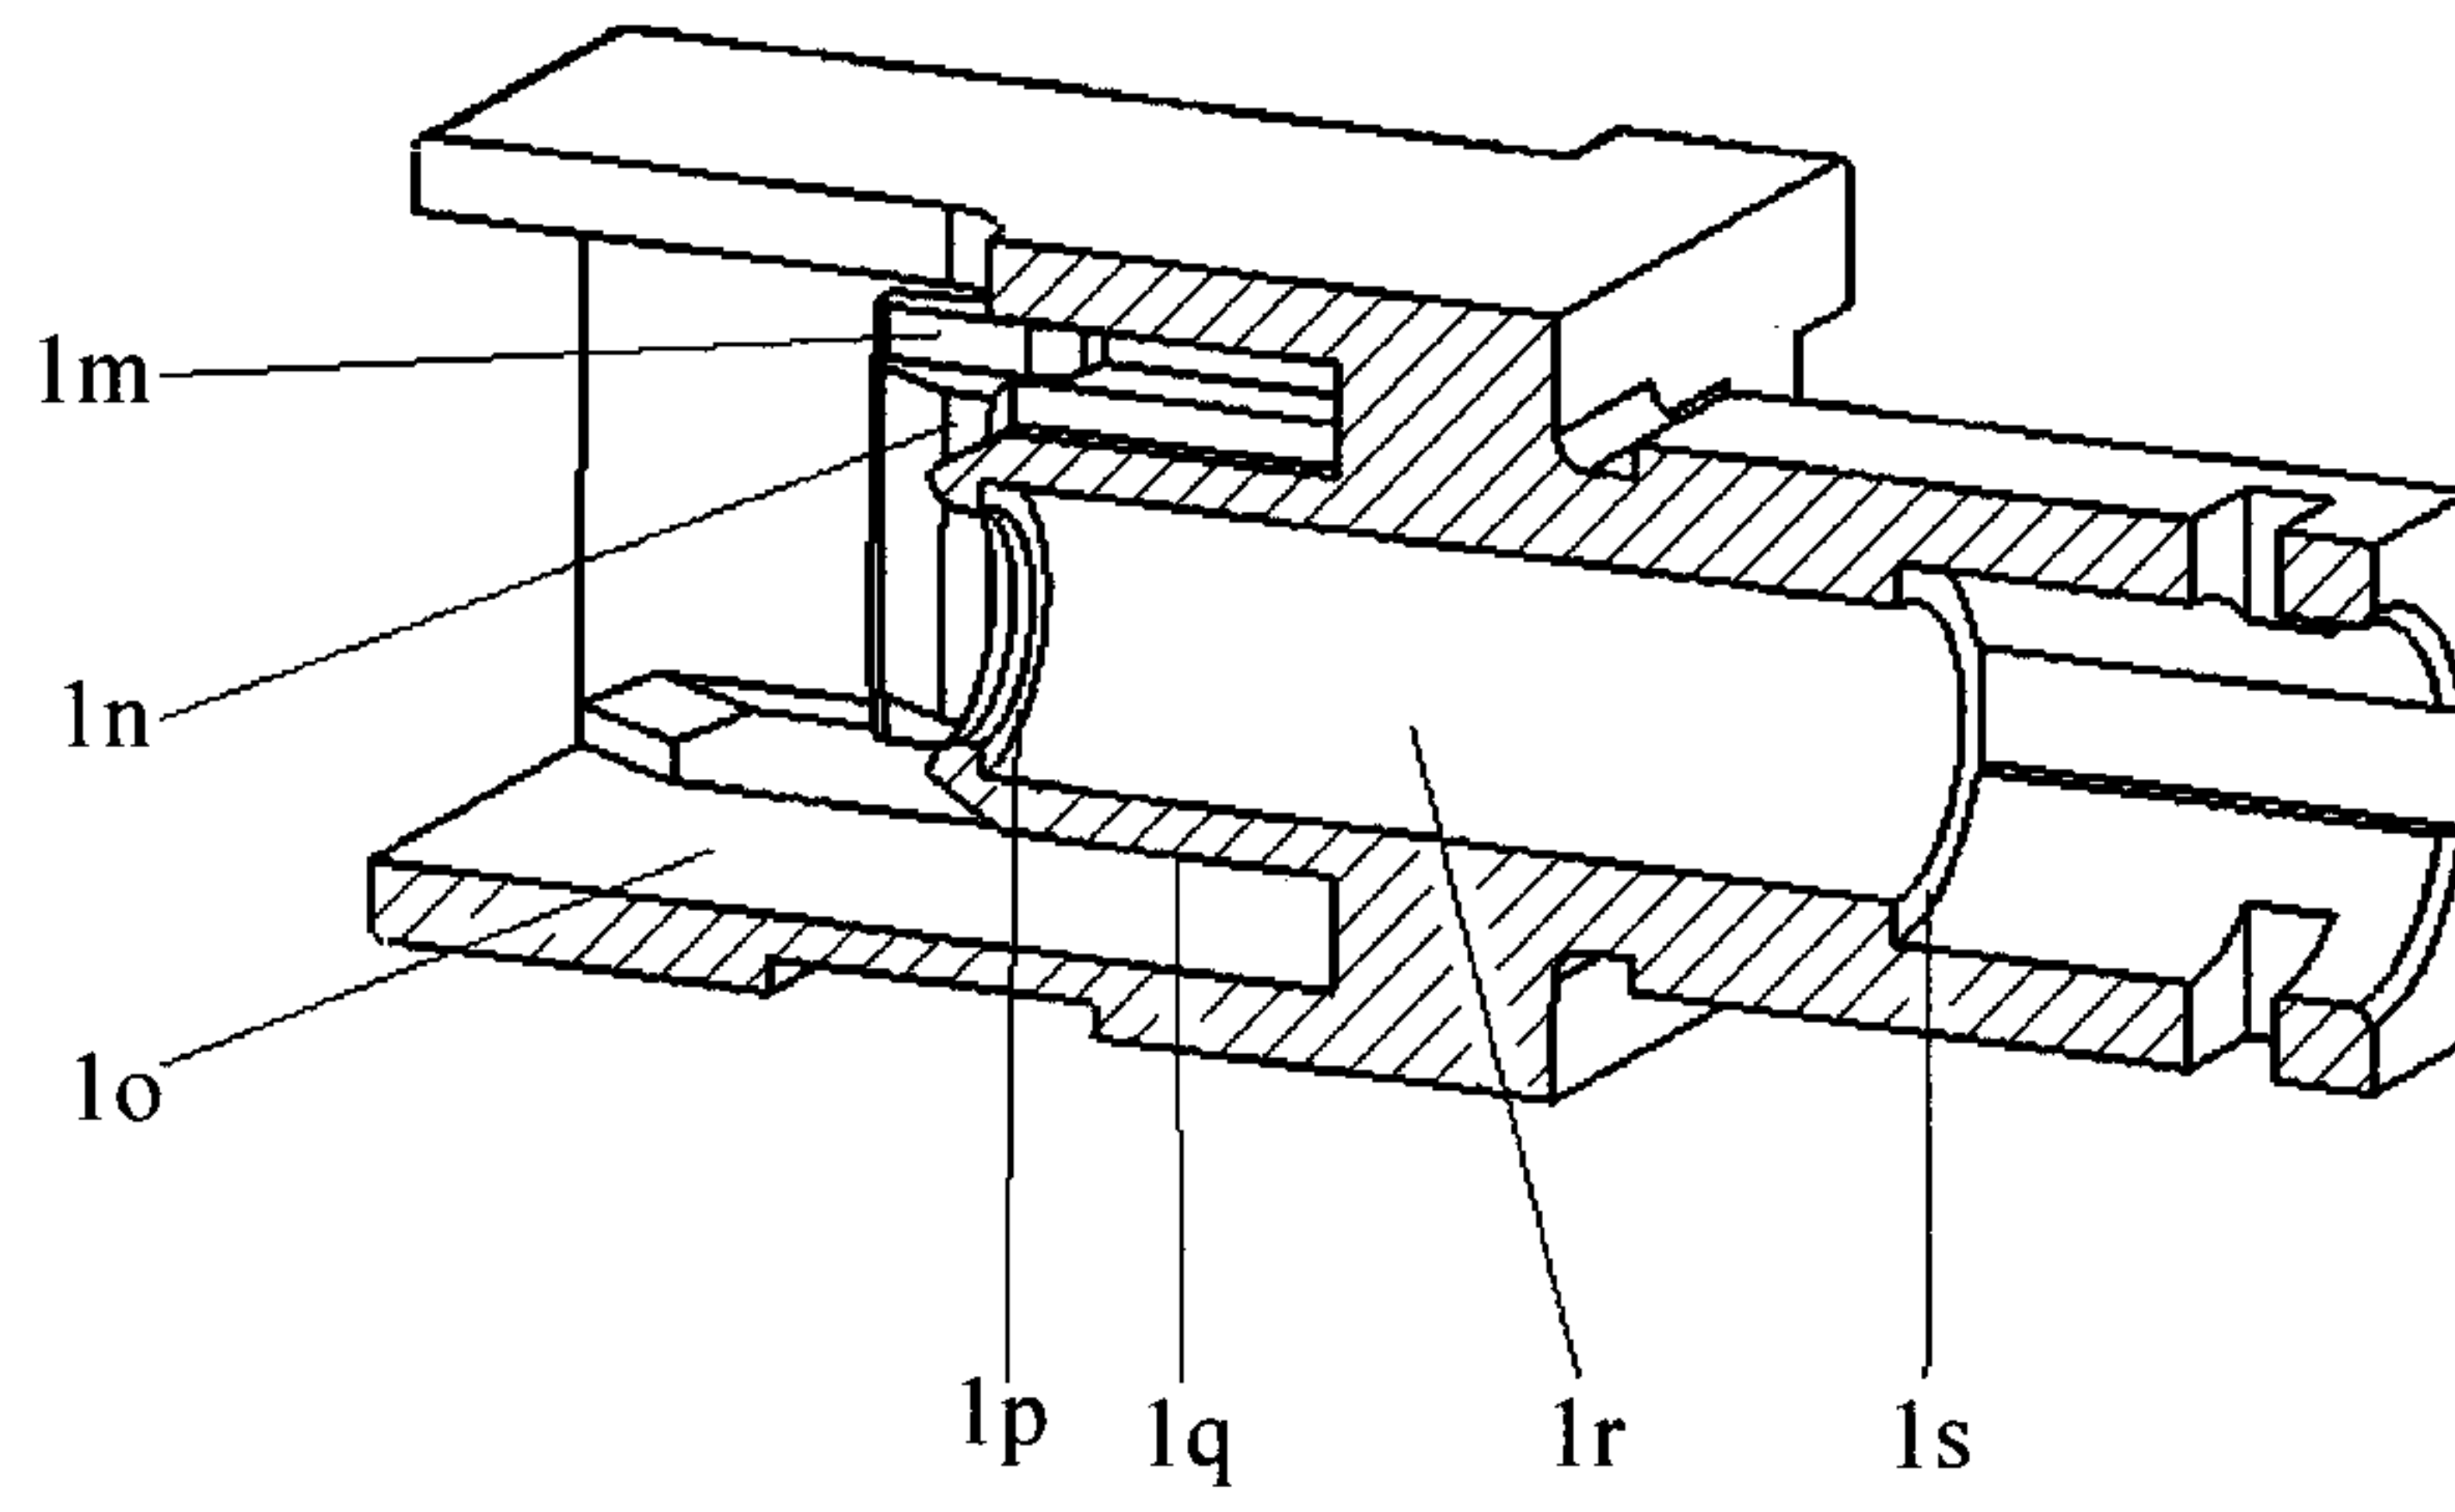


FIG. 6

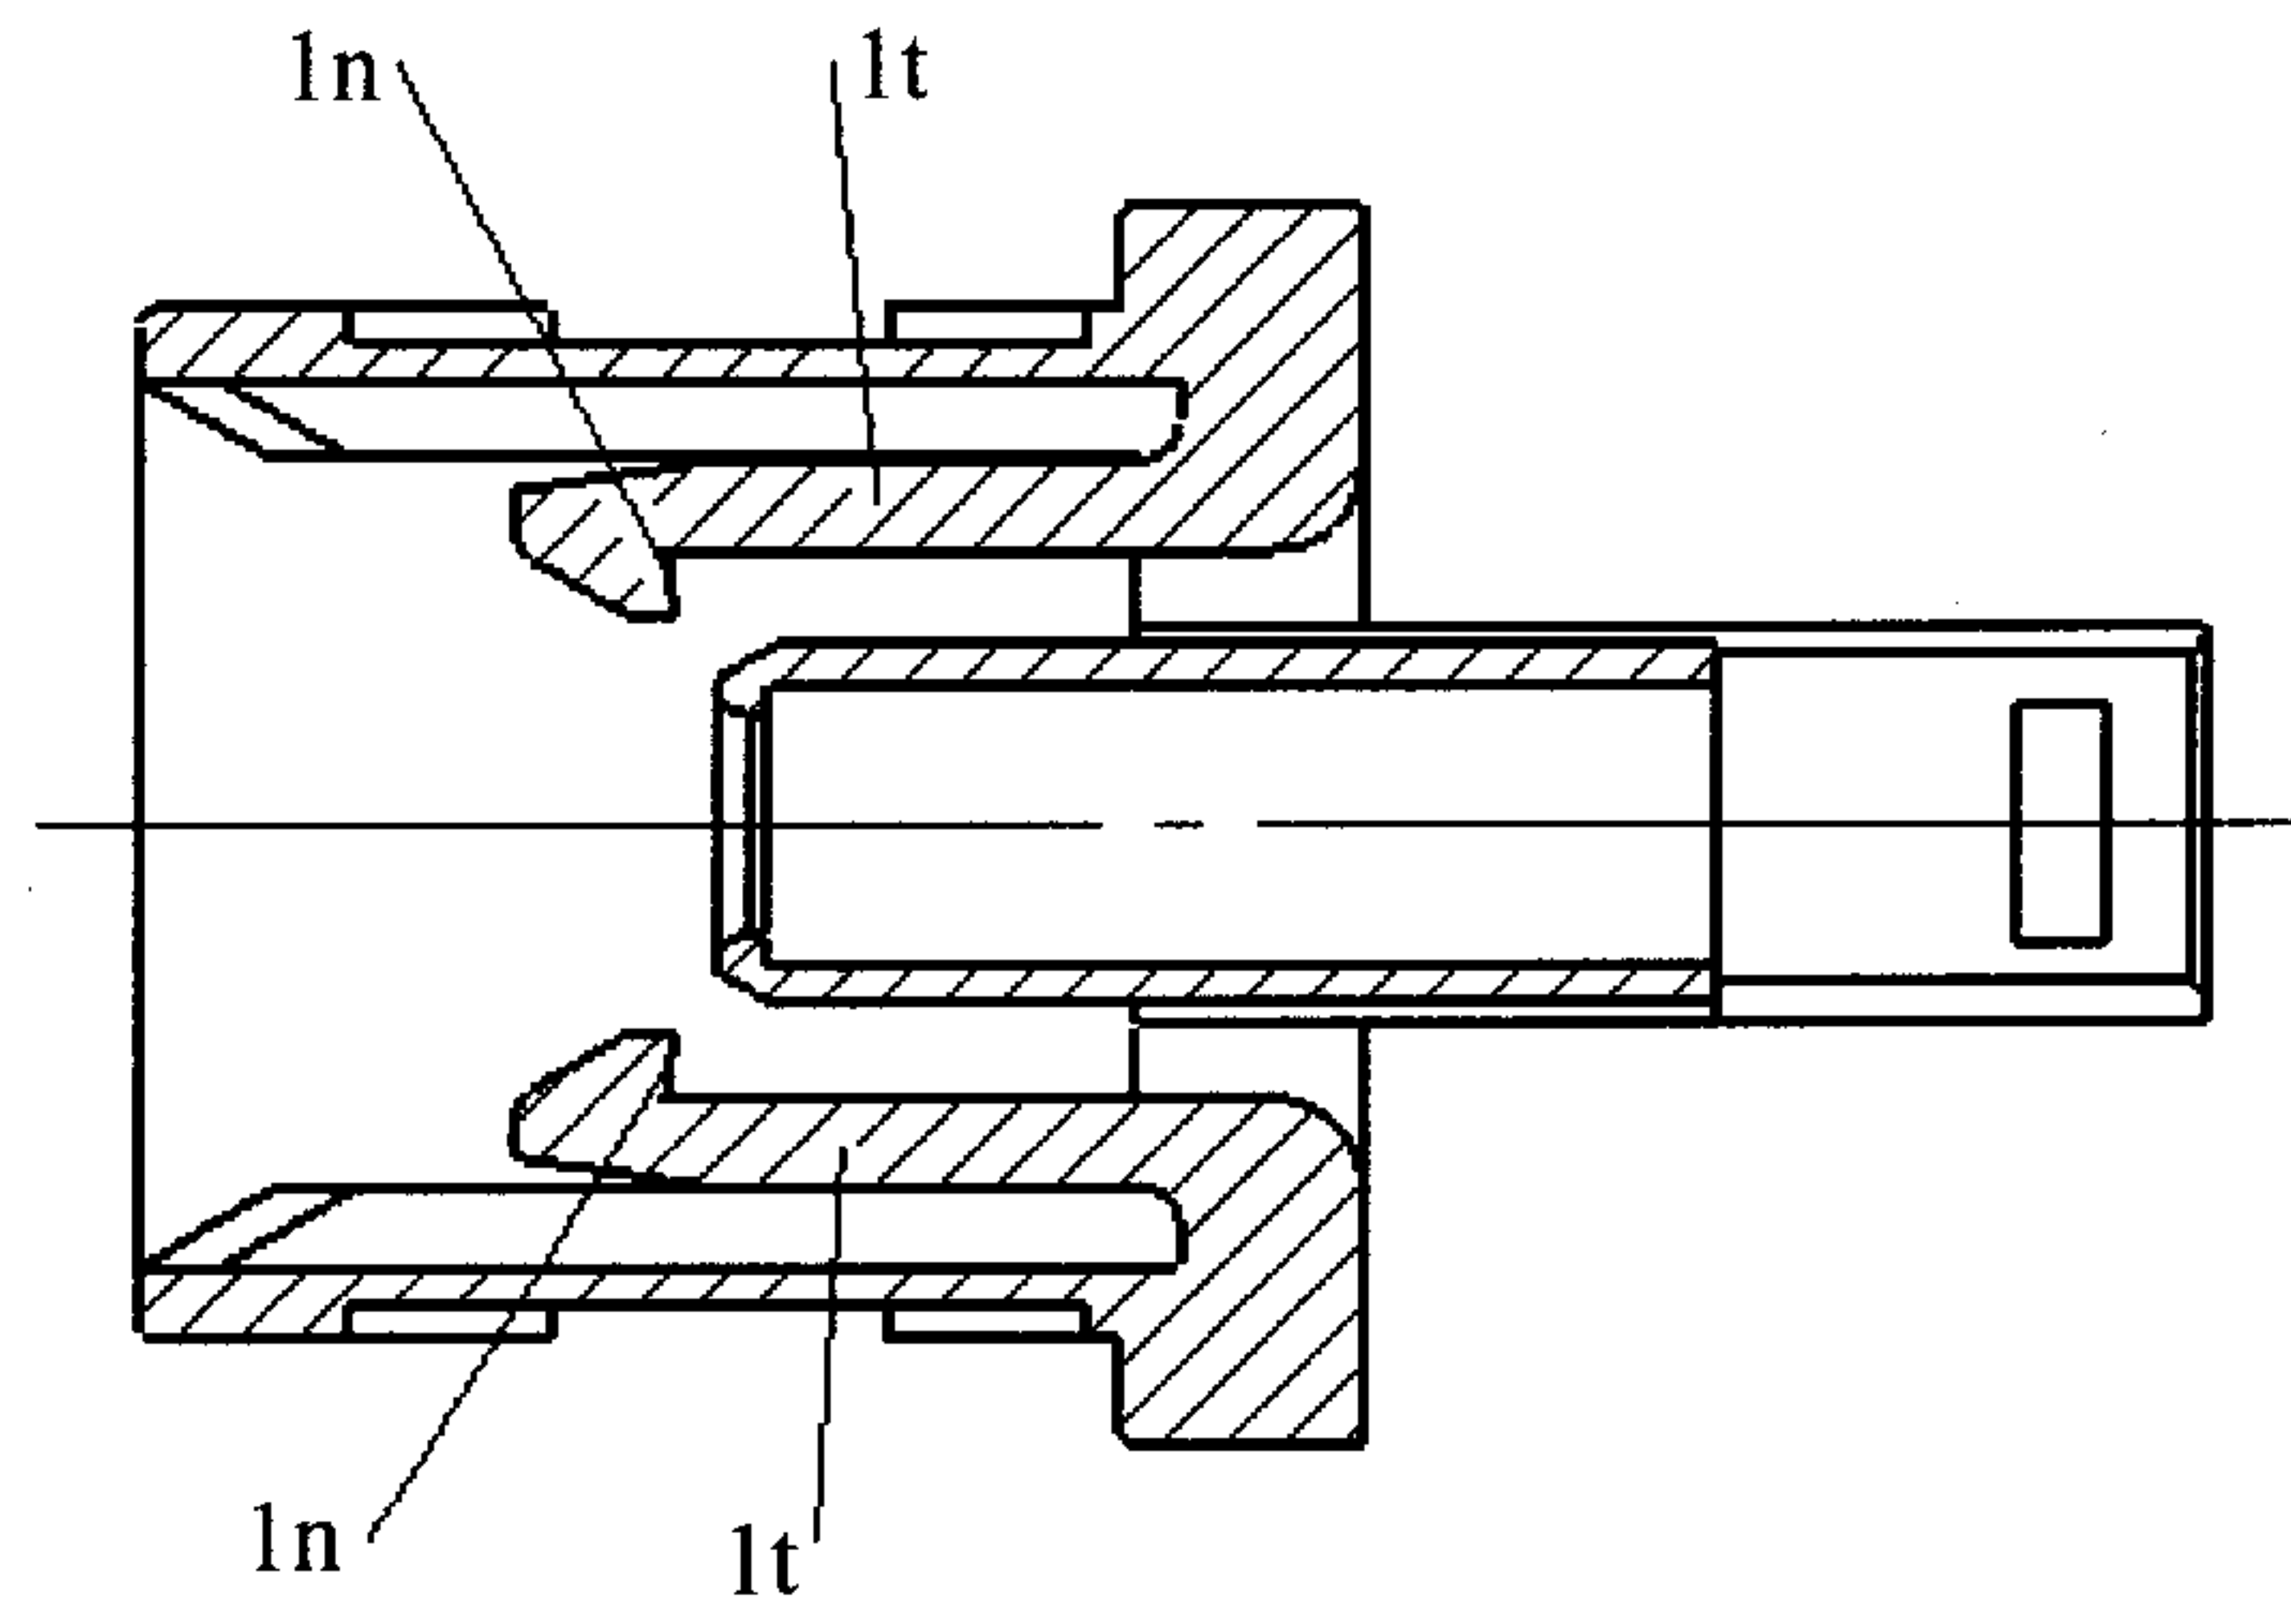


FIG. 7

4/6

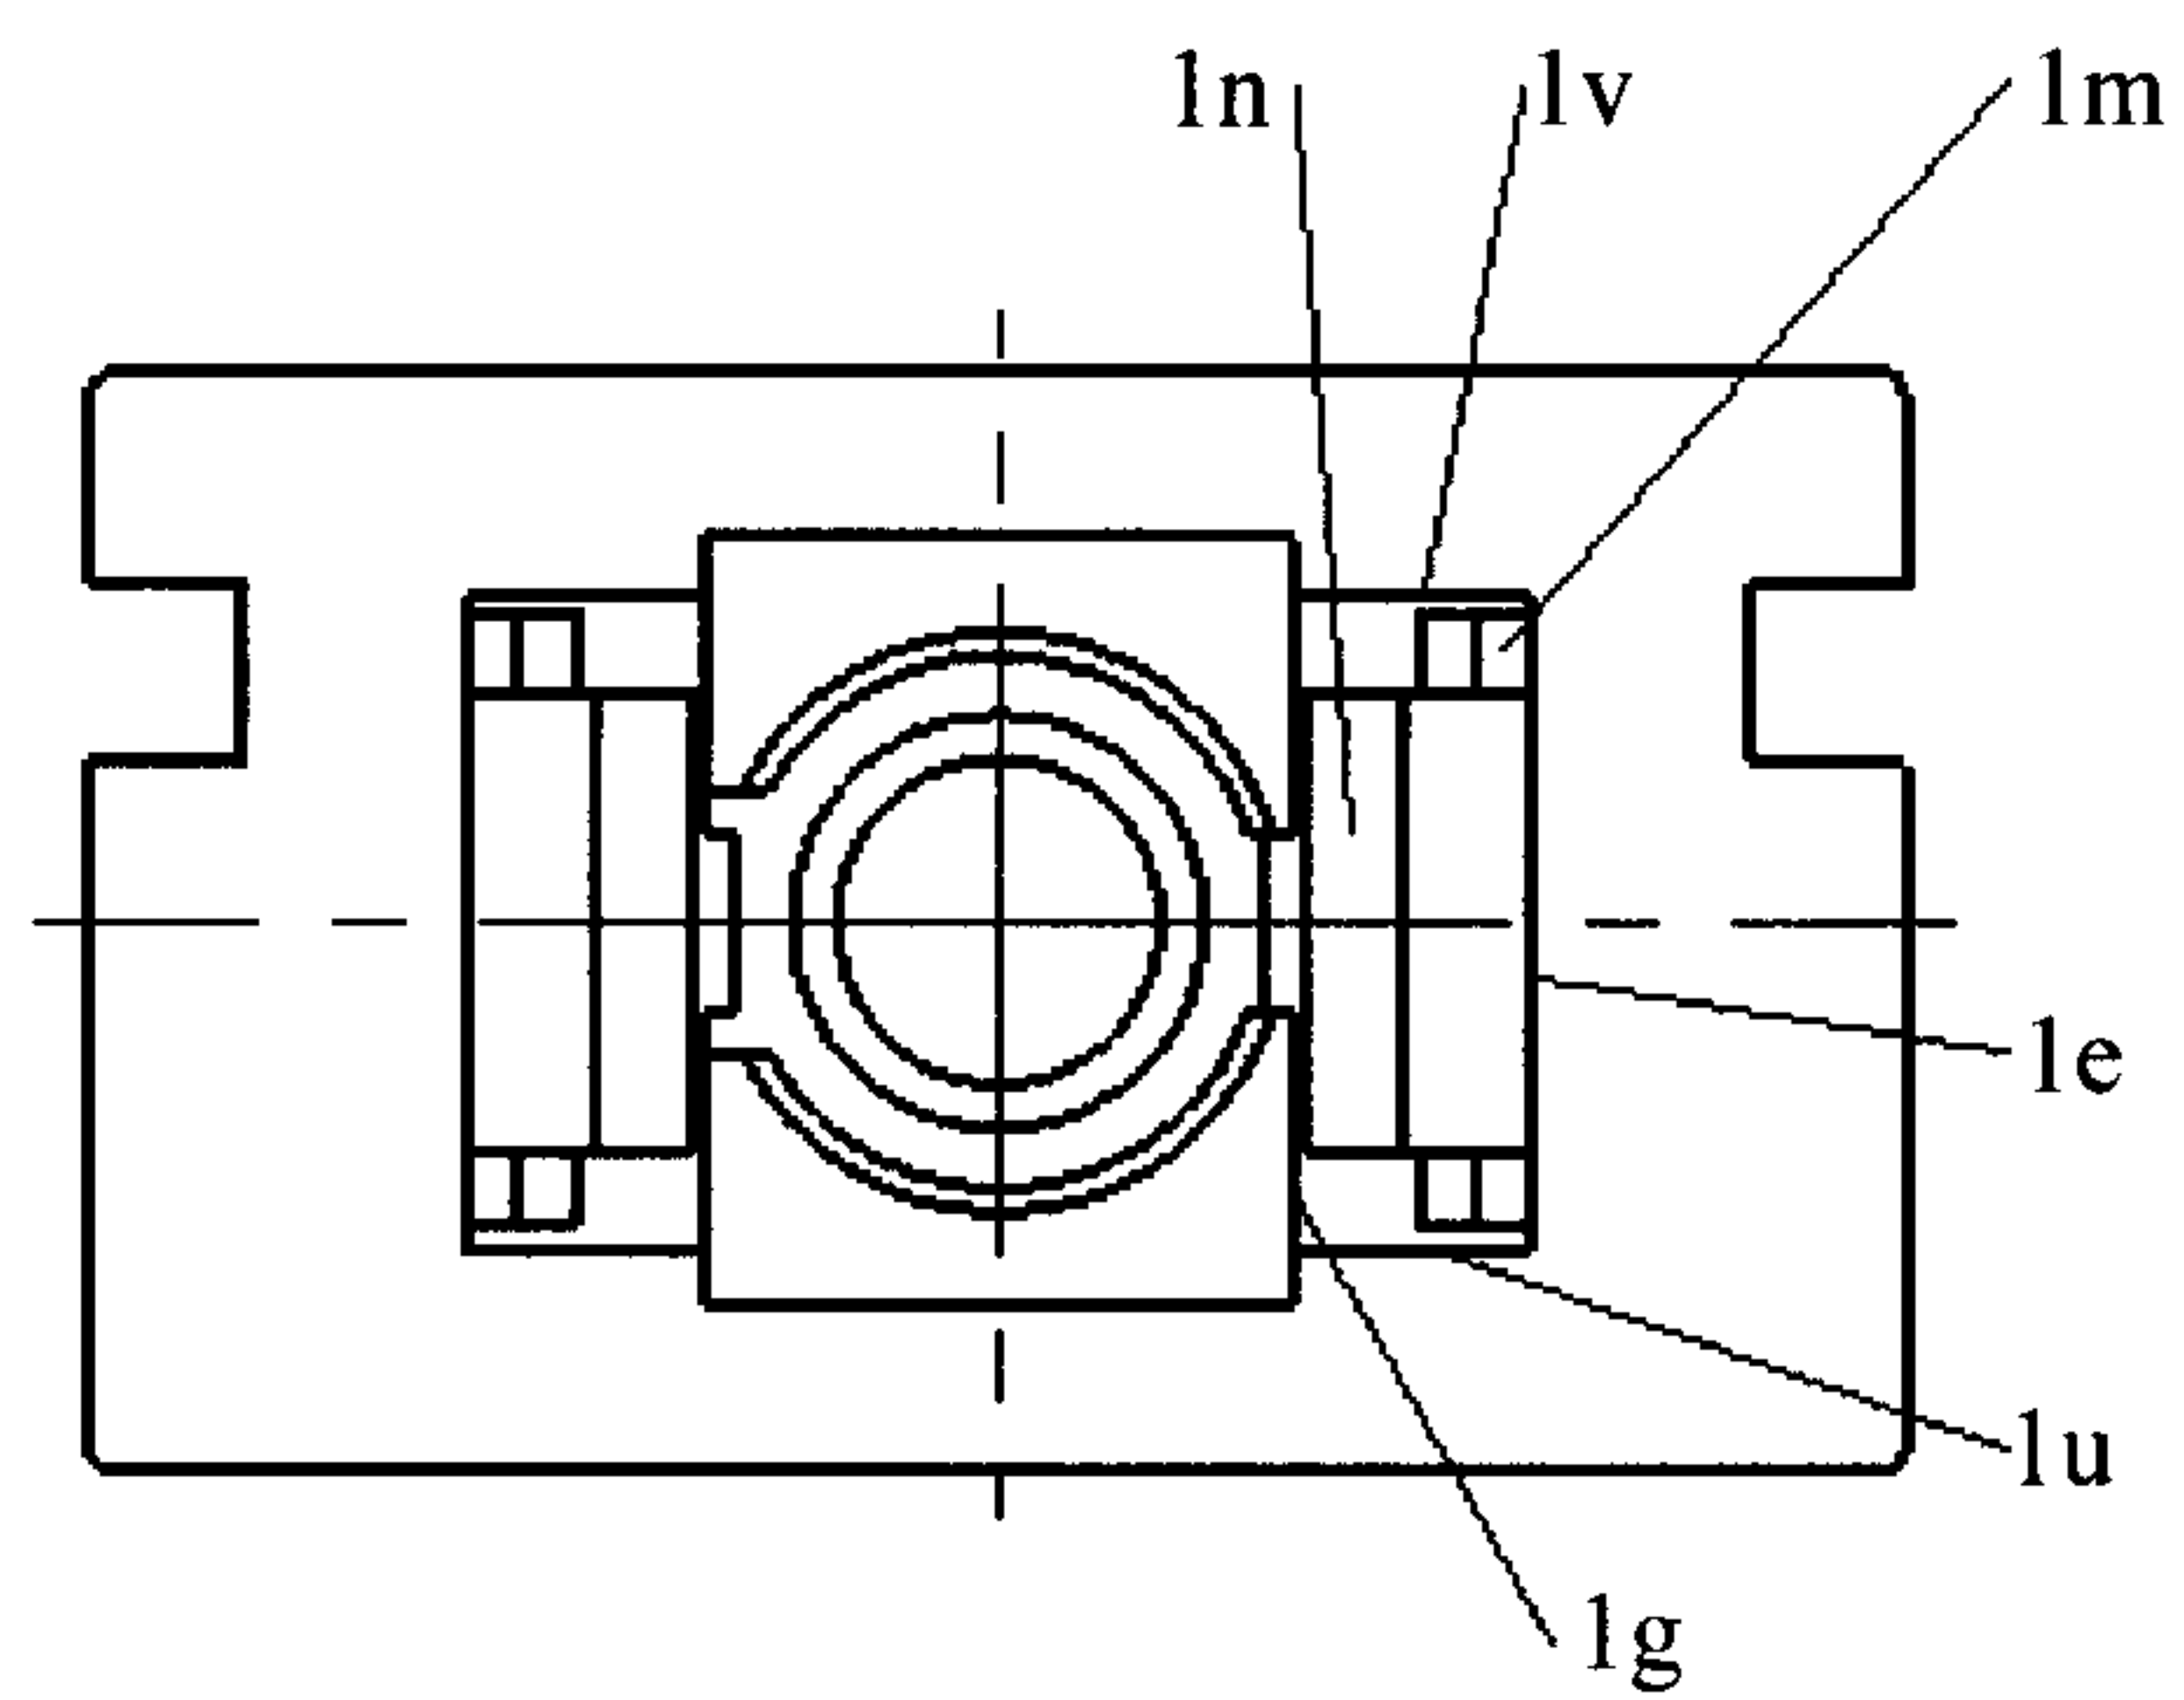


FIG. 8

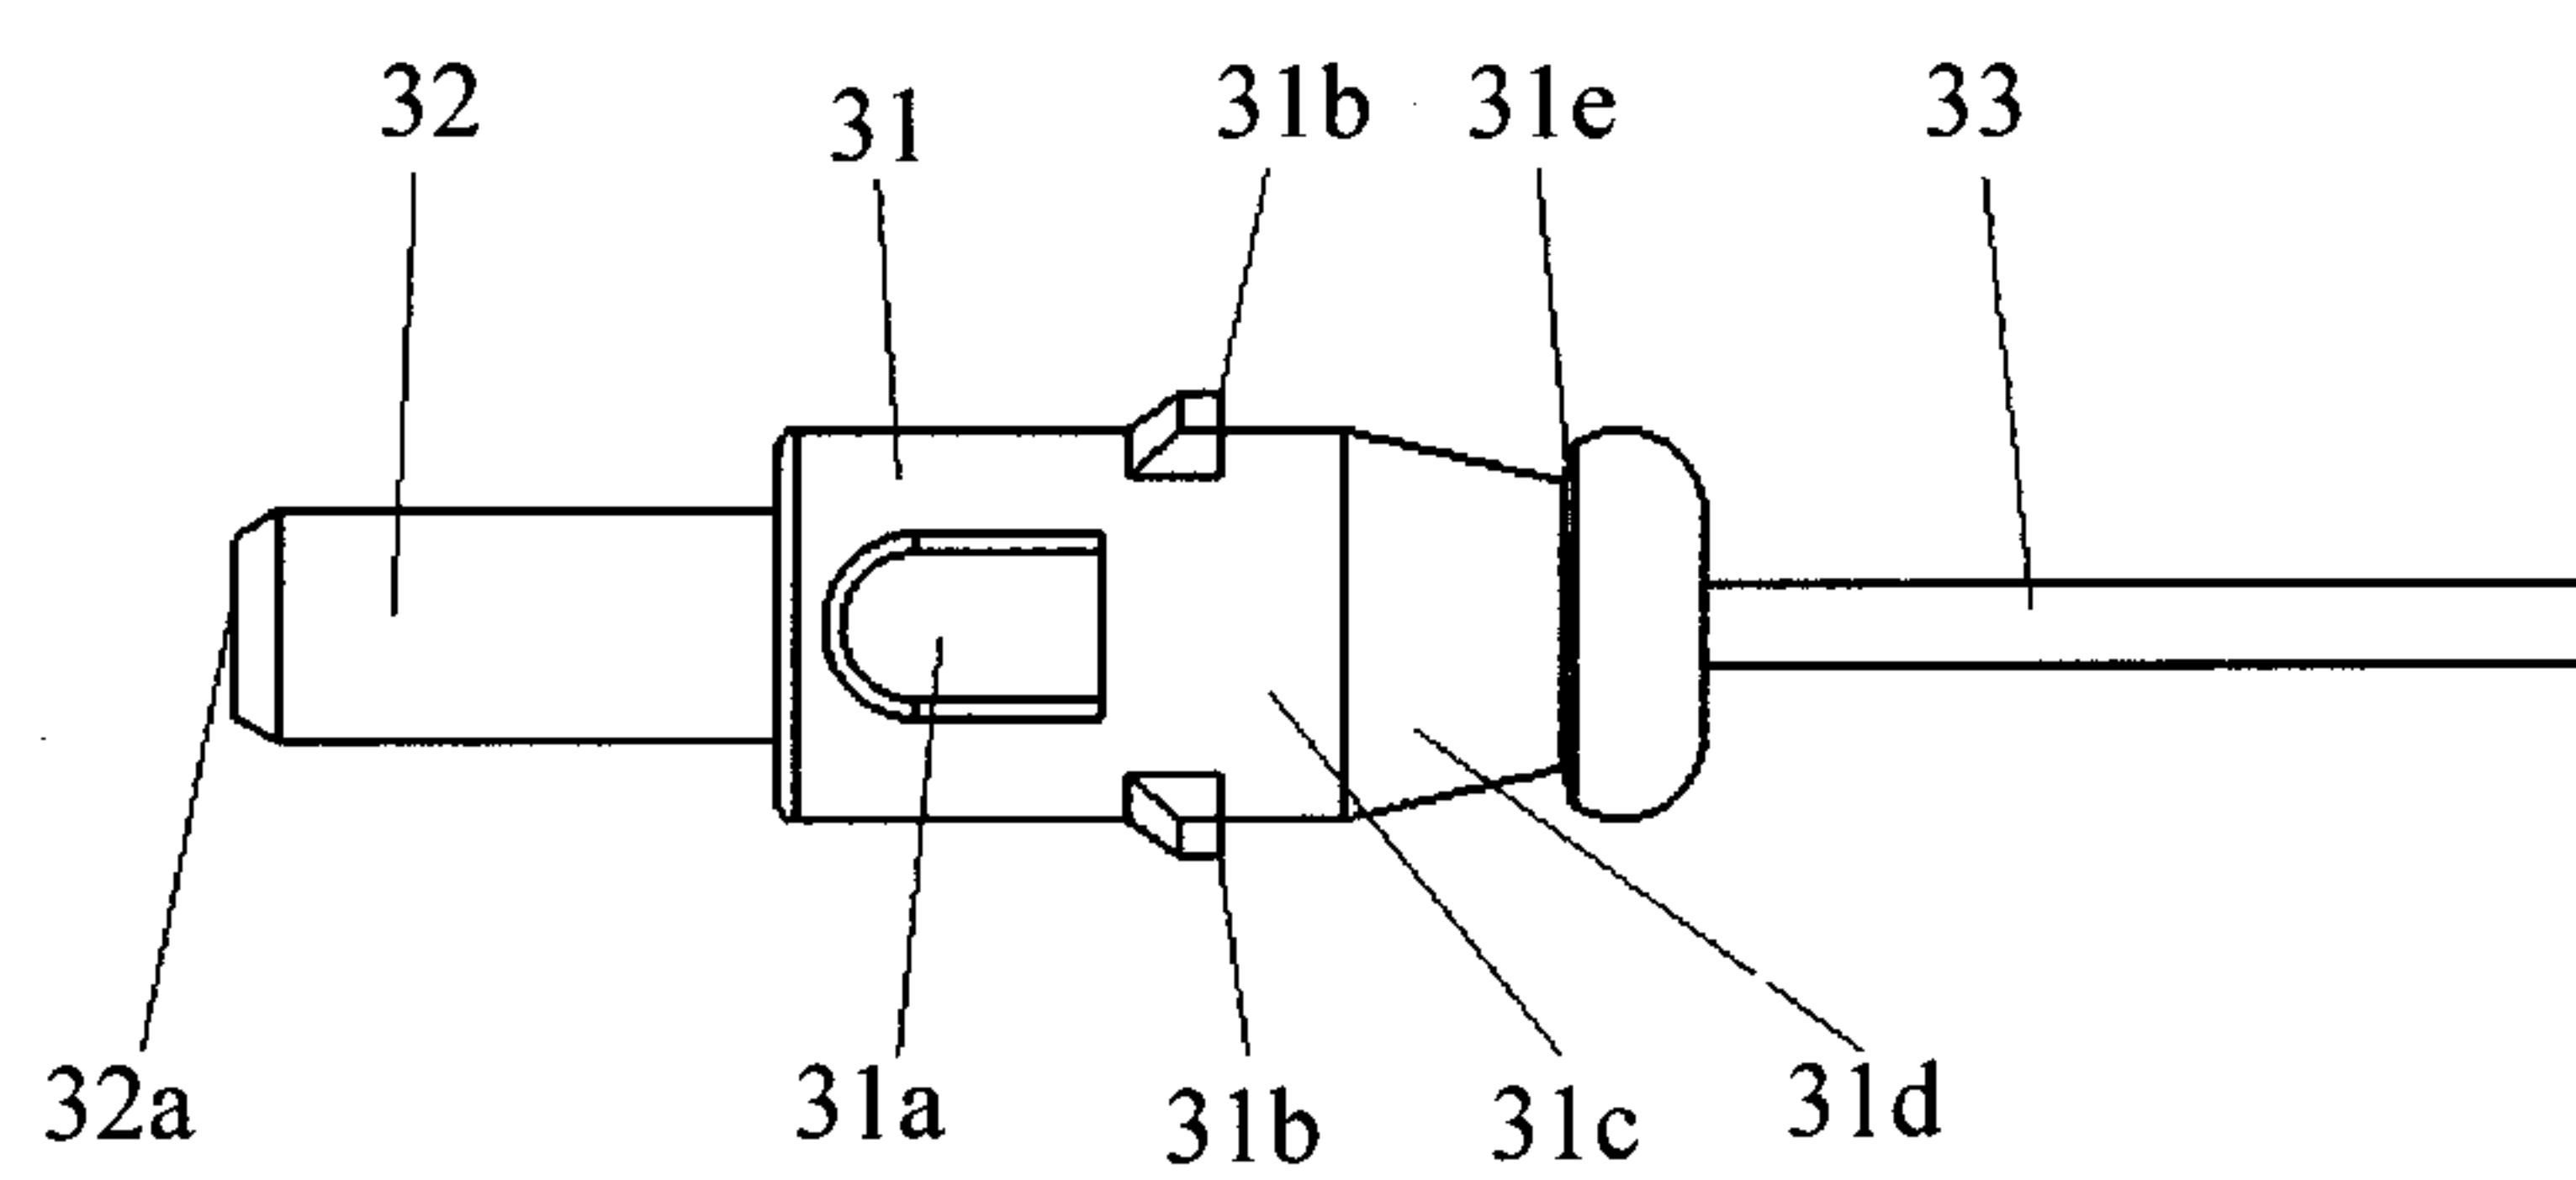


FIG. 9

5/6

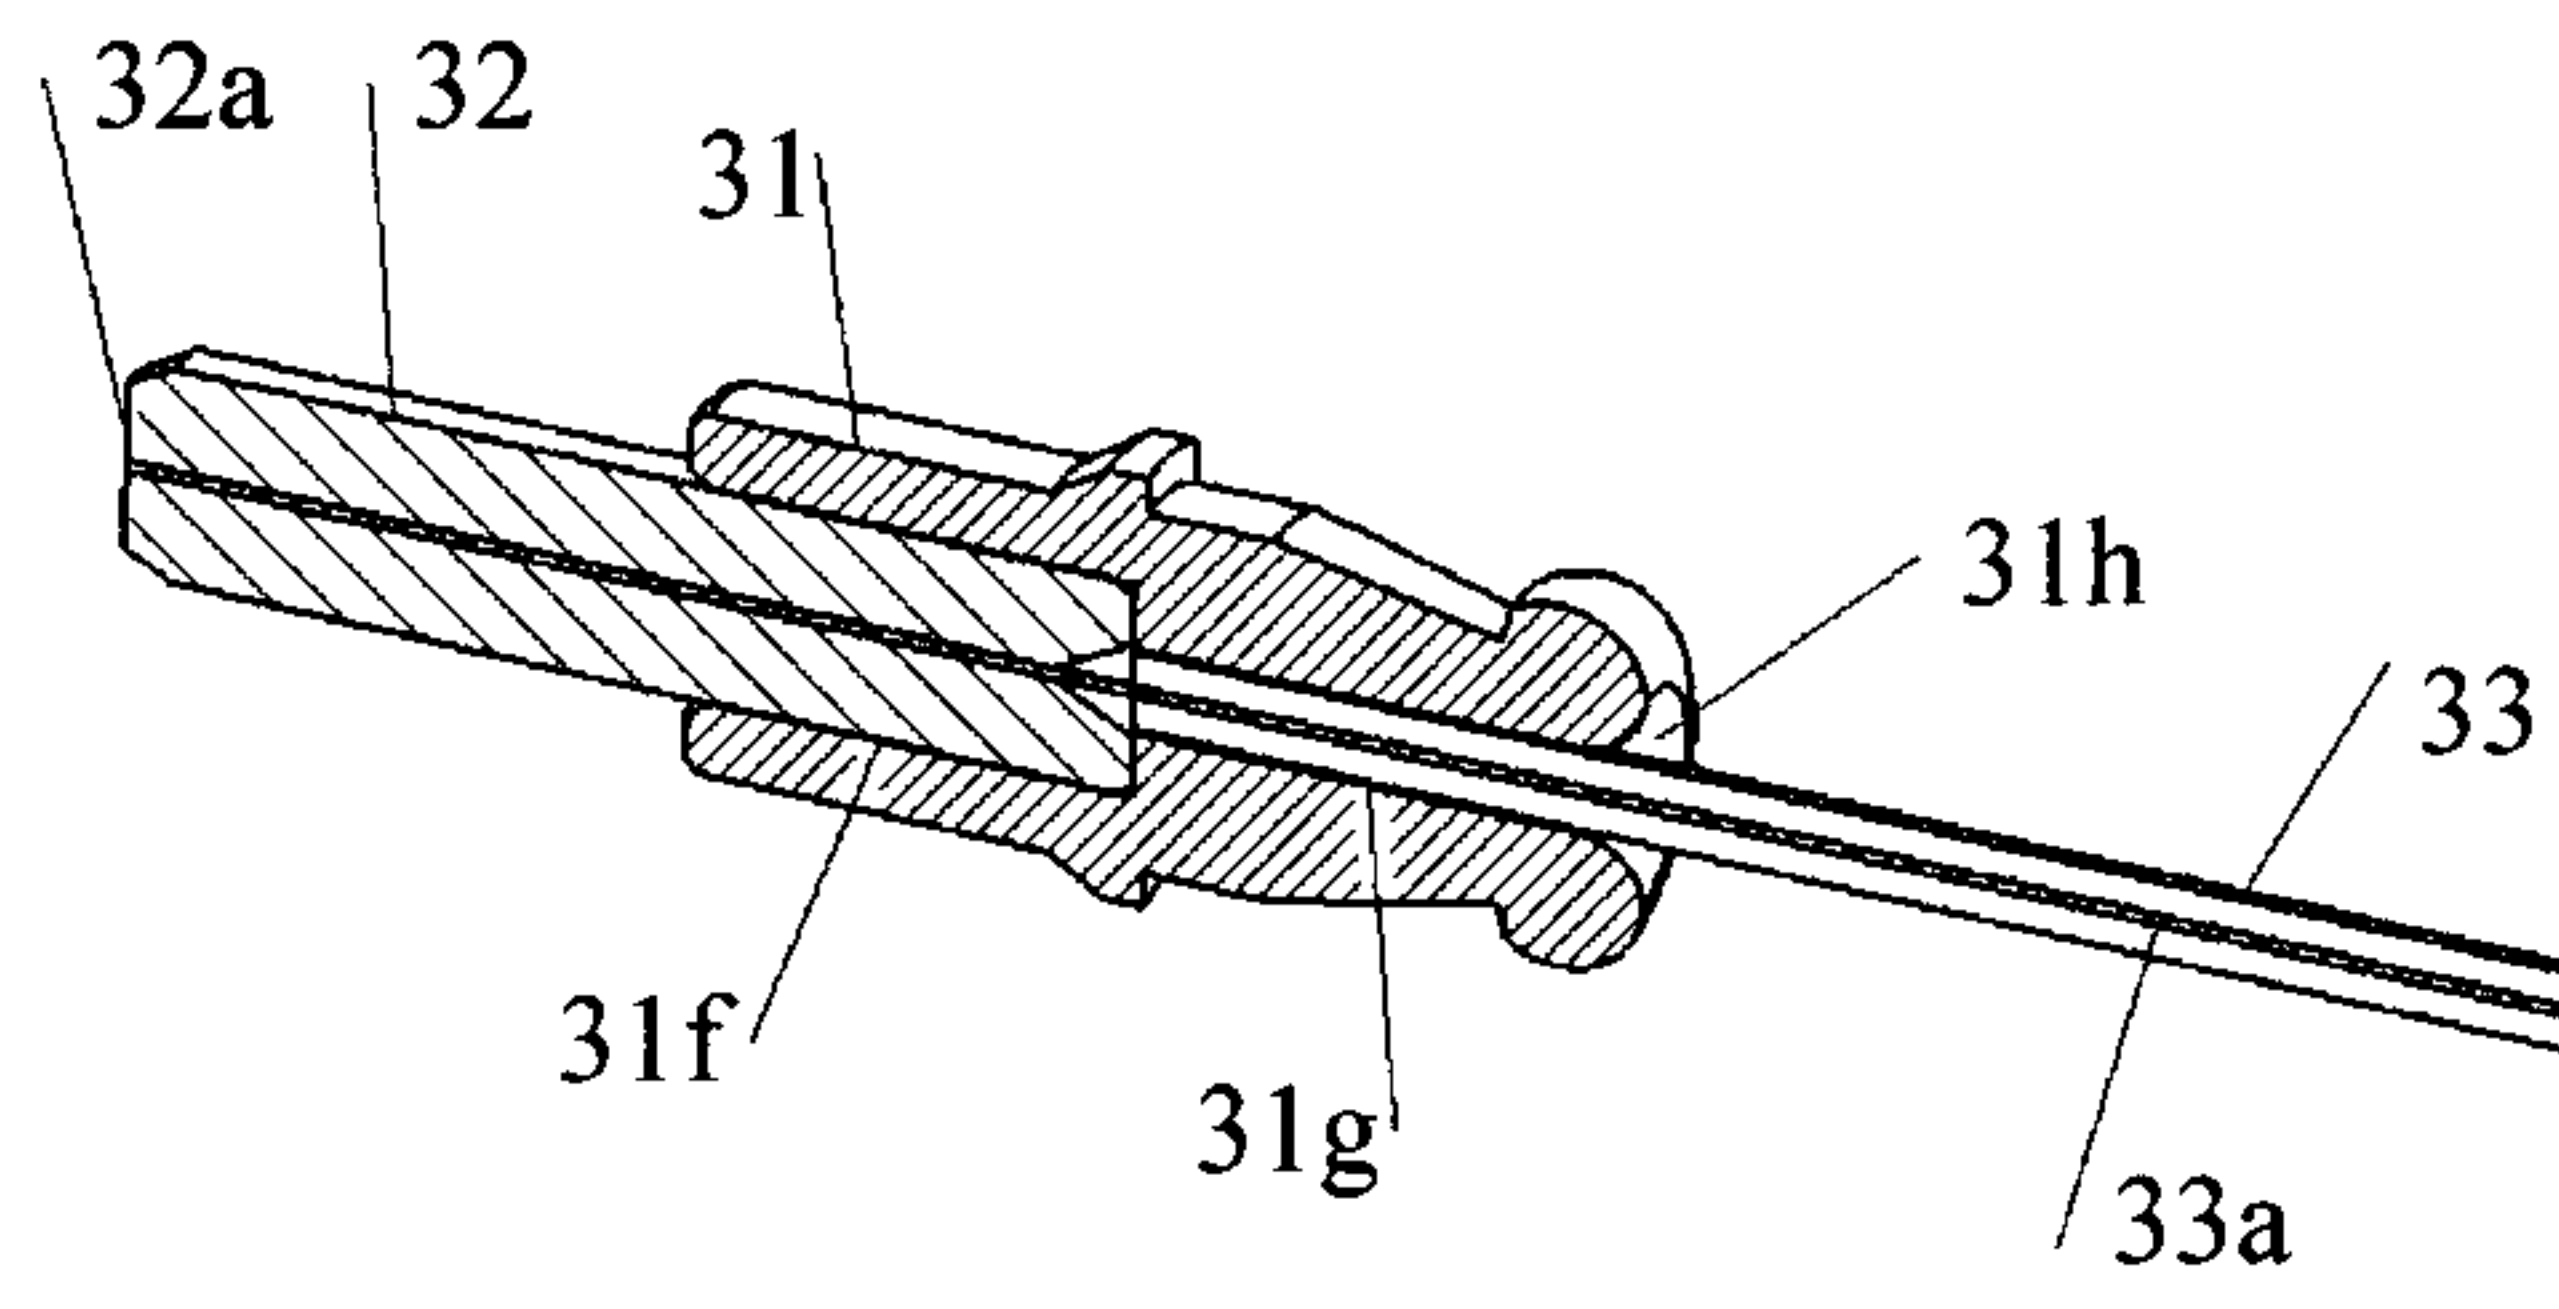


FIG. 10

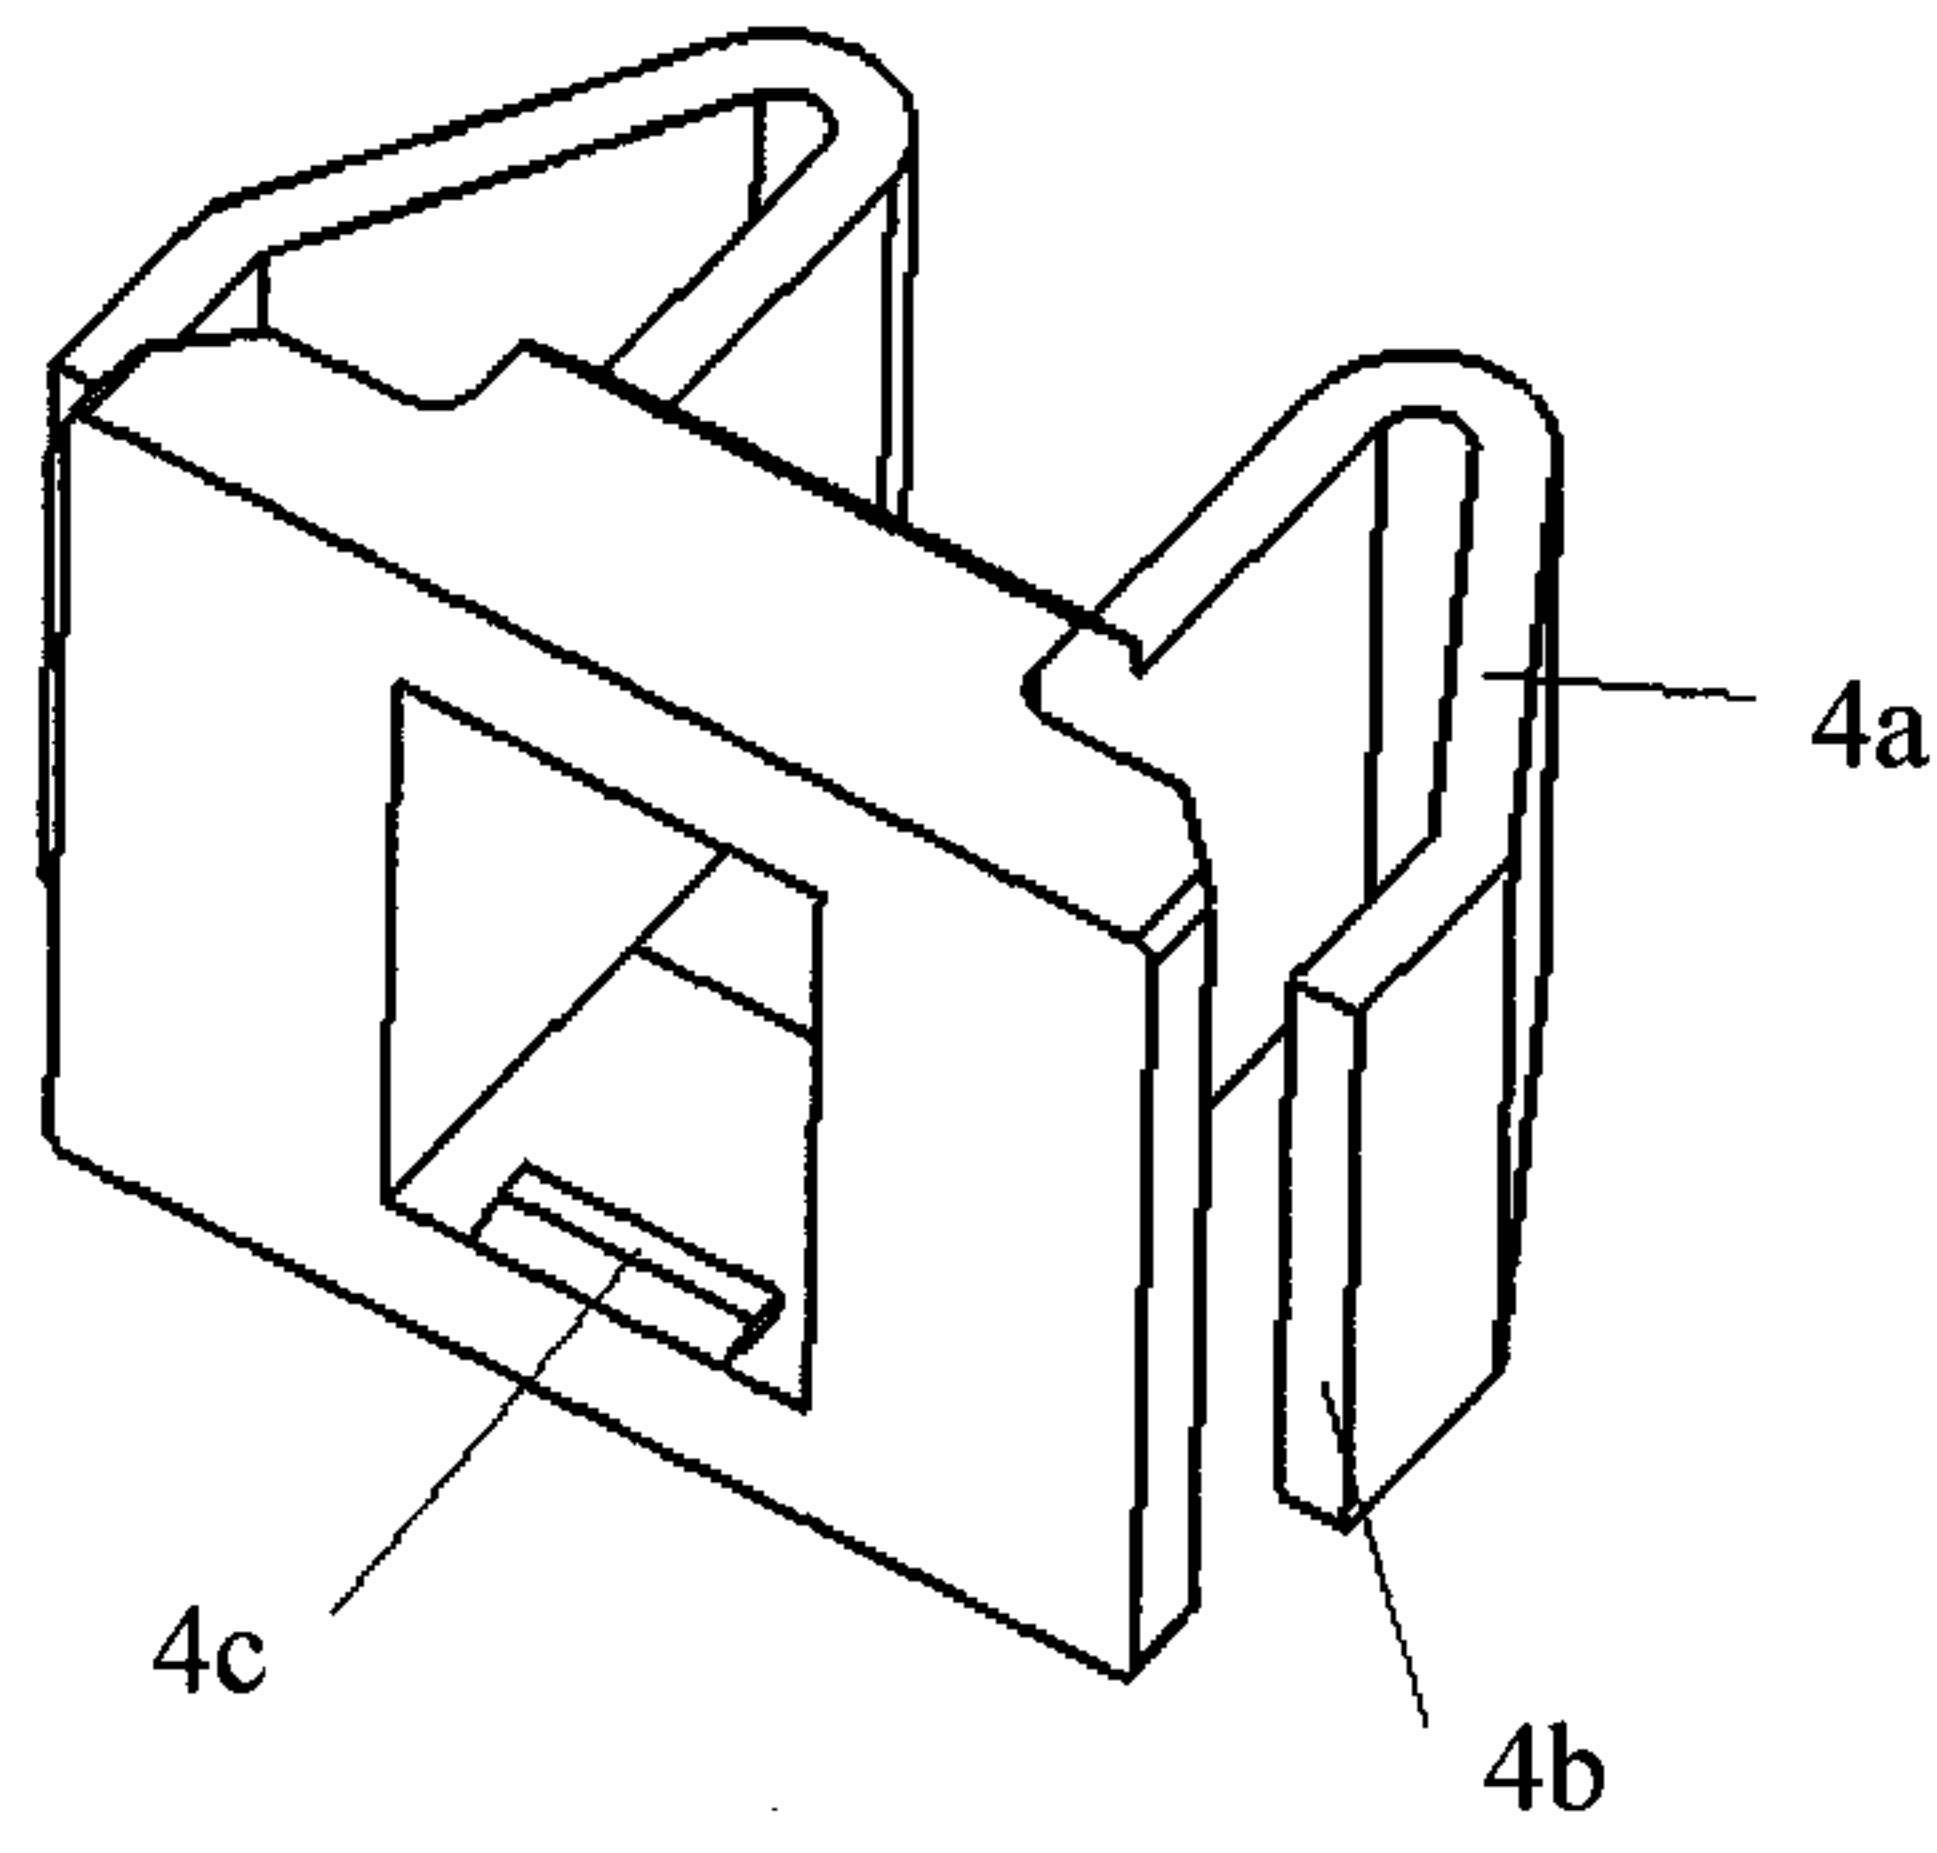


FIG. 11

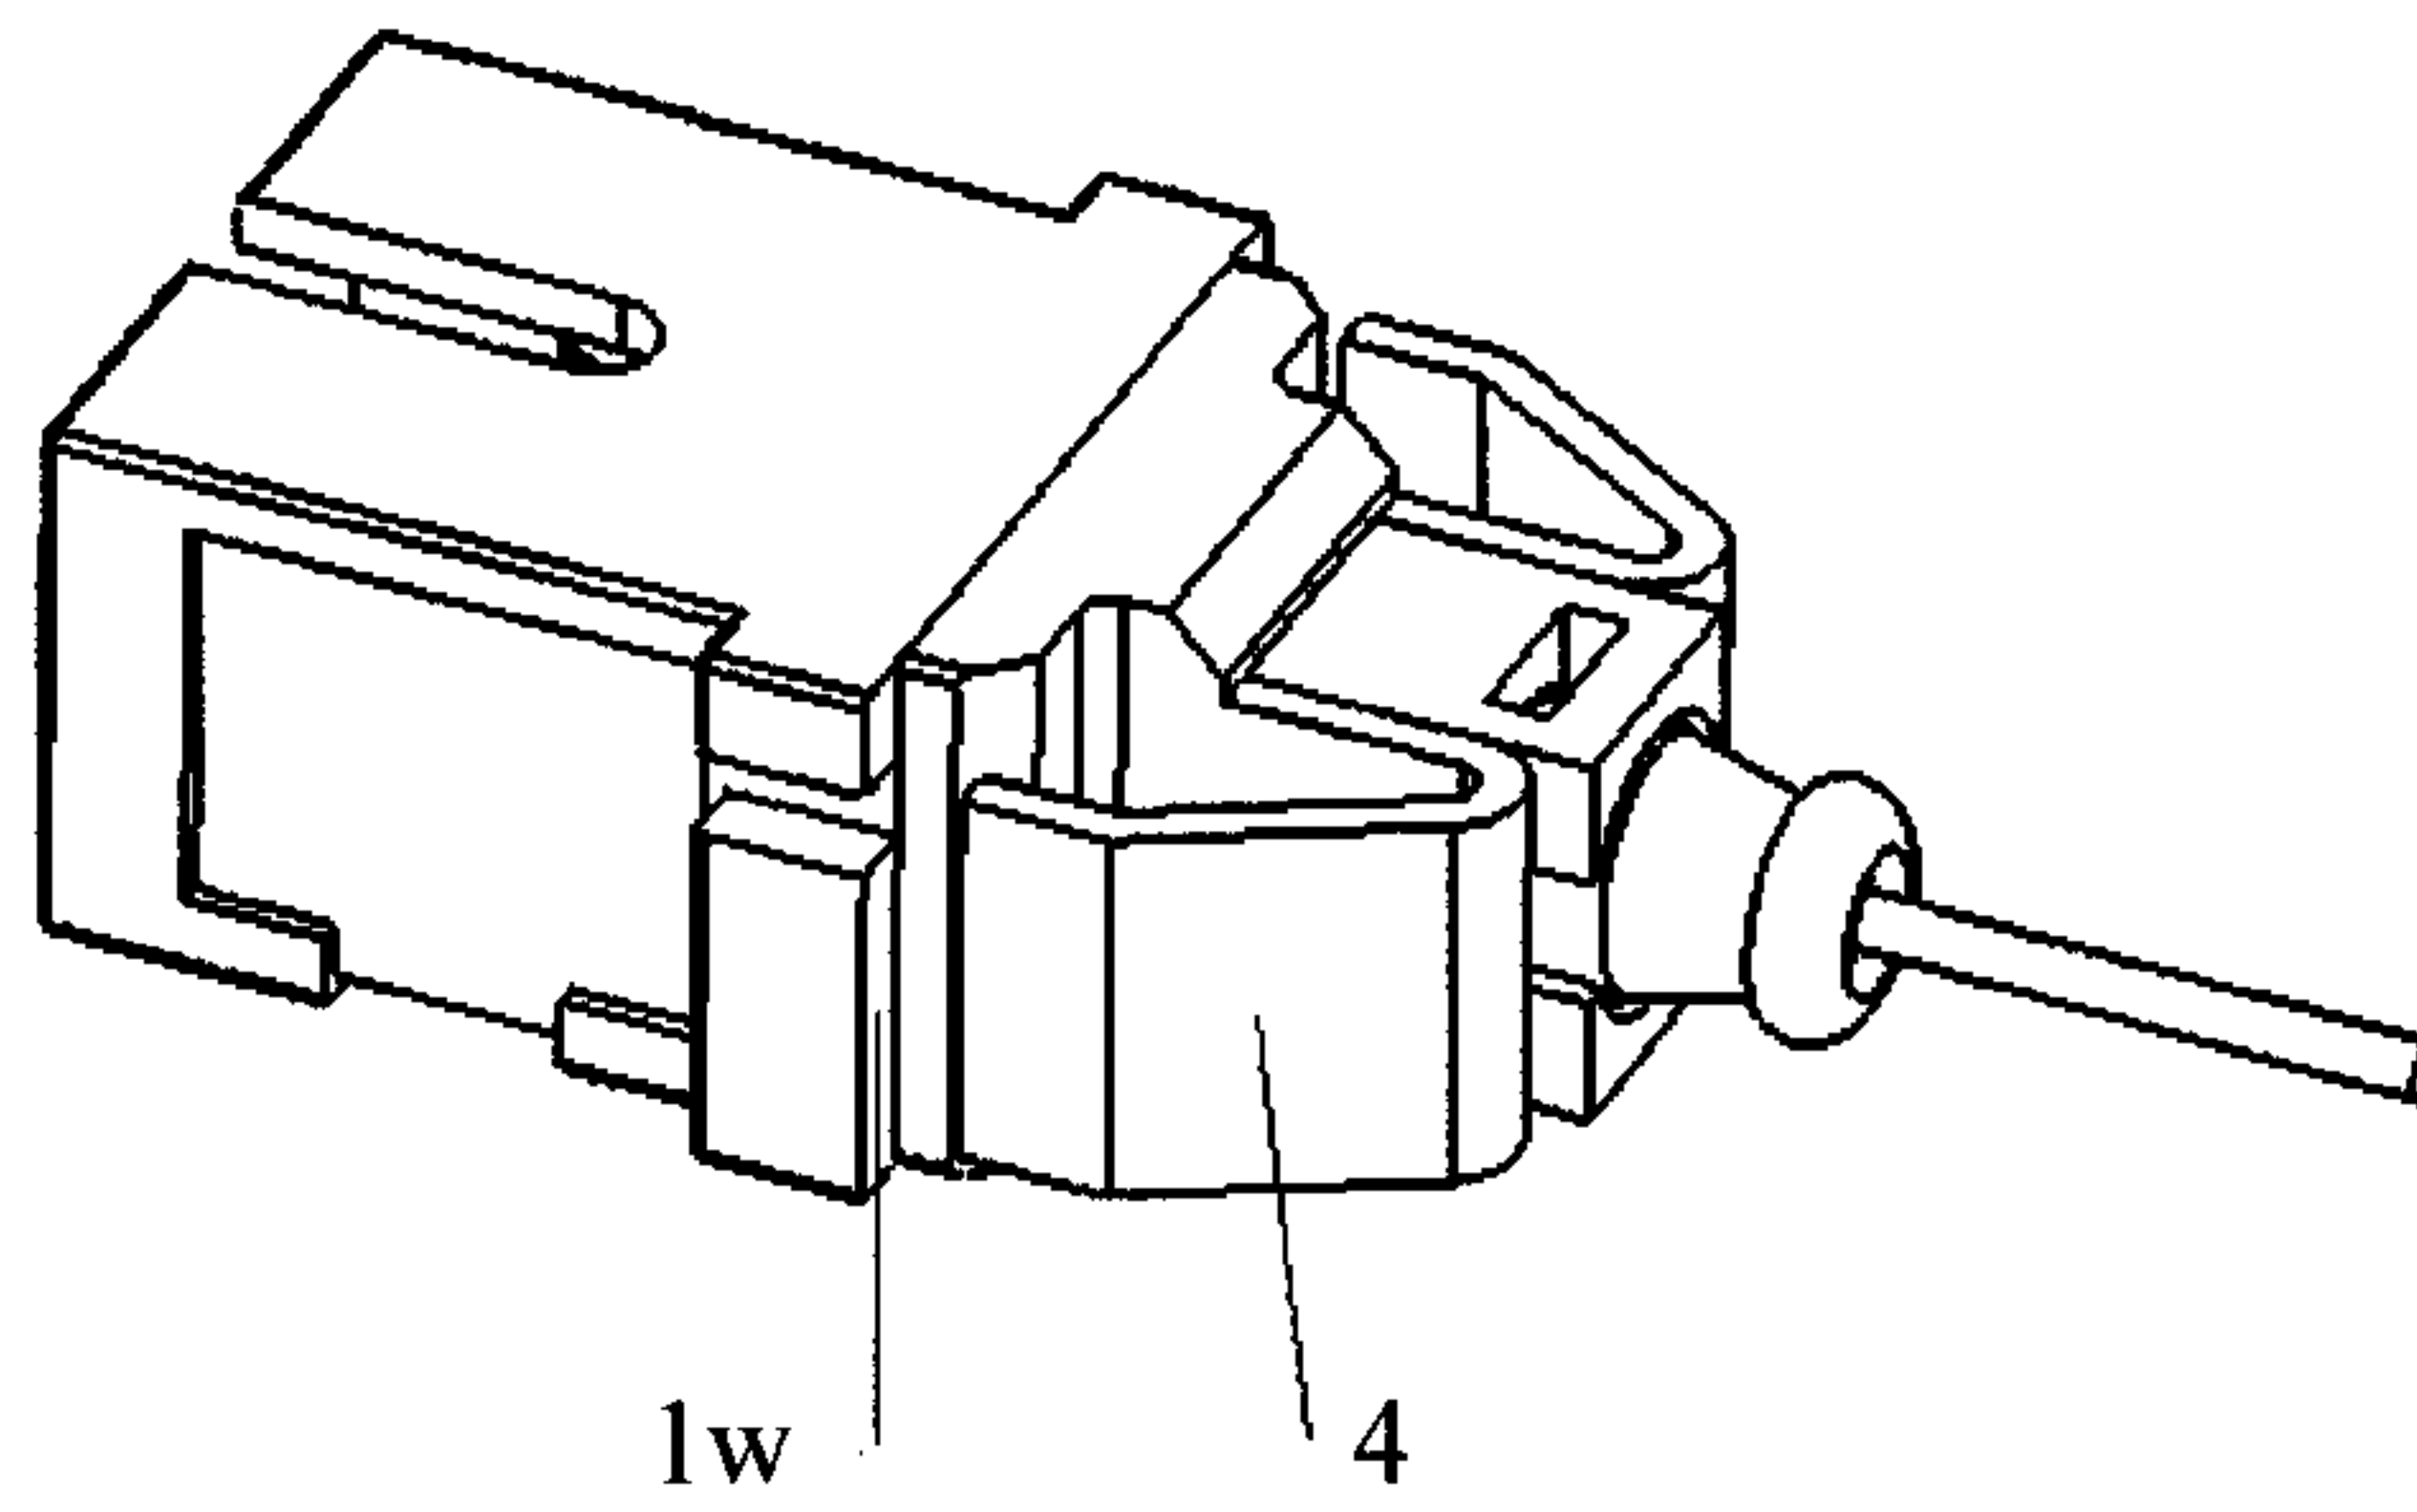


FIG. 12

6/6

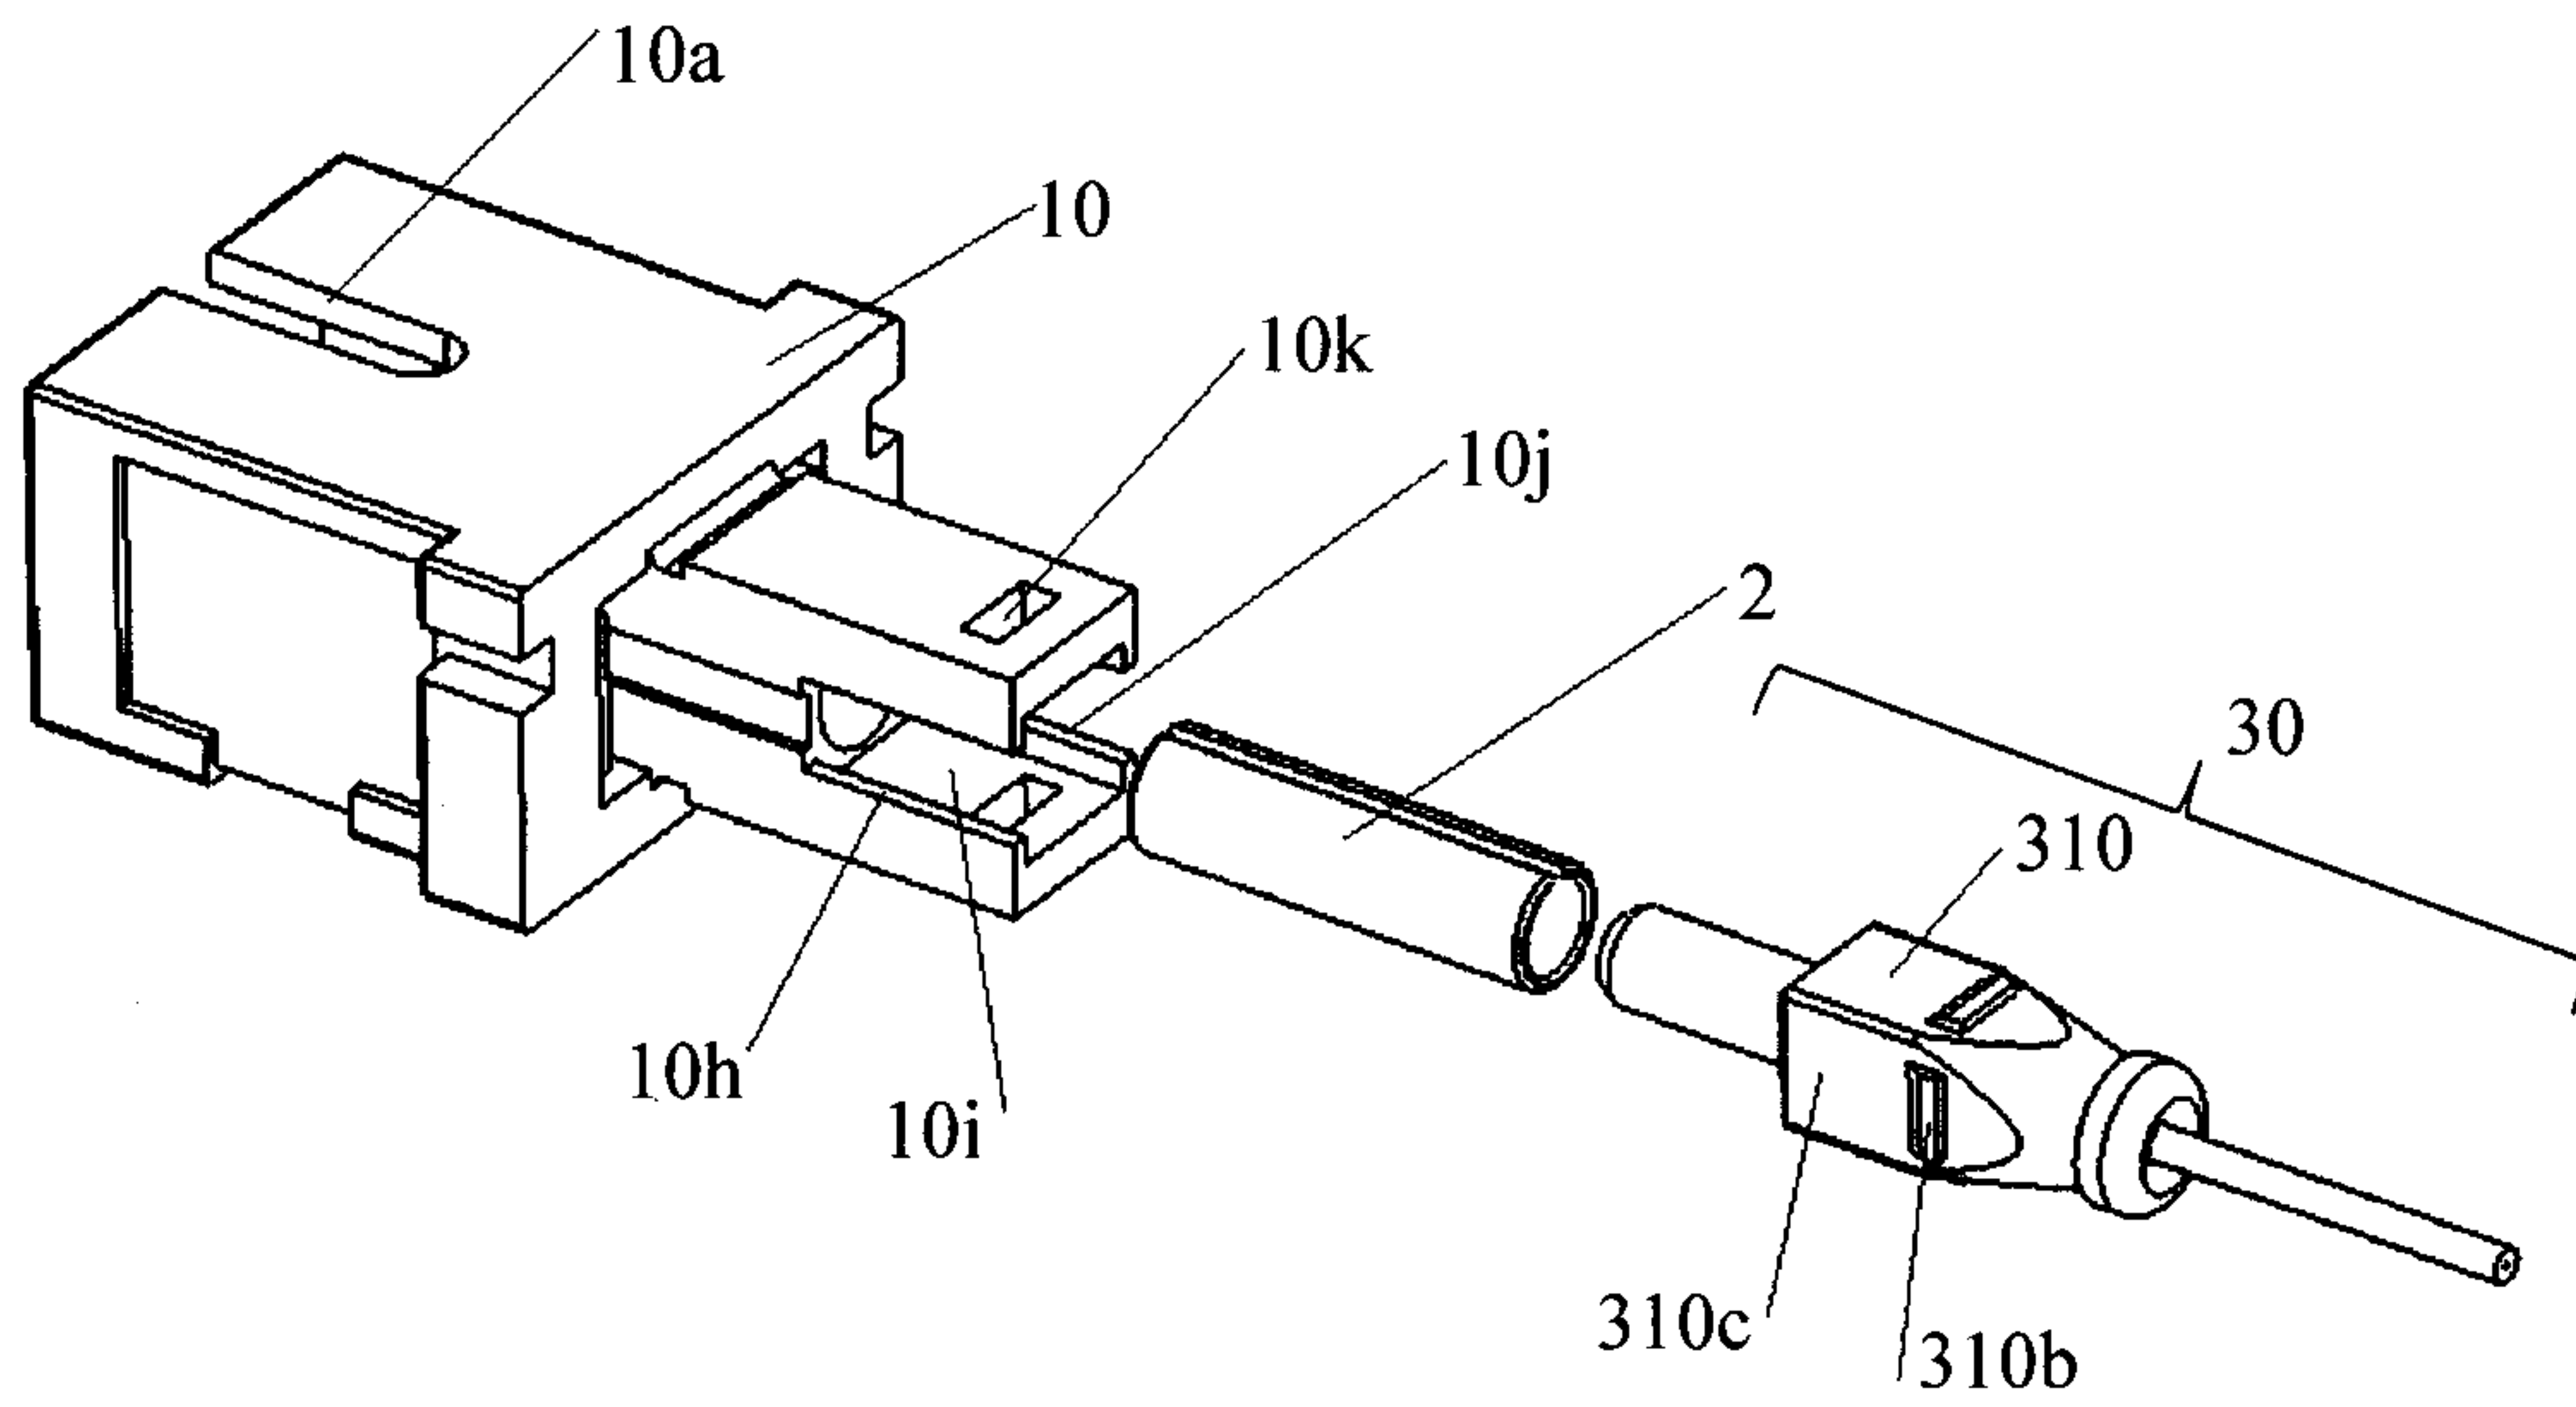


FIG. 13

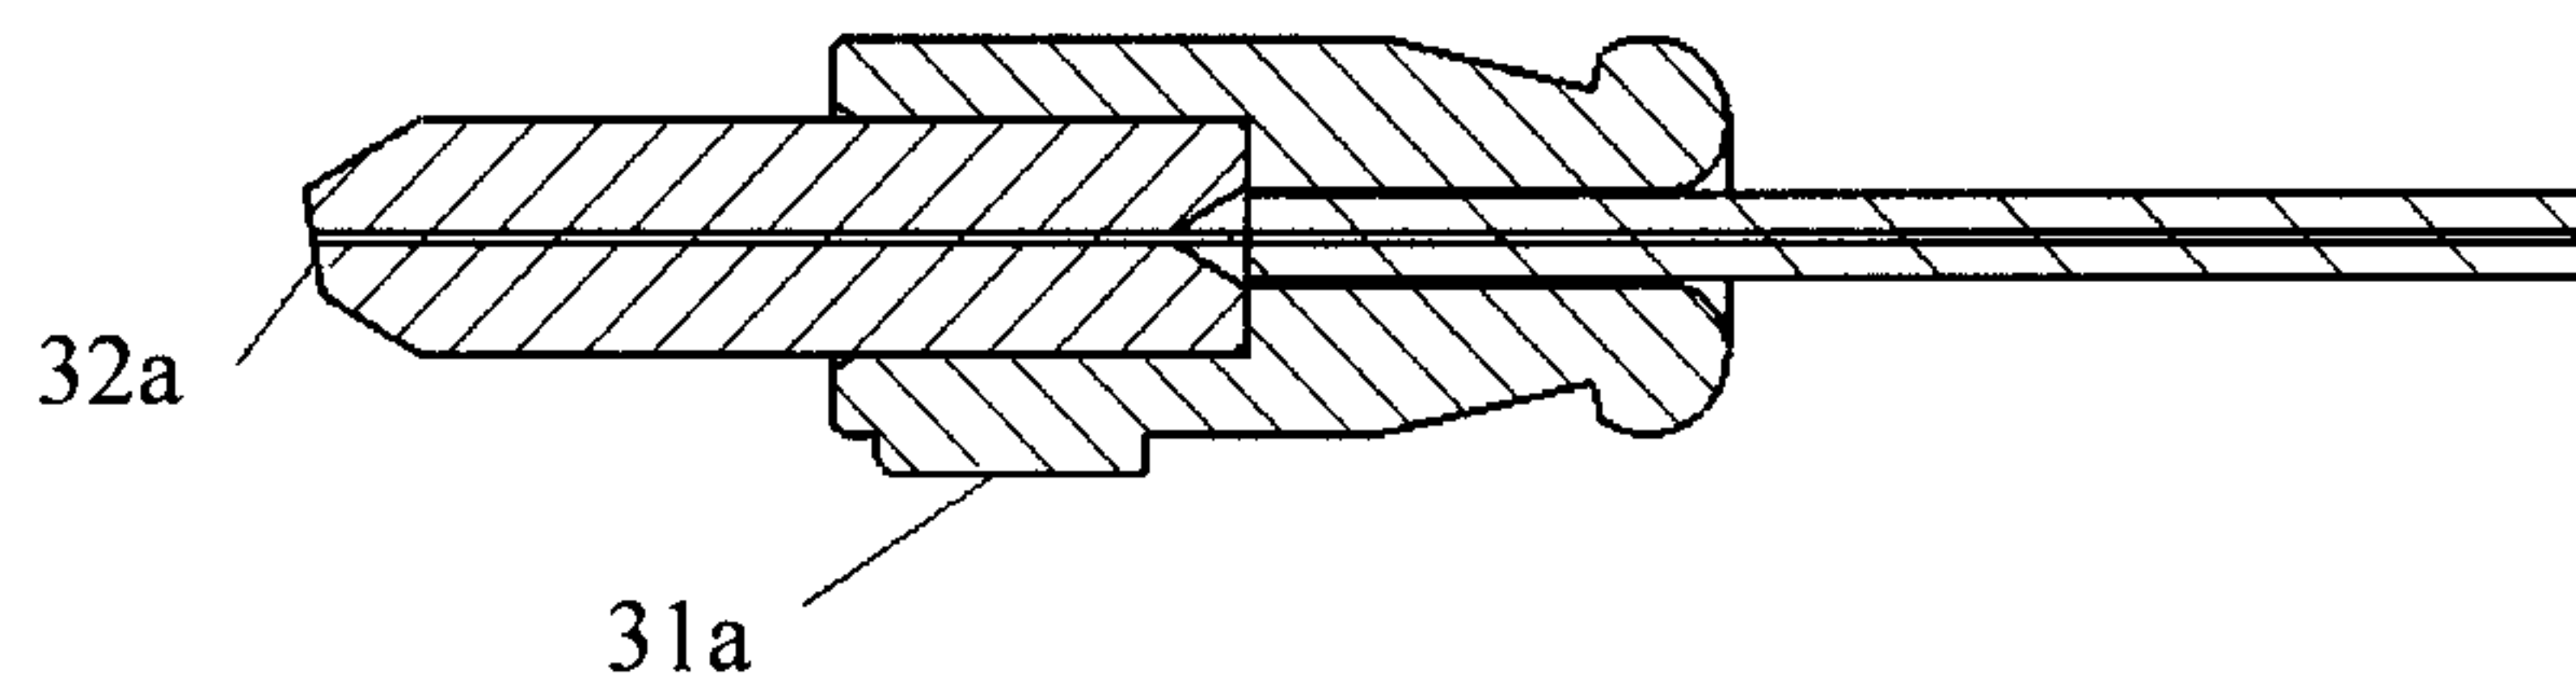


FIG. 14

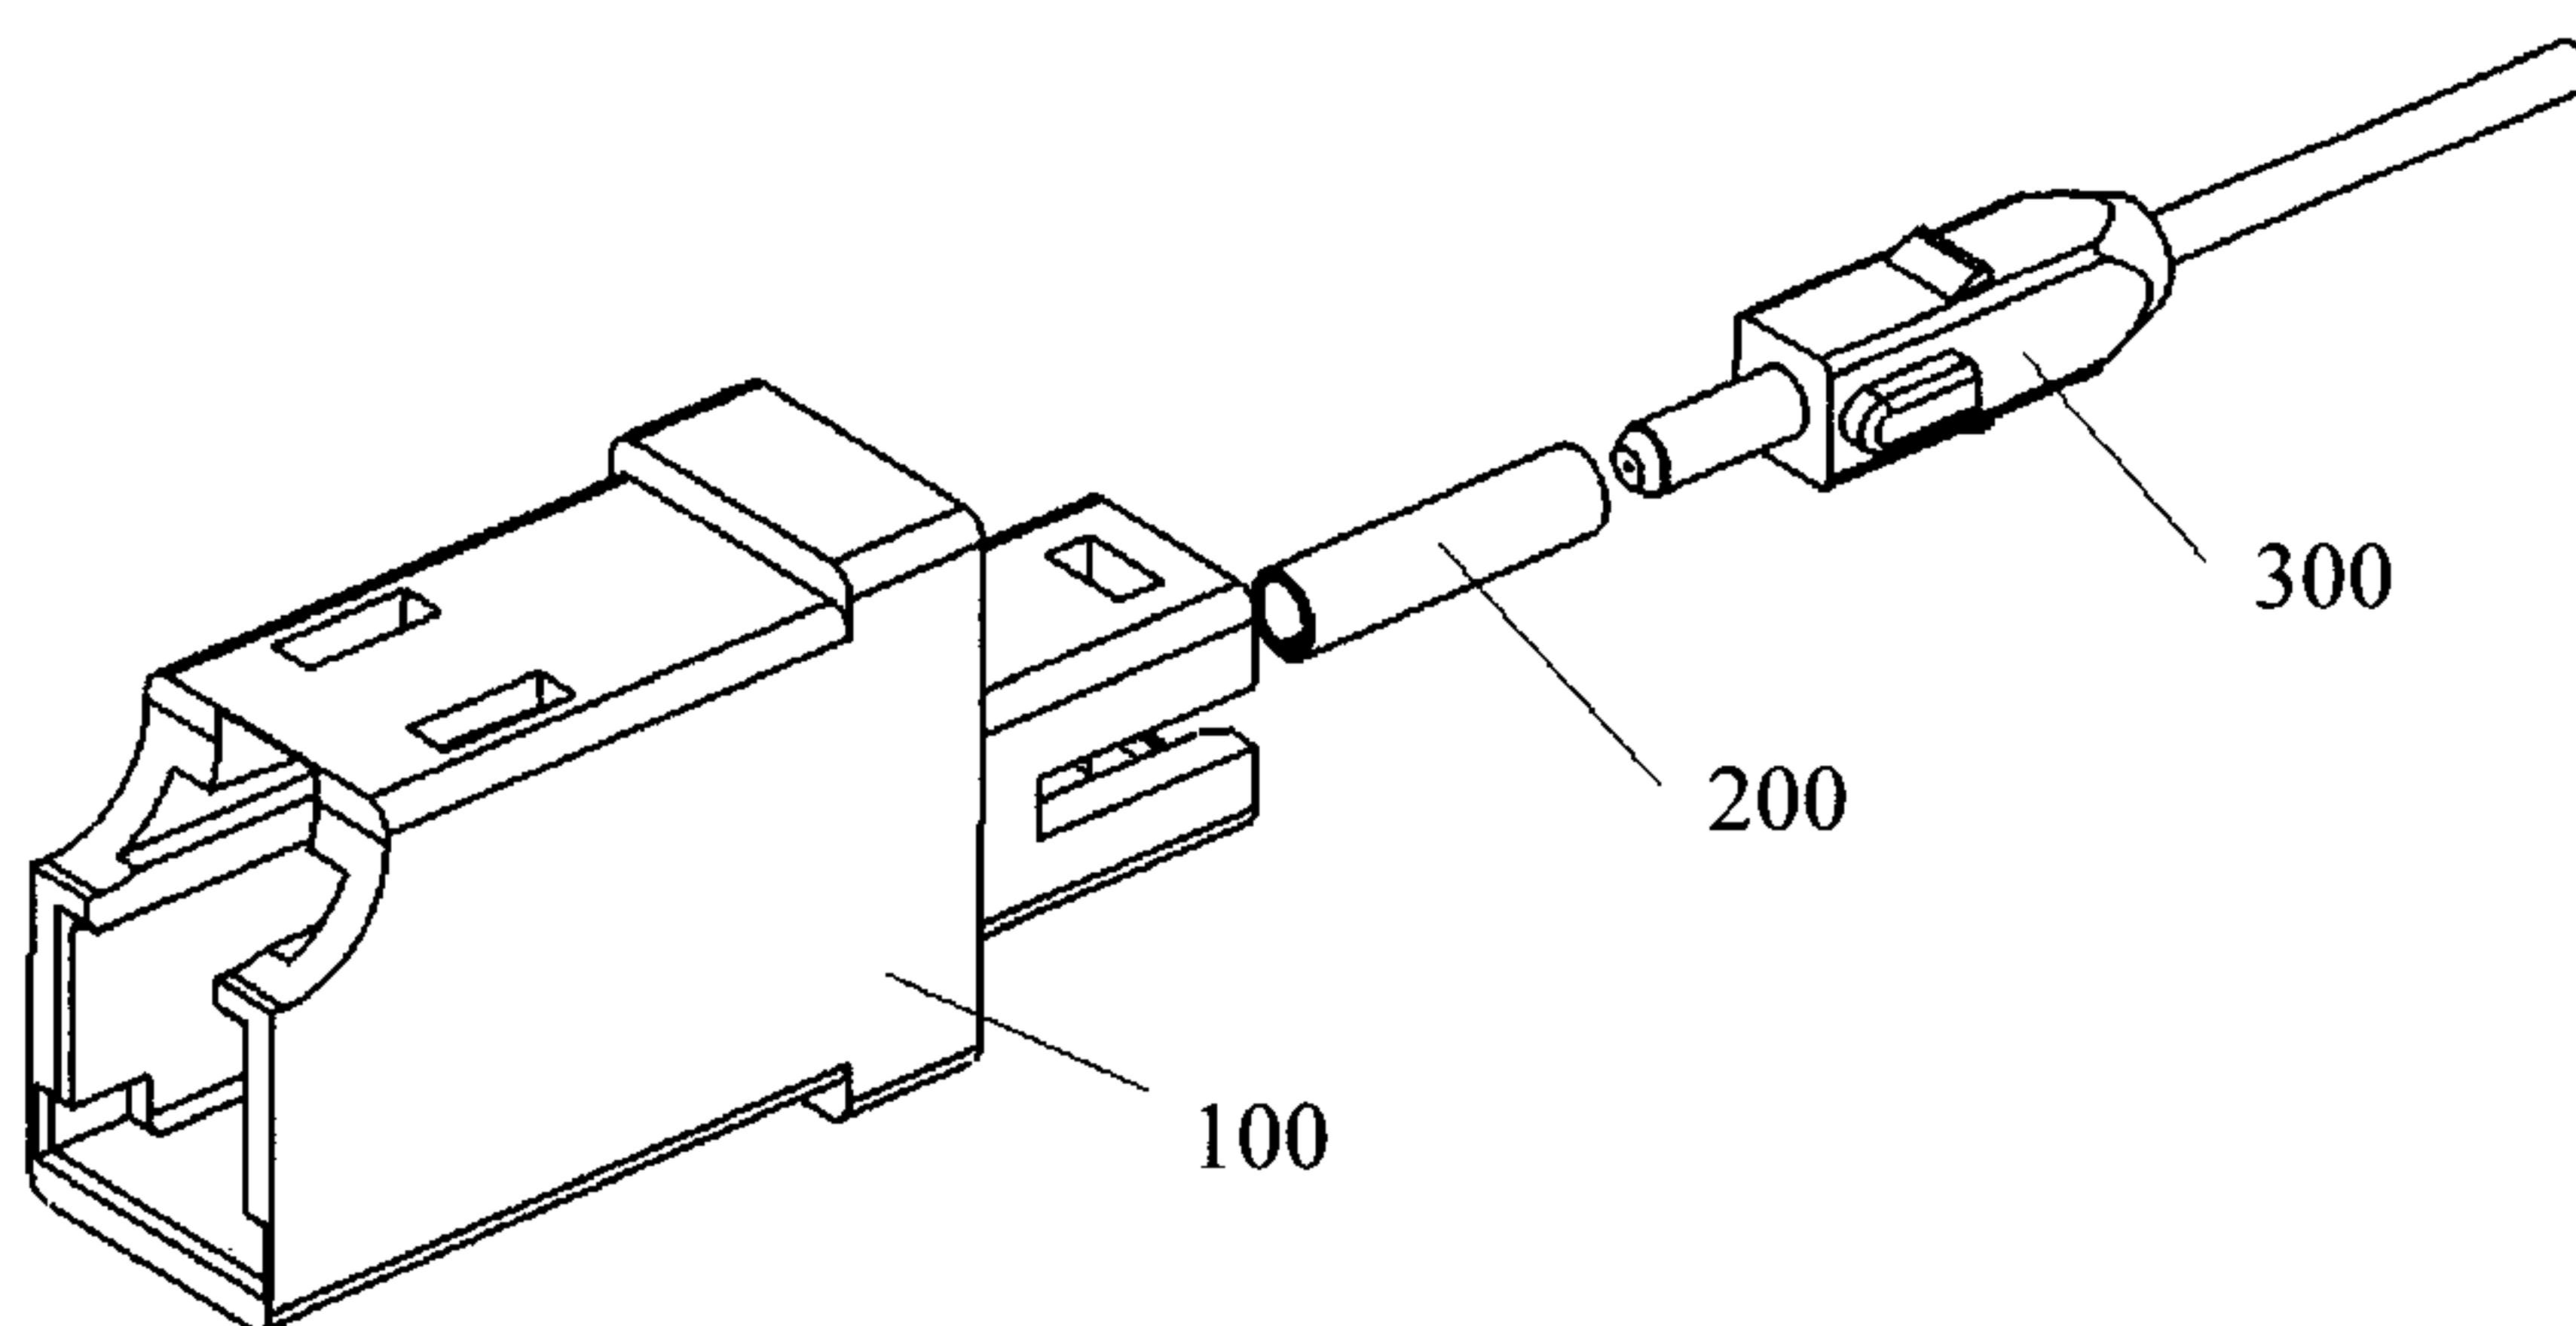


FIG. 15

