



(22) Date de dépôt/Filing Date: 2000/10/06  
(41) Mise à la disp. pub./Open to Public Insp.: 2001/04/08  
(62) Demande originale/Original Application: 2 767 311  
(30) Priorité/Priority: 1999/10/08 (KR P1999-43508)

(51) Cl.Int./Int.Cl. *H04H 60/35* (2009.01),  
*H04H 20/28* (2009.01), *H04N 21/435* (2011.01),  
*H04N 5/50* (2006.01), *H04H 40/09* (2009.01)  
(71) Demandeur/Applicant:  
LG ELECTRONICS INC., KR  
(72) Inventeur/Inventor:  
KIM, JIN PIL, KR  
(74) Agent: SMART & BIGGAR

(54) Titre : TABLE DE CANAUX VIRTUELS POUR PROTOCOLE DE RADIODIFFUSION ET METHODE D'EMISSION ET DE RECEPTION DE SIGNAUX DE RADIODIFFUSION A L'AIDE DE CETTE TABLE  
(54) Title: VIRUAL CHANNEL TABLE FOR A BROADCAST PROTOCOL AND METHOD OF BROADCASTING AND RECEIVING BROADCAST SIGNALS USING THE SAME

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bsbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++){		
short_name	7*16	unicode™ BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bsbf
hidden	1	bsbf
reserved	2	'11'
hide_guide	1	bsbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0; i<N;i++){		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++){		
additional_descriptors()		
}		
CRC_32	32	rpchof

(57) Abrégé/Abstract:

A virtual channel. table for broadcasting protocol and a method for broadcasting by using the virtual channel table includes identification information identifying and permitting discrimination of active and inactive channels contained in the virtual channel

(57) **Abrégé(suite)/Abstract(continued):**

table. At a receiver, the virtual channel table transmitted from the transmitting side is parsed, thereby determining whether the current received channel is an active or inactive channel.

74420-21GGD

**ABSTRACT OF THE DISCLOSURE**

A virtual channel table for broadcasting protocol and a method for broadcasting by using the virtual channel table includes identification information identifying and permitting discrimination of active and inactive channels contained in the virtual channel table. At a receiver, the virtual channel table transmitted from the transmitting side is parsed, thereby determining whether the current received channel is an active or inactive channel.

74420-21GGD

**VIRTUAL CHANNEL TABLE FOR A BROADCAST PROTOCOL  
AND METHOD OF BROADCASTING AND RECEIVING BROADCAST SIGNALS  
USING THE SAME**

This application is a divisional of Canadian Patent Application Serial  
5 No. 2,767,311, which is a divisional of Canadian Patent Application Serial No.  
2,688,918, which is a divisional of Canadian Patent Application Serial No. 2,628,000,  
which is a divisional of Canadian Patent Application Serial No. 2,575,037, which is  
a divisional of Canadian Patent Application Serial No. 2,322,909, filed on  
October 6, 2000.

10

**BACKGROUND OF THE INVENTION**

**Field of the Invention**

The present invention relates to a virtual channel table for a broadcast  
protocol and a method of broadcasting using the same.

**Discussion of the Related Art**

15

Generally a program and system information protocol (hereinafter,  
referred to PSIP) of an advanced television systems committee (hereinafter, referred  
to as ATSC) standard for digital television broadcasting contains a virtual channel  
table (VCT).

20

The PSIP typically contains an electronic program guide (EPG) and  
system information (SI). The PSIP is defined as the protocol of the ATSC standard  
for terrestrial and cable digital television broadcasting, which parses encoded  
messages by using a moving picture experts group-2 (MPEG-2; ISO/IEC 13818-1)  
system to thereby provide various kinds of information on the broadcast programs.  
This ATSC standard is described in "*Program and System Information Protocol For*  
25 *Terrestrial Broadcast and Cable*", ATSC Document A/65, 23 DEC 1997.

74420-21GGD

In other words, the PSIP transmits and receives audio/video data with MPEG-2 video and AC-3 audio formats, and contains several tables for transmitting information on the channel of each broadcasting station, and information on the programs on each channel. The PSIP has a primary function of conducting the audio and video services of the broadcast corresponding to a desired channel, and an additional function of conducting the electronic program service for the broadcast programs.

10 The channel information for the channel selection and the packet identification (PID) information for reception of the audio and video data are contained in a virtual channel table (VCT), and the electronic program service information on the broadcast programs on each  
15 channel is contained in an event information table (EIT). Also, the PSIP contains a system time table (STT) for time information, a rating region table (RRT) for transmitting information on the region and organization for program rating, an extended text table (ETT) for providing an  
20 additional explanation on the channel and broadcast program, and a master guide table (MGT) for management of the version of each table mentioned above and the packet identification (PID). These tables are transmitted in data units, which  
25 are called sections. Namely, all of the tables have one or more sections as a basic unit.

By way of example, the virtual channel table may be divided into 256 sections. A single section may contain information on several virtual channels, but information for a single virtual channel may not be spread over on two or  
30 more sections.

Fig. 1 is a diagram illustrating the bit stream syntax of a general virtual channel table for terrestrial

74420-21GGD

broadcast, which has been described in the above-mentioned document A/65. The general virtual channel table contains a transport stream identifier, a major channel number, a minor channel number, a short channel name, a carrier frequency, a program number and the like, and contains additional information in the descriptor(s) thereof.

Referring to Fig. 1, the virtual channel table has the table identifier field of "0xC8", and the value of the packet identification (PID) for the virtual channel table is "0x1FFB". The version number field "version\_number" represents the version value of the virtual channel table, the section number field "section\_number" represents a corresponding section number, the last section number field "last\_section\_number" represents a last section number of the virtual channel table, and the section number channel field "num\_channels\_in\_section" represents the number of whole virtual channels existing within the sections of the virtual channel table.

The short name field "short\_name" within the statement in the "for\_loop" represents the name of the virtual channel, and the major channel number field "major\_channel\_number" represents a major channel number among the virtual channels defined in the statement mentioned above. Each virtual channel number is connected to the major and minor channel numbers, respectively, and the major and minor channel numbers function as the user reference number for the corresponding virtual channel. In other words, the virtual channel table carries the data for each virtual channel through the statement of the "for\_loop".

The program number field "program\_number" contains the information for connecting the virtual channel where the

74420-21GGD

MPEG-2 program association table (PAT) and program map table (PMT) are defined, which corresponds to the program numbers in the program association table and the program map table. In this case, the program association table defines the  
5 components of the program for every program number, namely, indicates the packet identification of the transport packet transmitting the program map table. The program map table defines the list and the annex information thereof on the packet identification of the

74420-21GGD

transport packet transmitting the program identification number and the bit stream of the video and audio signals constituting the program.

The source identifier field "source\_id" represents the program source connected to the corresponding virtual channel. In this case, the source means a specific source such as image, text, data or sound. The source identifier field "source\_id" has a unique value in the transport stream transmitting the virtual channel table. The descriptor length field "descriptors\_length" indicates the whole length of the descriptors of the corresponding virtual channel, and the additional descriptor length field "additional\_descriptors\_length" indicates the whole length of all of the additional descriptors of the virtual channel table.

10 Fig. 5 shows an exemplary list of descriptors for PSIP tables according to the ATSC standard.

Fig. 2 is a diagram illustrating an example of executing scheduled broadcasting by using four virtual channels in a broadcasting station.

By way of example, it is assumed that the scheduled broadcast as shown in Fig. 2 is executed through the four virtual channels, 51-1, 51-2, 51-3 and 51-8 in an arbitrary broadcast station and a virtual channel table composed of a single section is transmitted.

If the current time is 20:15, the system time table transmits the current time information. In this case, the channels 51-1 and 51-3 broadcasting at the current time 20:15 are defined as the active channels.

20 On the other hand, the channel 51-2 is not broadcasting at the current time and is going to be broadcast the next day, and the channel 51-8 is going to be broadcast next at 06:00. In this case, the channels 51-2 and 51-8, which are not broadcasting at the current time

74420-21GGD

20:15 and are going to be broadcast in the future, are defined as the inactive channels.

As a result, each channel may be an active or inactive channel, based upon an arbitrary point in time.

5           Within the PSIP, the virtual channel table should contain the active channels as required and may also contain the inactive channels as recommended facts, for conducting the electronic program guide.

10           Therefore, at the current time 20:15 the virtual channel table may contain information on all of the channels 51-1, 51-2, 51-3 and 51-8, and thus a digital television broadcast receiver or a digital cable broadcast receiver receives the virtual channel table to thereby provide the channel selection information to TV viewers.

15           However, as shown in Fig. 1, according to the bit stream syntax of the virtual channel table according to the A/65 standard, the digital television broadcast receiver or the digital cable broadcast receiver cannot discriminate between the active channels (for example, the channels 51-1  
20 and 51-3) and the inactive channels (for example, the channels 51-2 and 51-8), when parsing the virtual channel table.

          As a consequence, the TV viewers see a black screen because of the information on the inactive channels transmitted from the broadcast station for providing the  
25 electronic program guide. The black screen means the black background color is displayed on the screen when an inactive channel not broadcasting at a current time is selected. On the other hand, the character message "service not provided" is displayed on the screen of the black background color by  
30 the on-screen display function of the digital television broadcast receiver or the digital cable broadcast receiver. By way of example, if the TV viewer selects the channel 51-2

74420-21GGD

with a channel up key while viewing the channel 51-1, the audio and video data are not displayed because the channel 51-2 is an inactive channel, such that the black background color is displayed on the screen.

5           The above-mentioned problem may give many inconvenience to the TV viewers at a point of time when digital television broadcast receivers or digital cable broadcast receivers become popular and a large number of virtual channels are broadcast.

10                           SUMMARY OF THE INVENTION

Accordingly, some embodiments of the present invention are directed to a virtual channel table that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

15           An object of some embodiments of the present invention is to provide a virtual channel table for a broadcast protocol, and a method of broadcasting by using the same table, which are capable of identifying and permitting discrimination between active and inactive  
20 channels from the channels received by a broadcast receiver.

Another object of some embodiments of the invention is to provide a virtual channel table for a broadcast protocol, and a method of broadcasting by using the same table, which are capable of rapidly displaying only  
25 the channels being broadcast at a current time.

Additional features and advantages of embodiments of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The  
30 objectives and other advantages of the invention will be

74420-21GGD

realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

The identification information may be loaded on or included in at least one reserved field in the virtual channel table. Preferably, the identification  
5 information assigns at least one or more bits of a reserved field as a

74420-21GGD

flag, thereby indicating that a corresponding channel is an inactive channel.

For example, the value of the program number field "program\_number" in the virtual channel table is set to "0",  
5 thereby indicating that the corresponding channel is the inactive channel.

The identification information sets the value of the number elements field "number\_elements" (which indicates the number of PID's used for a program) of the service  
10 position descriptor field "service\_location\_descriptor" (which is used to list available bit streams by their PID's) in the virtual channel table to "0", thereby indicating that the corresponding channel is an inactive channel.

In a case where the corresponding channel is an  
15 inactive channel, the virtual channel table does not contain the service location descriptor field therein, for the purpose of indicating that the corresponding channel is an inactive channel.

It is to be understood that both the foregoing  
20 general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to  
25 provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of embodiments of the invention.

74420-21GGD

In the drawings:

FIG. 1 is a diagram illustrating the bit stream syntax of a general virtual channel table for terrestrial broadcast;

5 FIG. 2 is a diagram illustrating an example of executing schedule broadcasting by using four virtual channels in a broadcast station;

10 FIG. 3 is a diagram illustrating the bit stream syntax of a virtual channel table for terrestrial broadcast according to an embodiment of the present invention;

FIG. 4 is a diagram illustrating the bit stream syntax of a virtual channel table for cable according to another embodiment of the present invention; and

15 FIG. 5 is chart listing various descriptors available according to a program and system information protocol of an advanced television systems committee standard digital television broadcast.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

According to the present invention, a virtual channel table for a broadcast protocol comprises identification information capable of identifying and  
25 permitting discrimination between active and inactive channels in the bit stream syntax thereof. A transmitting side, namely, a broadcast station transmits the virtual channel table having the identification information to the receivers. Each of the receivers parses the virtual channel

74420-21GGD

table received, thereby determining whether the channel currently selected is an active channel or an inactive channel.

The identification information, which is capable of identifying and permitting discrimination between an active channel and an inactive channel under the standard of the PSIP, is contained in at least one field of the virtual channel table of the above protocol, such that only active channels being currently broadcast are displayed to TV viewers.

Hereinafter, preferred embodiments of a virtual channel table and a method according to the present invention will be in detail described with reference to Figs. 3 and 4.

In order for a digital television receiver and a digital cable broadcast receiver to parse the virtual channel table and thus to determine whether the channel selected currently is an active channel or an inactive channel, the bit stream syntax of the virtual channel table may be corrected.

For example, the fact that channels 51-2 and 51-8 are not broadcast at the current time 20:15, but are going to be broadcast in the future, should be recognized in a digital television receiver and a cable broadcast receiver. In a preferred embodiment, the identification information capable of identifying an inactive channel is contained in the program number field "program\_number", the service location descriptor field "service\_location\_descriptor" and/or other reserved fields contained in the bit stream syntax of the virtual channel table.

74420-21GGD

Fig. 3 is a diagram illustrating the bit stream syntax of a virtual channel table for terrestrial broadcast according to an embodiment of the present invention. To indicate that a corresponding channel is an inactive channel, the value of the program number field "program\_number" is set to "0". And, since there are no audio and video signals of the current service location descriptor, the value of the number elements field "number\_elements" of the service location descriptor "service\_location\_descriptor" is set to "0". Also, or alternatively, to indicate that the corresponding channel is an inactive channel, the service location descriptor "service\_location\_descriptor" (see Fig. 5) is not contained in the virtual channel table. In other words, for the digital television receiver and the cable broadcast receiver, the service location descriptor field should be contained in the virtual channel table only in a case where the corresponding channel is the active channel. If the corresponding channel is an inactive channel, however, the service location descriptor field is not contained in the virtual channel table.

In a preferred embodiment, in order to recognize the fact that the corresponding channel is an inactive channel in a more apparent manner, 1 bit of the reserved field of 6 bits for each channel is assigned to define a flag indicative of an inactive channel. In the preferred embodiment, 1 bit in the reserved field between the hidden field "hidden" and the service type field "service\_type" in the statement of the "for\_loop" is assigned to define a flag

74420-21GGD

indicative of an inactive channel. For example, in a case where the flag indicative of the inactive channel is "1", the corresponding channel is an active channel, and if the flag is "0", the corresponding channel is an inactive  
5 channel.

In the preferred embodiment, the above three cases may be added as requirements to the A/65 standard. Any of all of the three cases may be added to the A/65 standard.

As mentioned above, since the information on an  
10 inactive channel is contained in the virtual channel table, the digital television receiver can determine whether the virtual channel currently received is an active channel or an inactive channel by parsing only the virtual channel table. For example, if the value of the program number  
15 field "program\_number" in the virtual channel table is "0", if the value of the information on the inactive channel defined by assigning a predetermined bit in the reserved field is "0", or if the service location descriptor field "service\_location\_descriptor" is not contained in the  
20 virtual channel table, the major channel number field "major\_channel\_number" and the minor channel number field "minor\_channel\_number" defined in the bit stream syntax of the virtual channel table currently transmitted can be used to determine that the current virtual channel is an inactive  
25 channel for example by both being assigned a value of "0".

On the other hand, if an inactive channel has been determined under the above process, the digital television receiver can skip the inactive channel, without displaying it on

74420-21GGD

the screen, upon channel conversion by means of a channel up key or a channel down key.

Fig. 4 is a diagram illustrating the bit stream syntax of a virtual channel table for cable according to another embodiment. As shown, the virtual channel table may be applied to cable broadcasting in the same manner as above.

5 As is apparent from the foregoing description, a virtual channel table for a broadcast protocol, and a method of broadcasting by using the virtual channel table are capable of including the identification information capable of identifying and permitting discrimination between active and inactive channels in a transmitting side, and in a receiving side parsing the virtual channel table to thereby determine whether the channel currently selected is the active  
10 channel or the inactive channel. Therefore, inactive channels may be skipped, without being displayed, upon the channel conversion by using a channel up key or a channel down key, such that the TV viewer can enjoy channel surfing in a convenient manner, without viewing a black screen. In addition, the virtual channel table may be transmitted, while containing the inactive channels therein, thereby making it possible to provide a more abundant electronic  
15 program service.

It will be apparent to those skilled in the art that various modifications and variations can be made to the embodiments described herein.

Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and  
20 their equivalents.

74420-21GGD

WHAT IS CLAIMED IS:

- 1 1. A virtual channel table for a broadcast protocol, comprising identification information  
2 in a bit stream syntax thereof, said identification information identifying each channel as one  
3 of an active and an inactive channel.
  
- 1 2. The virtual channel table of claim 1, wherein said virtual channel table is included in a  
2 program and system information protocol for a digital broadcast.
  
- 1 3. The virtual channel table of claim 2, wherein said digital broadcast is any one of a  
2 digital terrestrial broadcast and a digital cable broadcast.
  
- 1 4. The virtual channel table of claim 1, wherein said identification information sets a  
2 value of a program number field in the virtual channel table to "0" to indicate that a  
3 corresponding channel is an inactive channel.
  
- 1 5. The virtual channel table of claim 1, wherein said identification information sets a  
2 value of a number of elements field of a service location descriptor in the virtual channel  
3 table to "0" to indicate that a corresponding channel is an inactive channel.
  
- 1 6. The virtual channel table of claim 1, wherein said identification information indicates  
2 that a corresponding channel is an inactive channel whenever a service location descriptor is  
3 not included in the virtual channel table.

74420-21GGD

1 7. The virtual channel table of claim 1, wherein said identification information assigns at  
2 least one bit of a reserved field to indicate that a corresponding channel is an inactive  
3 channel.

1 8. The virtual channel table of claim 7, wherein said reserved field is positioned in a  
2 statement of a for\_loop in a bit stream syntax of the virtual channel table.

1 9. The method of broadcasting using a virtual channel table in a broadcasting protocol,  
2 said method comprising:

3 including identification information in the virtual channel table, said identification  
4 information identifying a channel as being one of an active and an inactive channel, and  
5 transmitting the virtual channel table; and

6 determining at a receiver whether the channel is inactive based upon the identification  
7 information defined in the virtual channel table, by parsing the virtual channel table.

1 10. The method of claim 9, wherein including identification information further  
2 comprises, when a channel is inactive, setting a value of a program number field in the virtual  
3 channel table to "0" and inhibiting a service location descriptor from being transmitted  
4 through the virtual channel table.

1 11. The method of claim 9, wherein including identification information further

74420-21GGD

2 comprises setting a value of the program number field and a value of a reserved field assigned  
3 for recognizing an inactive channel in the parsed virtual channel table to "0."

1 12. The method of claim 9, wherein determining at the receiver whether the channel is  
2 inactive comprises determining that the channel is inactive when a corresponding service  
3 location descriptor is not received in the virtual channel table.

1 13. The method of claim 9, wherein determining at the receiver whether the channel is  
2 inactive comprises determining that the channel is inactive when a value of a reserved field  
3 assigned for recognizing an inactive channel in the parsed virtual channel table is "0."

1 14. The method of claim 9, wherein determining at the receiver whether the channel is  
2 inactive comprises determining that the channel is inactive when a value of a program  
3 number field in the virtual channel table is "0."

1 15. In a digital television receiver, a method of inhibiting display of an inactive channel,  
2 comprising:

3 receiving a digital broadcast signal comprising a virtual channel table;

4 parsing the virtual channel table;

5 retrieving identification information from the parsed virtual channel table indicating  
6 whether a channel is inactive; and

7 and, in response to said identification information indicating that the channel is

74420-21GGD

1 inactive, inhibiting display of said channel when said channel is selected by a user.

1 16. The method of claim 15, wherein retrieving the identification information comprises  
2 reading a value of a reserved field for identifying an inactive channel in the parsed virtual  
3 channel table.

1 17. The method of claim 15, wherein retrieving the identification information comprises  
2 reading a value of a program number field in the parsed virtual channel table.

1 18. The method of claim 15, wherein retrieving the identification information comprises  
2 determining whether a service location descriptor is found in the parsed virtual channel table.

1 19. In a digital broadcast transmitter, a method of indicating an inactive channel,  
2 comprising:  
3 generating a virtual channel table, including within the virtual channel table  
4 information indicating the inactive channel; and  
5 transmitting the virtual channel table as part of a digital broadcast signal.

1 20. The method of claim 19, wherein including within the virtual channel table  
2 information indicating the inactive channel comprises setting a value of a program number  
3 field in the virtual channel table to indicate the inactive channel.

74420-21GGD


1 21. The method of claim 19, wherein including within the virtual channel table  
2 information indicating the inactive channel comprises assigning at least one bit of a reserved  
3 field to indicate the inactive channel.

1 22. The method of claim 19, wherein including within the virtual channel table  
2 information indicating the inactive channel comprises omitting a service location descriptor.

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
zero	2	'00'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++){		
short_name	7*16	unicode™ BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	6	'111111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++){		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++){		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

FIGURE 1  
(Prior Art)

FIG. 2  
Background Art

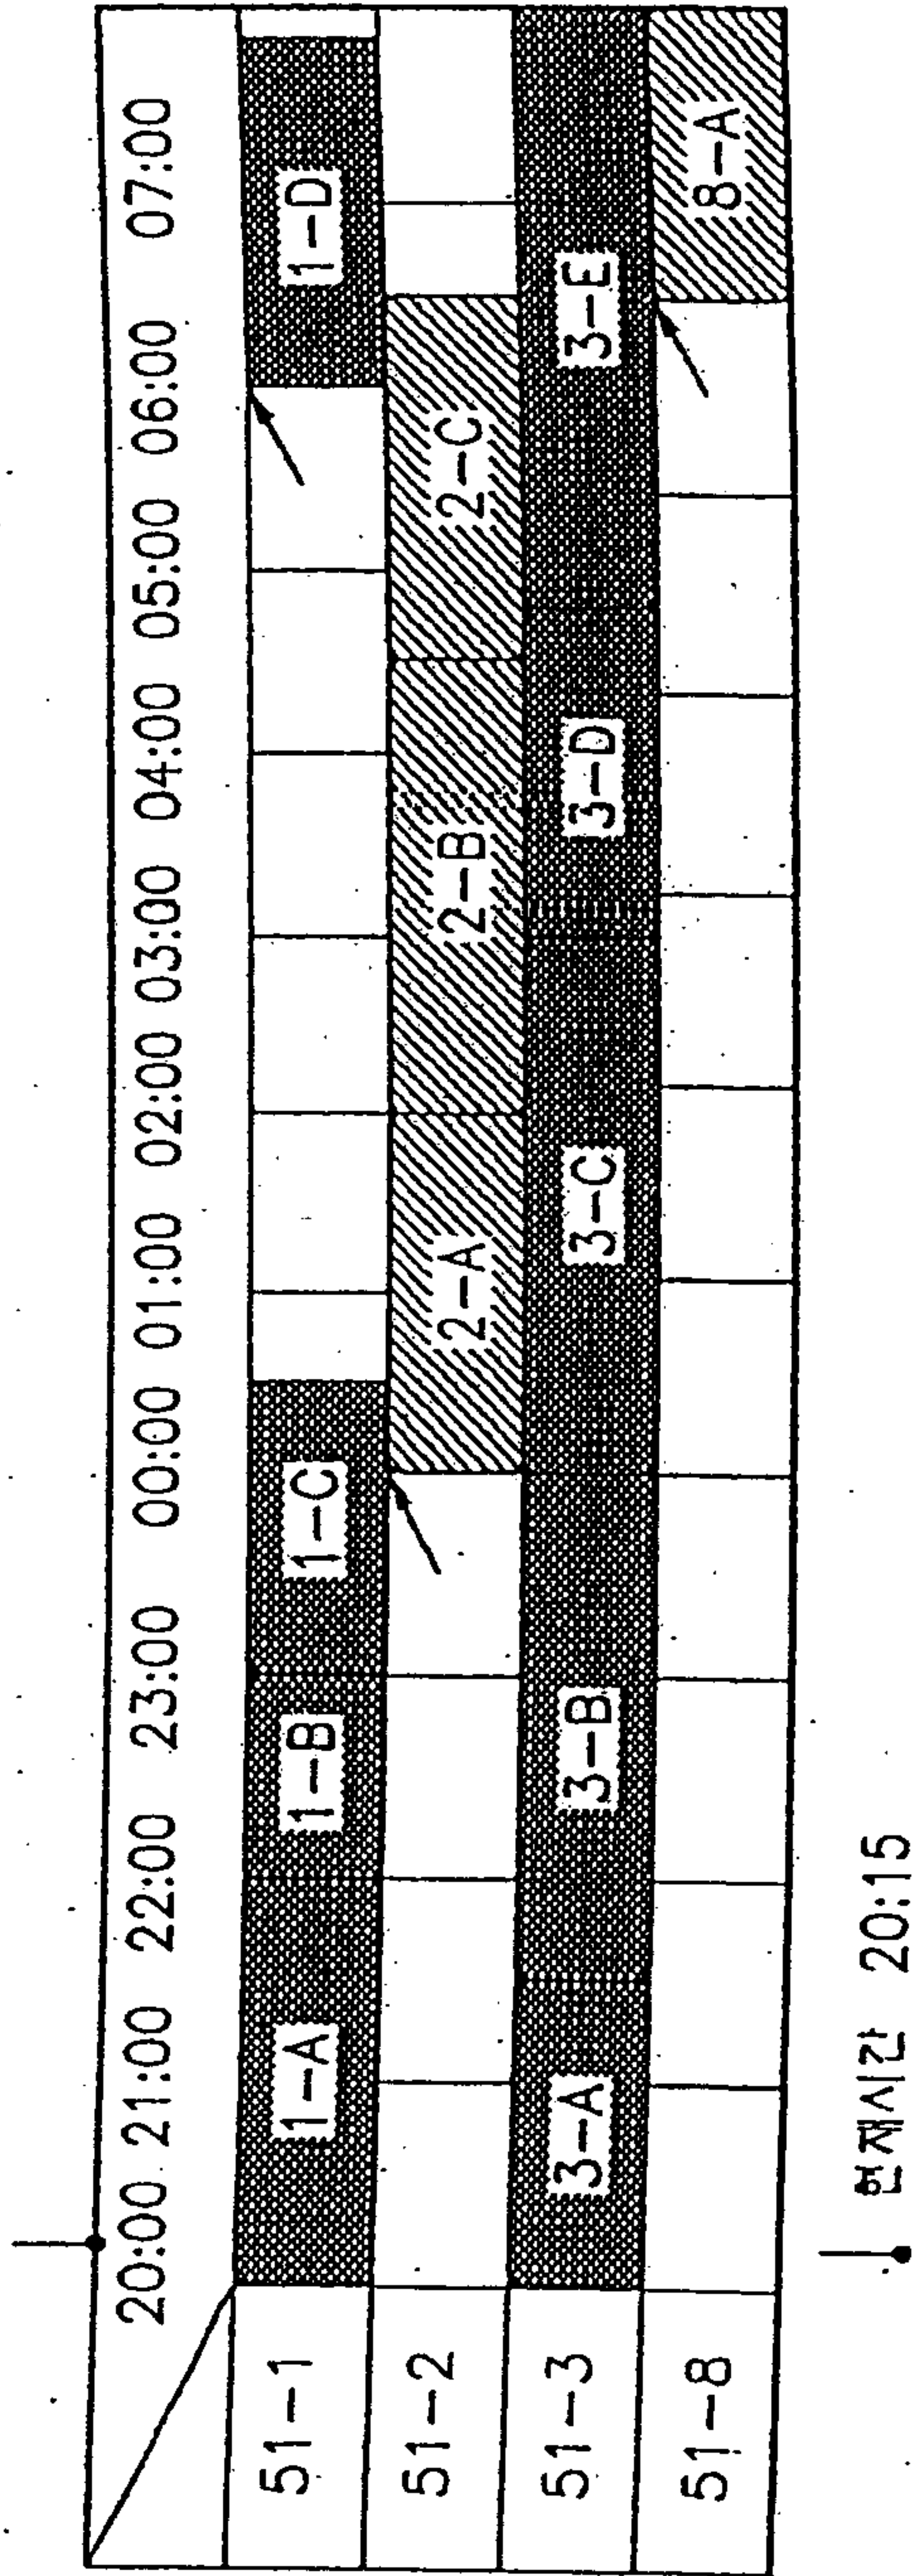

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	2	'11'
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

FIGURE 3

Syntax	Bits	Format
cable_virtual_channel_table_section () (		
table_id	8	0xC9
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
path_select	1	bslbf
out_of_band	1	bslbf
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
)		

FIGURE 4

Descriptor Name	Descriptor tag	Terrestrial				Cable		
		PMT	MGT	VCT	EIT	PMT	MGT	VCT
stuffing descriptor	0x80	*	*	*	*	*	*	*
AC-3 audio descriptor	0x81	*			*	*		
program identifier descriptor	0x85	*				*		
caption service descriptor	0x86	*			*	*		
content advisory descriptor	0x87	*			*	*		
extended channel name descriptor	0xA0			*				*
service location descriptor	0xA1			*				
time-shifted service descriptor	0xA2			*				*
component name descriptor	0xA3					*		
user private	0xC0-0xFF		*	*	*		*	*

FIGURE 5  
(Prior Art)

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xCB
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™ BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	2	'11'
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		