




- (51) **International Patent Classification:**
C07C 49/203 (2006.01) C10G 45/58 (2006.01)
C07C 9/22 (2006.01) C10G 3/00 (2006.01)
C10M 107/10 (2006.01)
- (21) **International Application Number:** PCT/EP2018/065980
- (22) **International Filing Date:** 15 June 2018 (15.06.2018)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
20175569 19 June 2017 (19.06.2017) FI
20175781 31 August 2017 (31.08.2017) FI
20175780 31 August 2017 (31.08.2017) FI
20175782 31 August 2017 (31.08.2017) FI
20176095 07 December 2017 (07.12.2017) FI
- (71) **Applicant:** NESTE OYJ [FI/FI]; Keilaranta 21, 02150 Espoo (FI).
- (72) **Inventors:** MYLLYOJA, Jukka; c/o Neste Oyj / IPR, PL 310, 06101 PORVOO (FI). KETTUNEN, Mika; c/o Neste Oyj / IPR, PL 310, 06101 PORVOO (FI). PIILOLA, Rami; c/o Neste Oyj / IPR, PL 310, 06101 PORVOO (FI).
- (74) **Agent:** ZACCO DENMARK A/S; Arne Jacobsens Allé 15, 2300 København S (DK).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) **Title:** METHOD FOR CONVERTING CARBOXYLIC ACIDS AND ESTERS INTO BASE OIL HYDROCARBONS

Figure 3 – Trimerised palmitic acid (C16:0 fatty acid)

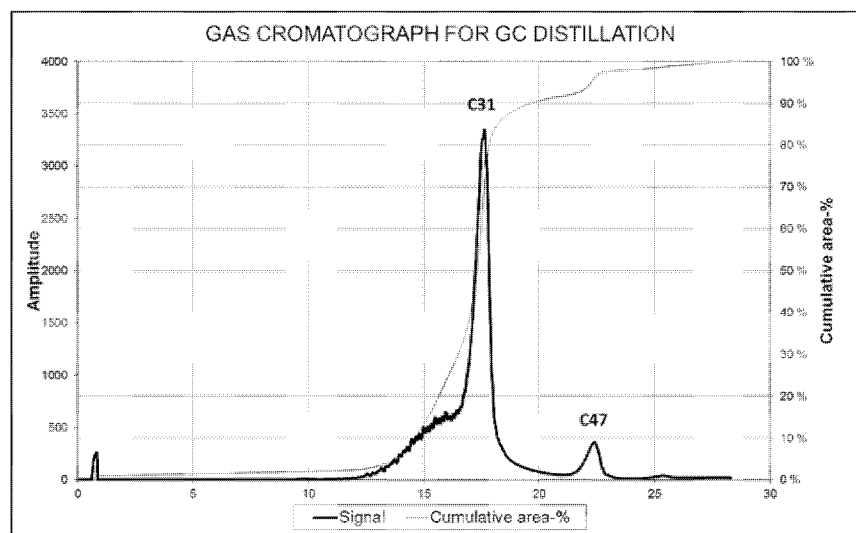

(57) **Abstract:** Method for converting carboxylic acids and esters into base oil hydrocarbons A number of different branched hydrocarbon compounds (formula I) having a star-like configuration (S) are prepared from renewable oils containing fatty acids or derivatives containing fatty acids. The branched hydrocarbon compounds may be isolated individually or in mixtures, and may be used as part of base oils, in particular renewable base oils (RBOs). The process for preparing the branched hydrocarbon compounds of formula (I) involve conditions that favour a trimerisation reaction followed by hydrotreating conditions. The compounds of formula (I) may be made by catalytically treating renewable material in a process, and the compounds have desirable qualities relating to lubrication, cold flow as well as having a low Noack volatility.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

Method for converting carboxylic acids and esters into base oil hydrocarbons

Technical Field

5

The present invention relates to the field of renewable base oils (RBO), in particular novel base oil compounds displaying superior lubrication properties, and their intermediates, base oil mixtures comprising superior lubrication properties and processes for base oil production from a renewable feed, base oil
10 compositions obtainable therefrom, and uses of the renewable base oil compositions of the present invention for improving the lubricating properties of base oil.

Background Art

15

Fluid film lubrication is important in order to reduce friction between surfaces in proximity and moving relative to each other. Without lubrication or with insufficient lubrication such friction will lead to increased heat and wear.

20 Base oils are used to manufacture products including lubricants, motor oil and metal processing fluids. One of the most important factors in the base oil is the viscosity at various temperatures.

Synthetic oil base stocks such as the poly-alpha-olefins may be prepared by
25 polymerising alpha-olefins, such as shown in figure 1 with 1-decene

With reference to figure 1, poly-alpha olefins may – depending on the reaction conditions – result in linear hydrocarbons (L), highly branched hydrocarbons (HB) or the highly coveted star-shaped (S) configuration. The star-shaped orientation
30 cannot be obtained from regular isomerisation reactions of linear hydrocarbons, which typically results in short methyl branches. It displays superior lubrication properties, such as high viscosity index compared to the highly branched or linear molecules, and is also for that reason desirable as a base oil.

WO 2013/113976 A1 (to Neste Oil Oyj) discloses a method for producing base oil components by reacting a feed containing fatty acids and derivatives thereof with a dual catalyst system, such as NiMo and K_2O/TiO_2 on a support under hydrogen pressure. The reactions involve a ketonisation reaction that dimerises fatty acids that is subsequently hydrodeoxygenated into linear hydrocarbons. This dimerization reaction produces linear (L) base oils (see for example claim 2 of WO 2013/113976 A1).

WO 2014/099371 A2 (to ExxonMobil Research and Engineering Company) discloses a process for making saturated hydrocarbons from renewable feeds in which an acidic catalyst dimerises two unsaturated fatty acids on a triglyceride backbone through double bond dimerization followed by hydrotreatment. Using the double bonds of the fatty acids to dimerise triglycerides result in highly branched (HB) hydrogenated dimers, such as $i-C_{34}H_{70}$ (see for example figure 1 of WO 2014/099371 A2).


WO 2014/099373 A1 (to ExxonMobil Research and Engineering Company) discloses a process for making lube base stocks from renewable feeds. Figure 3 of WO 2014/099373 A1 discloses a ketonisation between a triglyceride and citric acid followed by hydrotreatment. This result in a poly-alpha-olefin (PAO) like structure with star-shaped (S) orientation. Here the PAO like structure is obtained by using a citric acid scaffold to guide the ketonisation reactions between two carboxylic acids in order to obtain a star-shaped (S) configuration. Figures 3 and 7 of WO 2014/099373 contain errors in the structures; no enabling disclosures of those structures are disclosed. In particular the star shaped molecules according to the present invention cannot and have not been made in WO 2014/099373.

In view of the prior art cited above there is a further need for renewable base oil components with good lubrication properties and processes to prepare such renewable base oils. In particular there is a further need for renewable base oil components similar to the poly-alpha-olefin (PAO) type with star-shaped orientation, which displays superior lubrication properties, as well as other beneficial properties.

Summary of Invention

The present invention was made in view of the prior art described above, and the object of the present invention is to provide novel base oil compounds with star-shaped orientations, in particular processes for obtaining base oil mixtures having good lubricity properties, such as a high viscosity index, including base oil compounds with a star-shaped orientations.

To solve the problem, the present invention provides compounds of the formula I,



10

where n , m and p are independently of each other an integer value between 9 and 41, such as an odd numbered integer value, and where the total carbon number of formula I is between 31 and 65. The selection of n , m and p of formula I may be subject to one or more provisos, such that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.

15

In particular n , m and p may independently of each other be an odd numbered integer value between 9 and 41, where the total carbon number of formula I is between 31 and 65, with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.


20

The selection of n , m and p of formula I may be where n is 13 or 15; m and p are independently of each other either 15 or 17.

25

That is, the inventors of the present invention in a first aspect of the invention found that these novel compounds with a star orientation having good lubricity properties, such as a high viscosity index, may be formed from one or more trimerisation reactions, such as by one reaction scheme where two fatty acids react under ketonisation conditions leading to a ketone and a condensation reaction, where one of the alpha-carbon atoms of the ketone reacts with a fatty acid to form intermediate compounds of the formula II,

30

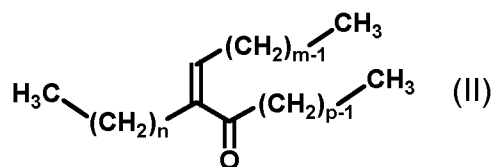

where n , m and p are independently of each other an integer value between 9 and 41, and where the total carbon number of formula II is between 31 and 65.

The selection of n , m and p of formula II may be where n is 13 or 15; m and p are independently of each other either 15 or 17.


Formula II may undergo hydrogenation reactions, such as double bond hydrogenation and hydrodeoxygenation to yield formula I.

The fatty acids used to prepare compounds of formula I or II may for example be C_{16} fatty acids, C_{18} fatty acids or mixtures thereof. Compounds of formula II, where n is 13; m and p are both 15 may be prepared exclusively from C_{16} fatty acids, and compounds of formula I, where n is 13; m and p are both 15 may be prepared exclusively from C_{16} fatty acids.

The compounds of formula I may be isomerised to produce isomerised star-shaped compounds obtainable by subjecting one or more compounds of formula I to an isomerisation step. The isomerised star-shaped compounds obtained from a process of isomerising star-shaped compounds may comprise one or more methyl branches, such as between 1 to 5 methyl branches. It is advantageous to provide isomerisation conditions that avoid or reduce cracking to the extent that one of the three branches forming the star polymer is lost or reduced to a methyl, ethyl or propyl branch.

Compounds of formula I may be present in a base oil mixture comprising one or more compound(s) of formula I, wherein n , m and p are independently of each

other an integer value, such as an odd numbered integer value, between 9 and 41, and where the total carbon number of formula I is between 31 and 65.



The base oil mixture may comprise one or more compound(s) of formula I, wherein n is 13 or 15; m and p are independently of each other either 15 or 17.

The base oil mixture may comprise a compound of formula I, wherein n is 13; m and p are both 15.


The base oil mixture may have a boiling point of 380 °C or more, such as 450 °C or more.

The base oil mixture may comprise at least 2 %, such as at least 5 %, such as at least 10 % or more of the one or more compound(s) of formula I.

15

The base oils may be produced by a process for base oil production, comprising **a**) trimerising a feed comprising at least one fatty acid to provide a trimerisation product where a mixture of fatty acid trimers is obtained; and **b**) hydrotreating at least a portion of the trimerisation product to provide a base oil product; where the hydrotreated base oil product comprises one or more compound(s) of formula I, wherein n , m and p are independently of each other an integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65;

20



The process may be characterised in the hydrotreated base oil product having a pour point lower than 5 °C.

25

The process may be characterised in that carbon atoms of one or more compound(s) of formula I exclusively come from monocarboxylic fatty acids.

The process may be further characterised in that the trimerisation is carried out until 99.5 % of the at least one fatty acids have been converted.

5 The process may be further characterised in that the trimerisation is carried out at a conversion level of at least 99.5 % of the at least one fatty acid of the feed.

The process may be further characterised in that the trimerisation is carried out until at least 5 % trimer product has been formed.

10 The process may be further characterised in that where the base oil comprises at least partly the trimerisation product of formula I.

The process may be further characterised in that it either does or does not include a step for isomerising the trimerisation product.

15

The process may further under step **a)** comprise contacting the at least one fatty acid with a trimerisation catalyst in in a trimerisation zone under trimerisation conditions to provide the mixture of fatty acid trimers; and step **b)** comprises contacting the mixture of fatty acid trimers with a hydrotreating catalyst in the presence of hydrogen gas in a hydrotreating zone under hydrotreating conditions to provide the base oil product.

20

The trimerisation conditions may comprise a temperature in the range from 300 to 400 °C, a pressure in the range from 5 to 100 barg and a WHSV in the range from 0.1 - 5 h⁻¹, and the trimerisation catalyst comprises a metal oxide catalyst.

25

The trimerisation catalyst may comprise a catalyst selected from one or more of the list consisting of: Ti, Mn, Mg, Ca containing metal oxide catalyst; preferably the trimerisation catalyst is a Ti containing metal oxide catalyst. For example, the trimerisation catalyst may comprise TiO₂ and one or more alkali metal oxides, preferably where the one or more alkali metal oxides are selected from one or more of the list consisting of: Li, Na, K containing metal oxide(s).

30

Trimerising under step **a)** of the process may comprise the formation of a ketone from a reaction between two fatty acids followed by a condensation reaction between the ketone and another fatty acid to produce an alpha-substituted and alpha-unsaturated ketone.

5

In the process, the at least one fatty acid may be selected from a C₉ to C₂₂ fatty acid.

10

In the process, the feed comprising at least one fatty acid may be selected from one or more of the list consisting of: palm oil, canola oil, rapeseed oil, olive oil, sunflower oil, beef fat, lard, coconut oil, corn oil, soybean oil, jatropha oil, tall oil, crude tall oil, tall oil pitch, tall oil fatty acids, tall oil heads.

15

In the process, the feed comprising at least one fatty acid may be diluted with a stream of hydrocarbons, or where the trimerisation product is diluted with a stream of hydrocarbons. The stream of hydrocarbons may be recycled product of the process, for example the ratio of feed comprising at least one fatty acid to recycled product of the process is between 1:9 and 9:1. The feed comprising at least one fatty acid may also be diluted with a stream of product withdrawn from the process, for example withdrawn from the trimerisation zone or from the hydrotreatment zone.

20

In the trimerisation zone a gas feed may be present, where the gas may be a selected from the list consisting of: nitrogen, carbon dioxide, water vapour, methane and/or hydrogen; such as nitrogen, carbon dioxide or hydrogen, preferably hydrogen.

25

In the process, the trimerisation product may be isolated in a fraction having a boiling point of more than 380 °C, such as more than 450 °C. The process may further comprise a step **c)** isomerising the hydrotreated base oil product. A base oil composition is obtainable according to the process described.

30

A base oil composition as described herein may be used for improving the lubricating properties of base oil.

Brief Description of Drawings

Figure 1 shows examples of poly-alpha-olefins from 1-decene

Figure 2 shows an exemplary reaction scheme for producing a trimer.

5

Figure 3 shows trimerised palmitic acid, a saturated C₁₆ fatty acid.

Figure 4 shows trimerised palm fatty acid distillate (PFAD), a mixture comprising saturated C₁₆ and C₁₈ fatty acids.

10

Figure 5 shows trimers as a function of fatty acid conversion. It can be seen that the higher the conversion of the palmitic acid feed (C₁₆FA), the more the trimer content increases.

Figure 6 shows an expanded view of figure 5, where it can be seen that for each of the individual reaction conditions, the trimer content of the product increases with increasing fatty acid conversion, and that more than 5 wt% trimers may be formed when it is ensured that the fatty acid conversion is 99.5 % or higher.

Figure 7 shows a fraction of trimerised palmitic acid that boils above 450 °C, where it can be seen that the major product is a C₄₇ paraffinic product, which has been identified by analysis to be a compound of formula I.

Figure 8 shows a fraction of trimerised palmitic acid that boils between 380 and 450 °C, where it can be seen that the major product is a C₃₁ paraffinic product, which has been identified by analysis to be a product arising from dimerization of the fatty acids by ketonisation.

Figure 9 shows the effect of the amount in % of trimerised product (x-axis) on the improvement of the viscosity index (y-axis)

35

Detailed description of the Invention

In describing the embodiments of the invention specific terminology will be resorted to for the sake of clarity. However, the invention is not intended to be limited to the specific terms so selected, and it is understood that each specific term includes all technical equivalents which operate in a similar manner to accomplish a similar purpose.

While the benefits of the invention have in some instances been described with reference to engine oil for simplification of the discussion, the benefits of the invention are not limited to engine oils.

Base oils for passenger car engines may consist of e.g. 85-90 % base oil and 10-15 % of a performance enhancing additive package. Since the base oil is typically the largest component in passenger car engines, it has a dramatic effect on the performance of the fluid. The base oil affects many parameters such as the viscosity, oxidation stability, volatility, viscosity index, as well as cold flow properties such as pour point and/or cloud point.

Performance enhancing additive packages may include different additives, such as for example friction modifiers, viscosity modifiers and pour point depressants.

The American Petroleum Institute (API) divides base oils into five main groups. Groups I-III are petroleum base oil of varying qualities.

25

Table 1 – API base stock categories

Group	Sulfur, wt-%		Saturates, %	Viscosity Index (VI)
I	> 0.03	and/or	< 90	80 – 119
II	≤ 0.03	and	≥ 90	80 – 119
III	≤ 0.03	and	≥ 90	≥ 120
IV	Synthetic poly-alpha-olefins (PAOs)			
V	Any other type of base oil than group I-IV			

The API defines the differences between Group II and III only in terms of the viscosity index (VI), and the Group III base oils are also called very high viscosity base oils (VHVI). However, also cold flow properties as well as Noack volatility number are important characteristics of base oils.

5

Oil volatility is commonly measured using the Noack volatility test (for example ASTM D5800 or CECL-40-93-B). Prior to the Noack test a lubricant's flash point was used to approximate the oil's volatility. In the Noack test, an oil sample is weighed and heated to 250 °C for one hour (250 °C is intended to simulate upper engine temperatures). Dry air is passed over the sample, carrying the oil vapours that have boiled off and depositing them in a beaker. The original sample is removed and re-weighed. Any reduction in weight is reported as a percentage lost of the original weight. The Noack volatility limit in % weight loss (g/100g) as measured using ASTM D5800 has to meet standards. The API SN performance classification for example require weight loss due to volatility to be no greater than 15 % for all viscosity grades of motor oil. The lower the Noack number the better, as it is a measure of evaporation of the light-weight molecules in the oil evaporating more readily when exposed to high temperatures, which will reduce the oil level. Low Noack number oils, which resist volatility better can reduce oil consumption and thereby maximise engine performance, when used as engine oil. Most conventional passenger car engine oils of 2016 will typically have Noack numbers of >13% while synthetic passenger car engine oils might be about 9-11%. Full synthetic heavy duty oil can have Noack numbers down to 8-9%.

25 For base oils, typically it is observed that the higher the boiling range temperature, the higher the viscosity, and the lower the oil volatility. Conversely, it is typically also observed that a lower viscosity is connected to a higher oil volatility.

The higher the oil volatility, the more engine oil evaporates and in turn the heavier the oil becomes. Heavier, more viscous oils circulate poorly, which affects fuel economy, oil consumptions and emissions.

30

Low temperature cranking is measured by the Cold Crank Simulator (CCS) at low temperature, such as for example -30 °C and the value is given in centipoise (cP),

which is the same as millipascal-second (mPa*s). It is a test that simulates the action of a starter motor on an engine. The test is important because it is related to the resistance that the battery and starter motor experience when producing an adequate cranking speed at low temperatures, when for example starting an engine during winter time.


The SAE low temperature viscosity requirements relating to cranking specifies that for the 0W SAE viscosity grade, the maximum allowed cranking is 3250 cP at -30 °C (the lower the value the better).

A number of different branched hydrocarbon compounds (formula I) having a star-shaped configuration (S) are prepared from renewable oils containing fatty acids or derivatives containing fatty acids. The branched hydrocarbon compounds may be isolated individually or in mixtures, and may be used as part of base oils, in particular renewable base oils (RBOs). The process for preparing the branched hydrocarbon compounds of formula I involve conditions that favour a trimerisation reaction followed by hydrotreating conditions. The compounds of formula I may be made by catalytically treating renewable material containing fatty acids in some form (e.g. free fatty acids or fatty acid containing derivatives, such as triglycerides or other esters) in a process, and the compounds have desirable qualities relating to lubrication, cold flow as well as having a low Noack volatility.

Base oil compounds

Novel base oil compounds of the poly-alpha-olefin type (PAOs) with star-shaped configuration (S) have been manufactured. The compounds of formula I may be isolated individually or in mixtures. The novel base oil compounds may be prepared from renewable feed material containing fatty acids, and as such the novel base oil compounds may be considered as renewable base oil compounds. The base oil compounds of the poly-alpha-olefin type (PAOs) with star-shaped configuration (S) manufactured according to the processes of the present invention result in one or more properties selected from good lubricity properties, such as a high viscosity index, good cold flow properties, such as low cloud point and or pour point, and low Noack volatility.

The base oil compounds have a structure of the compounds of formula I:



The compound of Markush formula I is a hydrocarbon, and in formula I, n , m and p may independently of each other be an integer value of 7 or higher, such as between 7 and 41. For example the integer values for n , m and p may be between 9 and 41 in order to emphasise the branching being of a star-shaped configuration (S) compared to *e.g.* a highly branched (HB) compound or a linear (L) compound (see figure 1), as well as linear compound that has been isomerised, which predominantly generates methyl branches. The compounds of the present invention may be obtained from trimerisation reactions of fatty acid containing material, and the integer values for n , m and p may independently of each other be 25 or lower to focus more on the length of fatty acids often encountered in renewable oils. For example the integer values for n , m and p may be between 7 and 41, for example between 7 and 25, for example between 9 and 41, for example between 9 and 25.

The total carbon number of formula I is 26 or above. In mineral oil refining it is usually the fraction containing compounds with 26 to 40 carbon atoms that is used for the creation of lubricating oils. The heaviest and largest of the hydrocarbons having carbon numbers over 40 are taken and usually used in asphalt-based products. The compounds of formula I may have at least 40 carbon atoms, for example more than 40 carbon atoms, such as 45 carbon atoms or more, for example 47 carbon atoms or more. For example a compound of formula I having 47, 53 or even 65 carbon atoms may be prepared using the process described herein starting from a C₁₆-, a C₁₈- or a C₂₂- fatty acid, respectively. The upper limit for the carbon numbers of formula I is not precisely defined. The upper limit for the carbon numbers may be 65, which would correspond to the trimer of Erucic acid (C₂₂-fatty acid), which may be found in a number of renewable oils, such as rapeseed oil, in particular in high erucic rapeseed oil.

The total carbon number of formula I may be 31 or above, which corresponds to trimer compounds obtained from e.g. mixtures of lauric, decanoic and caprylic acid (C₁₂, C₁₀ and C₈-fatty acids), which may be found in a number of renewable oils, such as coconut oil, which typically contains a high amount of lauric acid.

5

For example the total carbon number of formula I may for example be between 31 and 65.

The compounds of Markush formula I may advantageously be obtained from renewable oils containing fatty acids, esters or triglycerides thereof. By renewable oils are considered oils collected from resources, which are naturally replenished on a human time scale, as opposed to fossil oils. Most fatty acids of plant or animal origin are straight-chain compounds, which most frequently contain an even number of carbon atoms, and usually no or only trace amounts of odd-numbered fatty acids. In respect to the compounds of formula I, should they be manufactured from fatty acids obtained from renewable oils having fatty acids with an even number of carbon atoms, the integer values for n , m and p would be odd numbered integer values. For example 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41; such as for example 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41; for example 9, 11, 13, 15, 17, 19, 21, 23, 25.

10
15
20

The selection of n , m and p of formula I may be subject to one or more provisos, for example one or more of the below mentioned provisos in combination with the integer values for n , m and p being odd numbered integer values as described above.

25

The one or more provisos may be selected from 1, 2 or 3 of the following provisos.

- with the proviso that when n and m are both 7, then p is not 9;
- with the proviso that when n and m are both 9, then p is not 9 or 11,
- with the proviso that n , m and p are not all 11.

30

Further provisos may be selected to focus more clearly on the compounds of formula I made according to the process of the present invention and using renewable oils described herein.

For example n , m and p may independently of each other be an odd numbered integer value between 7 and 41, where the total carbon number of formula I is between 26 and 65, with the proviso that when n and m are both 7, then p is not 9;
5 with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.

For example n , m and p may independently of each other be an odd numbered integer value between 9 and 41, where the total carbon number of formula I is
10 between 31 and 65, with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.

For example n , m and p may independently of each other be an odd numbered integer value between 7 and 25, where the total carbon number of formula I is
15 between 31 and 65, with the proviso that when n and m are both 7, then p is not 9; with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.

The selection of n , m and p of formula I may be where n is 13 or 15; m and p are
20 independently of each other either 15 or 17. These compounds of formula I may for example be obtained by trimerising a mixture containing C₁₆- and C₁₈-fatty acids using the processes of the present invention, see compounds 1-6 of table 2, below.

25 A compound of formula I may also be where n is 13; m and p are both 15. This compound may be prepared exclusively from C₁₆ fatty acids (see compound 1 of table 2, below).

In the same manner, a compound of formula I may also be where n is 15; m and p
30 are both 17. This compound may be prepared exclusively from C₁₈ fatty acids (see compound 2 of table 2, below).

The following specific compounds in table 2 may for example be prepared according to the invention. Reference is also made to figure 4 which shows a peak of trimerised product containing C₄₇-C₅₃ carbon products.

Table 2 – compounds of formula I


Compound	<i>n</i>	<i>m</i>	<i>p</i>	may be prepared from
1	13	15	15	C ₁₆ -fatty acids
2	15	17	17	C ₁₈ -fatty acids
3	13	17	17	mixture of C ₁₆ - and C ₁₈ -fatty acids
4	15	15	17	mixture of C ₁₆ - and C ₁₈ -fatty acids
5	13	15	17	mixture of C ₁₆ - and C ₁₈ -fatty acids
6	15	15	15	mixture of C ₁₆ - and C ₁₈ -fatty acids

5

The novel compounds described above with a star-shaped orientation has good lubricity properties, including a high viscosity index. Additionally, it was found that novel intermediate compounds of formula II could be prepared.

10 The intermediate compounds of formula II and in turn the compounds of formula I may be formed from one or more trimerisation reactions (see figure 2).

For example Formula II may be prepared by one such trimerisation reaction scheme where two fatty acids react in at least two steps to form a compound of
 15 formula II. One such sequence of the two steps may involve reacting two fatty acids under ketonisation conditions leading to a ketone and a condensation reaction, where one of the alpha-carbon atoms of the ketone reacts with a fatty acid to form intermediate compounds of the formula II,

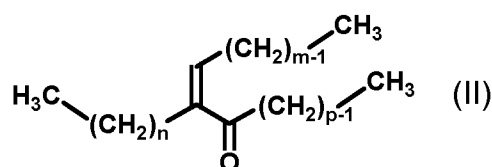

20

where n , m and p are independently of each other an integer value of 7 or higher, such as between 7 and 41, e.g. between 9 and 41 or 9 and 25, and where the total carbon number of formula II is 26 or above, for example 31 or above, such as between 31 and 65.

5

For example intermediate compounds of formula II may be where n , m and p are independently of each other an integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65.

10 In addition to the specifically mentioned n , m and p values for formula II, the n , m and p of formula II may also be selected as described for formula I.

The selection of n , m and p of formula II may be where n is 13 or 15; m and p are independently of each other either 15 or 17.

15

Table 3 – compounds of formula II

Compound	n	m	p	may be prepared from
7	13	15	15	C ₁₆ -fatty acids
8	15	17	17	C ₁₈ -fatty acids
9	15	15	17	mixture of C ₁₆ - and C ₁₈ -fatty acids
10	13	17	17	mixture of C ₁₆ - and C ₁₈ -fatty acids
11	15	17	15	mixture of C ₁₆ - and C ₁₈ -fatty acids
12	17	13	15	mixture of C ₁₆ - and C ₁₈ -fatty acids
13	15	15	15	mixture of C ₁₆ - and C ₁₈ -fatty acids
14	13	15	17	mixture of C ₁₆ - and C ₁₈ -fatty acids

Intermediate compound of formula II may undergo hydrotreatment in the form of hydrogenation reactions, such as double bond hydrogenation and hydrodeoxygenation to yield a compound of formula I.

20

The fatty acids used to prepare compounds of formula I or II may for example be C₁₆ fatty acids, C₁₈ fatty acids or mixtures thereof, or mixtures containing either C₁₆

fatty acids, C₁₈ fatty acids or both. Compound of formula II, where n is 13; m and p are both 15 may be prepared exclusively from C₁₆ fatty acids, and compounds of formula I, where n is 13; m and p are both 15 may be prepared exclusively from C₁₆ fatty acids (see compound 7 of table 3).

5

In the same manner, a compound of formula II may also be where n is 15; m and p are both 17. This compound may be prepared exclusively from C₁₈ fatty acids (see compound 8 of table 3).

10 The compounds of formula I may be isomerised to produce isomerised star-shaped compounds obtainable by subjecting one or more compounds of formula I to an isomerisation step. In the process for obtaining isomerised star-shaped compounds comprising between 1 to 5 methyl branches, less severe conditions during the isomerisation step, such as lower temperatures during the isomerisation
15 step and/or less acidic catalyst material, may be employed in order avoid or reduce the amount of cracking, which may include cracking of the branches that give the compounds of formula I the star-shaped configuration (S). Reference is made to example 3 and table 6 showing an exemplary isomerisation catalyst and exemplary isomerisation conditions.

20

As shown in figures 5 and 6, at least 2 wt% trimers are formed when it is ensured that the fatty acid conversion is 99.5% or higher, and as described for figure 6 that more than 5 wt% trimers may be formed when it is ensured that the fatty acid conversion is 99.5 % or higher. Accordingly, the feed to the isomerisation step may
25 comprise at least 2 wt%, preferably at least 5 wt% of one or more compounds of formula I.


The feed to the isomerisation step may comprise at least 80 wt% hydrocarbons, for example it may consist essentially of hydrocarbons.

30

The compounds of formula I may be separated from other components, e.g. by fractionation to provide a higher concentration of the compounds of formula I to the isomerisation step. For example feed may consist of at least 80 wt% hydrocarbons and comprise at least 15 wt%, at least 20 wt%, at least 32 wt%, such as at least

50 wt% or even at least 80 wt% of the compounds of formula I, such as one or more compounds of formula I wherein n , m and p are independently of each other an odd numbered integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65, with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.

The isomerised star-shaped compounds may comprise at least one methyl branch, such as at least two, or at least three methyl branches, for example between one to five methyl branches. It is advantageous to provide isomerisation conditions that avoid or reduce cracking as described above. Ethyl or higher branches may also be present. Below is an illustration of how an isomerised star-shaped compound could look like, when a compound of formula I has undergone isomerisation to generate four methyl branches. The branches are typically located in close proximity to the end of the carbon chains of the star-shaped compounds.

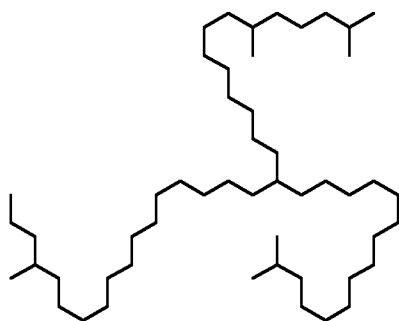

15

Base oil mixtures

One or more compounds of formula I, and/or isomerised star-shaped compounds of formula I as described above may be present in a base oil mixture.

20 The values for n , m and p may independently of each other be an integer value between 7 and 41 and the total carbon number of formula I may be between 31 and 65, or between 40 and 65, e.g. between 45 and 65, such as between 47 and 65. The values and ranges for carbon numbers as well as the n , m and p may be selected as described above for formula I.

25

For example the base oil mixture may comprise one or more compound(s) of formula I, wherein n , m and p are as described above for formula I. For example independently of each other an integer value, such as an odd numbered integer


The base oil mixture may have a boiling point of 350 °C or more, such as 380 °C or more, such as 400 °C or more, such as 450 °C or more, such as 460 °C or more, for example 470 °C or more. The boiling point may be up to 730 °C, for example up to 650 °C, for example up to 620 °C, for example up to 600 °C, for example up to 550 °C. For example the boiling point range of 380 °C to 730 °C was found in table 8 of example 4 to comprise a base oil mixture containing compounds of formula I, for example the boiling point range above 380 °C, such as 380 °C to 730 °C, and the boiling point range of 380 °C to 620 °C or to 550 °C, in particular the boiling point range above 450 °C, such as 470 °C to 730 °C, and the boiling point range of 460 °C to 620 °C or to 550 °C.

The initial boiling point (IBP/SP) and the final boiling point (FBP/EP) may be determined by distillation or by simulated distillation (Sim Dist) based on either ASTM D6352 or D2887). The range of boiling points may be calculated as between the initial boiling point (IBP/SP) and the final boiling point (FBP/EP) or between the initial boiling point (IBP/SP) and the 95% evaporation boiling point.

The base oil mixture may comprise at least 2 %, for example at least 5 %, such as at least 10 % or more of the one or more compound(s) of formula I, measured as area-% using GC.

Processes for base oil production

The base oils may be produced by a process for base oil production, comprising **a)** trimerising a feed comprising at least one fatty acid to provide a trimerisation product where a mixture of fatty acid trimers is obtained; and **b)** hydrotreating at least a portion of the trimerisation product to provide a base oil product; where the hydrotreated base oil product comprises one or more compound(s) of formula I, wherein n , m and p are independently of each other an integer value between 5 and 41, and where the total carbon number of formula I is between 19 and 65;



The process for base oil production involves one or more trimerisations reactions followed by a hydrotreatment step. The process produces a base oil, such as a base oil mixtures described herein, *e.g.* under the heading “*base oil mixtures*”. The base oil produced according to the processes of the present invention may have
5 very little oxygenates and saturates as a result of the hydrotreatment step. The amounts of oxygenates and saturates are described herein, *e.g.* under the heading “*base oil mixtures*”. The process for base oil production may involve a step of providing a distillate in the base oil boiling point range, for example providing a distillate with a boiling point of 380 °C or above, for example as
10 described above under the heading “*base oil mixtures*”.

The process involves a step of trimerising a feed comprising at least one fatty acid. Figure 2 shows an exemplary scheme for producing a trimer through trimerising a feed comprising at least one fatty acid, where the fatty acid is palmitic acid
15 (C16:0). Without wishing to be bound by any theory, the inventors have found that the trimerising of the feed may occur through several possible reactions, where one example is given in figure 2. It has been found that starting from palmitic acid as the model feed, a ketone product may be obtained through a ketonisation reaction. Further it was found that under the trimerisation reaction, aldehydes were
20 present in the processed feed. The aldehyde and dimerised ketone may react to form an aldol condensation product of formula II – a trimerisation product. Other mechanisms for obtaining an intermediate product of formula II are possible, such as for example an aldol condensation reaction followed by a ketonisation reaction. The trimerisation product may comprise one or more compound(s) of formula II,
25 where n , m and p are independently of each other an integer value between 5 and 41, and where the total carbon number of formula II is between 25 and 65, or where n , m and p and the total carbon number have been selected as described above under the headings “*base oil compounds*” or “*base oil mixtures*”.

30 The process uses a feed comprising at least one fatty acid. The at least one fatty acid may be selected from a C₆ or higher fatty acid, such as C₇ or higher, *e.g.* C₈ or higher, such as C₉ or higher. It may for example be a C₃₀ or lower fatty acid, such as C₂₆ or lower fatty acid or C₂₂ or lower fatty acid, for example the one or more fatty acid may have fatty acid(s) between a C₇ to C₂₂ fatty acid. The at least

one fatty acid includes mixtures of fatty acids with different carbon numbers, and it also includes fatty acids as fatty acid derivatives having a carboxylic acid moiety, such as fatty acid esters or triglycerides of fatty acids. The at least one fatty acid do not have to be linear, and may be branched or include ring structures. It is preferred that the at least one fatty acid comprises a fraction of linear/unbranched fatty acids, as such structures will more readily react to provide compounds for formula I. Most of the fatty acids contained in renewable oils comprise linear/unbranched fatty acids, typically as free fatty acids or as triglycerides of fatty acids, and also as free fatty acids. Renewable oils are oils that are replenished on a human timescale, as opposed to fossil oils. As mentioned, the feed may comprise at least one fatty acid. Renewable oils may be plant derived oils or fats, animal oils or fats, and fish oil and fats or waste oil or fats. For example the feed may be selected from one or more of the list consisting of: palm oil, canola oil, rapeseed oil, olive oil, sunflower oil, beef fat, lard, coconut oil, corn oil, soybean oil, jatropha oil, tall oil, crude tall oil, tall oil pitch, tall oil heads, tall oil fatty acids or different fractions thereof, such as palm oil fatty acid distillate (PFAD) or waste oils, such as used cooking oil. The feed may comprise any fatty acid containing fraction of tall oil, and the term fatty acid also include e.g. resin acids of tall oil, which may have branchings and ring structures. Free fatty acid containing feeds are specifically suitable when the process includes the reaction between two free fatty acids.

In the case of feeds containing unsaturated fatty acids, a pre-hydrogenation step may be used prior to the trimerisation step to saturate any unsaturations, such as unsaturated fatty acids. Performing the trimerisation reactions with saturated feeds may avoid or at least significantly reduce the double bond isomerisation reactions that will form highly branched (HB) products, as shown in figure 1.


The trimerisation product obtained from the trimerisation step may comprise an intermediate product with the formula II as described above under the heading "*Base oil compounds*". It may be present together with other fatty acid trimers in a mixture of fatty acid trimers.

The trimerisation product may be isolated, or it may undergo other reactions in addition to the trimerisation reactions.

5 The process involves hydrotreating at least a portion of the trimerisation product to obtain a base oil product. The hydrotreatment is a catalytic hydrogenation reaction, wherein the trimerisation product is contacted with a hydrotreating catalyst and hydrogen. This results in a number of hydrogenation reactions, including double bond hydrogenation and hydrodeoxygenation reactions to produce a hydrotreated hydrocarbon base oil product.

10

The hydrotreated base oil product comprises one or more compound(s) of formula I, where n , m and p are independently of each other an integer value between 5 and 41, and where the total carbon number of formula I is between 25 and 65, or where n , m and p and the total carbon number have been selected as
15 described above under the headings “base oil compounds” or “base oil mixtures”.



The process may be characterised in that the hydrotreated base oil product having a pour point lower than 5 °C. The process may be further characterised in that the base oil comprises at least partly the trimerisation product of formula I. That is,
20 when the trimerisation reaction followed by the hydrotreatment reaction is conducted it will prepare base oil mixtures comprising the star-shaped compounds of formula I, which improves the pour point of a hydrocarbon mixture, such as the base oil mixture obtained. The pour point is improved, e.g. with reference to linear hydrocarbons (L), which may be obtained through ketonisation reaction only.

25

The process may further comprise a step involving isomerising the hydrotreated base oil product. The pour point obtained prior to subjecting the base oil mixture to an optional isomerisation step, (which isomerisation step may or may not be present in the process), is 5 °C or lower, such as 0 °C or lower, for example -5 °C
30 or lower. The isomerisation step further improves the pour point of the

hydrotreated base oil product to $-10\text{ }^{\circ}\text{C}$ or lower, such as $-20\text{ }^{\circ}\text{C}$ or lower, for example $-30\text{ }^{\circ}\text{C}$ or lower, depending on the severity of the isomerisation step.

5 Isomerised star-shaped compounds may also be obtained in a combined hydrotreatment and isomerisation step using a suitable catalyst and suitable conditions, for example using a NiW catalyst, for example NiW on a support, such as alumina or NiW/zeolite on a support, *e.g.* alumina. That is, the process may involve a trimerisation step followed by a combined hydrotreatment and isomerisation step, wherein both hydrotreatment and isomerisation reactions
10 occur.

The process may be characterised in that carbon atoms of one or more compound(s) of formula I exclusively come from monocarboxylic fatty acids. The monocarboxylic fatty acids may be in the form of free fatty acids or fatty acid
15 derivatives containing the carboxylic acid moiety, such as fatty acid esters, *e.g.* triglycerides.

The process may be further characterised in that the trimerisation is carried out until 99.5 % of the at least one fatty acids have been converted. For example the
20 process may be further characterised in that the trimerisation is carried out at a conversion level of at least 99.5 % of the at least one fatty acid of the feed, *i.e.* the conversion level is maintained at a high level, such as 99.6 %, even 99.8 % or 99.9 % of the at least one fatty acids have been converted, measured as area-% using GC. During ketonisation reactions of the prior art, where fatty acids are
25 dimerised and hydrodeoxygenated into linear hydrocarbon base oils (L), such ketonisation steps are usually run at a conversion rate of around 97% or less, as it is considered more efficient. It is not necessary to fully convert the fatty acids into a ketonisation product because the remaining fatty acids will be hydrotreated into n-paraffins and can be fractionated and used *e.g.* as a diesel product.
30 Furthermore, it requires that for a given feed ketonisation parameters are modified so as to give a higher conversion rate.

The conversion may for example be manipulated to be at a level of 99.5% or higher in a continuous fixed bed reactor by manipulating in particular the

temperature and the feed flow rate (WHSV), and to some extent also the pressure. In general the reaction temperature increases the reaction rate. Lower feed rate increases the residence time which typically gives higher conversion. The effect of pressure depends on the reaction chemistry. For example, if gaseous products or products lighter than the feed are formed during the reaction, a lower pressure may in some cases be advantageous so that these light products may be desorbed from catalyst active site to gas phase.

No individual parameter alone (temperature, pressure, WHSV, gas type or gas amount) facilitate the formation of trimerised product significantly, but rather the formation of the trimerised product is the result of the combination of suitable reaction condition parameters. A high conversion level of palmitic acid is required to be maintained, and may be achieved by the reaction condition parameters described herein. Only when the conversion level of over 99.5 % is maintained, does the formation of the trimerised product increase unexpectedly as shown in example 2.

In particular, a higher conversion rate than 97% may require modification of the ketonisation parameters, such as the hydrogen amount, the WHSV, the temperature and the pressure.

It was found by the inventors that providing ketonisation conditions that ensured a conversion rate of the at least one fatty acids to 99.5 % or above resulted in an amount of 2 wt% or more of trimerisation product as evident from figures 5 and 6.

The process may be further characterised in that the trimerisation is carried out until at least 2 wt% trimer product has been formed, such as for example at least 5 wt% trimer product. Adjusting the parameters such as hydrogen amount, WHSV, temperature and pressure allows for the production of between 2 wt% and 20 wt% of trimerised product.

The conversion of the at least one fatty acids, and the formation of 2 wt% or more of trimerised product may be monitored using GC as described in the examples.

The process may further under the trimerising step **a)** comprise contacting the at least one fatty acid with a trimerisation catalyst in a trimerisation zone under trimerisation conditions to provide the mixture of fatty acid trimers; and step **b)** comprises contacting the mixture of fatty acid trimers with a hydrotreating catalyst
5 in the presence of hydrogen gas in a hydrotreating zone under hydrotreating conditions to provide the base oil product.

The trimerising under step **a)** of the process may comprise the formation of a ketone from a reaction between two fatty acids followed by a condensation
10 reaction between the ketone and another fatty acid to produce an alpha-substituted and alpha-unsaturated ketone.

The trimerisation catalyst may comprise a catalyst selected from one or more of the list consisting of: Ti, Mn, Mg, Ca containing metal oxide catalyst; preferably the
15 trimerisation catalyst is a Ti containing metal oxide catalyst. Metal oxides of Ti, Mn, Mg and Ca may be titanium oxide, manganese oxide, magnesium oxide or calcium oxide. This primary metal oxide may be combined with other metal oxides, such as metal oxides of alkali metals, *e.g.* Na, Li, K. When desiring to produce trimerised product the catalyst titanium dioxide together with a metal oxide of an alkali metal
20 is preferred, for example a TiO₂ and K₂O. It is advantageous that the metal oxide has been prepared as a catalyst metal oxide. This may include a specific BET surface area, specific average pore diameters and crystallinity. For example the BET surface area may be above 40 m²/g, such as from 40 to 200 m²/g, for example between 45 and 100 m²/g. The average pore diameter may be from 100
25 to 200 Å. The crystallinity of the metal oxide may for example be between 50 to 100 %.

The trimerisation zone may be a reactor or one or more a catalyst bed(s) in a fixed
30 bed reactor, which may hold the trimerisation catalyst.

If feed comprises triglycerides or other esters of fatty acids, it has been found that a trimerisation catalyst in combination with a certain amount of a hydrotreating catalyst can assist with the breaking of the ester bonds, but at the same time not fully convert the fatty acids to n-paraffins before they can undergo the trimerisation

reaction. The trimerisation catalyst may be mixed with hydrotreating catalysts in the art, for example molybdenum or wolfram catalyst, typically on a support, such as Al_2O_3 , which may or may not be promoted. Typical promoters are Ni and/or Co. Promoted hydrotreating catalysts may for example be NiMo, CoMo, NiW, CoW, NiCoMo. The hydrotreating catalyst may be present in an amount of up to 50 wt% of the total amount of catalysts, for example 25 wt% or less. It can be seen from table 8 that a feed containing 80% titanium dioxide catalyst and 20 % NiMo effectively converted a feed of 30% palm fatty acid distillate (PFAD) and 70% purified palm oil, which contains triglycerides.

10

The trimerisation reaction conditions may comprise a temperature in the range from 300 to 400 °C, a pressure in the range from 5 to 100 barg and a WHSV in the range from 0.1 - 5 h^{-1} , and where the trimerisation catalyst comprises a metal oxide catalyst. Adjusting these parameters within these ranges allows for the production of between 2 wt% and 20 wt% of trimerised product.

15

For example the temperature range may be 340 °C or higher. It may for example be between 300 °C and 370 °C, such as between 340 °C and 365 °C, between 345 °C and 365 °C or between 345 °C and 355 °C.

20

For example the pressure range may be from 5 to 100 barg, such as from 5 to 30 barg. The WHSV may be in the range from 0.1 - 5 h^{-1} , for example between 0.5 – 2.5 h^{-1} , for example between 0.5 – 1.5 h^{-1} .

25

In the trimerisation zone a gas feed may be present, where the gas may be a selected from the list consisting of: nitrogen, carbon dioxide, water vapour, methane or hydrogen, preferably hydrogen. It was found that nitrogen gas addition compared to no gas increased the conversion the fatty acid containing feed. It was also found that changing the nitrogen gas with hydrogen gas further increased the conversion rate of the fatty acid containing feed, and at the same time also increased the trimer formation, see example 2.

30

For example the conversion level in a continuously operated fixed catalyst bed tube reactor may be maintained at above 99.5, such as around 99.7 % by

selecting hydrogen as inlet gas feed in an amount of from 4 to 6 l/h, in a reaction temperature of 340 to 360 °C, at a reaction pressure from 8 to 15 barg and WHSV from 0.5 to 1.2 h⁻¹, while feeding a C₁₆ fatty acid containing feed, such as palmitic acid into the reactor. The amount of trimer product obtained is above 2 wt-%, preferably above 4 wt-%.

The mixture of fatty acid trimers is contacted with a hydrotreating catalyst. The hydrotreating catalyst may be typical hydrotreating catalysts in the art, for example it may comprise a hydrogenation metal on a support, such as for example a catalyst selected from a group consisting of Pd, Pt, Ni, Co, Mo, Ru, Rh, W or any combination of these. The hydrotreatment step is done under hydrotreating conditions to provide the base oil product. The hydrotreatment step may for example be conducted at a temperature of 100 - 500 °C and at a pressure of 10 - 150 barg. Examples of hydrotreatment conditions can be seen in example 3 and table 6. The hydrotreatment step may for example be conducted at a temperature of 250 - 350 °C, at a pressure of between 30 and 80 barg, a WHSV of 0.5 - 2 h⁻¹, and a H₂/oil ratio of 500-1500 nl/l. Further in the process, the feed comprising at least one fatty acid may be diluted with a stream of hydrocarbons. The dilution may also occur once the trimerisation product has been produced, prior to the hydrotreatment step. The dilution may be 30 wt% hydrocarbons and 70 wt% trimerisation product, for example between 30-85 wt% hydrocarbon and 15-70 wt% trimerisation product. The stream of hydrocarbons used for dilution may in part or fully be product recycle.

The stream of hydrocarbons may be recycled product of the process, for example the ratio of feed comprising at least one fatty acid to recycled product of the process may be between 1:9 and 9:1. The product recycle may have undergone fractionation before being recycled, for example it may be the fraction boiling above 380 °C that is recycled, or any other fraction of the base oil mixture described herein. The amount of formula I in the base oil mixture obtained by the processes of the invention may increase when using product recycle as the stream of hydrocarbons used for dilution of the (fresh) feed. For example the product recycle may increase the amount of compound(s) of formula I in the base oil mixture to 5 wt% or more, such as 15 wt% or more, for example up to 32 wt% or

more. When the trimerisation zone comprise more than one catalyst bed, the product recycle may be recycled to either of the catalyst beds, for example the product recycle may be recycled to the first catalyst bed of the trimerisation zone, the last bed of the trimerisation zone, or an intermediary bed of the trimerisation zone.

Any product withdrawn from the process may be recycled in the manner described above, for example the product withdrawn may be recycled to the first catalyst bed of the trimerisation zone, the last bed of the trimerisation zone, or an intermediary bed of the trimerisation zone. For example the ratio of feed comprising at least one fatty acid to any product withdrawn from the process may be between 1:9 and 9:1. For example the product may be withdrawn from the trimerisation zone or from the hydrotreatment zone. When these zones contain catalyst beds product may be withdrawn after the first catalyst bed, after the last bed, or after an intermediary bed of these zones.

The hydrotreatment catalyst may for example be a molybdenum or wolfram catalyst, typically on a support, such as Al_2O_3 . The catalyst may or may not be promoted. Typical promoters are Ni and/or Co. Promoted hydrotreating catalysts may for example be NiMo, CoMo, NiW, CoW, NiCoMo. When a wolfram based catalyst is used, such as NiW catalysts it has the further advantage that it can also catalyse isomerisation reactions. The hydrotreatment is done in the presence of hydrogen gas in a in a hydrotreating zone, which may be a catalyst bed in a fixed bed reactor.

The process may be further characterised in that it either does or does not include a step for isomerising the trimerisation product.

The product of the hydrotreatment step may subjected to an isomerization step in the presence of hydrogen and an isomerization catalyst. Both the hydrotreatment step and isomerisation step may be conducted in the same reactor, and even in the same reactor bed.

The hydroisomerisation reaction may be in the presence of an isomerisation catalyst, such as a catalyst comprising a Group VIII metal, preferably Pt, and a molecular sieve, optionally on support. The support may for example be selected from silica, alumina, clays, titanium oxide, boron oxide, zirconia, which can be used alone or as a mixture, preferably silica and/or alumina. The molecular sieve may for example be zeolites, such as ZSM or aluminophosphate molecular sieves, such as SAPO, such as SAPO-11, MeAPO, MeAPSO, where Me is e.g. Fe, Mg, Mn, Co or Zn, or other elements (EI) molecular sieves EIAPSO or EIAPSO, e.g. silica-alumina, Y zeolite, SAPO-11, SAPO-41, ZSM-22, ferrierite, ZSM-23, ZSM-48, ZSM-30, IZM-1, COK-7. Suitable molecular sieves and characteristics of molecular sieves suitable for hydroisomerisation applications are known to the skilled person and have been described in the literature, such as in Handbook of heterogeneous catalysis from VCH Verlagsgesellschaft mbH with editors Ertl, Knözinger and Weitkamp, volume 4, pages 2036-2037, which is hereby incorporated by reference herein.

The isomerisation catalyst may be a bifunctional catalyst comprising a noble metal such as Pt or Pd, or alternatively a non-noble metal or metal combination, such as NiW together with a molecular sieve. The molecular sieve may be a zeolite with medium (10 ring) or large pore (12 ring) sizes, for example SAPO molecular sieves, ZSM-5, ZSM-11, ZSM-12, ZSM-22, ZSM-23, ZSM-35, zeolite Y, Zeolite beta. The isomerisation catalyst may be a noble metal bifunctional catalyst such as a Pt containing commercial catalyst, for example Pt and a medium and/or large pore size molecular sieve or zeolite; Pd and a medium and/or large pore size molecular sieve or zeolite. For example Pt-SAPO or Pt-ZSM-catalyst or for example a non-noble catalyst, such as NiW alone or together with a molecular sieve as mentioned above, and optionally on a support. For example NiW/Al₂O₃, or NiW/zeolite/Al₂O₃. The hydrotreatment and isomerisation steps may be done in the same catalyst bed using e.g. the NiW catalyst in both the hydrotreatment and isomerisation step. The isomerization step may for example be conducted at a temperature of 200-400 °C and at a pressure of 20-150 barg. As explained elsewhere in this description, it is desirable to reduce the severity of the isomerisation reaction to avoid or reduce the amount of cracking of the star-shaped compounds, in particular cracking of the star-shaped compounds, which

would completely remove the side branch making out part of the star-shape. The cracking side reaction is well-known in hydroisomerisation reactions. Conditions that reduce cracking will depend on the structure of the star-shaped compounds. The skilled person knows how to modify the severity of the isomerisation reaction

5 by adjusting one or more of the reaction conditions (e.g. temperature, pressure, residence time and hydrogen to oil ratio) obtain isomerisation and reduce and/or avoid undesired cracking. For example the the isomerisation step may be conducted in the presence of hydrogen and an isomerisation catalyst, such as a noble or non-noble isomerisation catalyst, at a temperature in the range of 250 to

10 400 °C, a pressure in the range from 10 to 60 barg, and a WHSV in the range of of 0.1-5 h⁻¹ and a H₂ flow of 100-800 nl H₂/l feed. Examples of isomerisation conditions can be seen in example 3 and table 6. The isomerisation step may for example be conducted at a temperature of 280-330 °C, at a pressure of between 30 and 80 barg, a WHSV of 0.5 – 2 h⁻¹, and a H₂/oil ratio of 600-1200 nl/l. The

15 isomerisation catalyst may be supported or on a support such as Al₂O₃, TiO₂, SiO₂, or combinations thereof.

The process may further involve isolation of the trimerisation product. For example the trimerisation product may be separated from a dimerisation product and

20 isolated in a fraction that contains very little dimerization product, for example where the dimerization product is less than 5 wt-%, such as less than 1 wt-%. It is possible to analyse whether or not any particular fraction contains dimerised or trimerised product by using various techniques in the art, for example field ionisation mass spectrometry, see example 3 and figures 7 and 8. For example the

25 trimerisation product may be isolated in a fraction having a boiling point of more than 380 °C, such as more than 450 °C, for example more 460 °C or more, such as 470 °C or more, such as 480 °C or more, or for example 500 °C or more, such as the ranges described above under the heading “base oil mixtures”.

30 According to the process described herein a base oil composition is obtained.

A base oil composition as described herein may be used for improving the lubricating properties of base oil, for example improving the viscosity index. The boiling point fraction above 450 °C from the trimerisation reaction and

hydrotreatment reaction according to the process comprise the trimer product obtained from trimerisation of palmitic acid. It has a high viscosity index of 164, compared to the base oil fraction from 380 - 450 °C with a viscosity index of 155. As shown in figure 9 mixing in only 10% of the trimerised product into the base oil
5 fraction from 380 - 450 °C increases the viscosity index to 160. This shows that the effect that the trimer-containing fraction has on the viscosity index is not linear.

Further specific examples showing the effect of different reaction conditions on the conversion rate of the feed and the resultant star-shaped compounds of formula I
10 may be seen in the examples.

When describing the embodiments of the present invention, the combinations and permutations of all possible embodiments have not been explicitly described. Nevertheless, the mere fact that certain measures are recited in mutually different
15 dependent claims or described in different embodiments does not indicate that a combination of these measures cannot be used to advantage. The present invention envisages all possible combinations and permutations of the described embodiments.

20 The terms “comprising”, “comprise” and comprises herein are intended by the inventors to be optionally substitutable with the terms “consisting of”, “consist of” and “consists of”, respectively, in every instance.

Examples

Reactor

5 The catalytic reactor used was a continuous flow tube reactor with a fixed catalyst bed. The reactor system has two heated pressurised (1-2 barg) feed chambers, the weight of which can be measured. These feed chambers can be used for simultaneous feeding of two feeds or separately. It is possible to feed pressurised gas like H₂, N₂, CH₄, water vapour or CO₂ in to the reactor. The heating of the
10 reactor is enabled using three electric heating blocks. The reactor heating accuracy is 1 °C. The catalyst average temperature is determined by a measurement of varying temperature points. The pressure is controlled by an automatic pressure regulator. Gas/liquid separation occurs in the heated product chamber at atmospheric pressure.

15

Description of the GC measurement parameters (area-%) and apparatus

Conversion of fatty acid (area-%) is measured by gas chromatography, GC analysis (Agilent Technology 7890). The detector used was a flame ionisation
20 detector (FID). The GC column was a CP/SIL5 column with the following dimensions: 10 m x 250 µm x 0.12 µm. The peaks of the chromatograms were identified by GC-MS. The accuracy of GC-FID analysis is at least 0.01 area-% and many cases even 0.001 area-%. Hydrocarbons are analysed using area-% values, which are typically close to wt-% values.

25

The conversion of fatty acid (X) can be calculated from the GC analysis of the product (fatty acid peak area-%) and feed (fatty acid peak area-%). The conversion is the measure, which tells how many % of the starting material, *i.e.* feed, is converted to something else, typically product molecules.

30

$$X = \frac{[\text{Fatty acid (area-\%)} \text{ in feed}] - [\text{fatty acid (area-\%)} \text{ in product}]}{[\text{Fatty acid (area-\%)} \text{ in feed}]}$$

Example 1 – Preparing a base oil comprising trimers using a palmitic acid feed

5 A fixed bed reactor operated in continuous mode comprising a catalyst bed loaded with 20 g catalyst material (K_2O/TiO_2 ; BET 50-54 m^2/g ; average pore size 100-200 Å; crystallinity 50-100 %) was used for the trimerisation reactions, where temperature, dilution and conversion rate of the feed is varied.

10 These experiments were done in order to see the effect of the dilution agent on the formation of the trimeric compounds. It was first concluded that dilution facilitates the formation of trimers, but when the conversion level was dropped to 87.1 % well below 99.5 %, it was seen that the formation of trimers were the typical level of below 2 %.

15 From table 4 (below) it can be seen that when the palmitic acid conversion was maintained above 99.5 area-% (as measured by GC) the amount of trimer compounds according to formula II was from 8 to 15 area-% (see table 4, column **4A**, **4B** and **4C**).

20 Comparing column **4A** with **4B** it can be seen that the diluent under the particular conversion conditions decreased the formation the trimer product from 9.9 % to 8.2 %.

25 Comparing column **4B** with **4C** it was seen that a lower temperature and lower WHSV also resulted in a fatty acid conversion of 99.5 % and increased the yield of the trimer product from 8.2 % to 14.7 %.

30 Comparing column **4C** with **4D** it was seen that the lower temperature required also a lower WHSV in order to get a satisfactory conversion and more than 2.0 % trimerised product.

The GC distillation for trimerised palmitic acid showing the C_{47} peak is shown in figure 3.

Table 4 – base oil mixture containing trimer product from palmitic acid

Feed		4A	4B	4C	4D
Hydrogen	l/h	5.5	5.5	5.5	5.5
Pressure	barg	9.8	10.2	10.1	9.9
Temperature	°C	360	360	350	350
WHSV	h ⁻¹	1.0	1.0	0.5	1.0
Dilution		0	1:1	1:1	1:1
Fatty acid conversion	area-%	99.6 %	99.9 %	99.9 %	87.1 %

Mass balance					
Vapour phase	wt-%	8.7 %	3.9 %	5.7 %	2.8 %
Aqueous phase	wt-%	3.3 %	3.0 %	2.9 %	1.7 %
Organic phase	wt-%	88.0 %	93.1 %	91.4 %	95.5 %

Composition of organic phase					
Unconverted fatty acid	area-%	0.4 %	0.1 %	0.1 %	12.9 %
Others	area-%	4.2 %	9.6 %	10.5 %	12.5 %
Ketone dimer	area-%	72.5 %	73.8 %	61.5%	68.4 %
Trimer product (C ₄₇)	area-%	9.9 %	8.2 %	14.7 %	1.2 %
Heavies	area-%	1.0 %	1.4 %	4.6 %	0.5 %

5 The feed is Palmitic acid (C_{16:0} fatty acid). The dilution is made using C₁₅-C₁₈
 n-paraffins obtained from hydrodeoxygenation of animal fat. An aqueous phase is
 separated from an organic phase and both phases are weighed separately. The
 vapour phase is calculated as weight of feed minus the weights of the aqueous
 and organic phases. The composition of the organic phase is measured using GC,
 and the sum of the area-% of the organic phase is normalised to the weight
 10 percent of the organic phase.

Example 2 – Effect of various parameters on the trimerisation product yield

A fixed bed reactor as described under the heading “*Reactor*” with a palmitic acid feed was subjected to various parameters to evaluate the effect on the trimerisation product yield. In table 5, the mass balance and composition of organic phase is measured and calculated as described in example 1.

Comparing column **5A** with **5B** it can be seen that a lower WHSV (0.5 vs 1.0 h⁻¹) increase the palmitic acid conversion to 99.9 % and at the same time an increase the formation of the trimerisation product to 2.2 %.

Comparing column **5A** with **5C** it can be seen that the conversion of palmitic acid is increased significantly by nitrogen gas addition compared to no gas addition. At a conversion of 88 %, the formation of the trimers is affected only some extent.

Comparing column **5C** with **5D** it can be seen that the pressure decrease from 25 barg to 10 barg significantly increased the conversion of palmitic acid. However, the formation of the trimeric product is not affected at the conversion level of 97.5 %.

Comparing column **5D** with **5E** it can be seen that the change of nitrogen gas to hydrogen gas increased the conversion of palmitic acid from 97.5 % to 99.9 % and significantly affected the formation of the trimers (0.5 % to 5.6 %).

Comparing column **5E** with **5F** it can be seen that when WHSV was increased from 1.0 h⁻¹ to 2.0 h⁻¹, the conversion drop significantly and also the formation of trimers drop back to level 1.2%

Comparing column **5F** with **5G** it can be seen that when the pressure was then lowered from 10 barg to 2 barg once again conversion was increased significantly. However, the formation of trimers was only some extent affected.

Comparing column **5D** with **5H** it can be seen that the temperature decrease from 360 °C to 350 °C significantly decreased the conversion from 97.5 % to 74.6 %.

At the same time the formation of trimerised product increased rather significantly from 0.5 % to 0.9 % (80 % increase), however, the trimerised product stayed below 1 %.

- 5 Comparing column **5D** with **5I** it can be seen that the change from nitrogen gas to CO₂ increased the conversion of palmitic acid some extent (from 97.5 % to 99.4 %), and increased the formation of the trimerised product significantly (from 0.5 % to 1.6 %). However, the trimerised product stayed below 2.0 %.
- 10 Comparing column **5E** with **5I** it can be seen that the change of hydrogen gas to CO₂ affected the conversion of palmitic acid to some extent (from 99.9 % to 99.4 %), but significantly lowered the formation of the trimers (from 5.6% to 1.6%).

15 Comparing column **5J**, **5K** and **5L** it can be seen that the change in the gas amount added from 5.0 l/h to 2.5 l/h and to 7.5 l/h does not influence the formation of trimerisation product significantly, but influences the conversion rate in that the conversion rate is decreased with decreasing amount of gas added.

20 Comparing column **5L** with **5M** it can be seen that the pressure change from 10 barg to 18 barg decreased to some extent the conversion of palmitic acid but did not alter much the formation of the trimers.

25 Comparing column **5M** with **5N** it can be seen that the WHSV decrease from 1.1 h⁻¹ to 0.6 h⁻¹ increased the conversion to some extent (from 96.1 % to 99.7 %), and at the same time increased significantly the formation of trimers from 0.7 % to 9.1 %.

30 It may be concluded from the results in table 5 that no individual parameter alone (temperature, pressure, WHSV, gas type or gas amount) facilitates the formation of trimers significantly, but rather that it is the result of the combination of suitable reaction condition parameters. A high conversion level of palmitic acid is required to be maintained, and may be achieved by these reaction condition parameters. Only when the conversion level of over 99.5 % is maintained, does the formation of the trimerised product increase unexpectedly as shown by the figures 5 and 6.

Table 5 – Effect of gas and gas type

Feed	5A	5B	5C	5D	5E	5F	5G
Gas, amount	l/h	none	N ₂ , 5	N ₂ , 5	H ₂ , 5	H ₂ , 5	H ₂ , 5
Pressure	barg	25	25	10	10	10	2
Temperature	°C	360	360	360	360	360	360
WHSV	h ⁻¹	1.0	1.0	1.0	1.0	2.0	2.0
Dilution		0	0	0	0	0	0
Fatty acid conversion	area-%	68.4 %	88.0 %	97.5 %	99.9 %	69.6 %	89.3 %

Mass balance							
Vapour phase	wt-%	4.5 %	6.4 %	8.6 %	7.8 %	4.9 %	5.2 %
Aqueous phase	wt-%	1.9 %	1.9 %	2.5 %	3.4 %	1.3 %	2.7 %
Organic phase	wt-%	93.6 %	91.7 %	88.9 %	88.8 %	93.8 %	92.1 %

Composition of organic phase							
Unconverted fatty acid	area-%	31.6 %	12.0 %	2.5 %	0.1 %	30.4 %	10.7 %
Others	area-%	3.5 %	3.5 %	3.0 %	2.9 %	4.3 %	3.2 %
Ketone dimer	area-%	58.2 %	75.6 %	82.8 %	79.9 %	57.8 %	76.6 %
Trimer product (C ₄₇)	area-%	0.3 %	0.5 %	0.5 %	5.6 %	1.2 %	1.3 %
Heavies	area-%	0.0 %	0.1 %	0.1 %	0.3 %	0.1 %	0.3 %
Dimer/trimer ratio		225	148	162	14	49	59

Table 5 continued – Effect of gas and gas type

Feed		5H	5I	5J	5K	5L	5M	5N
Gas, amount	l/h	N ₂ , 5	CO ₂ , 5	CO ₂ , 5	CO ₂ , 2.5	CO ₂ , 7.5	CO ₂ , 7.5	CO ₂ , 7.5
Pressure	barg	10	10	10	10	10	18	18
Temperature	°C	350	360	360	360	360	360	360
WHSV	h ⁻¹	1.0	1.0	1.1	1.1	1.1	1.1	0.6
Dilution		0	0	0	0	0	0	0
Fatty acid conversion	area-%	74.6 %	99.4 %	95.8 %	88.1 %	98.6 %	96.1 %	99.7 %
Mass balance								
Vapour phase	wt-%	6.0 %	8.2 %	5.7 %	7.1 %	7.5 %	7.3 %	7.4 %
Aqueous phase	wt-%	2.1 %	3.4 %	4.9 %	2.2 %	3.1 %	3.0 %	2.1 %
Organic phase	wt-%	91.9 %	88.4 %	89.4 %	90.7 %	89.4 %	89.7 %	90.5 %
Composition of organic phase								
Unconverted fatty acid	area-%	25.4 %	0.6 %	4.2 %	11.9 %	1.5 %	3.9 %	0.3 %
Others	area-%	2.0 %	2.8 %	2.4 %	2.5 %	2.8 %	3.0 %	4.8 %
Ketone dimer	area-%	63.1 %	83.3 %	82.0 %	75.5 %	84.2 %	82.0 %	74.6 %
Trimer product (C ₄₇)	area-%	0.9 %	1.6 %	0.7 %	0.6 %	0.8 %	0.7 %	9.1 %
Heavies	area-%	0.5 %	0.1 %	0.1 %	0.2 %	0.1 %	0.1 %	1.7 %
Dimer/trimer ratio		225	36	148	162	14	49	59

Example 3 – Producing renewable base oil (RBO)

A renewable base oil product was obtained by trimerisation, hydrotreatment and isomerisation in three separate units under the conditions shown in table 6. The feed was palmitic acid and in the trimerisation unit the conversion of the feed was 100 %. The dilution was made using C₁₅-C₁₈ *n*-paraffins. After the hydrotreatment the dilution agent was removed by distillation prior to the isomerisation step.

Table 6 – Renewable base oil (RBO) production conditions

		Trimerisation	Hydrotreatment	Isomerisation
Temperature	°C	360	290	312 and 318
Pressure	barg	25	40	50
WHSV	h ⁻¹	1	1	1
H ₂ :Oil	nl/l	1000	1000	800
Dilution		50:50	50:50	no
Catalyst		K ₂ O/TiO ₂	NiMo/Al ₂ O ₃	Commercial Pt wax isomerisation catalyst

	Base oil yield in wt-% based on undiluted feed			
	>450 °C	380-450 °C	>380 °C	Pour Point (>380 °C fraction)
Isomerised (312°C)	8	48	56	- 18 °C
Isomerised (318°C)	8	38	46	- 39 °C

The yields of the different fractions (380-450 °C fraction and the >450 °C fraction) is shown based on the initial feed of fatty acids (undiluted feed). It can be seen that depending on the severity of the isomerisation step, the pour point can be modified to for example -18 °C or -39 °C, which are excellent pour points for a unadditized base oil product (a base oil stock). It can also be seen that isomerisation conditions can be chosen so as to not detrimentally reduce the yield of the fraction containing the star-shaped compounds (the >450 °C fraction).

It can be seen from a field ionisation mass spectrometry (FIMS) analysis that the >450 °C fraction contains the trimer product (see table 7 and figure 7) in more than 30 wt% and that the 380-450 °C fraction contains a C₃₁ dimer product (see figure 8).

Table 7 – FIMS analysis of palmitic acid based trimerisation product fraction (>450 °C)

	Total fraction (C₃₁-C₅₁)	C₄₇ fraction
Paraffins	49.3 %	34.6 %
Mono-naphthenes	43.6 %	23.1 %
di-naphthenes	6.6 %	3.5 %
tri-naphthenes	0.5 %	0.4 %
Total	100.0 %	61.6 %

Example 4 – Properties of end products

- 5 The different properties of the trimer containing base oil fraction was measured and shown in table 8 below. From the column containing the trimerised product (>450 °C) it can be seen that the viscosity index (VI) is 164 when palmitic acid is used as a feed, which is significantly higher than the minimum VI of 120 for Group III base oils.
- 10 The combined dimer and trimer fraction (>380 °C = 380-450 °C + >450 °C) maintains a very high viscosity index of 160 and at the same time a good pour point of -18 °C. The more severe isomerization conditions described in table 6 above resulted in the combined dimer and trimer fraction (>380 °C*) improving the pour point to -18 °C and still having a very high viscosity index of 147.
- 15 In table 8 (below) for the palmitic acid isomerised at 312 °C, the fraction >450 °C comprises around 90% trimerised product with a small impurity of dimer product. The fraction 380-450 °C does not contain any trimerised product. The fraction >380 °C contains an estimated 10 % trimerised product (see table 6). Plotting the
- 20 estimated trimerised product amount in percent on the x-axis and the viscosity index on the y-axis in figure 9, it can be seen that the trimerised product improves the viscosity index from 155 to 160 by the addition of only 10% trimerised product, and that at around 90% trimerised product (the >450°C fraction) the viscosity index is 164. Accordingly, there is not a linear relationship when adding the trimerised
- 25 product to a base stock containing no trimerised product, and as little as 10 % of trimerised product can have a significant increase on viscosity index.

Table 8 – Properties of base oil end products

		>380 °C	380-450 °C	>450 °C	>380 °C *	>450 °C**	
Density	kg/m ³	818	816	832	818		
Cloud point	°C	1	0	12	-16		
Pour point	°C	-18	-21	0	-39	-18	
Viscosity (40 °C)	mm ² /s	19.6	17.6	45.8	18.4	88.9	
Viscosity (100 °C)	mm ² /s	4.6	4.3	8.5	4.3	13.0	
Viscosity Index		160	155	164	147	144	
CCS -30 °C	mPas	1310	1010		980		
Noack	wt-%	6	7	<6	7	<7	
SimDist	SP	°C	384	381	447	373	458
	5	°C	420	414	462	391	483
	10	°C	431	427	494	400	505
	30	°C	442	437	545	428	543
	50	°C	448	441	551	440	561
	70	°C	451	445	556	446	579
	90	°C	528	448	593	494	622
	95	°C	544	450	607	540	643
	EP	°C	612	461	719	674	696


* base oil fraction of example 3 isomerised at 318 °C; the other three columns are base oil fractions isomerised at 312 °C.

** base oil fraction of a feed (30 % palm oil fatty acid distillate and 70 % refined bleached and deodorized palm oil) that has undergone trimerisation, hydrotreatment and isomerisation (312 °C under the conditions described in table 6 above, with the exception that the trimerisation catalyst was 80 wt% TiO₂ and 20 wt% NiMo/Al₂O₃).

The density was measured using EN ISO 12185; Cloud point using ASTM D7689; Pour Point using ASTM D7346; Viscosity using EN ISO 3104; Viscosity index using ASTM D2270; CCS using ASTM D5293; Noack number using CECL-40-93-B; and SimDist AC750 using EN 15199-2.


Claims

1. Compound of the formula I, wherein n , m and p are independently of each other an odd numbered integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65, with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11.




2. Compound according to claim 1, wherein n is 13 or 15; m and p are independently of each other either 15 or 17.
3. Compound according to claims 1 or 2, wherein n is 13; m and p are both 15.
4. Process for obtaining isomerised star-shaped compounds comprising between 1 to 5 methyl branches, characterised in that one or more compounds of formula I wherein n , m and p are independently of each other an odd numbered integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65, with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11 is subjected to an isomerisation step, the isomerisation step being conducted in the presence of hydrogen and an isomerisation catalyst, such as a noble or non-noble isomerisation catalyst, at a temperature in the range of 250 to 400 °C, a pressure in the range from 10 to 60 barg, and a WHSV in the range of 0.1-5 h⁻¹ and a H₂ flow of 100-800 nl H₂/l feed.

5. Compound of the formula II, wherein n is 13; m and p are both 15.

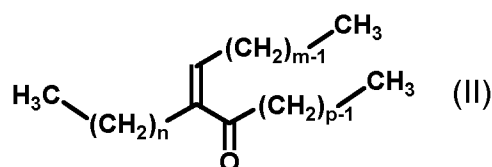

6. Base oil mixture comprising one or more compound(s) of formula I, wherein n , m and p are independently of each other an odd numbered integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65.



7. Base oil mixture according to claim 6 comprising one or more compound(s) of formula I, wherein n is 13 or 15; m and p are independently of each other either 15 or 17.
8. Base oil mixture according to claims 6 or 7 comprising a compound of formula I, wherein n is 13; m and p are both 15.
9. Base oil mixture according to any one of claims 6 – 8, wherein the base oil mixture has a boiling point of 380 °C or more, such as 450 °C or more, such as 460 °C or more, such as 470 °C or more.
10. Base oil mixture according to any one of claims 6 – 9, wherein the base oil mixture comprises at least 2 % or more, preferably 5 % or more of the one or more compound(s) of formula I.
11. Process for base oil production, comprising:
- a)** trimerising a feed comprising at least one fatty acid to provide a trimerisation product where a mixture of fatty acid trimers is obtained; and
 - b)** hydrotreating at least a portion of the trimerisation product to provide a base oil product having a pour point lower than 5 °C;
- where the hydrotreated base oil product comprises one or more compound(s) of formula I, wherein n , m and p are independently of each other an integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65;

fatty acids followed by a condensation reaction between the ketone and another fatty acid to produce an alpha-substituted and alpha-unsaturated ketone.

17. Process for base oil production according to any one of claims 11 – 16, wherein the at least one fatty acid is selected from a C₉ to C₂₂ fatty acid.
18. Process for base oil production according to any one of claims 11 – 17, wherein the feed comprising at least one fatty acid is selected from one or more of the list consisting of: palm oil, canola oil, rapeseed oil, olive oil, sunflower oil, beef fat, lard, coconut oil, corn oil, soybean oil, jatropha oil, tall oil, crude tall oil, tall oil pitch, tall oil heads or tall oil fatty acids.
19. Process for base oil production according to any one of claims 11 – 18, wherein the feed comprising at least one fatty acid is diluted with a stream of hydrocarbons, or where the trimerisation product is diluted with a stream of hydrocarbons.
20. Process for base oil production according to any one of claims 12 – 19, wherein the feed comprising at least one fatty acid is diluted with a stream of product withdrawn from the process, for example withdrawn from the trimerisation zone or from the hydrotreatment zone.
21. Process for base oil production according to any one of claims 11 – 20, wherein in the trimerisation zone a gas feed is present, where the gas is selected from the list consisting of: nitrogen, carbon dioxide, water vapour, methane and/or hydrogen, preferably hydrogen.
22. Process for base oil production according to any one of claims 11 – 21, wherein the trimerisation product is isolated in a fraction having a boiling point of more than 450 °C.

23. Process for base oil production according to any one of claims 11 – 22, further comprising a step:
- c) isomerising the hydrotreated base oil product.
24. Base oil composition obtainable according to any one of claims 11 – 23.
25. Use of a base oil composition according to claim 24 for improving the lubricating properties of base oil.
26. Process for obtaining isomerised star-shaped compounds comprising between 1 to 5 methyl branches, characterised in that a feed comprising at least 80 wt% hydrocarbons and comprising at least 2 wt%, preferably at least 5 wt% of one or more compounds of formula I wherein n , m and p are independently of each other an odd numbered integer value between 9 and 41, and where the total carbon number of formula I is between 31 and 65, with the proviso that when n and m are both 9, then p is not 9 or 11, and with the proviso that n , m and p are not all 11 is subjected to an isomerisation step, the isomerisation step being conducted in the presence of hydrogen and an isomerisation catalyst, such as a noble or non-noble isomerisation catalyst, at a temperature in the range of 250 to 400 °C, a pressure in the range from 10 to 60 barg, and a WHSV in the range of 0.1-5 h⁻¹ and a H₂ flow of 100-800 nl H₂/l feed.
27. Process according to claim 26, characterised in that the feed comprising at least 15 wt%, at least 20 wt%, at least 32 wt%, such as at least 50 wt% or at least 80 wt% of one or more compounds of formula I.
28. Process according to any one of claims 26 – 27, characterised in that the feed consists essentially of hydrocarbons.
29. Process according to any one of claims 26 – 28, characterised in that the feed comprises at least 15 wt% of one or more compounds of formula I.
30. Process according to claim 29, characterised in that the feed consists essentially of hydrocarbons and comprises at least 15 wt% of one or more compounds of formula I.

Drawings

Figure 1 – Examples of Poly-alpha-olefins from 1-decene

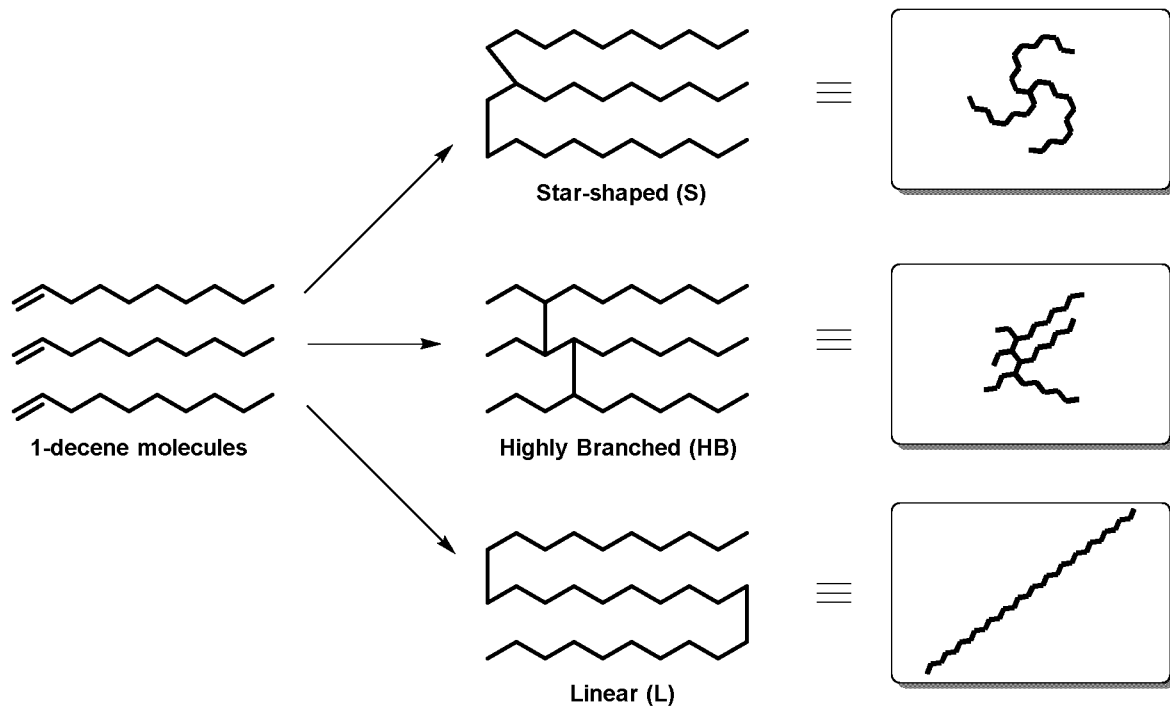


Figure 2 – Scheme for producing trimer

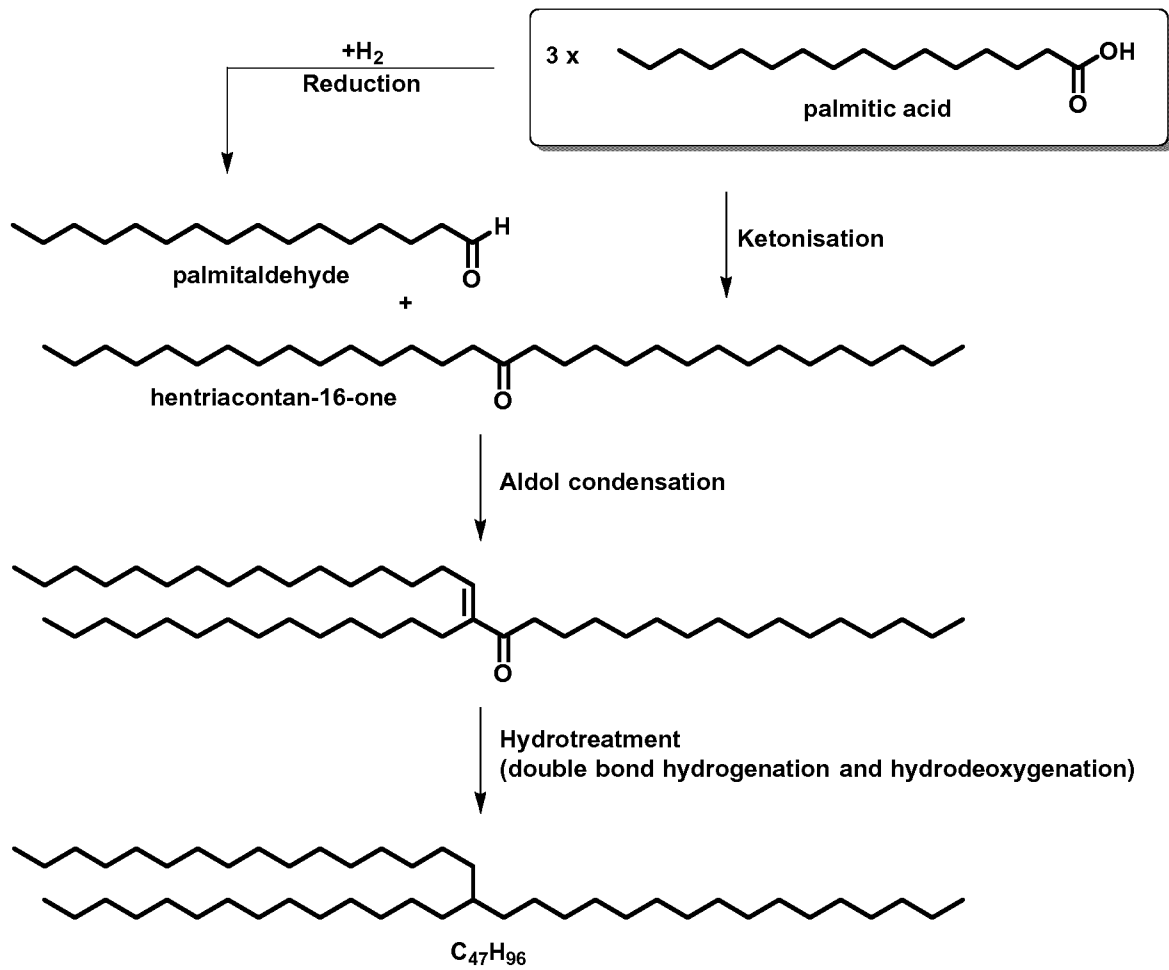


Figure 3 – Trimerised palmitic acid (C16:0 fatty acid)

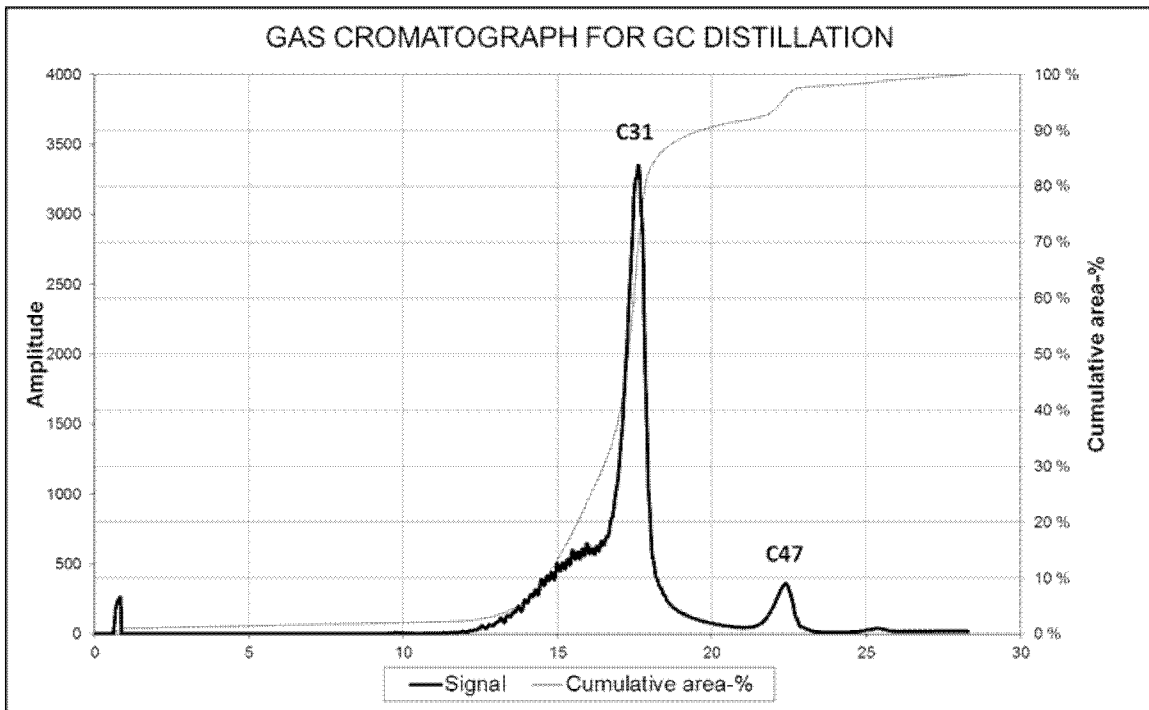


Figure 4 – Trimerised palm fatty acid distillate (PFAD) (C16/C18 fatty acids)

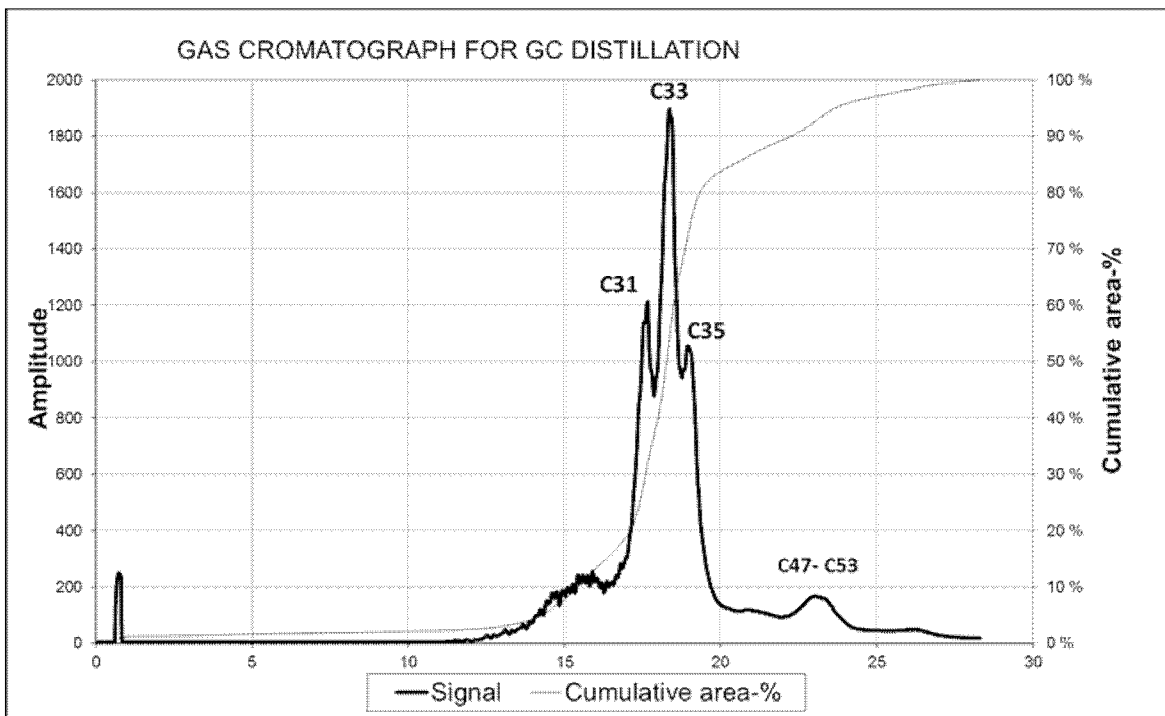


Figure 7 – Trimerised Palmitic acid (C16:0) fraction boiling over 450 °C

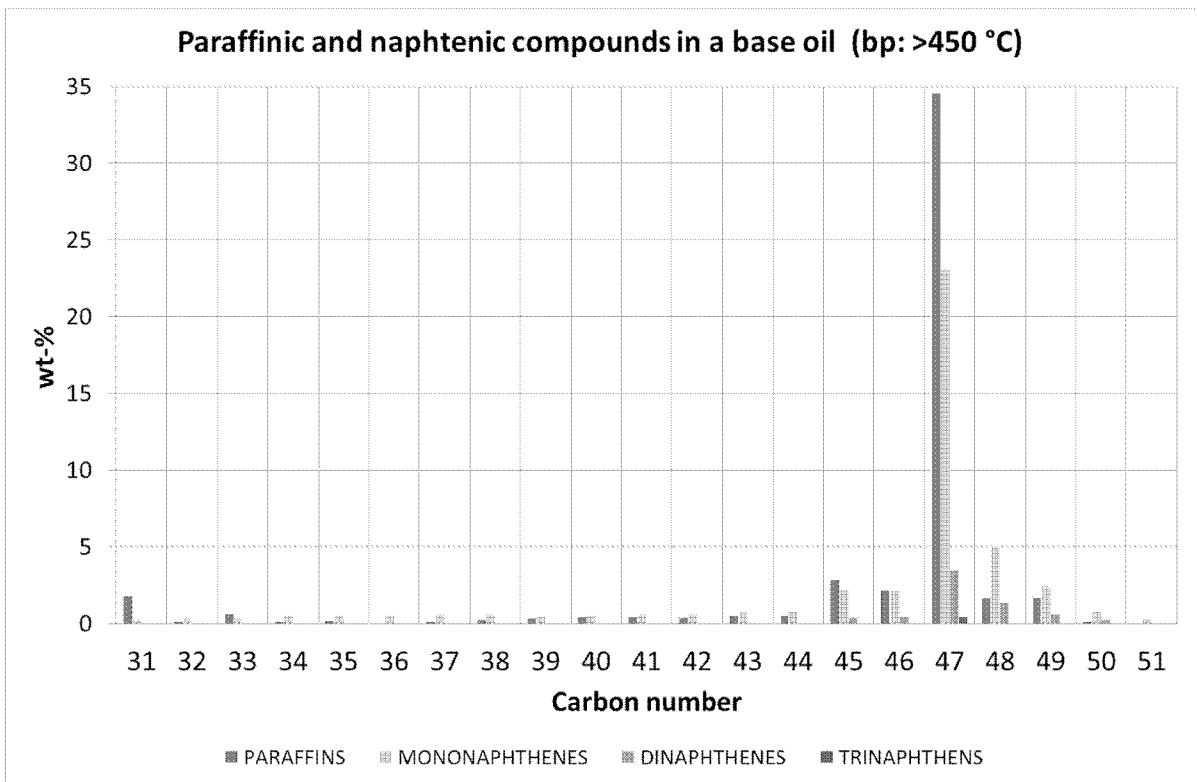


Figure 8 – Trimerised Palmitic acid (C16:0) fraction boiling 380 - 450 °C


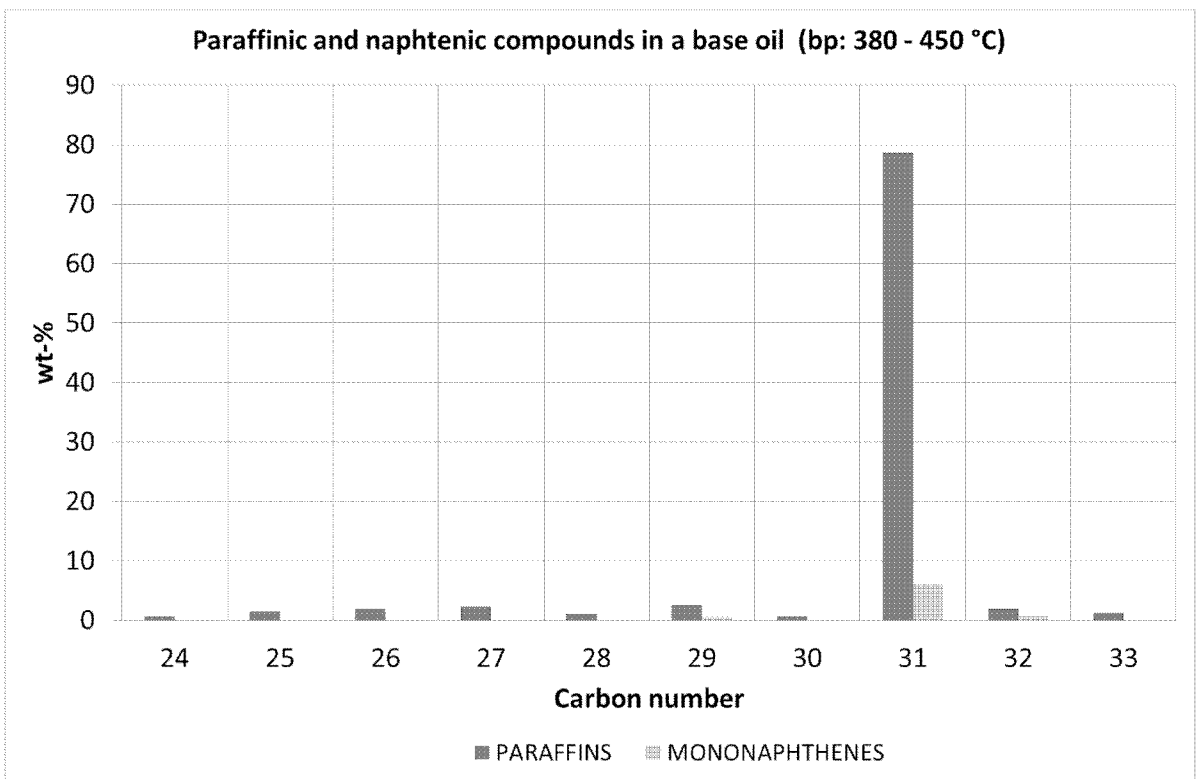


Figure 9 – Viscosity index of base oil of table 6 and 8 isomerised at 312 °C

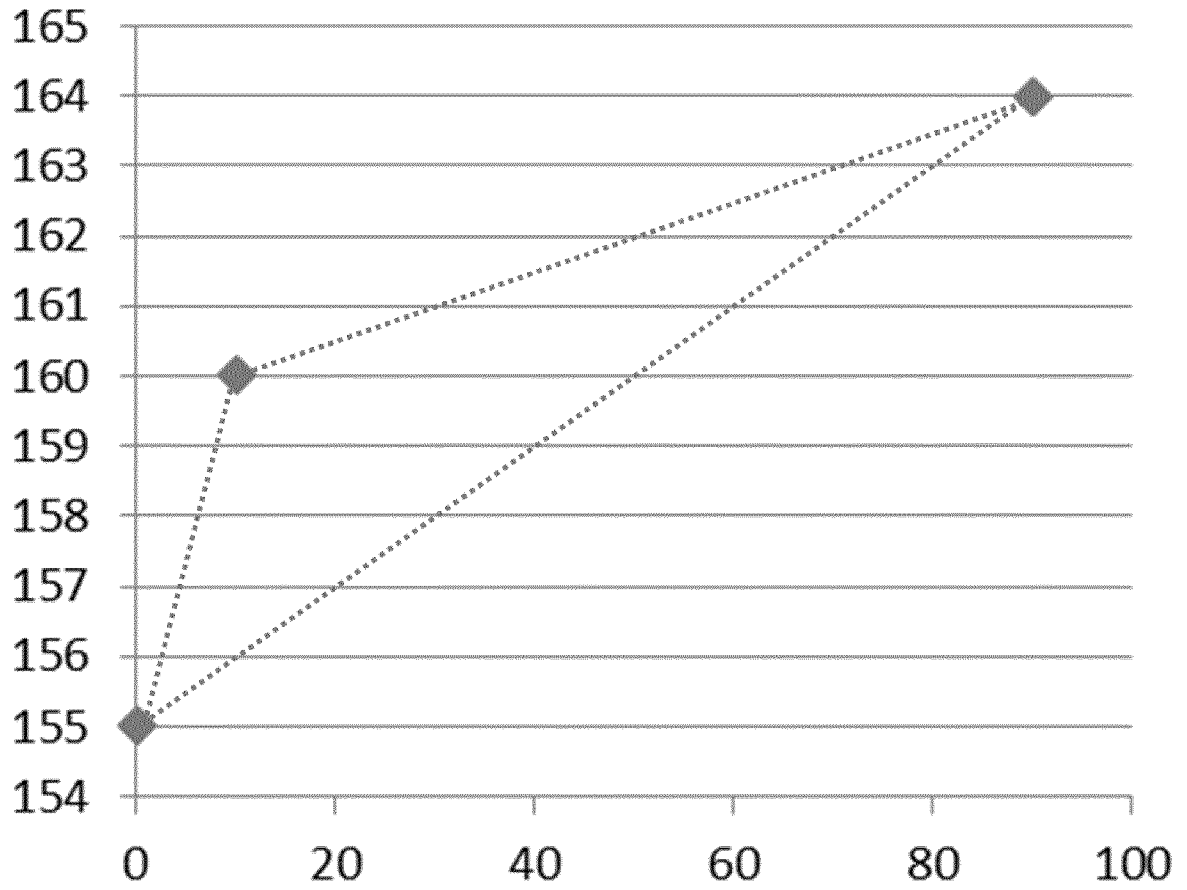

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/065980

A. CLASSIFICATION OF SUBJECT MATTER
INV. C07C49/203 C07C9/22 C10M107/10 C10G45/58 C10G3/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
C07C C10M C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/099373 A1 (EXXONMOBIL RES & ENG CO [US]) 26 June 2014 (2014-06-26) figures 3, 7 paragraph [0001]; claim 1 -----	1-3, 6-10,24, 25
X	WO 2007/068800 A2 (NESTE OIL OYJ [FI]; KOIVUSALMI EIJA [FI]; MYLLYOJA JUKKA [FI]; MATIKAI) 21 June 2007 (2007-06-21) last paragraph; page 25 page 30 claims 1, 16 -----	1-30
X	US 2016/137944 A1 (LIANG ANN JIA-BAO [US] ET AL) 19 May 2016 (2016-05-19) claims 1-20 paragraph [0037] -----	1-3,5-25
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 19 July 2018	Date of mailing of the international search report 25/07/2018
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Pardo Torre, J

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/065980

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/113976 A1 (NESTE OIL OYJ [FI]) 8 August 2013 (2013-08-08) Examples -----	1-30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/065980

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2014099373	A1	26-06-2014	CA 2888821 A1	26-06-2014
			EP 2935538 A1	28-10-2015
			SG 11201502698W A	28-05-2015
			US 2014171703 A1	19-06-2014
			WO 2014099373 A1	26-06-2014

WO 2007068800	A2	21-06-2007	CA 2631848 A1	21-06-2007
			EP 1960497 A2	27-08-2008
			HK 1125399 A1	23-08-2013
			KR 20080079674 A	01-09-2008
			WO 2007068800 A2	21-06-2007

US 2016137944	A1	19-05-2016	NONE	

WO 2013113976	A1	08-08-2013	AU 2012367898 A1	31-07-2014
			CA 2863439 A1	08-08-2013
			CA 2863470 A1	08-08-2013
			DK 2809744 T3	27-06-2016
			DK 2809745 T3	01-08-2016
			EP 2809744 A1	10-12-2014
			EP 2809745 A1	10-12-2014
			ES 2579352 T3	10-08-2016
			ES 2579854 T3	17-08-2016
			KR 20140128967 A	06-11-2014
			PL 2809744 T3	31-10-2016
			PL 2809745 T3	30-12-2016
			PT 2809744 T	13-07-2016
			PT 2809745 T	12-07-2016
			SG 11201403806Q A	27-11-2014
			SG 11201403807S A	26-09-2014
			US 2015018581 A1	15-01-2015
			US 2015018588 A1	15-01-2015
			US 2015251168 A1	10-09-2015
			WO 2013113976 A1	08-08-2013
WO 2013113977 A1	08-08-2013			
