

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/036766 A2

(51) International Patent Classification⁷: **H04B**
(21) International Application Number:
PCT/US2003/032626
(22) International Filing Date: 15 October 2003 (15.10.2003)
(25) Filing Language: English
(26) Publication Language: English

(30) Priority Data:
60/418,881 15 October 2002 (15.10.2002) US
10/405,859 2 April 2003 (02.04.2003) US

(71) Applicant (for all designated States except US): **TEK-ELEC** [US/US]; 26580 West Agoura Road, Calabasas, CA 91302 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCCANN, Thomas, M.** [US/US]; 117 Oxyard Way, Morrisville, NC 27560 (US). **RAO, Raghavendra, G.** [IN/US]; 1114 Sweet Spot Circle, Morrisville, NC 27560 (US).

(74) Agent: **JENKINS, Richard, E.**; Jenkins, Wilson & Taylor, P.A., Suite 1400 University Tower, 3100 Tower Boulevard, Durham, NC 27707 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS AND SYSTEMS FOR MIGRATING BETWEEN APPLICATION LAYER MOBILE SIGNALING PROTOCOLS

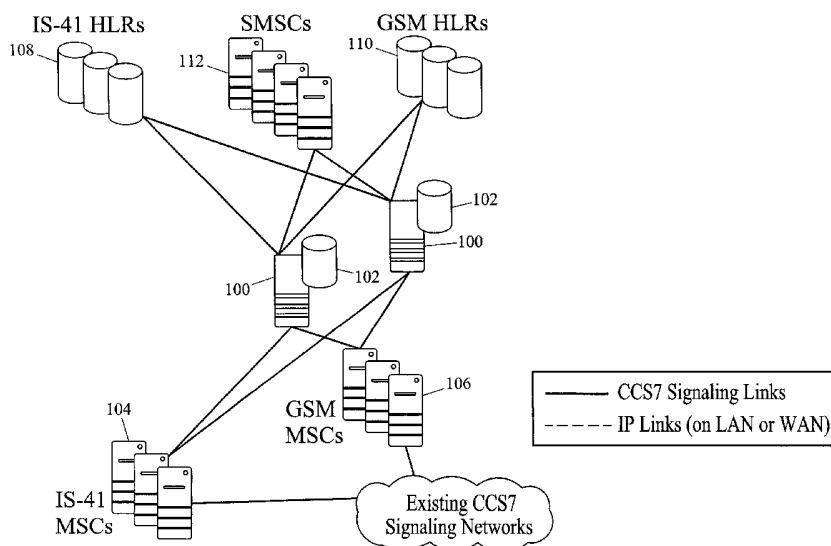

(57) Abstract: Methods and systems for migrating between application layer mobile signaling protocols are disclosed. For subscribers of multiple protocols, the registration status is tracked in one or more of the protocols. When a location query message for a subscriber of multiple protocols is received, it is determined whether the subscriber is registered according to the tracked protocol. If the subscriber is registered according to the tracked protocol and the request originated from an MSC of the tracked protocol, the message is routed to an HLR of the tracked protocol. If the subscriber is not registered according to the tracked protocol, a response is formulated to the first message. The response optionally includes a prefix that directs the originating MSC to route the call to an MSC of the non-tracked protocol.

WO 2004/036766 A2

-1-

DescriptionMETHODS AND SYSTEMS FOR MIGRATING BETWEEN APPLICATION
LAYER MOBILE SIGNALING PROTOCOLSRelated Applications

- 5 This application claims the benefit of U.S. Provisional Patent Application Serial No. 60/418,881, filed October 15, 2002, and U.S. Patent Application Serial No. 10/405,859, filed April 2, 2003, the disclosures of each of which are incorporated herein by reference in their entirety.

Technical Field

- 10 The present invention relates to methods and systems for migrating between application layer mobile signaling protocols. More particularly, the present invention relates to methods and systems for routing and processing signaling messages for calls and short message service (SMS) messages to mobile subscribers in a network where some subscribers have two or more
15 different application layer mobile signaling protocol subscriptions and the same directory number is used to contact the subscriber in each subscription.

Related Art

- In mobile communications networks, a variety of different mobile signaling protocols are used to route calls, obtain subscriber information, and
20 deliver SMS messages to mobile subscribers. For example, in North America, American National Standards Institute (ANSI)-41 or Interim Standard (IS)-41 is the dominant application layer mobile signaling protocol. In Europe, the Global System for Mobile communications (GSM) protocol is the dominant application layer mobile signaling protocol. GSM is also being increasingly used in North
25 America.

- In some networks, a mobile telecommunications service provider that was initially an IS-41-only service provider may desire to add GSM service. Alternatively, a GSM-only service provider may desire to add IS-41 service. In order to add a new type of service, the service provider must add signaling
30 nodes, such as mobile switching centers (MSCs), visitor location registers (VLRs), and home location registers (HLRs) of the new service type. In addition, short message service centers (SMSCs) of the new service type may

- 2 -

be required. Alternatively, short message service centers capable of communicating using protocols of the existing and new service types can be provided.

5 In a network that includes GSM and IS-41 network elements, some mechanism must exist for ensuring that signaling messages relating to calls directed to IS-41 subscribers are delivered to the appropriate IS-41 network elements and that signaling messages relating to calls intended for GSM subscribers are routed to the appropriate GSM network elements. This problem becomes quite complex in a network in which some subscribers are
10 IS-41-only, others have multiple subscriptions, and still others are GSM-only. In a situation where a subscriber adds a new service or migrates to a different type of service, the subscriber may desire to keep the same directory number. Because the same directory number can be associated with different subscriptions, the processing and routing of mobile signaling messages in such
15 an environment becomes even more complex.

Conventional solutions to routing messages for calls from a subscriber of one application layer mobile signaling protocol to a subscriber of a different application layer mobile signaling protocol include simply converting each message from one application layer mobile signaling protocol to another
20 application layer mobile signaling protocol and vice-versa. Converting each message from one protocol to the other protocol and vice-versa greatly increases the time required to set up calls and increases the number of signaling messages in the network. In addition, conventional protocol converters are incapable of giving priority to one service type for dual mode
25 subscribers and properly routing calls to dual mode subscribers.

Accordingly, in light of these difficulties associated with conventional protocol converters, there exists a need for improved methods and systems for processing signaling messages relating to calls and SMS messages to dual mode subscribers of different application layer mobile signaling protocols and
30 for giving priority to one signaling protocol over the other signaling protocol.

- 3 -

Disclosure of the Invention

The present invention includes methods and systems for routing and processing signaling messages in a network with dual mode subscribers of different application layer mobile signaling protocols. As used herein, the term

5 "dual mode subscriber" refers to a mobile subscriber with two different application layer mobile signaling protocol subscriptions where the same directory number is used to contact the subscriber via each subscription. For example, a dual mode subscriber may have an IS-41 phone and a GSM phone with the same directory number being used to contact both phones.

10 Alternatively, the subscriber may have a single physical device capable of operating in IS-41 and GSM modes.

A method for processing signaling messages relating to calls to dual mode subscribers according to the present invention may include tracking the registration status of a dual mode subscriber in one of the application layer

15 mobile signaling protocols of the subscriber (hereinafter, "the tracked application layer mobile signaling protocol") and using the current registration status to route calls and SMS messages to the subscriber in a manner that gives priority to the tracked application layer mobile signaling protocol. For example, location query messages for dual mode subscribers may be

20 processed in a manner that gives priority to the tracked application layer mobile signaling protocol. If a mobile switching center (MSC) of the tracked application layer mobile signaling protocol sends a location query message for a dual mode subscriber, a routing node of the present invention may check the registration status of the dual mode subscriber. If the subscriber is not

25 registered according to the tracked application layer mobile signaling protocol, the routing node may formulate a location query response message with a prefix corresponding to a mobile switching center of the non-tracked application layer mobile signaling protocol and send the location query response to the requesting mobile switching center. The prefix in the location query response

30 message may trigger the requesting mobile switching center to route the call to

- 4 -

the mobile switching center of the non-tracked application layer mobile signaling protocol.

If the location query message originates from an MSC of the tracked application layer mobile signaling protocol and the subscriber is registered according to the tracked application layer mobile signaling protocol, the routing node routes the message to an HLR of the tracked application layer mobile signaling protocol. By tracking the subscriber's registration status in one protocol and routing messages based on the registration status in that protocol, the present invention gives priority to the tracked application layer mobile signaling protocol over the non-tracked application layer mobile signaling protocol. For example, registration messages of the non-tracked application layer mobile signaling protocol preferably do not affect the subscriber's registration status in the tracked application layer mobile signaling protocol. This fact combined with the routing mechanisms described above ensure that the tracked application layer mobile signaling protocol is given priority over the non-tracked application layer mobile signaling protocol.

In networks where dual mode subscribers have separate mobile handsets for each application layer mobile signaling protocol subscription, the present invention preferably only tracks the registration status in one of the application layer mobile signaling protocols, thereby giving priority to the tracked application layer mobile signaling protocol. In networks in which dual mode subscribers have dual mode devices capable of receiving calls from either subscription, the present invention preferably tracks the registration status in both application layer mobile signaling protocols. The exemplary call flows illustrated herein are essentially the same whether the subscriber's registration status is tracked in one or more of the application layer mobile signaling protocols. Differences in the call flows for single handset and dual handset cases will be described below.

According to another aspect, the present invention includes a method for routing and processing short message service location query messages in a network with dual mode subscribers. When a mobile subscriber initiates a

- 5 -

short message service message to another mobile subscriber in the network, the short message service message is sent to a short message service center to be stored and later forwarded to the destination mobile subscriber. The short message service center initiates a request for SMS routing information
5 formatted in the tracked application layer mobile signaling protocol, independently of the mobile signaling protocol of the sender. If the intended recipient is a dual mode subscriber, the current registration status of the dual mode subscriber is checked. If the intended recipient is registered in the tracked application layer mobile signaling protocol, the request for SMS routing
10 information is sent to a home location register of the tracked layer mobile signaling protocol. If the intended receipt is not registered in the tracked application layer mobile signaling protocol, an error message is sent to the SMSC, and the SMSC sends a request for SMS routing information in the non-tracked application layer mobile signaling protocol.

15 Accordingly, it is an object of the invention to provide methods and systems for routing signaling messages associated with calls and SMS messages to subscribers having subscriptions of both first and second application layer mobile signaling protocols.

It is another object of the invention to provide methods and systems for
20 routing messages relating to calls and SMS messages to dual mode subscribers of different application layer mobile signaling protocols in a manner that gives priority to one of the application layer mobile signaling protocols.

Some of the objects of the invention having been stated hereinabove, and which are addressed in whole or in part by the present invention, other
25 objects will become evident as the description proceeds when taken in connection with the accompanying drawings as best described hereinbelow.

Brief Description of the Drawings

Preferred embodiments of the invention will now be explained with reference to the accompanying drawings of which:

Figure 1 is a network diagram illustrating an exemplary network in which the methods and systems for migrating between application layer mobile signaling protocols may be implemented;

Figure 2 is a block diagram illustrating an exemplary internal architecture
5 for a number migration signaling platform according to an embodiment of the present invention;

Figure 3 is a flow chart illustrating exemplary steps that may be performed by a number migration signaling platform in tracking the GSM registration status of a dual mode subscriber according to an embodiment of
10 the present invention;

Figure 4 is a message flow diagram illustrating exemplary messages involved in tracking the registration status of a dual mode subscriber according to an embodiment of the present invention;

Figure 5 is a block diagram illustrating mobile terminated call scenarios
15 that may be encountered by a number migration signaling platform according to an embodiment of the present invention;

Figure 6 is a flow chart illustrating exemplary steps that may be performed by a number migration signaling platform in processing location query messages for mobile terminated calls according to an embodiment of the
20 present invention;

Figure 7 is a message flow diagram illustrating exemplary messages involved in processing a call originated at an IS-41 MSC for a dual mode subscriber who is not GSM registered according to an embodiment of the present invention;

Figure 8 is a message flow diagram illustrating exemplary messages
25 involved in a call originated at an IS-41 MSC for a dual mode subscriber who is GSM registered according to an embodiment of the present invention;

Figure 9 is a message flow diagram illustrating exemplary messages involved in processing a call originated at a GSM MSC for a dual mode
30 subscriber who is GSM registered according to an embodiment of the present invention;

- 7 -

Figure 10 is a message flow diagram illustrating exemplary messages involved in a call originated at a GSM MSC for a dual mode subscriber who is not GSM registered according to an embodiment of the present invention;

5 Figure 11 is a message flow diagram illustrating exemplary messages involved in a call originated at an IS-41 MSC for a call to a GSM-only subscriber with a DN in an IS-41 range according to an embodiment of the present invention;

10 Figure 12 is a message flow diagram illustrating exemplary messages associated with a call originated at a GSM MSC for a GSM-only subscriber with a DN within or outside of an IS-41 range according to an embodiment of the present invention;

Figure 13 is a block diagram illustrating exemplary mobile terminated SMS transactions that may be processed by a number migration signaling platform according to an embodiment of the present invention;

15 Figure 14 is a flow chart illustrating exemplary steps that may be performed by a number migration signaling platform in processing SMS location query messages according to an embodiment of the present invention;

20 Figure 15 is a message flow diagram illustrating exemplary messages associated with an SMS location query transaction for a GSM registered dual mode subscriber according to an embodiment of the present invention;

Figure 16 is a message flow diagram illustrating exemplary messages associated with a mobile terminated SMS location query transaction for a dual mode subscriber who is not GSM registered according to an embodiment of the present invention;

25 Figure 17 is a message flow diagram illustrating exemplary messages associated with a mobile terminated SMS location query transaction for a non-migrated IS-41 subscriber according to an embodiment of the present invention;

30 Figure 18 is a message flow diagram illustrating exemplary messages associated with an SMS location query transaction for a GSM-only subscriber according to an embodiment of the present invention;

- 8 -

Figure 19 is a message flow diagram illustrating exemplary messaging for a mobile terminated SMS location query transaction for a GSM registered subscriber according to an alternate embodiment of the present invention;

Figure 20 is a message flow diagram illustrating exemplary messaging
5 for a mobile terminated SMS location query transaction for a subscriber who is not GSM registered according to an alternate embodiment of the present invention;

Figure 21 is a message flow diagram illustrating exemplary messaging for a mobile terminated SMS location query transaction for a GSM-only
10 subscriber according to an alternate embodiment of the present invention;

Figure 22 is a message flow diagram illustrating exemplary messaging for a mobile terminated SMS location query transaction for a non-migrated IS-41 subscriber according to an alternate embodiment of the present invention; and

15 Figure 23 is a message flow diagram illustrating exemplary messaging for a GSM SMS location query transaction from another network to a migrated subscriber according to an embodiment of the present invention.

Detailed Description of the Invention

In one exemplary embodiment of the invention, a number migration
20 signaling platform may track the registration status of dual mode subscribers of different application layer mobile signaling protocols in one of the application layer mobile signaling protocols and process and route signaling messages based on the tracked registration status. A number migration signaling platform may be implemented in a signaling message routing node for routing messages
25 between MSCs, HLRs, VLRs, and SMSCs. Figure 1 illustrates an exemplary network architecture in which a number migration signaling platform according to the present invention may be used. Referring to Figure 1, number migration signaling platforms **100** are provided to route and process mobile call signaling messages between other mobile network elements. Each number migration
30 signaling platform **100** may include a location query routing and subscriber registration status database **102** for tracking registration status of dual mode

- 9 -

subscribers in one application layer mobile signaling protocol, for routing location query messages to the appropriate destination using the tracked registration status, and for formulating location query response messages. The functionality of number migration signaling platforms **100** and databases **102** will be described in more detail below.

In the illustrated embodiment, number migration signaling platforms **100** may function as a mated pair for reliability purposes. Number migration signaling platforms **100** may be centrally located in the network for routing messages to and from IS-41 MSCs **104**, GSM MSCs **106**, IS-41 HLRs **108**, GSM HLRs **110**, and SMSCs **112**. In the illustrated example, number migration signaling platforms **100** are connected to network elements **104**, **106**, **108**, **110**, and **112** via SS7 signaling links. Alternatively, number migration signaling platforms **100** may be connected to network elements **104**, **106**, **108**, **110** and **112** via IP signaling links.

Figure 2 is a block diagram illustrating an exemplary internal architecture for a number migration signaling platform according to an embodiment of the present invention. Referring to Figure 2, number migration signaling platform **100** includes a plurality of internal processing modules connected to each other via an internal network or bus. Each of the internal processing modules may include a printed circuit board with an application processor for performing application layer functions and a communications processor for communicating with other modules via the internal bus. One type of processing module that may be included within number migration signaling platform **100** is a link interface module **200**. Link interface module **200** may send and receive messages via SS7 signaling links and may forward messages to other modules within number migration signaling platform **100** for further processing or routing.

In the illustrated example, link interface module **200** includes an SS7 level 1 and 2 module **202** for performing SS7 level 1 and 2 functions, such as error correction, error detection, and sequencing of SS7 messages. Gateway screening module **204** screens messages to determine whether to allow the messages into the network. Discrimination module **206** determines whether a

- 10 -

received SS7 message should be distributed to an internal processing module within number migration signaling platform **100** for further processing or whether the message should be routed over an external signaling link. Distribution module **208** distributes messages identified by discrimination module **206** as requiring further processing. Routing module **210** routes messages identified by discrimination module **206** as requiring routing. Both routing module **210** and distribution module **208** may forward messages to other processing modules via an inter-processor message transport (IMT) bus **212**.

10 In the illustrated example, number migration signaling platform **100** includes a data communications module (DCM) **214** for sending and receiving SS7 messages via IP signaling links. Data communications module **214** may include gateway screening, message discrimination, message distribution, and message routing modules similar to those described with respect to link interface module **200**. In addition, data communications module **214** may include a physical layer **216** for performing physical layer functions for sending and receiving messages over IP signaling links. In one exemplary embodiment, physical layer **216** may be implemented using an Ethernet interface. IP layer **218** performs network layer functions for sending and receiving messages via IP signaling links, such as IP forwarding based on destination IP addresses. Transport layer **220** performs functions for providing reliable transfer of SS7 messages over IP signaling links. For example, transport layer **220** may be implemented using the transmission control protocol (TCP) or the stream control transmission protocol (SCTP). SS7 adaptation layer **222** performs functions for adapting SS7 messages for transport over an IP network. SS7 adaptation layer **222** may be implemented using Tekelec's transport adapter layer interface (TALI), MTP level two user adaptation layer (M2UA), MTP level three user adaptation layer (M3UA), SCCP signaling adaptation layer (SUA), and/or MTP level two peer to peer user adaptation layer (M2PA), as described in the correspondingly named IETF Internet drafts and RFCs.

- 11 -

According to an important aspect of the invention, number migration signaling platform **100** may include a database services module **224** for tracking registration status of dual mode subscribers and for routing and processing location query messages using the registration status. In the
5 illustrated example, database services module **224** includes a service selection module **226** for selecting the appropriate service for a received message, a location query processor/subscriber registration manager **228** for processing location query messages and tracking subscriber registration information, a location query routing and subscriber registration status database **230**, and a
10 routing function **210**. In networks where dual mode subscribers have separate handsets for different signaling protocol subscriptions, location query processor/subscriber registration manager **228** preferably tracks only the subscriber registration status in one application layer mobile signaling protocol. For example, location query processor/subscriber registration manager **228**
15 may track the GSM registration status of a subscriber of both IS-41 and GSM service. In an alternate embodiment, location query processor/subscriber registration manager **228** may track IS-41 registration status of such a subscriber. In networks in which subscribers have dual mode devices, location query processor/subscriber registration manager **228** preferably tracks the
20 registration status in both application layer mobile signaling protocols.

While in the embodiment illustrated in Figure 2 location query processor/subscriber registration manager **228** and database **230** are located on a database services module, the present invention is not limited to such an embodiment. In an alternate embodiment, location query processor/subscriber
25 registration manager **228** and/or database **230** may be located on a communication link module, such as link interface module **200** or data communications module **214**. In yet another alternate embodiment, location processor/subscriber registration manager **228** may be located on a separate computing platform from number migration signaling platform **100**. In such an
30 embodiment, the separate computing platform may be connected to number migration signaling platform **100** via a local area network.

- 12 -

Table 1 shown below illustrates exemplary data that may be maintained in location query routing and subscriber registration status database **230**.

IMSI (MIN)	MSISDN	DPC/SSN	Portability Type	GSM Registration Status	VLR ID
--	9194938000	1-1-1/4	Dual	Registered	1234
9194938000	--	1-1-2/4	Dual	Registered	--
--	9194938001	1-1-1/4	Dual	Not registered	--
9194938001	--	1-1-2/4	Dual	Not registered	5678
--	9194938002	1-1-1/4	GSM-only, not in IS-41 range	--	--
	9194938003	1-1-1/4	GSM-only, in IS-41 range	--	--
9194938004	--	1-1-2/4	IS-41 only	--	--

Table 1: Routing and Registration Status Information

Referring to Table 1, each entry includes either an MSISDN number or an IMSI that corresponds to an MSISDN number or IMSI and a received location query message. For received GSM messages, the MSISDN fields in Table 1 are searched using the MSISDN numbers extracted from the messages. For received IS-41 messages, the IMSI fields in Table 1 are searched using the mobile identification number (MIN) or mobile directory number (MDN) extracted from the messages. It should be noted that the same number may occur in the MSISDN field and the IMSI field in the database for a dual mode subscriber. In this case, location query processor/subscriber registration manager **228** may determine the appropriate field to search based, for example, on the received message type or one or more provisioned service selector parameters determined to be present in the received message.

In addition to the IMSI and MSISDN fields, each entry in Table 1 includes a destination point code and subsystem number combination to which the destination point code and the subsystem number and a received message should be translated. The DPC/SSN combination may identify the appropriate HLR for receiving a location query message. Each entry also includes a

- 13 -

portability type field that stores the portability type of each subscriber. In the illustrated example, the portability type field indicates whether a subscriber is a dual mode subscriber, a GSM-only subscriber with a directory number within an IS-41 range, a GSM-only subscriber with a directory number that is not within an IS-41 range, or an IS-41-only subscriber.

A GSM subscriber with directory number within an IS-41 range may be an existing IS-41 subscriber who migrates to GSM service and does not keep his or her IS-41 handset. GSM subscribers with directory numbers within an IS-41 range may also include new GSM-only subscribers who are given directory numbers in a range that may result in HLR queries from an IS-41 MSC. GSM-only subscribers with directory numbers outside of IS-41 ranges are assigned directory numbers that will not result in HLR queries from IS-41 MSCs. IS-41-only subscribers are simply subscribers of IS-41 service only.

In addition to user type, the GSM entries in Table 1 for dual mode subscribers may include a populated GSM registration status field. The GSM registration status field indicates whether or not a subscriber is GSM registered.

As will be described in further detail below, a subscriber may become GSM registered in response to activation of his or her GSM phone. Registration status is preferably only tracked for dual mode subscribers. For other types of subscribers, this field may be blank. The example illustrated in Table 1 does not store the IS-41 registration status of a mobile subscriber, indicating the preferred configuration for networks in which dual mode subscribers use separate handsets for each subscription. In networks in which dual mode subscribers use the same phone for both subscriptions, the IS-41 registration status may be stored in addition to the GSM registration status in database 230.

Figure 3 is a flow chart illustrating exemplary steps that may be performed by number migration signaling platform 100 in tracking the registration status of dual mode subscribers according to an embodiment of the present invention. Referring to Figure 3, in step 300, number migration signaling platform 100 receives the message at LIM 200 or DCM 214. In step

- 14 -

302, the message is identified as a signaling connection control part message and is routed to DSM **224**. Upon reaching DSM **224**, service selection module **226** selects the appropriate service for processing the message. In the illustrated example, the selected service is assumed to be location query processing/registration management because the received message is a registration message. In step **306**, location query processor/subscriber registration manager **228** performs a lookup in location query routing and subscriber registration status database **230** based on the MSISDN or MIN number in the received registration message. In step **308**, location query processor/subscriber registration manager **228** determines whether the received registration message is a GSM registration or purge message. If the message is not a GSM registration or purge message, control proceeds to step **310** where the message is routed to the appropriate IS-41 HLR. Thus, IS-41 registration messages preferably do not affect the GSM registration status of the subscriber.

If, on the other hand, the message is a GSM registration or purge message, the message relates to the status of a GSM subscriber. Accordingly, control proceeds to step **312** where location query processor/subscriber registration manager **228** determines whether the subscriber is a dual mode subscriber. As stated above, this step may be performed by examining the subscriber type field in database **230**. If the subscriber is a dual mode subscriber, control proceeds to step **314** where location query processor/subscriber registration manager **228** updates the registration status for the subscriber in database **230**. For example, if the message is a GSM update location message for a dual mode subscriber, location query processor/subscriber registration manager **228** may indicate that the subscriber is GSM registered in database **230**. A purge message, or more specifically, a mobile application part (MAP) purge mobile subscriber message, is sent from a VLR to an HLR to cause the HLR to mark its data for the mobile subscriber so that any request for routing information for a mobile terminated call or a mobile terminated SMS message will be treated as if the mobile terminal is not

- 15 -

reachable. The purge message is sent when the subscriber record for the mobile subscriber is to be deleted in the VLR, for example, because the GSM mobile handset has been inactive for several days. In order to prevent a subscriber from being de-registered in database **230** by a VLR in a network in which the subscriber is no longer roaming, location query processor/subscriber registration manager **228** may track subscribers based on directory number (DN) and VLR ID. Only purge messages for dual mode subscribers that match the current VLR ID stored in database **228** may be used to update the entry. If the subscriber is not a dual mode subscriber, control proceeds to step **316** where the message is routed to the appropriate GSM HLR.

Thus, as illustrated in Figure 3, location query processor/subscriber registration manager **228** tracks the GSM registration status of a mobile subscriber based on GSM registration and purge messages and does not change the GSM registration status in response to IS-41 registration messages. As will be described in detail below, this allows calls to be routed to the subscriber's GSM phone with priority over the subscriber's IS-41 phone. In an alternate embodiment of the invention, which may be used in networks in which subscribers use separate phones for different subscriptions and IS-41 is the preferred subscription, the IS-41 registration status, rather than the GSM registration status, may be tracked in order to give priority to the subscriber's IS-41 phone. In yet another alternate embodiment, which may be used in networks in which subscribers use the same phone for multiple subscriptions, the GSM registration status and the IS-41 registration status may be tracked. In networks in which number migration signaling platform **100** tracks both the IS-41 and GSM registration status of a subscriber, the processing steps may be similar to those illustrated in Figure 3 except that the subscriber status is updated when either a GSM or IS-41 registration message is received. In addition, in dual mode, single handset networks it is not necessary to update the registration status when a GSM purge message is received. Whether a single registration status or multiple registration statuses are tracked will

- 16 -

depend on the type of network in which the node is operating, as described above, and is preferably configurable by the service provider.

Figure 4 is a message flow diagram illustrating exemplary messages associated with tracking the GSM registration status of a subscriber according to an embodiment of the present invention. Referring to Figure 4, GSM MSC/VLR **106** initiates an update location message when a dual mode subscriber operates his or her GSM handset in an area corresponding to GSM MSC/VLR **106**. GSM MSC/VLR **106** forwards the update locate message to number migration signaling platform **100**. Within number migration signaling platform **100**, location query processor/subscriber registration manager **228** changes the GSM registration status for the subscriber in database **230** to REGISTERED. Location query processor/subscriber registration manager **228** also translates the destination point code in the message to that of GSM HLR **110** and forwards the update location message to GSM HLR **110**. A similar transaction may occur when GSM MSC/VLR **106** detects that the subscriber has left the area managed by GSM MSC/VLR **106**. In such a situation, GSM MSC/VLR **106** would send a purge mobile subscriber message to mark the subscriber unreachable in GSM HLR **110**. Number migration signaling platform **100** would change the subscriber registration status in database **230** to NOT REGISTERED upon receiving the purge mobile subscriber message that matches the VLR ID corresponding to the entry in database **230**.

In order to track only the IS-41 registration status of a subscriber, the message flow would be similar to that illustrated in Figure 4 except that the registration status in database **230** would be updated in response to receiving an IS-41 registration message from an IS-41 MSC/VLR. In a network in which it is necessary to track the registration status of both IS-41 and GSM subscriptions, the registration status in database **230** would be updated in response to receiving an IS-41 registration message from an IS-41 MSC/VLR or a GSM registration message from a GSM MSC/VLR. In a network in which both registration statuses are tracked, the last received registration message preferably controls the registration status in database **230**. For example, if a

- 17 -

subscriber is not registered and a GSM registration message is received, the subscriber's registration status in database **230** will be GSM Registered. If an IS-41 registration message is received for the GSM registered subscriber, the subscriber status in database **230** will be changed from GSM Registered to IS-41 Registered. Similarly, if a GSM registration message is received for a subscriber who is IS-41 registered, the subscriber's registration status is preferably changed from IS-41 Registered to GSM Registered.

Once the subscriber's registration status is tracked in database **230**, number migration signaling platform **100** may process location query messages for calls to a variety of different subscriber types. Figure 5 is a block diagram illustrating exemplary mobile terminated call scenarios that may be handled or processed by number migration signaling platform **100** according to an embodiment of the present invention. Referring to Figure 5, block **500** represents exemplary processing for dual mode subscribers. As stated above, a dual mode subscriber may be an existing IS-41 subscriber who has migrated to GSM and kept the IS-41 service or a new subscriber of both IS-41 and GSM service. Within category **500**, incoming calls may originate from an IS-41 MSC, as indicated by block **502**. For such cases, processing varies depending on whether or not the subscriber is GSM registered, as indicated by blocks **504** and **506**. In addition, calls for dual mode subscribers may originate from a GSM MSC, as indicated by block **508**. In this category, the subscriber may be GSM registered, as indicated by block **510**, or not GSM registered, as indicated by block **512**.

Block **514** represents the category of processing for GSM-only subscribers having directory numbers outside of IS-41 ranges. This category includes new subscribers of GSM service or migrated subscribers who discontinue their IS-41 service. For these subscribers, number migration signaling platform **100** simply relays the messages to the appropriate GSM HLR as indicated by block **516**. Category **518** represents processing for GSM subscribers having directory numbers within IS-41 ranges. For example, such subscribers may have migrated to GSM from IS-41 and kept their former IS-41

- 18 -

directory numbers. For such cases, processing varies depending on whether the call originates from an IS-41 MSC as indicated by block **520** or a GSM MSC as indicated by block **522**. Finally, block **524** represents exemplary processing for subscribers with only an IS-41 handset who have not migrated to GSM service. In this situation, number migration signaling platform **100** preferably
5 relays the messages to the appropriate IS-41 HLR, as indicated by block **526**.

Figure 6 is a flow chart illustrating exemplary processing steps that may be performed by number migration signaling platform **100** in processing location query messages for mobile terminated calls. Referring to Figure 6, in
10 step **600**, number migration signaling platform **100** receives a mobile terminated location query message at LIM **200** or DCM **214**. In step **602**, the message is identified as an SCCP message and routed to DSM **224**. In step **604**, service selection module **226** at DSM **224** selects the appropriate service for the message. In this example, the service is assumed to be location query
15 processing/registration management because the message is a location query message. In step **606**, location query processor/subscriber registration manager **228** performs a lookup in database **230** using the MSISDN in the message. In step **607**, if the MSISDN has a special prefix, the message is routed to the appropriate HLR corresponding to the special prefix/MSISDN
20 combination, as indicated by step **608**.

If, however, the message does not include a special prefix, control proceeds to step **610** where location query processor/subscriber registration manager **228** extracts the subscriber type from database **230**. If the subscriber is a dual mode subscriber, control proceeds to step **612** where location query
25 processor/subscriber registration manager **228** determines whether the subscriber is GSM registered. If the subscriber is not GSM registered, control proceeds to step **614** where it is determined whether the location query message originated from an IS-41 MSC. If the message originated from an IS-41 MSC, the message is simply routed to the appropriate IS-41 HLR, as
30 indicated by step **608**. If the message did not originate from an IS-41 MSC, control proceeds to step **616** where location query processor/subscriber

- 19 -

registration manager **228** formulates and sends a response to the GSM MSC that originated the message. The response preferably has a prefix that will be used to route the call to an IS-41 MSC. This prefix is the same prefix used in step **607** to route the message to the appropriate IS-41 HLR. However, the
5 special prefix may be omitted without departing from the scope of the invention. If the prefix is omitted, the GSM MSC may simply route the call to a default IS-41 MSC.

Returning to step **612**, for dual mode subscribers, if the subscriber is determined to be GSM registered, control proceeds to step **618** where location
10 query processor/subscriber registration manager **228** determines whether the message originated from a GSM MSC. If the message originated from a GSM MSC, control proceeds to step **620** where the message is routed to the appropriate GSM HLR. If the message did not originate from a GSM MSC, control proceeds to step **622** where location query processor/subscriber
15 registration manager **228** formulates and sends a response to the IS-41 MSC with a special prefix added to the mobile identification number. The special prefix is used to route the call to the appropriate GSM MSC. This is the same special prefix used in step **606** to route the message to the appropriate GSM HLR.

20 Returning to step **610**, if the subscriber is determined to be a GSM subscriber with a directory number within an IS-41 range of directory numbers, control proceeds to step **618** where it is determined whether the location query message is from a GSM MSC. If the message is from a GSM MSC, the message is routed to the appropriate GSM HLR, as indicated in step **620**. If
25 the message is not from a GSM MSC, location query processor/subscriber registration manager **228** formulates and sends a response to the IS-41 MSC with a special prefix to direct the IS-41 MSC to route the call to the appropriate GSM MSC. However, in an alternate embodiment of the invention, the prefix may be omitted. If the prefix is omitted, the IS-41 MSC may simply route the
30 call to a GSM MSC by default.

- 20 -

Returning again to step **610**, if the subscriber type is determined to be IS-41-only with a directory number within an IS-41 range or GSM-only with a directory number within a GSM range, control proceeds to step **608** where location query processor/subscriber registration manager **228** extracts the appropriate HLR address from database **230** and routing function **210** routes the message to the appropriate IS-41 or GSM HLR. In this example, since the directory numbers are exclusively within IS-41 or GSM ranges, it is assumed that the location query messages originated from the MSC of the appropriate type.

10 The processing steps illustrated in Figure 6 will now be separately explained with regard to each scenario described in Figure 5 using signaling message flow diagrams. Figure 7 is a signaling message flow diagram illustrating exemplary signaling messages associated with a call originating from an IS-41 MSC for a dual mode subscriber who is not GSM registered.

15 Referring to Figure 7, IS-41 MSC **104** initiates an IS-41 location request message and forward the location request message to number migration signaling platform **100**. Within numbering migration signaling platform **100**, location query processor/subscriber registration manager **228** queries database **230** using the mobile identification number in the location request message.

20 Because the subscriber is a dual mode subscriber, location query processor/subscriber registration manager **228** determines the GSM registration status for a subscriber. Because the subscriber is not GSM registered, location query processor/subscriber registration manager **228** extracts the address of IS-41 HLR **108** from database **230**, inserts the address in the message, and routing function **210** routes the message to IS-41 HLR **108**.

25

Figure 8 is a message flow diagram illustrating exemplary messages associated with a call originating at an IS-41 MSC for a dual mode subscriber who is GSM registered. Referring to Figure 8, IS-41 MSC **104** initiates a location request message and forwards the location request message to number migration signaling platform **100**. Within number migration signaling

30

- 21 -

platform **100**, location query processor/subscriber registration manager **228** queries database **230** using the mobile identification number in the location request message determines that the dual mode subscriber is GSM registered. Accordingly, location query processor/subscriber registration manager **228** generates a location request return result message. In the return result message, a special prefix corresponding to GSM MSC **106** may be included. Location query processor/subscriber registration manager **228** then forwards the location request return result message to IS-41 MSC **104**. IS-41 MSC **104** routes the call to GSM MSC **106** based on the prefix, if included. If the prefix is not included, IS-41 MSC **104** may route the call to GSM MSC **106** by default.

In response to receiving the IAM message, GSM MSC **106** formulates a send routing information message including the prefix and the MSISDN number of the subscriber. Number migration signaling platform **100** receives the send routing information message, and location query processor/subscriber registration manager **228** queries database **230** using the combination of the prefix and the MSISDN number. The result of the query is the network address of GSM HLR **110**. Accordingly, location query processor/subscriber registration manager **228** inserts the address of GSM HLR **110** in the send routing information message, and routing function **210** routes the message to GSM HLR **110**. Because the special prefix is included, it is not necessary to determine subscriber type or registration status again. As a result, using the special prefix reduces unnecessary processing and call setup time. However, if the special prefix is not included, number migration signaling platform **100** would still route the SRI message to the appropriate destination because it would follow the procedures for routing a GSM originated location request to a GSM registered dual mode subscriber, as illustrated in Figure 6.

In the example illustrated in Figure 8, after receiving the SRI message, if number migration signaling platform **100** determines that the subscriber has been ported to another service provider, number migration signaling platform **100** may return an SRI_ACK message to GSM_MSC **106**. The SRI_ACK message may include a prefix corresponding to the GSM MSC currently

- 22 -

serving the subscriber. GSM_MSC **106**, upon receiving the SRI_ACK message with the prefix, would formulate an ISUP IAM message and forward the IAM message to the serving GSM_MSC. Thus, the present invention may be used to route messages relating to calls, SMS messages, and other services, even
5 when the called party has been ported to another service provider.

Figure 9 illustrates exemplary messaging associated with a call originating at a GSM MSC for a dual mode subscriber who is GSM registered. Referring to Figure 9, GSM MSC **106** generates a send routing information message and forwards the send routing information message to number
10 migration signaling platform **100**. Within number migration signaling platform **100**, location query processor/subscriber registration manager **228** queries database **230** using the MSISDN number in the send routing information message. The result of the query is an indication that the subscriber is GSM registered and the address of the appropriate GSM HLR. Accordingly, because
15 the message is an SRI message originating from GSM MSC, location query processor/subscriber registration manager **228** inserts the network address of GSM HLR **110** in the message, and routing function **210** routes the message to GSM HLR **110**.

Figure 10 is a message flow diagram illustrating exemplary messages
20 associated with call originating at a GSM MSC for a dual mode subscriber who is not GSM registered. Referring to Figure 10, GSM MSC **106** initiates a send routing information message. The send routing information message arrives at number migration signaling platform **100**. Location query processor/subscriber registration manager **228** queries database **230** using the MSISDN number in
25 the send routing information message, determines that the subscriber is not GSM registered, and extracts a prefix corresponding to IS-41 MSC **104** from database **230**. Location query processor/subscriber registration manager **228** then formulates a send routing information acknowledge message and forwards the message to GSM MSC **106**. The send routing information
30 acknowledge message includes the prefix of IS-41 MSC **104**. GSM MSC **106** routes the call to IS-41 MSC **104**. As discussed above, the prefix may be

- 23 -

omitted from the location request message, and GSM MSC **106** may route the call to IS-41 MSC **104** by default.

In response to receiving the IAM message, IS-41 MSC **104** initiates a location request message with the prefix attached to the mobile identification
5 number in the message. When number migration signaling platform **100** receives the message, location query processor/subscriber registration manager **228** queries the database using the prefix and MIN combination. The result is the address of IS-41 HLR **108**. The prefix reduces the need to re-check subscriber type or registration status. However, if the prefix is omitted,
10 the call will still be routed to the appropriate IS-41 HLR using the processing steps illustrated in Figure 6. Location query processor/subscriber registration manager **228** inserts the appropriate IS-41 HLR address in the message, and routing function **210** routes the message to IS-41 HLR **108**.

Figure 11 is a message flow diagram illustrating exemplary messaging
15 associated with a call originated at an IS-41 MSC for a GSM-only subscriber with a DN in an IS-41 range. Referring to Figure 11, IS-41 MSC **104** formulates a location request message and forwards the location request message to number migration signaling platform **100**. Number migration signaling platform **100** performs a lookup in database **230** and determines that the subscriber is a
20 migrated GSM-only subscriber with a DN in an IS-41 range. Accordingly, number migration signaling platform **100** formulates location request return result with an optional special prefix added to the MIN indicating to MSC **104** to route the call to GSM MSC **106**. IS-41 MSC **104** receives the location request return result message and routes the call to GSM MSC **106** by sending an
25 ISUP IAM message to GSM MSC **106**. In response to the ISUP IAM message, GSM MSC **106** formulates a send routing information message including the optional prefix and forwards the message to number migration signaling platform **100**. Number migration signaling platform **100** performs a lookup in database **230**, extracts the GSM HLR address corresponding to the prefix, and
30 routes the SRI message to GSM HLR **110**.

- 24 -

Figure 12 is a message flow diagram illustrating exemplary messaging associated with a call originating at a GSM MSC for a GSM subscriber with a DN in an IS-41-only range or outside of an IS-41 range. Referring to Figure 12, GSM MSC **106** originates an SRI message and forwards the message to
5 number migration signaling platform **100**. Number migration signaling platform **100** performs a lookup in database **230**, determines that the subscriber is a GSM subscriber, extracts the GSM HLR address, and routes the message to GSM HLR **110**.

In addition to routing messages relating to mobile terminated calls,
10 number migration signaling platform **100** is also capable of routing messages relating to mobile terminated SMS messages in a network with dual mode subscribers. Figure 13 is a block diagram illustrating exemplary overall processing that may be performed by number migration signaling platform **100** for mobile terminated SMS transactions. Referring to Figure 14, block **1300**
15 represents the processing category for dual mode subscribers. Within this category, the subscriber may be GSM registered, as indicated by block **1302** or not GSM registered as indicated by block **1304**. Category **1306** represents subscribers with IS-41 handsets who have not migrated. Within this category, registration status is irrelevant, and processing occurs according to mobile
20 terminated SMS procedures of the present invention, as indicated by block **1308**. Finally, block **1310** represents GSM-only subscribers with directory numbers both within and outside of GSM ranges. Within this category, registration status is likewise irrelevant. Accordingly, block **1312** represents the processing performed by the present invention for this category.

25 Figure 14 is a flow chart illustrating exemplary steps that may be performed in processing SMS routing request messages relating to the various subscriber types illustrated in Figure 13. Referring to Figure 14, in step **1400**, number migration signaling platform **100** receives a GSM SMS request for routing information message at LIM **200** or DCM **214**. In this example, it is
30 assumed that SMSCs **112** first send only GSM requests for routing information independently of the originating mobile subscriber type. In step **1402**, the

- 25 -

message is identified as an SCCP message and routed to DSM **224**. In step **1404**, service selection module **226** selects a service type for the message. In this example, it is assumed that the service type is location query processing/registration management. Accordingly, in step **1406**, location query processor/subscriber registration manager **228** performs a lookup in database **230** using the MSISDN number in the SMS location query message. In step **1408**, location query processor/subscriber registration manager **228** determines the subscriber type. If the subscriber is a dual mode subscriber, control proceeds to step **1410** where it is determined whether the subscriber is GSM registered. If the subscriber is GSM registered, in step **1412**, location query processor/subscriber registration manager **228** inserts the address of the GSM HLR in the message and routes the message to the appropriate GSM HLR.

In step **1410**, if the subscriber is not GSM registered, control proceeds to step **1414**, where location query processor/subscriber registration manager **228** sends a subscriber not available message to the originating short message service center. The short message service center formulates an IS-41 SMS request message. In step **1416**, number migration signaling platform **100** receives the IS-41 SMS request. In step **148**, number migration signaling platform **100** routes the IS-41 SMS request to an IS-41 HLR.

Referring back to step **1408**, if the subscriber is determined to be a GSM-only subscriber, control proceeds to step **1420** where the message is routed to the appropriate GSM HLR.

Returning again to step **1408**, if the subscriber is determined to be an IS-41-only subscriber, control proceeds to step **1414** where number migration signaling platform **100** sends a subscriber not available message to the originating short message service center. In response, the short message service center initiates an IS-41 SMS request. In step **1416** number migration signaling platform **100** receives the SMS request. In step **1418**, number migration signaling platform **100** routes the SMS request to the IS-41 HLR.

Figures 15-18 are message flow diagrams illustrating exemplary messages associated with mobile terminated SMS transactions. Referring to

- 26 -

Figure 15, the case is illustrated where a mobile terminated SMS message for a GSM registered dual mode subscriber is sent to number migration signaling platform **100**. In Figure 15, short message service center **112** initiates an SRI_for_SM message and forwards the message to number migration signaling platform **100**. Within number migration signaling platform **100**, location query processor/subscriber registration manager **228** queries database **230** using the MSISDN number in the SRI_for_SM message and identifies the subscriber as being a dual mode, GSM registered subscriber. Accordingly, location query processor/subscriber registration manager **228** extracts the HLR address for the GSM HLR to which the message should be routed, inserts the address in the message, and routing function **210** routes the message to GSM HLR **110**.

Figure 16 illustrates the case for a mobile terminated SMS message for a dual mode subscriber who is not GSM registered. Referring to Figure 16, SMSC **112** sends a SRI_for_SM message to number migration signaling platform **100**. Within number migration signaling platform **100**, location query processor/subscriber registration manager **228** queries database **230** using the MSISDN number in the message, and determines that the subscriber is not GSM registered. Accordingly, location query processor/subscriber registration manager **228** formulates a send routing information for short message acknowledge message indicating that the subscriber is not available and forwards the message to SMSC **112**. Upon receiving this message, SMSC **112** generates an IS-41 SMS request message and sends the message to number migration signaling platform **100**. Number migration signaling platform **100** routes the SMS message to the appropriate HLR without re-checking subscriber registration status.

Figure 17 illustrates exemplary messaging for the case of a mobile terminated SMS message for an IS-41, non-migrated subscriber. Referring to Figure 17, SMSC **112** sends an SRI_for_SM message to number migration signaling platform **100**. Number migration signaling platform **100** performs a lookup in database **230** using the MSISDN in the SRI_for_SM message and

- 27 -

determines that an entry does not exist for the IS-41 subscriber. Number migration signaling platform **100** formulates a UDTs error message indicating that an entry was not present and sends the message to SMSC **112**. In response, SMSC **112** generates an IS-41 SMS request and forwards the SMS
5 request and forwards the message to number migration signaling platform **100**. Number migration signaling platform **100** extracts the address of the appropriate IS-41 HLR using the MIN in the SMS request message and routes the SMS request message to IS-41 HLR **108**.

Figure 18 is a signaling message flow diagram illustrating exemplary
10 messaging for the case of a mobile terminated SMS transaction for a GSM-only subscriber. Referring to Figure 18, SMSC **112** generates an SRI_for_SM message and sends the message to number migration signaling platform **100**. Number migration signaling platform **100** determines the HLR to which the message should be routed and forwards the message to HLR **110**.

15 In Figures 15-18, it is assumed that SMSC **112** first formulates a GSM SRI_for_SM message independently of the mobile originating subscriber type. In an alternate embodiment of the invention, SMSC **112** may formulate both a GSM SRI_for_SM message and an IS-41 SMS Request message for each mobile terminated SMS transaction. Figure 19 is a message flow diagram
20 illustrating exemplary signaling associated with a mobile terminated SMS message for a GSM registered dual mode subscriber. Referring to Figure 19, SMSC **112** simultaneously generates SRI_for_SM and SMS Request messages. Number migration signaling platform **100** receives both messages and location query processor/subscriber registration manager **228** queries the
25 database and locates entries corresponding to the MSISDN and the MIN. However, because the subscriber is GSM registered, location query processor/subscriber registration manager **228** extracts only the GSM HLR address from database **230**. In this case, location query processor/subscriber registration manager **228** inserts the address corresponding to the GSM HLR in
30 the SRI message, and routing function **210** routes the message to GSM HLR **110**.

- 28 -

Figure 20 illustrates exemplary messaging associated with the mobile terminated SMS transaction for a subscriber who is not GSM registered. Referring to Figure 20, SMSC **112** simultaneously formulates SRI_for_SM and SMS request messages in response to a request by a subscriber to deliver an SMS message. Number migration signaling platform **100** receives the messages and formulates two queries to database **230**. Because the subscriber is not GSM registered, location query processor/subscriber registration manager **228** extracts only the IS-41 HLR address. Location query processor/subscriber registration manager **228** inserts the address for IS-41 HLR **108** in the message, and routing function **210** routes the message to IS-41 HLR **108**.

Figure 21 illustrates exemplary messaging associated with the mobile terminated SMS transaction for a new GSM-only subscriber. Referring to Figure 21, SMSC **112** simultaneously formulates SRI_for_SM and SMS request messages. Number migration signaling platform **100** receives the messages and performs a lookup in database **230**. However, only SRI_for_SM message results in a match in database **230** because the DN in the SRI_for_SM message is within a GSM-only range. Accordingly, location query processor/subscriber registration manager **228** inserts the address of GSM HLR **110** in the message, and routing function **210** routes the message to GSM HLR **110**.

Figure 22 illustrates exemplary messaging associated with a mobile terminated SMS transaction for a non-migrated IS-41 subscriber. Referring to Figure 22, SMSC **112** simultaneously formulates SRI_for_SM and SMS request messages. Number migration signaling platform **100** receives both messages and queries database **230** based on both messages. The SMS request message results in a match in database **230** because the DN in the message is within an IS-41 only range. Accordingly, location query processor/subscriber registration manager **228** inserts the address of IS-41 HLR **108** in the message, and routing function **210** routes the message to IS-41 HLR **108**.

- 29 -

Figure 23 illustrates exemplary messaging associated with an SRI message from a non-home SMSC. Referring to Figure 23, non-home SMSC 112 sends an SRI_for_SM message to number migration signaling platform 100. In response to receiving this message, number migration signaling platform 100 determines whether the message originated from a home SMSC. In this example, it is assumed that the message did not originate from a home SMSC. Accordingly, subscriber registration status is not checked. A lookup is simply performed in database 230, and the routing address for GSM HLR 110 is extracted. The message is then routed to GSM HLR 110.

10 In the examples illustrated in Figures 15-23, it is assumed that the SMSCs are dual mode SMSCs capable of initiating SMS location query and other signaling messages in either of the application layer mobile signaling protocols. However, the present invention is not limited to use in such an environment. In some networks, there may be separate SMSCs for each
15 application layer mobile signaling protocol. In such a network environment, a number migration signaling platform of the present invention would operate using the same processing steps illustrated in Figure 14. For example, when number migration signaling platform 100 receives an IS-41 SMS location query message from an IS-41 SMSC for a GSM registered subscriber, number
20 migration signaling platform 100 preferably returns a message to the IS-41 MSC indicating that the subscriber is not reachable. In response to this message, the IS-41 MSC may send the SMS message to a GSM SMSC via the SMPP protocol. The GSM MSC would then send a GSM SMS location query message to number migration signaling platform 100. Number migration
25 signaling platform 100 would route the GSM location query message to the appropriate GSM HLR. If a GSM SMSC originates a GSM SMS location query message for a subscriber who is not GSM registered, number migration signaling platform 100 may return a response to the GSM SMSC indicating the subscriber is not reachable. The GSM SMSC may then send the SMS
30 message to an IS-41 SMSC via the SMPP protocol. The IS-41 SMSC may then initiate an SMS location query message. Number migration signaling

- 30 -

platform **100** would then route the IS-41 SMS location query message to the appropriate IS-41 HLR. If number migration signaling platform **100** receives a location query message from an IS-41 SMSC for a subscriber who is not GSM registered or from a GSM SMSC for a subscriber who is GSM registered,
5 number migration signaling platform **100** simply routes the SMS location query message to the appropriate HLR.

Thus, as described above, the present invention is capable of routing messages to the appropriate destination and for rerouting calls in a network that includes dual mode subscribers, migrated subscribers, new subscribers of
10 the migrated-to signaling protocol, and existing subscribers of the migrated-from signaling protocol that do not switch application layer mobile signaling protocols. In addition, in dual mode, dual handset networks, because the present invention preferably tracks the registration status of one application layer mobile signaling protocol for dual mode subscribers, one application layer
15 mobile signaling protocol can be given priority over the other application layer mobile signaling protocol. In dual mode, single handset networks, because the present invention preferably tracks the registration status of both application layer mobile signaling protocols for dual mode subscribers, messages are routed to the destination node of the appropriate type.

20 While the examples above relate primarily to IS-41 and GSM signaling protocols, the present invention is not limited to these protocols. The methods and systems for processing and routing signaling messages described herein are applicable to any network in which subscribers use multiple application layer mobile signaling protocols with the same DN.

25 In addition, even though the examples above relate primarily to migrating between IS-41 and GSM protocols, the present invention is not limited to these examples. For example, the methods and systems described herein may be used to process and route signaling messages for subscribers that migrate between any suitable protocols. For example, the methods and systems
30 described herein may be used to allow subscribers to migrate between TDMA and CDMA protocols or GSM and non-GSM CDMA protocols with the same

- 31 -

directory number used to contact the subscriber in both protocols. In such an implementation, one protocol may be given priority over the other protocol in the manner described above for migration between IS-41 and GSM. In addition, the same type of signaling may be used in the migrated-from and the migrated-to protocol. In such a situation, the equipment ID may be used to identify the mobile handset type and thus the protocol in which the subscriber is currently registered.

In addition, in the examples described above, SS7 and IP links are used to carry the application layer mobile signaling protocols. However, the present invention is not limited to using SS7 or IP transport. The methods and systems described herein for facilitating migration between application layer mobile signaling protocols may be used with any underlying transport capable of carrying an application layer mobile signaling protocol. Additional examples, other than IP and SS7, include any of the transport protocols specified for third generation mobile telecommunications networks, for example, as described in the various technical documents available at www.3gpp.org.

In some of the call flows described above, such as those illustrated in Figures 15-23, registration status for dual-mode subscribers is tracked and the tracked registration status is used to route location query messages to the correct HLR for providing SMS service to the subscriber. However, the present invention is not limited to tracking the registration status of a dual mode subscriber and using the tracked registration status to deliver SMS service. For example, additional services, such as intelligent network (IN) and customized application of mobile enhanced logic (CAMEL) services, may be provided to dual handset subscribers using the methods and systems for tracking the registration status of the subscribers as described herein. In one implementation, the registration status of a dual mode subscriber may be tracked as described above. An IN or CAMEL services node may generate a message intended to deliver an IN or CAMEL service to the subscriber if the subscriber is registered in a particular mode. For example, such services may be provided to GSM subscribers but not to IS-41 subscribers or vice versa. In

- 32 -

such a situation, the subscriber's registration status may be checked. If the subscriber is registered according to protocol corresponding to the service, the message may be routed to a node for providing the particular service to the subscriber. If the subscriber is not registered in the protocol corresponding to
5 the service, the message may be discarded. In this manner, the present invention uses the tracked registration status of dual mode subscribers to deliver supplementary services in addition to SMS.

It will be understood that various details of the invention may be changed without departing from the scope of the invention. Furthermore, the
10 foregoing description is for the purpose of illustration only, and not for the purpose of limitation, as the invention is defined by the claims as set forth hereinafter.

CLAIMS

What is claimed is:

1. A method for routing signaling messages in a network in which some subscribers have a plurality of application layer mobile signaling protocol
5 subscriptions and use the same directory number for the subscriptions, the method comprising:
 - (a) in a node distinct from a home location register (HLR) or a visitor
10 location register (VLR), tracking the registration status in a first application layer mobile signaling protocol for a subscriber of both the first application layer mobile signaling protocol and a second application layer mobile signaling protocol with the same directory number being used to contact the subscriber in both the first and second application layer mobile signaling protocols;
 - (b) at the node, receiving a location query message from a mobile
15 switching center (MSC) of the first application layer mobile signaling protocol, the location query message requesting the location of the mobile subscriber for delivering a call to the mobile subscriber;
 - (c) determining whether the subscriber is registered according to the
20 first application layer mobile signaling protocol; and
 - (d) in response to the subscriber being registered in the first application layer mobile signaling protocol, determining an address of a home location register (HLR) of the first application layer mobile signaling protocol and routing the location query
25 message from the node to the HLR of the first application layer mobile signaling protocol.
2. The method of claim 1 wherein the first application layer mobile
30 signaling protocol includes the Global System for Mobile communications (GSM) protocol and the second application layer mobile signaling protocol includes the Interim Standard-41 (IS-41) protocol and wherein tracking the registration status in the first

- 34 -

application layer mobile signaling protocol includes tracking only the registration status in the GSM protocol.

3. The method of claim 1 wherein the first application layer mobile signaling protocol includes the Interim Standard-41 (IS-41) protocol and the second application layer mobile signaling protocol includes the Global System for Mobile communications (GSM) protocol and wherein tracking the registration status in the first application layer mobile signaling protocol includes tracking only the registration status in the IS-41 protocol.
4. The method of claim 1 wherein the first application layer mobile signaling protocol includes a signaling protocol associated with a code division multiple access (CDMA) protocol and the second application layer mobile signaling protocol comprises a signaling protocol associated with a time division multiple access (TDMA) protocol and wherein tracking the registration status in the first application layer mobile signaling protocol includes tracking only the registration status in the CDMA protocol.
5. The method of claim 4 wherein the signaling protocols associated with the CDMA and TDMA protocols are the same and wherein the method further comprises identifying whether a subscriber is registered in the CDMA or the TDMA protocol using an equipment identifier extracted from a mobile call signaling message.
6. The method of claim 1 wherein the first application layer mobile signaling protocol includes a signaling protocol associated with a non-Global System for Mobile communications (GSM) code division multiple access (CDMA) protocol and wherein the second application layer mobile signaling protocol includes a signaling protocol associated with a GSM CDMA protocol and wherein tracking the registration status in the first application layer mobile signaling protocol includes tracking only the registration status in the non-GSM CDMA protocol.

- 35 -

7. The method of claim 1 comprising tracking the registration status in the second application layer mobile signaling protocol.
8. The method of claim 1 wherein tracking the registration status at a node distinct from an HLR or a VLR includes tracking the registration status in a database operatively associated with a signal transfer point (STP).
9. The method of claim 1 comprising, in response to determining that the subscriber is not registered according to the first application layer mobile signaling protocol, formulating and sending a response to the MSC of the first application layer mobile signaling protocol, the response including a prefix for routing the call to an MSC of the second application layer mobile signaling protocol.
10. The method of claim 1 comprising, in response to determining that the subscriber is not registered according to the first application layer mobile signaling protocol, formulating and sending a response message to the MSC of the first application mobile signaling protocol indicating that the subscriber is not reachable, and wherein, in response to receiving the response message, the MSC of the first application layer mobile signaling protocol is adapted to route the call to an MSC of the second application layer mobile signaling protocol.
11. The method of claim 1 comprising receiving a location query message from an MSC of the second application layer mobile signaling protocol, the location query message requesting the location of the mobile subscriber for delivering a call to the mobile subscriber.
12. The method of claim 11 comprising, in response to determining that the mobile subscriber is registered according to the first application layer mobile signaling protocol, formulating and sending a response to the MSC of the second application layer mobile signaling protocol, the response including a prefix for triggering the MSC of the second application layer mobile signaling protocol to route the call to the MSC of the first application layer mobile signaling protocol.

- 36 -

13. The of method of claim 11 comprising, in response to determining that the mobile subscriber is registered according to the first application layer mobile signaling protocol, formulating and sending a response message to the MSC of the second application layer mobile signaling protocol, wherein the MSC of the second application layer mobile signaling protocol is adapted to route the call to the MSC of the first application layer mobile signaling protocol by default in response to receiving the response message.
14. The method of claim 11 comprising, in response to determining that the mobile subscriber is not registered according to the first application layer mobile signaling protocol, determining an address of an HLR of the second application layer mobile signaling protocol and routing the location query message to the HLR of the second application layer mobile signaling protocol.
15. A method for routing short message service (SMS) messages in a network in which subscribers have subscriptions of both first and second application layer mobile signaling protocols and use the same directory number for both application layer mobile signaling protocols, the method comprising:
- (a) receiving, at a short message service center (SMSC), an SMS message to be delivered to a subscriber of both the first and second application layer mobile signaling protocols;
 - (b) sending, from the SMSC, a request for SMS routing information in the first application layer mobile signaling protocol, the request for SMS routing information including a directory number corresponding to the subscriber of both the first and second application layer mobile signaling protocols;
 - (c) at a node distinct from a home location register (HLR) or a visitor location register (VLR), receiving the request for SMS routing information and determining whether the subscriber is registered

- 37 -

according to the first application layer mobile signaling protocol;
and

- (d) in response to determining that the subscriber is registered according to the first application layer mobile signaling protocol, routing the request for routing information from the node to an HLR of the first application layer mobile signaling protocol.

16. The method of claim 15 wherein the first application layer mobile signaling protocol includes the Interim Standard-41 (IS-41) protocol and the second application layer mobile signaling protocol includes the Global System for Mobile communications (GSM) protocol.

17. The method of claim 15 wherein the first application layer mobile signaling protocol includes the Global System for Mobile communications (GSM) protocol and the second application layer mobile signaling protocol includes the Interim Standard-41 (IS-41) protocol.

18. The method of claim 15 wherein sending a request for SMS routing information in the first application layer mobile signaling protocol includes sending a request for SMS routing information in the first application mobile signaling protocol independently of the origin of the SMS message.

19. The method of claim 15 wherein performing a lookup in a database distinct from an HLR or a VLR includes performing a lookup in a database operatively associated with a signaling transfer point (STP).

20. The method of claim 15 comprising in response to determining that the subscriber is not registered according to the first application layer mobile signaling protocol, formulating a response to the SMSC indicating that the subscriber is not reachable.

21. The method of claim 20 comprising, in response to receiving the subscriber not reachable message, formulating and sending from the SMSC a request for SMS routing information in the second application layer mobile signaling protocol.

- 38 -

22. The method of claim 20 comprising, in response to receiving the subscriber not reachable message, formulating and sending from the SMSC, an SMPP message to an SMSC of the second application layer mobile signaling protocol.
- 5 23. The method of claim 15 comprising, concurrently with step (b), sending, from the SMSC, a request for SMS routing information in the second application layer mobile signaling protocol, the request for SMS routing information including the directory number corresponding to the subscriber of both the first and second application layer mobile signaling protocols.
- 10 24. The method of claim 23 comprising, in response to the subscriber being registered according to the first application layer mobile signaling protocol, routing the request for SMS routing information in the first application mobile signaling protocol to an HLR of the first application layer mobile signaling protocol.
- 15 25. The method of claim 23 comprising, in response to the subscriber not being registered according to the first application layer mobile signaling protocol, routing the request for SMS routing information in the second application layer mobile signaling protocol to an HLR of the second application layer mobile signaling protocol.
- 20 26. A method for providing services to mobile communications subscribers of a plurality of different application layer mobile signaling protocols, the method comprising:
- 25 (a) tracking, in a database distinct from a home location register (HLR) or a visitor location register (VLR), the registration status of a subscriber of first and second application layer mobile signaling protocol;
- (b) receiving a message relating to providing a service to the subscriber;
- 30 (c) determining whether the subscriber is registered according to the first application layer mobile signaling protocol;

- 39 -

- (d) in response to determining that the subscriber is registered according to the first application layer mobile signaling protocol, routing the message to a node providing the service to the subscriber; and
 - 5 (e) in response to determining that the subscriber is not registered according to the first application layer mobile signaling protocol, discarding the message.
- 27. The method of claim 26 wherein the service comprises at least one of an intelligent network (IN) and a customized application of mobile enhanced logic (CAMEL) service.
- 10 28. A number migration signaling platform comprising:
 - (a) a communications link module for receiving messages from a communications link and for identifying messages that require processing prior to final routing;
 - 15 (b) a location query routing and subscriber registration status database operatively associated with the communications link module for storing registration status information in a first application layer mobile signaling protocol for subscribers of both first and second application layer mobile signaling protocols; and
 - 20 (c) a location query processor/subscriber registration manager operatively associated with the location query routing and subscriber registration status database for receiving the messages that require processing prior to final routing, for tracking the registration status in the first application layer mobile signaling protocol for subscribers of both the first and second
 - 25 application layer mobile signaling protocols in the location query routing and subscriber registration status database and for routing signaling messages for calls and SMS messages to the appropriate destinations based on the tracked registration status.

- 40 -

29. The number migration signaling platform of claim 28 wherein the communications link module comprises an SS7 communications link module.
30. The number migration signaling platform of claim 28 wherein the communications link module comprises an Internet protocol (IP) communications link module.
31. The number migration signaling platform of claim 28 wherein the first application layer mobile signaling protocol comprises the Interim Standard-41 (IS-41) protocol and the second application layer mobile signaling protocol comprises the Global System for Mobile communications (GSM) protocol and wherein the location query processor/subscriber registration manager is adapted to track only the IS-41 registration status.
32. The number migration signaling platform of claim 28 wherein the first application layer mobile signaling protocol comprises the Global System for Mobile communications (GSM) protocol and the second application layer mobile signaling protocol comprises the Interim Standard-41 (IS-41) protocol and wherein the location query processor/subscriber registration manager is adapted to track only the GSM registration status.
33. The number migration signaling platform of claim 28 wherein the first application layer mobile signaling protocol comprises the Global System for Mobile communications (GSM) protocol and the second application layer mobile signaling protocol comprises the Interim Standard-41 (IS-41) protocol and wherein the location query processor/subscriber registration manager is adapted to track both the GSM and IS-41 registration status.
34. The number migration signaling platform of claim 28 wherein, in response to receiving a location query message from a mobile switching center (MSC) of the first application layer mobile signaling protocol relating to a mobile subscriber being registered according to the first

- 41 -

application layer mobile signaling protocol, the location query processor/subscriber registration manager is adapted to route the location query message to a home location register of the first application layer mobile signaling protocol.

5 35. The number migration signaling platform of claim 28 wherein, in response to receiving a location query message from a mobile switching center (MSC) of the first application layer mobile signaling protocol relating to a mobile subscriber who is not registered according to the first application layer mobile signaling protocol, the location query
10 processor/subscriber registration manager is adapted to formulate a response to the location query message.

36. The number migration signaling platform of claim 35 wherein the response includes a prefix corresponding to an MSC of the second application layer mobile signaling protocol.

15 37. The number migration signaling platform of claim 28 wherein, in response to receiving a location query message from a mobile switching center (MSC) of the second application layer mobile signaling protocol for a subscriber being registered according to the first application layer mobile signaling protocol, the location query processor/subscriber
20 registration manager is adapted to send a response to the mobile switching center of the second application layer mobile signaling protocol.

38. The number migration signaling platform of claim 37 wherein the response includes a prefix corresponding to the MSC of the first
25 application layer mobile signaling protocol.

39. The number migration signaling platform of claim 28 wherein, in response to receiving a location query message from a mobile switching center of the second application layer mobile signaling protocol for a subscriber who is not registered according to the first application layer
30 mobile signaling protocol, the location query processor/subscriber

- 42 -

registration manager is adapted to route the location query message to an HLR of the second application layer mobile signaling protocol.

40. The number migration signaling platform of claim 28 wherein the communications link module, the location query routing and subscriber registration status database, and the location query processor/subscriber registration manager comprise components of a signal transfer point (STP).
41. The number migration signaling platform of claim 28 wherein, in response to receiving a location query message from a short message service center of the first application layer mobile signaling protocol for a subscriber who is not registered according to the first application layer mobile signaling protocol, the location query processor/subscriber registration manager is adapted to return a subscriber unreachable message to the SMSC of the first application layer mobile signaling protocol for triggering the SMSC of the first application layer mobile signaling protocol to route the SMS message to an SMSC of the second application layer mobile signaling protocol.


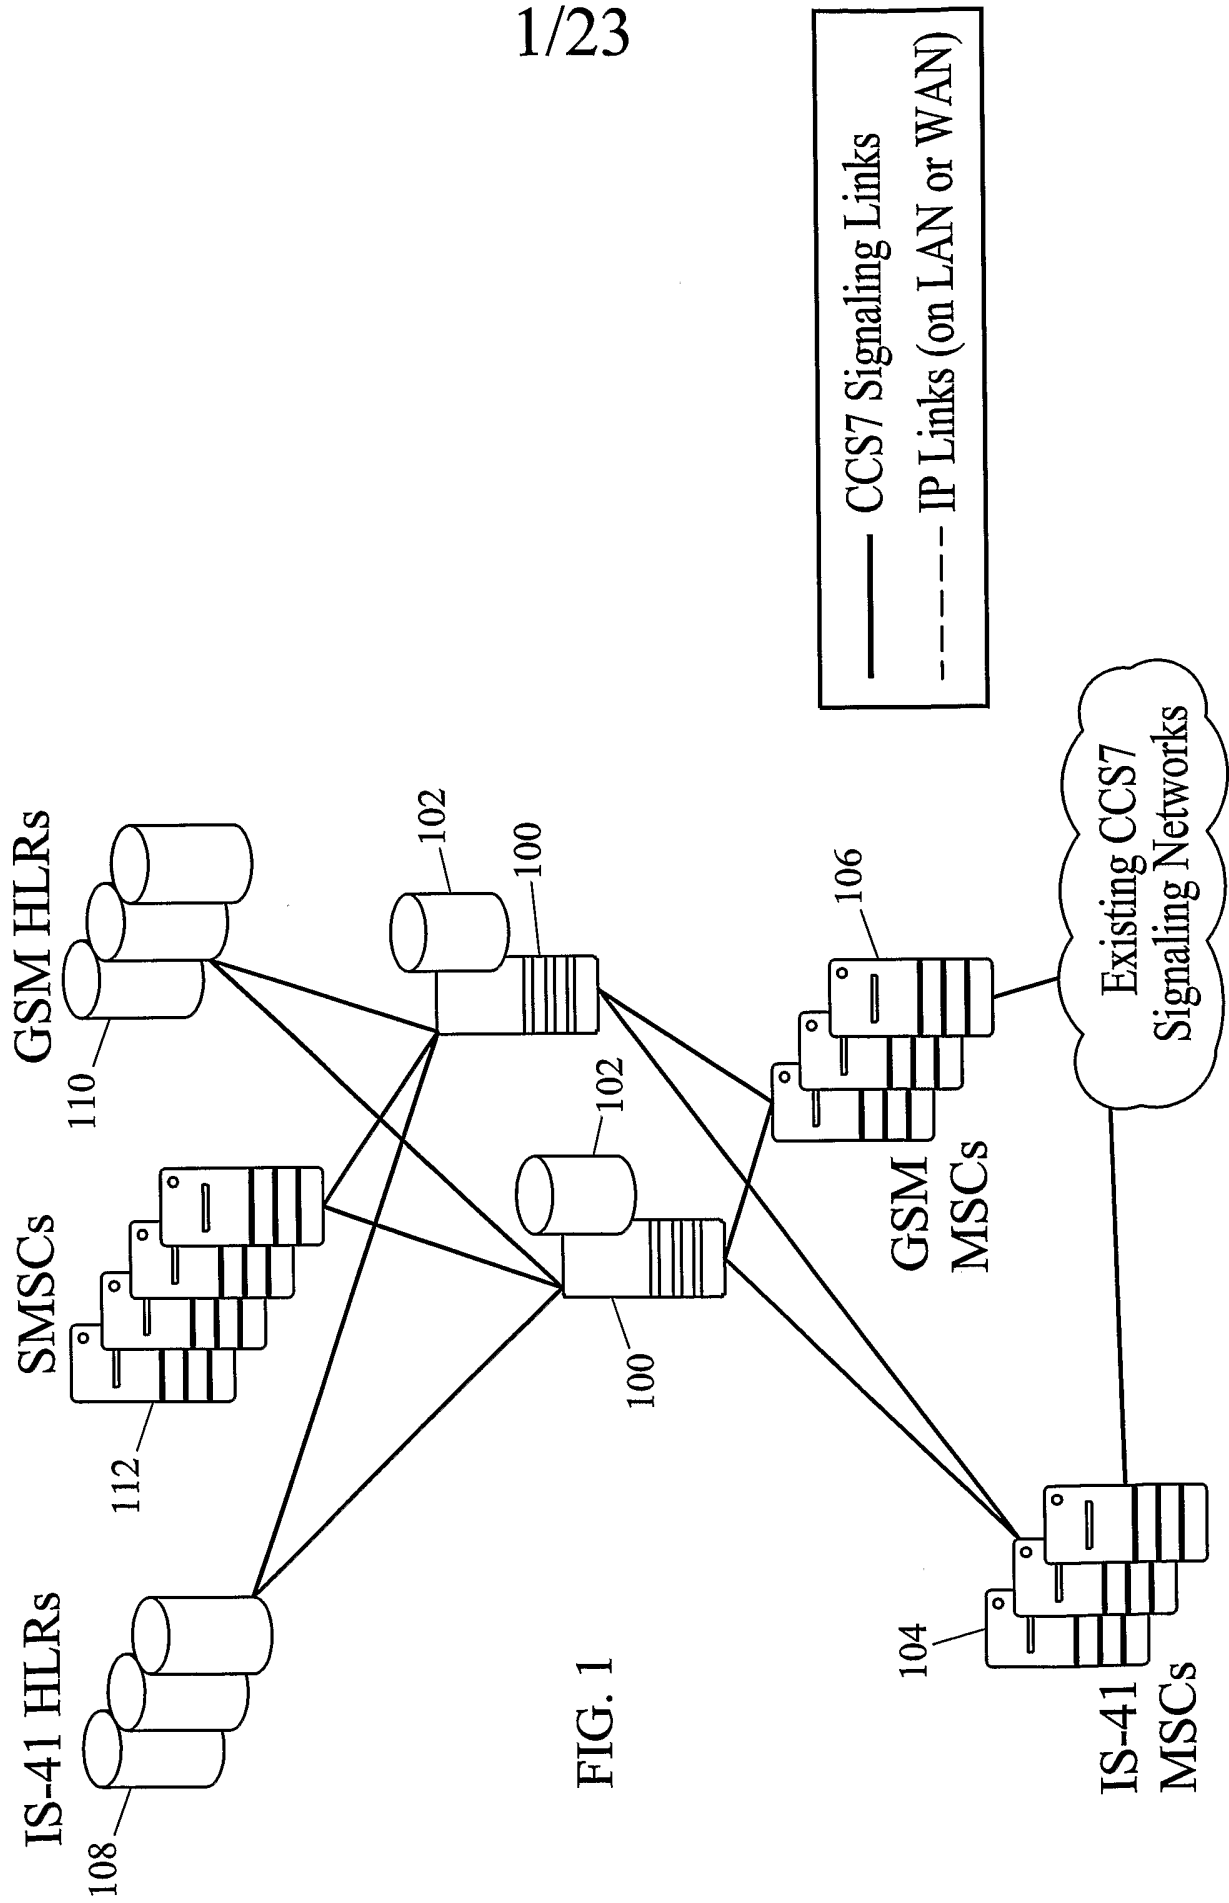


FIG. 1

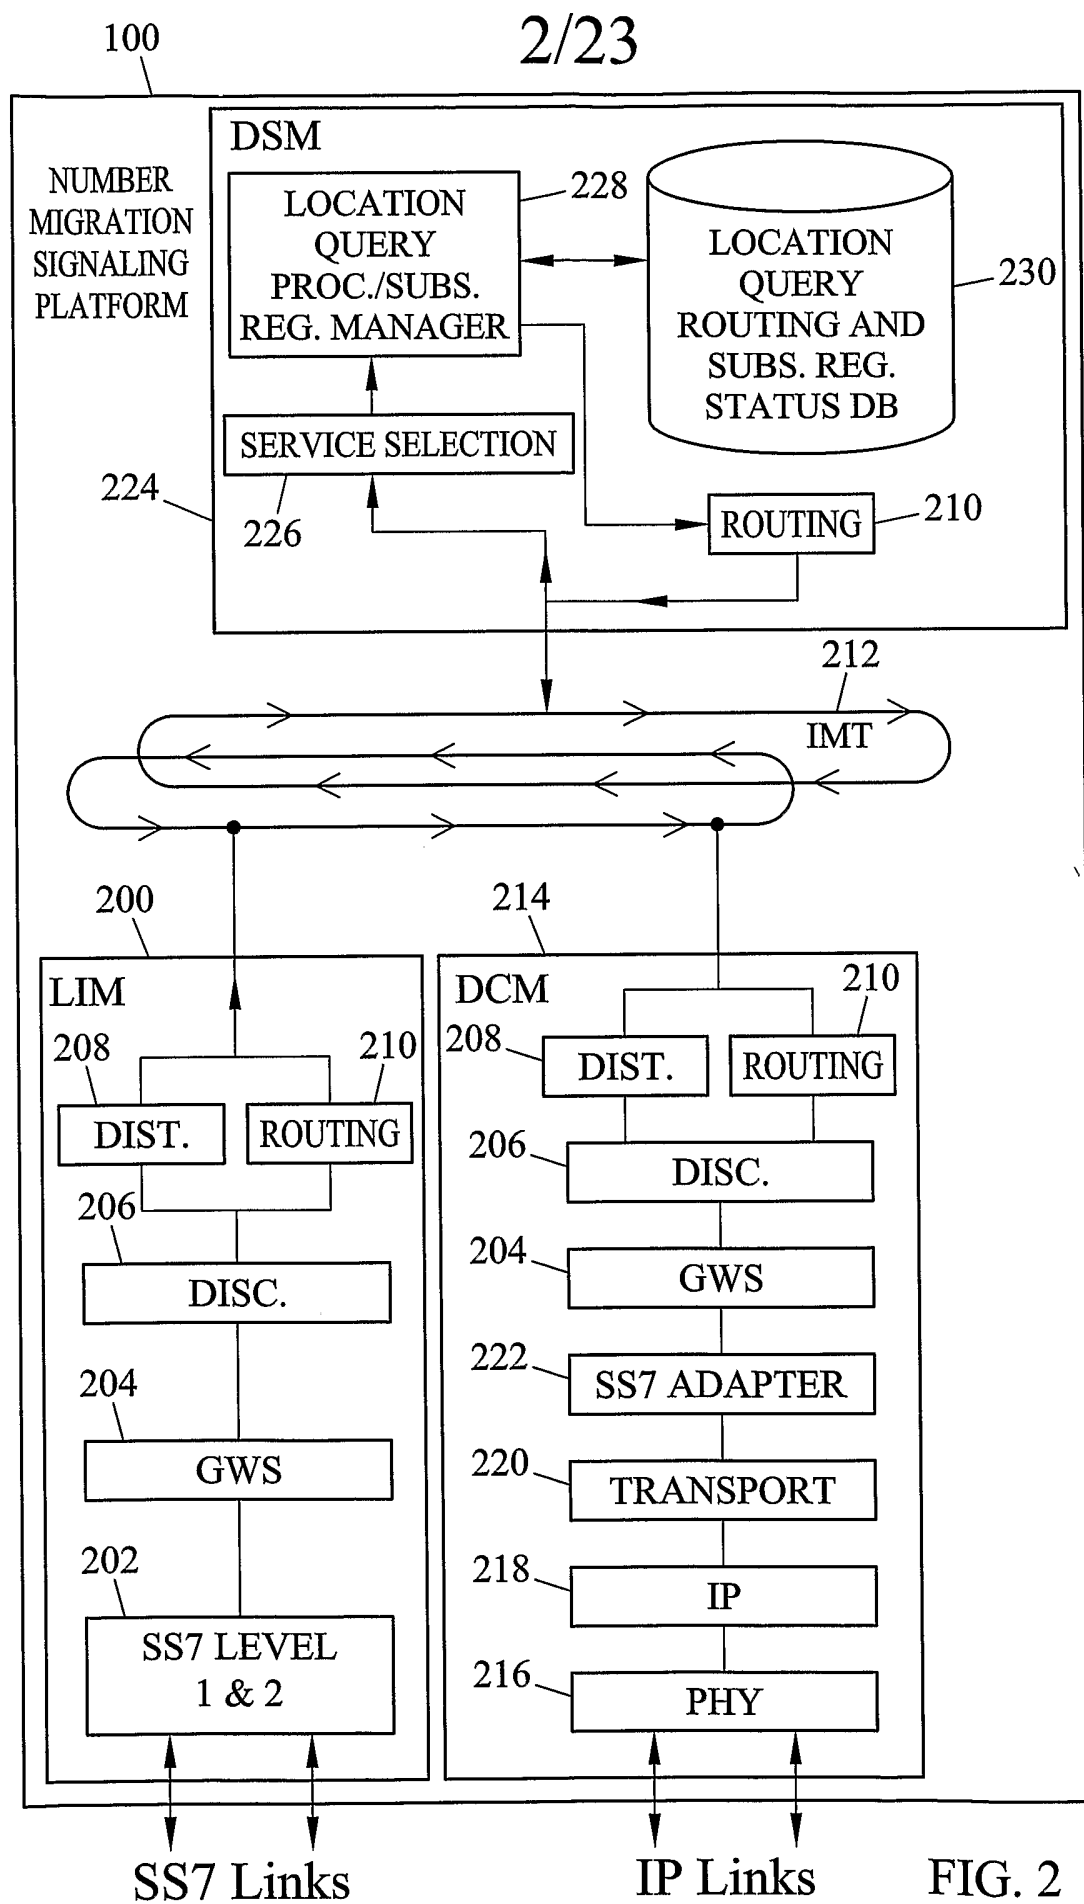

3/23

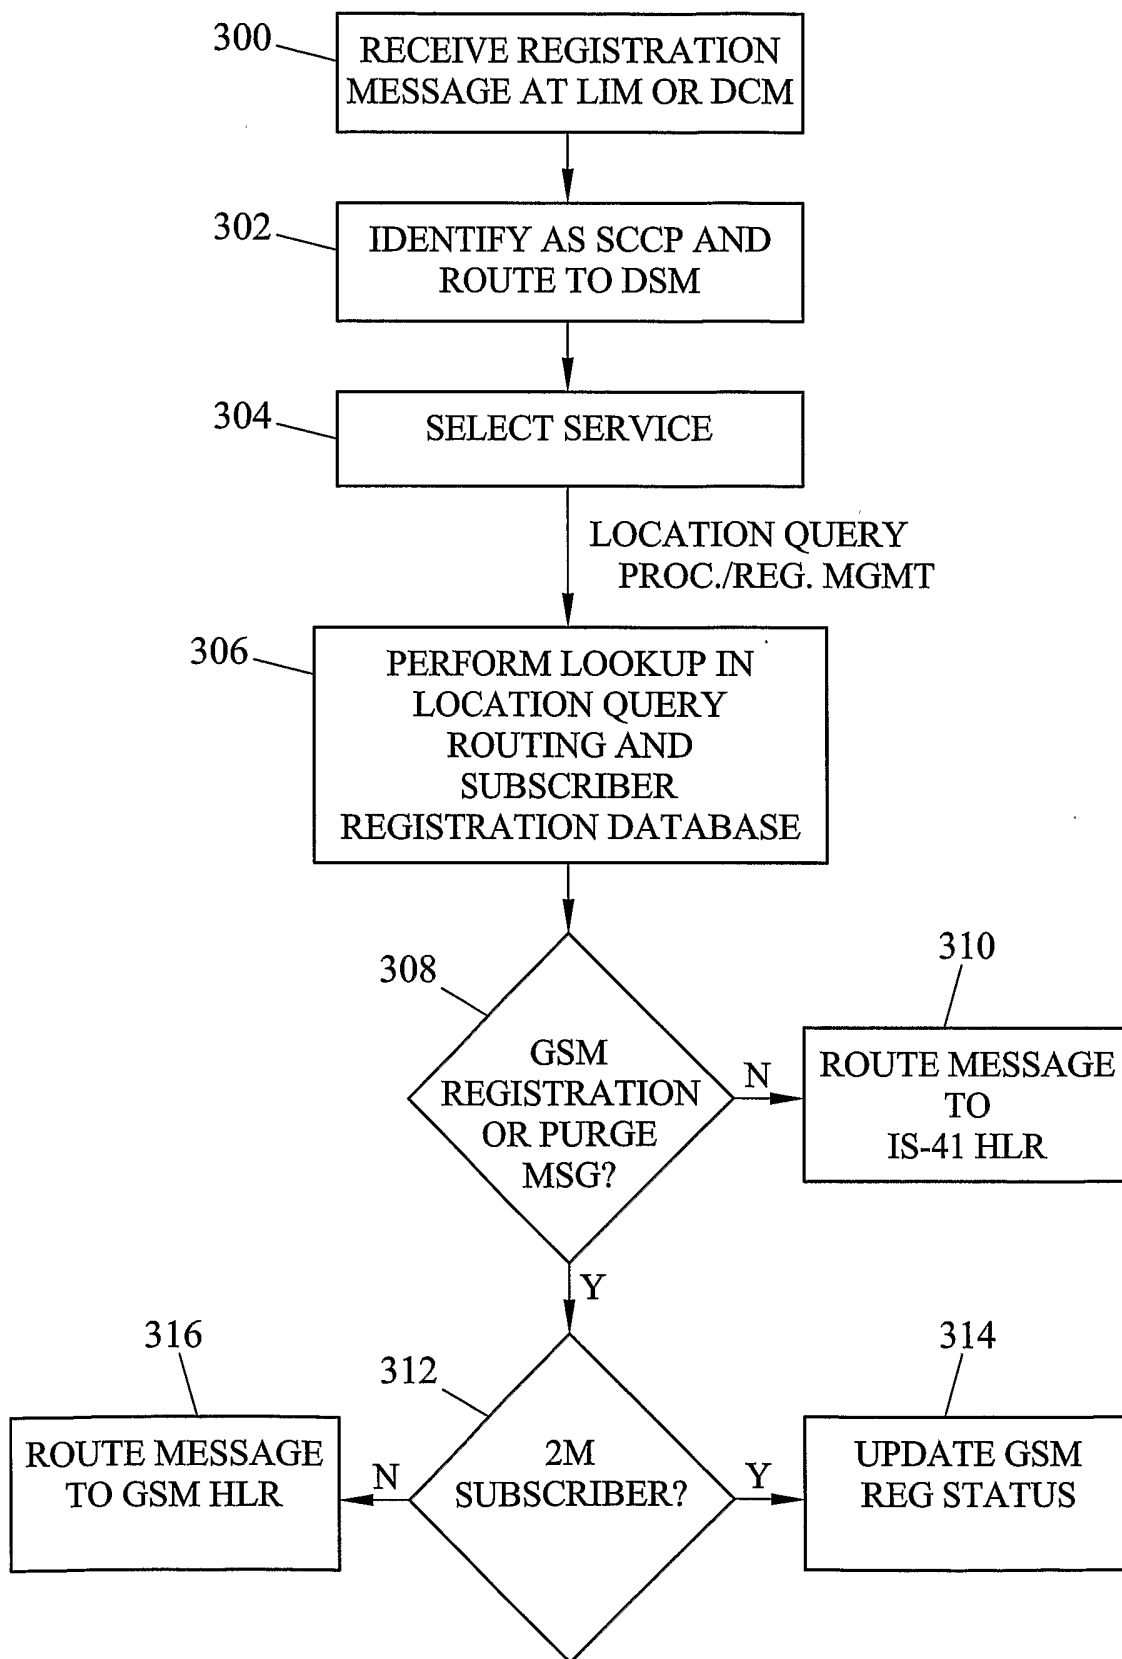


FIG. 3

4/23

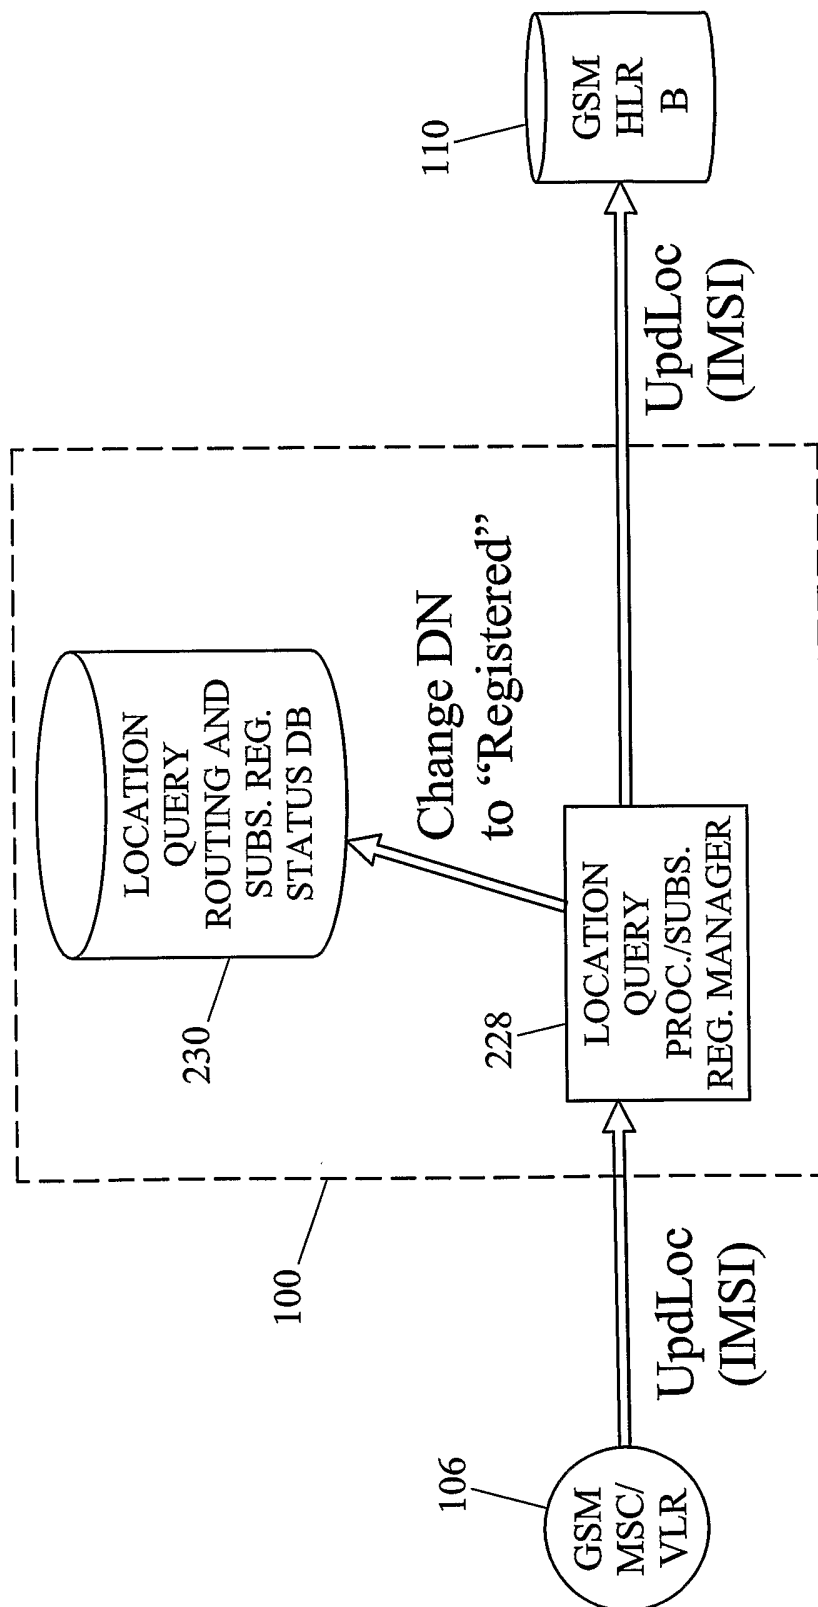


FIG. 4


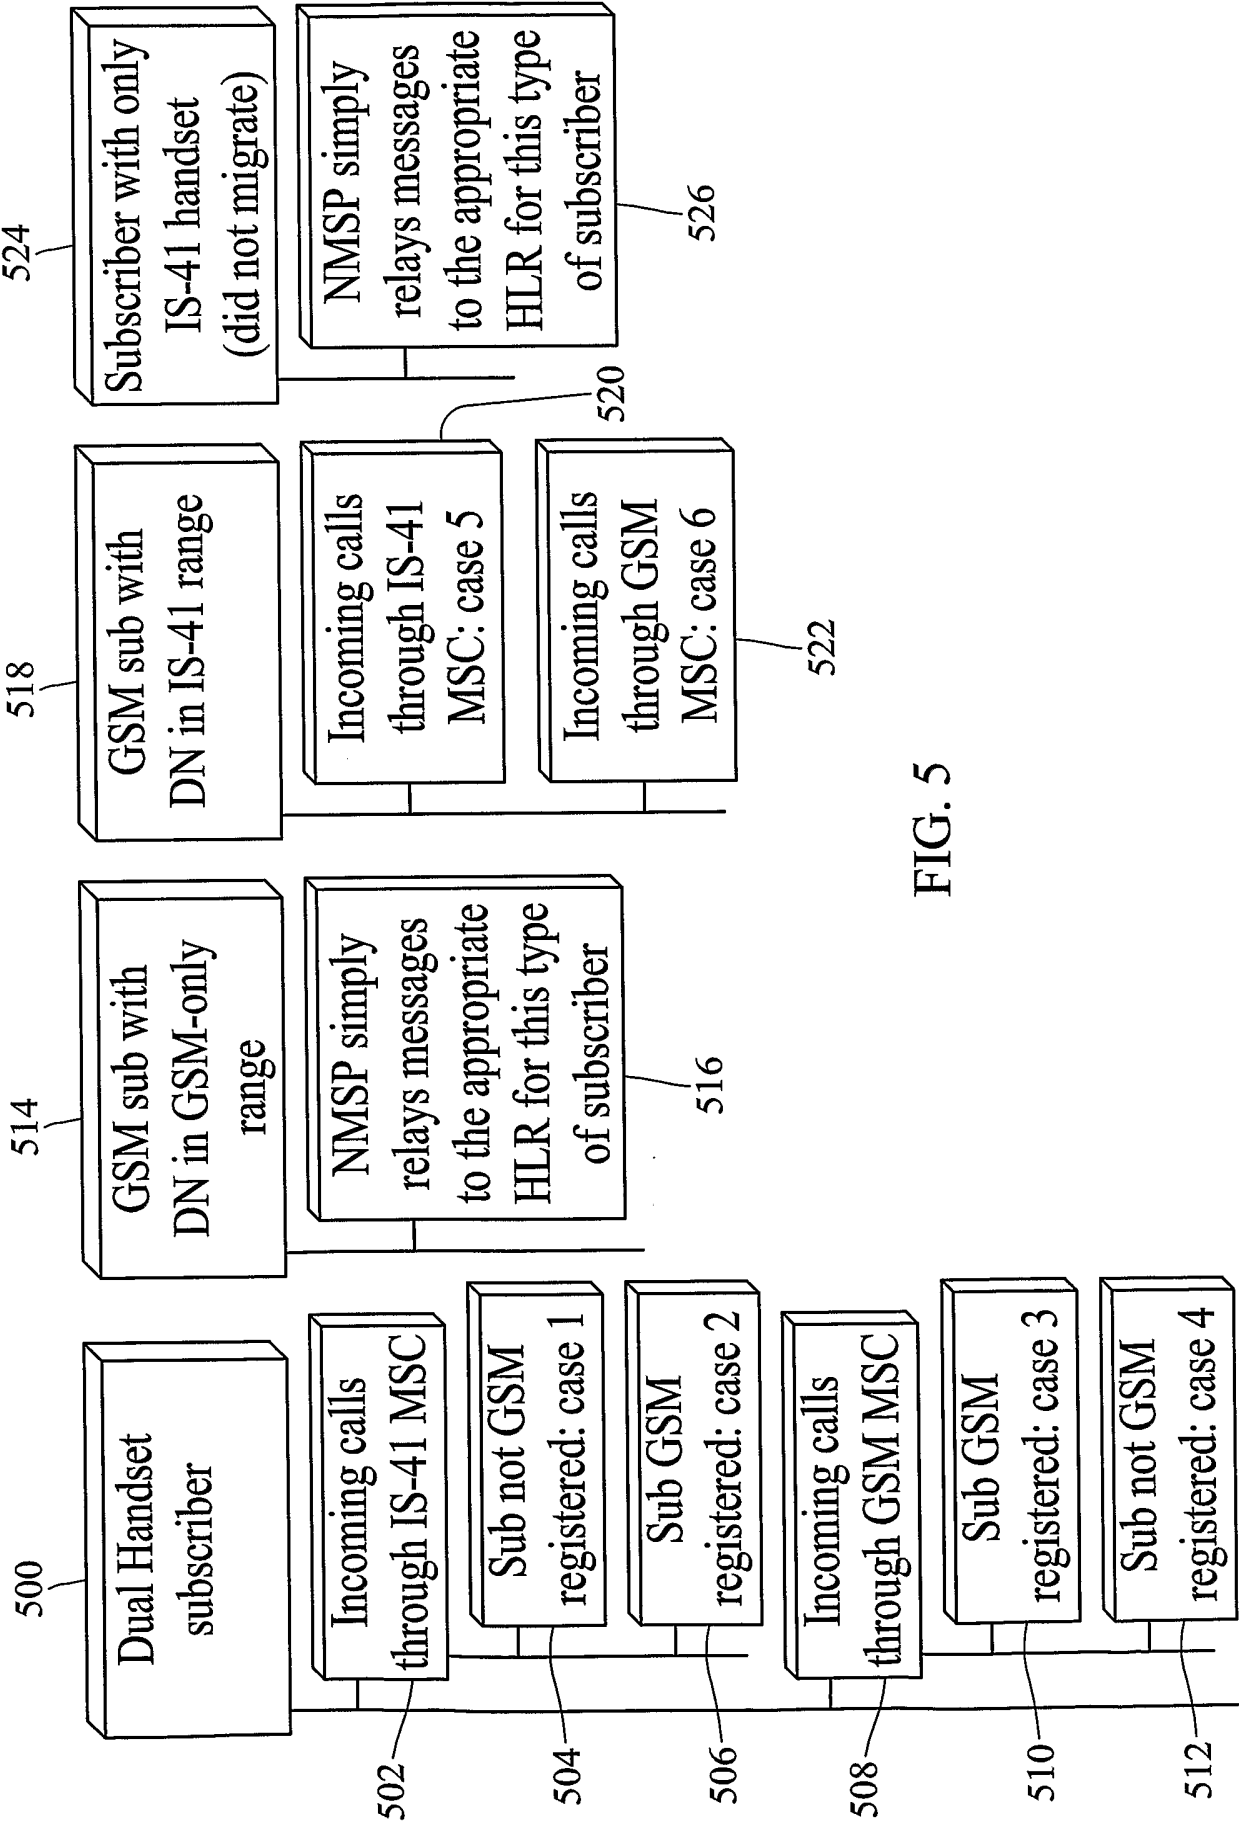


FIG. 5

6/23

FIG. 6

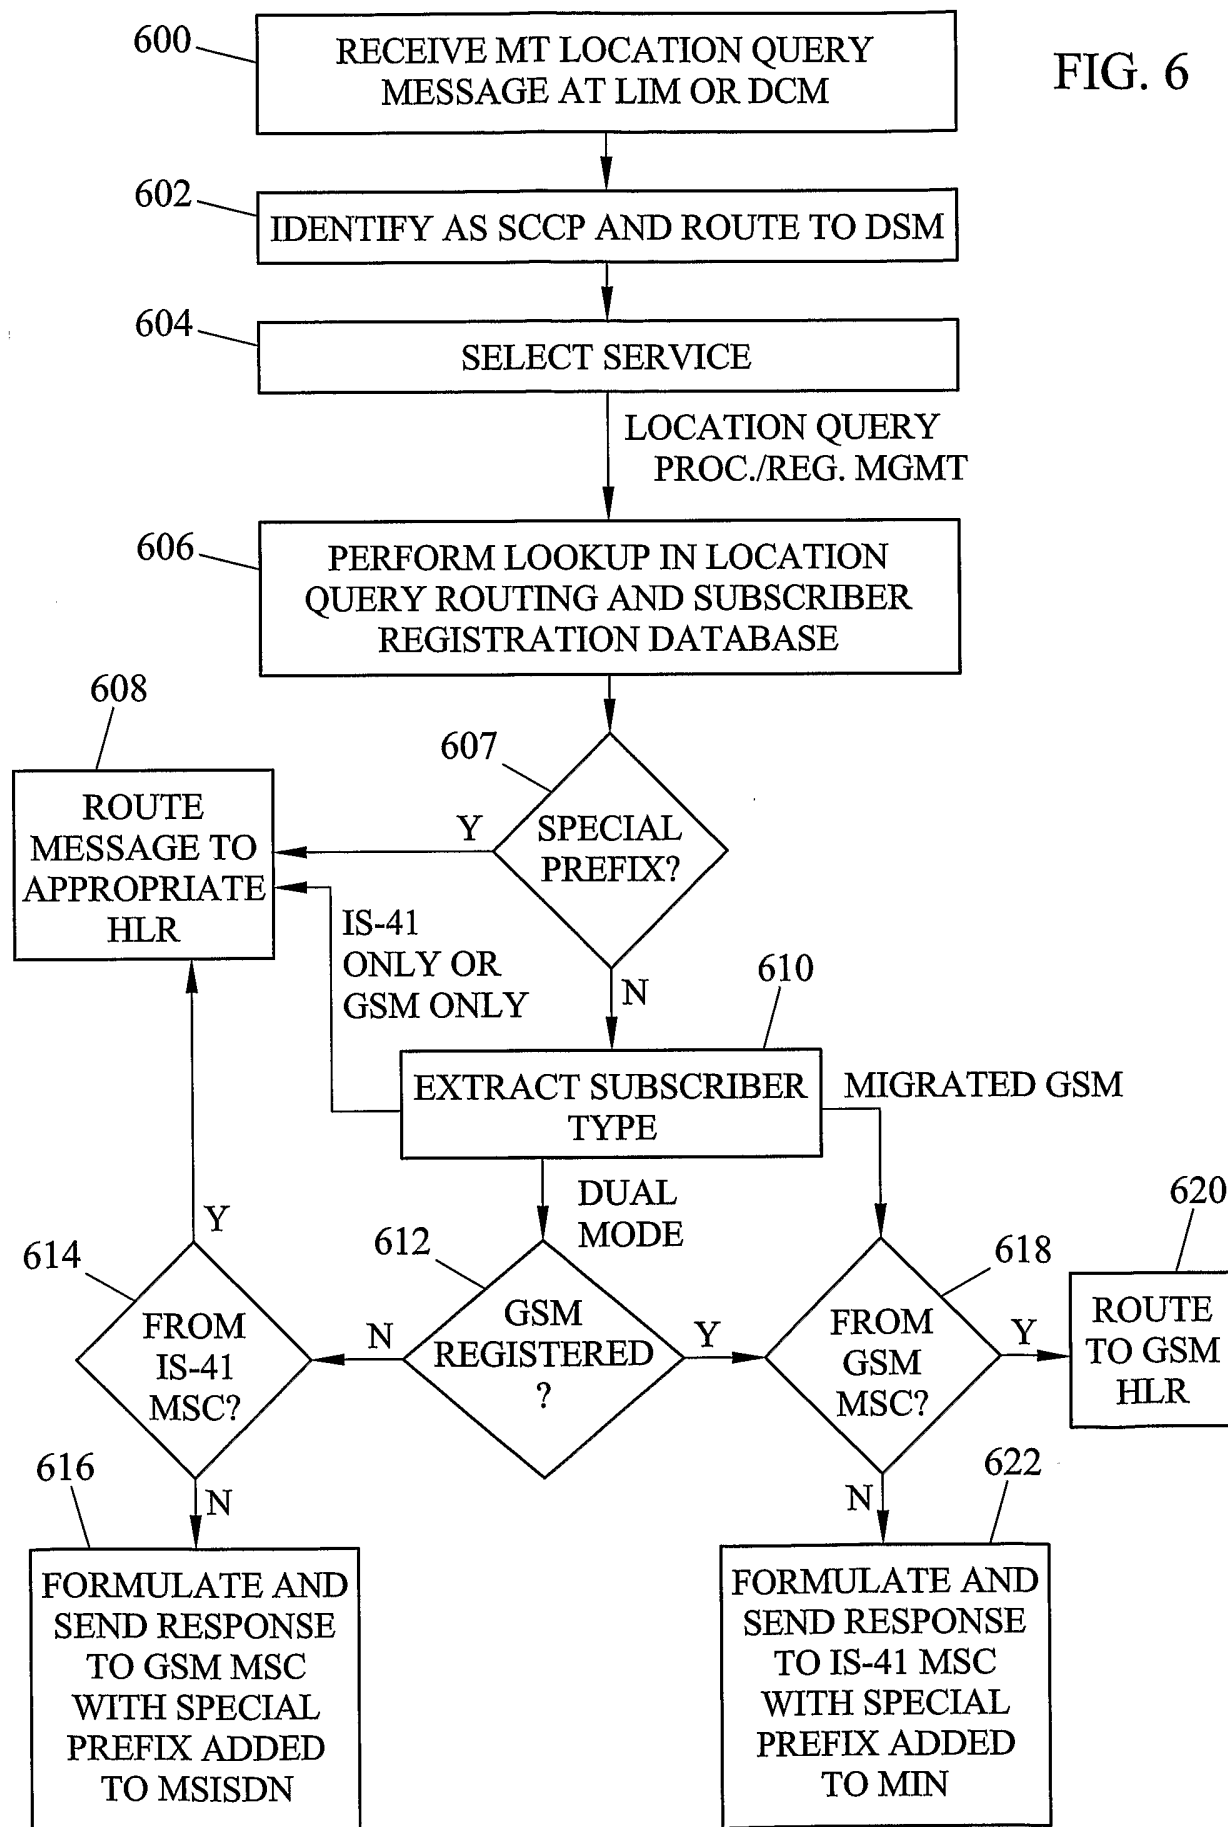

7/23

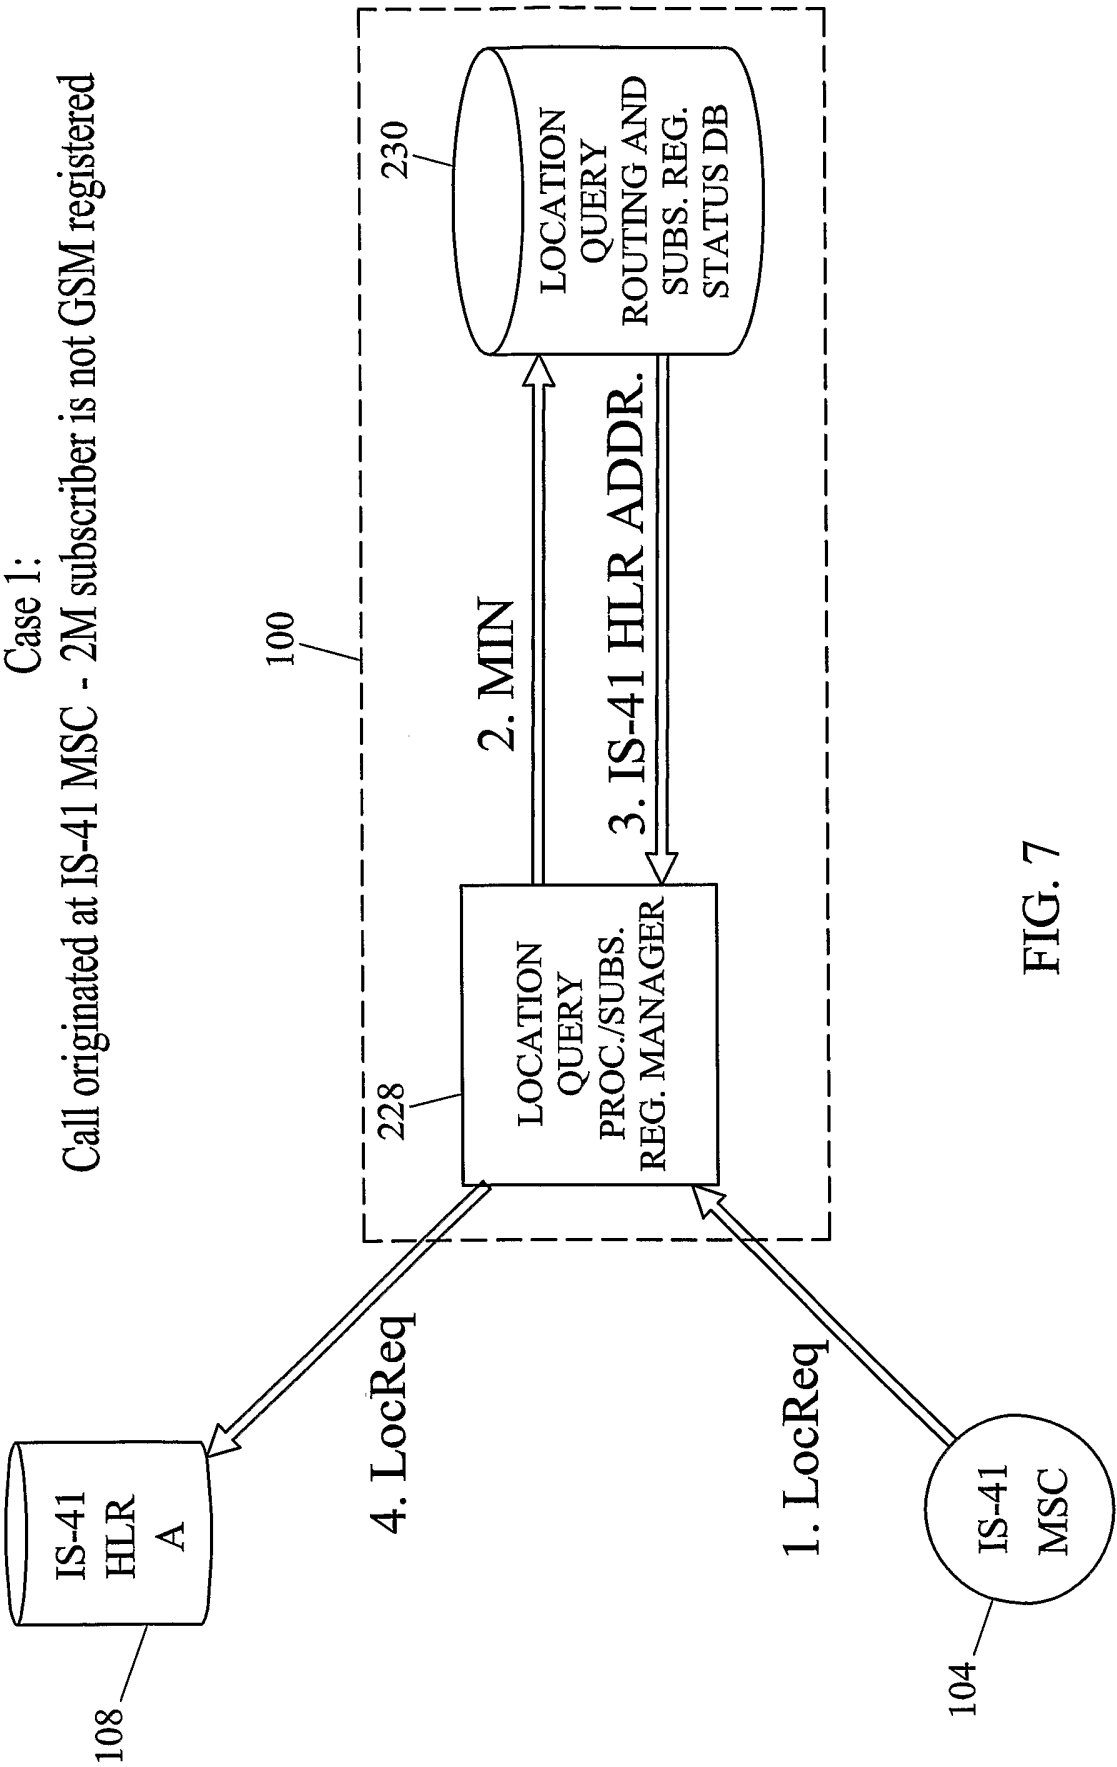


FIG. 7

8/23

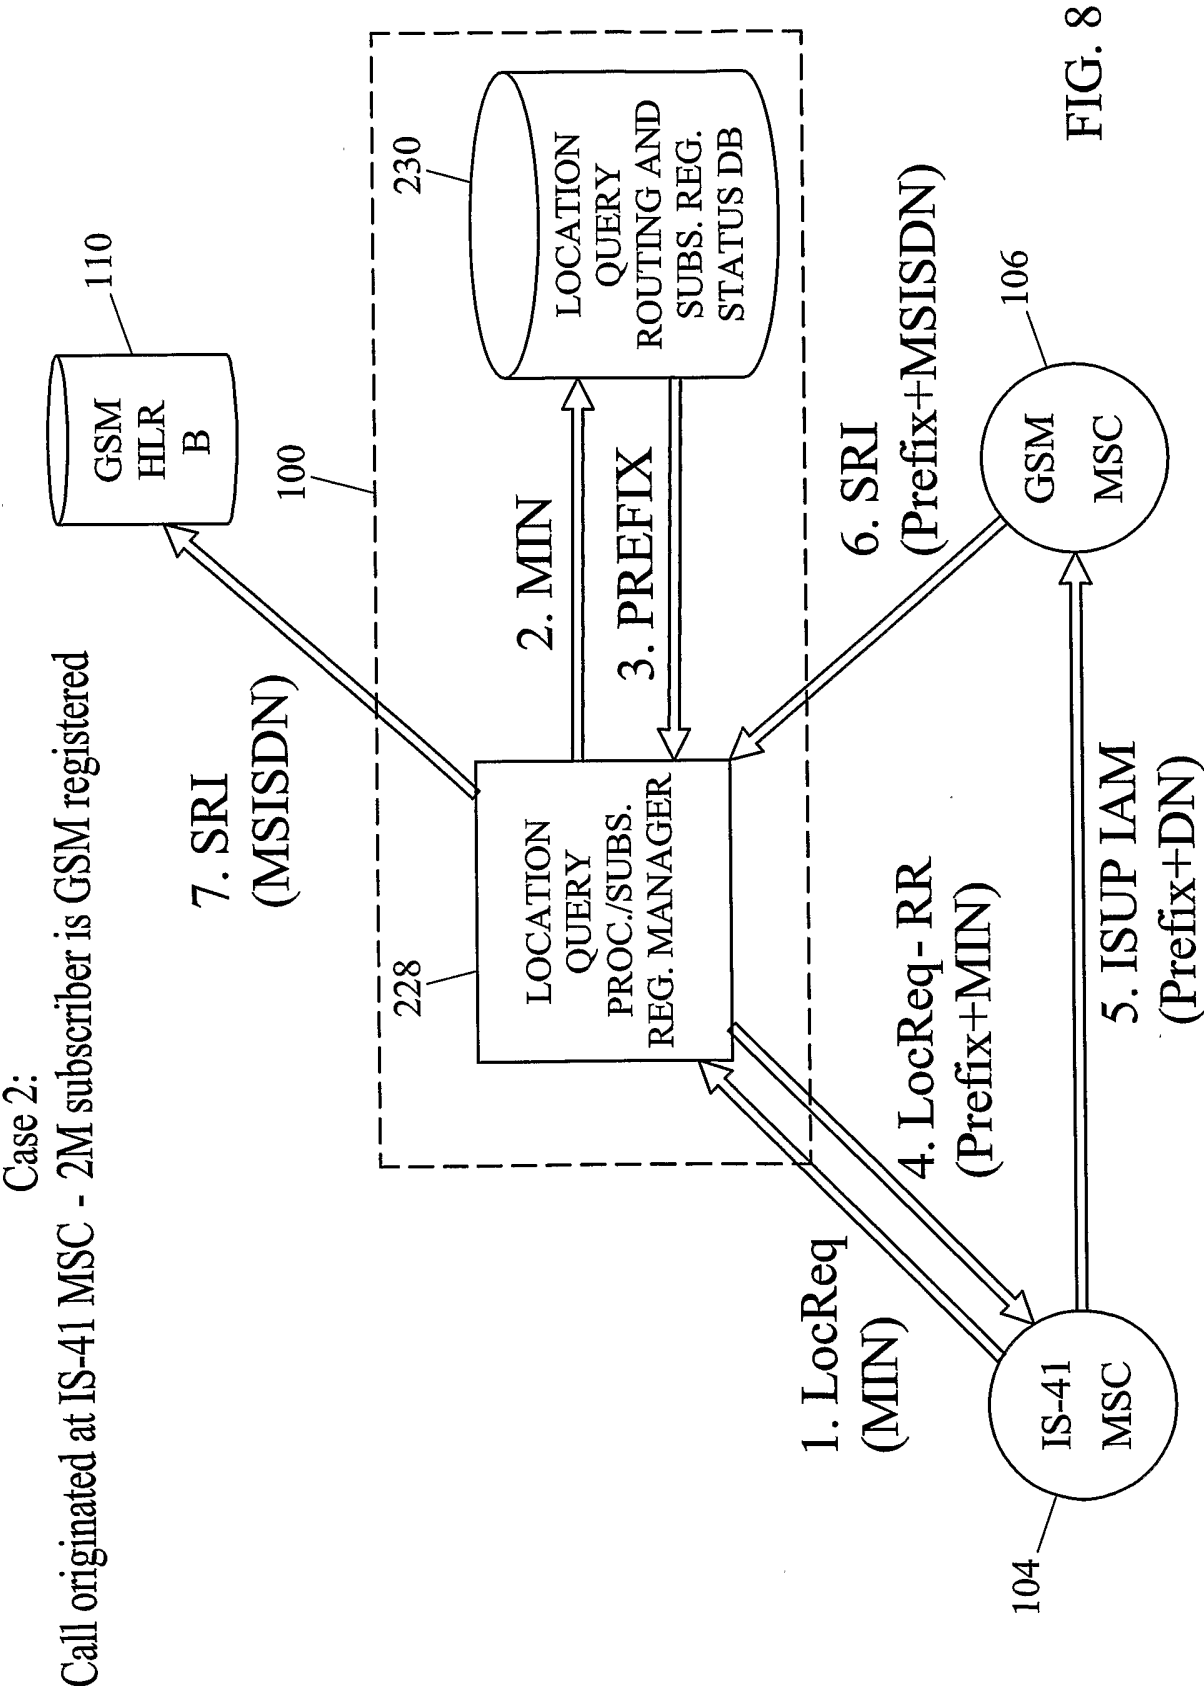


FIG. 8

9/23

Case 3:
Call originated at GSM MSC - 2M subscriber is GSM registered

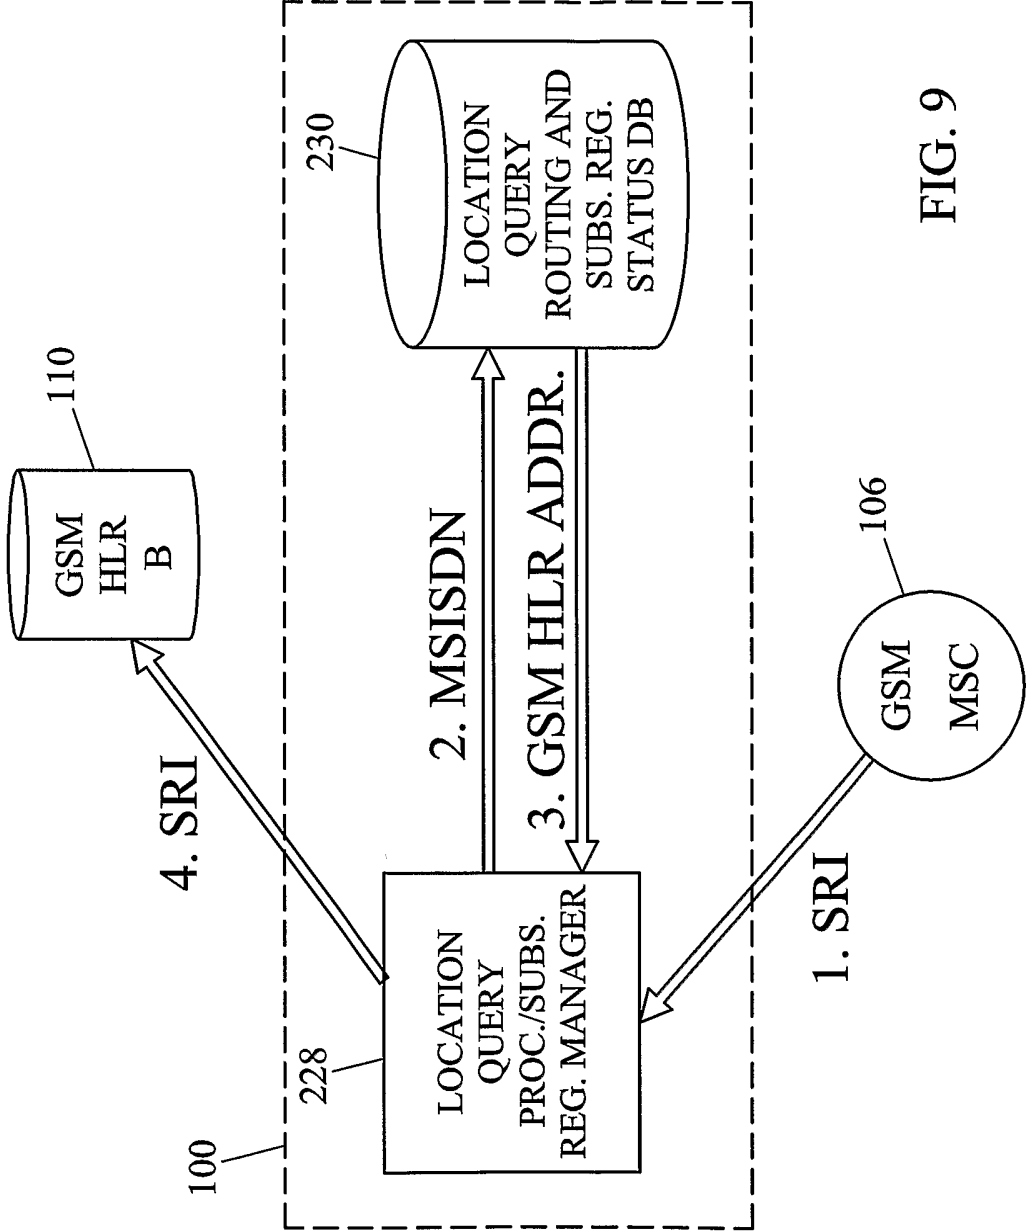


FIG. 9

10/23

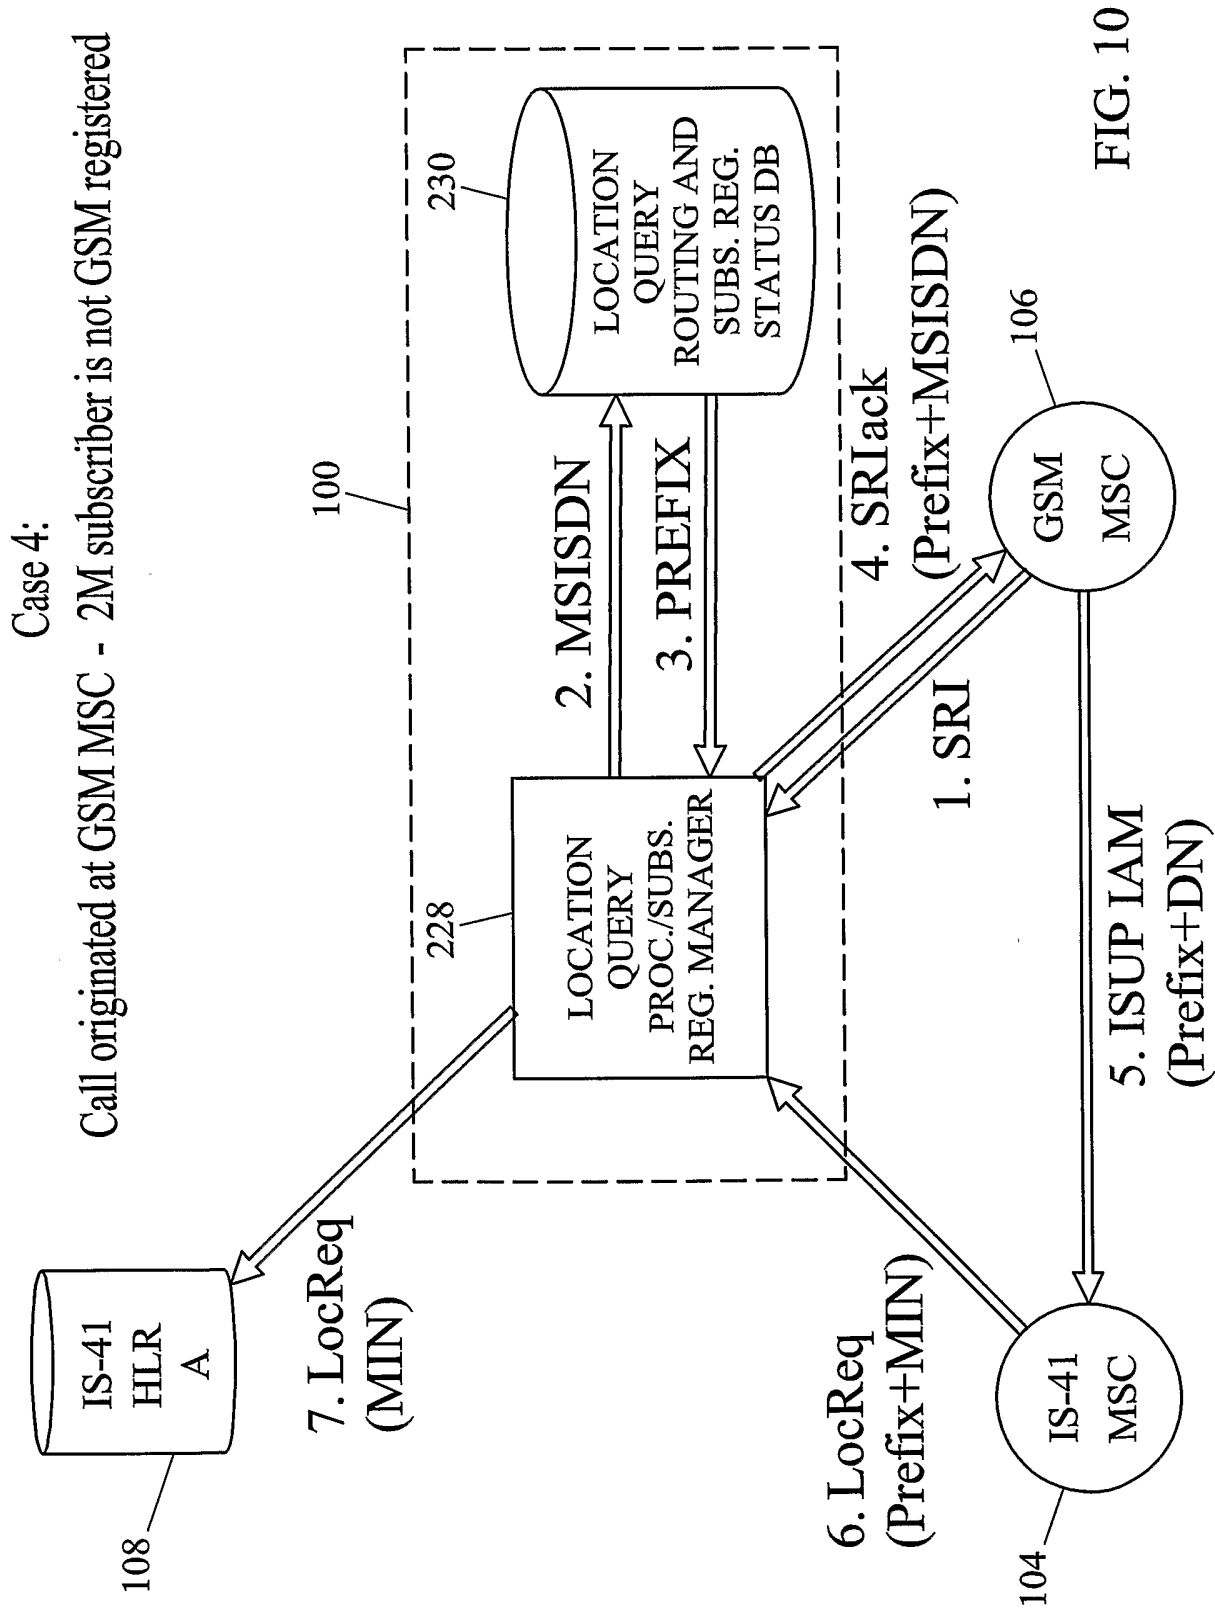


FIG. 10

Case 5:
Call originated at IS-41 MSC for GSM-only subscriber with DN in IS-41 range

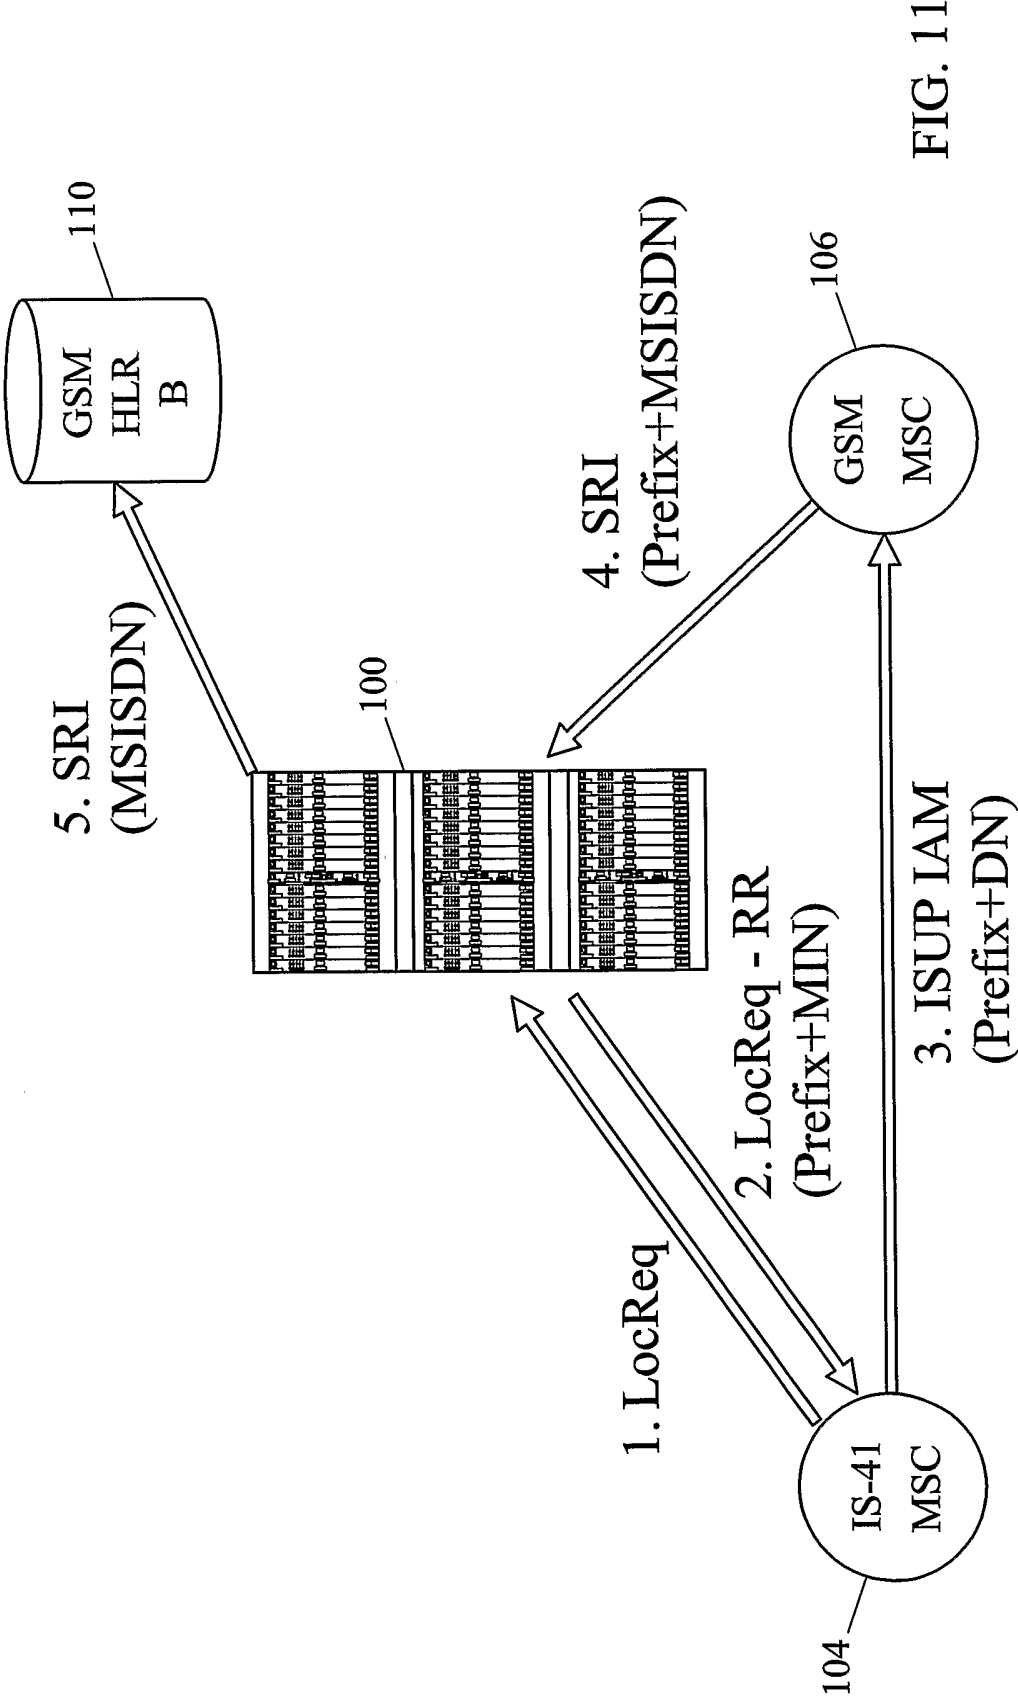


FIG. 11

Case 6:
Call originated at GSM MSC for GSM-only subscriber
with DN within or outside of IS-41 range

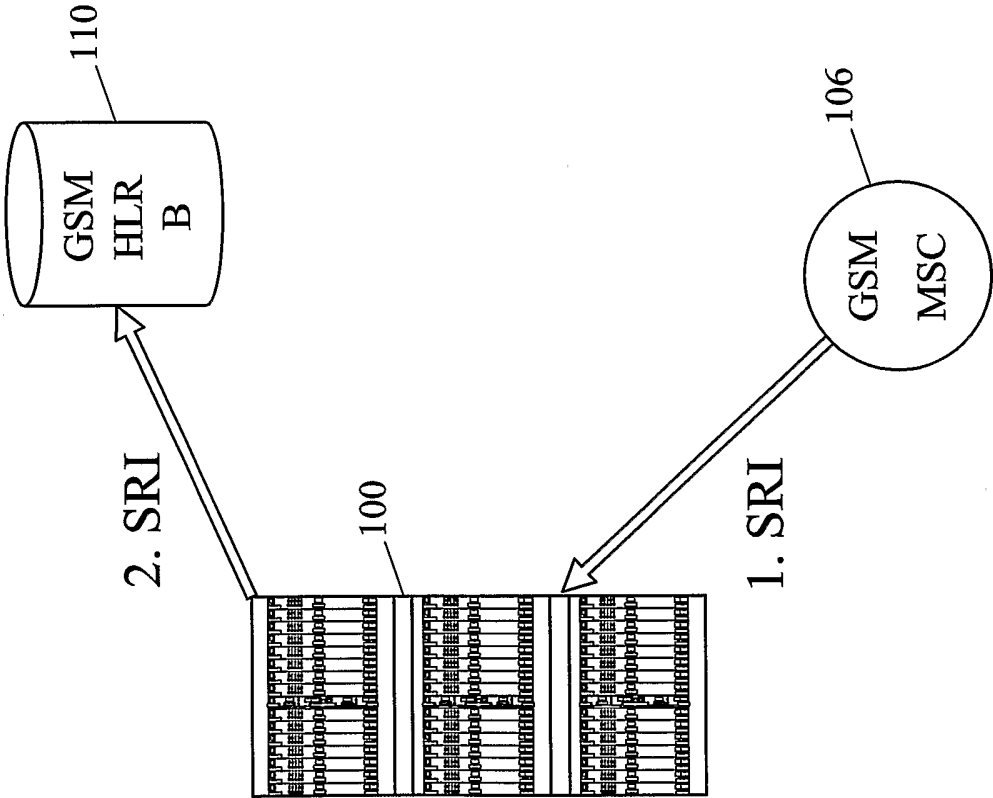


FIG. 12

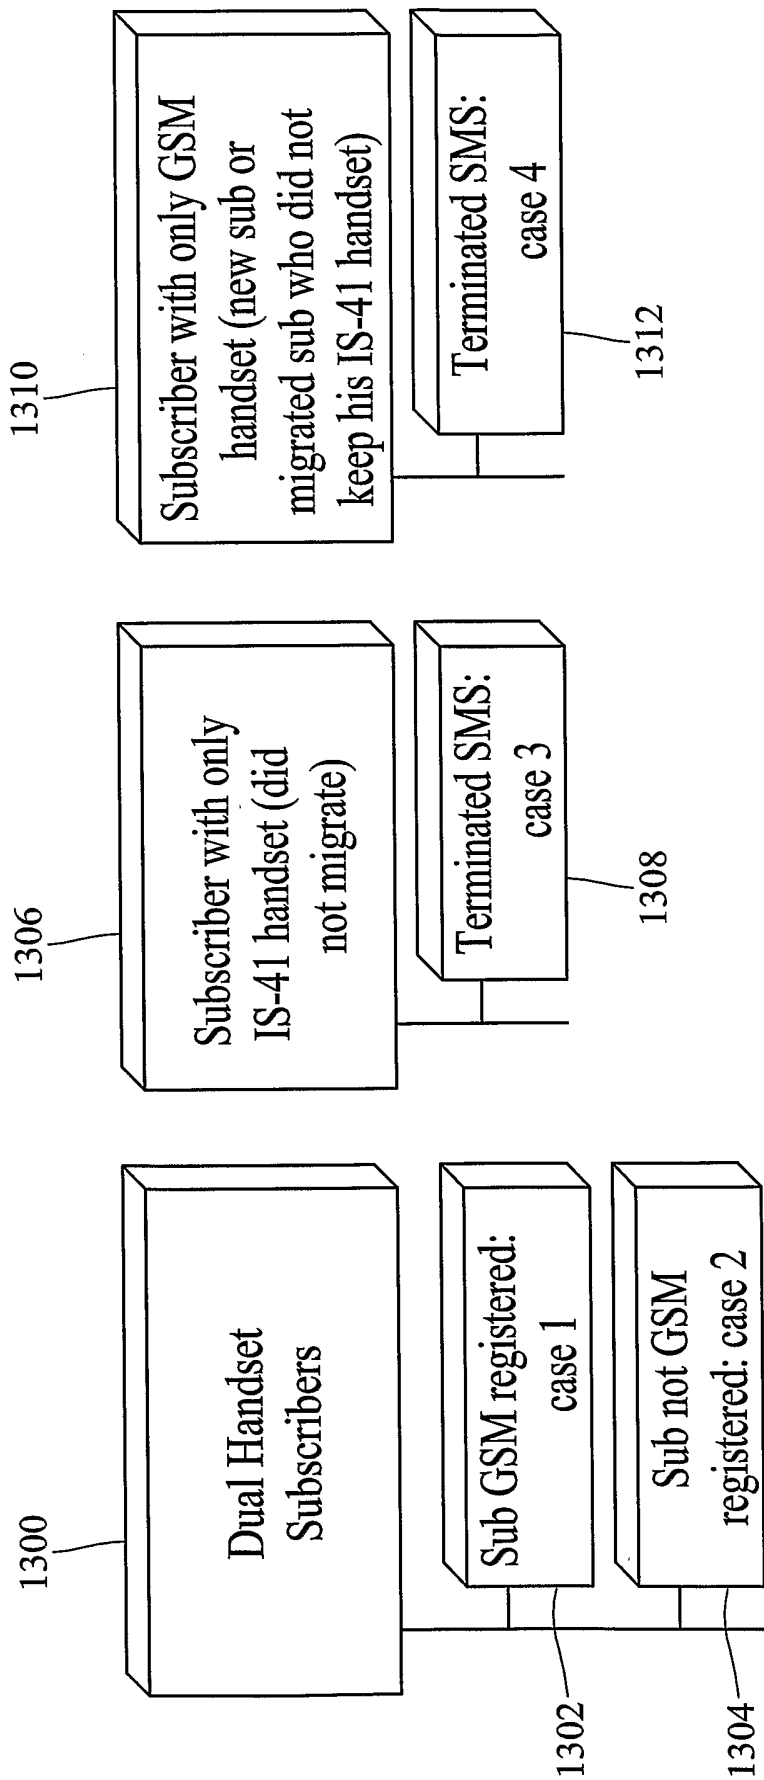


FIG. 13

14/23

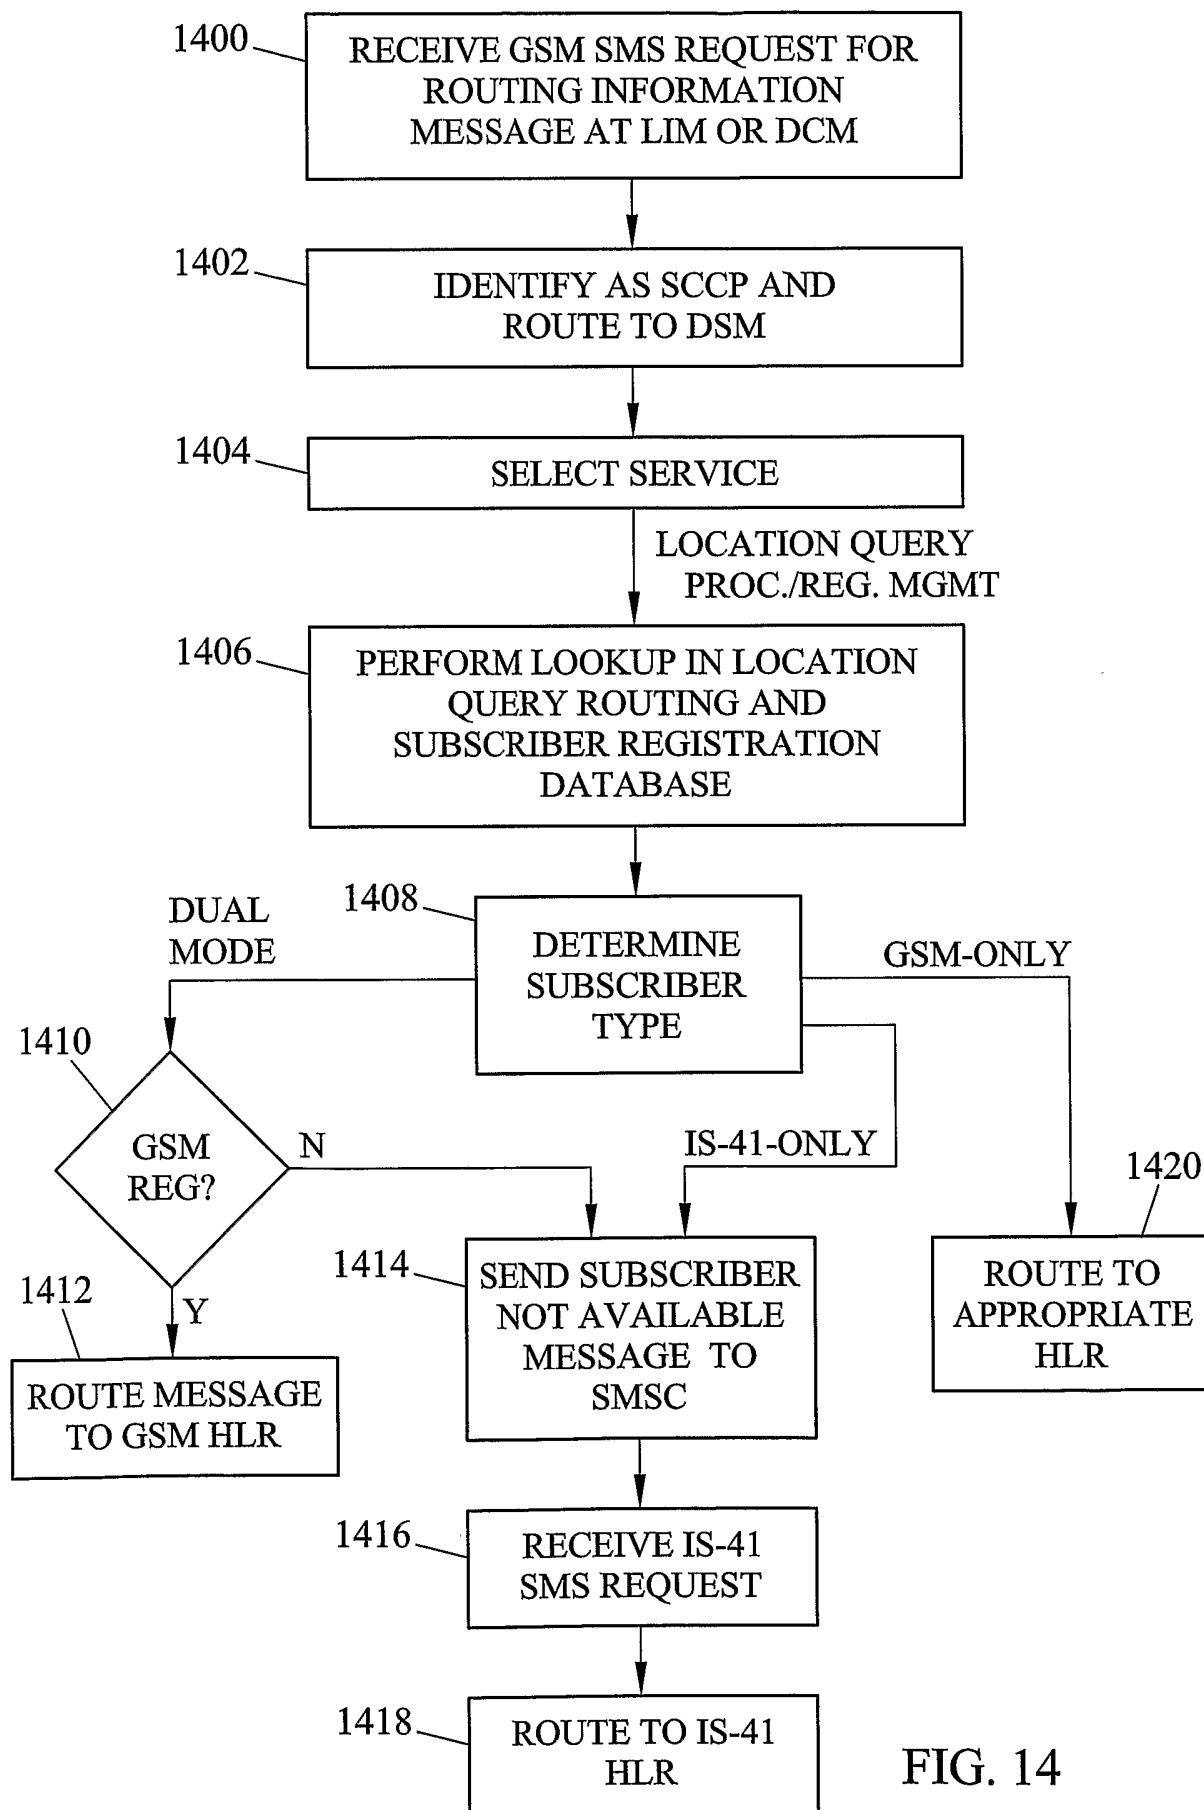


FIG. 14

Case 1: MT SMS for GSM registered 2M sub

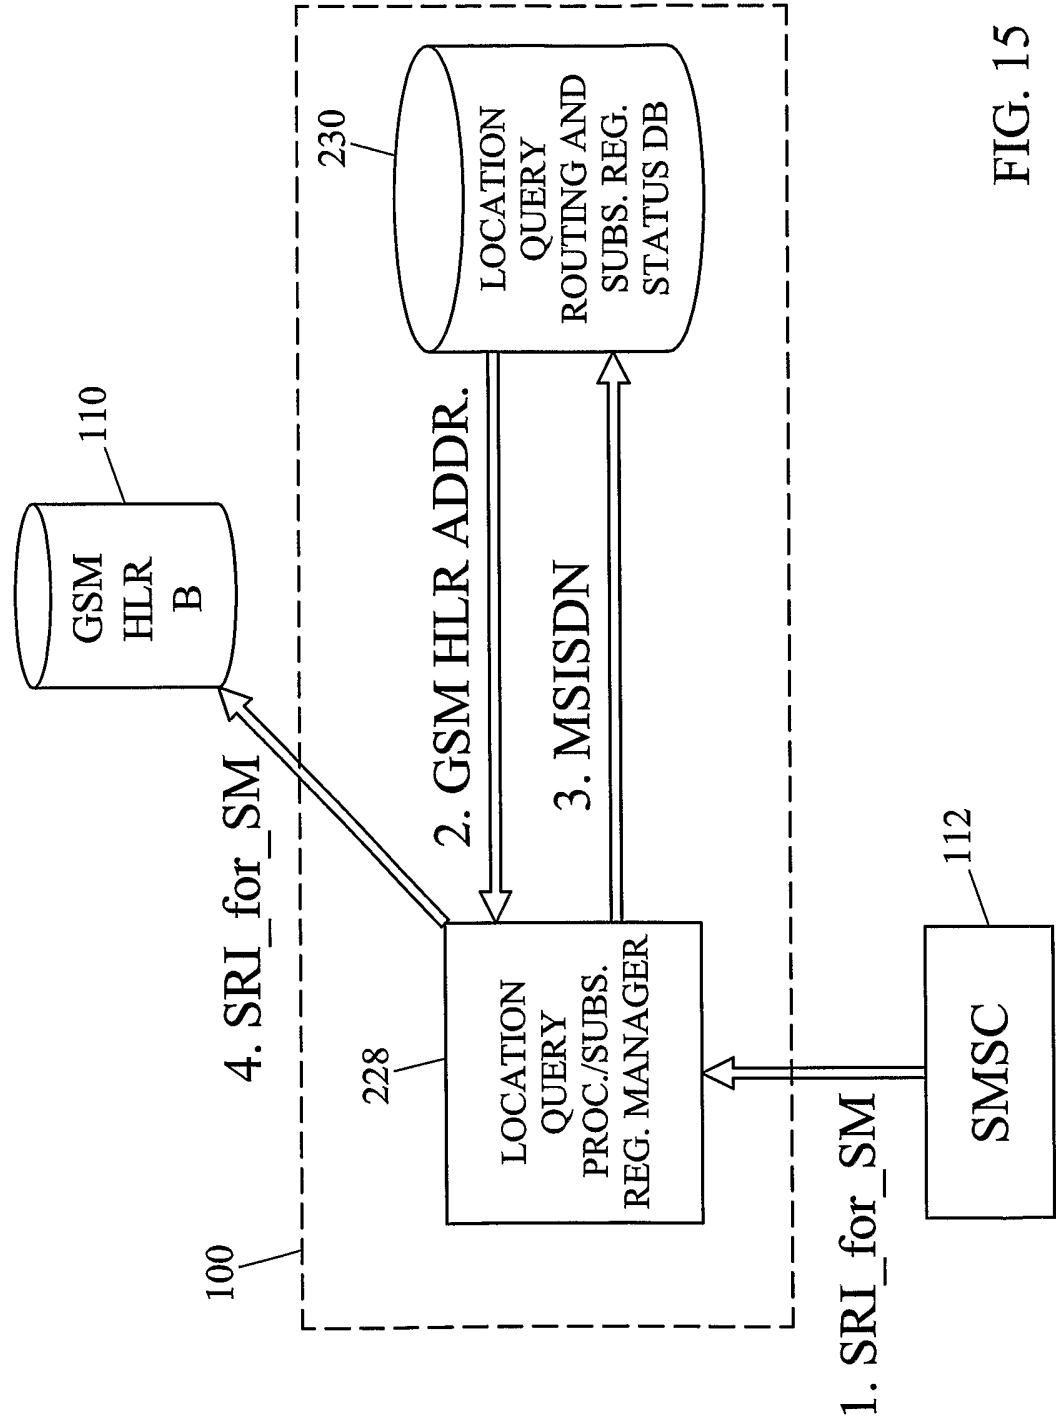


FIG. 15

Case 2: MT SMS for 2M sub not GSM registered

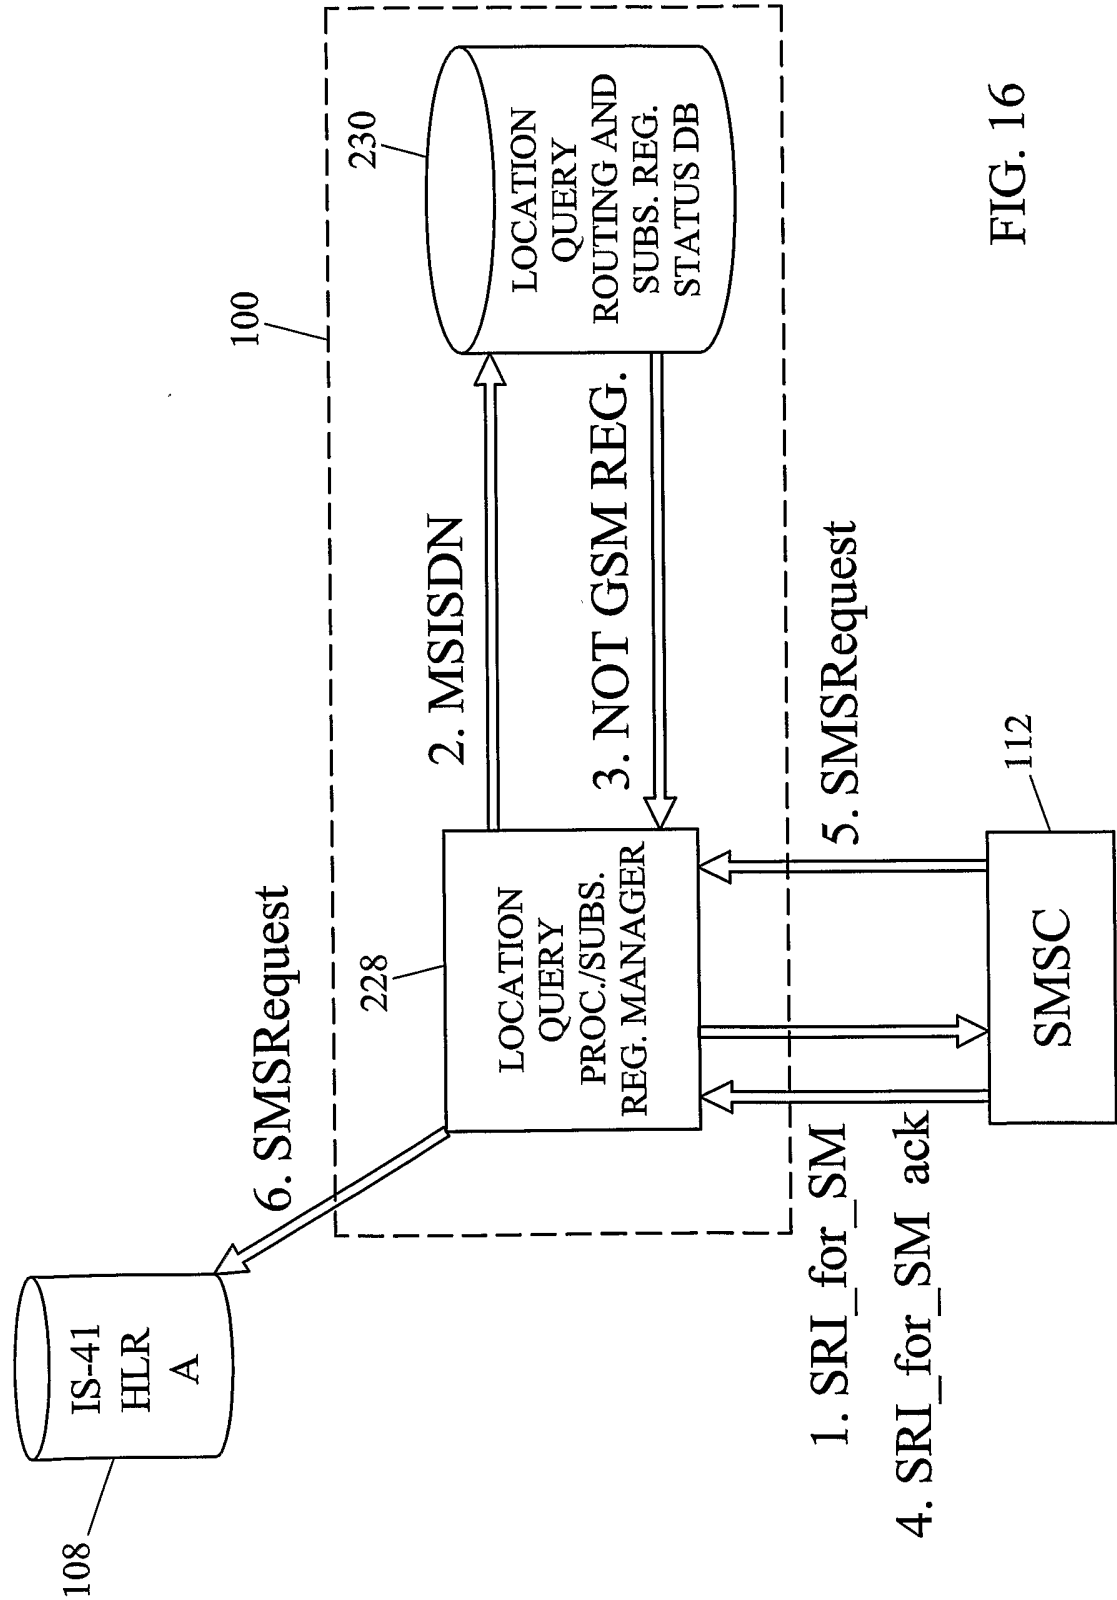


FIG. 16

Case 3: MT SMS for IS-41, non-migrated sub

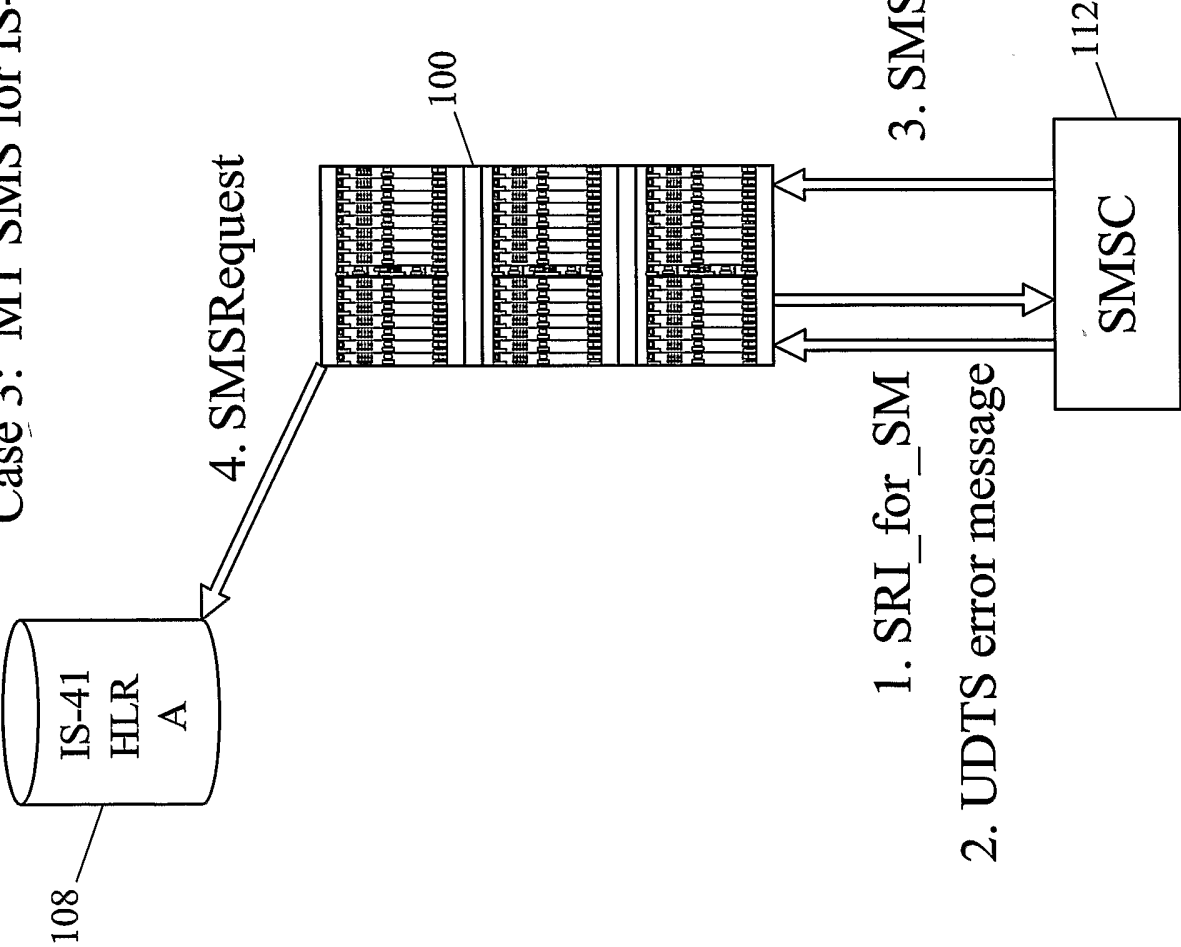


FIG. 17

Case 4: MT SMS for GSM-only sub

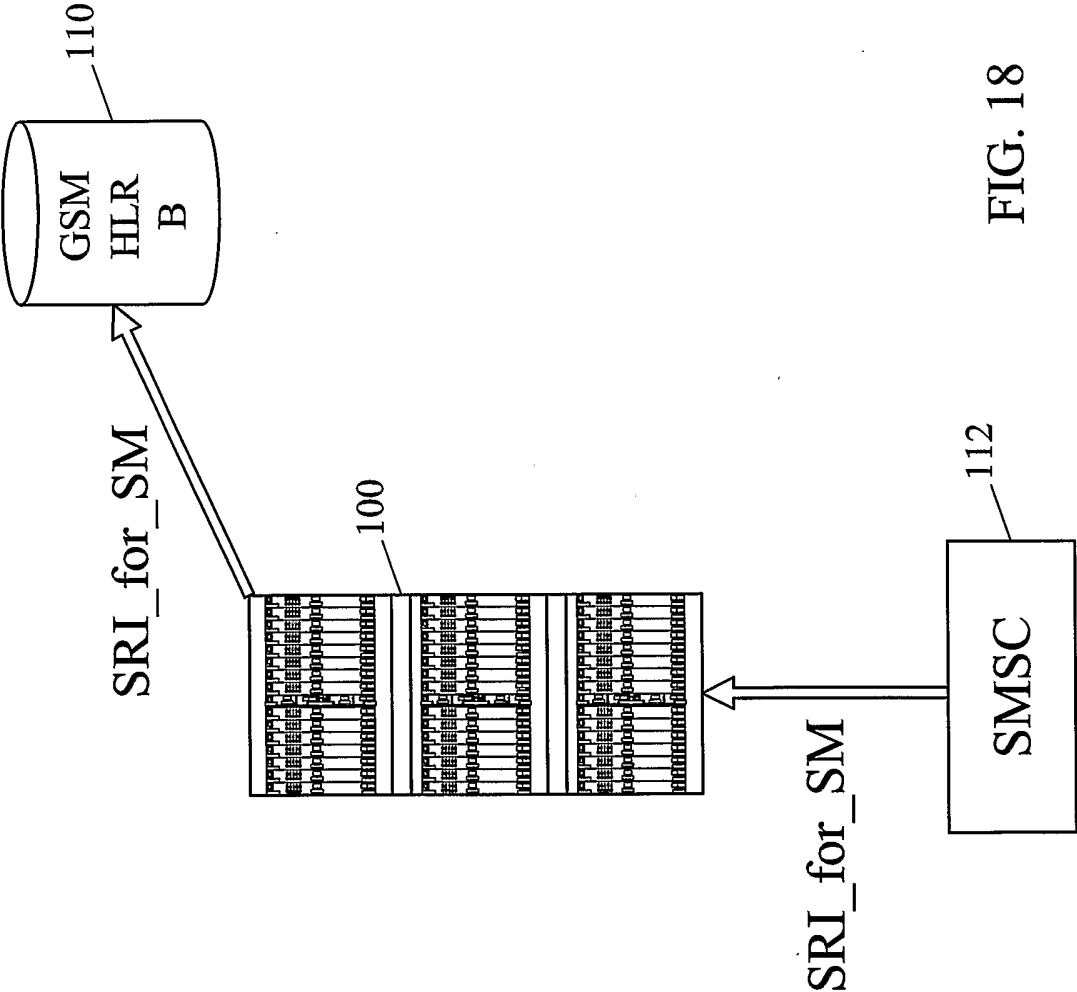


FIG. 18

MT SMS for GSM registered sub

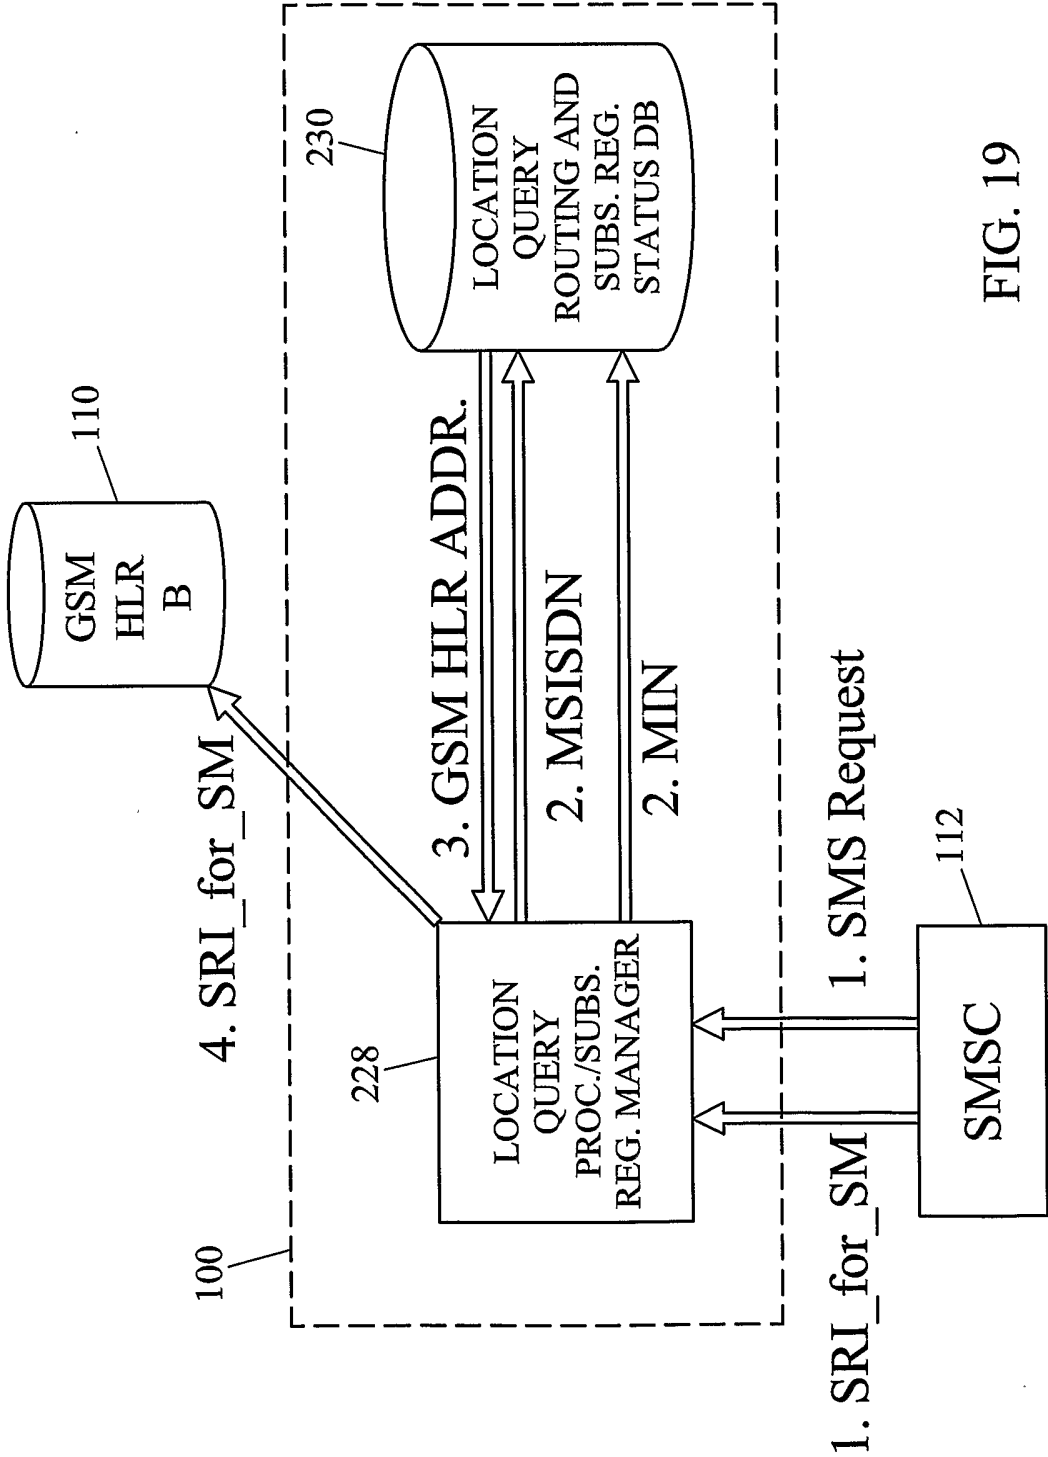


FIG. 19

MT SMS for sub not GSM registered

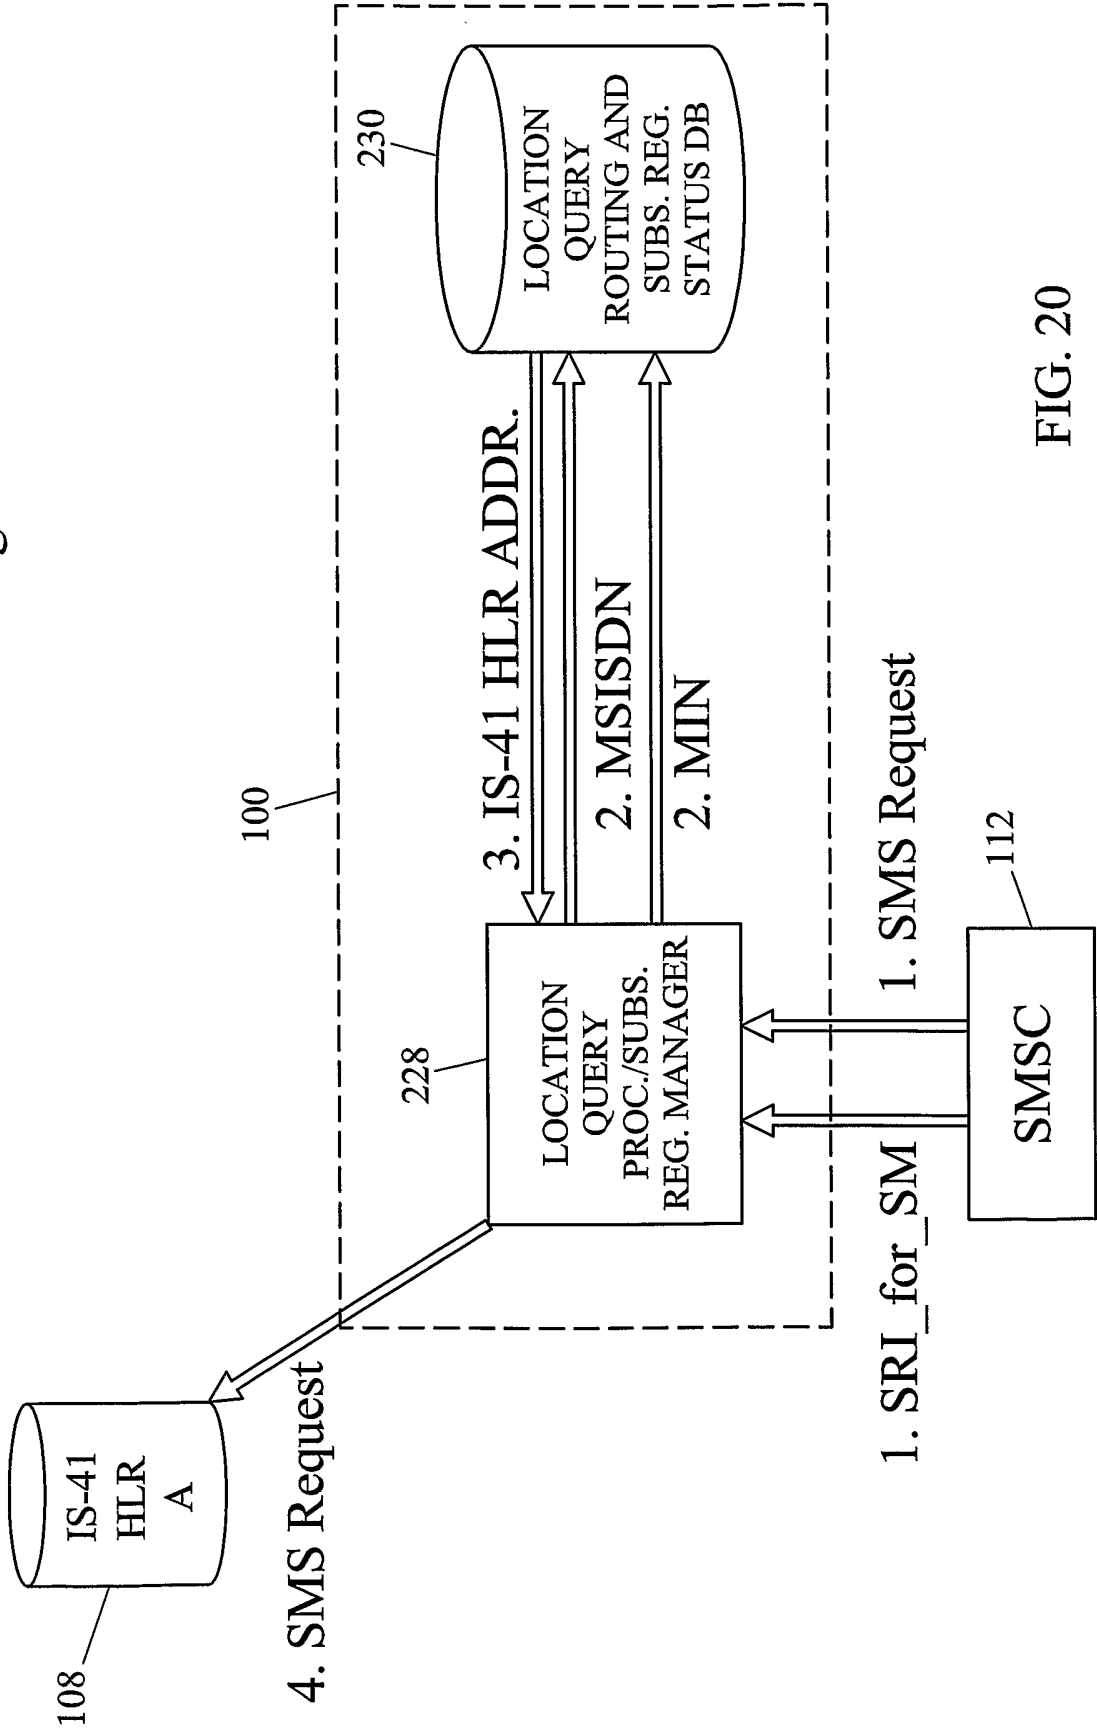


FIG. 20

MT SMS for new GSM-only sub

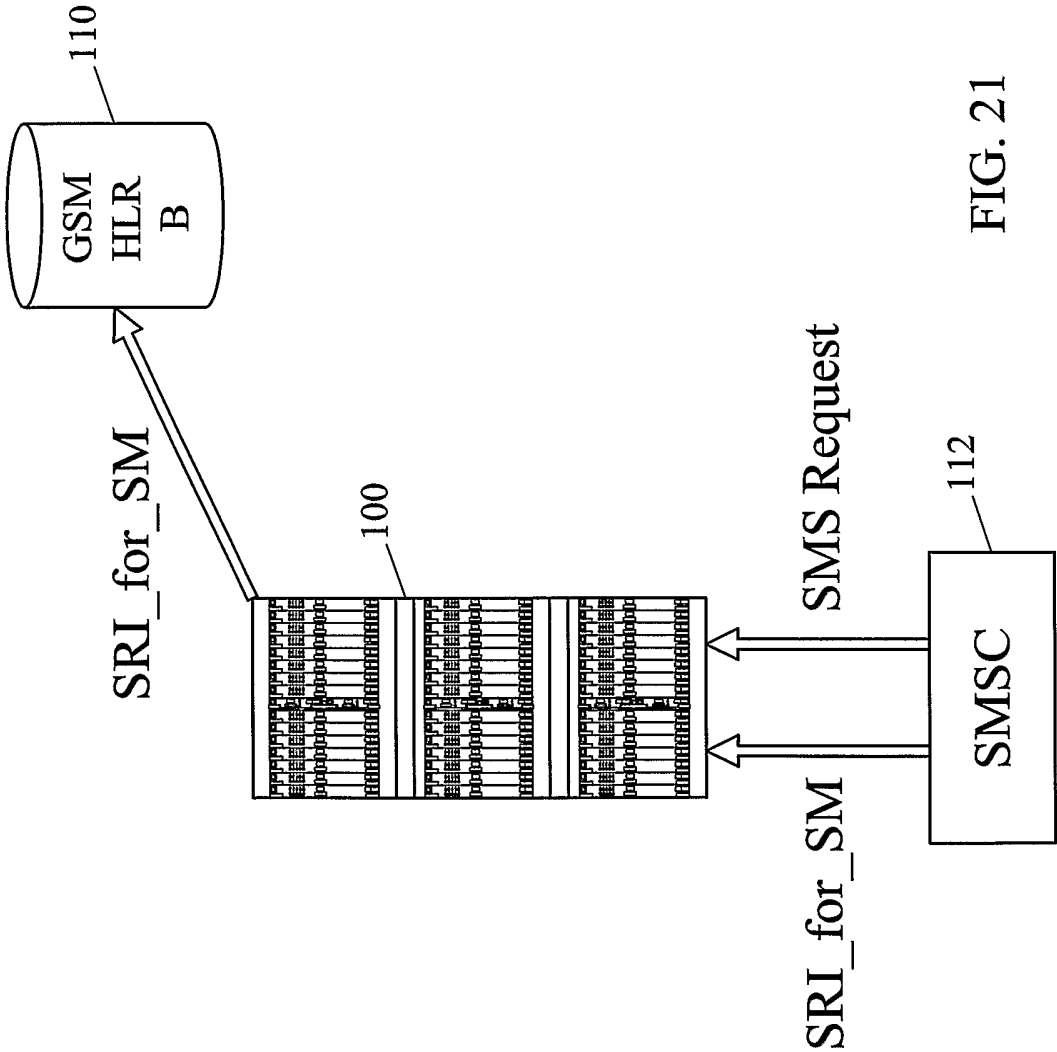


FIG. 21

MT SMS for non-migrated IS-41 sub

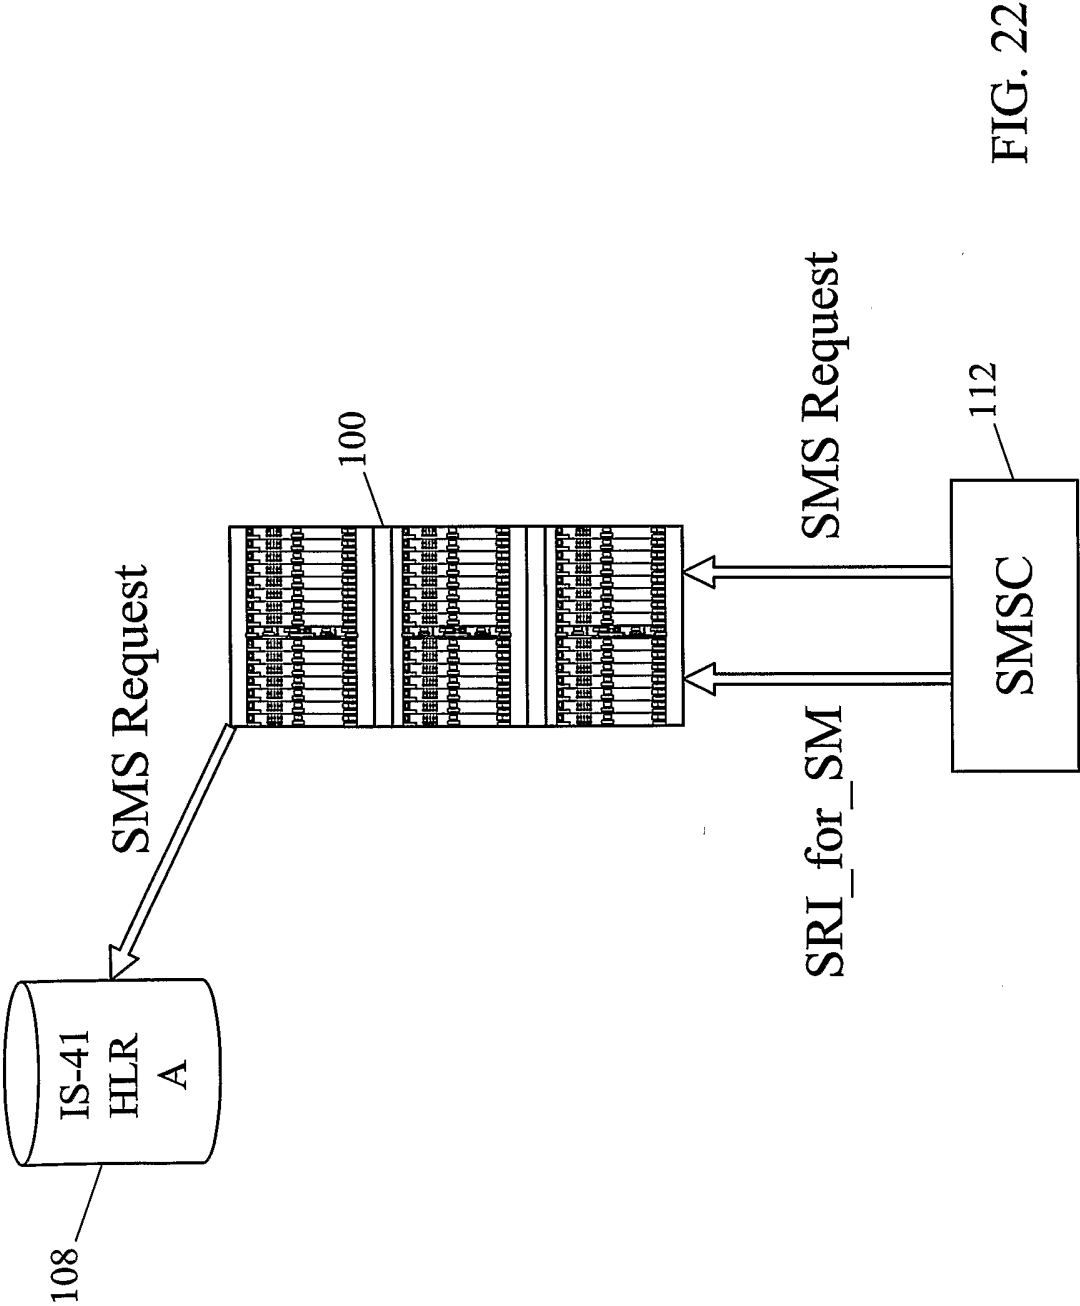


FIG. 22

