




(86) Date de dépôt PCT/PCT Filing Date: 2006/02/28
(87) Date publication PCT/PCT Publication Date: 2006/09/08
(85) Entrée phase nationale/National Entry: 2007/08/22
(86) N° demande PCT/PCT Application No.: US 2006/007100
(87) N° publication PCT/PCT Publication No.: 2006/093969
(30) Priorité/Priority: 2005/03/02 (US11/070,967)

(51) Cl.Int./Int.Cl. *A61K 41/00* (2006.01),
A61K 47/48 (2006.01)
(71) Demandeur/Applicant:
BOSTON SCIENTIFIC LIMITED, BB
(72) Inventeurs/Inventors:
ANDERSON, STEVEN M., US;
LANPHERE, JANEL, US
(74) Agent: SMART & BIGGAR

(54) Titre : PARTICULES
(54) Title: PARTICLES

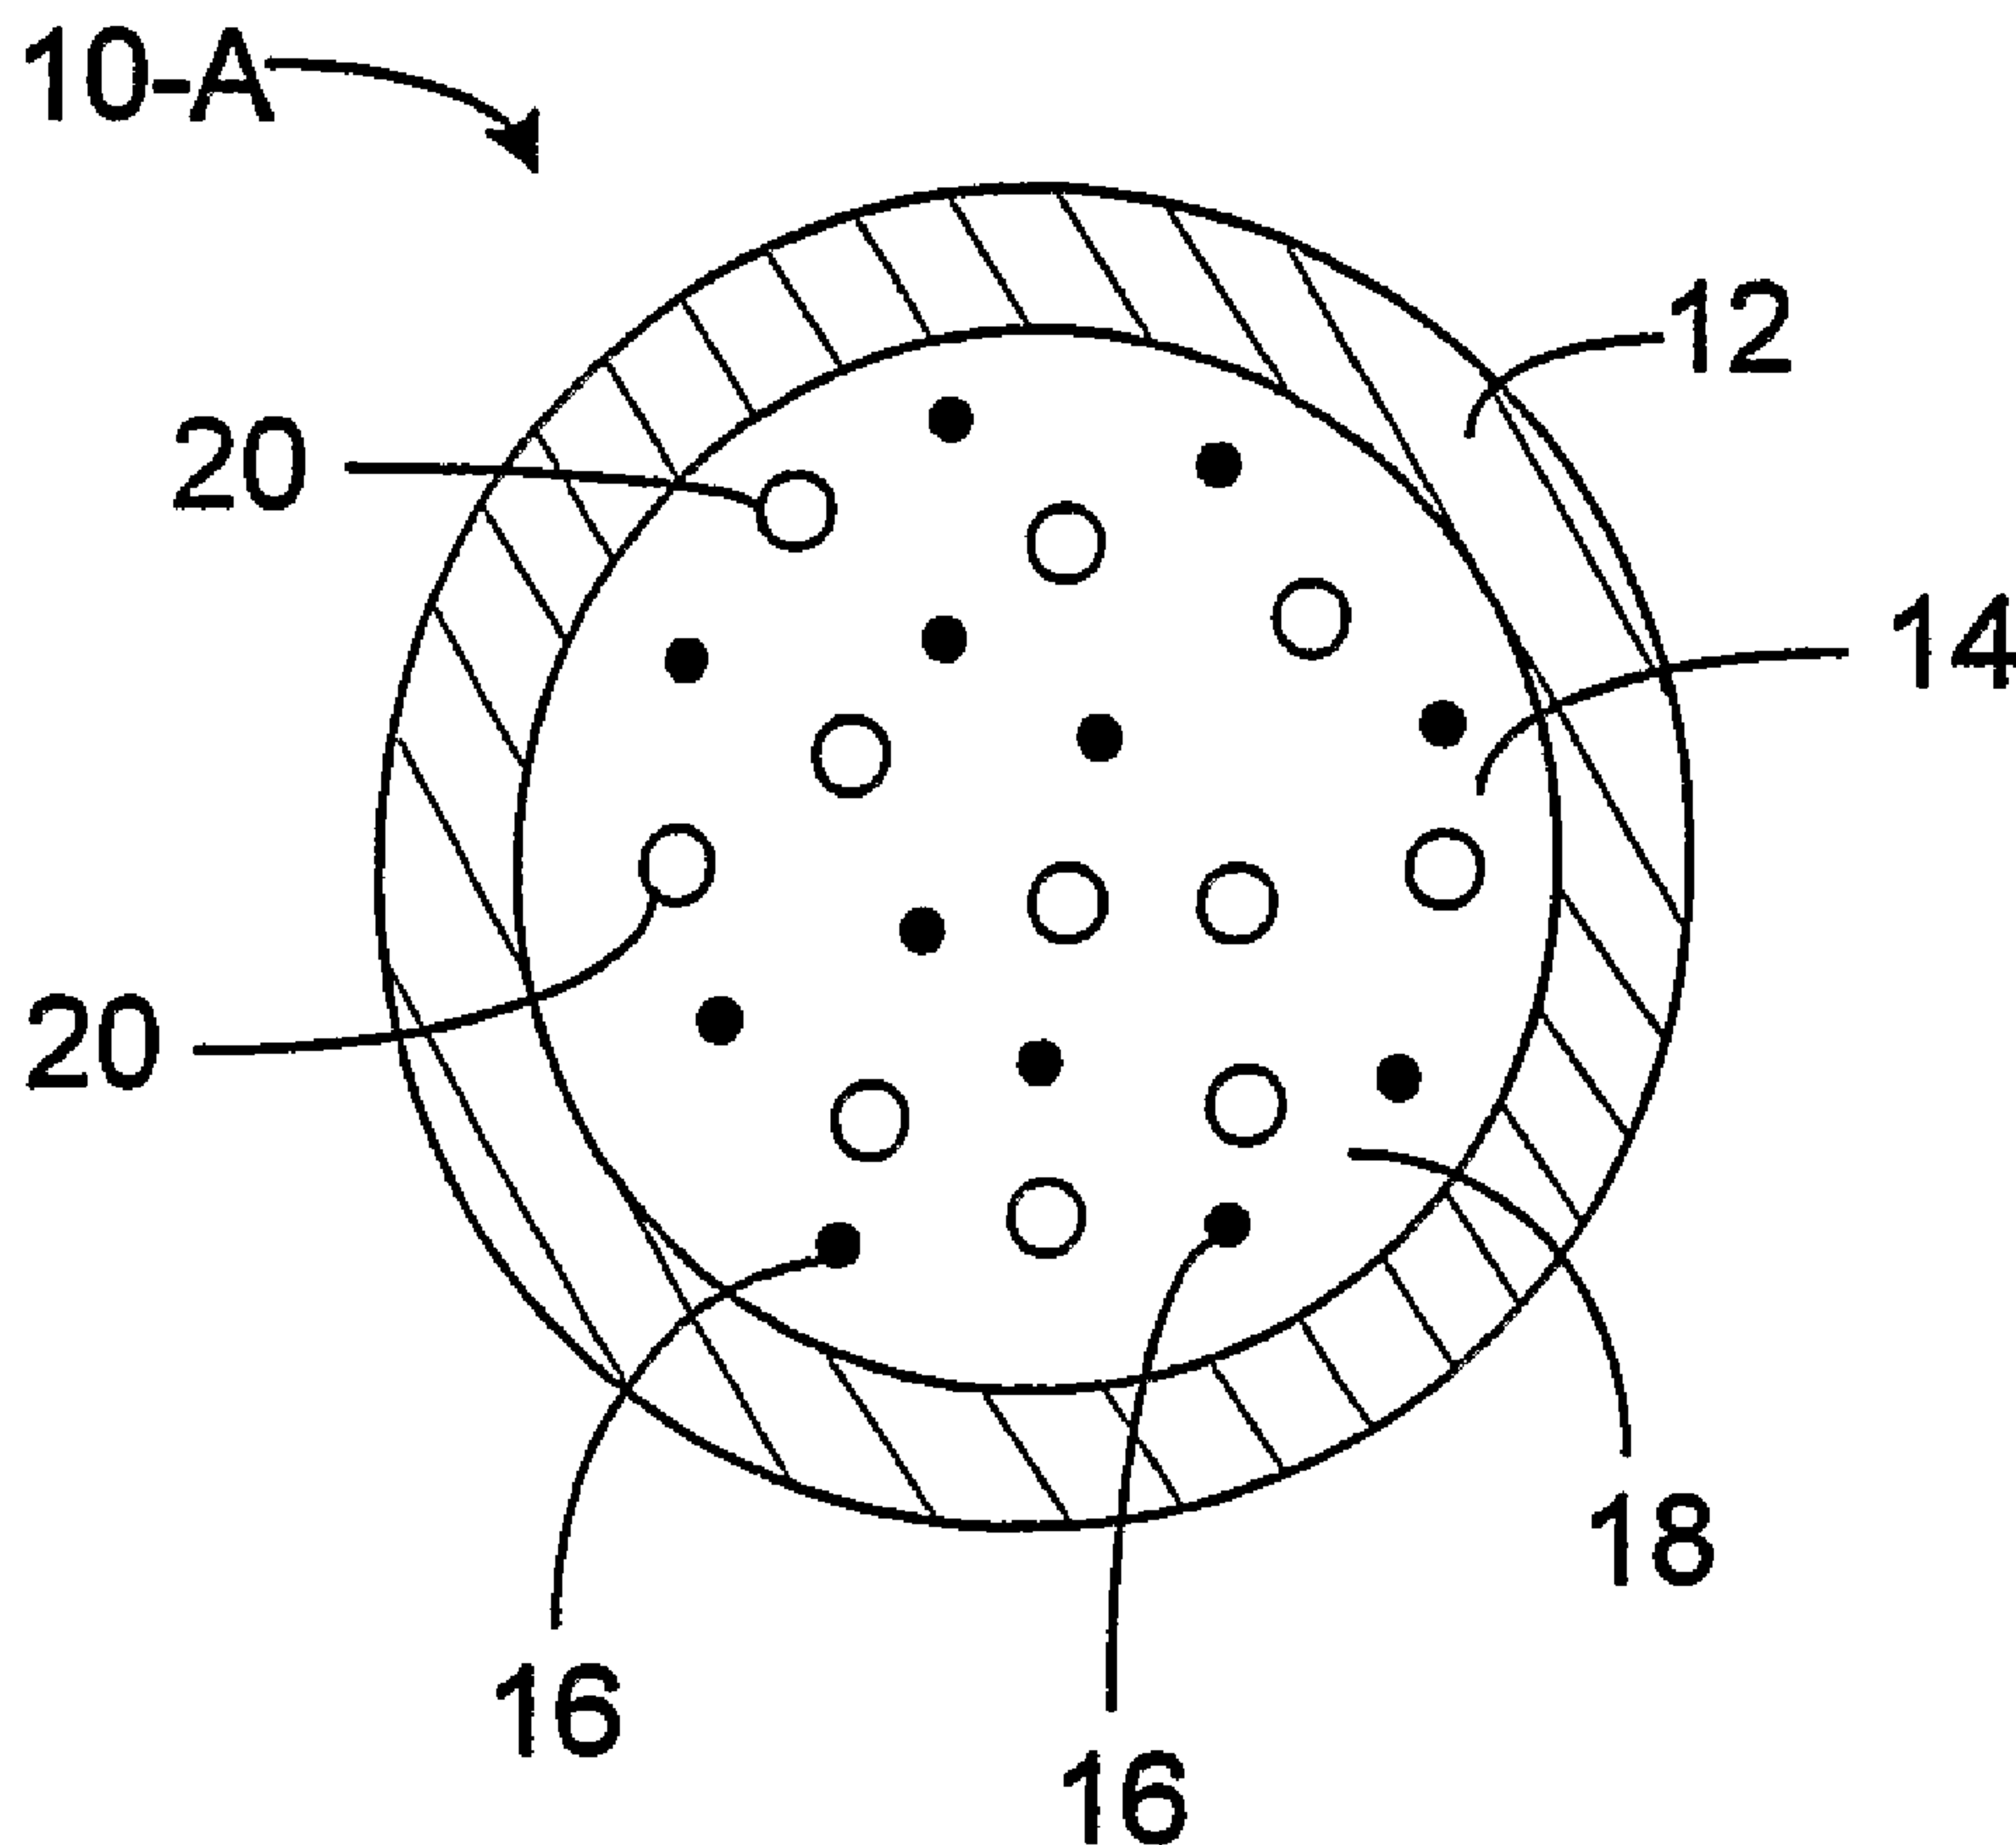

(57) Abrégé/Abstract:

A particle with a diameter of at most about 3,000 microns has an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 September 2006 (08.09.2006)

PCT

(10) International Publication Number
WO 2006/093969 A2

(51) International Patent Classification:

A61K 41/00 (2006.01) A61K 47/48 (2006.01)

(21) International Application Number:

PCT/US2006/007100

(22) International Filing Date:

28 February 2006 (28.02.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/070,967 2 March 2005 (02.03.2005) US

(71) Applicant (for all designated States except US): **BOSTON SCIENTIFIC SCIMED, INC.** [US/US]; One Scimed Place, Maple Grove, Minnesota 55311-1566 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDERSON, Steven M.** [US/US]; 20 Warner Place, Unit #2a, Worcester, Massachusetts 01604 (US). **LANPHERE, Janel** [US/US]; 91 Dora Street, Pawtucket, Rhode Island 02860 (US).

(74) Agents: **GAGEL, John J.** et al.; FISH & RICHARDSON P.C., P.o. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PARTICLES

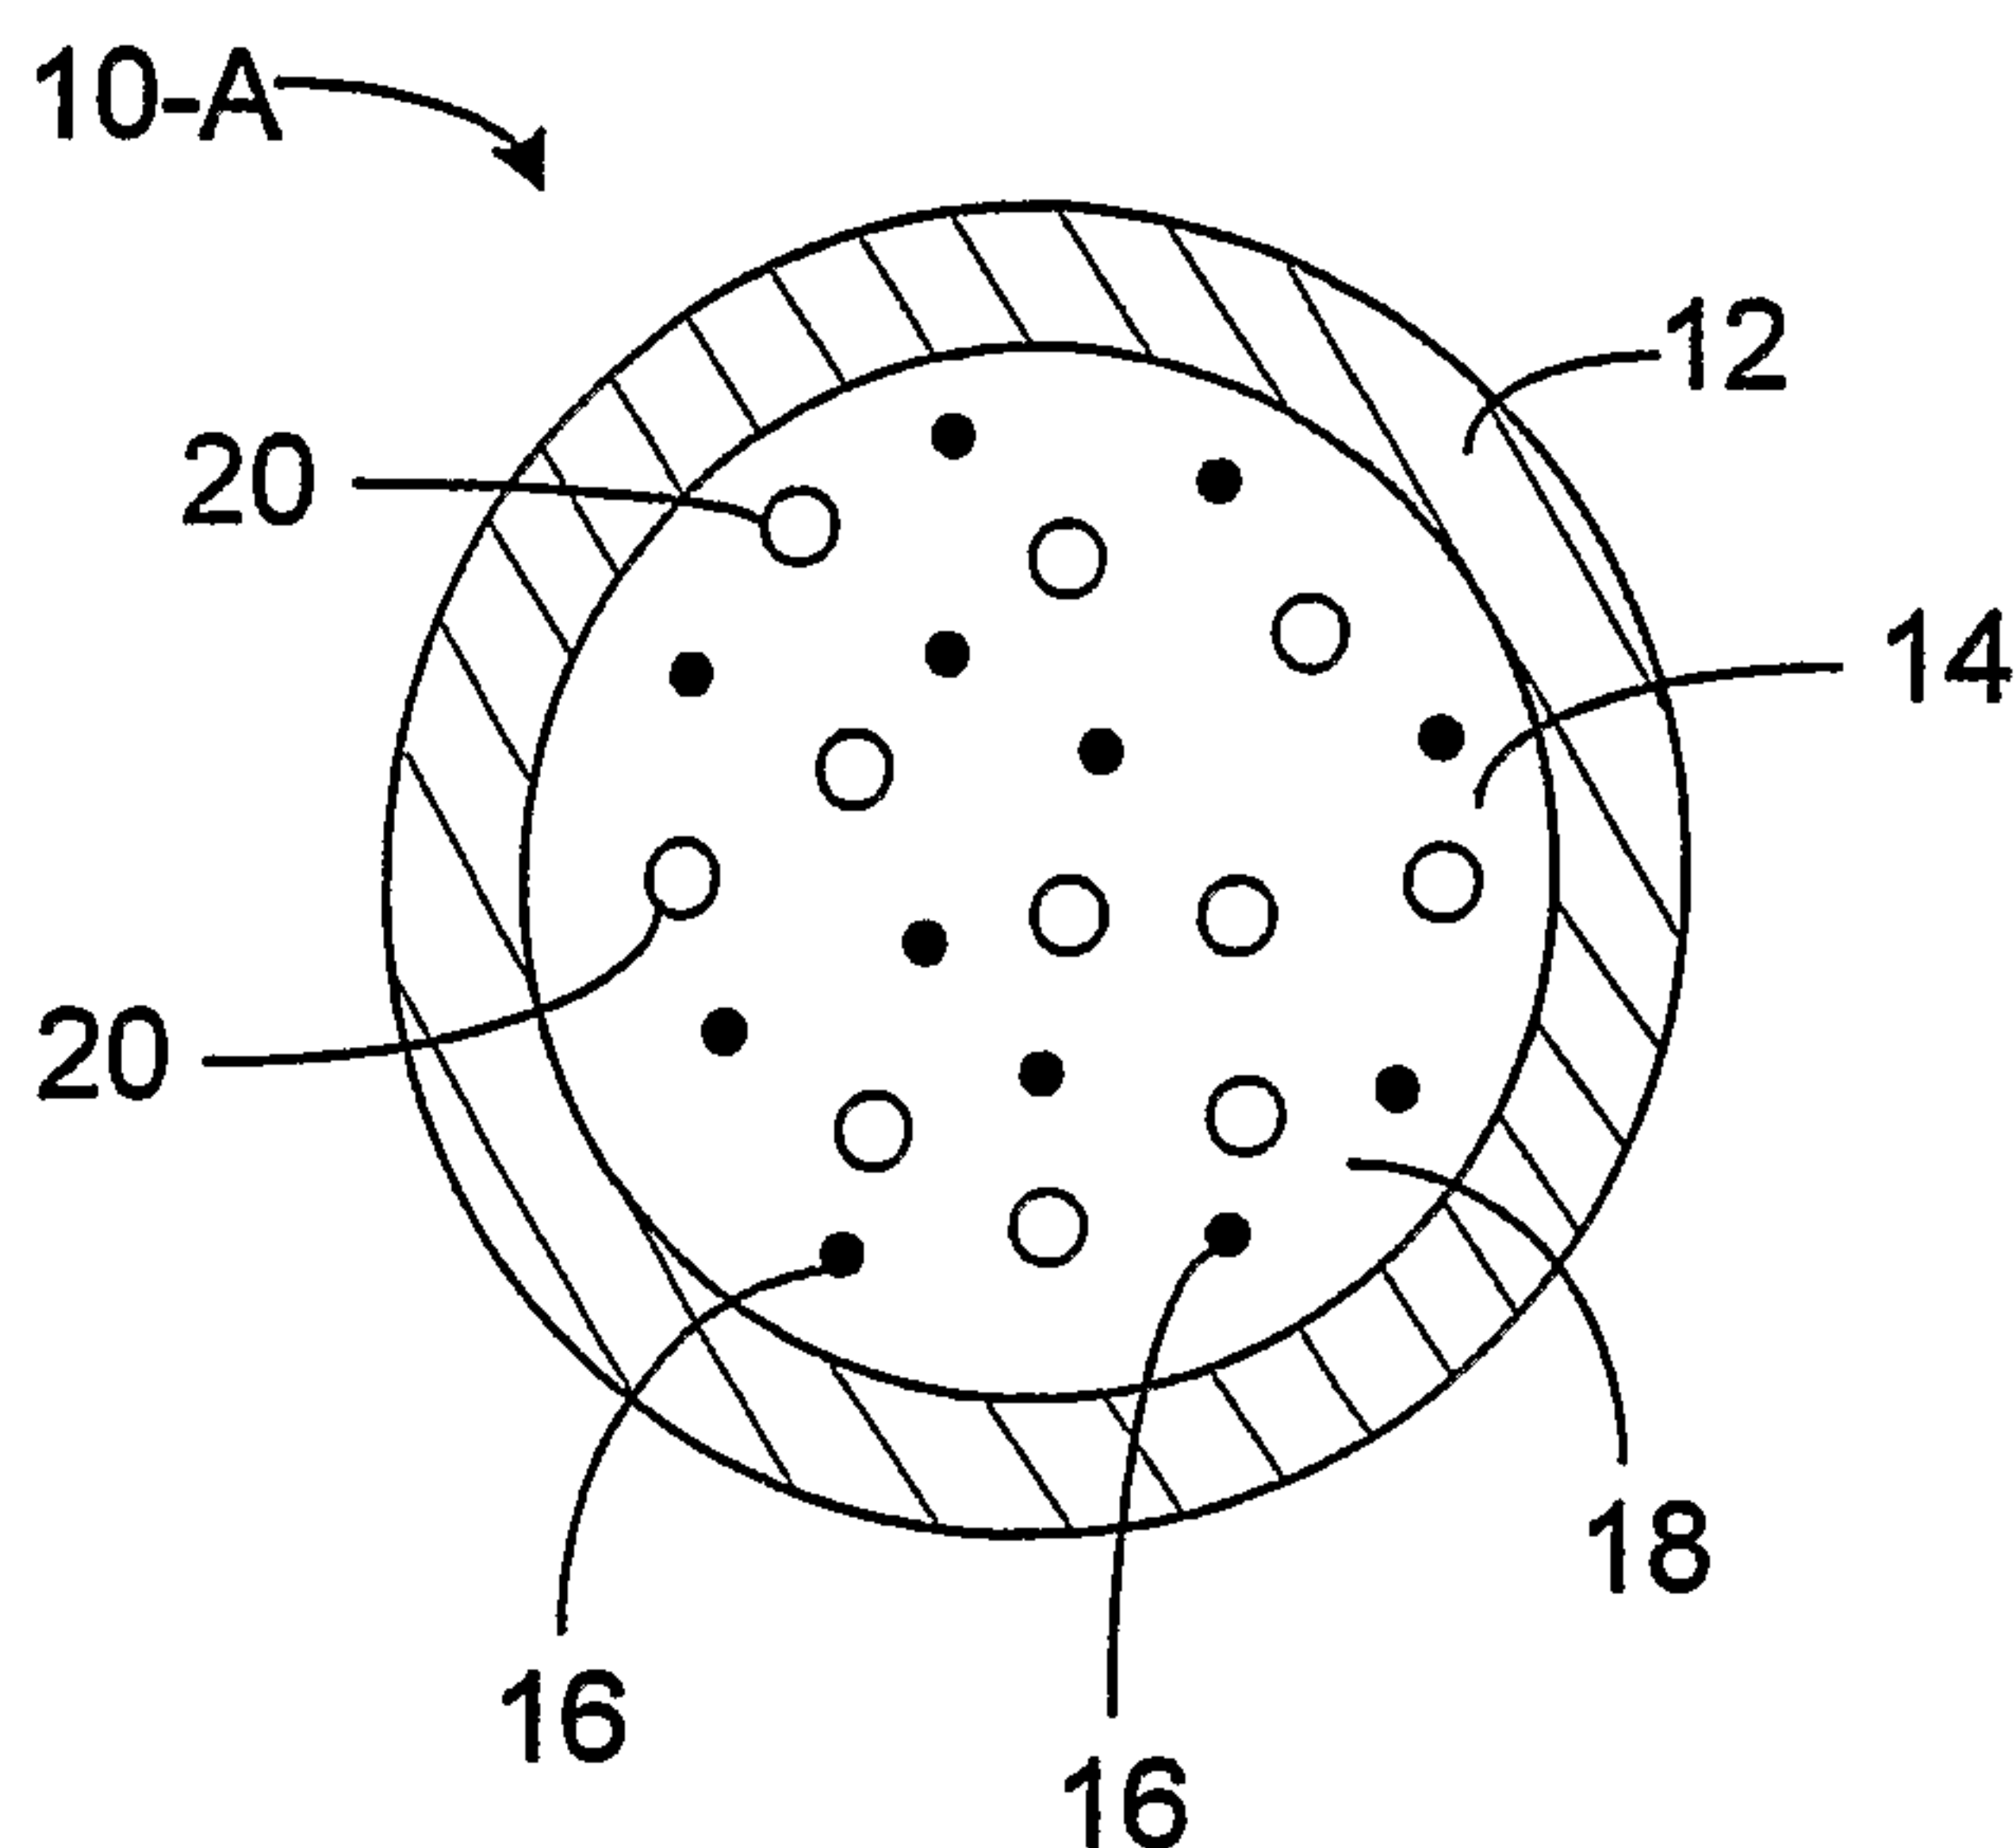

(57) Abstract: A particle with a diameter of at most about 3,000 microns has an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C.

WO 2006/093969 A2

Particles

TECHNICAL FIELD

The invention relates to particles, as well as related compositions and methods.

BACKGROUND

Energy, such as RF energy, can be employed (e.g., in a tissue ablation procedure) to degrade unhealthy or unwanted tissue, such as warts, moles, cysts, scar tissue, and/or tumors. In some cases, for example, an RF electrode can be delivered into the unhealthy or unwanted tissue via a catheter. Once positioned within the tumor, RF-emitting tines can be deployed and activated. Upon activation, the tines can emit RF energy to degrade the tissue by, for example, heating the tissue.

SUMMARY

In one aspect, the invention features a particle with a diameter of at most about 3,000 microns and an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C (e.g., at a temperature of about 20°C).

In another aspect, the invention features a particle including a gas generator and having a diameter of at most about 3,000 microns. When the gas generator is heated to a temperature of at least about 35°C, the internal pressure of the particle increases to at least about 1.5 atmospheres.

In an additional aspect, the invention features a composition including a carrier fluid and particles disposed within the carrier fluid. The particles have an arithmetic mean diameter of at most about 3,000 microns. The environment surrounding the composition has a pressure of at least about 1.1 atmospheres (e.g., from about 1.1 atmospheres to about 1.5 atmospheres).

In a further aspect, the invention features a composition including a carrier fluid and particles disposed within the carrier fluid. The particles have an arithmetic mean diameter of at most about 3,000 microns. The temperature of the environment surrounding the composition is at most about 20°C (e.g., at most about 10°C).

In another aspect, the invention features a capsule including at least one particle having a diameter of at most about 3,000 microns and an internal pressure of at least

about 1.1 atmospheres at a temperature of less than about 25°C (e.g., at a temperature of about 20°C). The capsule has a maximum dimension of from about 3,000 microns to about 5,000 microns.

5 In an additional aspect, the invention features a method that includes exposing a particle with an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C (e.g., at a temperature of about 20°C) to a temperature of at least about 35°C. The particle has a diameter of at most about 3,000 microns.

10 In a further aspect, the invention features a method including increasing the internal pressure of a particle by at least about five percent (e.g., from about five percent to about 50 percent). The particle has a diameter of at most about 3,000 microns.

15 In another aspect, the invention features a method that includes exposing a particle to a first temperature of at most about 20°C (e.g., from about 0°C to about 20°C, from about 4°C to about 20°C), and exposing the particle to a second temperature of at least about 35°C (e.g., at least about 37°C, at least about 90°C) to burst the particle. The particle has a diameter of at most about 3,000 microns.

In an additional aspect, the invention features a method that includes delivering a particle with a diameter of at most about 3,000 microns, and an internal pressure of about 1.5 atmospheres at a temperature of about 35°C, into the tissue of a subject.

20 In a further aspect, the invention features a method of making a particle that has an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C (e.g., at a temperature of about 20°C), and a diameter of at most about 3,000 microns. The method includes forming a particle precursor in an environment having a pressure of at least about 1.1 atmospheres, and coating the particle precursor to form the particle.

25 In another aspect, the invention features a method of making a particle having an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C and a diameter of at most about 3,000 microns. The method includes forming the particle at a temperature of at most about 20°C.

Embodiments may also include one or more of the following.

30 In certain embodiments, the particle can include (e.g., encapsulate) one or more gases, such as carbon dioxide, nitrogen, oxygen, or water vapor.

In certain embodiments, the particle can have an internal pressure of at least about 1.1 atmospheres at a temperature of about 20°C, at least about 1.2 atmospheres at a temperature of about 25°C, at least about 1.3 atmospheres at a temperature of about 30°C, and/or at least about 1.5 atmospheres at a temperature of at least about 35°C. In some
5 embodiments, the particle can have an internal pressure of at least about 1.5 atmospheres at a temperature of at least about 90°C (e.g., from about 90°C to about 95°C).

When the particle is heated to a temperature of at least about 25°C (e.g., at least about 35°C, at least about 90°C), the internal pressure of the particle can increase by at least about five percent (e.g., at least about 10 percent, at least about 20 percent, at least
10 about 30 percent, at least about 40 percent).

In some embodiments, the particle can burst at a temperature of at least about 35°C (e.g., at least about 90°C, from about 90°C to about 95°C), and/or at an internal pressure of at least about 1.2 atmospheres (e.g., at least about 1.3 atmospheres, at least about 1.4 atmospheres, at least about 1.5 atmospheres).

The particle can include a gas generator, and when the gas generator is heated to a temperature of at least about 25°C (e.g., at least about 30°C, at least about 35°C, at least about 90°C, at least about 100°C), the internal pressure of the particle can increase. For example, when the gas generator is heated to a temperature of from about 90°C to about 95°C, the internal pressure of the particle can increase. In certain embodiments, the
15 internal pressure of the particle can increase to at least about 1.2 atmospheres (e.g., at least about 1.3 atmospheres, at least about 1.4 atmospheres, at least about 1.5 atmospheres), and/or by at least about five percent (e.g., at least about 10 percent, at least about 20 percent, at least about 30 percent, at least about 40 percent). In some
20 embodiments, the internal pressure of the particle can increase by from about five percent to about 50 percent.
25

The gas generator can include, for example, dry ice, ice, water, and/or saline. The gas generator can be disposed in an interior region of the particle, and/or can be disposed within one or more pores of the particle. When exposed to a temperature of at least about 25°C (e.g., at least about 30°C, at least about 35°C), the gas generator can generate gas
30 (e.g., carbon dioxide, water vapor).

The particle can include one or more thermally conductive materials, such as a metal (e.g., iron, aluminum, cobalt, copper, silver, molybdenum, zinc, gold, iridium) or a metal alloy (e.g., steel). In some embodiments, the particle can include a non-metal thermally conductive material, such as silicon or carbon. In certain embodiments, the particle can include one or more electrically conductive materials, such as a metal (e.g., silver, copper, gold, aluminum, iridium, zinc, iron, nickel, molybdenum, cobalt) or a metal alloy (e.g., steel). In certain embodiments, the particle can include one or more materials that are both thermally conductive and electrically conductive, such as silver, copper, gold, aluminum, iridium, molybdenum, zinc, or steel.

In some embodiments, the particle can include a polymer, such as a polyvinyl alcohol, a polyacrylic acid, a polymethacrylic acid, a poly vinyl sulfonate, a carboxymethyl cellulose, a hydroxyethyl celluloses, a substituted cellulose, a polyacrylamide, a polyethylene glycol, a polyamide, a polyurea, a polyurethane, a polyester, a polyether, a polystyrene, a polysaccharide, a polylactic acid, a polyethylene, a polymethylmethacrylate, a polycaprolactone, a polyglycolic acid, a poly(lactic-co-glycolic) acid (e.g., a poly(d-lactic-co-glycolic) acid), or a copolymer or mixture thereof.

In some embodiments, the particle can include a gelling precursor, such as alginate, an alginate salt, a xanthan gum, natural gum, agar, agarose, chitosan, carrageenan, fucoidan, furcellaran, laminaran, hypnea, eucheuma, gum arabic, gum ghatti, gum karaya, gum tragacanth, hyaluronic acid, locust beam gum, arabinogalactan, pectin, or amylopectin. For example, the particle can include sodium alginate.

The particle can include a ferromagnetic material. In some embodiments, at least some of the ferromagnetic material can be disposed within an interior region of the particle. The ferromagnetic material can be a transition metal (e.g., nickel, cobalt, iron), a metal alloy (e.g., Mu-metal), or a metal oxide (e.g., magnetite). In certain embodiments, the ferromagnetic material can be a soft ferrite, a rare-earth magnet alloy, or an amorphous and non-earth alloy. The ferromagnetic material can be, for example, in the shape of at least one article that is a particle, fiber, flake, or powder, and/or that has a diameter of from about two microns to about 20 microns.

In some embodiments in which the particle includes a ferromagnetic material, exposing the particle to a temperature of at least about 35°C can cause at least some of

the ferromagnetic material to be released from the particle. At least some of the ferromagnetic material can be released into the tissue of a subject.

The particle can be porous. The particle can have a porous region. The pore density of an interior region of the particle can be greater than the pore density of an exterior region of the particle.

The particle can include a coating. The coating can have a thickness of at most 0.02 inch (e.g., from 0.001 inch to 0.02 inch). In certain embodiments, the coating can have a thickness of at most 0.004 inch (e.g., from 0.00004 inch to 0.004 inch).

The particle can be substantially spherical.

The capsule can include a plurality of particles, and/or can have an internal pressure of at least about 1.1 atmospheres.

Exposing the particle to a temperature of least about 35°C (e.g., at least about 37°C, at least about 90°C) can cause the internal pressure of the particle to increase to at least about 1.5 atmospheres, and/or can cause the particle to burst. The particle can be exposed to a temperature of at least about 35°C (e.g., at least about 37°C, at least about 90°C) by delivering the particle into the tissue of a subject (e.g., tissue that includes a tumor). Delivering a particle into the tissue of a subject can include exposing the particle to an external pressure of at least about one atmosphere. In some embodiments, exposing the particle to a temperature of at least about 35°C (e.g., at least about 37°C, at least about 90°C) can include heating the particle. In certain embodiments, an RF electrode can be used to heat the particle. In some embodiments, the method can further include ablating at least a portion of the tissue of the subject. In certain embodiments, increasing the internal pressure of the particle by at least about five percent can cause the particle to burst.

The method can further include contacting the particle with an agent (e.g., an alcohol, hydrochloric acid, sodium hydroxide, sodium citrate, sodium hexametaphosphate) that can dissolve or erode at least a portion of the particle.

The particle can include a therapeutic agent. Exposing the particle to a temperature of at least about 35°C (e.g., at least about 37°C, at least about 90°C) can include releasing the therapeutic agent from the particle.

Embodiments can include one or more of the following advantages.

In some embodiments, the particle can enhance tissue heating and/or ablation procedures. For example, in embodiments in which the particle includes a ferromagnetic material, the ferromagnetic material can be released from the particle when the particle bursts at a target site (e.g., within the tissue of a subject). In certain embodiments, the ferromagnetic material can be delivered to the target site relatively quickly, and/or can be distributed relatively uniformly throughout and/or on top of the target site. When exposed to RF radiation, the ferromagnetic material can become heated and, in turn, can heat (e.g., ablate) the target site (e.g., the tissue). A relatively uniform distribution of the ferromagnetic material throughout and/or on top of the target site can provide for relatively even ablation of the target site and, correspondingly, for a relatively uniform and consistent burn.

In certain embodiments, the particle can be used to deliver one or more therapeutic agents (e.g., drugs) to a target site relatively efficiently and effectively. For example, once delivered to a target site, the particle can burst, and can thereby release therapeutic agent. In some embodiments, the particle can be used to deliver a therapeutic agent directly to the target site, such that the therapeutic agent can have an immediate effect on the target site. In certain embodiments, the particle can provide for the relatively wide and/or uniform distribution of therapeutic agent at a target site.

In some embodiments, the particle can be used both to enhance tissue heating and/or ablation procedures, and to provide one or more therapeutic agents to a target site. For example, a particle can include both a ferromagnetic material and a therapeutic agent. When the particle bursts at a target site, the particle can release the ferromagnetic material and the therapeutic agent to the target site, such that the ferromagnetic material can be used in a tissue heating/ablation procedure, and the therapeutic agent can be used to treat the target site.

Features and advantages are in the description, drawings, and claims.

DESCRIPTION OF DRAWINGS

FIG. 1A is a cross-sectional view of an embodiment of a particle.

FIG. 1B is a cross-sectional view of the particle of FIG. 1A, as the particle is bursting.

FIG. 2A is a cross-sectional view of a cancerous liver of a subject.

FIG. 2B illustrates administration of the particles of FIG. 1A into the liver of FIG. 2A.

FIG. 2C is a cross-sectional view of the liver of FIGS. 2A and 2B, after the particles have been administered into the liver.

FIG. 2D is a cross-sectional view of the liver of FIGS. 2A, 2B, and 2C, after the particles have burst.

FIG. 2E illustrates an RF electrode with tines deployed within the cancerous tissue region of the liver of FIGS. 2A, 2B, 2C, and 2D.

FIG. 3 is a cross-sectional view of an embodiment of a particle.

FIG. 4A is a cross-sectional view of an embodiment of a particle.

FIG. 4B is a cross-sectional view of an embodiment of a particle.

FIG. 5A is a schematic of the manufacture of particles.

FIG. 5B is an enlarged schematic of region 5B in FIG. 5A.

FIG. 6A is a cross-sectional view of an embodiment of an apparatus for producing particles.

FIG. 6B is an illustration of the production of particles by the apparatus of FIG. 6A.

FIG. 7 is a side view of an embodiment of a capsule of particles.

FIG. 8A is a cross-sectional view of a liver of a subject.

FIG. 8B illustrates delivery of a cannula into the liver of FIG. 8A.

FIG. 8C illustrates administration of particles into the liver of FIG. 8A.

FIG. 8D is a cross-sectional view of the liver of FIG. 8A, after the particles have been administered into the liver.

FIG. 8E illustrates delivery of an RF electrode into the liver of FIG. 8A.

FIG. 8F illustrates an RF electrode with tines deployed within the cancerous tissue region of the liver of FIG. 8A.

FIG. 9 is a cross-sectional view of an embodiment of a particle.

FIG. 10A is a cross-sectional view of an embodiment of a particle.

FIG. 10B is a cross-sectional view of an embodiment of a particle.

DETAILED DESCRIPTION

FIG. 1A shows a particle 10-A at a temperature of less than about 25°C. Particle 10-A has a coating 12 that encloses an interior region 14 formed of a matrix 18 and ferromagnetic particles 16. Pockets 20 of carbon dioxide gas are dispersed throughout matrix 18. At a temperature of less than about 25°C, particle 10-A has an internal pressure of at least about 1.1 atmospheres.

FIG. 1B shows a burst particle 10-B, which is the result of the exposure of particle 10-A to a temperature of at least about 35°C. The increase in temperature results in an increase in the pressure of the carbon dioxide gas within pockets 20, and thus in the internal pressure of particle 10-A. This increase in internal pressure eventually causes particle 10-A to burst, forming burst particle 10-B. When particle 10-A bursts, it releases ferromagnetic particles 16.

In general, the internal pressure of particle 10-A at a given temperature can be selected so that when particle 10-A is heated to a certain higher temperature, particle 10-A will burst. In some embodiments, at a temperature of less than about 25°C, particle 10-A can have an internal pressure of at least about 1.1 atmospheres (e.g., at least about 1.2 atmospheres, at least about 1.3 atmospheres, at least about 1.4 atmospheres, at least about 1.5 atmospheres, at least about two atmospheres, at least about three atmospheres, at least about four atmospheres), and/or at most about five atmospheres (e.g., at most about four atmospheres, at most about three atmospheres, at most about two atmospheres, at most about 1.5 atmospheres, at most about 1.4 atmospheres, at most about 1.3 atmospheres, at most about 1.2 atmospheres). In certain embodiments, at a temperature of less than about 25°C (e.g., at a temperature of from about 0°C to about 20°C, at a temperature of from about 4°C to about 20°C, at a temperature of about 20°C), particle 10-A can have an internal pressure of from about 1.1 atmospheres to about 1.5 atmospheres.

Generally, as the temperature of the environment surrounding particle 10-A (and, therefore, the temperature of particle 10-A itself) increases, the internal pressure of particle 10-A can also increase. In certain embodiments, the increase in the temperature of particle 10-A (e.g., to at least about 25°C, at least about 35°C, or at least about 90°C) can cause the internal pressure of particle 10-A to increase by at least about five percent (e.g., at least about 10 percent, at least about 20 percent, at least about 30 percent, at least

about 40 percent). For example, the internal pressure of particle 10-A can increase by from about five percent to about 50 percent as the temperature of particle 10-A increases (e.g., to at least about 25°C, at least about 35°C, or at least about 90°C). In some embodiments, the increase in the temperature of particle 10-A can cause the internal
5 pressure of particle 10-A to increase to at least about 1.2 atmospheres (e.g., at least about 1.3 atmospheres, at least about 1.4 atmospheres, at least about 1.5 atmospheres).

In some embodiments, particle 10-A can burst when the internal pressure of particle 10-A is at least about 1.1 atmospheres (e.g., at least about 1.2 atmospheres, at least about 1.3 atmospheres, at least about 1.4 atmospheres, at least about 1.5
10 atmospheres, at least about two atmospheres, at least about three atmospheres, at least about four atmospheres), and/or at most about five atmospheres (e.g., at most about four atmospheres, at most about three atmospheres, at most about two atmospheres, at most about 1.5 atmospheres, at most about 1.4 atmospheres, at most about 1.3 atmospheres, at most about 1.2 atmospheres). In certain embodiments, particle 10-A can be designed to
15 burst once particle 10-A has reached a predetermined internal pressure.

In some embodiments, particle 10-A can be designed to burst once particle 10-A has reached a predetermined temperature. In certain embodiments, particle 10-A can burst at a temperature of at least about 20°C (e.g., at least about 25°C, at least about 30°C, at least about 35°C, at least about 40°C, at least about 50°C, at least about 60°C, at
20 least about 70°C, at least about 80°C, at least about 90°C, at least about 100°C, at least about 125°C, at least about 150°C, at least about 175°C), and/or at most about 200°C (e.g., at most about 175°C, at most about 150°C, at most about 125°C, at most about 100°C, at most about 90°C, at most about 80°C, at most about 70°C, at most about 60°C, at most about 50°C, at most about 40°C, at most about 35°C, at most about 30°C, at most
25 about 25°C). For example, particle 10-A can burst at about 37°C.

The temperature at which particle 10-A bursts can be selected, for example, based on the application(s) for which particle 10-A is being used. For example, if particle 10-A is being used for an RF ablation procedure (such as the procedure described below with reference to FIGS. 2A-2E), it may be desirable for particle 10-A to remain intact until the
30 target site has been sufficiently heated. In some embodiments in which particle 10-A is

to be used in an ablation procedure, particle 10-A may be designed to burst at a temperature of at least about 90°C (e.g., from about 90°C to about 95°C).

Typically, the thickness of coating 12 of particle 10-A can be selected to accommodate an increase in the internal pressure of particle 10-A to a predetermined level, at which point particle 10-A may burst. In some embodiments, coating 12 can have a thickness of at most 0.02 inch (e.g., at most 0.01 inch, at most 0.005 inch, at most 0.004 inch), and/or at least 0.00004 inch (e.g., at least 0.004 inch, at least 0.005 inch, at least 0.01 inch). For example, coating 12 may have a thickness of from 0.00004 inch to 0.02 inch (e.g., from 0.001 inch to 0.02 inch).

Coating 12 and matrix 18 of particle 10-A can be formed of the same materials or different materials. In some embodiments, coating 12 and/or matrix 18 can be formed of at least one polymer and/or at least one non-polymer. In certain embodiments, coating 12 and/or matrix 18 can be formed of at least gelling precursor. In general, coating 12 and/or matrix 18 can be formed of one or more materials that are biocompatible, bioerodible, and/or bioabsorbable.

Examples of polymers include polyvinyl alcohols, polyacrylic acids, polymethacrylic acids, poly vinyl sulfonates, carboxymethyl celluloses, hydroxyethyl celluloses, substituted celluloses, polyacrylamides, polyethylene glycols, polyamides (e.g., nylon), polyureas, polyurethanes, polyesters, polyethers, polystyrenes, polysaccharides (e.g., alginate, agarose), polylactic acids, polyethylenes, polymethylmethacrylates, polyethylacrylate, polycaprolactones, polyglycolic acids, poly(lactic-co-glycolic) acids (e.g., poly(d-lactic-co-glycolic) acids), and copolymers or mixtures thereof. In certain embodiments, the polymer can be a highly water insoluble, high molecular weight polymer. An example of such a polymer is a high molecular weight polyvinyl alcohol (PVA) that has been acetalized. The polymer can be substantially pure intrachain 1,3-acetalized PVA and substantially free of animal derived residue such as collagen.

Examples of gelling precursors include alginates, alginate salts (e.g. sodium alginate), xanthan gums, natural gum, agar, agarose, chitosan, carrageenan, fucoidan, furcellaran, laminaran, hypnea, eucheuma, gum arabic, gum ghatti, gum karaya, gum tragacanth, hyalauronic acid, locust beam gum, arabinogalactan, pectin, amylopectin,

other water soluble polysaccharides and other ionically cross-linkable polymers. A particular gelling precursor is sodium alginate. A preferred sodium alginate is high guluronic acid, stem-derived alginate (e.g., about 50 percent or more, about 60 percent or more guluronic acid) with a low viscosity (e.g., from about 20 centipoise to about 80 centipoise at 20°C), which produces a high tensile, robust gel.

Examples of bioerodible and/or bioabsorbable materials include polysaccharides (e.g., alginate); polysaccharide derivatives; inorganic, ionic salts; water soluble polymers (e.g., polyvinyl alcohol, such as polyvinyl alcohol that has not been cross-linked); biodegradable poly DL-lactide-poly ethylene glycol (PELA); hydrogels (e.g., polyacrylic acid, haluronic acid, gelatin, carboxymethyl cellulose); polyethylene glycol (PEG); chitosan; polyesters (e.g., polycaprolactones); poly(lactic-co-glycolic) acid (e.g., a poly(d-lactic-co-glycolic) acid); and combinations thereof. In some embodiments, a coating can include sodium alginate.

In certain embodiments in which a coating is formed of a bioerodible and/or bioabsorbable material, the coating can begin to erode once it has been delivered into the body. For example, the coating may be designed to erode upon contact with blood. The erosion of the coating can result in a reduction in the thickness of the coating, which can accelerate the bursting of the particle once the internal pressure of the particle has reached a predetermined level. In some embodiments in which a coating is formed of one or more bioerodible and/or bioabsorbable materials, the coating can be relatively thick prior to delivery to a target site. This thickness can, for example, provide enhanced durability to the particle during storage and/or delivery.

In certain embodiments, a particle can include multiple (e.g., two, three, four, five) coatings formed of one or more of the materials described above.

Ferromagnetic particles 16 can include one type ferromagnetic material, or multiple types of ferromagnetic materials. In some embodiments, some ferromagnetic particles 16 are formed of one type of ferromagnetic material, while others ferromagnetic particles 16 are formed of a different type of ferromagnetic material. As used herein, a ferromagnetic material refers to a material that has a magnetic susceptibility of at least about 0.075 or more (e.g., at least about 0.1 or more; at least about 0.2 or more; at least about 0.3 or more; at least about 0.4 or more; at least about 0.5 or more; at least about one

or more; at least about 10 or more; at least about 100 or more; at least about 1,000 or more; at least about 10,000 or more) when measured at 25°C. A ferromagnetic material can be, for example, a metal (e.g., a transition metal such as nickel, cobalt, or iron), a metal alloy (e.g., a nickel-iron alloy such as Mu-metal), a metal oxide (e.g., an iron oxide such as magnetite), a ceramic nanomaterial, a soft ferrite (e.g., nickel-zinc-iron), a magnet alloy (e.g., a rare earth magnet alloy such as a neodymium-iron-boron alloy or a samarium-cobalt alloy), an amorphous alloy (e.g., iron-silicon-boron), a non-earth alloy, or a silicon alloy (e.g., an iron-zirconium-copper-boron-silicon alloy, an iron-zirconium-copper-boron-silicon alloy). Magnetite is commercially available from FerroTec Corporation (Nashua, NH), under the tradename EMG 1111 Ferrofluid. Iron-copper-niobium-boron-silicon alloys are commercially available from Hitachi Metals of America under the tradename Finemet™. Iron-zirconium-copper-boron-silicon alloys are commercially available from MAGNETEC GmbH under the tradename Nanoperm®. Typically, the ferromagnetic material can be a biocompatible material. In some embodiments, the ferromagnetic material is a bioerodible material, such that the material can eventually break down in the body and either be dispersed throughout the body or excreted from the body. In certain embodiments, the ferromagnetic material may not be biocompatible. In such embodiments, the ferromagnetic material may be encapsulated in a biocompatible material, such as polyvinyl alcohol or sodium alginate.

Typically, the velocity at which ferromagnetic particles exit particle 10-A when particle 10-A bursts can be selected to distribute ferromagnetic particles sufficiently across the target site.

In general, particle 10-A can have a diameter of at most about 3,000 microns (e.g., from about two microns to about 3,000 microns, from about 10 microns to about 3,000 microns, from about 40 microns to about 2,000 microns; from about 100 microns to about 700 microns; from about 500 microns to about 700 microns; from about 100 microns to about 500 microns; from about 100 microns to about 300 microns; from about 300 microns to about 500 microns; from about 500 microns to about 1,200 microns; from about 500 microns to about 700 microns; from about 700 microns to about 900 microns; from about 900 microns to about 1,200 microns). In some embodiments, particle 10-A can have a diameter of at most about 3,000 microns (e.g., at most about 2,500 microns; at

most about 2,000 microns; at most about 1,500 microns; at most about 1,200 microns; at most about 1,000 microns; at most about 900 microns; at most about 700 microns; at most about 500 microns; at most about 400 microns; at most about 300 microns; at most about 100 microns), and/or at least about two microns (e.g., at least about 10 microns, at least about 100 microns; at least about 300 microns; at least about 400 microns; at least about 500 microns; at least about 700 microns; at least about 900 microns; at least about 1,000 microns; at least about 1,200 microns; at least about 1,500 microns; at least about 2,000 microns; at least about 2,500 microns).

In certain embodiments, particle 10-A can be substantially spherical. In some embodiments, particle 10-A can have a sphericity of about 0.8 or more (e.g., about 0.85 or more, about 0.9 or more, about 0.95 or more, about 0.97 or more). Particle 10-A can be, for example, manually compressed, essentially flattened, while wet to about 50 percent or less of its original diameter and then, upon exposure to fluid, regain a sphericity of about 0.8 or more (e.g., about 0.85 or more, about 0.9 or more, about 0.95 or more, about 0.97 or more). The sphericity of a particle can be determined using a Beckman Coulter RapidVUE Image Analyzer version 2.06 (Beckman Coulter, Miami, FL). Briefly, the RapidVUE takes an image of continuous-tone (gray-scale) form and converts it to a digital form through the process of sampling and quantization. The system software identifies and measures particles in an image in the form of a fiber, rod or sphere. The sphericity of a particle, which is computed as D_a/D_p (where $D_a = \sqrt{(4A/\pi)}$; $D_p = P/\pi$; A = pixel area; P = pixel perimeter), is a value from zero to one, with one representing a perfect circle.

Typically, when used, particles 10-A can be disposed within a carrier fluid to form a composition (e.g., a suspension) which can then be delivered to a target site. The carrier fluid can be, for example, a pharmaceutically acceptable carrier, such as saline, contrast agent, therapeutic agent, or a combination of these carriers. In some embodiments, the carrier fluid can include deionized water, water for injection, liquid polymer, gel polymer, gas, or a combination of these carriers.

Compositions that include particles such as particles 10-A can be delivered to various sites in the body, including, for example, sites having cancerous lesions, such as the breast, prostate, lung, thyroid, or ovaries. The compositions can be used in the

treatment of, for example, fibroids, tumors, internal bleeding, arteriovenous malformations (AVMs), and/or hypervascular tumors. Fibroids can include uterine fibroids which grow within the uterine wall (intramural type), on the outside of the uterus (subserosal type), inside the uterine cavity (submucosal type), between the layers of broad ligament supporting the uterus (interligamentous type), attached to another organ (parasitic type), or on a mushroom-like stalk (pedunculated type). Internal bleeding includes gastrointestinal, urinary, renal and varicose bleeding. AVMs are for example, abnormal collections of blood vessels, e.g. in the brain, which shunt blood from a high pressure artery to a low pressure vein, resulting in hypoxia and malnutrition of those regions from which the blood is diverted. In some embodiments, a composition containing the particles can be used to prophylactically treat a condition.

The magnitude of a dose of a composition can vary based on the nature, location and severity of the condition to be treated, as well as the route of administration. A physician treating the condition, disease or disorder can determine an effective amount of composition. An effective amount of composition refers to the amount sufficient to result in amelioration of symptoms or a prolongation of survival of the subject. The compositions can be administered as pharmaceutically acceptable compositions to a subject in any therapeutically acceptable dosage, including those administered to a subject intravenously, subcutaneously, percutaneously, intratracheally, intramuscularly, intramucosally, intracutaneously, intra-articularly, intra-arterially, orally or parenterally.

A composition can include a mixture of particles (e.g., particles that have different internal pressures, particles that include different types of ferromagnetic materials), or can include particles that are all of the same type. In some embodiments, a composition can be prepared with a calibrated concentration of particles for ease of delivery by a physician. A physician can select a composition of a particular concentration based on, for example, the type of procedure to be performed. In certain embodiments, a physician can use a composition with a relatively high concentration of particles during one part of a procedure, and a composition with a relatively low concentration of particles during another part of a procedure.

Suspensions of particles in saline solution can be prepared to remain stable (e.g., to remain suspended in solution and not settle and/or float) over a desired period of time.

A suspension of particles can be stable, for example, for from about one minute to about 20 minutes (e.g. from about one minute to about 10 minutes, from about two minutes to about seven minutes, from about three minutes to about six minutes).

In some embodiments, particles can be suspended in a physiological solution by matching the density of the solution to the density of the particles. In certain
5 embodiments, the particles and/or the physiological solution can have a density of from about one gram per cubic centimeter to about 1.5 grams per cubic centimeter (e.g., from about 1.2 grams per cubic centimeter to about 1.4 grams per cubic centimeter, from about 1.2 grams per cubic centimeter to about 1.3 grams per cubic centimeter).

10 In some embodiments, the carrier fluid of a composition can include a surfactant. The surfactant can help the particles to mix evenly in the carrier fluid and/or can decrease the likelihood of the occlusion of a delivery device (e.g., a catheter) by the particles. In certain embodiments, the surfactant can enhance delivery of the composition (e.g., by enhancing the wetting properties of the particles and facilitating the passage of the
15 particles through a delivery device). In some embodiments, the surfactant can decrease the occurrence of air entrapment by the particles in a composition (e.g., by porous particles in a composition). Examples of liquid surfactants include Tween[®] 80 (available from Sigma-Aldrich) and Cremophor EL[®] (available from Sigma-Aldrich). An example of a powder surfactant is Pluronic[®] F127 NF (available from BASF). In certain
20 embodiments, a composition can include from about 0.05 percent by weight to about one percent by weight (e.g., about 0.1 percent by weight, about 0.5 percent by weight) of a surfactant. A surfactant can be added to the carrier fluid prior to mixing with the particles and/or can be added to the particles prior to mixing with the carrier fluid.

25 In some embodiments, among the particles delivered to a subject in a composition, the majority (e.g., at least about 50 percent, at least about 60 percent, at least about 70 percent, at least about 80 percent, at least about 90 percent) of the particles can have a diameter of at most about 3,000 microns (e.g., at most about 2,500 microns; at most about 2,000 microns; at most about 1,500 microns; at most about 1,200 microns; at most about 900 microns; at most about 700 microns; at most about 500 microns; at most
30 about 400 microns; at most about 300 microns; at most about 100 microns), and/or at least about 10 microns (e.g., at least about 100 microns; at least about 300 microns; at

least about 400 microns; at least about 500 microns; at least about 700 microns; at least about 900 microns; at least about 1,200 microns; at least about 1,500 microns; at least about 2,000 microns; at least about 2,500 microns).

In certain embodiments, the particles delivered to a subject in a composition have an arithmetic mean diameter of at most about 3,000 microns (e.g., at most about 2,500 microns; at most about 2,000 microns; at most about 1,500 microns; at most about 1,200 microns; at most about 900 microns; at most about 700 microns; at most about 500 microns; at most about 400 microns; at most about 300 microns; at most about 100 microns), and/or at least about 10 microns (e.g., at least about 100 microns; at least about 300 microns; at least about 400 microns; at least about 500 microns; at least about 700 microns; at least about 900 microns; at least about 1,200 microns; at least about 1,500 microns; at least about 2,000 microns; at least about 2,500 microns). Exemplary ranges for the arithmetic mean diameter of particles delivered to a subject include from about 100 microns to about 500 microns; from about 100 microns to about 300 microns; from about 300 microns to about 500 microns; from about 500 microns to about 700 microns; and from about 900 microns to about 1,200 microns. In general, the particles delivered to a subject in a composition can have an arithmetic mean diameter in approximately the middle of the range of the diameters of the individual particles, and a variance of at most about 20 percent (e.g., at most about 15 percent, at most about 10 percent).

In some embodiments, the arithmetic mean diameter of the particles delivered to a subject in a composition can vary depending upon the particular condition to be treated. As an example, in embodiments in which the particles in a composition are used to treat a liver tumor, the particles delivered to the subject can have an arithmetic mean diameter of at most about 500 microns (e.g., from about 100 microns to about 300 microns; from about 300 microns to about 500 microns). As another example, in embodiments in which the particles in a composition are used to treat a uterine fibroid, the particles delivered to the subject in a composition can have an arithmetic mean diameter of at most about 1,200 microns (e.g., from about 500 microns to about 700 microns; from about 700 microns to about 900 microns; from about 900 microns to about 1,200 microns).

The arithmetic mean diameter of a group of particles can be determined using a Beckman Coulter RapidVUE Image Analyzer version 2.06 (Beckman Coulter, Miami,

FL), described above. The arithmetic mean diameter of a group of particles (e.g., in a composition) can be determined by dividing the sum of the diameters of all of the particles in the group by the number of particles in the group.

A particle such as particle 10-A can be used, for example, to enhance tissue heating and/or an ablation procedure. For example, FIGS. 2A-2E illustrate the use of multiple particles 10-A in an ablation procedure that involves the exposure of unhealthy tissue to RF energy to damage or destroy the unhealthy tissue.

FIG. 2A shows a portion 100 of a subject including a liver 110 and skin 120. Liver 110 includes healthy tissue 130 and unhealthy tissue 140 (e.g., cancerous tissue, such as a cancerous tumor). FIG. 2B illustrates the delivery of particles 10-A into unhealthy tissue 140 of liver 110 using a needle 160. Needle 160 is in fluid communication with a syringe 170, which contains a composition including particles 10-A suspended in a carrier fluid 180. An end 190 of needle 160 is inserted into unhealthy tissue 140, and particles 10-A and carrier fluid 180 are then injected from syringe 170 into unhealthy tissue 140.

In certain embodiments, particles 10-A may not be suspended in a carrier fluid. For example, particles 10-A alone can be contained within syringe 170, and injected from syringe 170 into unhealthy tissue 140.

The pressure and/or temperature within syringe 170 can be selected to limit the extent of premature bursting by particles 10-A (e.g., before particles 10-A have reached unhealthy tissue 140). In some embodiments, the pressure within syringe 170 can be at least about 1.1 atmospheres (e.g., from about 1.1 atmospheres to about 1.5 atmospheres). The pressure within syringe 170 can be selected, for example, to be substantially equal to the internal pressure of particles 10-A. In certain embodiments, the temperature within syringe 170 can be at most about 32°C (e.g., at most about 20°C).

While embodiments have been described in which a needle is used to deliver particles 10-A into unhealthy tissue 140, in some embodiments, other delivery devices can be used to deliver particles 10-A into unhealthy tissue 140. As an example, particles 10-A can be delivered into unhealthy tissue 140 directly from a syringe. As another example, particles 10-A can be delivered into unhealthy tissue 140 using a catheter. Alternatively or additionally, particles 10-A can be delivered into unhealthy tissue 140 by

using other kinds of techniques. For example, an incision can be made in the subject to gain access to unhealthy tissue 140, and particles 10-A can be deposited directly into unhealthy tissue 140 through the incision.

While particles 10-A generally are intact when first delivered into unhealthy tissue 140 (as shown in FIG. 2B), as particles 10-A are heated to body temperature (about 37°C), particles 10-A burst, forming burst particles 10-B. As shown in FIG. 2C, when particles 10-A burst, they release ferromagnetic particles 16 into unhealthy tissue 140. In certain embodiments in which coating 12 and matrix 18 are formed of a bioerodible or bioabsorbable material (described above), coating 12 and matrix 18 can be eroded and/or absorbed by the body, leaving ferromagnetic particles 16 distributed throughout unhealthy tissue 140 (as shown in FIG. 2D).

FIG. 2E illustrates a method of treating unhealthy tissue 140 with RF energy using an RF electrode 185. As shown, RF electrode 185 is positioned within unhealthy tissue 140 (e.g., by insertion through skin 120 of the subject). Once RF electrode 185 is positioned within unhealthy tissue 140, tines 195 of RF electrode 185 are deployed within unhealthy tissue 140, and RF electrode 185 is activated so that RF energy is emitted from tines 195. The RF energy emitted from tines 195 can heat unhealthy tissue 140 around tines 195 to treat (e.g., ablate, damage, destroy) portions of unhealthy tissue 140 that are exposed to the energy.

Various algorithms can be used when exposing the particles to RF energy. In some embodiments, the RF power source is initially set at a power level of 30 Watts, and the power is increased by 10 Watts every minute. In certain embodiments, the RF power source is initially set at a power level of 60 Watts, and the power is increased by 10 Watts every 30 seconds. The end of the procedure can be determined, for example, by the temperature of the ablated tissue and/or by the measured impedance of the RF power circuit. Without wishing to be bound by theory, it is believed that the presence of ferromagnetic particles 16 in unhealthy tissue 140 may enhance the burning of unhealthy tissue 140 (which results in damage or destruction of the tissue) by RF electrode 185.

While certain embodiments of particles have been described, other embodiments of particles can be used to deliver material (e.g., ferromagnetic material, therapeutic agents) to a target site.

As an example, FIG. 3 shows a particle 200 that includes pores 202 and a matrix (e.g., a polymer matrix) 204. Ferromagnetic particles 206 are disposed within matrix 204 and some of pores 202. Pores 202 also include one or more gases. Like particle 10-A (FIG. 1A), particle 200 has an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C. When particle 200 is heated to a sufficient temperature, particle 200 bursts, releasing ferromagnetic particles 206.

As shown in FIG. 3, particle 200 can be considered to include a center region, C, from the center c' of particle 200 to a radius of about $r/3$, a body region, B, from about $r/3$ to about $2r/3$, and a surface region, S, from about $2r/3$ to r . The regions can be characterized by the relative size of pores 202 present in particle 200 in each region, the density of pores 202 (the number of pores 202 per unit volume of particle 200) in each region, and/or the mass density (the density of matrix 204 and ferromagnetic particles 206 per unit volume of particle 200) in each region.

In general, the mean size of pores 202 in region C of particle 200 is greater than the mean size of pores 202 at region S of particle 200. In some embodiments, the mean size of pores 202 in region C of particle 200 is greater than the mean size of pores 202 in region B of particle 200, and/or the mean size of pores 202 in region B of particle 200 is greater than the mean size of pores 202 at region S of particle 200. The size of pores 202 in particle 200 can be measured by viewing a cross-section of particle 200. For irregularly shaped (nonspherical) pores, the maximum visible cross-section is used.

Generally, the density of pores 202 in region C of particle 200 is greater than the density of pores 202 at region S of particle 200. In some embodiments, the density of pores 202 in region C of particle 200 is greater than the density of pores 202 in region B of particle 200, and/or the density of pores 202 in region B of particle 200 is greater than the density of pores 202 at region S of particle 200.

In general, the mass density in region C of particle 200 is less than the mass density at region S of particle 200. In some embodiments, the mass density in region C of particle 200 is less than the mass density in region B of particle 200, and/or the mass density in region B of particle 200 is less than the mass density at region S of particle 200. Porous particles are described, for example, in U.S. Patent Application Publication No. US 2003/0185896 A1, published on October 2, 2003, and in U.S. Patent Application

Publication No. US 2004/0096662 A1, published on May 20, 2004, both of which are incorporated herein by reference.

As another example, in certain embodiments, a particle can include a material that generates a gas, thereby causing the internal pressure of the particle to increase, during the use of the particle. Such a material is referred to herein as a gas generator. In some
5 embodiments, the gas generator can generate gas when the particle (and, therefore, the gas generator) is heated. For example, FIG. 4A shows a particle 300 that has a coating (e.g., a polymer coating) 302 and an interior region 304 including ice pieces 306 and ferromagnetic particles 308. As particle 300 is heated (e.g., when particle 300 is
10 delivered to a target site within a subject), ice pieces 306 melt, producing water. Eventually, if particle 300 is heated to at least about 100°C, the water can produce water vapor, which can cause the internal pressure of particle 300 to increase, until particle 300 bursts, thereby releasing ferromagnetic particles 308.

While ice has been described, in some embodiments, a particle can alternatively
15 or additionally include one or more other types of gas generators that can cause the internal pressure of the particle to increase with an increase in temperature. As an example, a particle can include dry ice or saline. In certain embodiments, a particle can be formed to include water. For example, FIG. 4B shows a particle 400 that includes pores 402 and a matrix (e.g., a polymer matrix) 404. Ferromagnetic particles 408 are
20 dispersed in pores 402 and in matrix 404. Some of pores 402 also contain water. When particle 400 is exposed to a temperature of at least about 100°C, water 406 can produce water vapor that causes the internal pressure of particle 400 to increase. Eventually, particle 400 can burst, thereby releasing ferromagnetic particles 408.

While particles that include ferromagnetic materials have been described, in some
25 embodiments, a particle can alternatively or additionally include one or more other types of materials.

In certain embodiments, a particle can include one or more thermally and/or electrically conductive materials. In such embodiments, the particle may be used to enhance an ablation procedure. Examples of thermally conductive materials include
30 metals (e.g., iron, aluminum, cobalt, copper, silver, molybdenum, zinc, gold, iridium) and metal alloys (e.g., steel). In some embodiments, a particle can include a non-metal

thermally conductive material, such as silicon or carbon. Examples of electrically conductive materials include metals (e.g., silver, copper, gold, aluminum, iridium, zinc, iron, nickel, molybdenum, cobalt) and metal alloys (e.g., steel). Examples of materials that are both thermally conductive and electrically conductive include silver, copper, gold, aluminum, iridium, molybdenum, zinc, and steel.

In some embodiments, a particle can include one or more therapeutic agents (e.g., drugs). The therapeutic agent can, for example, be encapsulated within the particle so that when the particle bursts, it releases the therapeutic agent (e.g., to a target site). Alternatively or additionally, in an embodiment of a particle including a coating, the coating can include one or more therapeutic agents. In some embodiments, a particle can have a coating that includes a high concentration of one or more therapeutic agents. One or more of the therapeutic agents can also be loaded into the interior region of the particle. Thus, the surface of the particle can release an initial dosage of therapeutic agent after which the body of the particle can provide a burst release of therapeutic agent. The therapeutic agent on the surface of the particle can be the same as or different from the therapeutic agent in the body of the particle. The therapeutic agent on the surface can be applied by exposing the particle to a high concentration solution of the therapeutic agent. The therapeutic agent coated particle can include another coating over the surface the therapeutic agent (e.g., a degradable and/or bioabsorbable polymer which erodes when the particle is administered). The coating can assist in controlling the rate at which therapeutic agent is released from the particle. For example, the coating can be in the form of a porous membrane. The coating can delay an initial burst of therapeutic agent release. The coating can be applied by dipping or spraying the particle. The coating can include therapeutic agent or can be substantially free of therapeutic agent. The therapeutic agent in the coating can be the same as or different from an agent on a surface layer of the particle and/or within the particle. A polymer coating (e.g. an erodible coating) can be applied to the particle surface in embodiments in which a high concentration of therapeutic agent has not been applied to the particle surface. Coatings are described, for example, in U.S. Patent Application Publication No. US 2004/0076582 A1, published on April 22, 2004, which is incorporated herein by reference.

Therapeutic agents include genetic therapeutic agents, non-genetic therapeutic agents, and cells, and can be negatively charged, positively charged, amphoteric, or neutral. Therapeutic agents can be, for example, materials that are biologically active to treat physiological conditions; pharmaceutically active compounds; gene therapies; nucleic acids with and without carrier vectors; oligonucleotides; gene/vector systems; DNA chimeras; compacting agents (e.g., DNA compacting agents); viruses; polymers; hyaluronic acid; proteins (e.g., enzymes such as ribozymes); immunologic species; nonsteroidal anti-inflammatory medications; oral contraceptives; progestins; gonadotrophin-releasing hormone agonists; chemotherapeutic agents; and radioactive species (e.g., radioisotopes, radioactive molecules). Non-limiting examples of therapeutic agents include anti-thrombogenic agents; antioxidants; angiogenic and anti-angiogenic agents and factors; anti-proliferative agents (e.g., agents capable of blocking smooth muscle cell proliferation); calcium entry blockers; and survival genes which protect against cell death.

Exemplary non-genetic therapeutic agents include: anti-thrombotic agents such as heparin, heparin derivatives, urokinase, and PPACK (dextrophenylalanine proline arginine chloromethylketone); anti-inflammatory agents such as dexamethasone, prednisolone, corticosterone, budesonide, estrogen, sulfasalazine and mesalamine; antineoplastic/ antiproliferative/anti-mitotic agents such as paclitaxel, 5-fluorouracil, cisplatin, doxorubicin, vinblastine, vincristine, epothilones, endostatin, angiostatin, angiopeptin, monoclonal antibodies capable of blocking smooth muscle cell proliferation, and thymidine kinase inhibitors; anesthetic agents such as lidocaine, bupivacaine and ropivacaine; anti-coagulants such as D-Phe-Pro-Arg chloromethyl ketone, an RGD peptide-containing compound, heparin, hirudin, antithrombin compounds, platelet receptor antagonists, anti-thrombin antibodies, anti-platelet receptor antibodies, aspirin, prostaglandin inhibitors, platelet inhibitors and tick antiplatelet peptides; vascular cell growth promoters such as growth factors, transcriptional activators, and translational promoters; vascular cell growth inhibitors such as growth factor inhibitors, growth factor receptor antagonists, transcriptional repressors, translational repressors, replication inhibitors, inhibitory antibodies, antibodies directed against growth factors, bifunctional molecules consisting of a growth factor and a cytotoxin, bifunctional molecules


consisting of an antibody and a cytotoxin; protein kinase and tyrosine kinase inhibitors (e.g., tyrphostins, genistein, quinoxalines); prostacyclin analogs; cholesterol-lowering agents; angiopoietins; antimicrobial agents such as triclosan, cephalosporins, aminoglycosides and nitrofurantoin; cytotoxic agents, cytostatic agents and cell proliferation affectors; vasodilating agents; and agents that interfere with endogenous vasoactive mechanisms.

Exemplary genetic therapeutic agents include: anti-sense DNA and RNA; DNA coding for anti-sense RNA, tRNA or rRNA to replace defective or deficient endogenous molecules, angiogenic factors including growth factors such as acidic and basic fibroblast growth factors, vascular endothelial growth factor, epidermal growth factor, transforming growth factor α and β , platelet-derived endothelial growth factor, platelet-derived growth factor, tumor necrosis factor α , hepatocyte growth factor, and insulin like growth factor, cell cycle inhibitors including CD inhibitors, thymidine kinase ("TK") and other agents useful for interfering with cell proliferation, and the family of bone morphogenic proteins ("BMP's"), including BMP2, BMP3, BMP4, BMP5, BMP6 (Vgr1), BMP7 (OP1), BMP8, BMP9, BMP10, BMP11, BMP12, BMP13, BMP14, BMP15, and BMP16. Currently preferred BMP's are any of BMP2, BMP3, BMP4, BMP5, BMP6 and BMP7. These dimeric proteins can be provided as homodimers, heterodimers, or combinations thereof, alone or together with other molecules. Alternatively or additionally, molecules capable of inducing an upstream or downstream effect of a BMP can be provided. Such molecules include any of the "hedgehog" proteins, or the DNA's encoding them. Vectors of interest for delivery of genetic therapeutic agents include: plasmids; viral vectors such as adenovirus (AV), adenoassociated virus (AAV) and lentivirus; and non-viral vectors such as lipids, liposomes and cationic lipids.



Cells include cells of human origin (autologous or allogeneic), including stem cells, or from an animal source (xenogeneic), which can be genetically engineered if desired to deliver proteins of interest.

Several of the above and numerous additional therapeutic agents appropriate for the practice of the present invention are disclosed in U.S. Patent No. 5,733,925, assigned to NeoRx Corporation, which is incorporated herein by reference. Therapeutic agents disclosed in this patent include the following:


“Cytostatic agents” (i.e., agents that prevent or delay cell division in proliferating cells, for example, by inhibiting replication of DNA or by inhibiting spindle fiber formation). Representative examples of cytostatic agents include modified toxins, methotrexate, adriamycin, radionuclides (e.g., such as disclosed in Fritzberg et al., U.S. Patent No. 4,897,255), protein kinase inhibitors, including staurosporin, a protein kinase C inhibitor of the following formula:

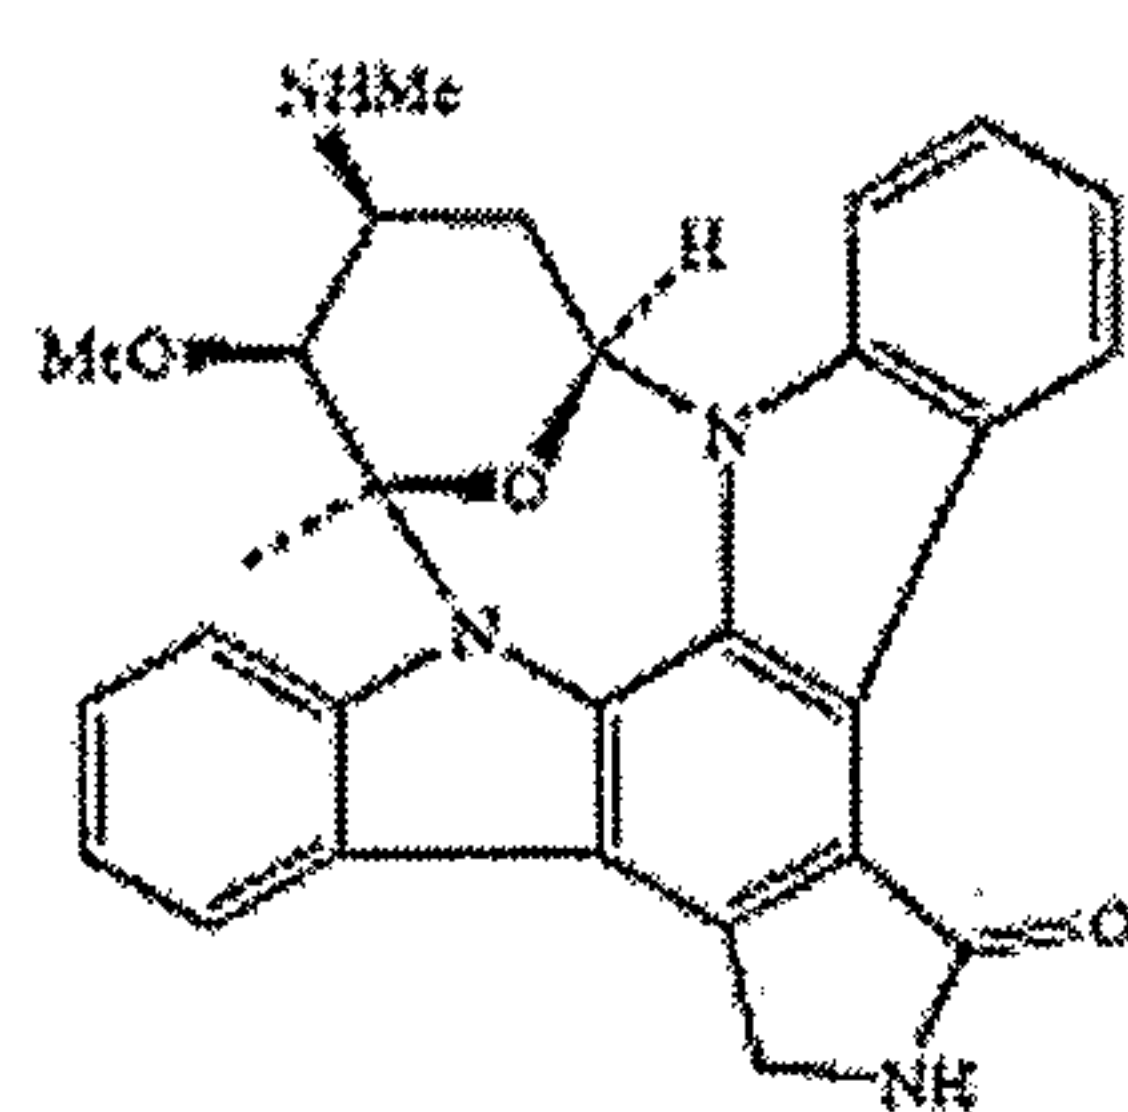

as well as diindoloalkaloids having one of the following general structures:

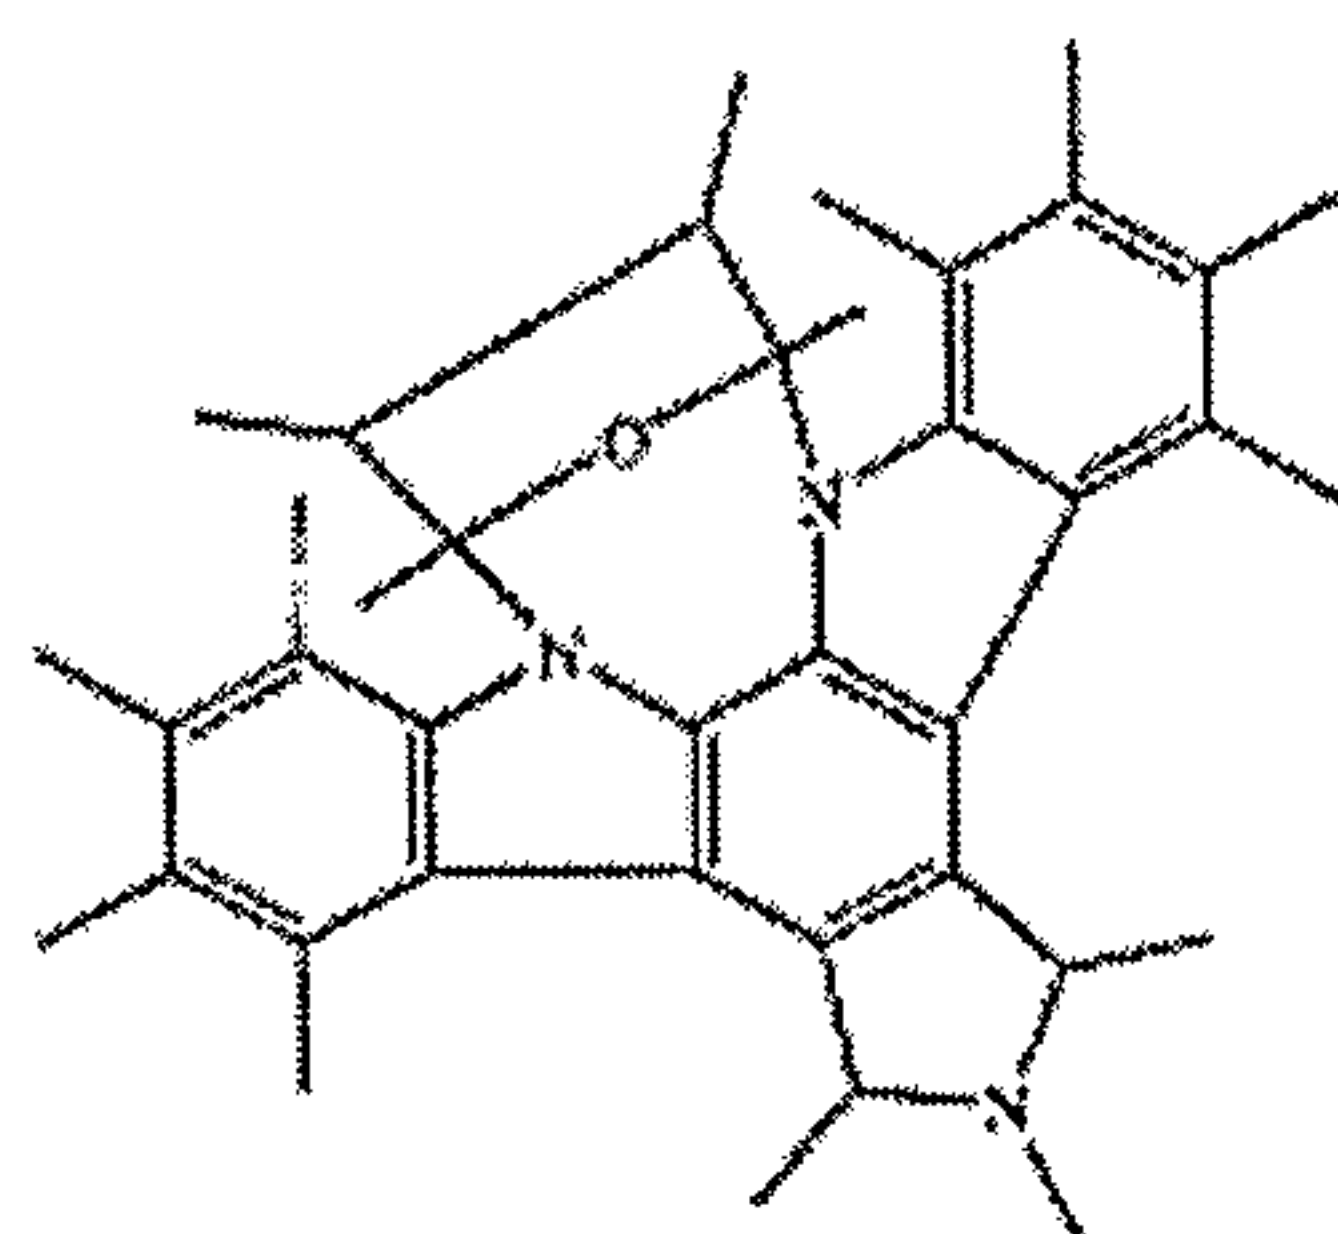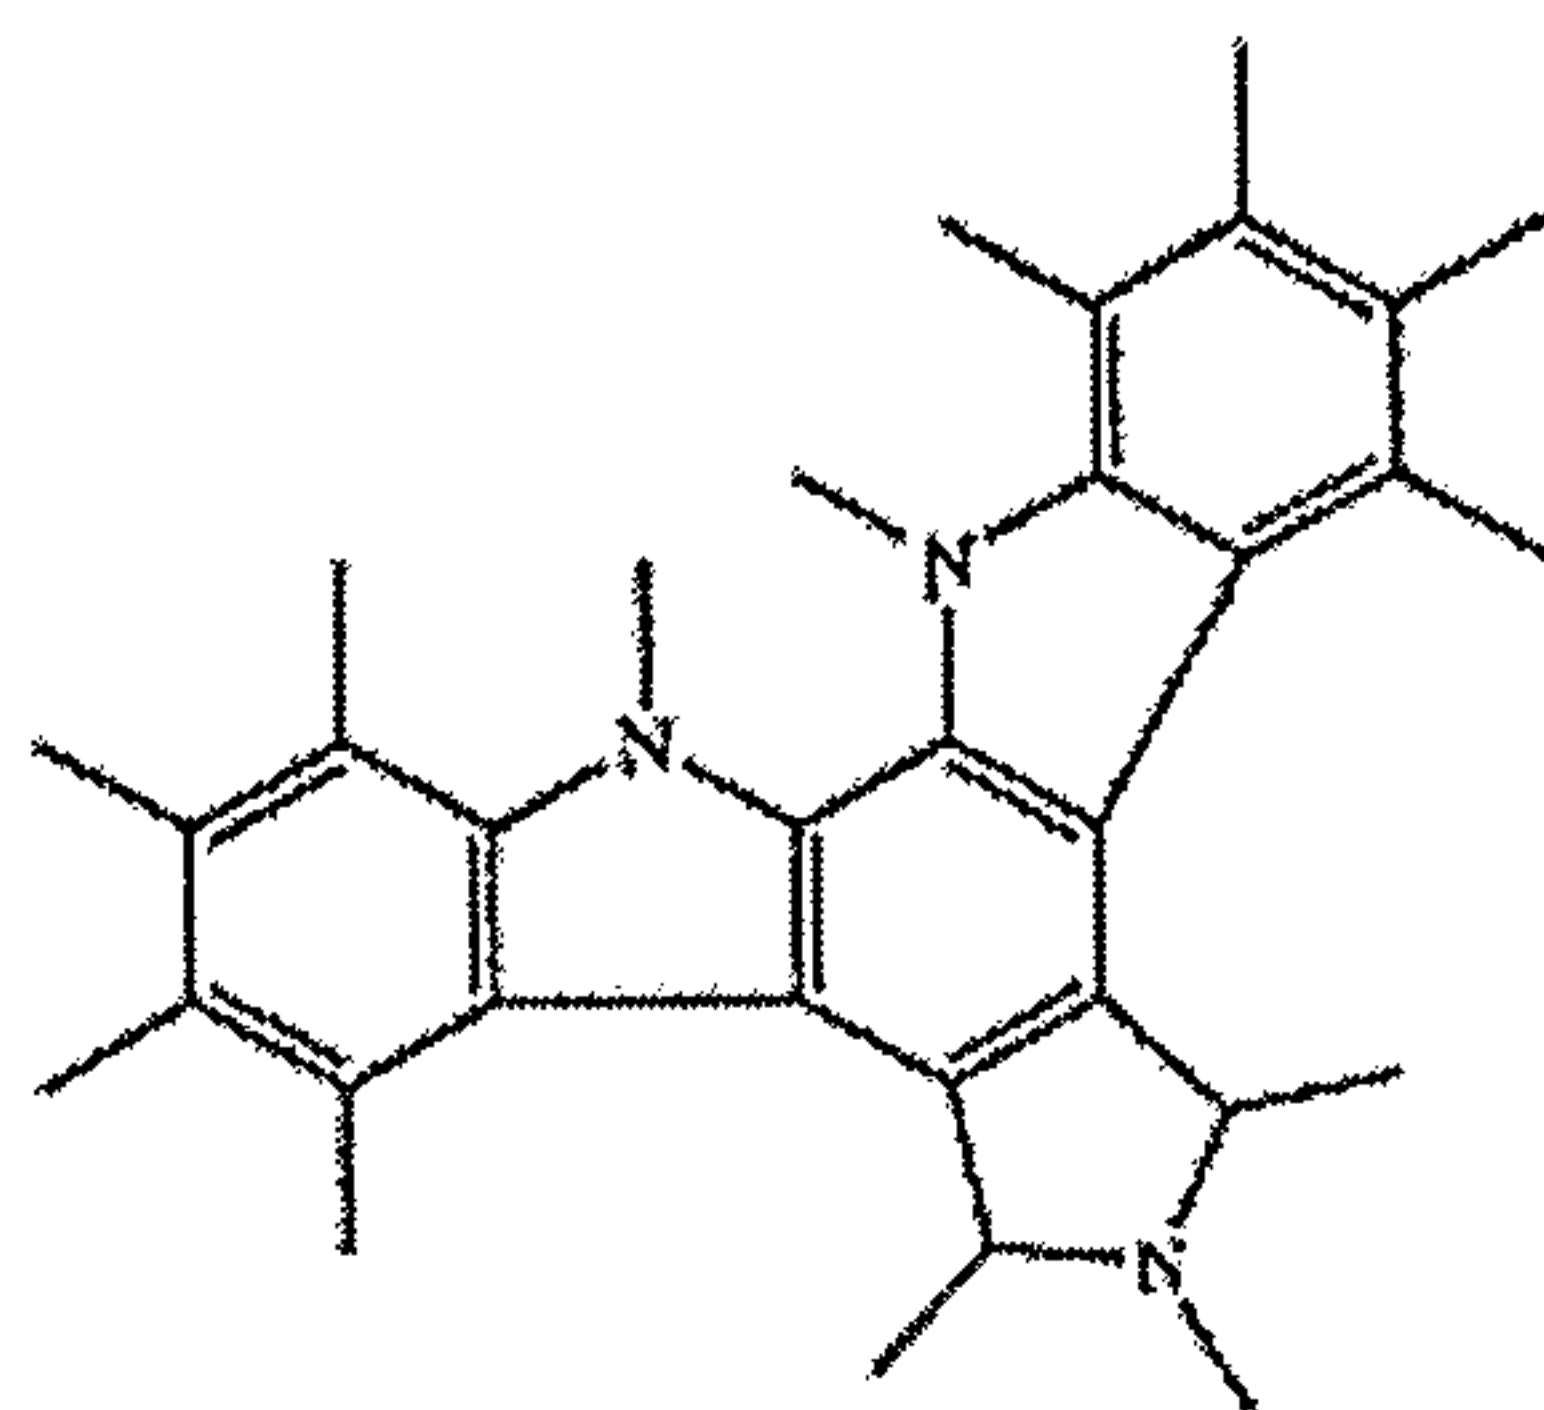

5

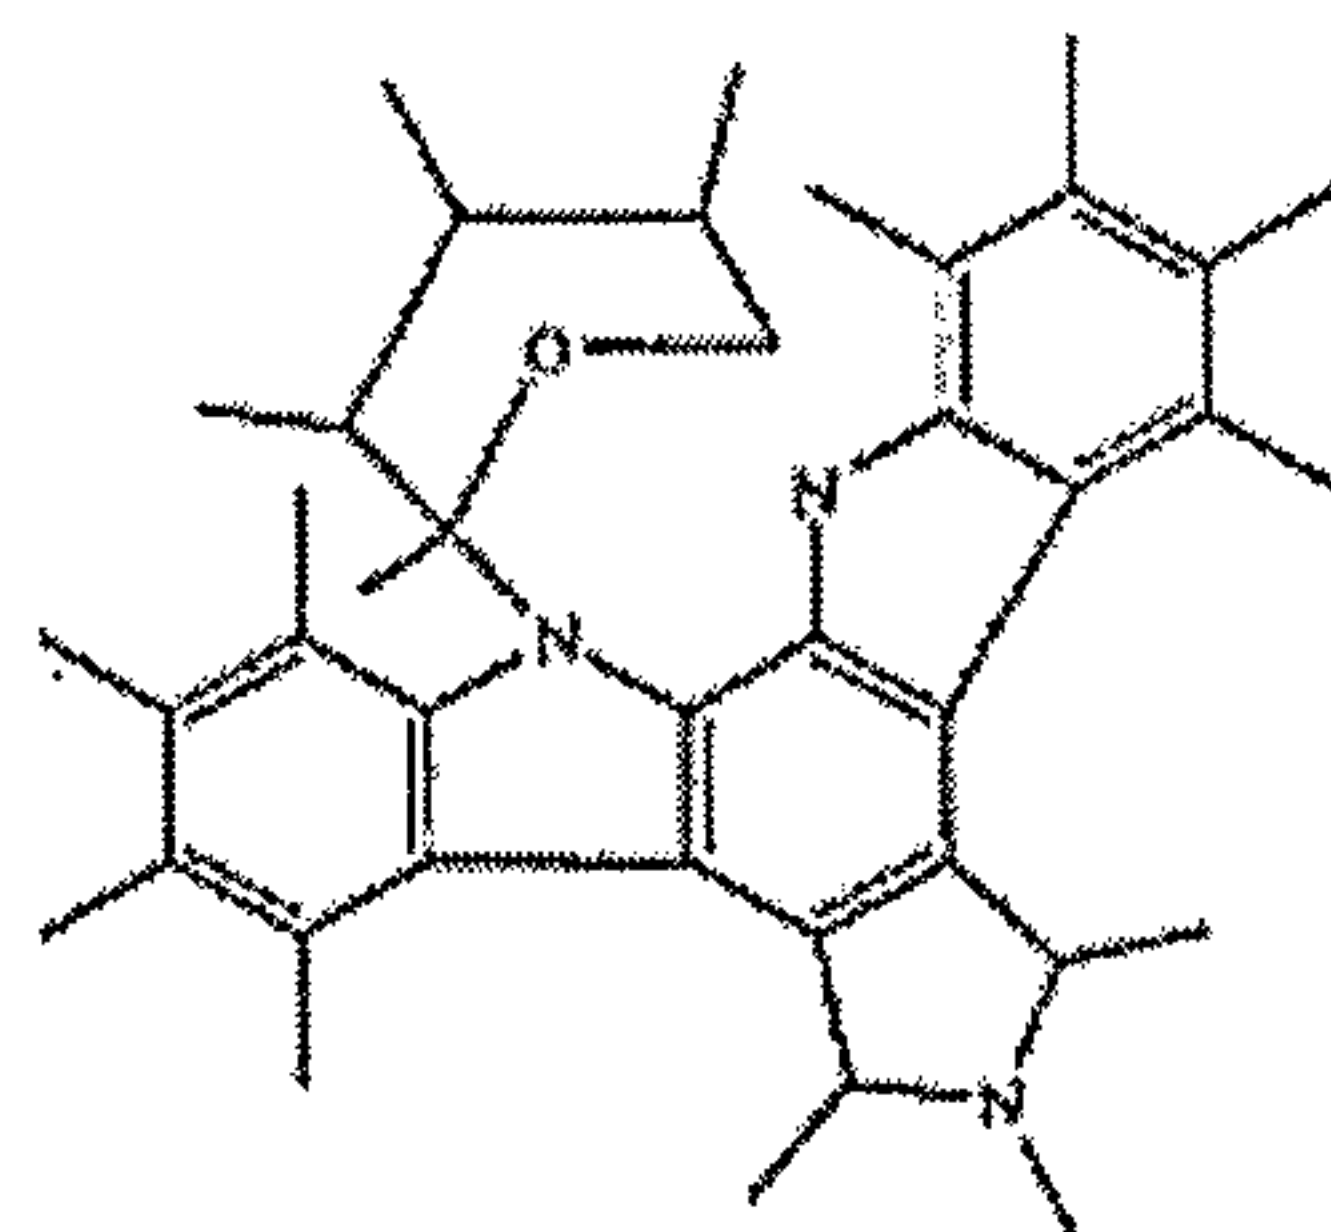

as well as stimulators of the production or activation of TGF-beta, including Tamoxifen
10 and derivatives of functional equivalents (e.g., plasmin, heparin, compounds capable of
reducing the level or inactivating the lipoprotein Lp(a) or the glycoprotein

apolipoprotein(a)) thereof, TGF-beta or functional equivalents, derivatives or analogs thereof, suramin, nitric oxide releasing compounds (e.g., nitroglycerin) or analogs or functional equivalents thereof, paclitaxel or analogs thereof (e.g., taxotere), inhibitors of specific enzymes (such as the nuclear enzyme DNA topoisomerase II and DNA
5 polymerase, RNA polymerase, adenylyl guanylyl cyclase), superoxide dismutase inhibitors, terminal deoxynucleotidyl-transferase, reverse transcriptase, antisense oligonucleotides that suppress smooth muscle cell proliferation and the like. Other examples of "cytostatic agents" include peptidic or mimetic inhibitors (i.e., antagonists, agonists, or competitive or non-competitive inhibitors) of cellular factors that may (e.g., in the presence of
10 extracellular matrix) trigger proliferation of smooth muscle cells or pericytes: e.g., cytokines (e.g., interleukins such as IL-1), growth factors (e.g., PDGF, TGF-alpha or -beta, tumor necrosis factor, smooth muscle- and endothelial-derived growth factors, i.e., endothelin, FGF), homing receptors (e.g., for platelets or leukocytes), and extracellular matrix receptors (e.g., integrins). Representative examples of useful therapeutic agents in
15 this category of cytostatic agents addressing smooth muscle proliferation include: subfragments of heparin, triazolopyrimidine (trapidil; a PDGF antagonist), lovastatin, and prostaglandins E1 or I2.

Agents that inhibit the intracellular increase in cell volume (i.e., the tissue volume occupied by a cell), such as cytoskeletal inhibitors or metabolic inhibitors.

20 Representative examples of cytoskeletal inhibitors include colchicine, vinblastin, cytochalasins, paclitaxel and the like, which act on microtubule and microfilament networks within a cell. Representative examples of metabolic inhibitors include staurosporin, trichothecenes, and modified diphtheria and ricin toxins, Pseudomonas exotoxin and the like. Trichothecenes include simple trichothecenes (i.e., those that have
25 only a central sesquiterpenoid structure) and macrocyclic trichothecenes (i.e., those that have an additional macrocyclic ring), e.g., a verrucarins or roridins, including Verrucarin A, Verrucarin B, Verrucarin J (Satratoxin C), Roridin A, Roridin C, Roridin D, Roridin E (Satratoxin D), Roridin H.

30 Agents acting as an inhibitor that blocks cellular protein synthesis and/or secretion or organization of extracellular matrix (i.e., an "anti-matrix agent").

Representative examples of "anti-matrix agents" include inhibitors (i.e., agonists and

antagonists and competitive and non-competitive inhibitors) of matrix synthesis, secretion and assembly, organizational cross-linking (e.g., transglutaminases cross-linking collagen), and matrix remodeling (e.g., following wound healing). A representative example of a useful therapeutic agent in this category of anti-matrix agents is colchicine, an inhibitor of secretion of extracellular matrix. Another example is tamoxifen for which evidence exists regarding its capability to organize and/or stabilize as well as diminish smooth muscle cell proliferation following angioplasty. The organization or stabilization may stem from the blockage of vascular smooth muscle cell maturation in to a pathologically proliferating form.

Agents that are cytotoxic to cells, particularly cancer cells. Preferred agents are Roridin A, Pseudomonas exotoxin and the like or analogs or functional equivalents thereof. A plethora of such therapeutic agents, including radioisotopes and the like, have been identified and are known in the art. In addition, protocols for the identification of cytotoxic moieties are known and employed routinely in the art.

A number of the above therapeutic agents and several others have also been identified as candidates for vascular treatment regimens, for example, as agents targeting restenosis. Such agents include one or more of the following: calcium-channel blockers, including benzothiazapines (e.g., diltiazem, clentiazem); dihydropyridines (e.g., nifedipine, amlodipine, nicardapine); phenylalkylamines (e.g., verapamil); serotonin pathway modulators, including 5-HT antagonists (e.g., ketanserin, naftidrofuryl) and 5-HT uptake inhibitors (e.g., fluoxetine); cyclic nucleotide pathway agents, including phosphodiesterase inhibitors (e.g., cilostazole, dipyridamole), adenylate/guanylate cyclase stimulants (e.g., forskolin), and adenosine analogs; catecholamine modulators, including α -antagonists (e.g., prazosin, bunazosine), β -antagonists (e.g., propranolol), and α/β -antagonists (e.g., labetalol, carvedilol); endothelin receptor antagonists; nitric oxide donors/releasing molecules, including organic nitrates/nitrites (e.g., nitroglycerin, isosorbide dinitrate, amyl nitrite), inorganic nitroso compounds (e.g., sodium nitroprusside), sydnonimines (e.g., molsidomine, linsidomine), nonoates (e.g., diazenium diolates, NO adducts of alkanediamines), S-nitroso compounds, including low molecular weight compounds (e.g., S-nitroso derivatives of captopril, glutathione and N-acetyl penicillamine) and high molecular weight compounds (e.g., S-nitroso derivatives of

proteins, peptides, oligosaccharides, polysaccharides, synthetic polymers/oligomers and natural polymers/oligomers), C-nitroso-, O-nitroso- and N-nitroso-compounds, and L-arginine; ACE inhibitors (e.g., cilazapril, fosinopril, enalapril); ATII-receptor antagonists (e.g., saralasin, losartin); platelet adhesion inhibitors (e.g., albumin, polyethylene oxide);
5 platelet aggregation inhibitors, including aspirin and thienopyridine (ticlopidine, clopidogrel) and GP IIb/IIIa inhibitors (e.g., abciximab, eptifibatide, tirofiban); coagulation pathway modulators, including heparinoids (e.g., heparin, low molecular weight heparin, dextran sulfate, β -cyclodextrin tetradecasulfate), thrombin inhibitors (e.g., hirudin, hirulog, PPACK (D-phe-L-propyl-L-arg-chloromethylketone), argatroban),
10 FXa inhibitors (e.g., antistatin, TAP (tick anticoagulant peptide)), vitamin K inhibitors (e.g., warfarin), and activated protein C; cyclooxygenase pathway inhibitors (e.g., aspirin, ibuprofen, flurbiprofen, indomethacin, sulfinpyrazone); natural and synthetic corticosteroids (e.g., dexamethasone, prednisolone, methprednisolone, hydrocortisone); lipoxygenase pathway inhibitors (e.g., nordihydroguaiaretic acid, caffeic acid; leukotriene
15 receptor antagonists; antagonists of E- and P-selectins; inhibitors of VCAM-1 and ICAM-1 interactions; prostaglandins and analogs thereof, including prostaglandins such as PGE1 and PGI2; prostacyclin analogs (e.g., ciprostone, epoprostenol, carbacyclin, iloprost, beraprost); macrophage activation preventers (e.g., bisphosphonates); HMG-CoA reductase inhibitors (e.g., lovastatin, pravastatin, fluvastatin, simvastatin, cerivastatin); fish oils and omega-3-fatty acids; free-radical scavengers/antioxidants (e.g.,
20 probucol, vitamins C and E, ebselen, trans-retinoic acid, SOD mimics); agents affecting various growth factors including FGF pathway agents (e.g., bFGF antibodies, chimeric fusion proteins), PDGF receptor antagonists (e.g., trapidil), IGF pathway agents (e.g., somatostatin analogs such as angiopeptin and ocreotide), TGF- β pathway agents such as polyanionic agents (heparin, fucoidin), decorin, and TGF- β antibodies, EGF pathway
25 agents (e.g., EGF antibodies, receptor antagonists, chimeric fusion proteins), TNF- α pathway agents (e.g., thalidomide and analogs thereof), thromboxane A2 (TXA2) pathway modulators (e.g., sulotroban, vapiprost, dazoxiben, ridogrel), protein tyrosine kinase inhibitors (e.g., tyrphostin, genistein, and quinoxaline derivatives); MMP pathway
30 inhibitors (e.g., marimastat, ilomastat, metastat), and cell motility inhibitors (e.g., cytochalasin B); antiproliferative/antineoplastic agents including antimetabolites such as

purine analogs (e.g., 6-mercaptopurine), pyrimidine analogs (e.g., cytarabine and 5-fluorouracil) and methotrexate, nitrogen mustards, alkyl sulfonates, ethylenimines, antibiotics (e.g., daunorubicin, doxorubicin), nitrosoureas and cisplatin, agents affecting microtubule dynamics (e.g., vinblastine, vincristine, colchicine, paclitaxel, epothilone),
5 caspase activators, proteasome inhibitors, angiogenesis inhibitors (e.g., endostatin, angiostatin and squalamine), and rapamycin, cerivastatin, flavopiridol and suramin; matrix deposition/organization pathway inhibitors (e.g., halofuginone or other quinazolinone derivatives, tranilast); endothelialization facilitators (e.g., VEGF and RGD peptide); and blood rheology modulators (e.g., pentoxifylline).

10 Therapeutic agents are described, for example, in co-pending U.S. Patent Application Publication No. US 2004/0076582 A1, published on April 22, 2004, which is incorporated herein by reference, and in Pinchuk et al., U.S. Patent No. 6,545,097, incorporated above.

15 In certain embodiments, in addition to or as an alternative to including one or more therapeutic agents and/or ferromagnetic materials, a particle can include one or more radiopaque materials, materials that are visible by magnetic resonance imaging (MRI-visible materials), and/or ultrasound contrast agents, which are described, for example, in U.S. Patent Application Publication No. US 2004/0101564 A1, published on May 27, 2004, which is incorporated herein by reference.

20 Particles can be formed by any of a number of different methods.

As an example, a particle such as particle 10-A (FIG. 1A) can be made using the system 1000 shown in FIGS. 5A and 5B. System 1000 includes a flow controller 1100, a drop generator 1200, a gelling vessel 1400, a reactor vessel 1500, an optional gel dissolution chamber 1600, and a filter 1700. Drop generator 1200 includes a concentric
25 nozzle 1300. As shown in FIG. 6A, concentric nozzle 1300 includes an inner nozzle 1330 with an inner volume 1335 and an orifice 1310. Concentric nozzle 1300 also includes an outer nozzle 1340 with an inner volume 1345 (shaded in FIG. 6A) and an orifice 1320.

Drop generator 1200 can be, for example, the Inotech Encapsulator unit IE-50R/NS (Inotech AG, Dottikon, Switzerland), or the model NISCO Encapsulation unit
30 VAR D (NISCO Engineering, Zurich, Switzerland). In some embodiments, concentric nozzle 1300 can be provided as an attachment to drop generator 1200. An example of a

concentric nozzle attachment is the model IE-5250 attachment (available from Inotech AG).

Flow controller 1100 delivers a solution (e.g., a polymer solution) and a mixture including ferromagnetic particles 16 (e.g., a gelling precursor mixture) to a viscosity controller 1800, which heats one or both of the solution and the mixture to achieve their respective desired viscosities prior to delivery to drop generator 1200. In certain embodiments, before being transferred to drop generator 1200, one or both of the solution and the mixture can be introduced to a high pressure pumping apparatus, such as a syringe pump (e.g., model PHD4400, Harvard Apparatus, Holliston, MA). Alternatively or additionally, drop generator 1200 can contain a pressure control device that applies a pressure (e.g., from about 0.5 Bar to about 1.6 Bar) to one or both of the solution and the mixture (a pressure head) to control the rates at which the solution and/or mixture are transferred to drop generator 1200. Generally, the pressure applied to a given solution or mixture depends on the viscosity of the solution or mixture and/or the desired flow rate of the solution or mixture.

As shown in FIG. 6B, after being delivered to drop generator 1200, a stream 1350 of the gelling precursor mixture including ferromagnetic particles 16 passes through volume 1335 and exits inner nozzle 1330 via orifice 1310. Carbon dioxide is added to stream 1350 as stream 1350 passes through volume 1335. Thus, when stream 1350 exits inner nozzle 1330, stream 1350 includes bubbles of carbon dioxide gas. A stream 1360 of the polymer solution passes through volume 1345 and exits outer nozzle 1340 via orifice 1320. The streams interact as they exit the orifices. At the same time, nozzle 1300 is subjected to a periodic disturbance which results in the formation of drops 1370 having an interior region 1380 including gelling precursor, ferromagnetic particles 16, and carbon dioxide gas bubbles, and a polymer coating 1390. Drops 1370 fall into gelling vessel 1400, where the drops are stabilized by gel formation during which the alginate is converted from a solution form to a gel form. The gel-stabilized drops are then transferred from gelling vessel 1400 to reactor vessel 1500, where the polymer in the gel-stabilized drops is reacted, forming particles. Thereafter, the particles are filtered in filter 1700 to remove debris, and are sterilized and packaged as a composition including particles. In some embodiments, the particles are transferred, prior to filtration, to gel

dissolution chamber 1600. In gel dissolution chamber 1600, the gelling precursor (which was converted to a gel) in the particles is dissolved. After the particle formation process has been completed, the particles can be filtered, sterilized, and packaged, as described above.

5 In some embodiments, the above-described process can be modified to produce particles having, for example, an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C. For example, the particles can be formed at a temperature of less than about 25°C (e.g., at most about 20°C, at most about 15°C, at most about 10°C, at most about 5°C). Alternatively or additionally, the particles can be
10 formed in a pressurized environment (an environment having a pressure of greater than one atmosphere). For example, the particles can be formed in a chamber in which the pressure is at least about 1.1 atmospheres (e.g., at least about 1.2 atmospheres, at least about 1.5 atmospheres, at least about two atmospheres).

As another example, particles such as particle 300 (FIG. 4A) can be formed, for
15 example, using the above-described drop generation process. In some embodiments, a mixture including water and ferromagnetic particles is flowed through volume 1335 of inner nozzle 1330, and a mixture including a solution (e.g., a polymer solution) is flowed through volume 1345 of outer nozzle 1340. After the particles have been formed, they can be frozen, such that the water forms ice pieces 306. In some embodiments, the
20 particles may then be stored in a low-temperature environment, in order to limit premature melting by ice pieces 306.

As an additional example, particles such as particle 200 (FIG. 3) can be formed, for example, using the process described above with respect to FIGS. 5A and 5B. In some embodiments, two solutions (e.g., a polymer solution and a gelling precursor
25 solution), either or both including ferromagnetic particles 206, can be flowed through concentric nozzle 1300 and mixed sufficiently to form drops that include a mixture of both solutions. Gas can be added into either or both solutions prior to mixing and/or after mixing. For example, a gelling precursor solution can be aerated with carbon dioxide gas prior to mixing, so that the gelling precursor solution includes carbon dioxide bubbles.

30 In certain embodiments, drop generator 1200 can be modified such that, instead of including concentric nozzle 1300, drop generator 1200 includes a single nozzle. A

mixture (e.g., a polymer/gelling precursor mixture such as polyvinyl alcohol/alginate) including ferromagnetic particles 206 can then be flowed through the nozzle to form drops. In some embodiments, as the mixture is flowed through the nozzle, gas can be added into the mixture, so that the mixture includes bubbles of gas.

5 Particles such as particle 400 (FIG. 4B) can be formed, for example, by making particle 200 and soaking particle 200 in water, so that the water can enter some or all of pores 402.

 In some embodiments, gas can be added into one or more of the mixtures or solutions that are used to make particles before the particle formation process has begun.
10 As an example, a solution may be aerated with a gas, and then used in a particle formation process (as described above with reference to the formation of particle 200).

 In certain embodiments, particles may be formed in a gaseous environment (e.g., in a chamber), such that the particles incorporate the gas during formation. In some embodiments, the gaseous environment can have a pressure of more than one atmosphere
15 (e.g., at least about 1.1 atmospheres, at least about 1.2 atmospheres, at least about 1.5 atmospheres, at least about two atmospheres), and/or a temperature of less than about 25°C (e.g., at most about 20°C, at most about 15°C, at most about 10°C, at most about 5°C).

 In some embodiments, one or more coatings can be applied to particles produced
20 by any of the above-described processes, in order to help maintain the internal pressure within the particles. In certain embodiments, the particles can be formed in an environment having a low temperature and/or a high pressure, and can be coated while they still are in the environment having the low temperature and/or high pressure. In some embodiments, particles can be both formed and coated in a gaseous environment.
25 Particles can be coated by, for example, spraying and/or dip-coating.

 In certain embodiments, after particles have been formed, they may be stored in an environment having a low temperature (e.g., at most about 20°C) and/or a high pressure (e.g., at least about 1.1 atmospheres). These storage conditions can help maintain the internal pressure of the particles and/or prevent the particles from bursting
30 prematurely.

Methods of making particles are described, for example, in U.S. Patent Application Publication No. US 2004/0096662 A1, published on May 20, 2004, and in U.S. Patent Application No. 10/858,253, filed on June 1, 2004, and entitled “Embolization”, both of which are incorporated herein by reference.

5 While certain embodiments have been described, other embodiments are possible.

As an example, while particles that include (e.g., encapsulate) ferromagnetic particles have been described, in some embodiments, a particle can alternatively or additionally include a ferromagnetic material having a different shape or form. For example, a particle can include a ferromagnetic material in the form of a fiber, a flake, or a powder. In some embodiments, ferromagnetic particles, fibers, flakes, and/or powders can have a dimension (e.g., a diameter) of from about two microns to about 20 microns.

As another example, while particles that include carbon dioxide gas have been described, in some embodiments, a particle can alternatively or additionally include one or more other gases, such as nitrogen, oxygen, or water vapor. Typically, a gas that is included in a particle can be biocompatible.

As an additional example, while particles with a gelling precursor matrix and a polymer coating have been described, particles can have other types and combinations of materials. For example, in some embodiments, a particle can have a polymer matrix and a gelling precursor coating.

20 As a further example, while particles with coatings (e.g., polymer coatings) have been described, in some embodiments, a particle may not include a coating.

As another example, while particles including ferromagnetic material have been described, in some embodiments, a particle can include other types of materials that can be used to enhance an ablation procedure. For example, a particle may include (e.g., encapsulate) a sodium ion solution (e.g., a sodium chloride solution) and/or a calcium ion solution (e.g., a calcium chloride solution). When the particle bursts at a target site, the particle can release its contents to the target site, thereby enhancing ablation of the target site.

As another example, in some embodiments, a capsule can be used to deliver one or more particles to a target site. For example, FIG. 7 shows a capsule 500 that contains particles 502. When capsule 500 is delivered to a target site (e.g., to the tissue of a

subject), capsule 500 can separate, thereby releasing particles 502 into the target site. Capsule 500 can be used, for example, to efficiently transport multiple particles 502 to a target site. In some embodiments, capsule 500 can be pressurized, and/or its contents can be maintained at a relatively low temperature, in order to limit the likelihood of premature bursting by particles 502. In some embodiments, capsule 500 can have an internal pressure of at least about 1.1 atmospheres (e.g., at least about 1.2 atmospheres, at least about 1.5 atmospheres, at least about two atmospheres), and/or a temperature of at most about 20°C (e.g., at most about 15°C, at most about 10°C, at most about 5°C). As shown in FIG. 7, capsule 500 has a maximum dimension D_{\max} . In some embodiments, maximum dimension D_{\max} can be from about 3,000 microns to about 5,000 microns. While capsule 500 is generally cylindrical in shape, in certain embodiments, a capsule can have a different shape. For example, a capsule can be spherical or spheroidal.

As a further example, in some embodiments, particles can be used in an RF ablation procedure that employs a coaxial electrode (e.g., a 3.5 centimeter coaxial LeVeen electrode, available from RadioTherapeutics, Mountain View, Calif.).

For example, FIG. 8A shows a portion 700 of a subject including a liver 710 and skin 720. Liver 710 includes healthy tissue 730 and unhealthy tissue 740. FIG. 8B illustrates the delivery of a cannula 750 into unhealthy tissue 740, using a trocar 760. After cannula 750 has been delivered into unhealthy tissue 740, trocar 760 is removed from cannula 750 and, as shown in FIG. 8C, needle 775 is inserted into cannula 750. Needle 775 is in fluid communication with a syringe 770, which contains a composition including particles 10-A suspended in a carrier fluid 780. Particles 10-A and carrier fluid 780 are injected from syringe 770, through needle 775 and cannula 750, and into unhealthy tissue 740. After particles 10-A and carrier fluid 780 have been delivered, needle 775 and syringe 770 are removed from cannula 750.

While particles 10-A are generally intact when first delivered into unhealthy tissue 740 (as shown in FIG. 8C), as particles 10-A are heated to body temperature (about 37°C), particles 10-A burst, thereby forming burst particles 10-B, and releasing ferromagnetic particles 16 into unhealthy tissue 740 (as shown in FIG. 8D).

As FIG. 8E shows, an RF electrode 790 is then inserted into cannula 750, such that its distal end 792 enters unhealthy tissue 740. As shown in FIG. 8F, tines 795 are

thereafter deployed within unhealthy tissue 740. RF electrode 790 can subsequently be activated so that RF energy is emitted from tines 795.

As another example, in certain embodiments, an RF electrode can be used to increase the temperature of one or more particles (e.g., particles that include
5 ferromagnetic material) at a target site (e.g., within cancerous tissue of a subject). In some embodiments, this increase in the temperature of the particles can cause the particles to burst.

As a further example, in some embodiments in which particles release ferromagnetic material (e.g., ferromagnetic particles) at a target site (e.g., tissue of a
10 subject), the ferromagnetic material can be used in an agitation ablation process. In such a process, a magnetic field can be used to agitate the ferromagnetic material, such that the ferromagnetic material heats and/or physically deforms the surrounding target site, thereby ablating the surrounding target site.

As another example, in certain embodiments, a laser can be used to ablate a target
15 site (e.g., in which particles have released ferromagnetic material).

As an additional example, in some embodiments, a particle can be contacted with an agent (e.g., an alcohol, hydrochloric acid, sodium hydroxide, sodium citrate, sodium hexa-metaphosphate) that can dissolve or erode at least a portion of the particle. The agent can be used, for example, to accelerate the bursting of the particle. The agent can
20 be applied to the particle prior to, during, and/or after delivery of the particle to a target site. For example, in some embodiments in which a particle includes a sodium alginate coating, at least a portion of the sodium alginate coating can be dissolved by contacting the coating with sodium hexa-metaphosphate.

As a further example, in some embodiments, a particle (either porous or non-
25 porous) can include at least one cavity (a hollow central region in the particle). In certain embodiments in which a particle includes a cavity, the particle can further include pores in the material surrounding the cavity. The particles can include one or more gases in the cavity and/or pores. For example, FIG. 8 shows a particle 600 with a cavity 602 surrounded by a matrix material 606 (e.g., a polymer) that includes pores 604.

As another example, in some embodiments, a particle can include a shape
30 memory material, which is capable of being configured to remember (e.g., to change to) a

predetermined configuration or shape. In certain embodiments, particles that include a shape memory material can be selectively transitioned from a first state to a second state. For example, a heating device provided in the interior of a delivery catheter can be used to cause a particle including a shape memory material to transition from a first state to a second state. Shape memory materials and particles that include shape memory materials are described in, for example, U.S. Patent Application Publication No. US 2004/0091543 A1, published on May 13, 2004, and U.S. Patent Application No. 10/791,103, filed March 2, 2004, and entitled "Embolitic Compositions", both of which are incorporated herein by reference.

As an additional example, in some embodiments, a particle can include a surface preferential material. Surface preferential materials are described, for example, in U.S. Patent Application No. 10/791,552, filed on March 2, 2004, and entitled "Embolization", which is incorporated herein by reference.

As a further example, in certain embodiments, particles can be linked together to form particle chains. For example, the particles can be connected to each other by links that are formed of one or more of the same material(s) as the particles, or of one or more different material(s) from the particles. Particle chains and methods of making particle chains are described, for example, in U.S. Patent Application No. 10/830,195, filed on April 22, 2004, and entitled "Embolization", which is incorporated herein by reference.

As an additional example, in some embodiments one or more particles is/are substantially nonspherical. In some embodiments, the particles can be mechanically shaped during or after the particle formation process to be nonspherical (e.g., ellipsoidal). In certain embodiments, particles can be shaped (e.g., molded, compressed, punched, and/or agglomerated with other particles) at different points in the particle manufacturing process. As an example, in certain embodiments in which the particles are formed using a gelling agent, the particles can be physically deformed into a specific shape and/or size after the particles have been contacted with the gelling agent, but before the polymer(s) in the particles have been cross-linked. After shaping, the polymer(s) (e.g., polyvinyl alcohol) in the particles can be cross-linked, optionally followed by substantial removal of gelling precursor (e.g., alginate). While substantially spherical particles have been described, in some embodiments, nonspherical particles can be manufactured and formed

by controlling, for example, drop formation conditions. In some embodiments, nonspherical particles can be formed by post-processing the particles (e.g., by cutting or dicing into other shapes). Particle shaping is described, for example, in Baldwin et al., U.S. Published Patent Application No. US 2003/0203985 A1, which is incorporated
5 herein by reference.

As a further example, in certain embodiments, nonspherical (e.g., irregular) particles can be formed and exposed to a gaseous atmosphere, such that the particles may trap gas bubbles on their surface. In some embodiments, the particles may thereafter be coated. For example, FIG. 10A shows an irregular particle 800 including a body region
10 803 having a surface 801. Gas bubbles 802 are trapped on surface 801 of body region 803. FIG. 10B shows a particle 806 including body region 803, gas bubbles 802, and a coating 804.

As another example, in some embodiments a solution can be added to the nozzle of a drop generator to enhance the porosity of particles produced by the drop generator.
15 Examples of porosity-enhancing solutions include starch, sodium chloride at a relatively high concentration (e.g., more than about 0.9 percent, from about one percent to about five percent, from about one percent to about two percent), and calcium chloride (e.g., at a concentration of at least about 50 mM). For example, calcium chloride can be added to a sodium alginate gelling precursor solution to increase the porosity of the particles
20 produced from the solution.

As an additional example, in some embodiments, particles having different shapes, sizes, physical properties, and/or chemical properties, can be used together in a procedure (e.g., an ablation procedure). The different particles can be delivered into the body of a subject in a predetermined sequence or simultaneously. In certain
25 embodiments, mixtures of different particles can be delivered using a multi-lumen catheter and/or syringe. Particles with different shapes, sizes, physical properties, and/or chemical properties are described, for example, in U.S. Patent Application Publication No. US 2004/0091543 A1, published on May 13, 2004, and in U.S. Patent Application No. 10/791,103, filed March 2, 2004, and entitled "Embolic Compositions", both of
30 which are incorporated herein by reference.

Other embodiments are in the claims.

WHAT IS CLAIMED IS:

1. A particle having an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C, wherein the particle has a diameter of at most about 3,000 microns.
2. The particle of claim 1, wherein the particle comprises a gas.
3. The particle of claim 1, wherein the particle has an internal pressure of at least about 1.5 atmospheres at a temperature of at least about 35°C.
4. The particle of claim 1, wherein the particle has an internal pressure of at least about 1.5 atmospheres at a temperature of at least about 90°C.
5. The particle of claim 1, wherein the internal pressure of the particle increases by at least about five percent when the particle is heated to a temperature of at least about 25°C.
6. The particle of claim 1, wherein the internal pressure of the particle increases by at least about 10 percent when the particle is heated to a temperature of at least about 35°C.
7. The particle of claim 1, wherein the internal pressure of the particle increases by at least about 20 percent when the particle is heated to a temperature of at least about 90°C.
8. The particle of claim 1, wherein the particle bursts at a temperature of at least about 35°C.
9. The particle of claim 1, wherein the particle bursts at a temperature of at least about 90°C.

10. The particle of claim 1, wherein the particle bursts at an internal pressure of at least about 1.5 atmospheres.

11. The particle of claim 1, wherein the particle comprises a thermally conductive material, an electrically conductive material, a ferromagnetic material, or a combination thereof.

12. The particle of claim 1, wherein the particle comprises a gas generator, and when the gas generator is heated to a temperature of at least about 25°C, the internal pressure of the particle increases to at least about 1.2 atmospheres.

13. The particle of claim 12, wherein the gas generator comprises dry ice.

14. The particle of claim 12, wherein the gas generator is disposed in an interior region of the particle.

15. The particle of claim 1, wherein the particle comprises a gas generator, and when the gas generator is heated to a temperature of at least about 35°C, the internal pressure of the particle increases to at least about 1.5 atmospheres.

16. The particle of claim 1, wherein the particle comprises a gas generator, and when the gas generator is heated to a temperature of at least about 90°C, the internal pressure of the particle increases to at least about 1.5 atmospheres.

17. The particle of claim 1, wherein the particle comprises a gas generator, and when the gas generator is heated to a temperature of at least about 100°C, the internal pressure of the particle increases to at least about 1.5 atmospheres.

18. The particle of claim 17, wherein the gas generator comprises water or saline.

19. The particle of claim 1, wherein the particle comprises a coating.
20. The particle of claim 19, wherein the coating has a thickness of at most 0.02 inch.
21. A composition, comprising:
a carrier fluid; and
particles disposed within the carrier fluid, the particles having an arithmetic mean diameter of at most about 3,000 microns,
wherein an environment surrounding the composition has a pressure of at least about 1.1 atmospheres.
22. A capsule containing at least one of the particles of claim 1, wherein the capsule has a maximum dimension of from about 3,000 microns to about 5,000 microns.
23. The capsule of claim 22, wherein the capsule has an internal pressure of at least about 1.1 atmospheres.
24. A method, comprising:
exposing a particle with an internal pressure of at least about 1.1 atmospheres at a temperature of less than about 25°C to a temperature of at least about 35°C,
wherein the particle has a diameter of at most about 3,000 microns.
25. The method of claim 24, wherein exposing the particle to a temperature of at least about 35°C causes the particle to burst.
26. The method of claim 24, wherein exposing the particle to a temperature of at least about 35°C causes the internal pressure of the particle to increase to at least about 1.5 atmospheres.

27. The method of claim 24, further comprising contacting the particle with an agent that is adapted to dissolve or erode at least a portion of the particle.

28. A particle having at least one cavity and comprising a matrix including at least one polymer and a plurality of pores, wherein the particle has a diameter of about 3,000 microns or less.

29. The particle of claim 28, wherein the at least one cavity is defined by the matrix including the at least one polymer.

30. The particle of claim 28, wherein the at least one polymer comprises a polymer selected from the group consisting of polyvinyl alcohols, polyacrylic acids, polymethacrylic acids, poly vinyl sulfonates, carboxymethyl celluloses, hydroxyethyl celluloses, substituted celluloses, polyacrylamides, polyethylene glycols, polyamides, polyureas, polyurethanes, polyesters, polyethers, polystyrenes, polysaccharides, polylactic acids, polyethylenes, polymethylmethacrylates, polyethylacrylate, polycaprolactones, polyglycolic acids, poly(lactic-co-glycolic) acids, and copolymers or mixtures thereof.

31. The particle of claim 28, wherein the at least one polymer comprises polyvinyl alcohol.

1/17

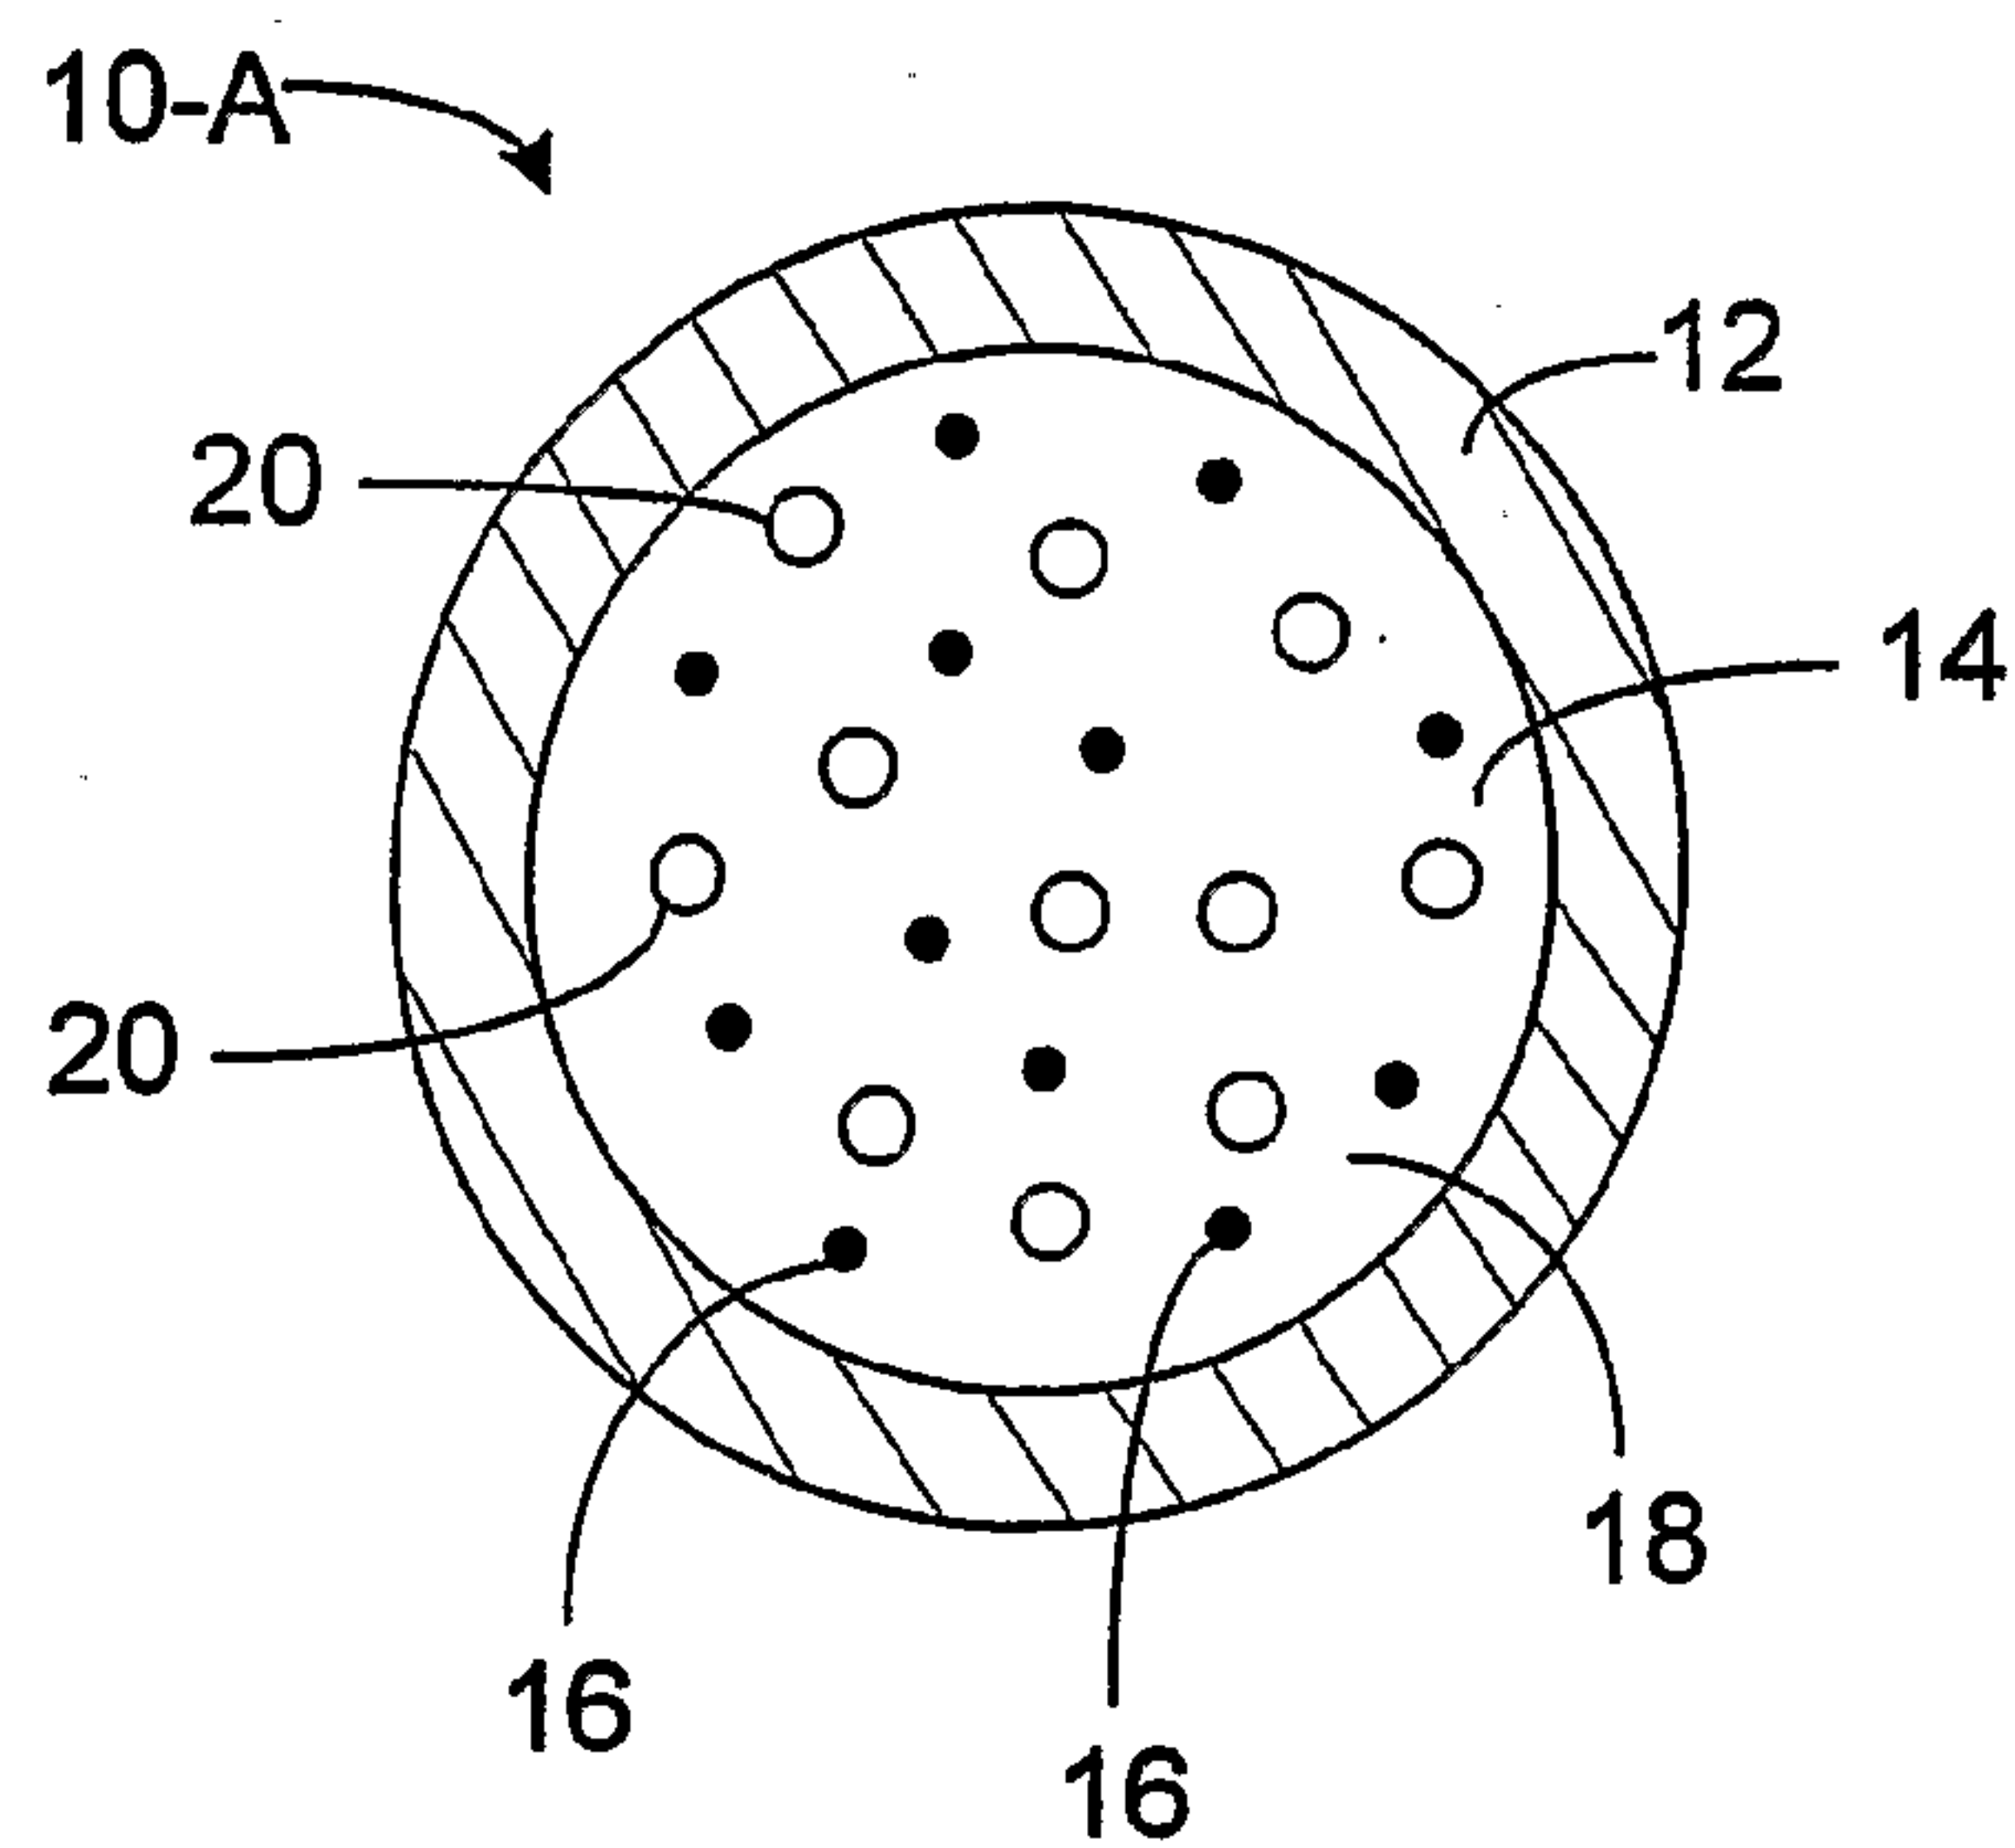


FIG. 1A

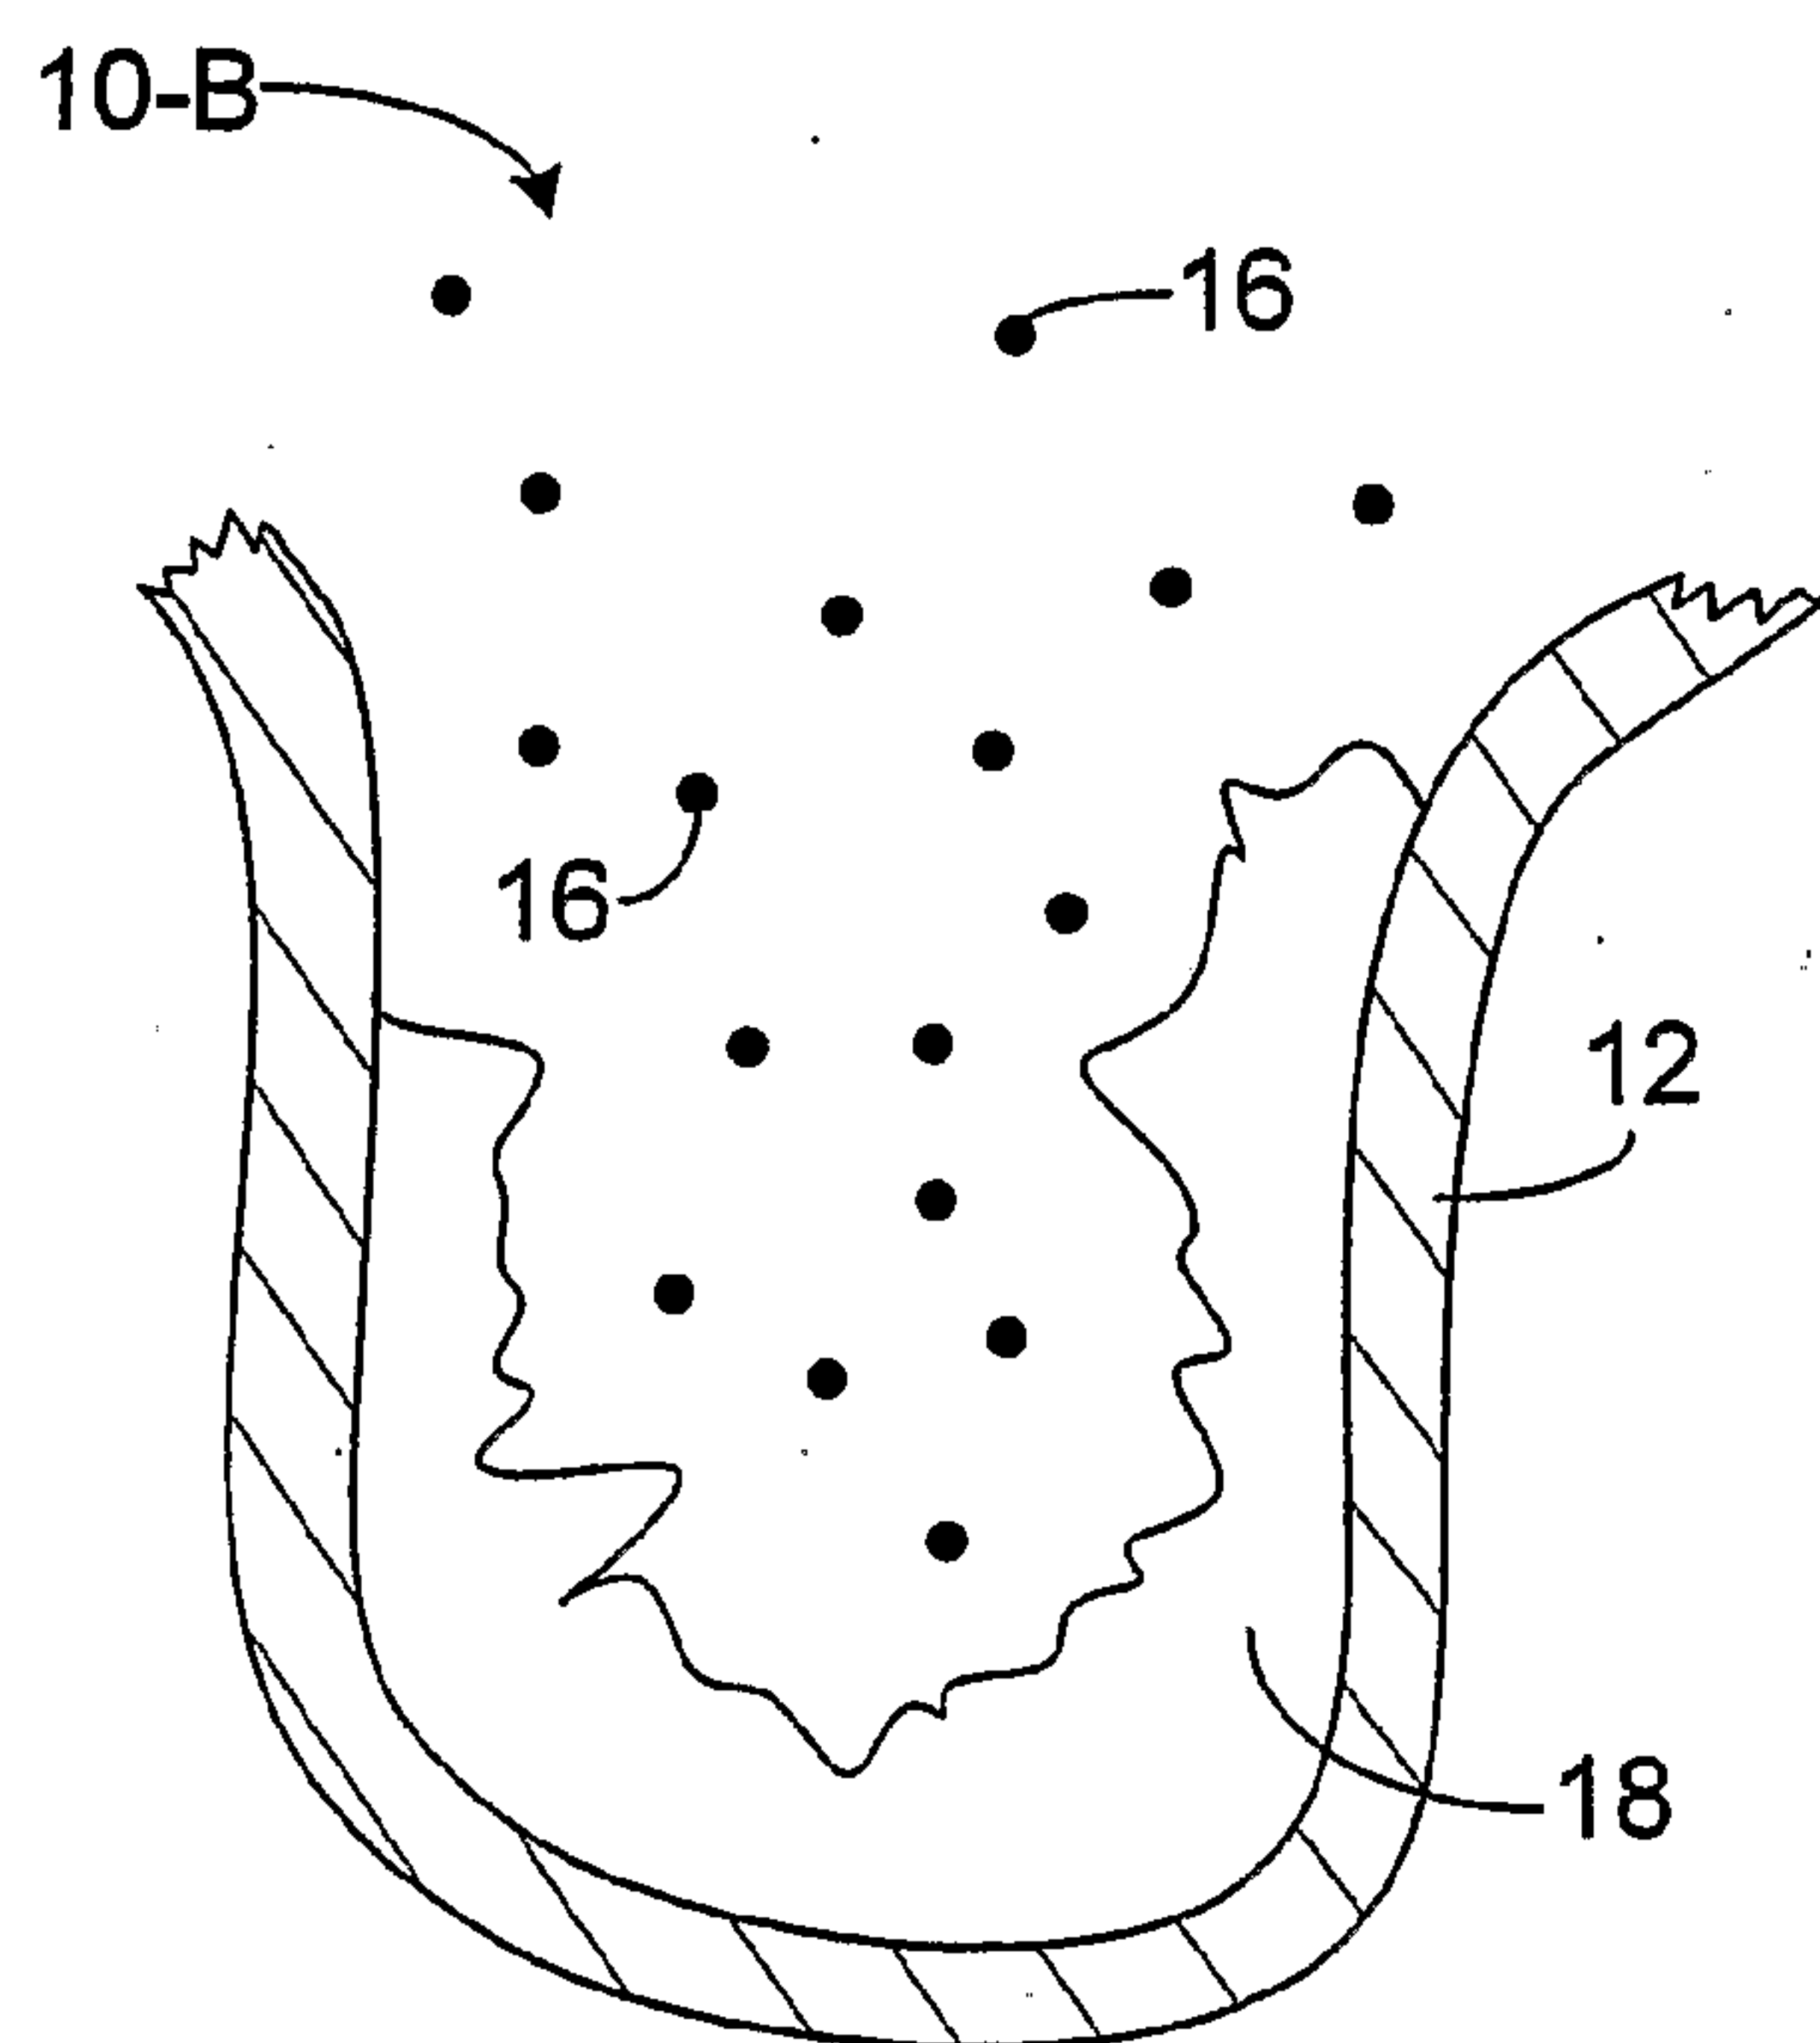


FIG. 1B

2/17

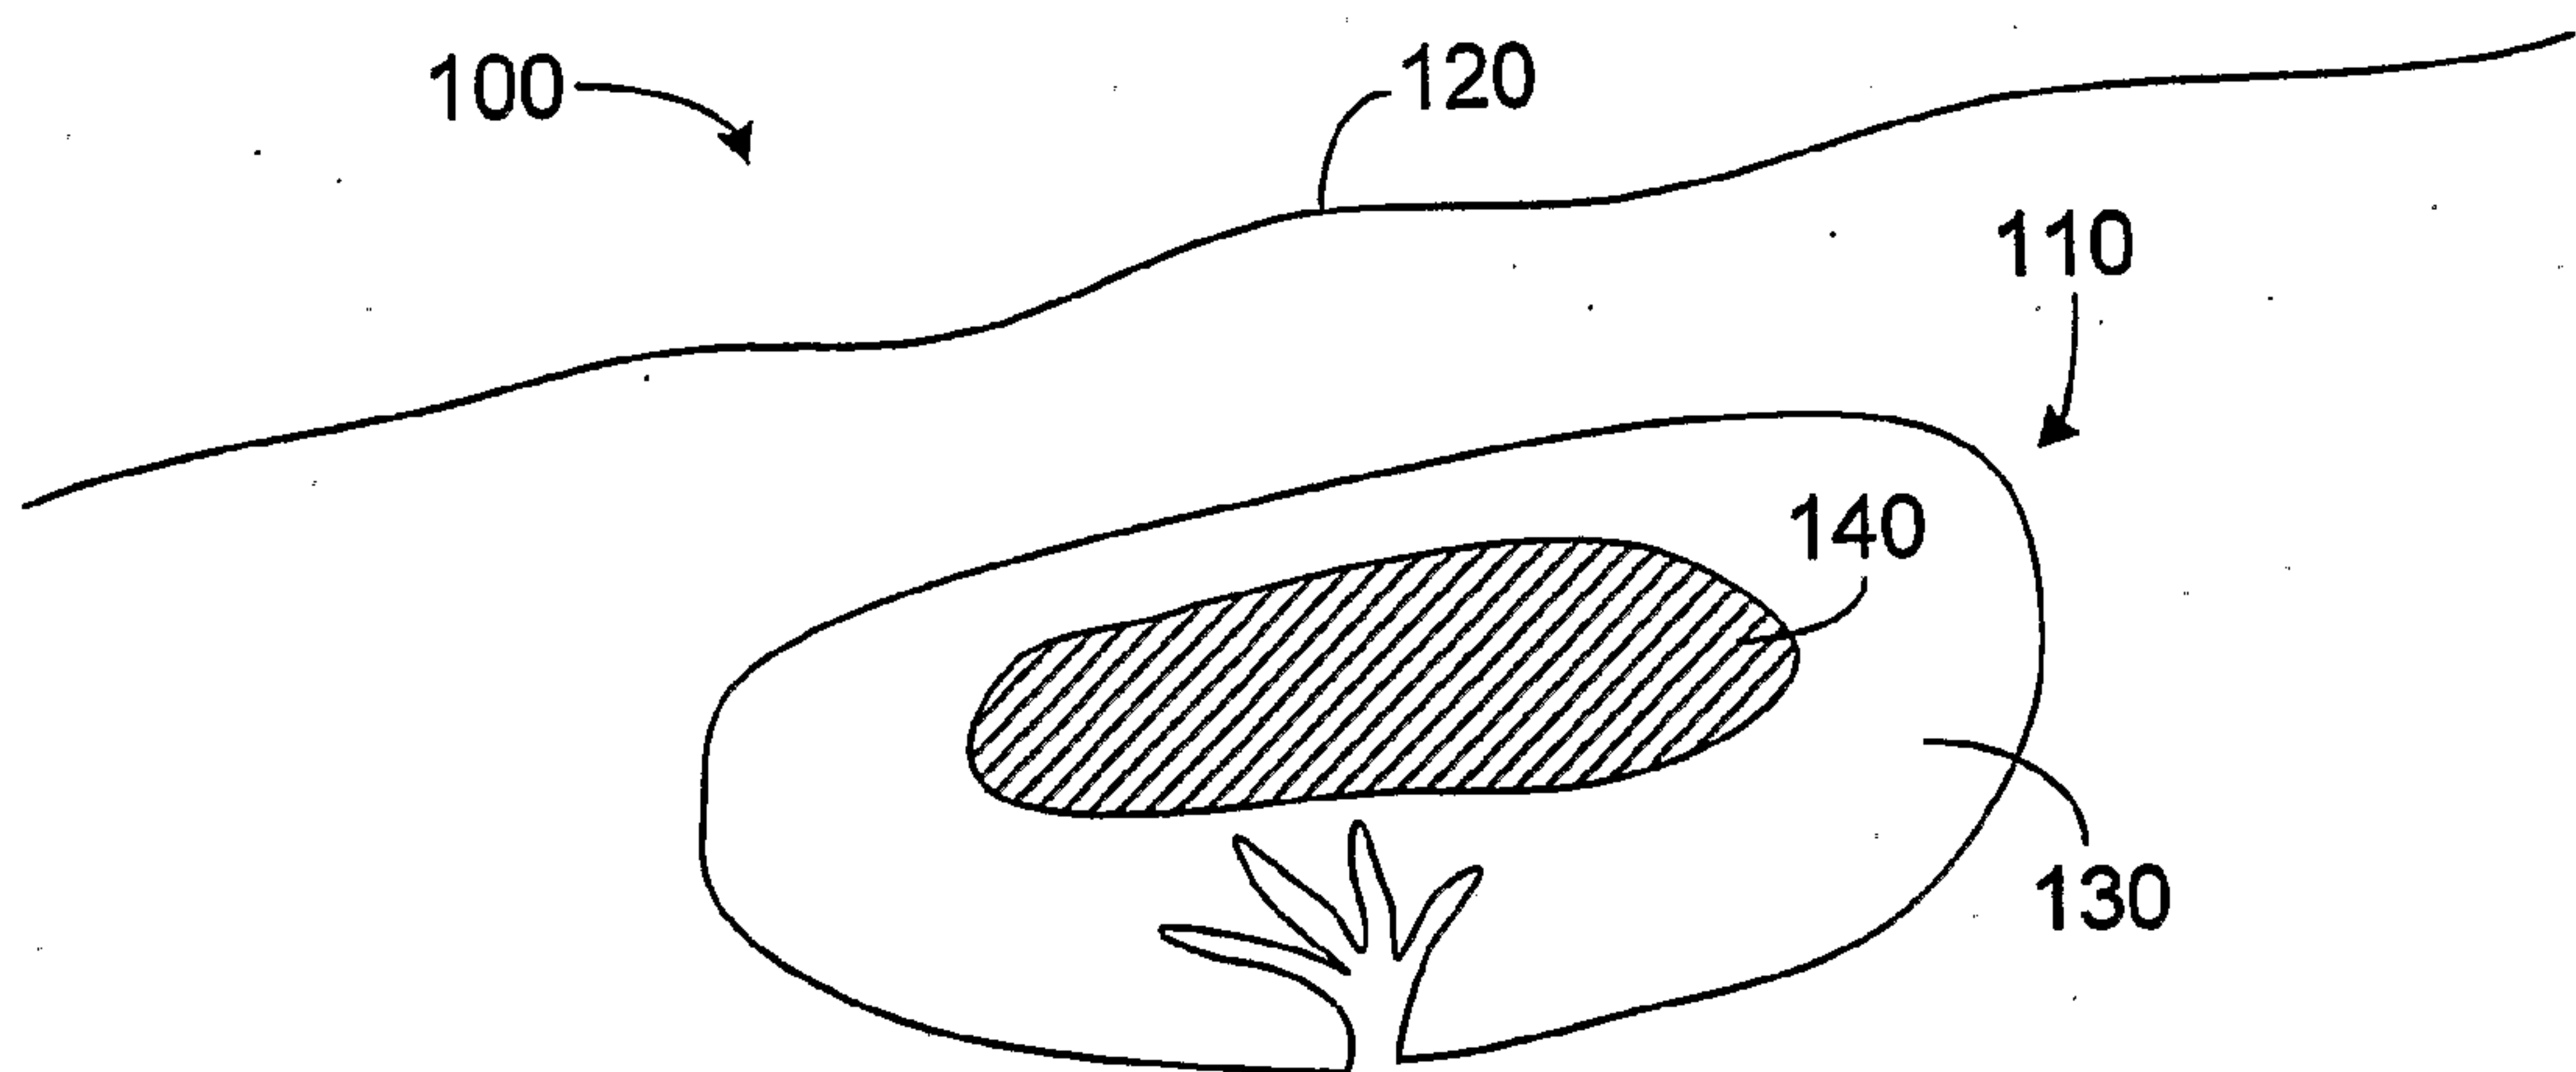


FIG. 2A

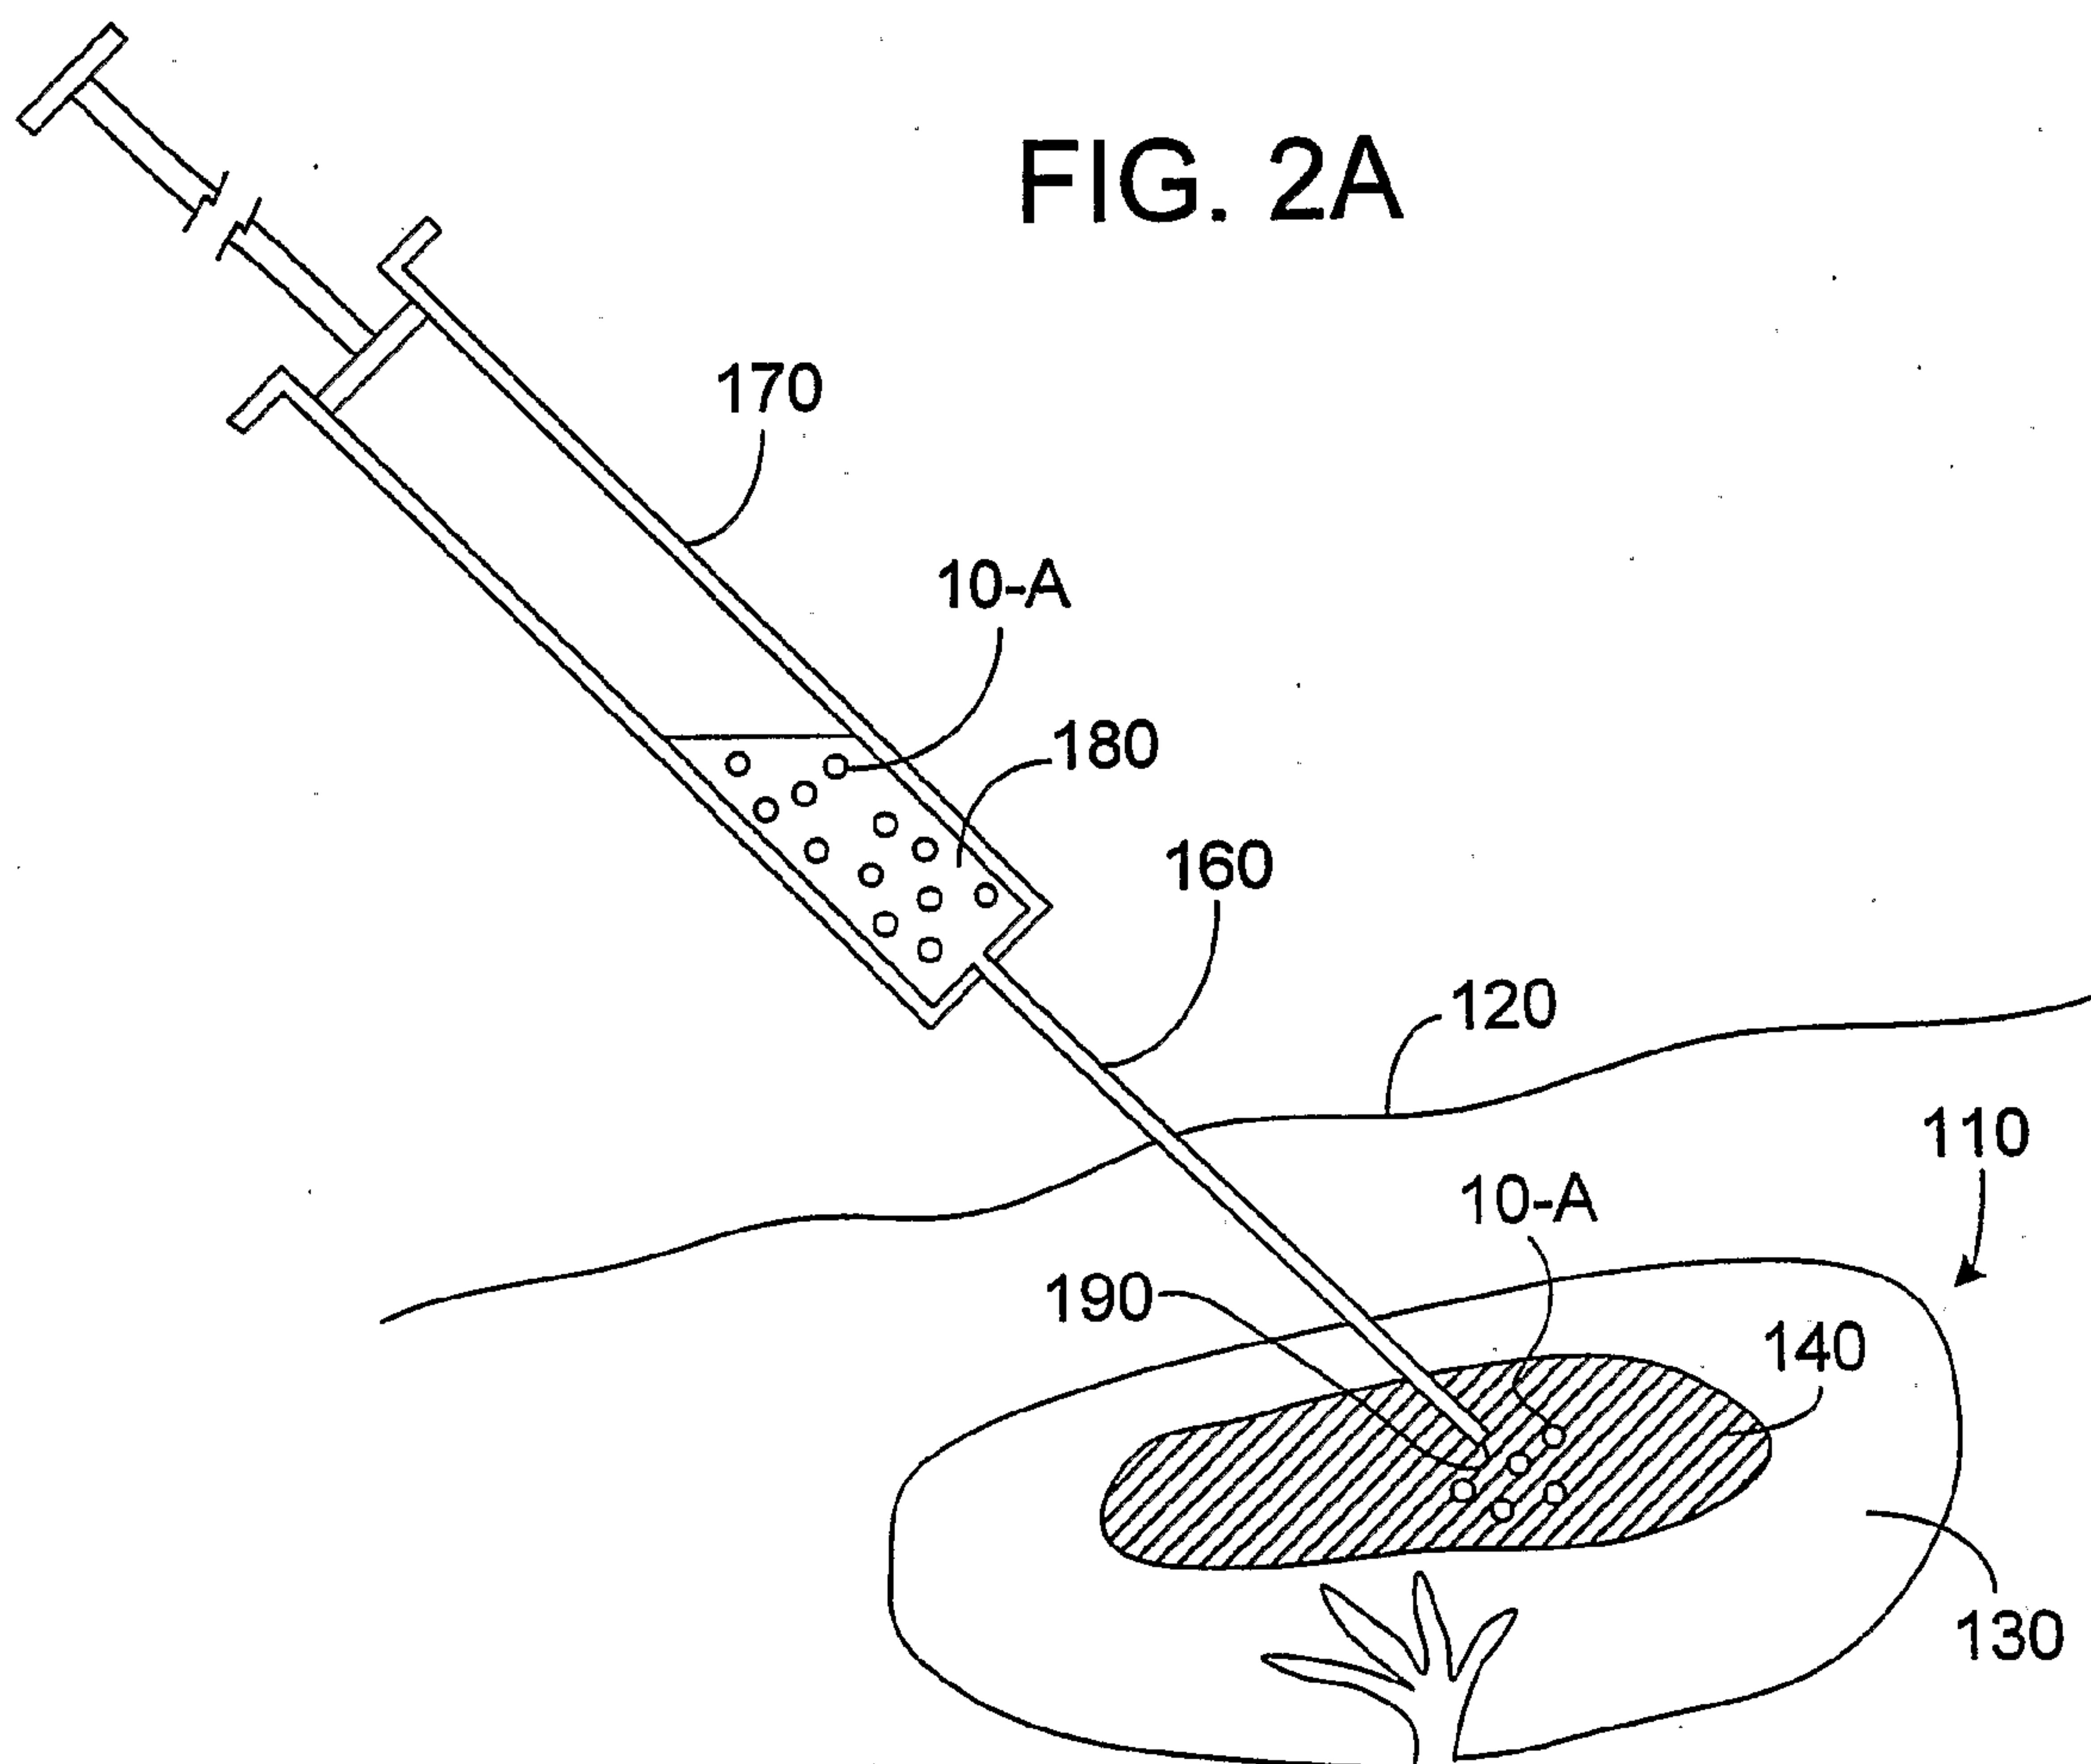


FIG. 2B

3/17

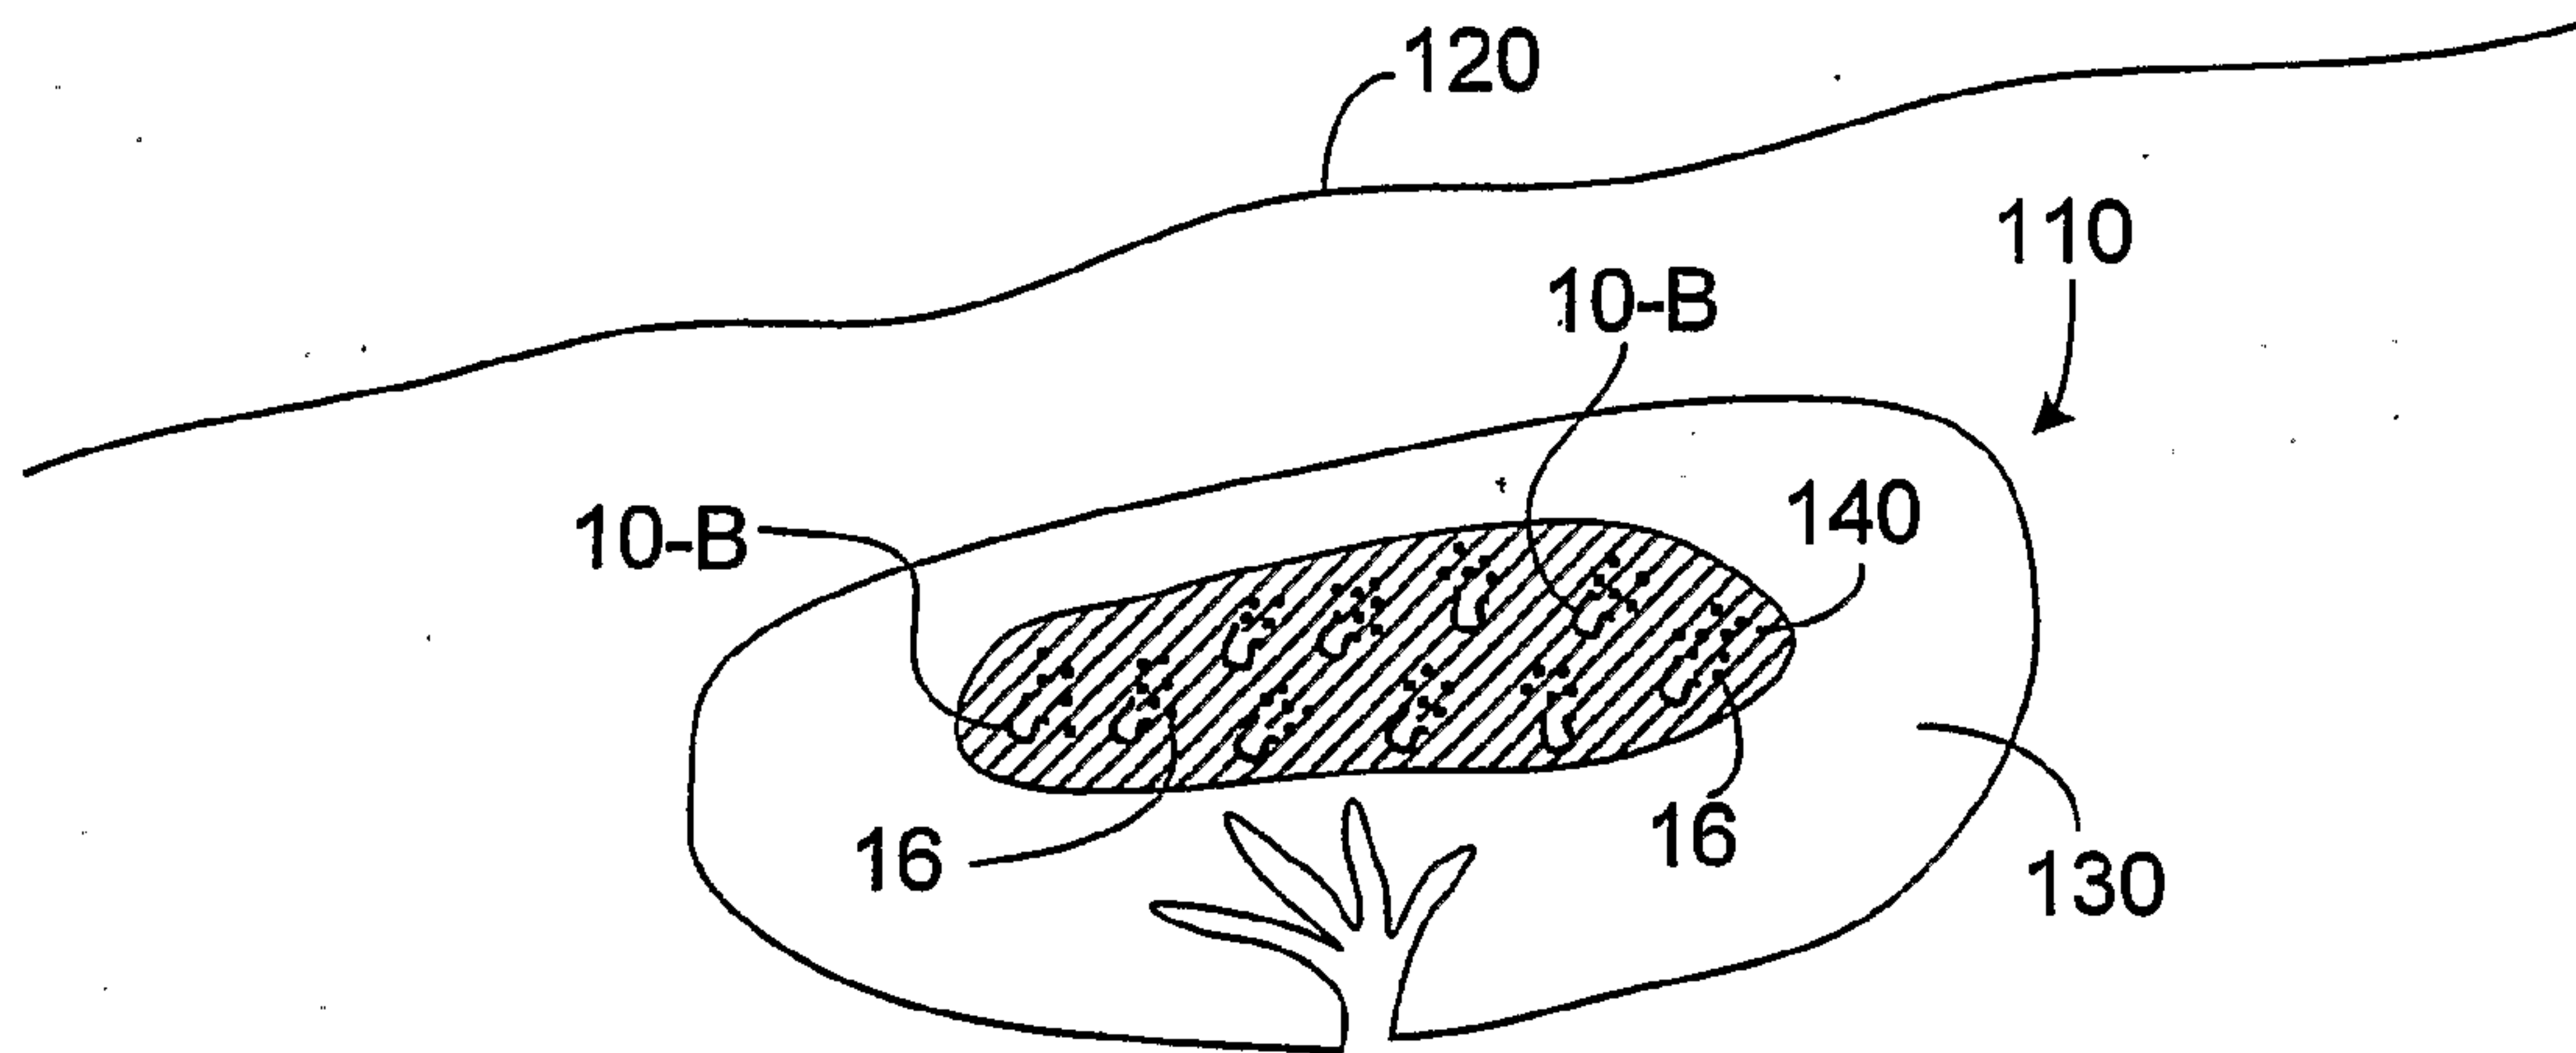


FIG. 2C

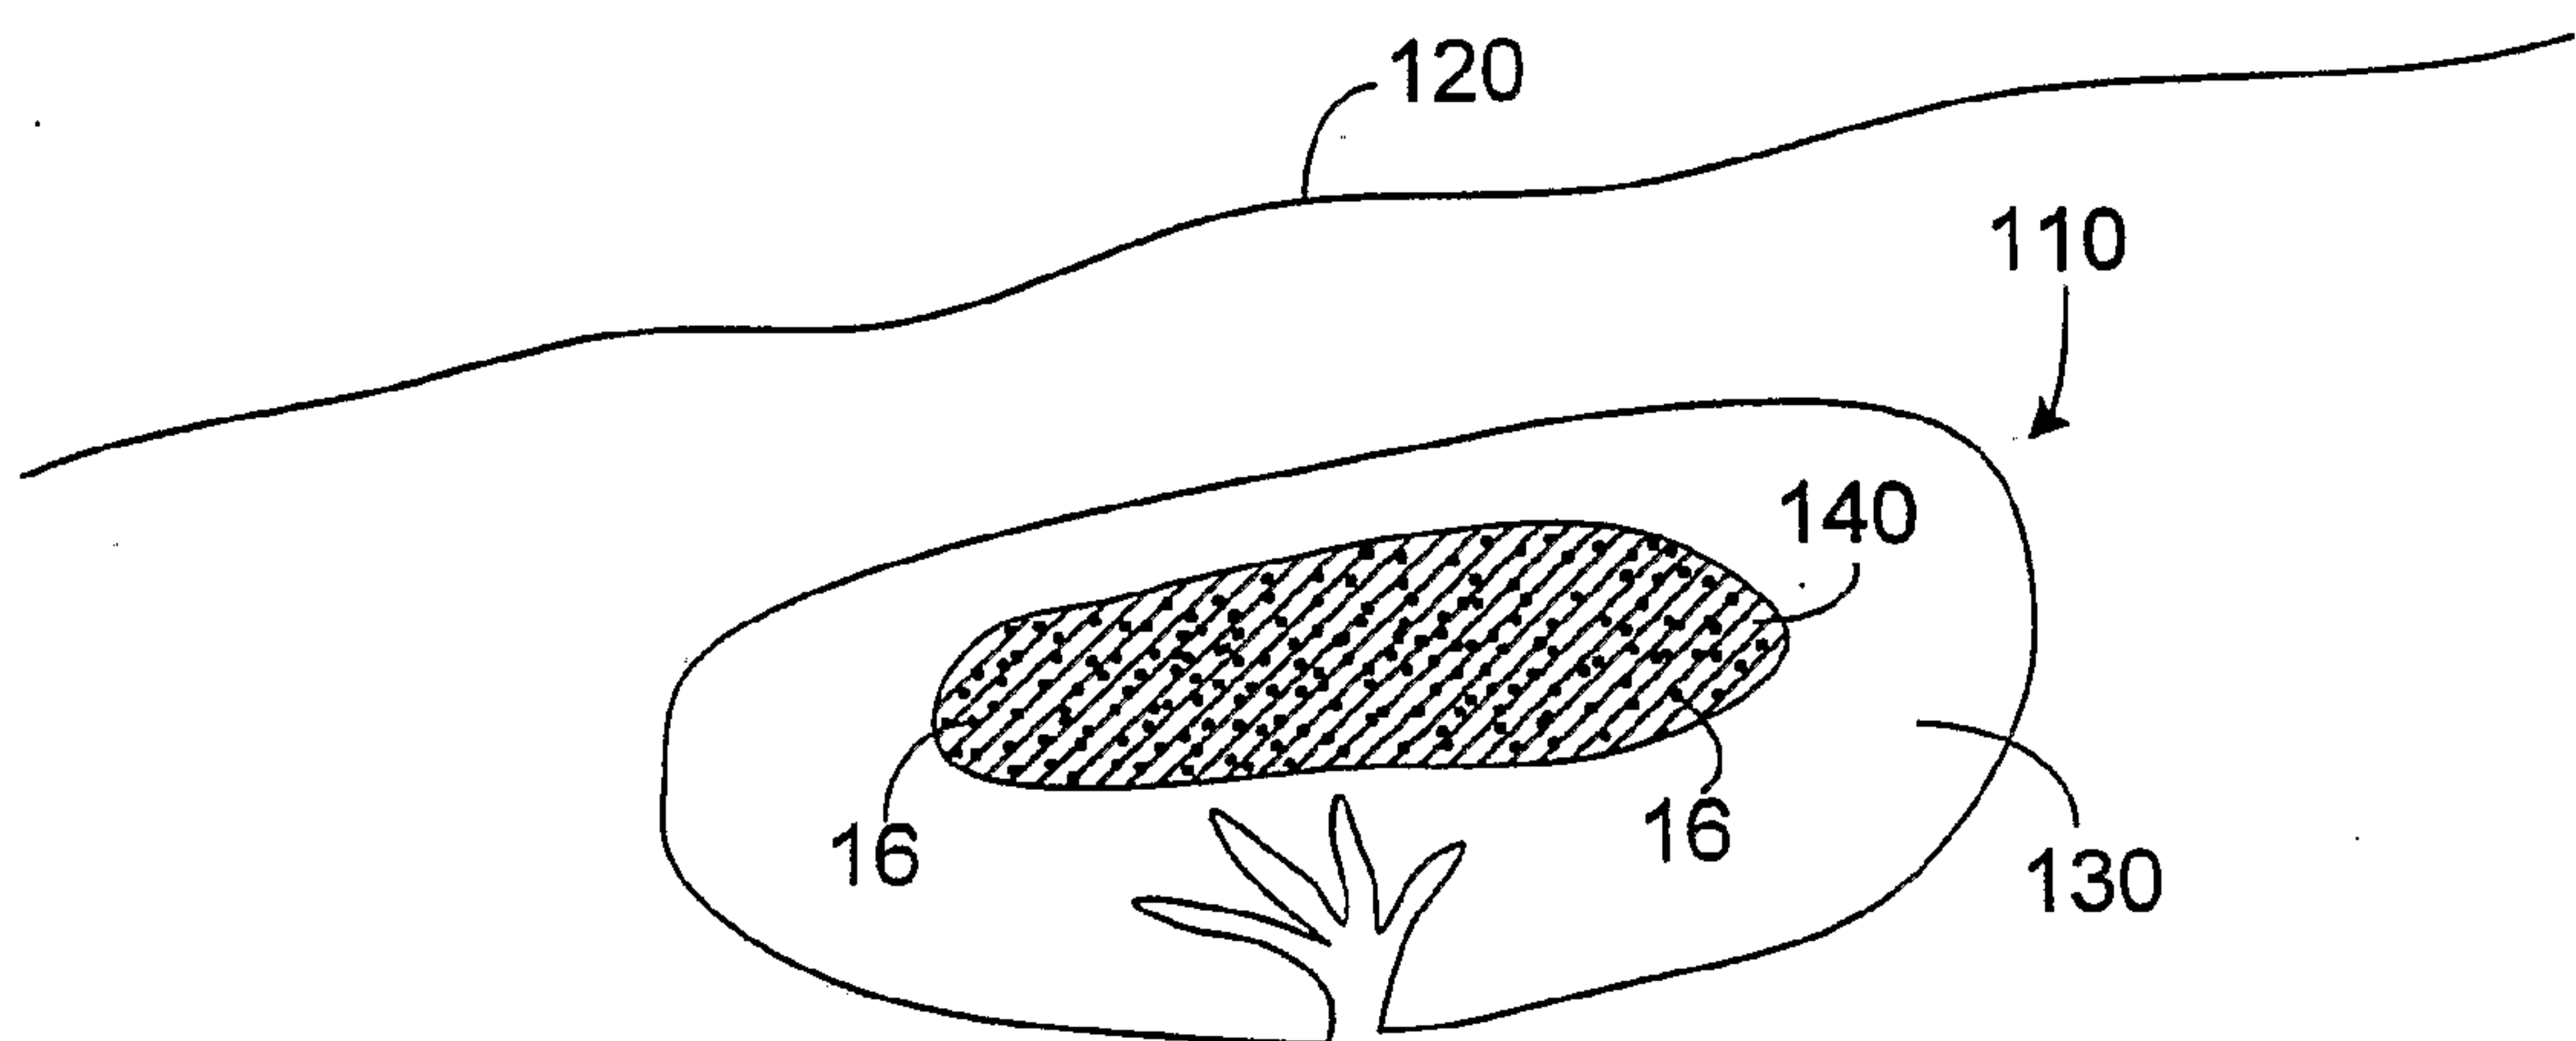


FIG. 2D

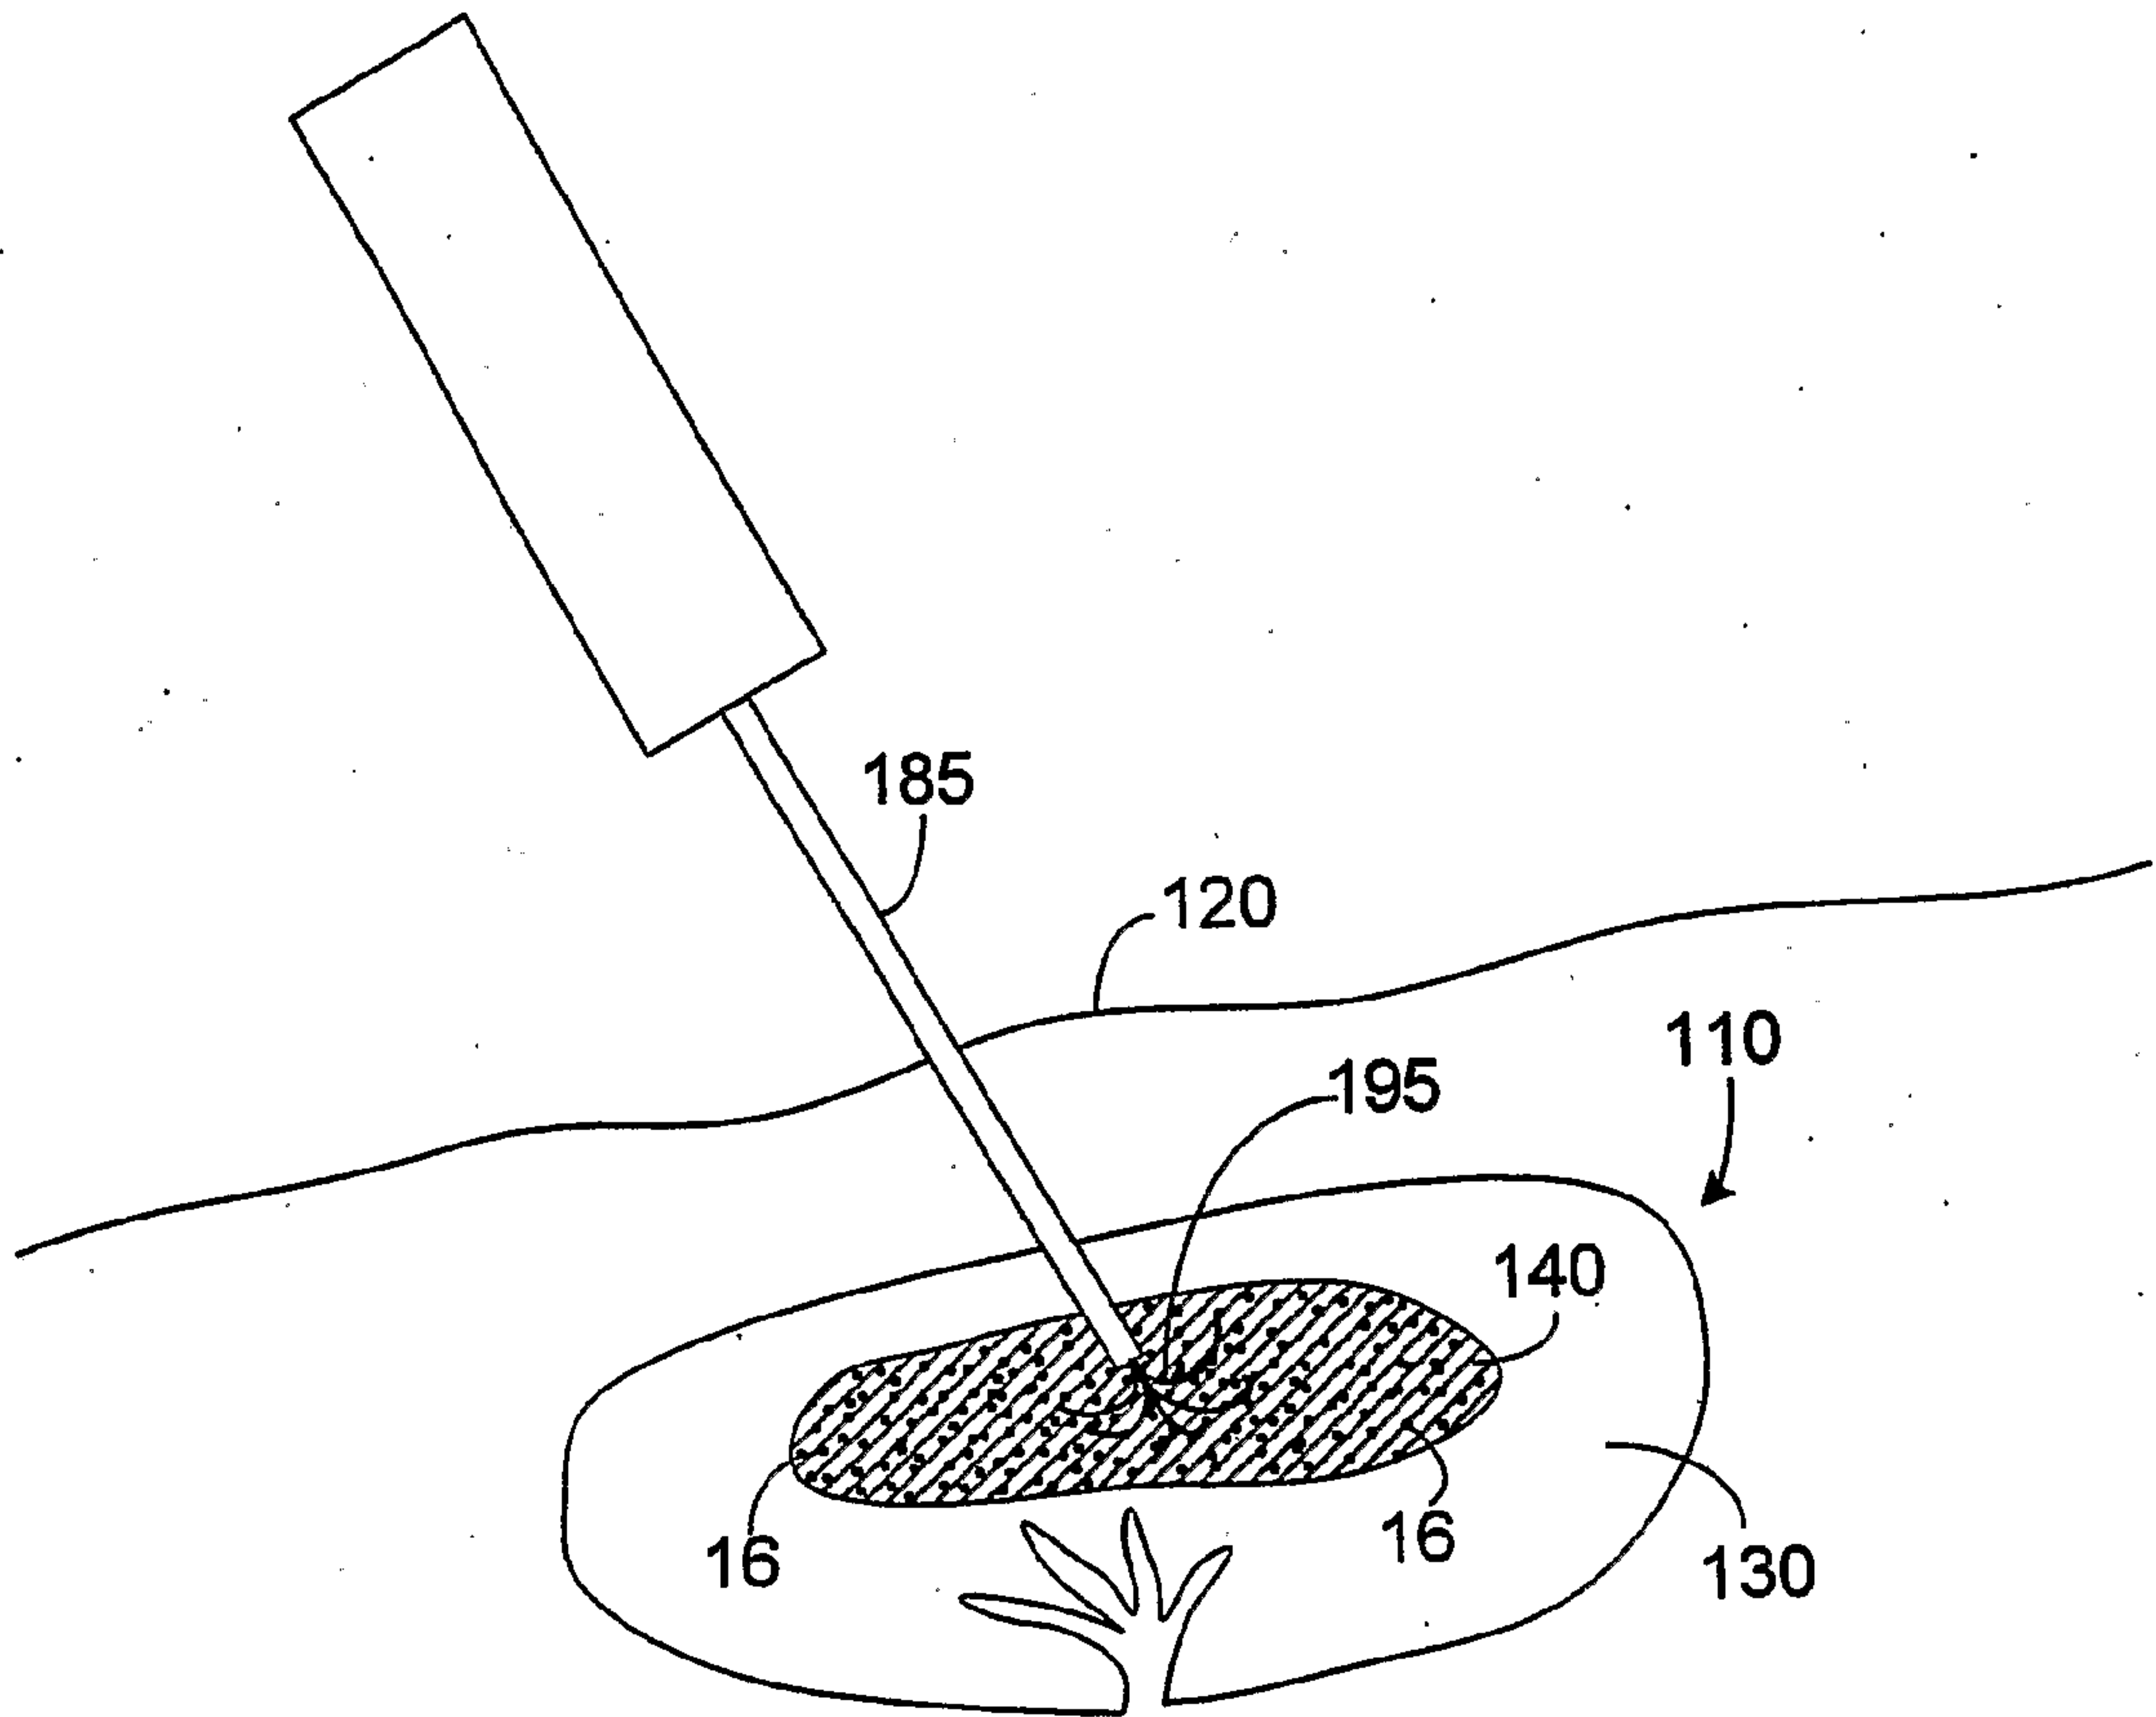
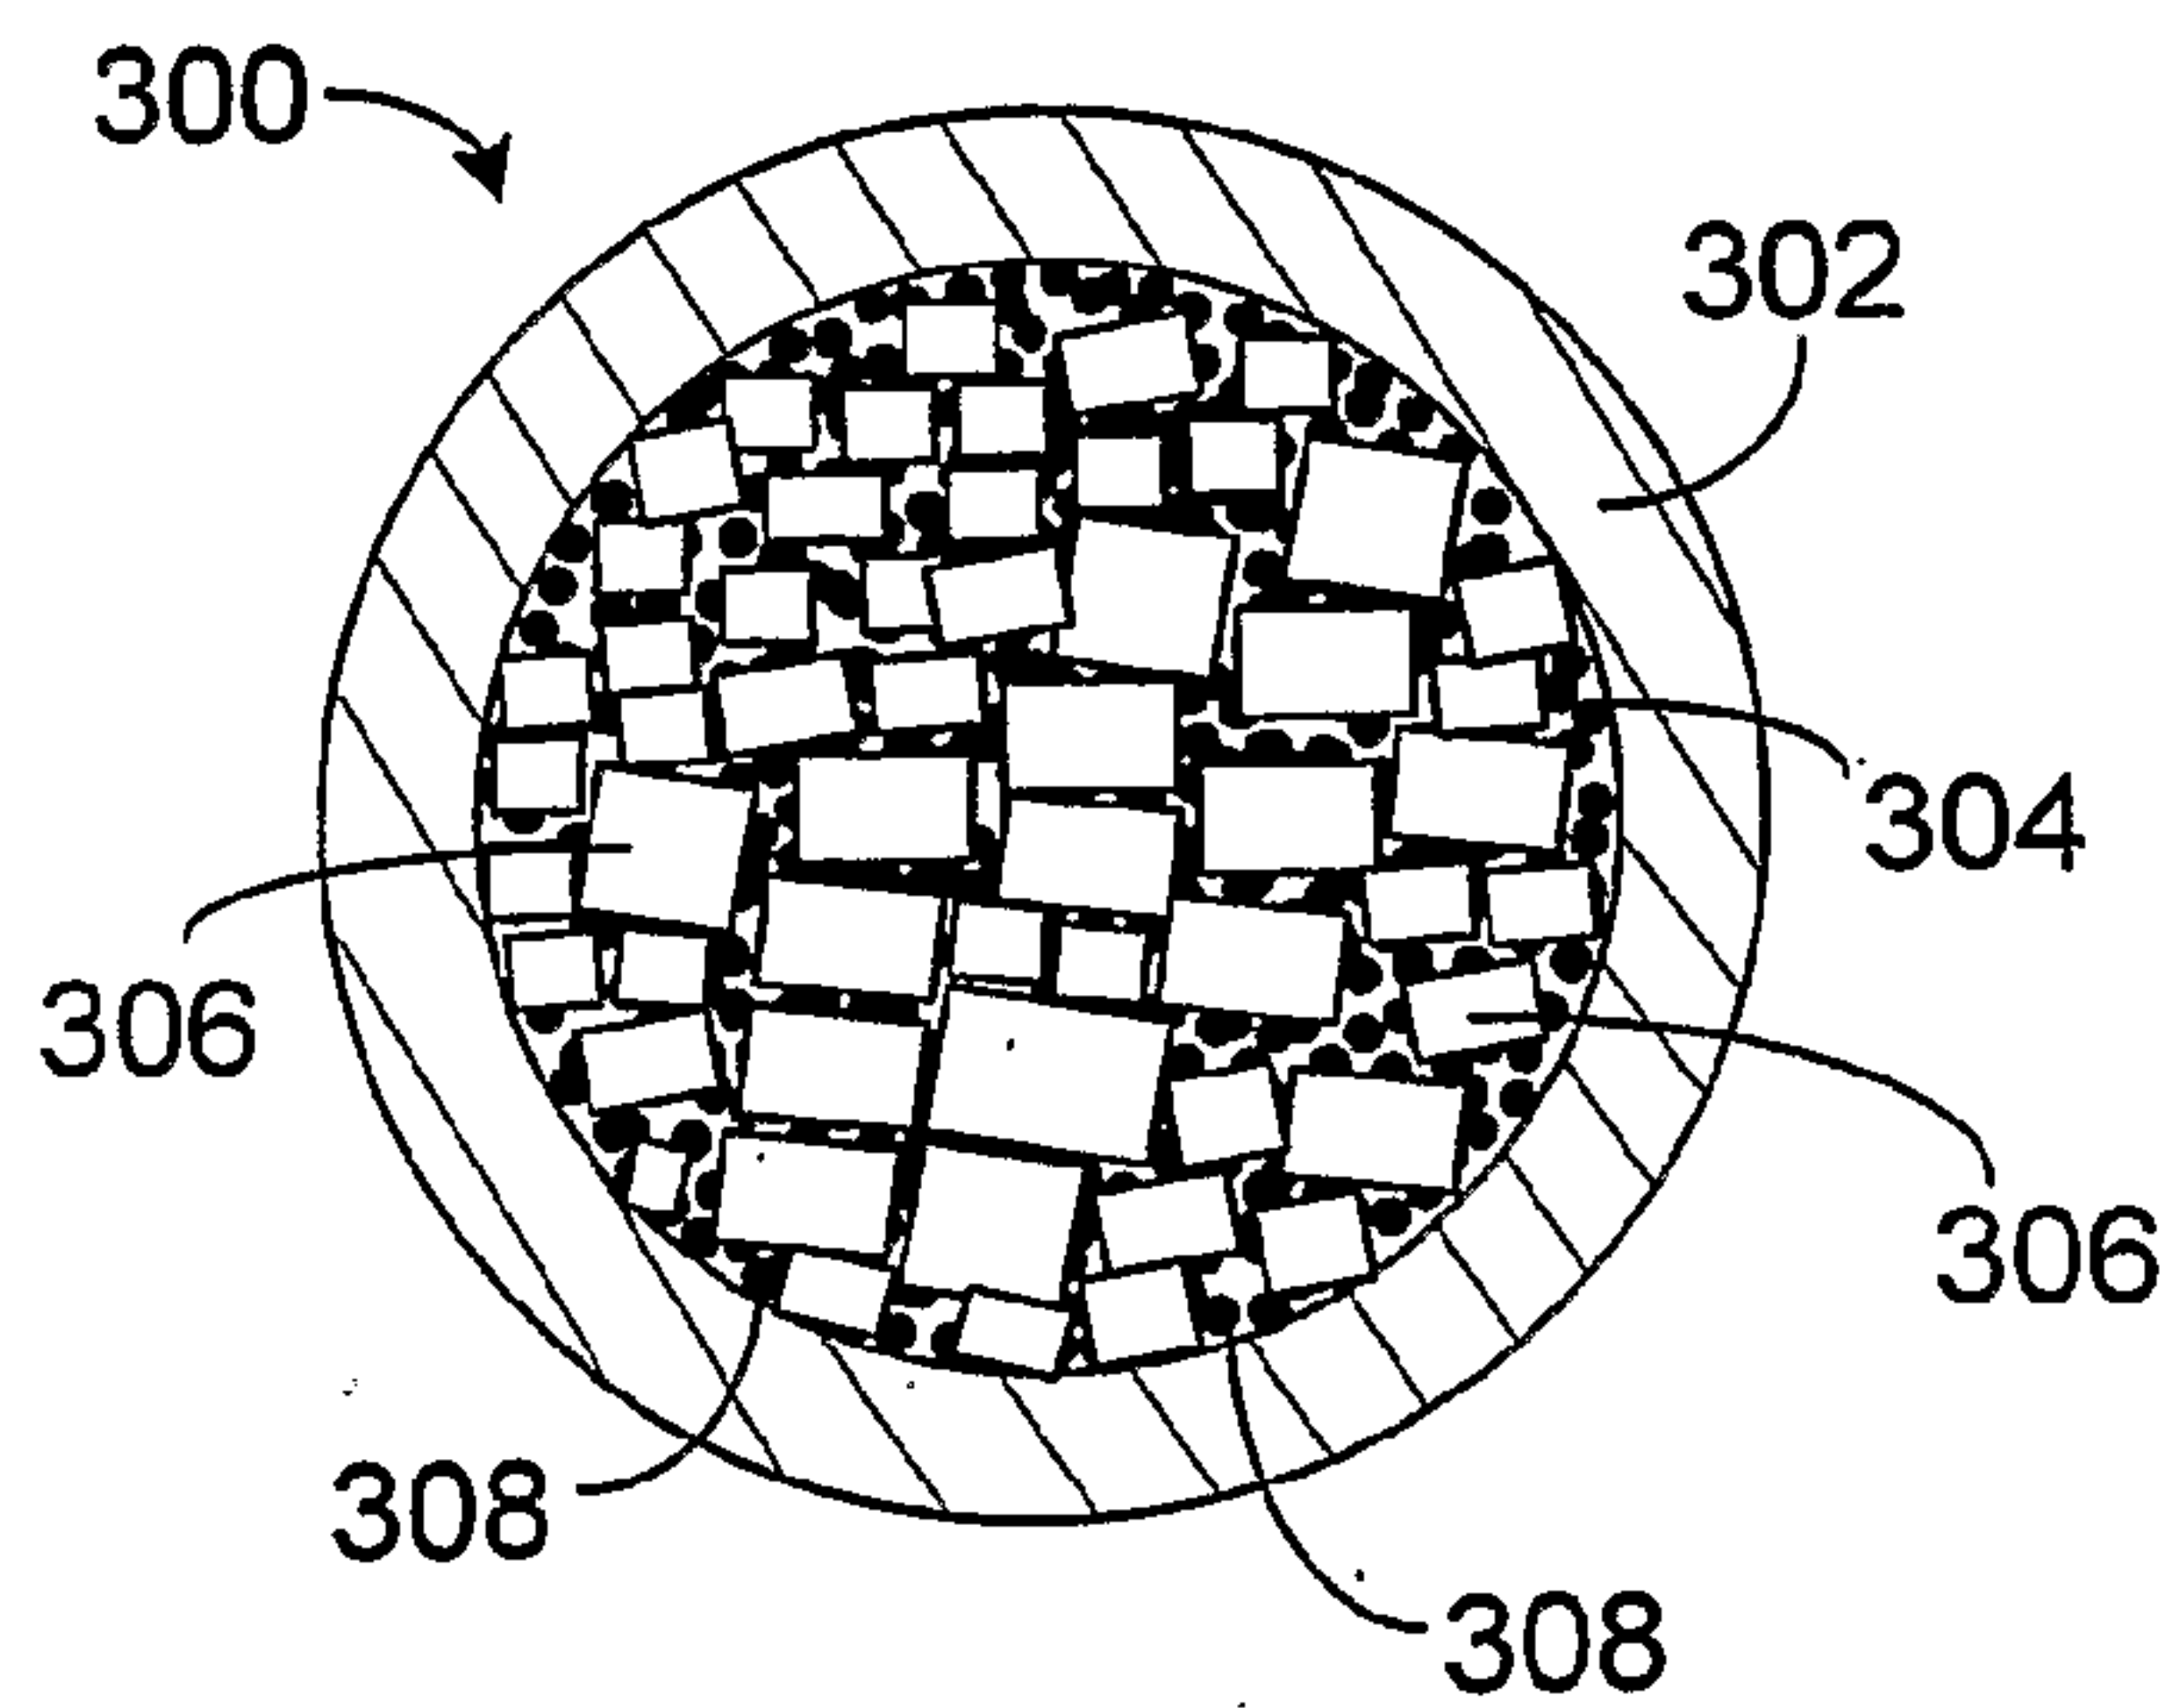
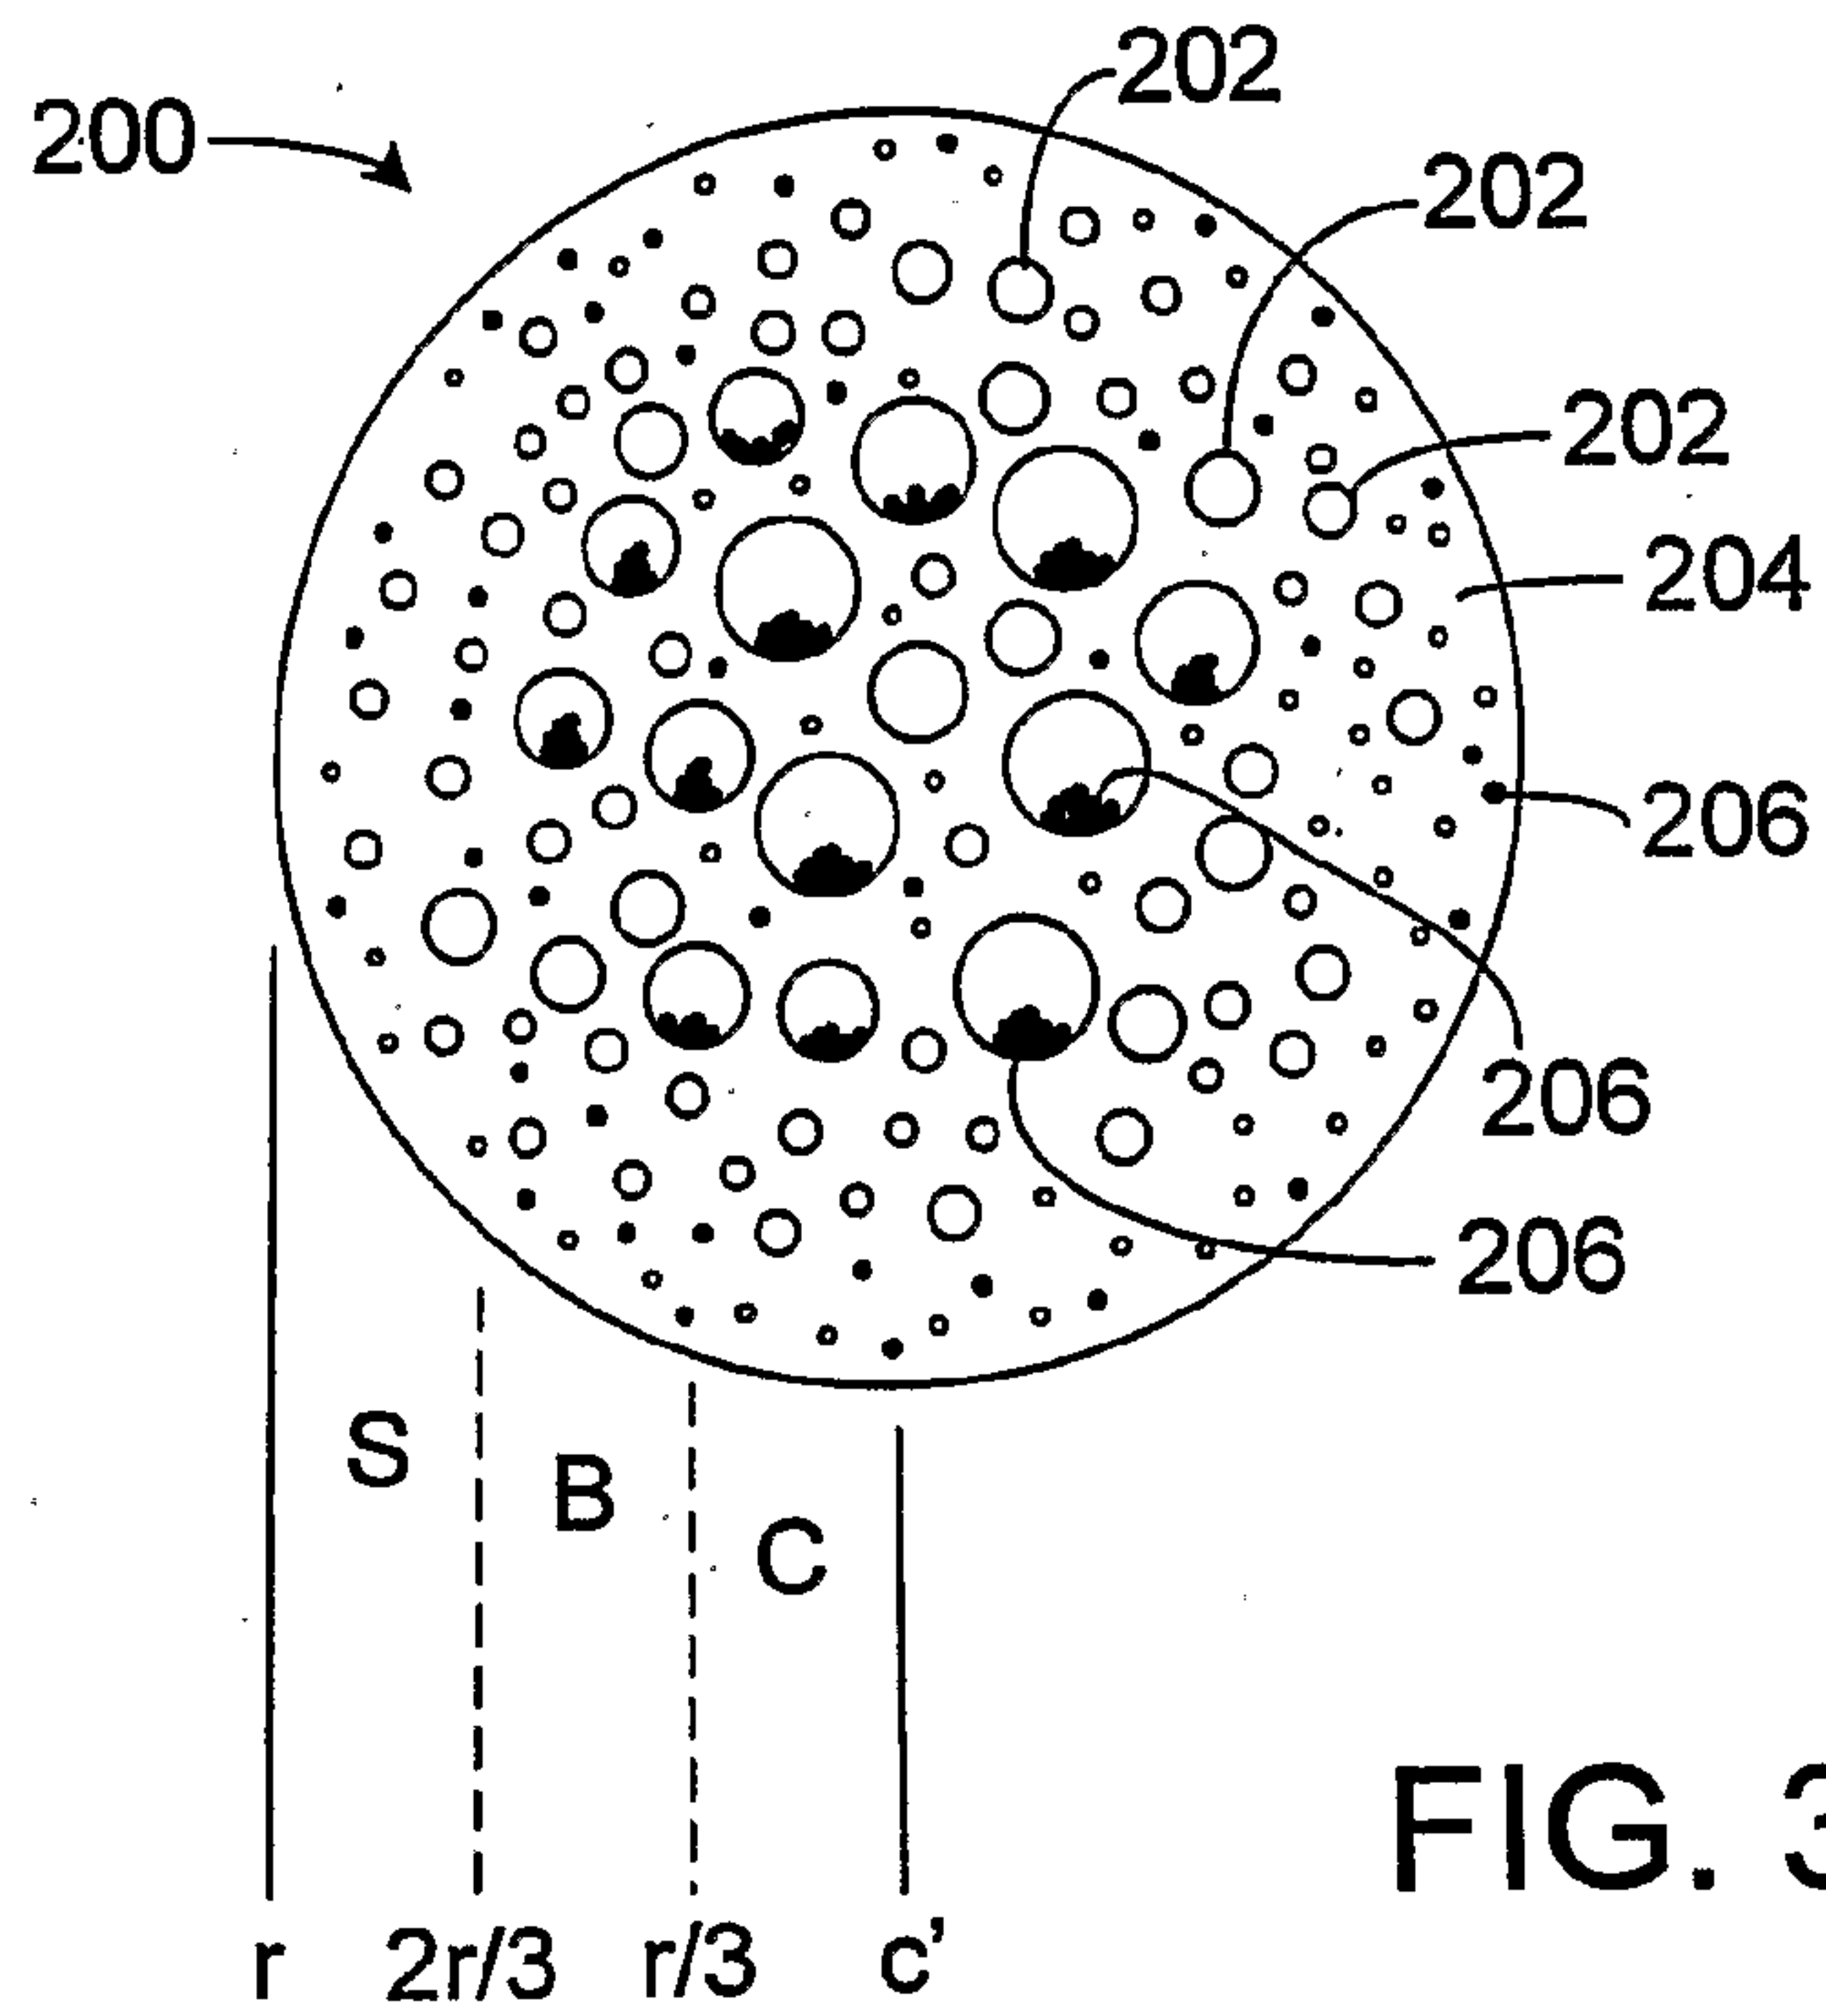


FIG. 2E

5/17



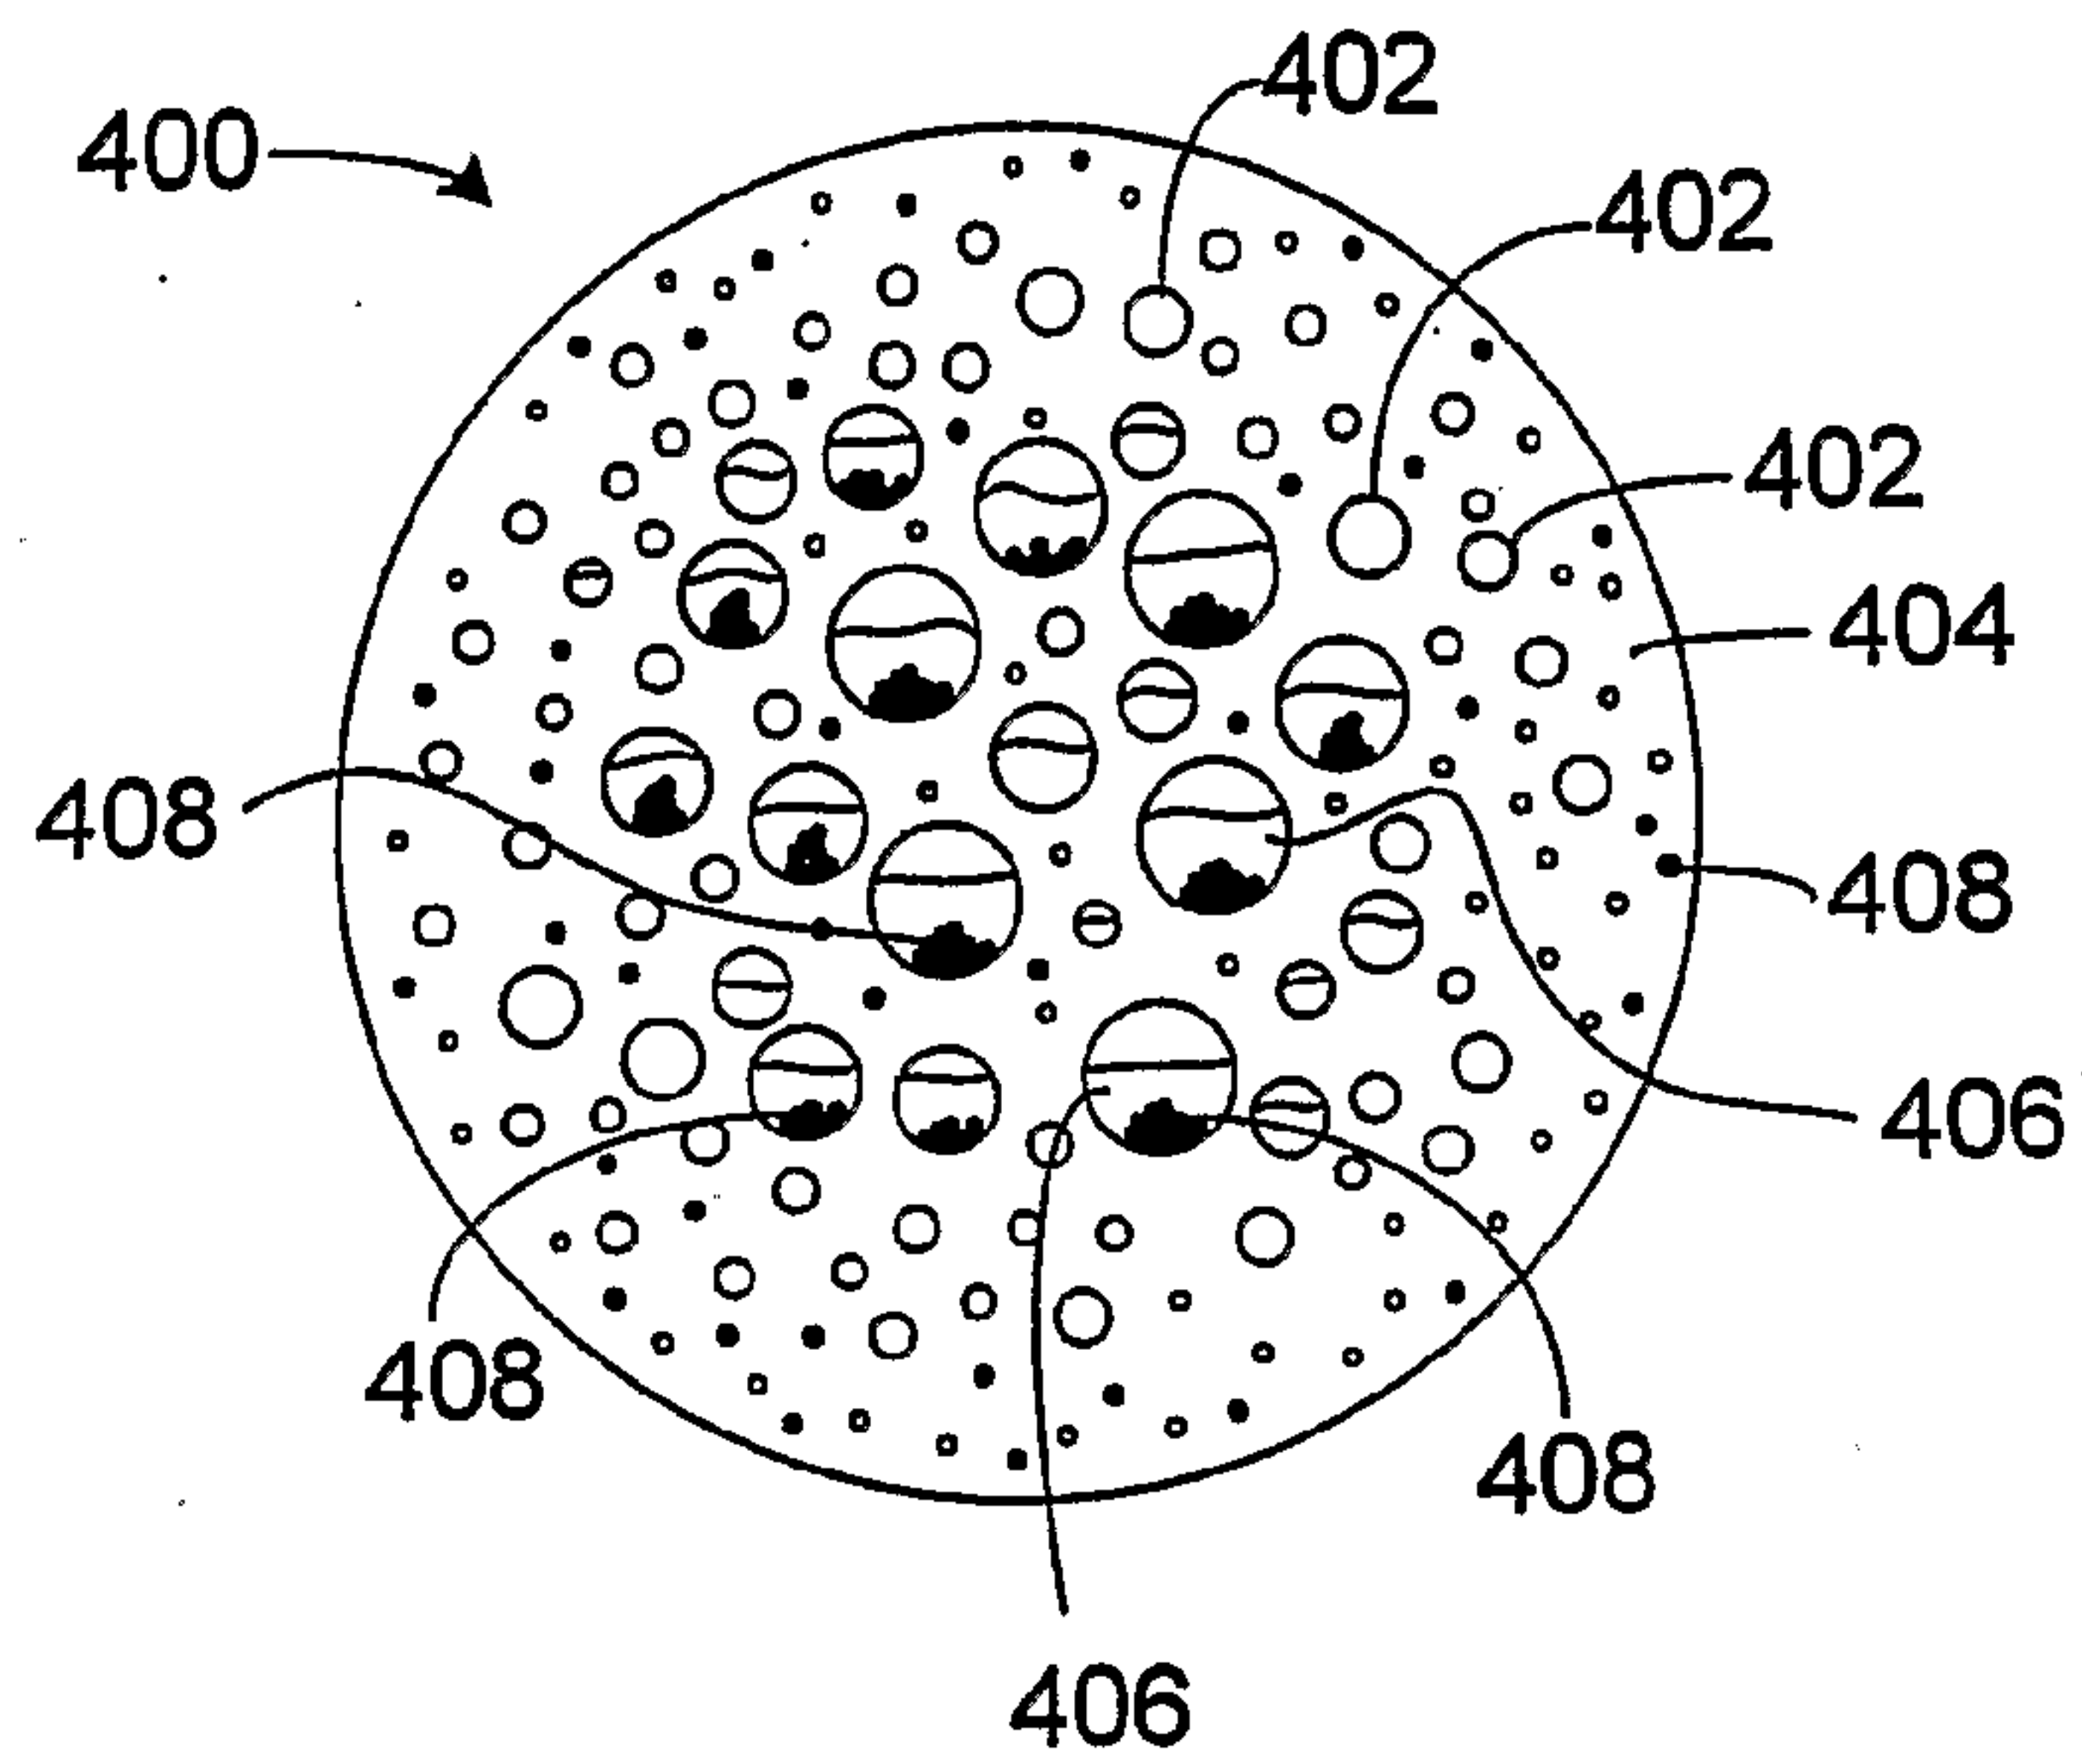


FIG. 4B

7/17

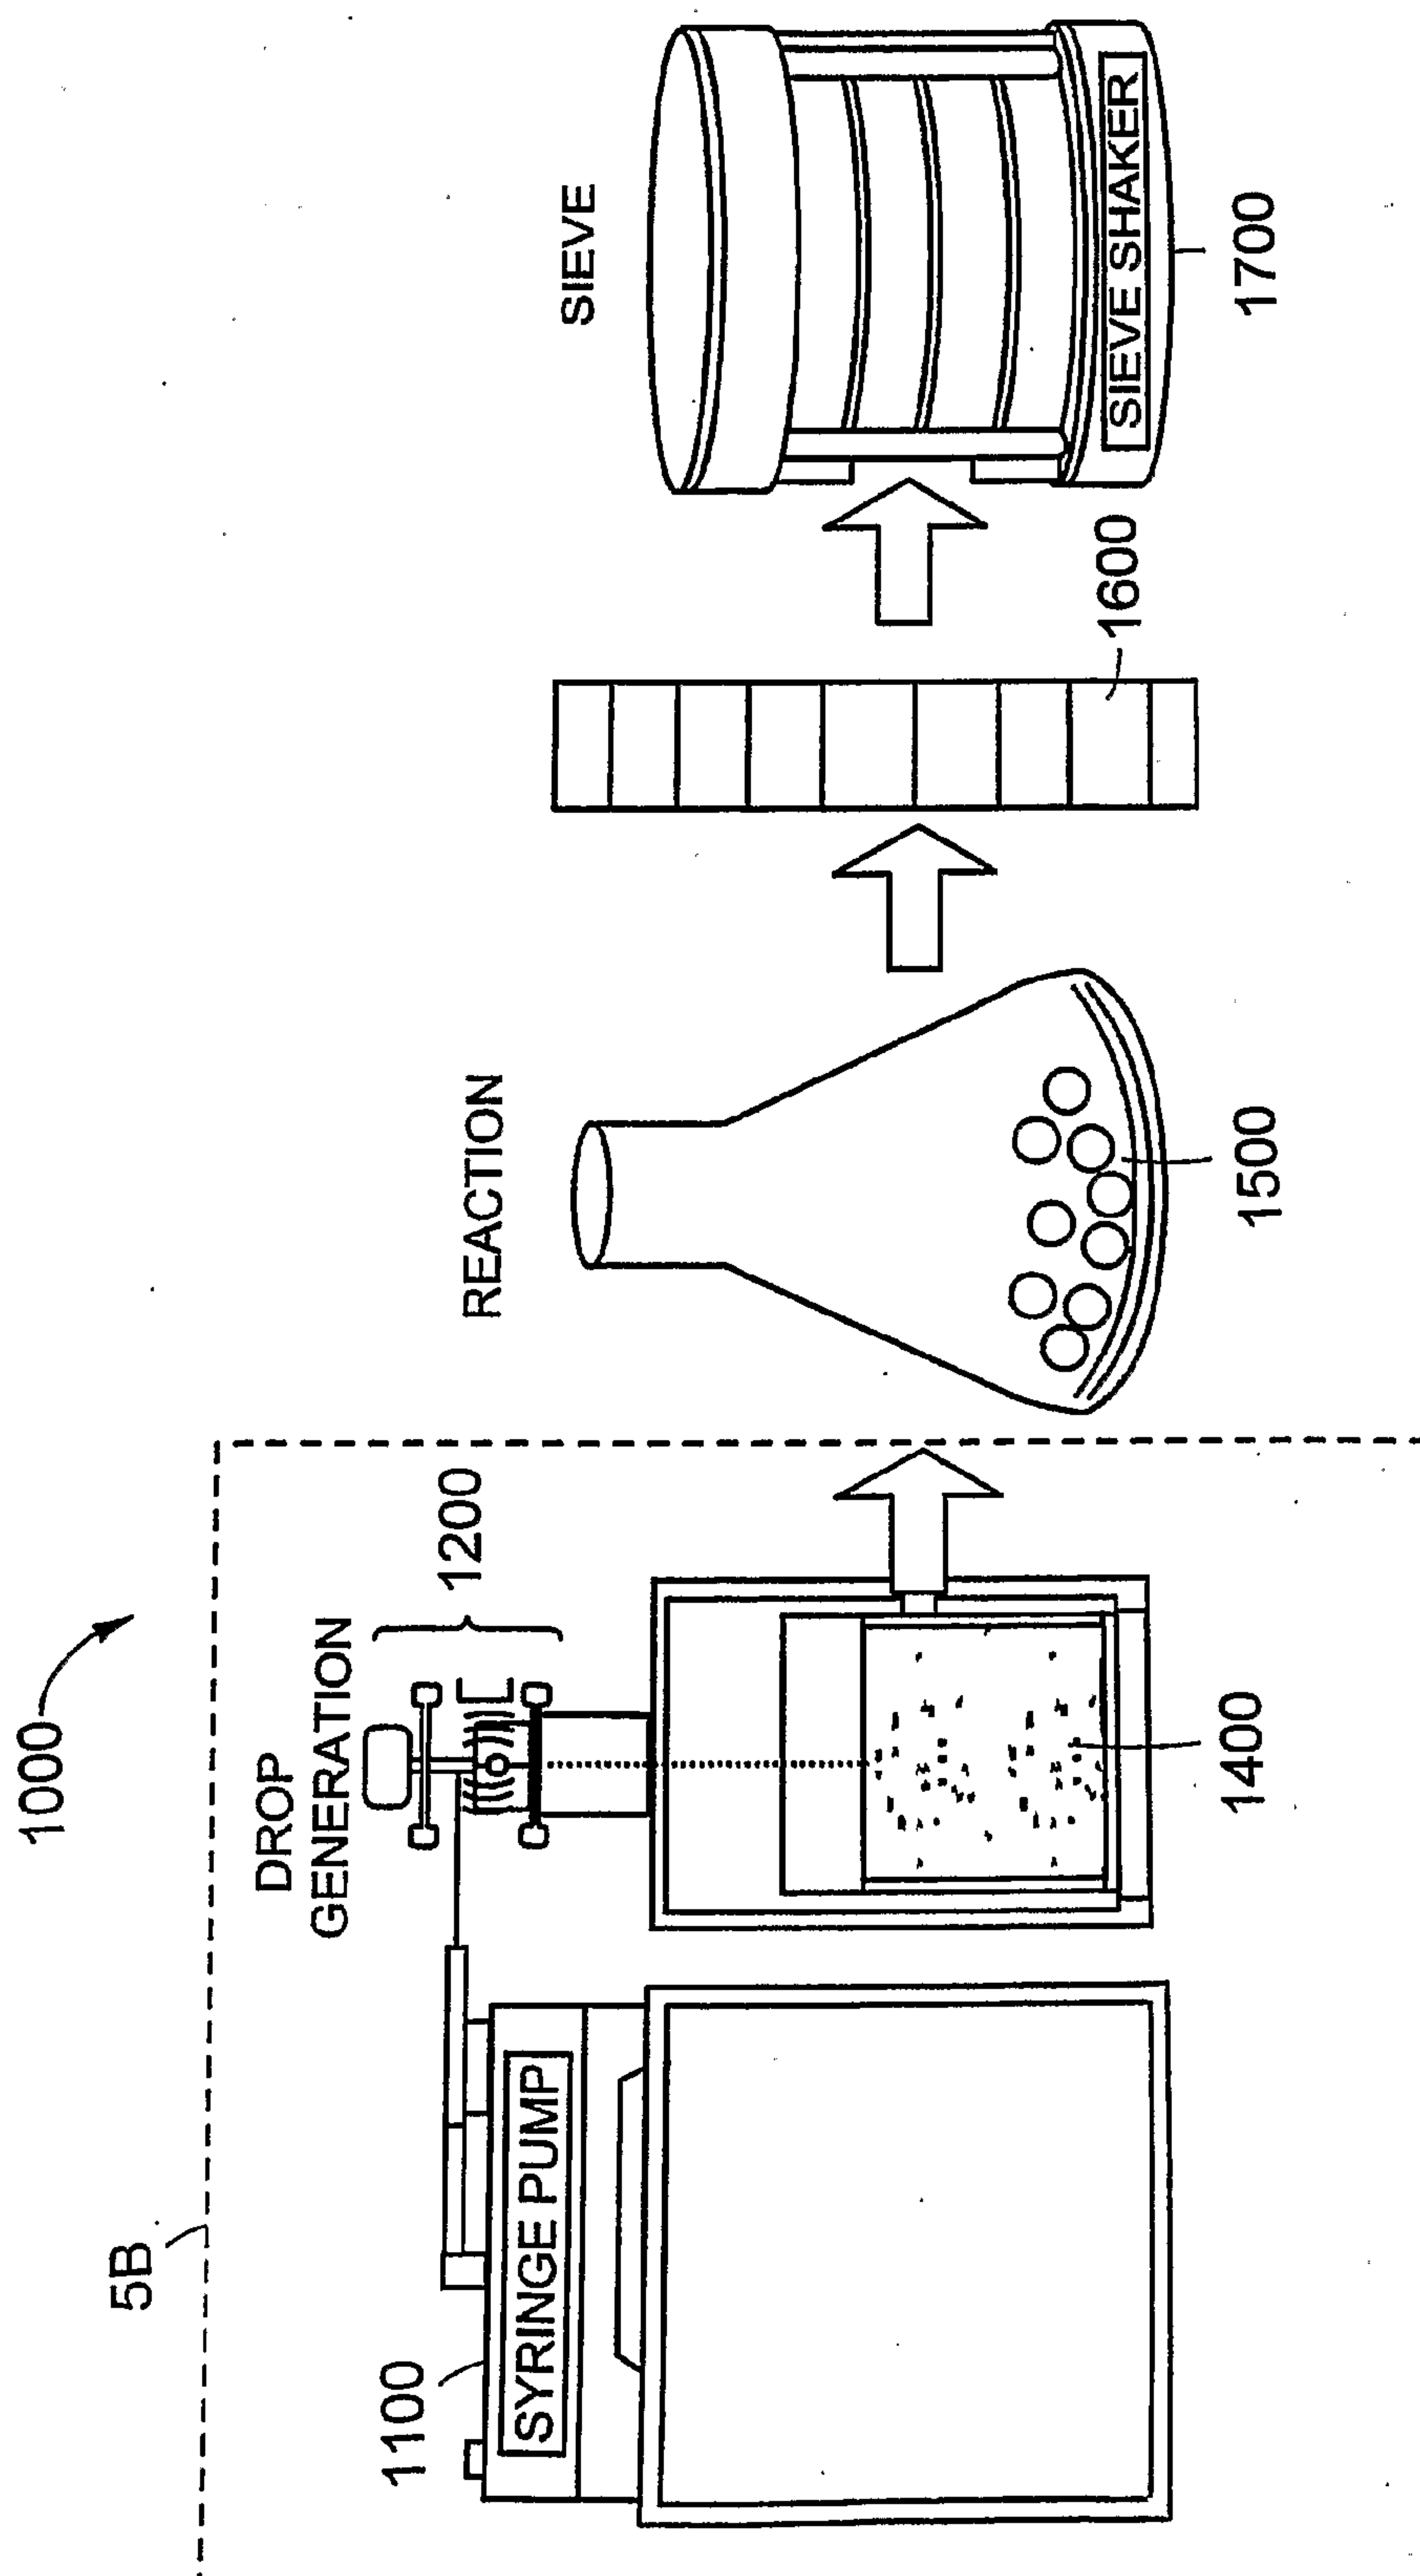


FIG. 5A

8/17

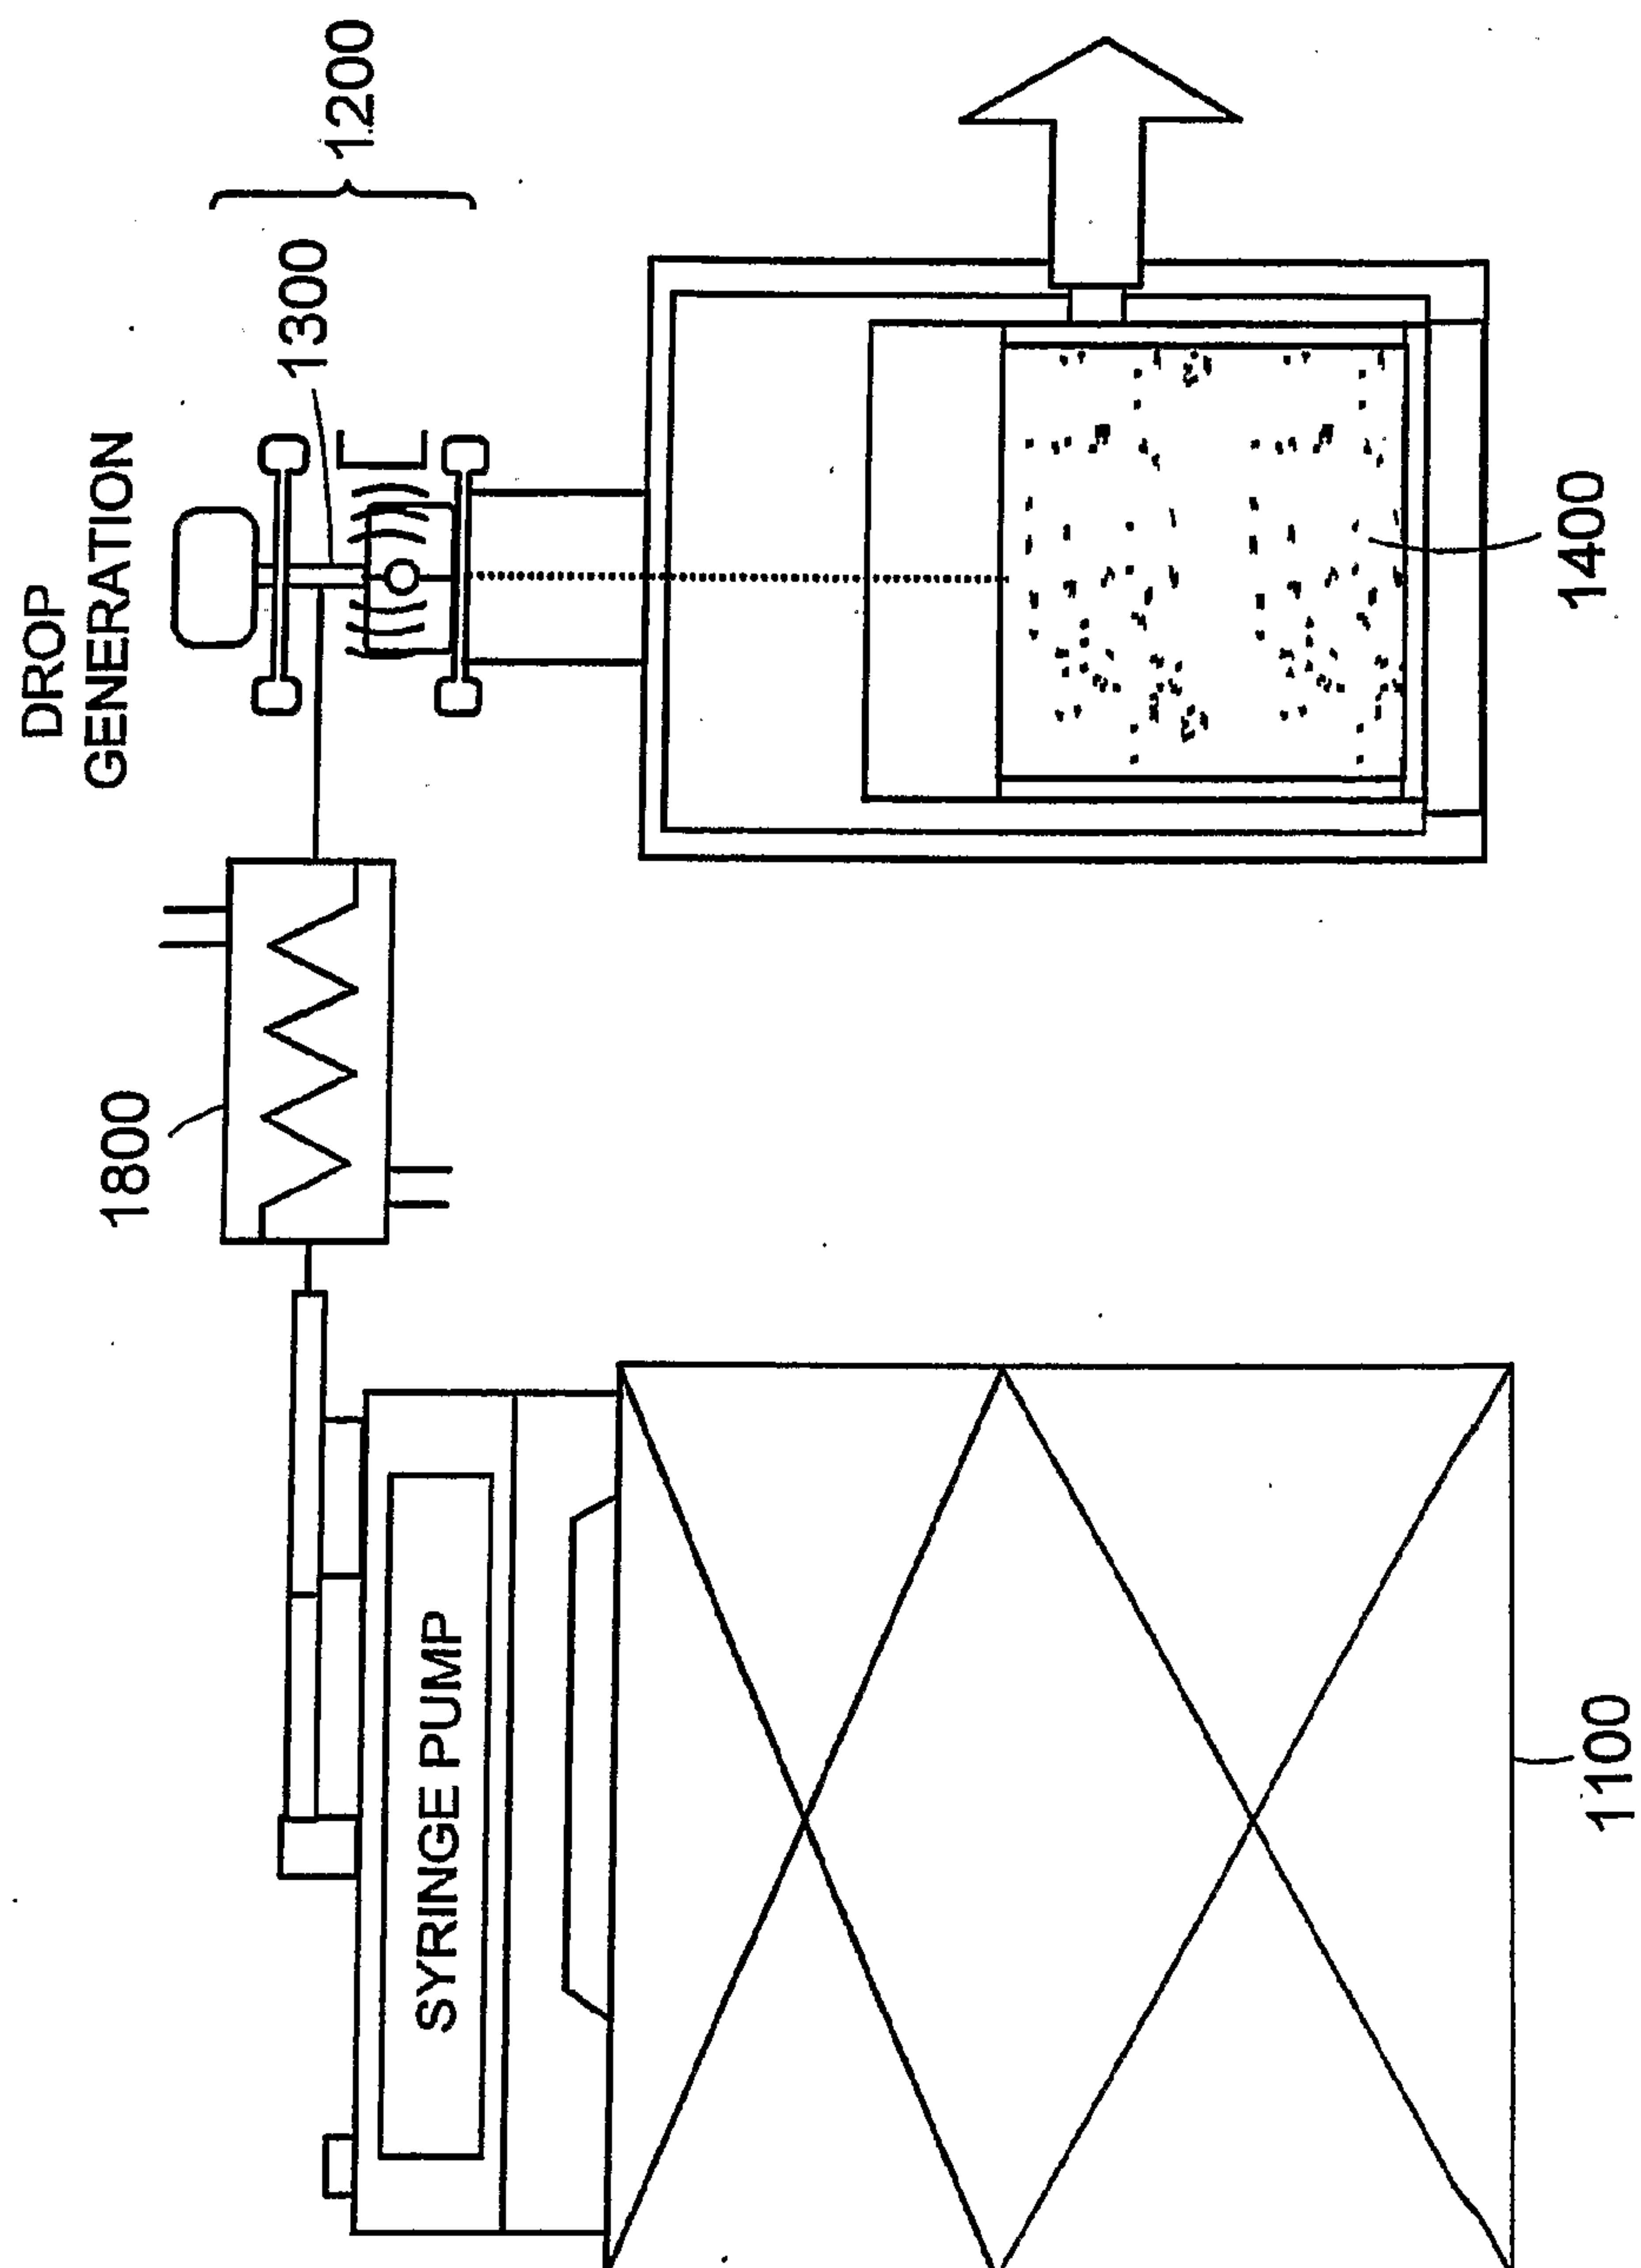


FIG. 5B

9/17

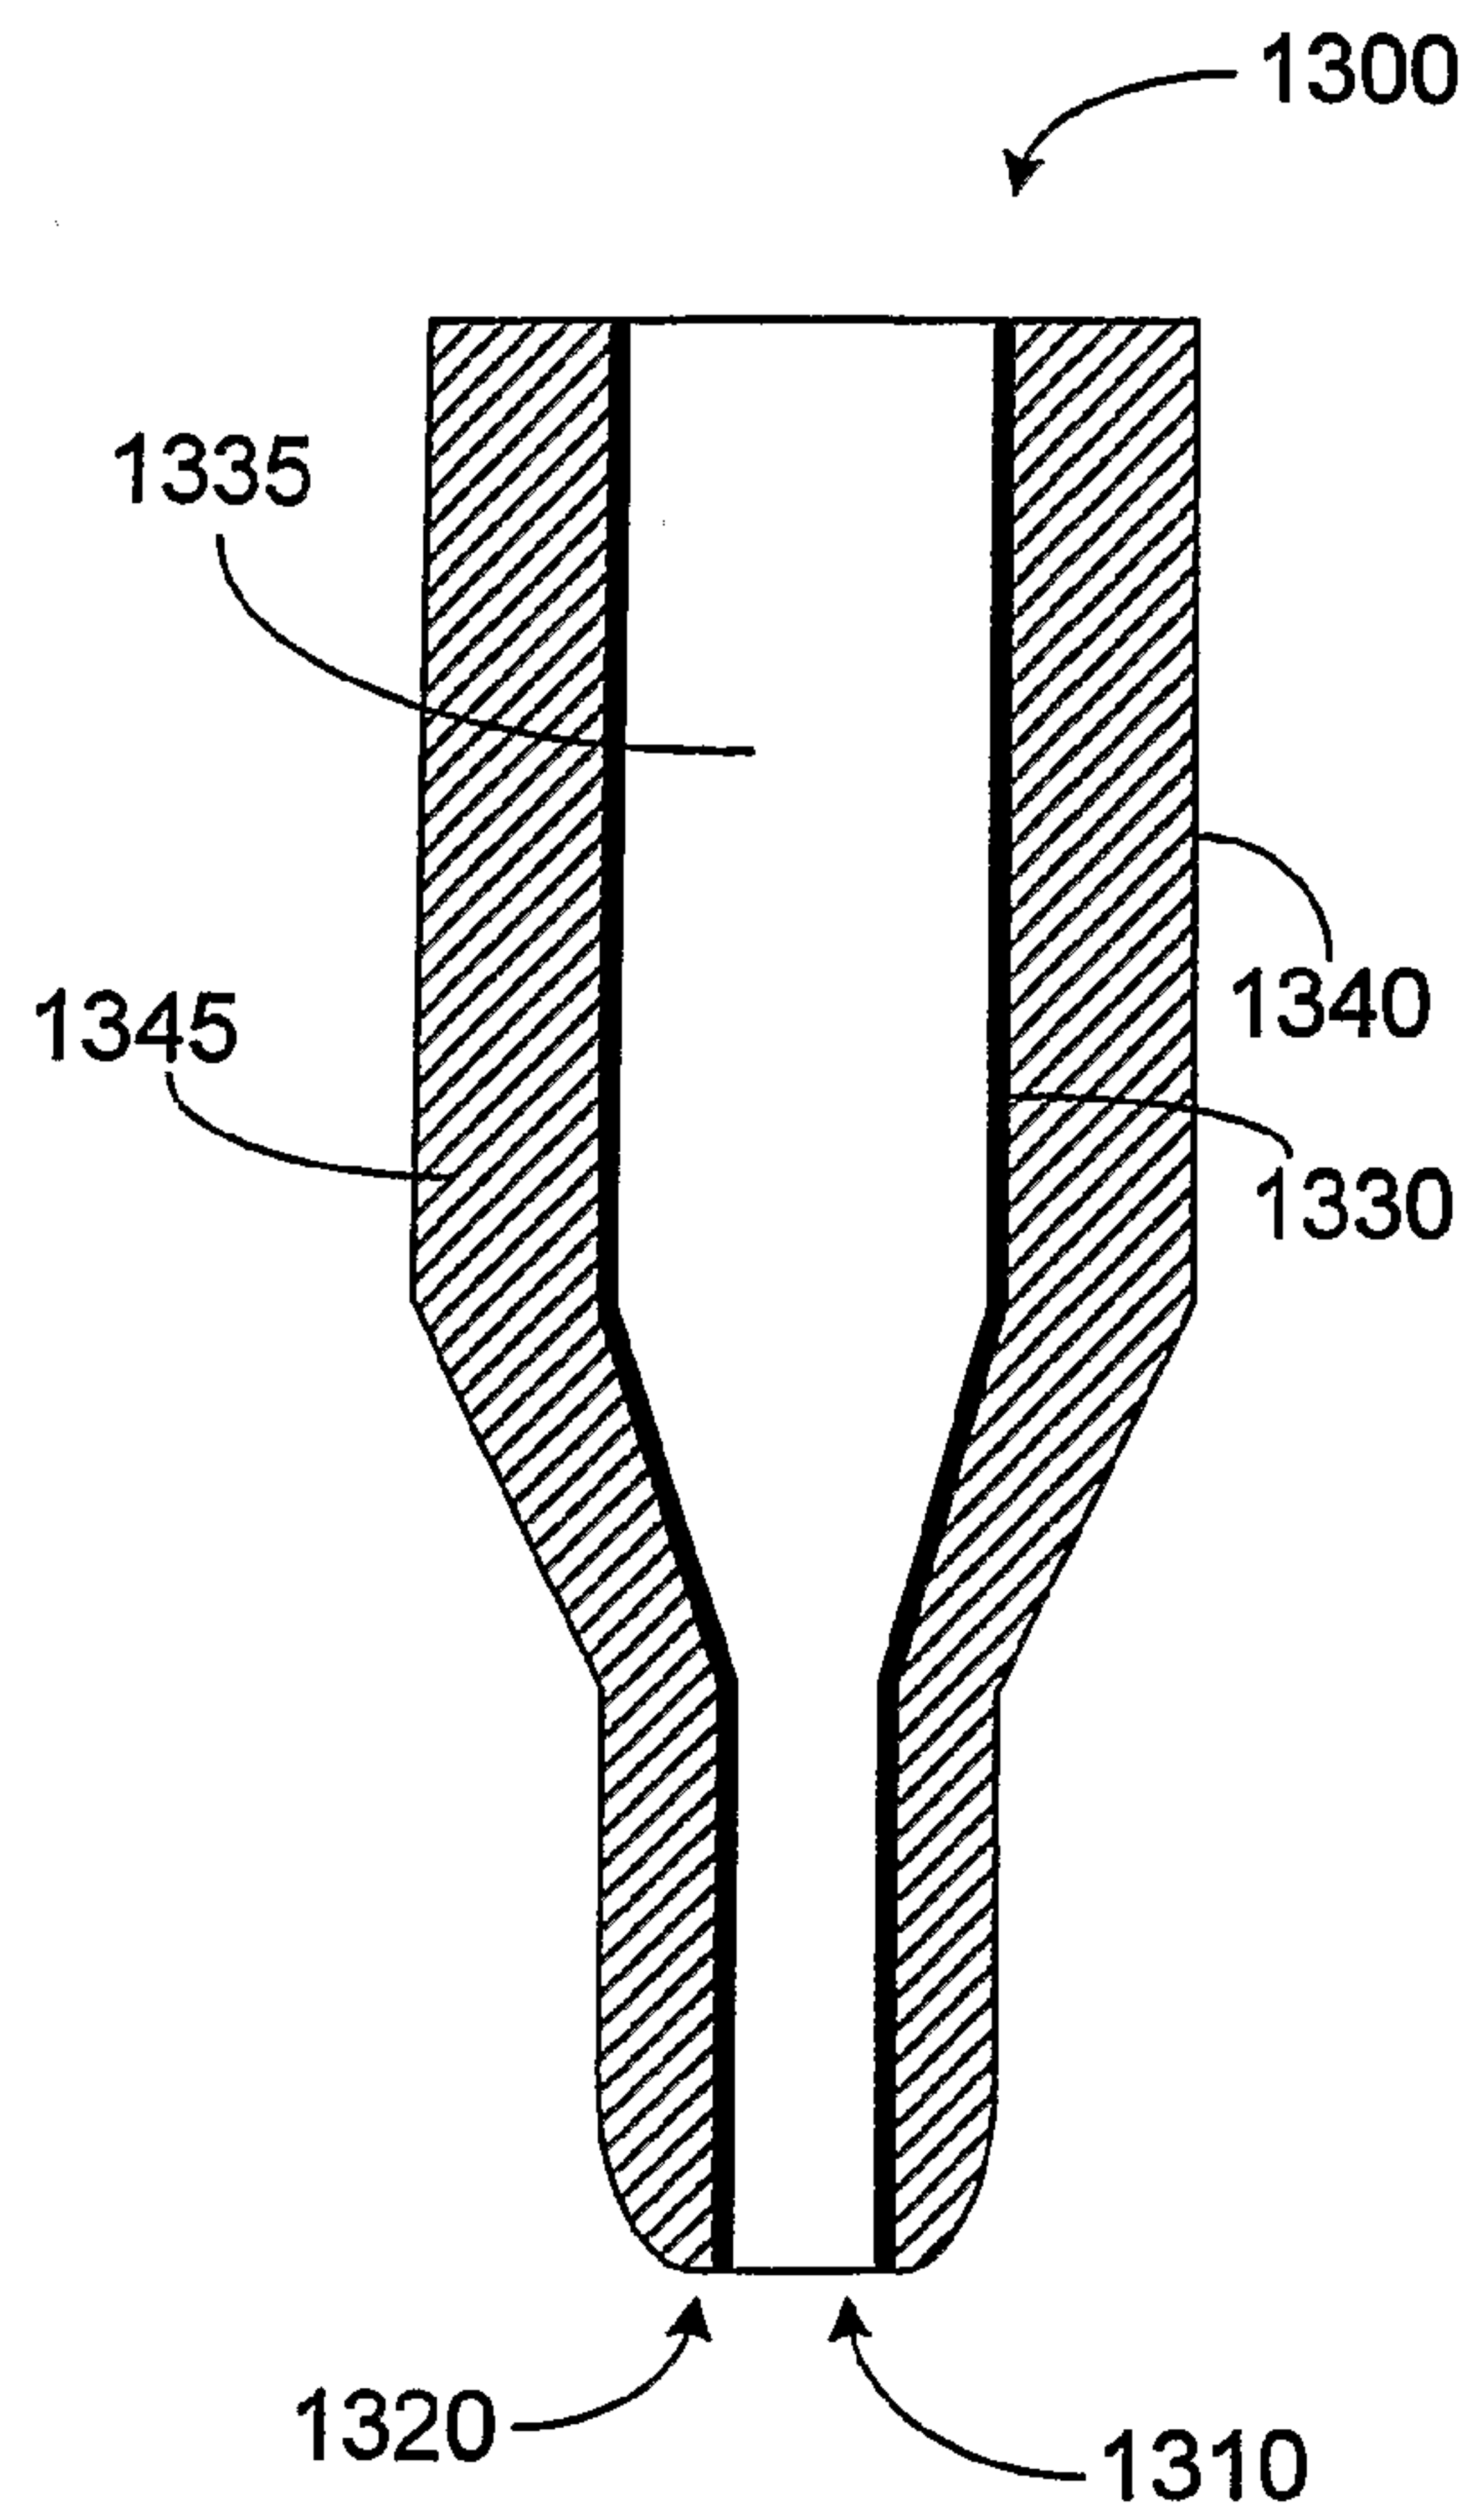


FIG. 6A

10/17

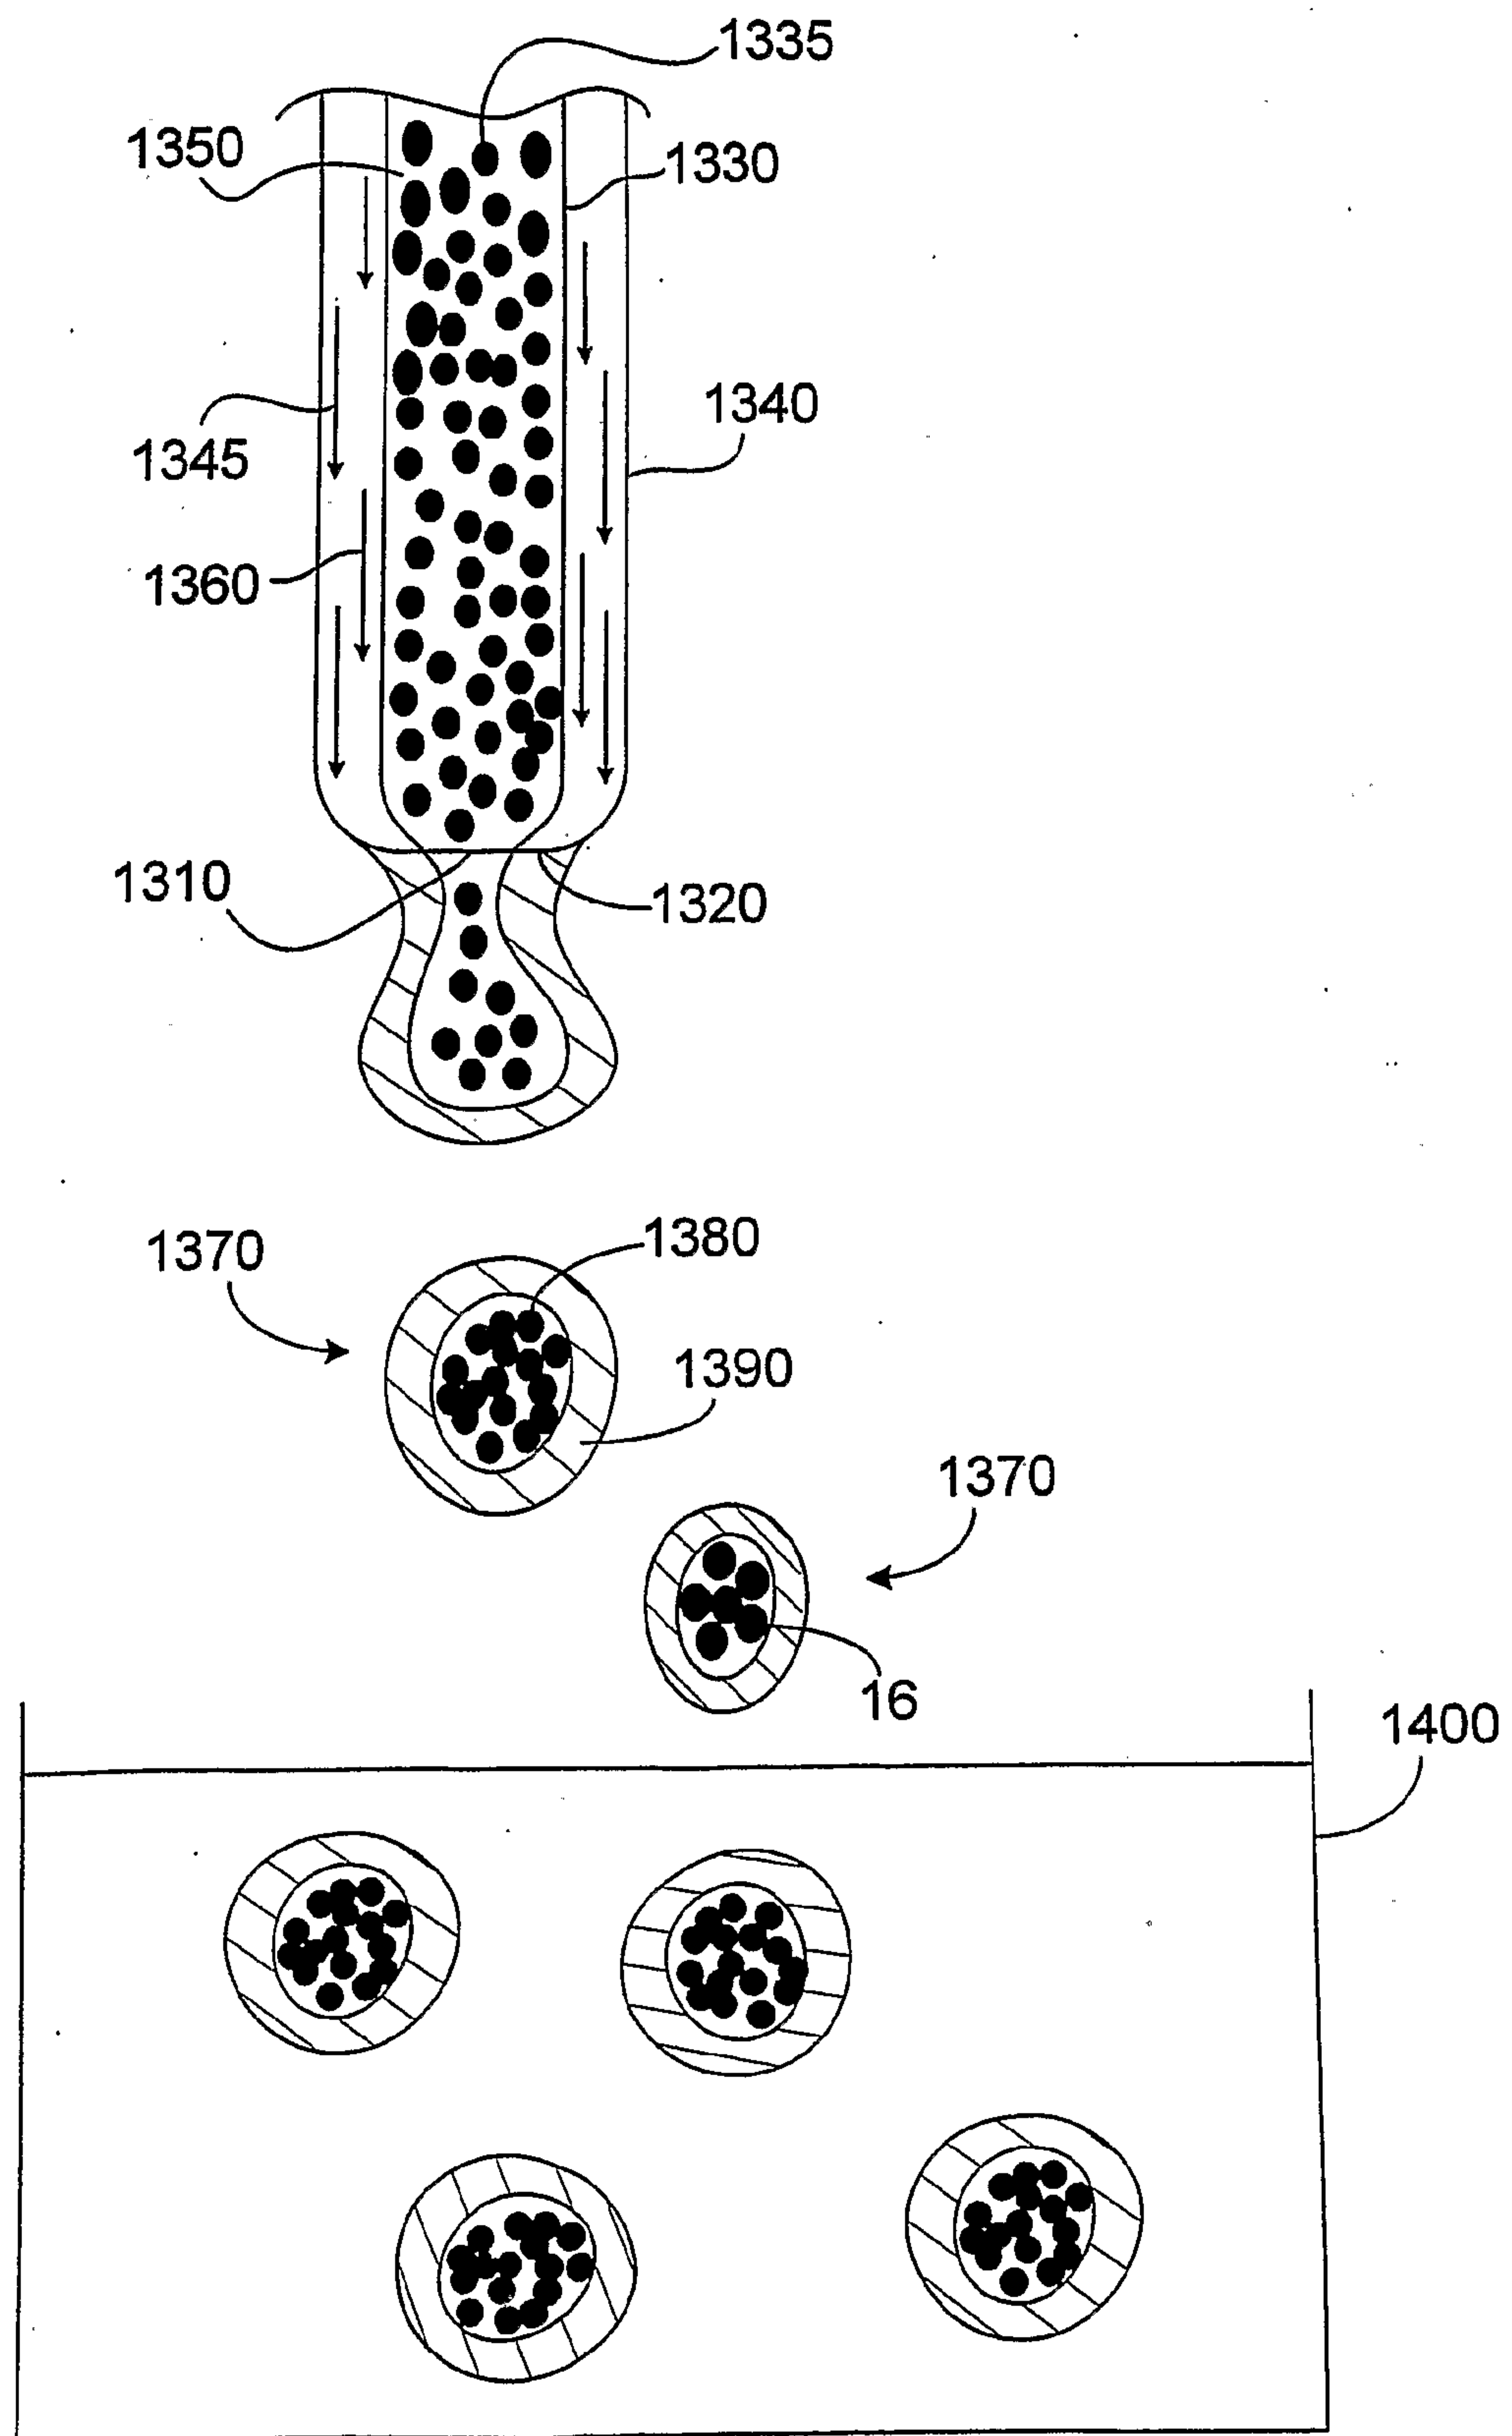


FIG. 6B

11/17

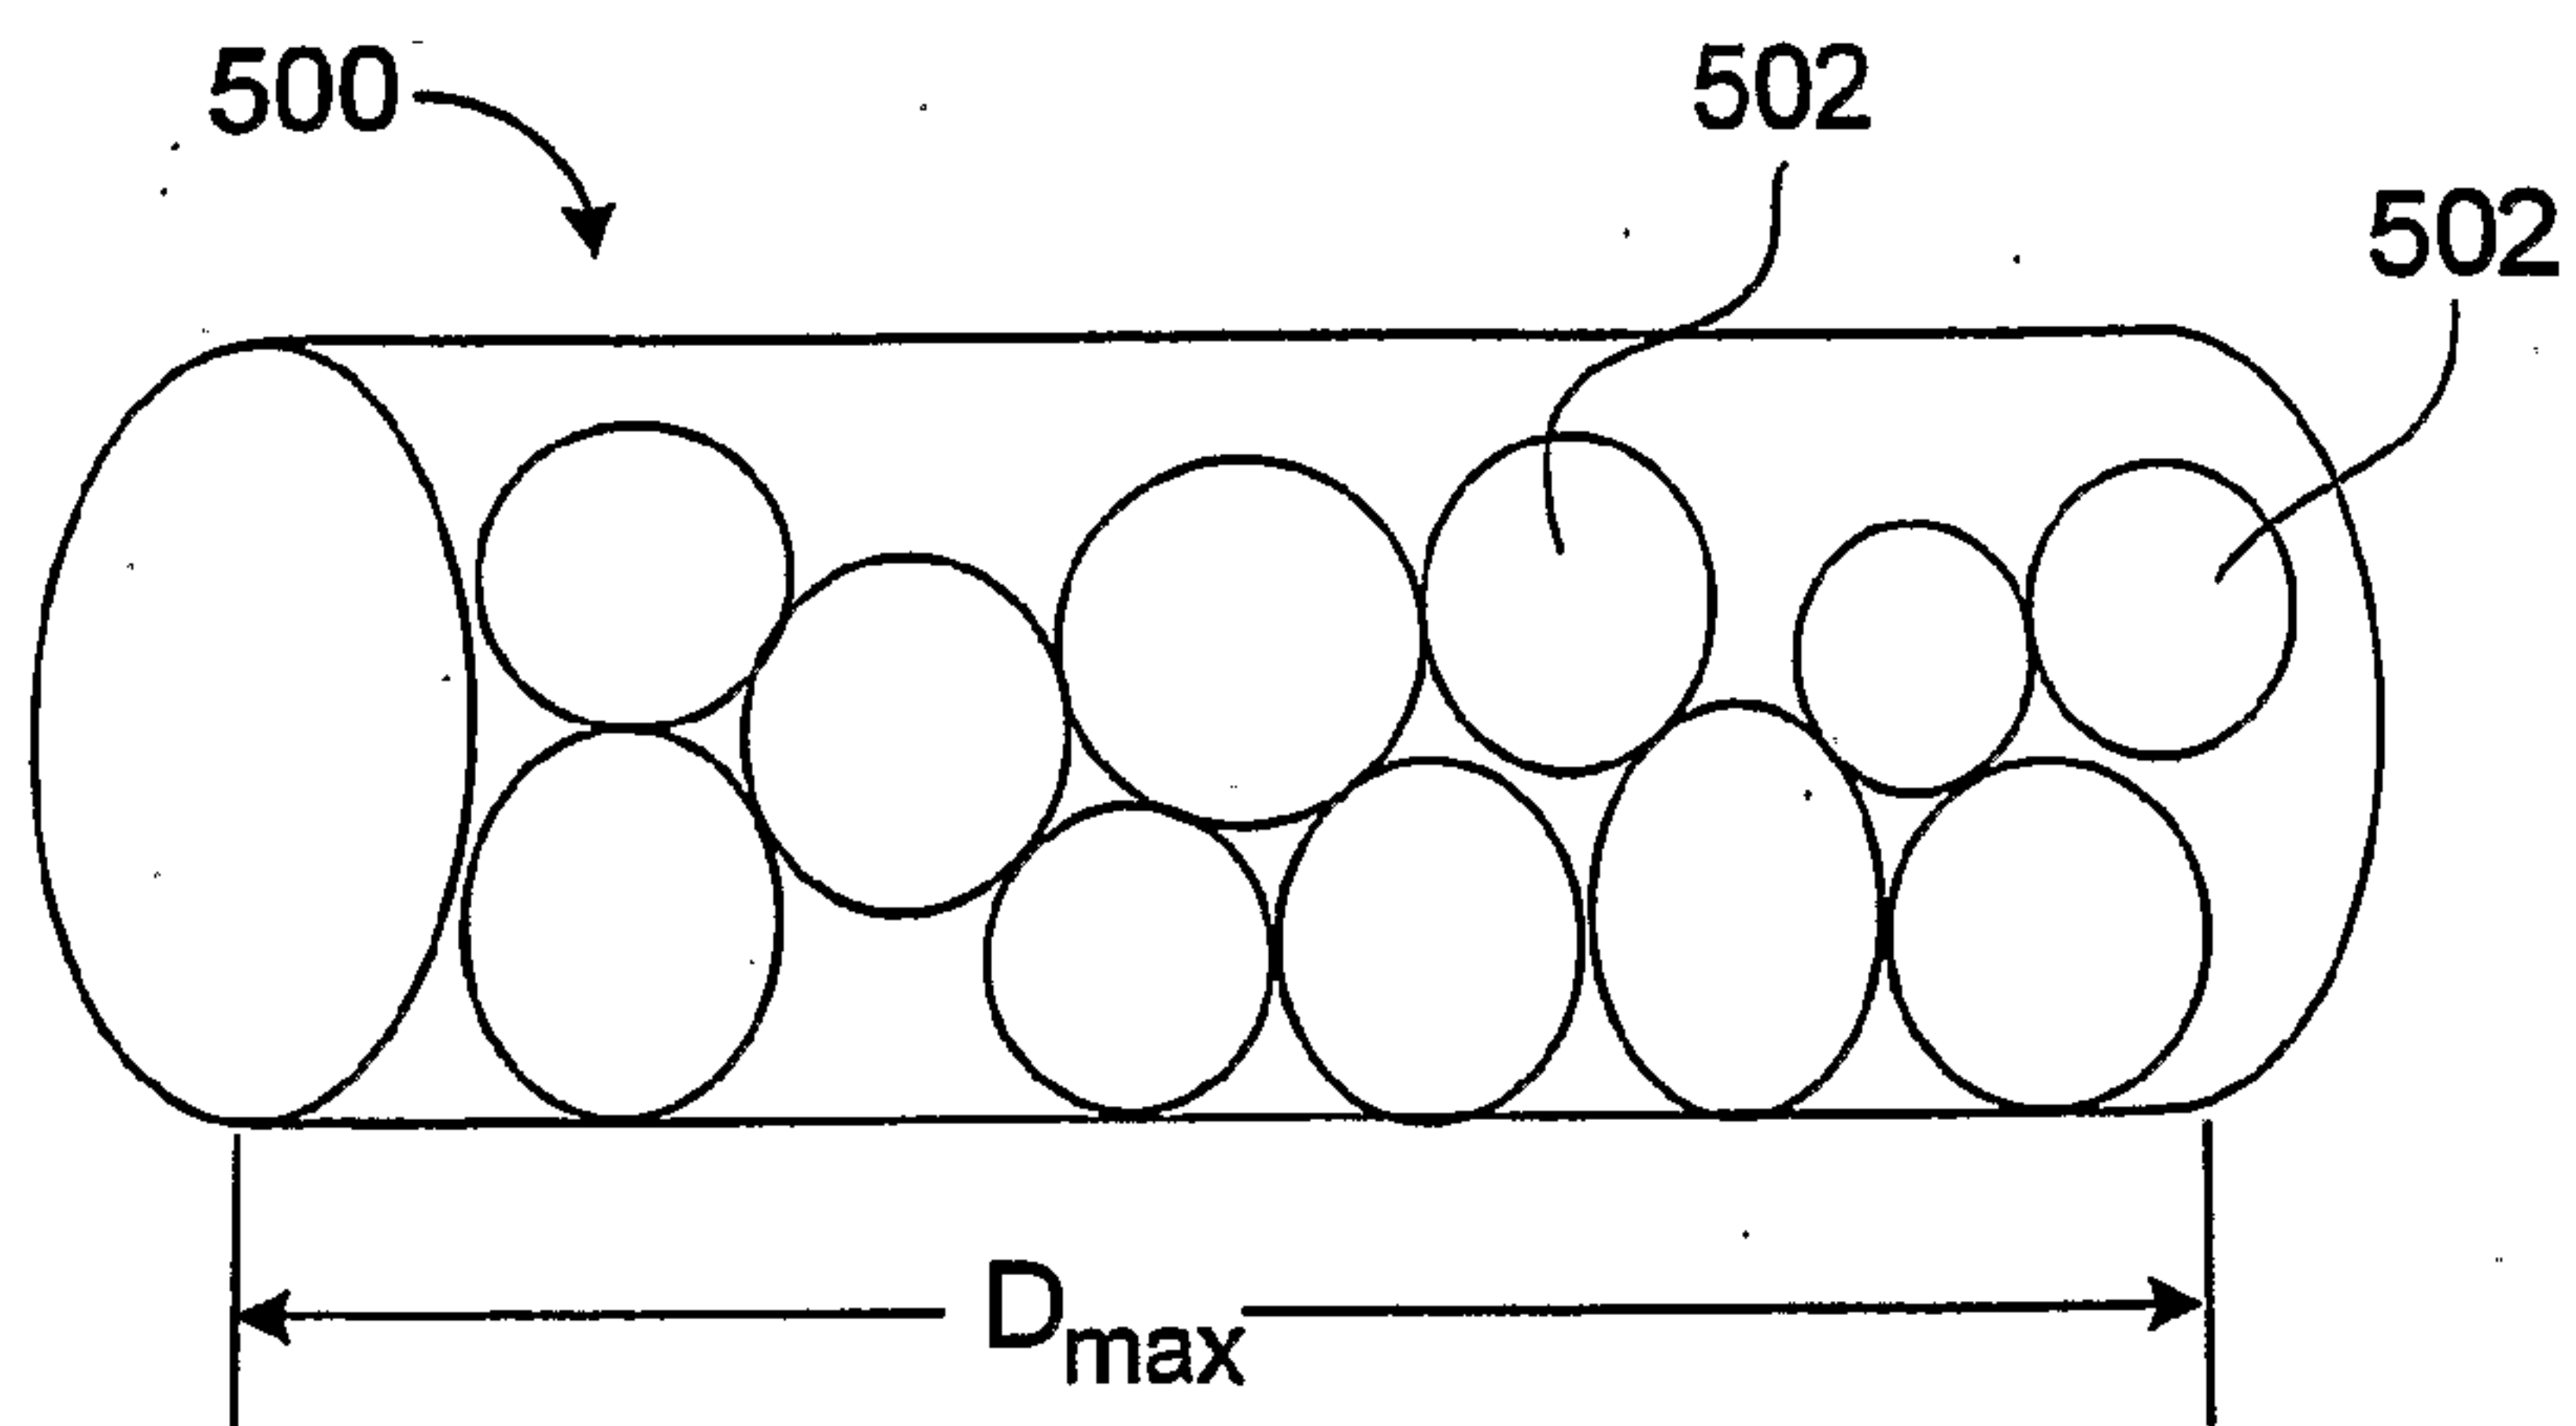


FIG. 7

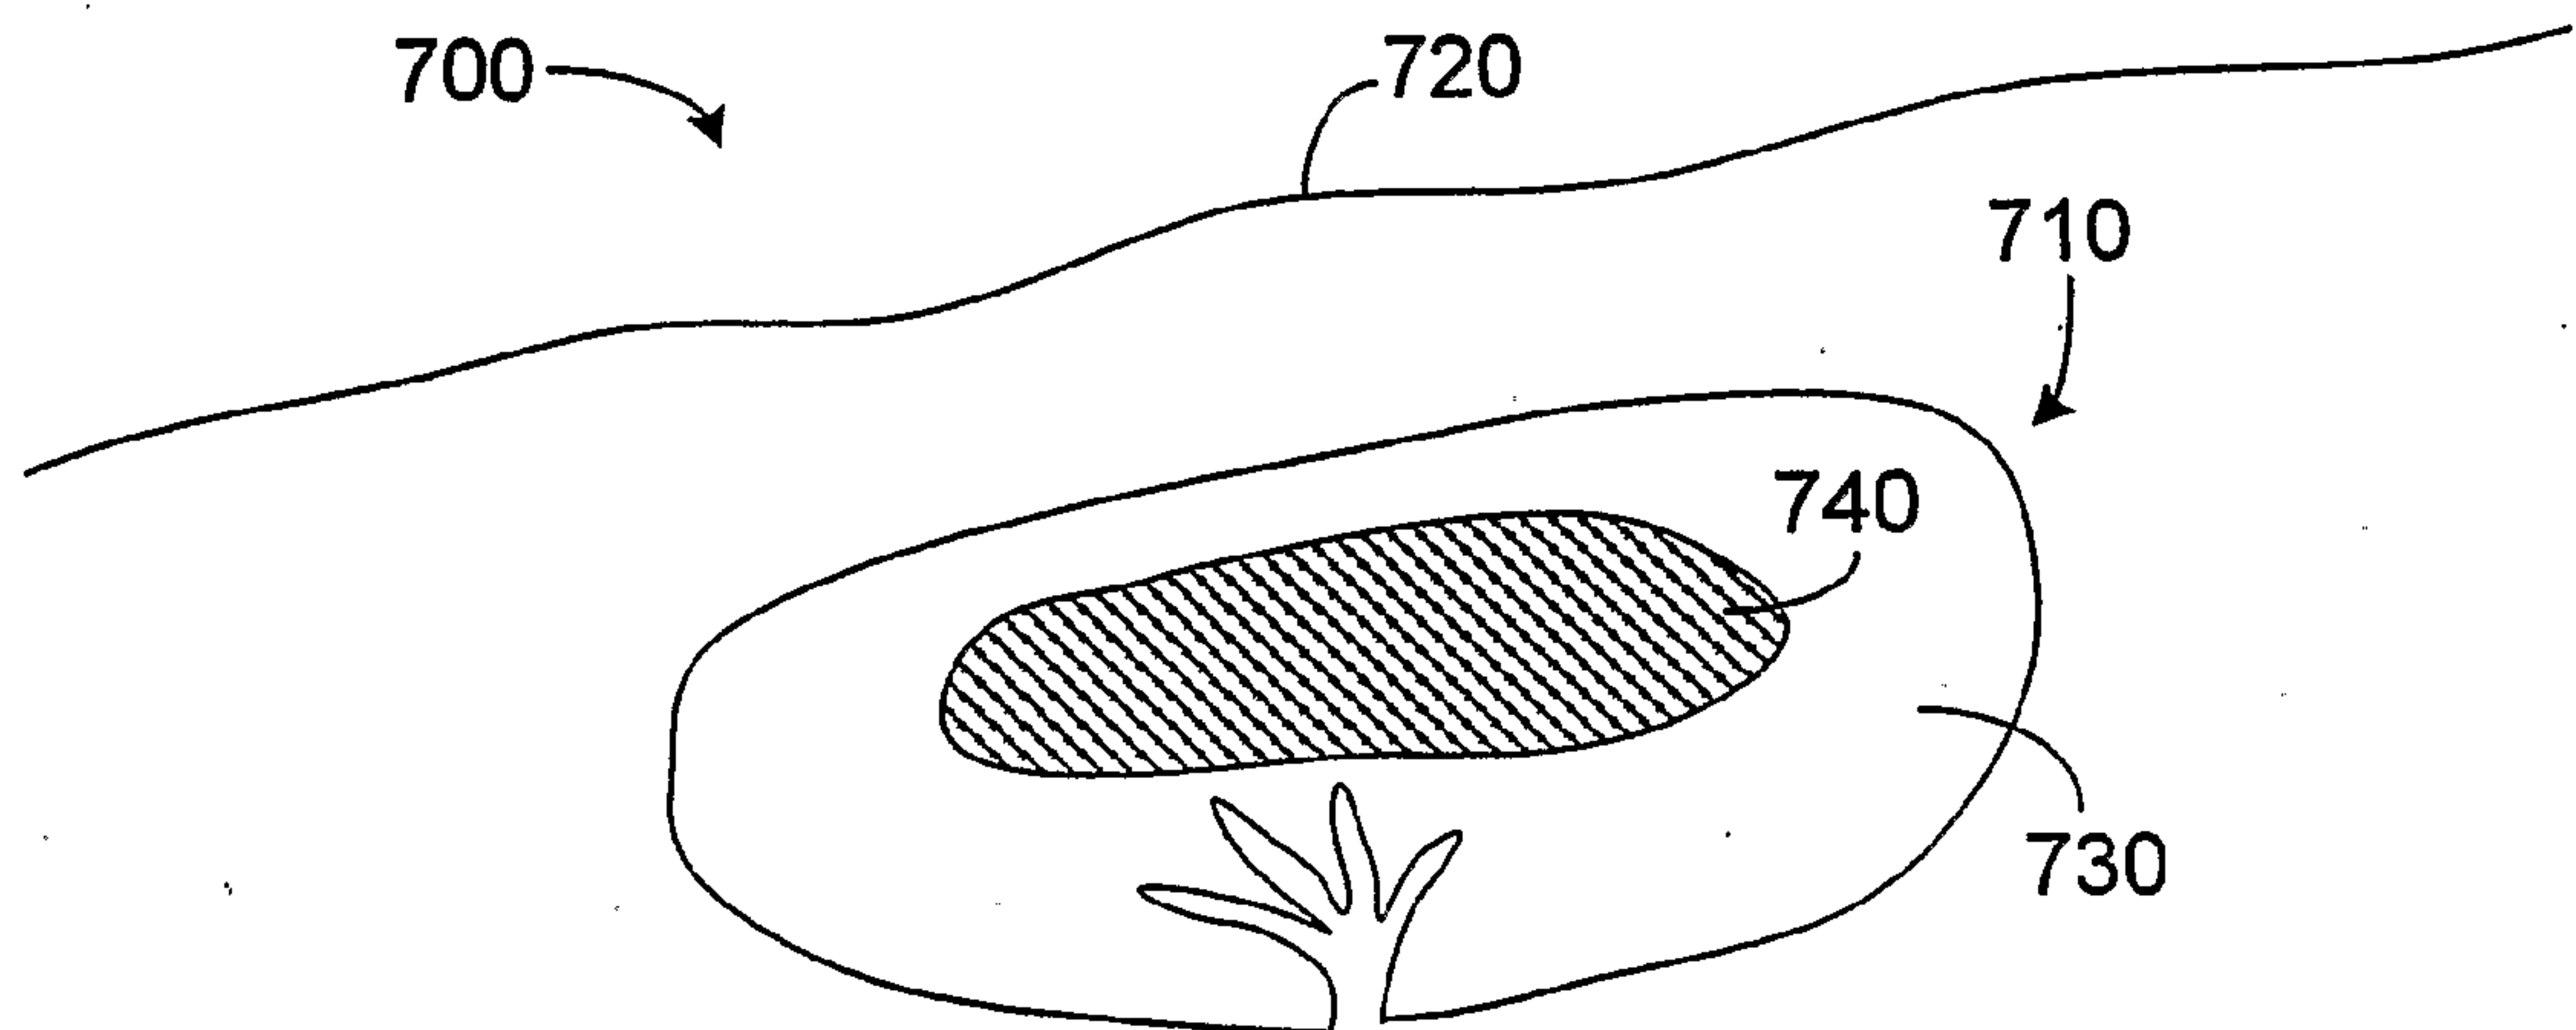


FIG. 8A

12/17

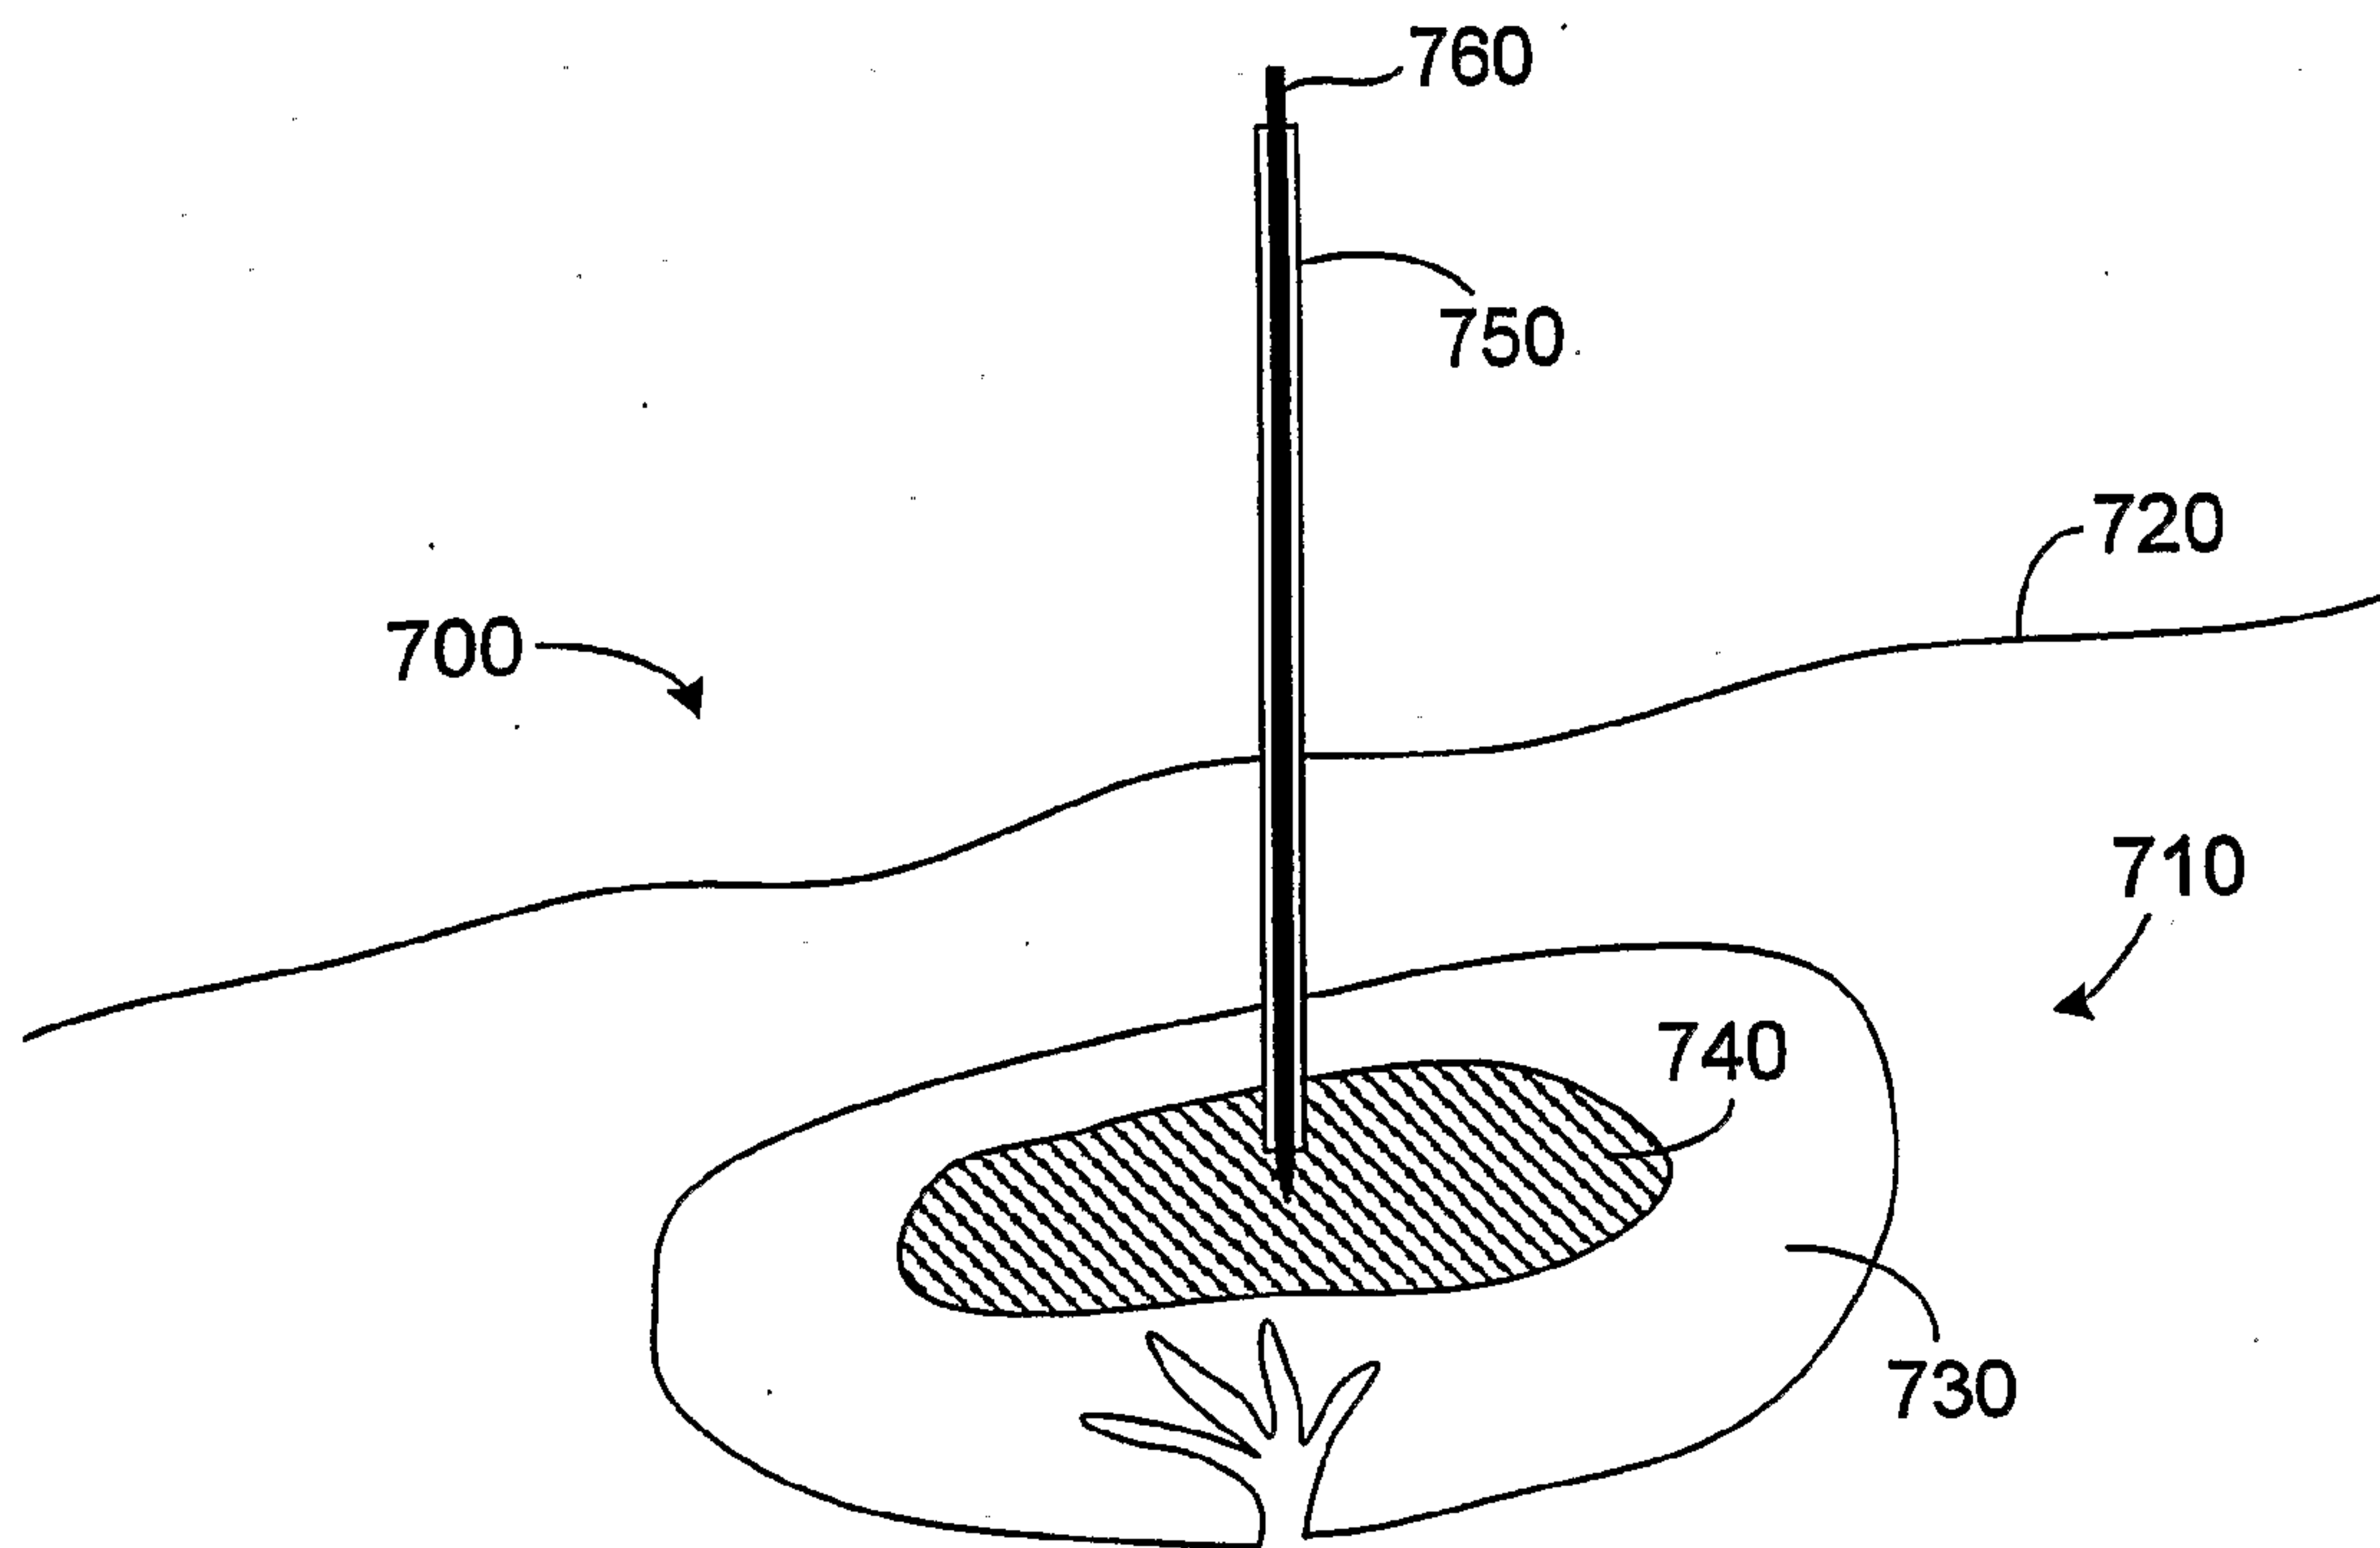


FIG. 8B

13/17

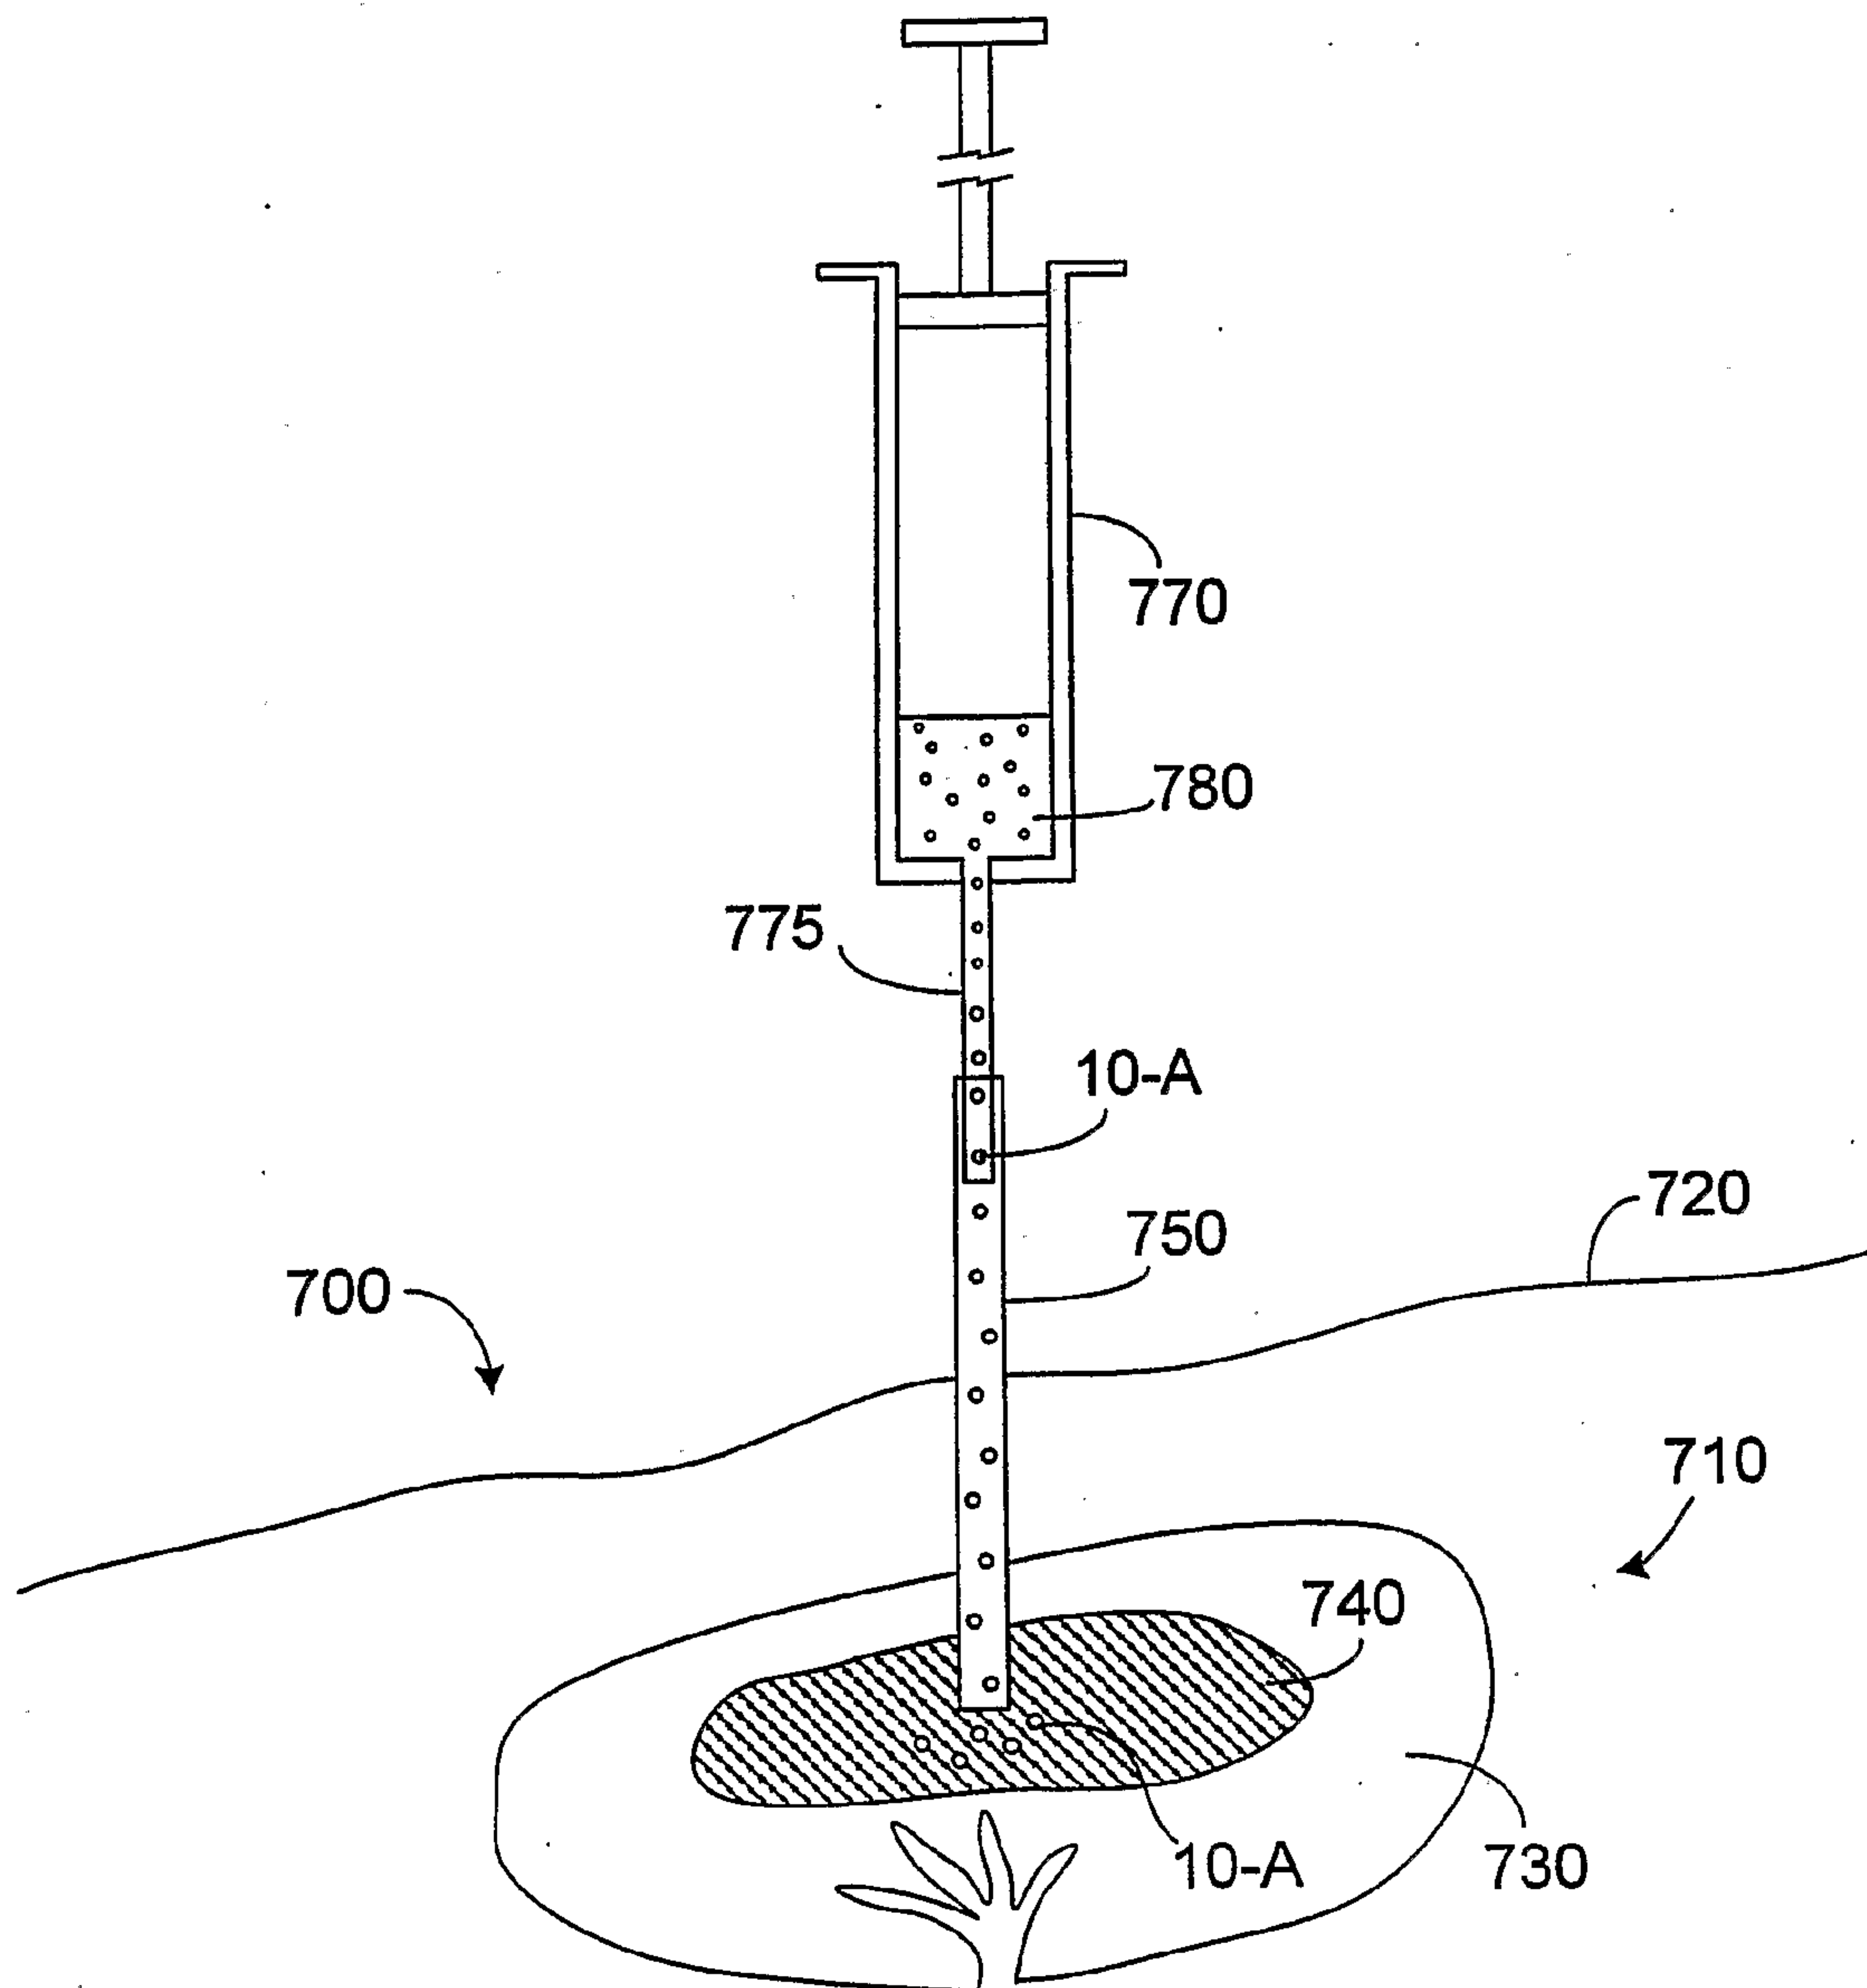


FIG. 8C

14/17

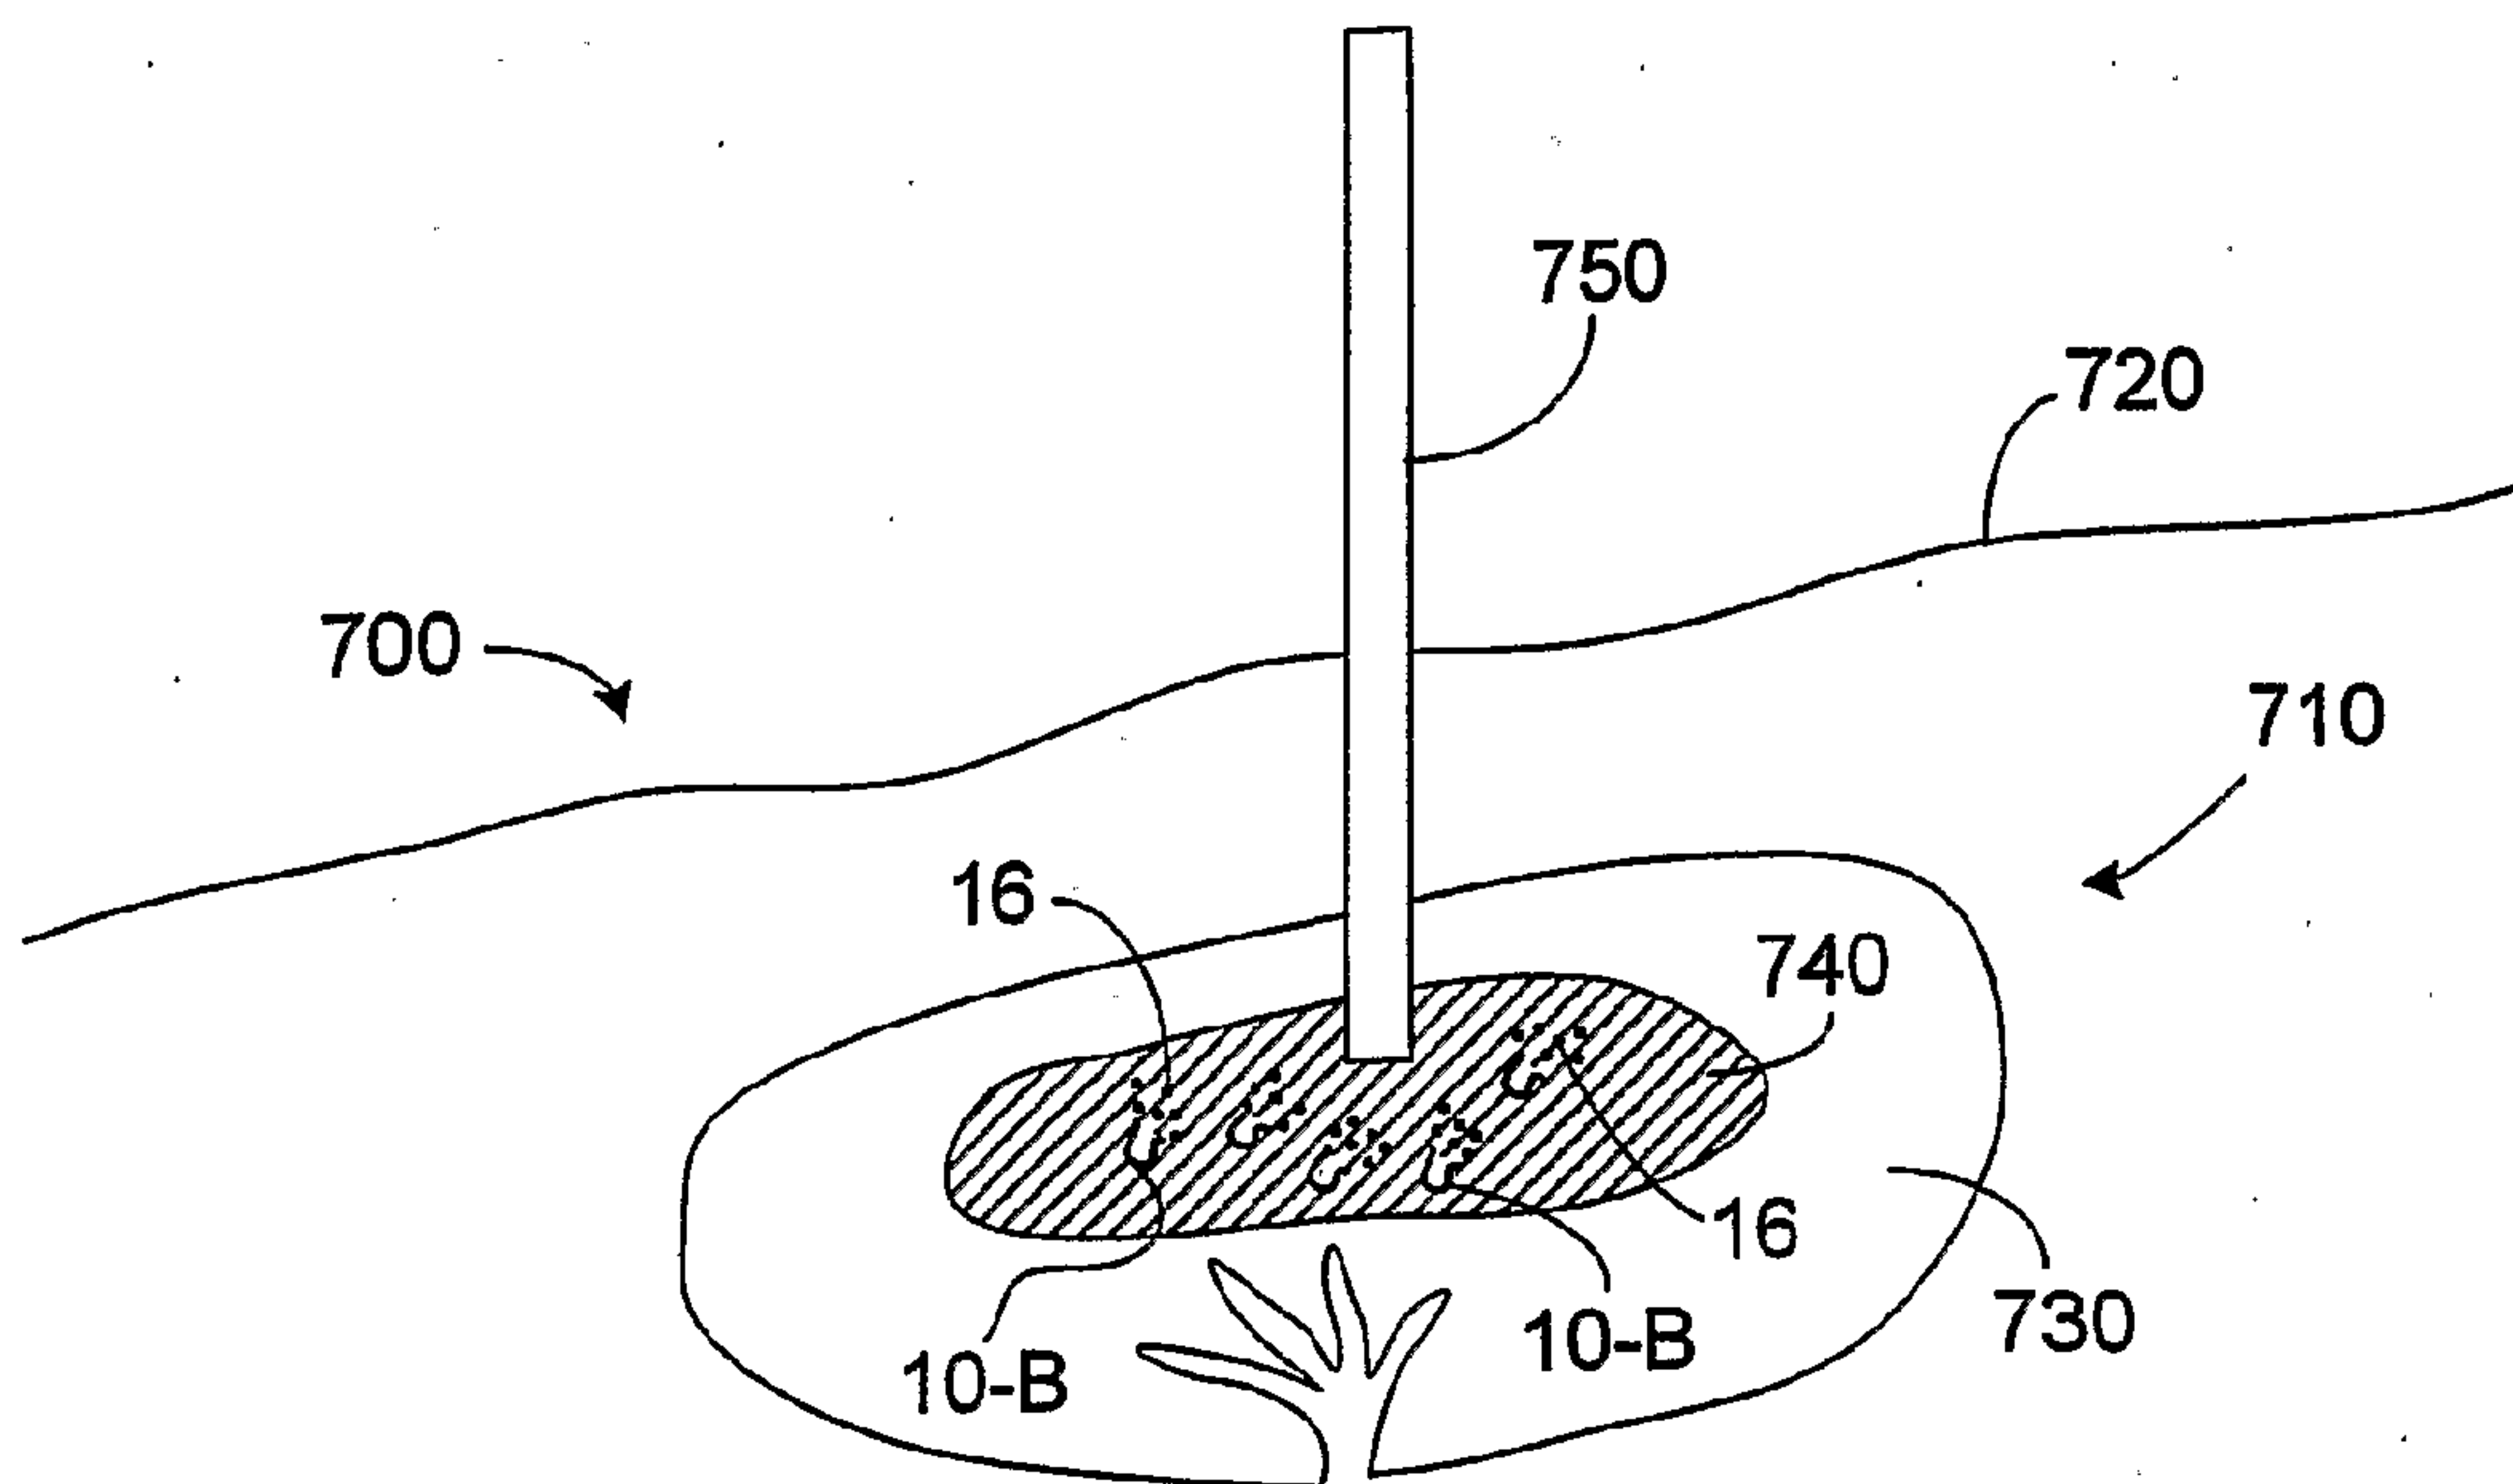


FIG. 8D

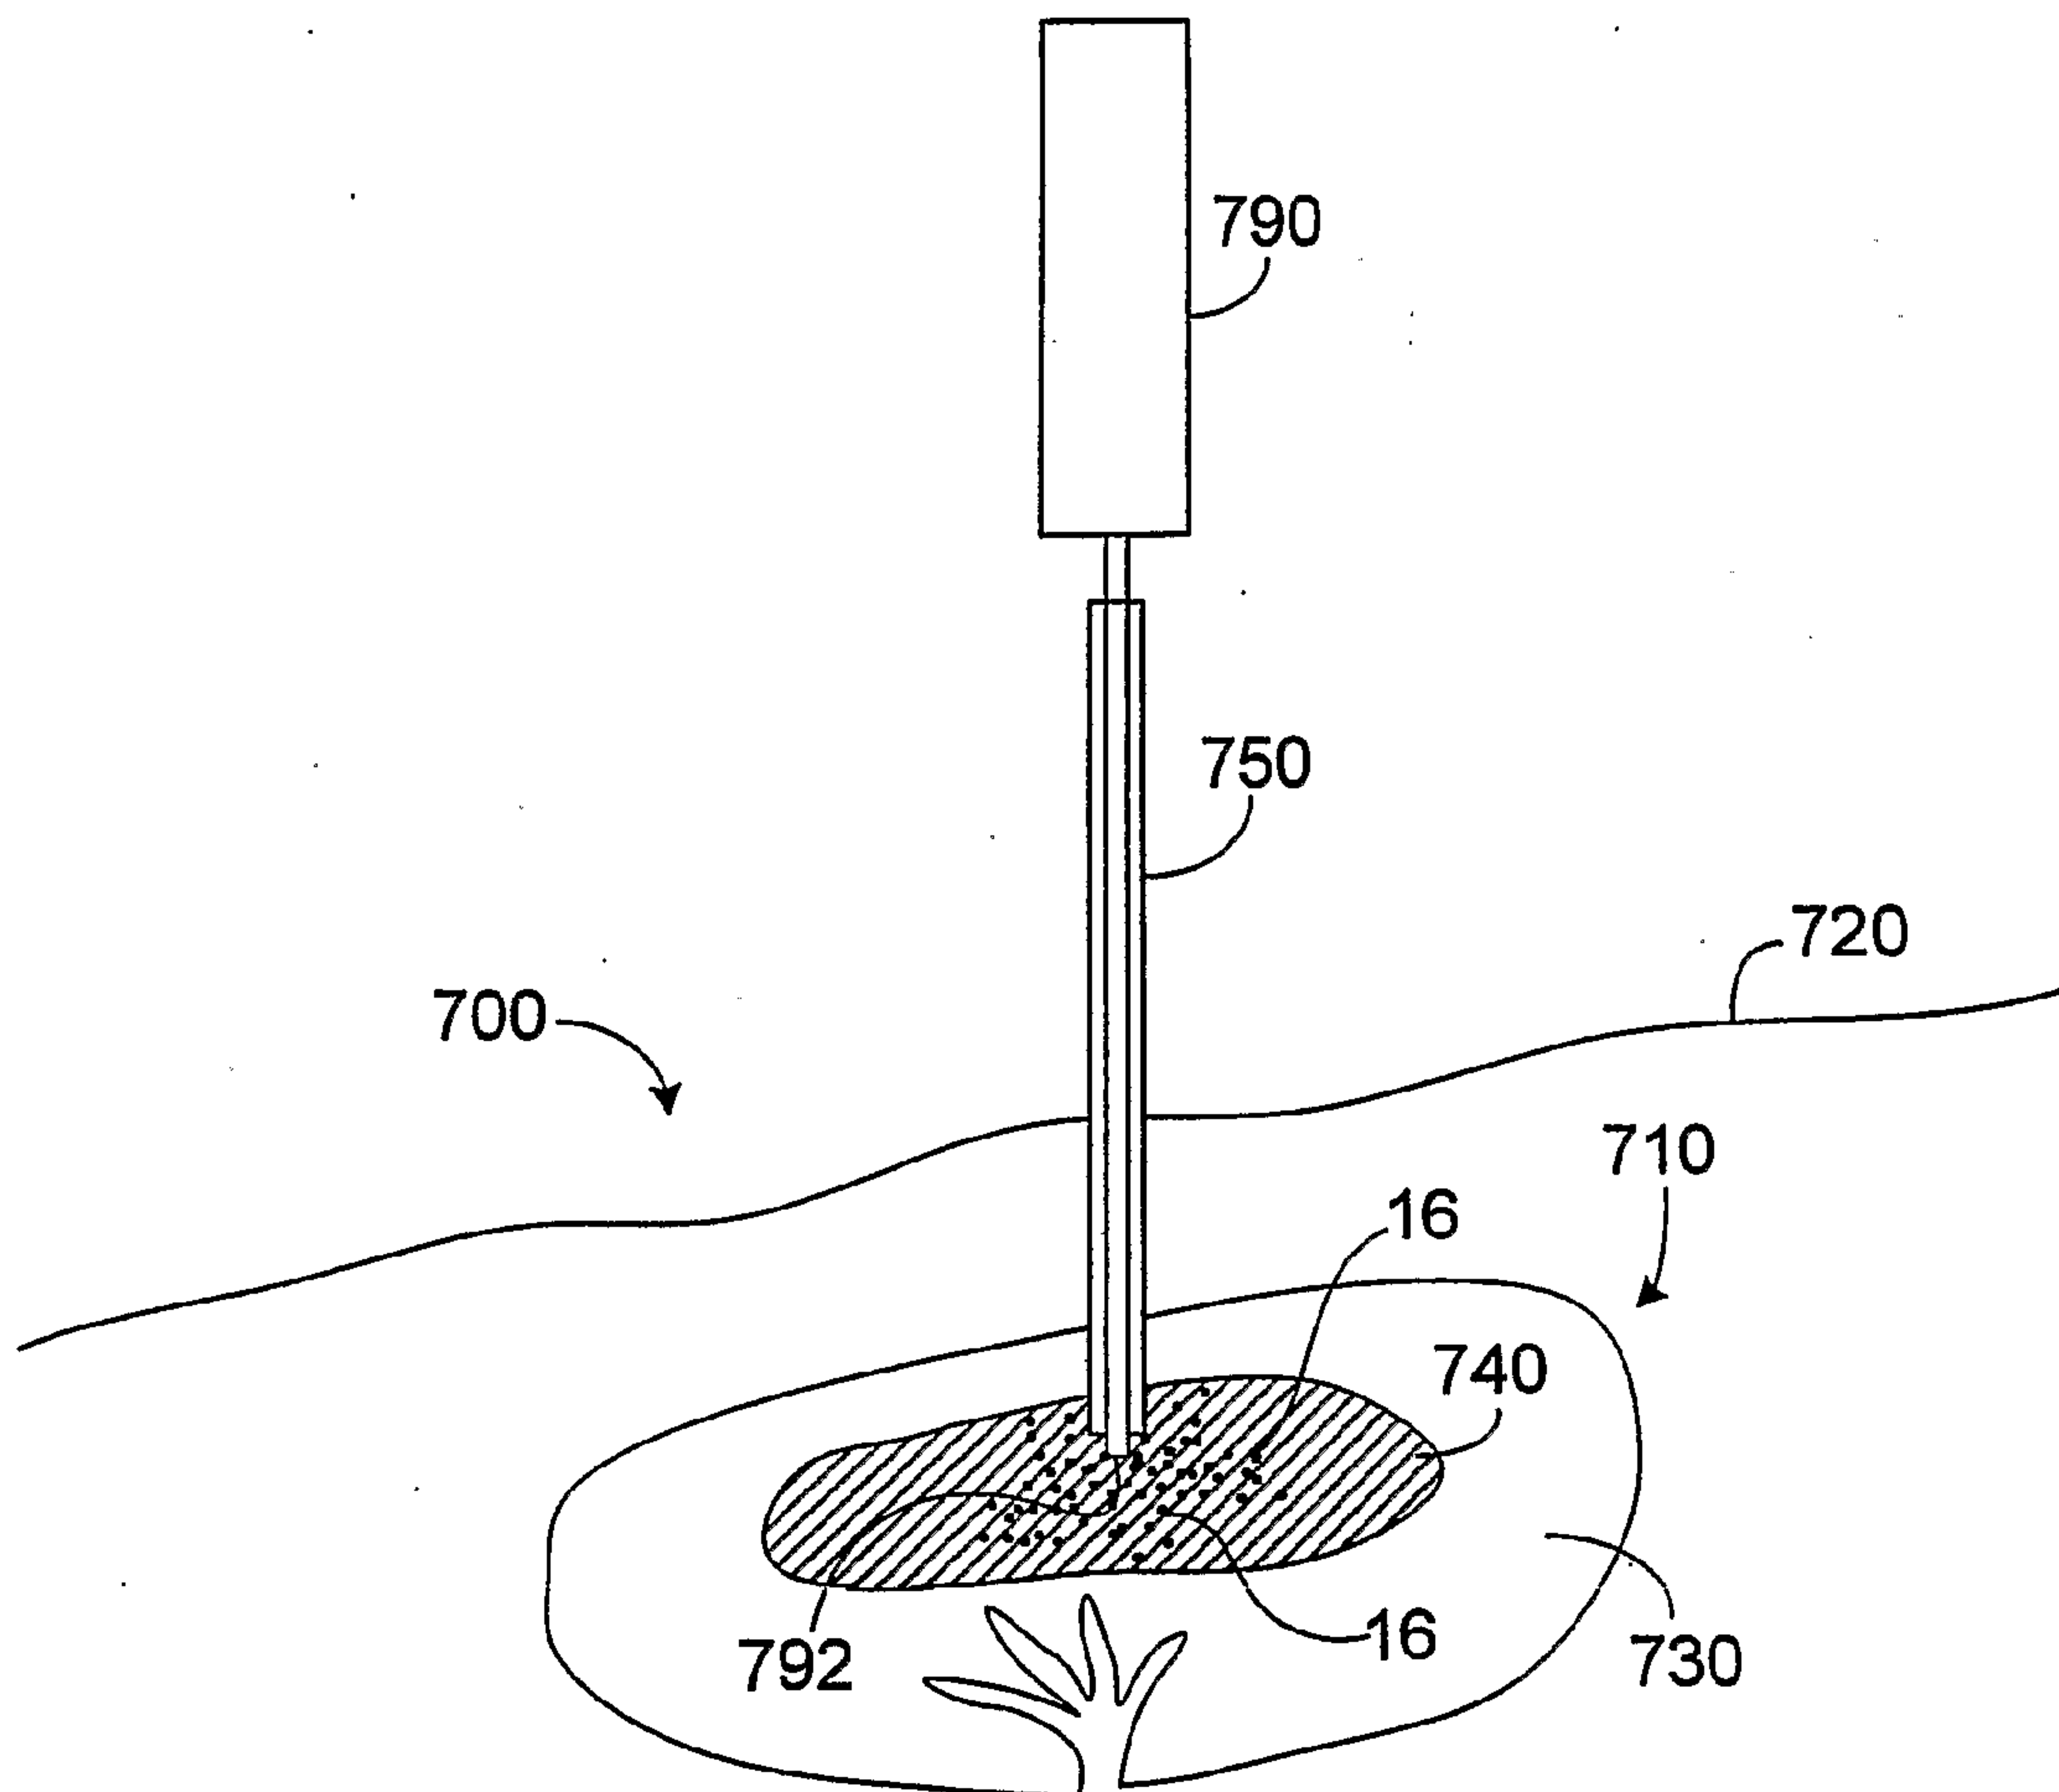


FIG. 8E

16/17

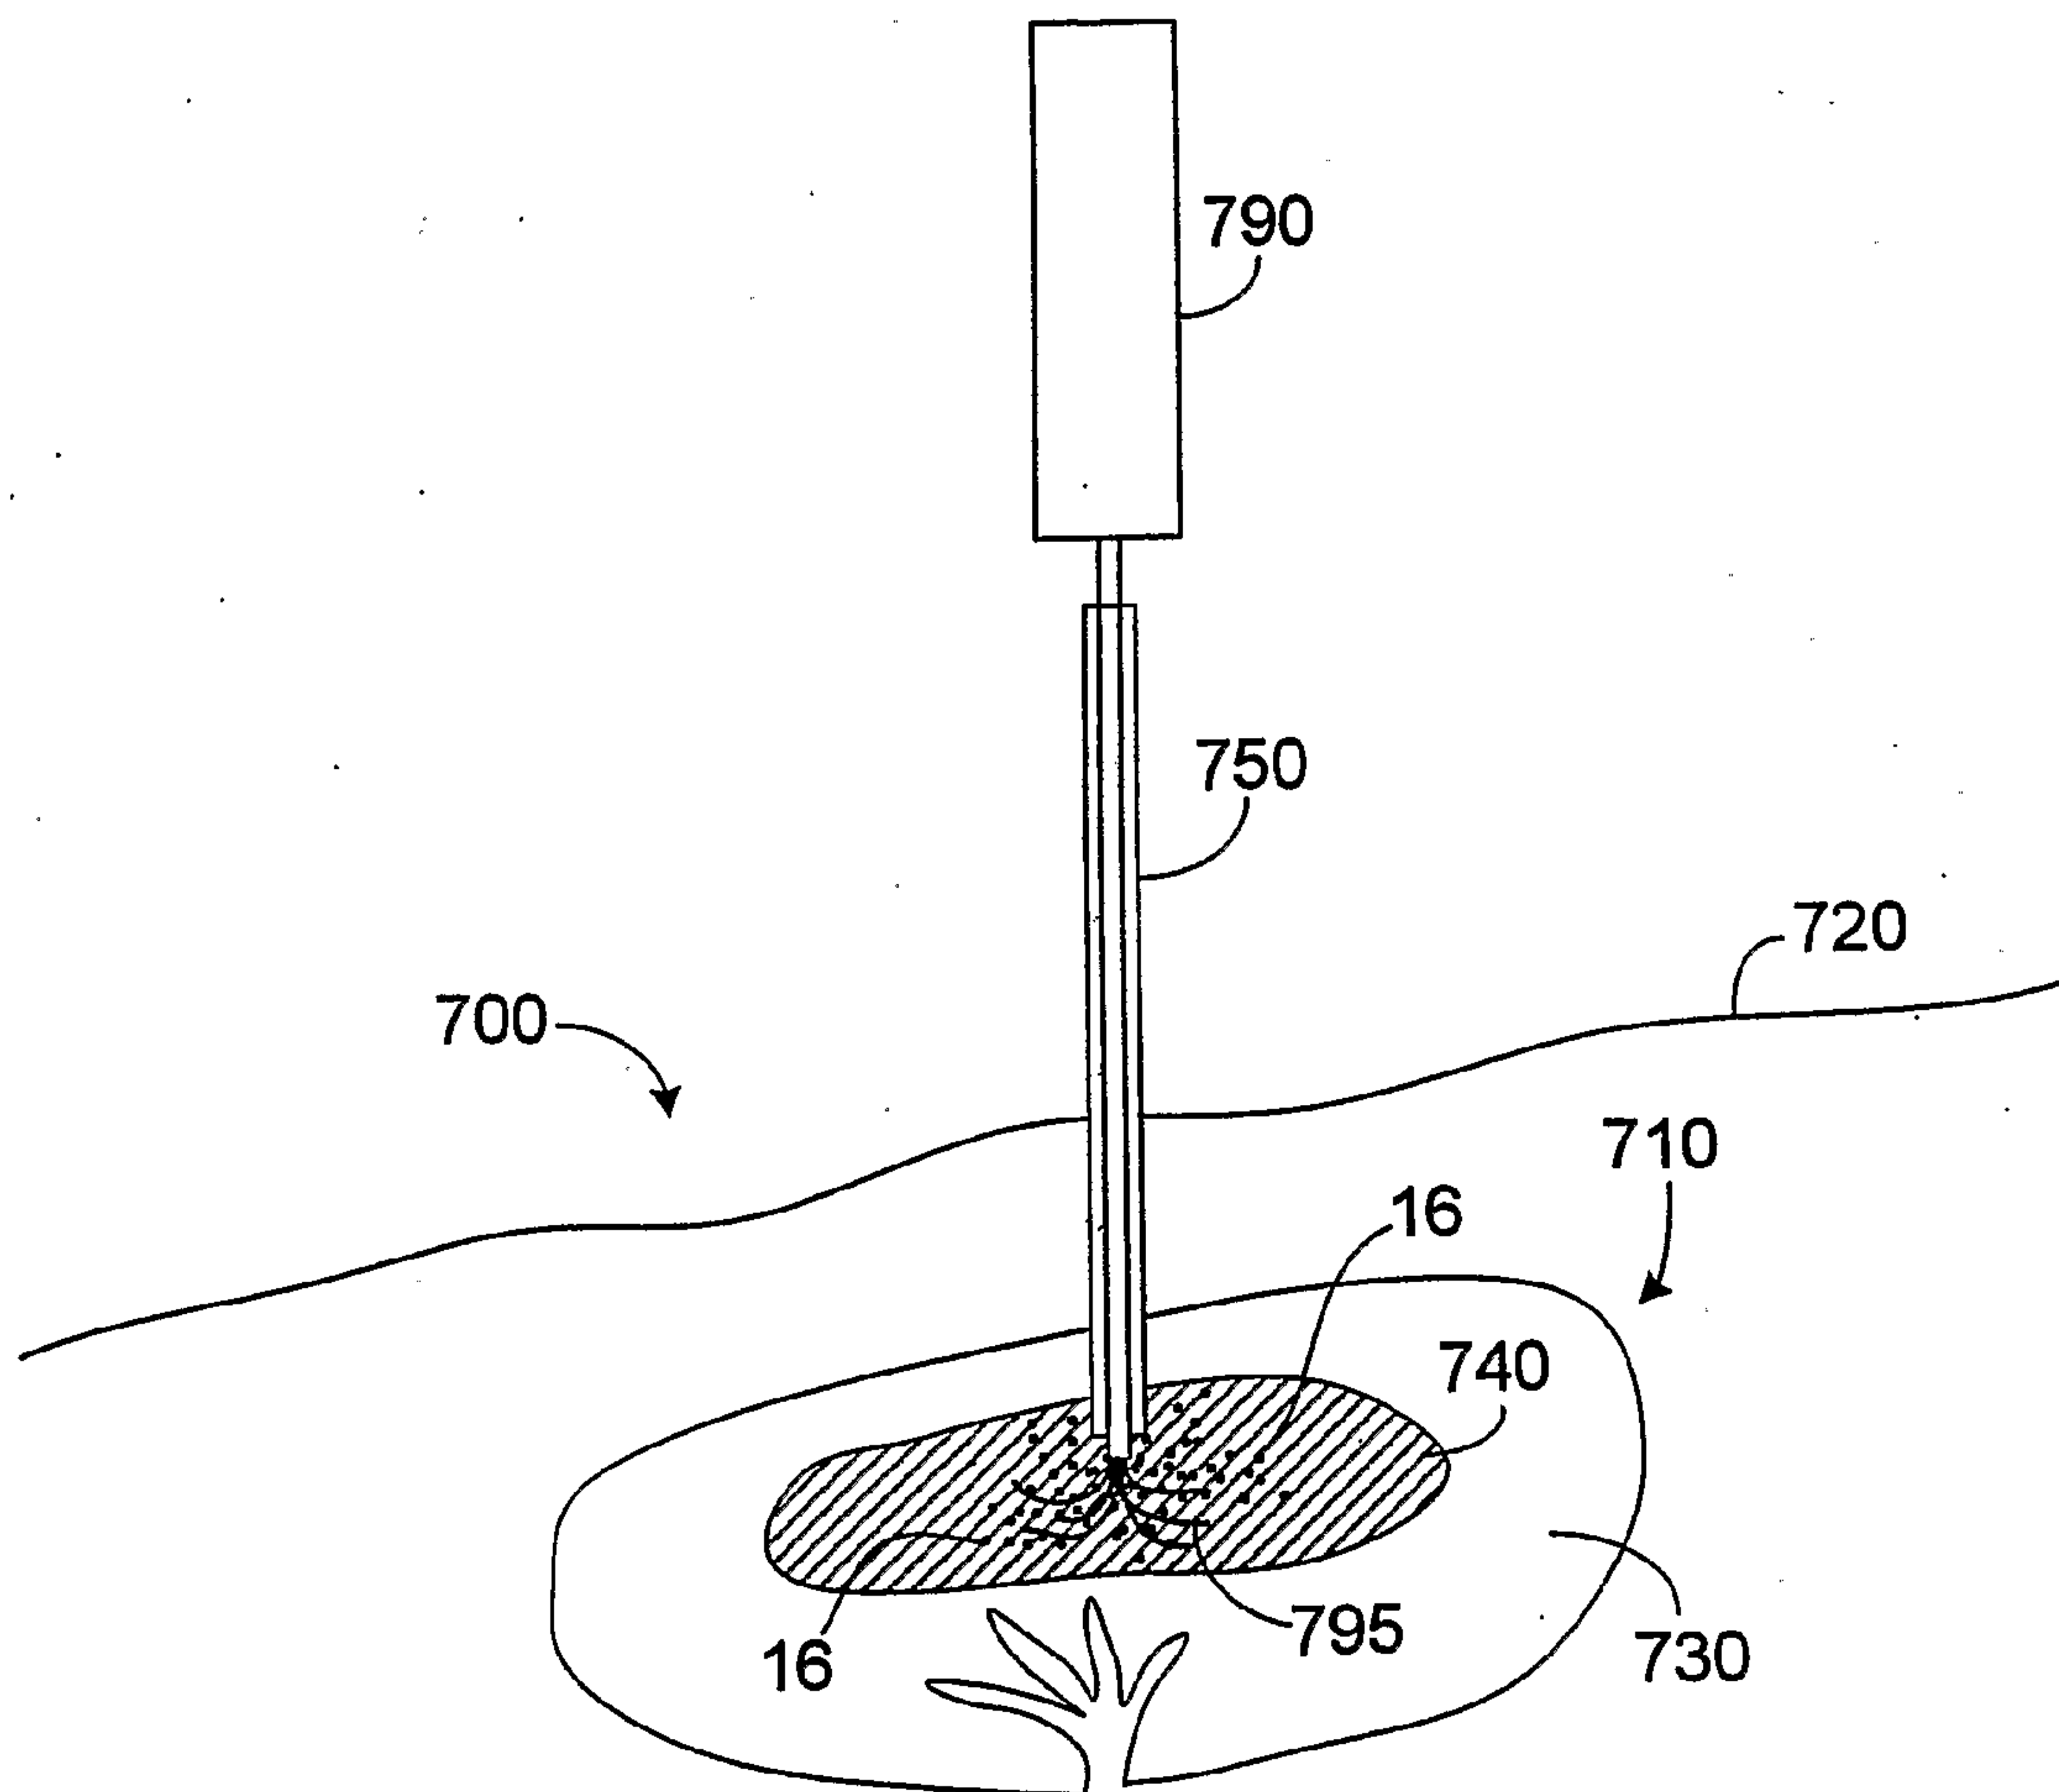


FIG. 8F

17/17

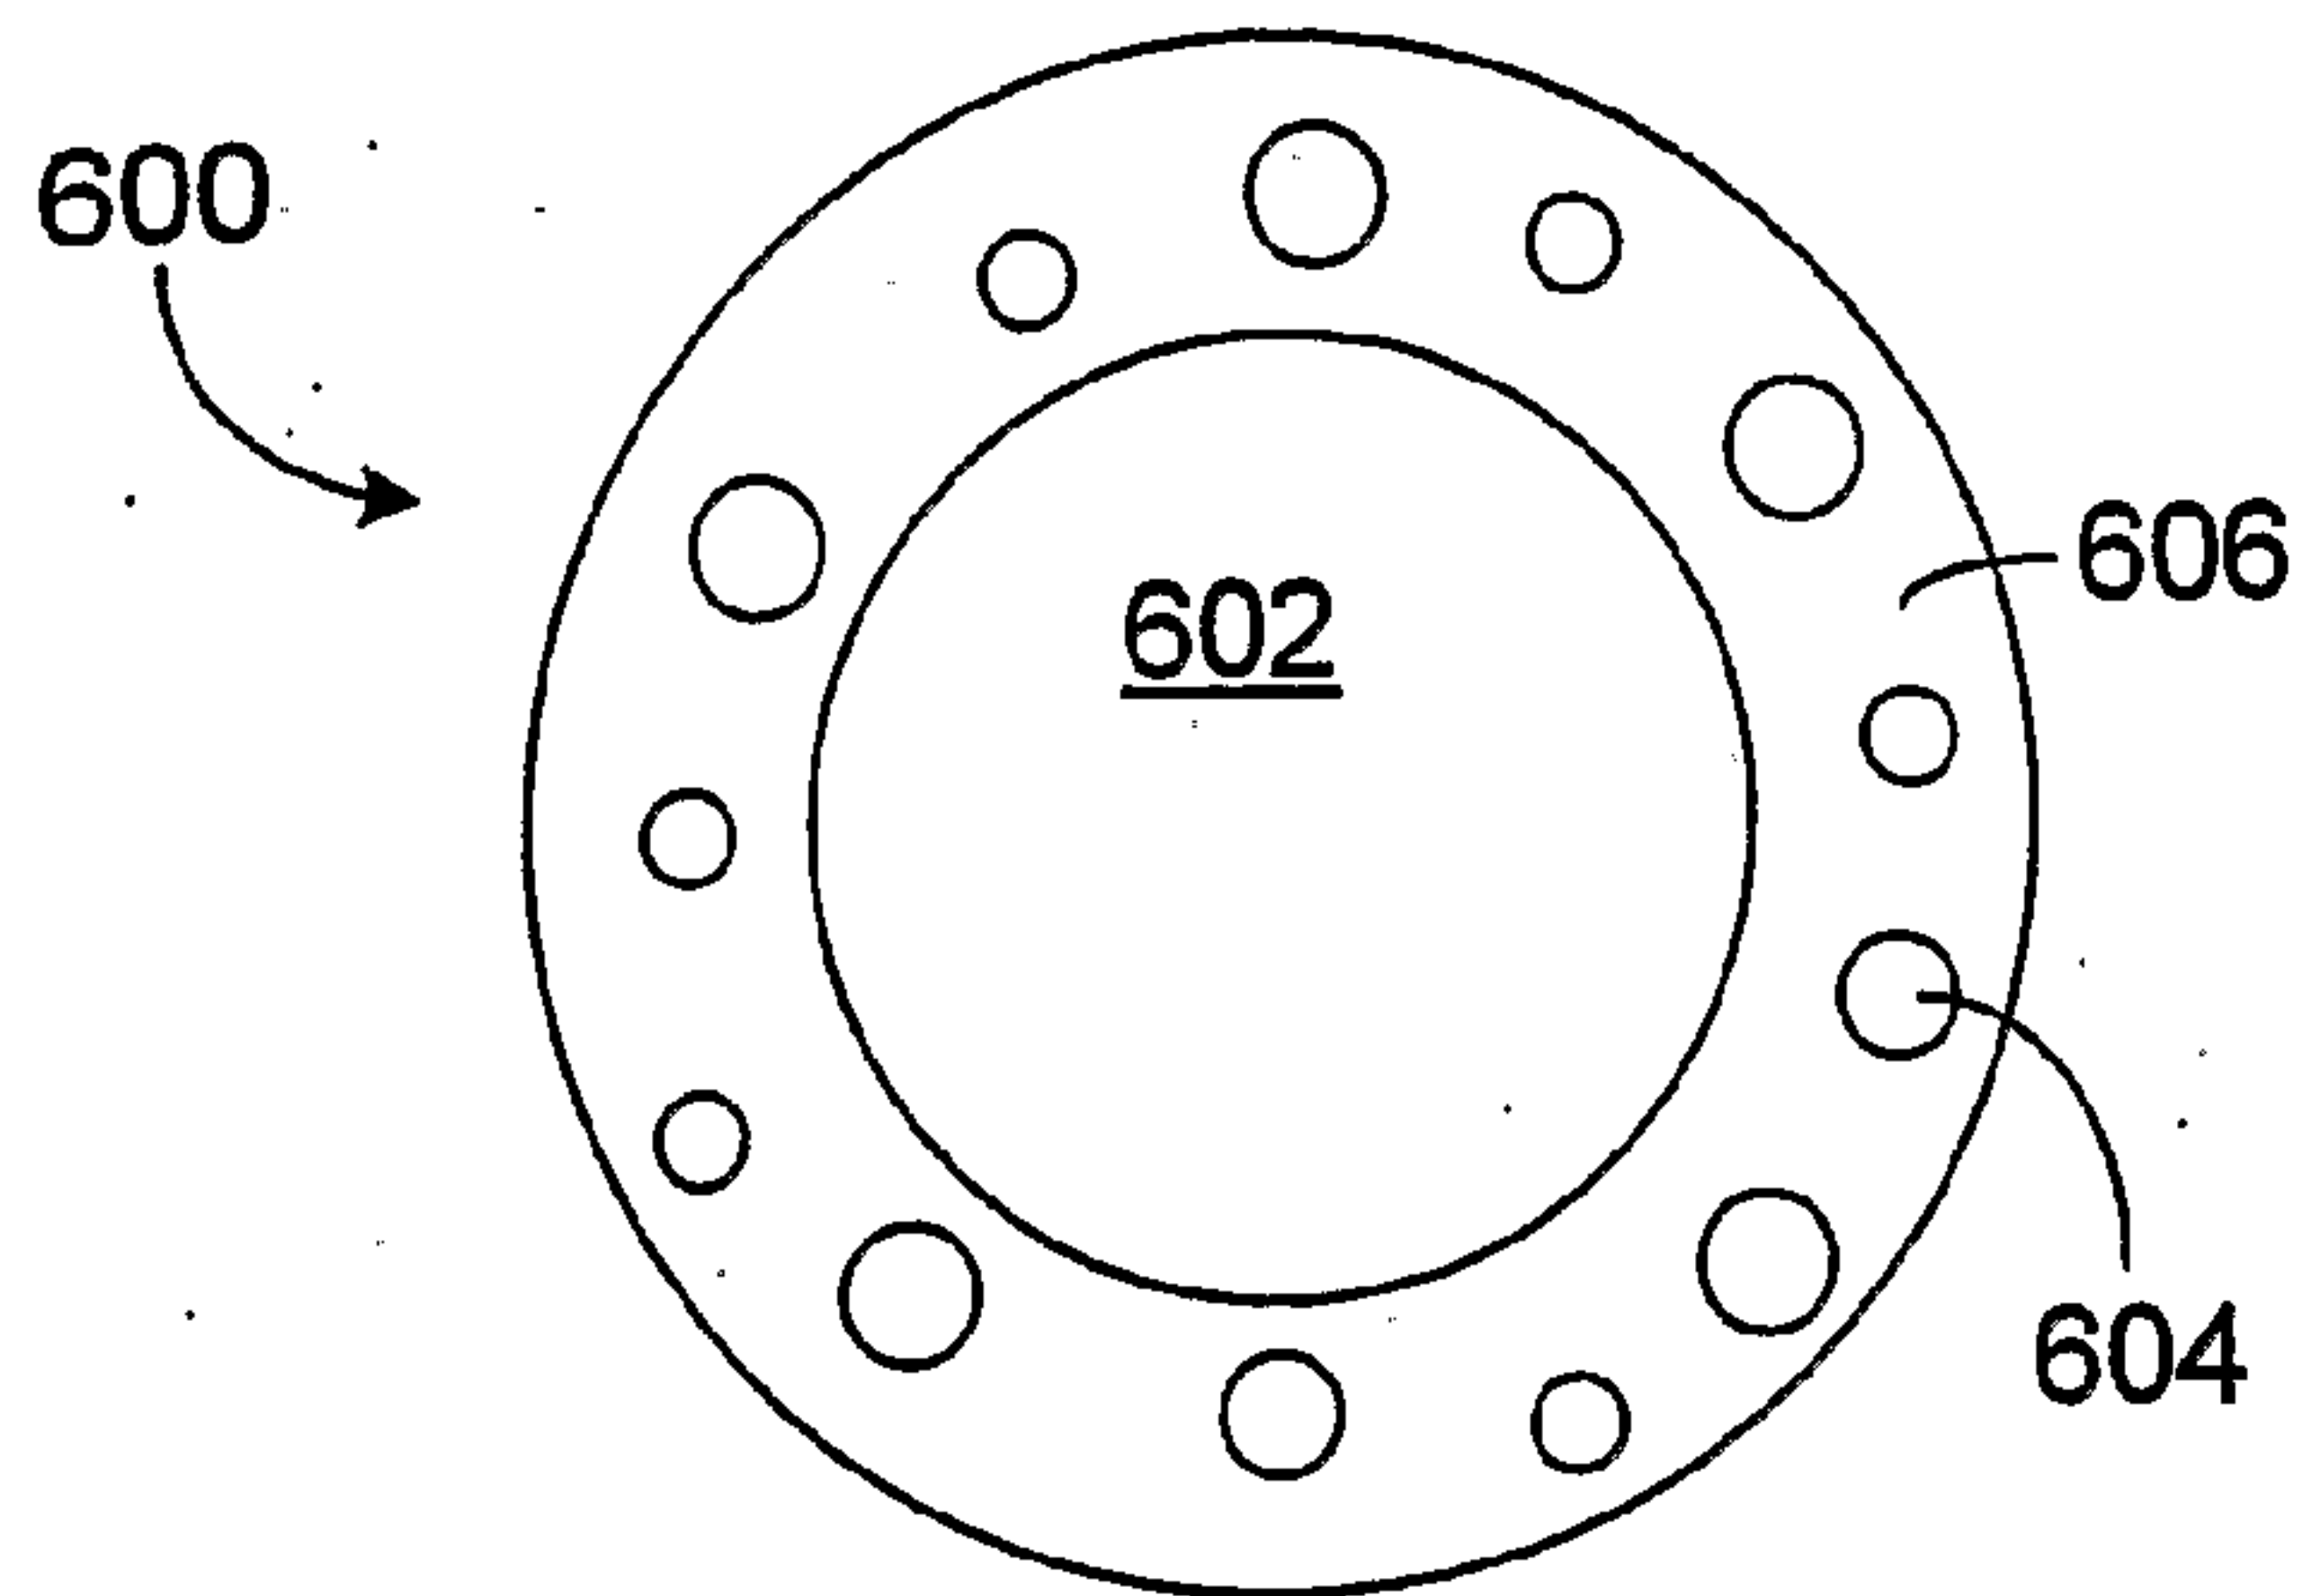


FIG. 9

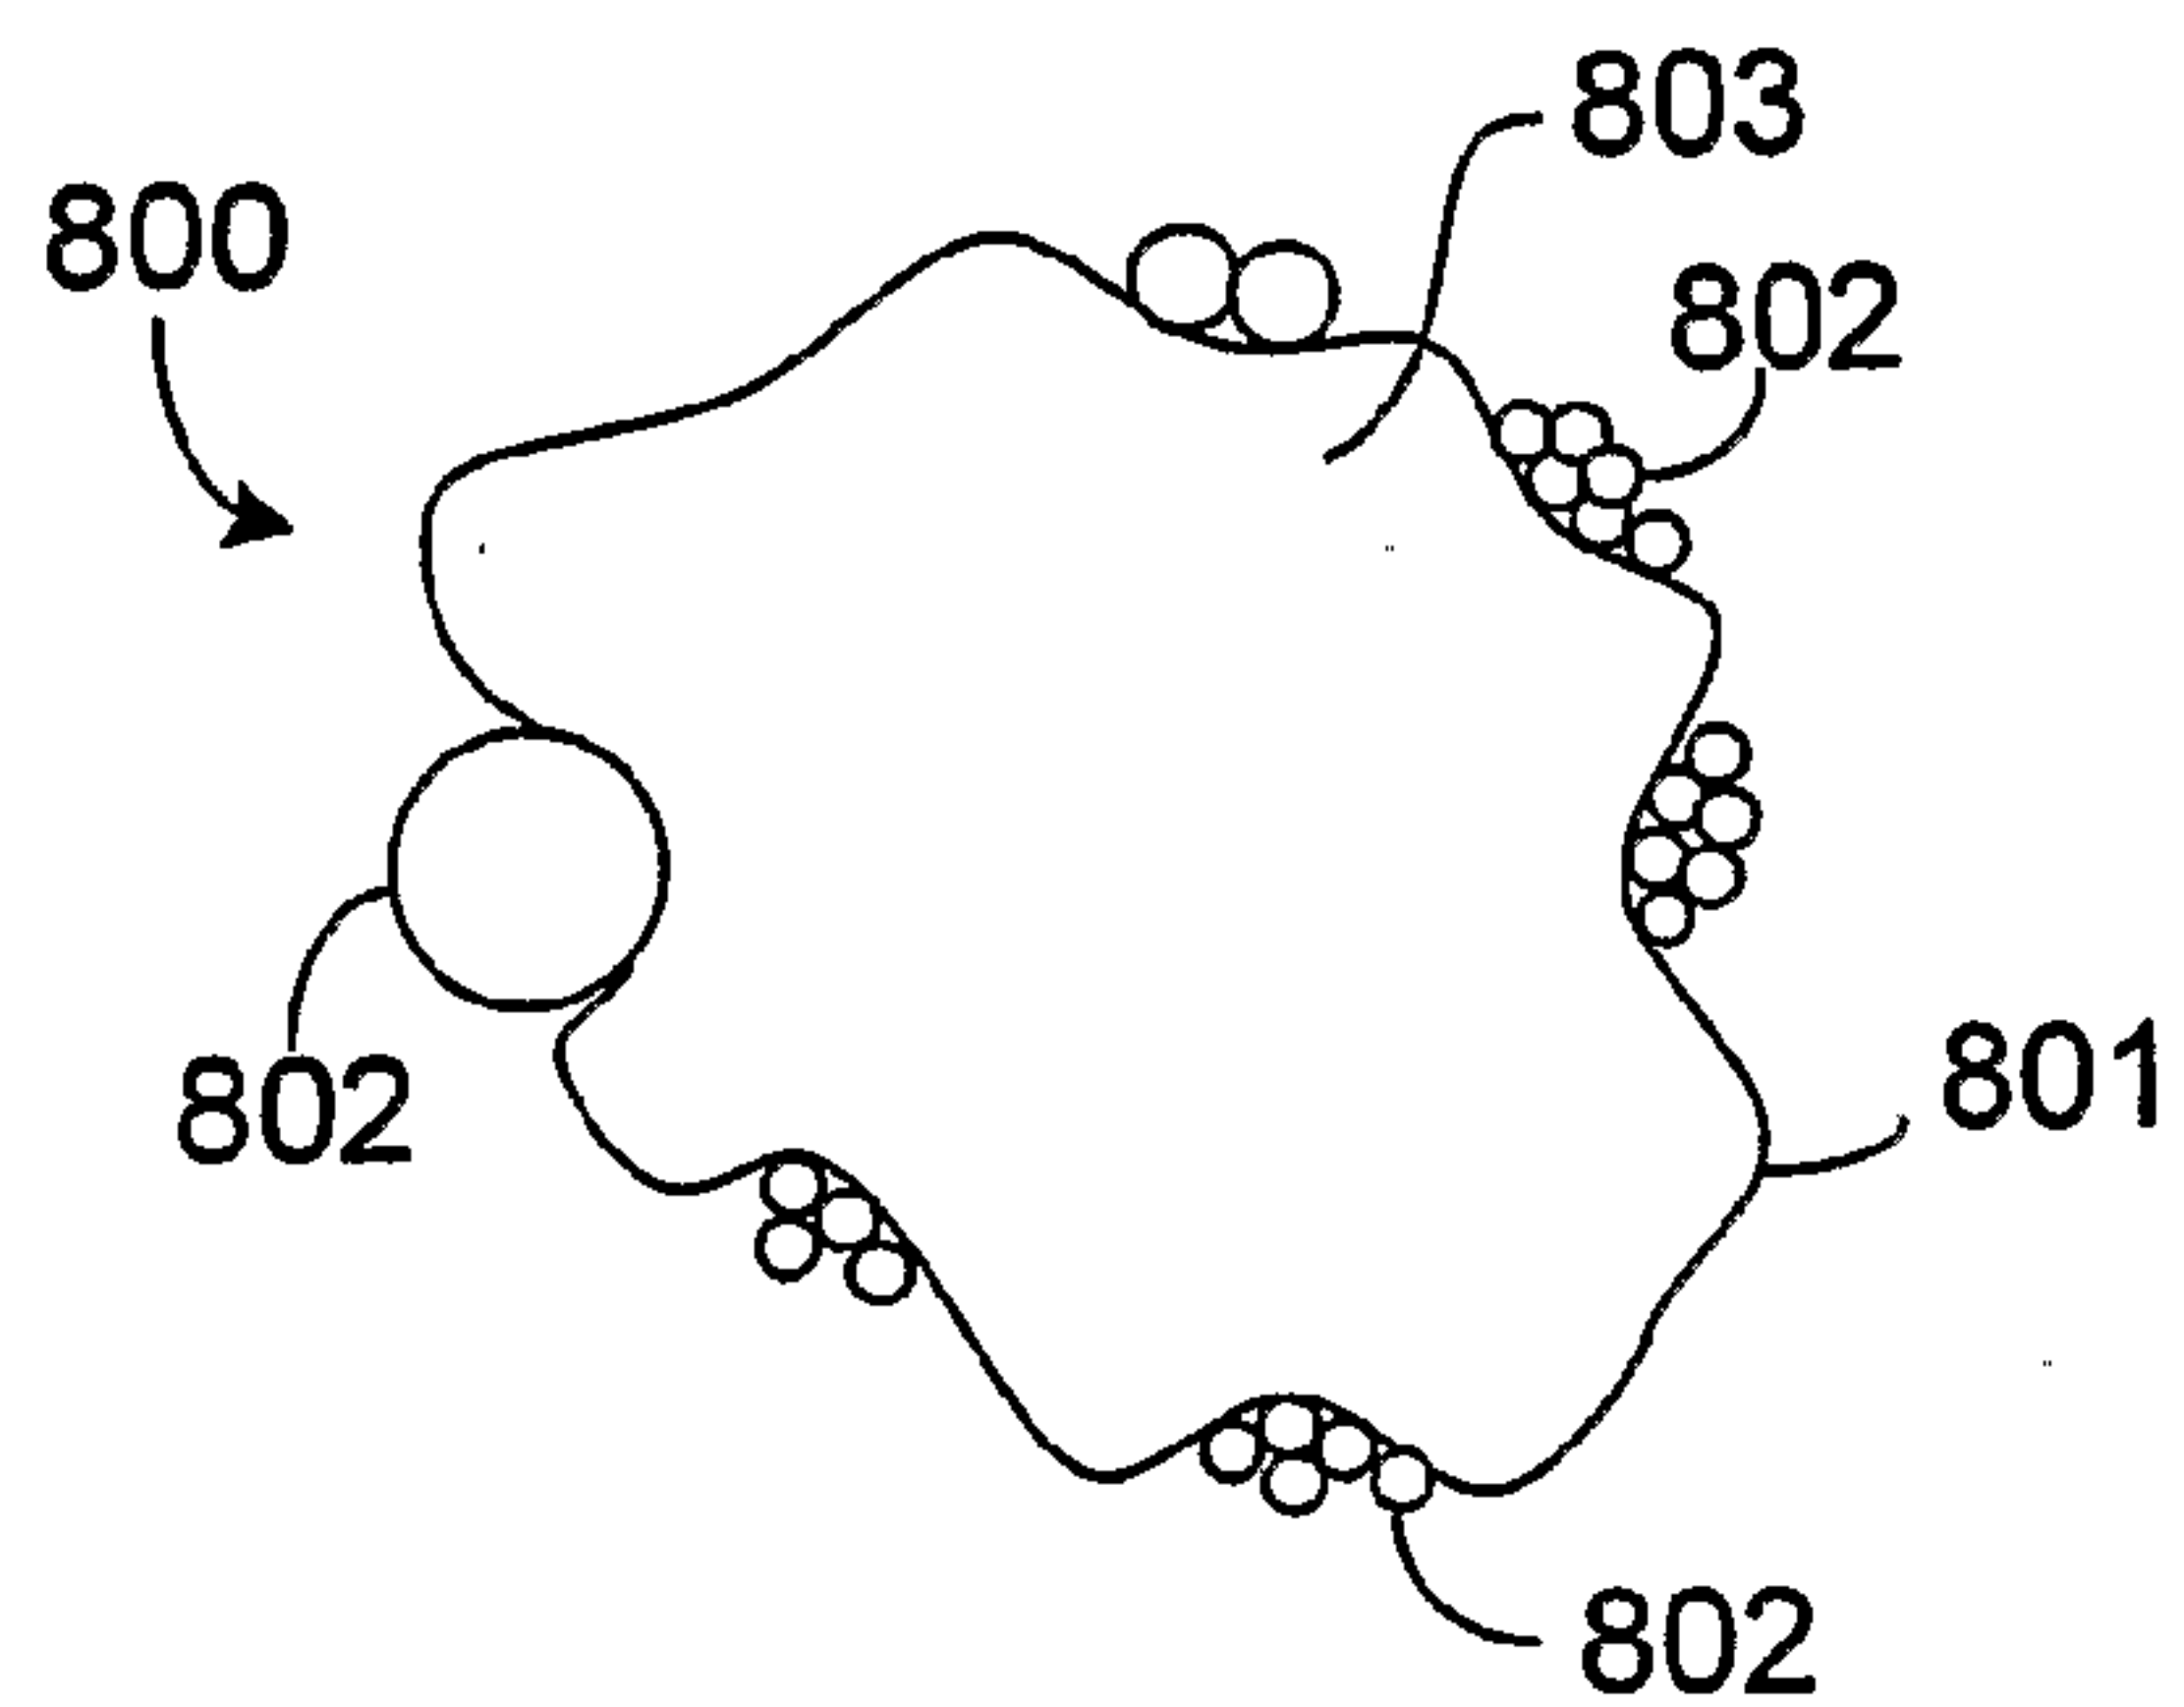


FIG. 10A

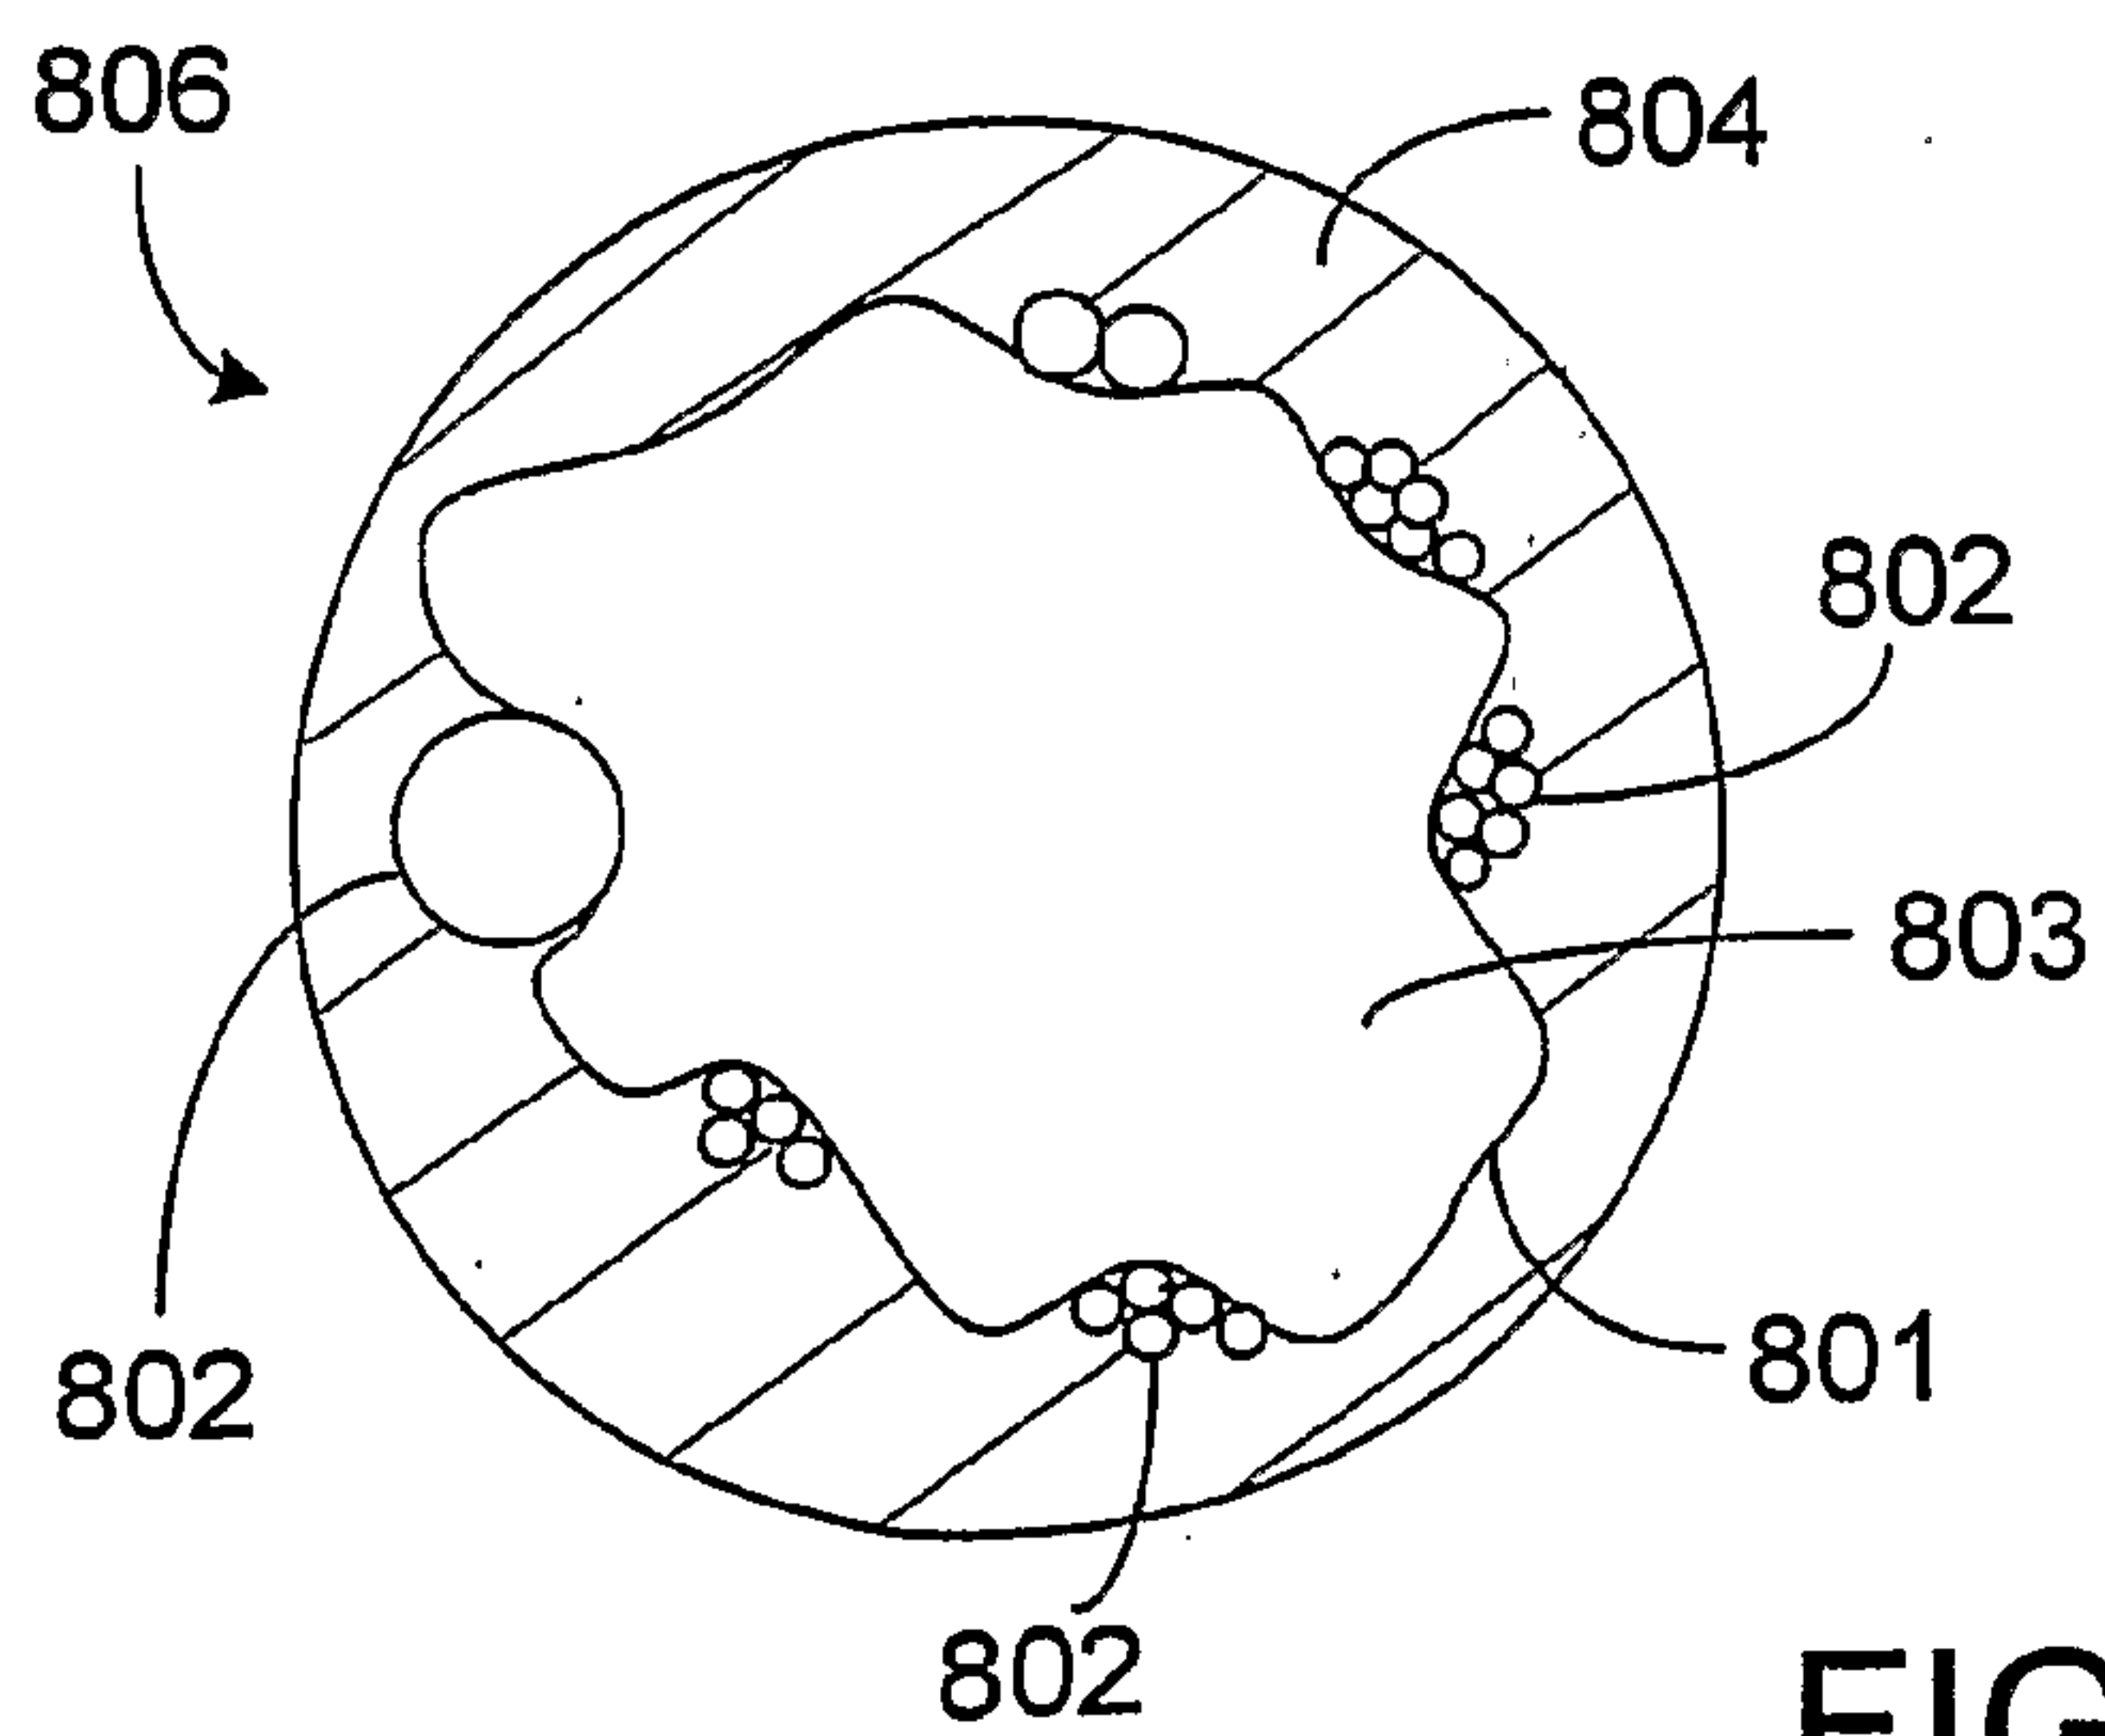


FIG. 10B

