

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 March 2007 (01.03.2007)

PCT

(10) International Publication Number
WO 2007/024724 A2

(51) International Patent Classification:
B63B 1/10 (2006.01)

(21) International Application Number:
PCT/US2006/032424

(22) International Filing Date: 21 August 2006 (21.08.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/710,171 22 August 2005 (22.08.2005) US
11/278,026 30 March 2006 (30.03.2006) US

(71) Applicant (for all designated States except US): **LOCKHEED MARTIN CORPORATION** [US/US]; Intellectual Property Law Dept., Bldg. 400, Mail Drop 043, 9500 Godwin Drive, Manassas, VA 20110 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BAILEY, Stephen, L.** [US/US]; 20171 Beatty Ridge Road, Los Gatos, CA 95033 (US). **MADDEN, Lewis, D.** [US/US]; 2951 Holiday Court, Morgan Hill, CA 95037 (US). **BICE, Robert, G.** [US/US]; 10691 Minette Place, Cupertino, CA 95014 (US). **LU, Yong** [US/US]; 15234 Upton Avenue, San Leandro, CA 94578 (US).

(74) Agents: **DEMONT, Jason, Paul** et al.; DEMONT & BREYER, LLC, Suite 250, 100 Commons Way, Holmdel, NJ 07733 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR RECONFIGURATION OF A VARIABLE-DRAFT VESSEL

(57) Abstract: A vertical translation mechanism for reconfiguring the hull form of a reconfigurable vessel having independently movably side hulls and a center hull is disclosed. The vertical translation mechanism includes a hydraulic-force actuator and a nonmetallic bearing. The hydraulic force actuator comprises a rod that is disposed within a hydraulic cylinder. Responsive to changes in hydraulic pressure in the cylinder, the rod is extended or retracted therefrom. Movement of the rod controls the vertical translation of the center hull and its rotational attitude relative to the side hulls.



WO 2007/024724 A2

Apparatus for Reconfiguration of a Variable-Draft Vessel

Statement of Related Cases

[0001] This case claims priority of U.S. provisional patent application 60/710,171, which was filed on August 22, 2005 and is incorporated by reference herein.

Field of the Invention

[0002] The present invention relates to sea-faring vessels. More particularly, the present invention relates to a vessel having a multiple, reconfigurable hulls and a variable draft.

Background of the Invention

[0003] Vessel hulls have traditionally been optimized for use in either shallow water or in deep water. For example, to navigate shallow waters, a relatively flat hull is used to maximize displacement and minimize draft. On the other hand, vessels that operate in deep waters frequently have v-shaped hulls that provide deep draft for good seakeeping.

[0004] If a vessel is designed for use in shallow waters, its performance in deep waters will be compromised, and vice-versa. This has spurred the development of variable-draft vessels, which are designed to operate well in both shallow and deep waters.

[0005] As the name implies, a variable-draft vessel is capable of varying its draft to accommodate changes in water depth or mission requirements. A variable-draft vessel that is disclosed in U.S. Pat. No. 6,877,450 B2 is capable of reconfiguring its hull form to change draft. The vessel includes a flat, center hull that is coupled to two side or outer hulls. The center hull is vertically movable relative to the side hulls to vary draft.

[0006] According to the patent, the center hull can be moved above or below the waterline. When the center hull is above the waterline, all buoyancy is provided by the side hulls, and the vessel takes maximum draft. As the center hull dips below the waterline, it contributes to the buoyancy provided by the side hulls. As a consequence, vessel draft is reduced.

Summary of the Invention

[0007] The present invention provides a vertical translation mechanism for reconfiguring the hull form of a reconfigurable, variable-draft vessel. Such a vessel includes a center hull that is flanked by two side hulls. The side hulls typically contain the propulsion mechanism(s) for the vessel. The center hull contains the pilot house, passengers, and vehicle storage.

[0008] In accordance with the illustrative embodiment of the present invention, the vertical translation mechanism includes a hydraulic force actuator and a nonmetallic bearing.

[0009] The hydraulic force actuator comprises a rod that is disposed within a hydraulic cylinder. Powered by hydraulic force, the rod is extended or retracted from the hydraulic cylinder. Movement of the rod controls the vertical translation of the center hull and its rotational attitude relative to the side hulls.

[0010] A nonmetallic bearing, which is (indirectly) coupled at one end to one of the side hulls, slides along a guide post that is anchored to the center hull. The coupling to the side hull provides a structural connection to transmit lateral plane forces to the side hulls.

[0011] In the illustrative embodiment, four vertical translation mechanisms are positioned at four corners of the center hull.

Brief Description of the Drawings

[0012] Figure 1 depicts a reconfigurable, variable-draft vessel in accordance with the illustrative embodiment of the present invention.

[0013] Figure 2 depicts the vessel of Figure 1 in a deep-draft mode configuration.

[0014] Figure 3 depicts the vessel of Figure 1 in a shallow-draft mode configuration.

[0015] Figure 4 depicts a top view of vessel of Figure 1, showing four vertical translation mechanisms.

[0016] Figure 5 depicts a top of the vertical translation mechanism.

[0017] Figure 6 depicts a side view of the vertical translation mechanism when the vessel is in a deep-draft mode configuration.

[0018] Figure 7 depicts a side view of the vertical translation mechanism when the vessel is in a shallow-draft mode configuration.

Detailed Description

[0019] Figure 1 depicts re-configurable, variable-draft vessel **100** in accordance with the illustrative embodiment of the present invention. Vessel **100** includes side hulls **102**, struts **104**, sponson **106**, and deck house **108**. The deck house, which is also referred to as the center hull, incorporates a pilot house, and, internally, a (lower) deck for vehicles and an (upper) deck for passengers.

[0020] Vessel **100** is capable of reconfiguring between deep-draft modes (*i.e.*, catamaran and SWATH) and shallow-draft modes (*i.e.*, barge and wet-deck). To do so, vessel **100** incorporates vertical translation mechanism **110** for moving the center hull **108** relative to side hulls **102**. For vessel **100**, four vertical translation mechanisms **110** are used, wherein two mechanisms are disposed on each side of center hull **102**, one located aft and one located toward the stern.

[0021] Figure 2 depicts vessel **100** in a typical deep-draft mode, wherein bottom **212** of center hull **108** is disposed well above side hulls **102** and above the waterline **WL**. Since center hull **108** does not typically contact the water when vessel **100** is configured in a deep-draft mode, vessel **100** can travel at higher speeds or with improved sea keeping relative to a shallow-draft mode.

[0022] Figure 3 depicts vessel **100** in a typical shallow-draft mode, wherein the bottom of side hulls **102** and bottom **212** of center hull **108** are substantially co-planar. In the shallow-draft mode configuration that is depicted in Figure 3, a portion of side hulls **102** and center hull **108** are submerged. In the shallow-draft mode, vessel **100** can approach a shoreline to launch or recover vehicles and personnel (*e.g.*, via ramp **314**, *etc.*).

[0023] Referring generally to Figures 2-7, each vertical translation mechanism **110** includes bearing **214**, guide rod **216**, two hydraulic cylinders **218**, two rods **220** which are coupled to the hydraulic cylinders, and support plate **416**. Vertical translation mechanism **110** is driven by a pump, which is not shown. Those skilled in the art, after reading the present disclosure, will know how to size and operate a pump to power hydraulic vertical translation mechanism **110**.

[0024] Guide rod **216** and rods **220** are fixed to a surface of center hull **108** near a marginal region thereof. Guide rod **216** is received by support plate **416** and bearing **214**. Support plate **416** is attached to sponson **106**. Hydraulic cylinders **218** are supported by support plate **416**. Since side hulls **102** are attached, via struts **104**, to sponson **106**, support plate **416** is considered to be "coupled" to the side hulls.

Furthermore, center hull **102** is considered to be "movably coupled" to side hulls **102** due to this structural relationship.

[0025] Under hydraulic pressure that builds in hydraulic cylinders **218**, rods **220** are pushed downward from the hydraulic cylinders. As rods **220** are extended, center hull **108** is pushed downward. Conversely, as rods **220** are retracted in hydraulic cylinders **218**, center hull **108** is pulled upward. The guide rod freely slides through bearing **214**, which is formed of an elastomeric material.

[0026] In this fashion, hydraulic cylinders **218** and rods **220** perform vertical translation of center hull **108**. The use of multiple (*e.g.*, four, *etc.*) vertical translation mechanisms **110** (*e.g.*, see Figure 4, showing four mechanisms **110**, *etc.*) enables control of the attitude of center hull **108** via differential actuation. This enables, for example, increased draft of side hulls **102** at the stern for increased propulsion efficiency or decreased draft at the bow for beach landings.

[0027] Support plate **416**, in conjunction with bearing **214** and guide rod **216** resist horizontal plane forces. The bearing, since it is a non-metallic, such as molded rubber or plastic, enables non-binding movement and provides a way to control position and attitude between center hull **108** and sponson **106**/side hulls **102**. Importantly, non-metallic bearings **214** provide a means for holding center hull **108** while permitting the inevitable structural deflections, which are prevalent in lightweight, aluminum ship structures.

[0028] Returning now to a discussion of Figure 2, which depicts vessel **100** in the deep-draft mode, vertical translation mechanism **110** is in a retracted state. That is, rods **220** are substantially retracted within hydraulic cylinders **218**. This retracted state is also depicted in Figure 6. Since rods **220** are fixed to center hull **108**, this places the center hull at a maximum vertical position relative to side hulls **102**.

[0029] Returning now to a discussion of Figure 3, which depicts vessel **100** in the shallow-draft mode, vertical translation mechanism **110** is in an extended state. In particular, rods **220** are substantially extended from hydraulic cylinders. This extended state is also depicted in Figure 7. The extended rods **220** force center hull **108** to a minimum vertical position relative to side hulls **102**.

[0030] An exemplary design for vertical translation mechanism **110** is provided below. The design is based on using four mechanisms **110** and the following assumptions:

- weight of center hull **108**, loaded: 149.3 LT

- weight of center hull **108**, unloaded: 99.6 LT
- displacement of center hull **108** at 3.874 Ft of draft (unloaded condition): 391.7 LT

[0031] Based on the foregoing assumptions, each mechanism **110** includes two pin-ended cylinders having a twenty-two foot stroke. The hydraulic pressure of the cylinders is 2800 psi operating pressure and 3000 psi max pressure. Each cylinder must be capable of pushing 163,576 pounds and must be capable of lifting 83,608 pounds. The bore of the cylinder is ten inches and the rod is eight inches. Outside diameter of the cylinder is 11.5 inches.

[0032] Each cylinder, when filled with hydraulic fluid, weighs 6,596 pounds. The fluid in the cylinder weighs 242.3 pounds. To actuate the system in within two minutes will require 133 horsepower.

[0033] It is to be understood that the above-described embodiments are merely illustrative of the present invention and that many variations of the above-described embodiments can be devised by those skilled in the art without departing from the scope of the invention. For example, in this Specification, numerous specific details are provided in order to provide a thorough description and understanding of the illustrative embodiments of the present invention. Those skilled in the art will recognize, however, that the invention can be practiced without one or more of those details, or with other methods, materials, components, *etc.*

[0034] Furthermore, in some instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the illustrative embodiments. It is understood that the various embodiments shown in the Figures are illustrative, and are not necessarily drawn to scale. Reference throughout the specification to "one embodiment" or "an embodiment" or "some embodiments" means that a particular feature, structure, material, or characteristic described in connection with the embodiment(s) is included in at least one embodiment of the present invention, but not necessarily all embodiments. Consequently, the appearances of the phrase "in one embodiment," "in an embodiment," or "in some embodiments" in various places throughout the Specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, materials, or characteristics can be combined in any suitable manner in one or more embodiments. It is therefore intended that such variations be included within the scope of the following claims and their equivalents.

What is claimed is:

- 1.** A variable-draft vessel comprising an apparatus for vertically translating a center hull relative to a side hull, wherein said apparatus comprises:

 - a guide rod, wherein said guide rod depends from said center hull;
 - a support plate coupled to said side hull;
 - an elastomeric bearing that is received by said support plate and which slidably receives said guide rod;
 - a hydraulic cylinder, wherein said hydraulic cylinder depends from said support plate; and
 - a rod, wherein said rod is operatively coupled at a first end to said hydraulic cylinder and extends therefrom or retracts therein in response to changes in hydraulic pressure within said cylinder, and wherein said rod is fixedly coupled, at a second end thereof, to said center hull.
- 2.** The variable-draft vessel of claim 1 wherein when said rod is fully extended from said cylinder, said center hull and said side hull are at a maximum vertical distance relative to one another.
- 3.** The variable-draft vessel of claim 1 wherein when said rod is fully retracted within said cylinder, said center hull and said side hull are at a minimum vertical distance relative to one another.
- 4.** The variable-draft vessel of claim 1 further comprising a plurality of said apparatuses, wherein each of said apparatuses are individually actuatable, thereby enabling control over the attitude of said center hull.
- 5.** The variable-draft vessel of claim 1 further comprising a plurality of said apparatuses, wherein at least one of said apparatuses is proximal to the stern of said variable-draft vessel and at least one of said apparatuses is proximal to the bow of said vessel.
- 6.** A variable-draft vessel comprising:

 - a center hull;
 - two side hulls; and
 - a plurality of vertical translation mechanisms, wherein each of said vertical translation mechanisms movably couples said center hull to one of said two side hulls, and wherein each said vertical translation mechanism comprises:
 - (a) a hydraulic force actuator;

(b) a non-metallic bearing, wherein said non-metallic bearing slidably receives an element of said hydraulic force actuator; and

(c) a support plate, wherein said support plate couples to one of said side hulls and receives said non-metallic bearing.

7. The variable-draft vessel of claim 6 wherein at least one of said vertical translation mechanisms is disposed aft and at least one of said vertical translation mechanisms is disposed proximal to the stern of said vessel.

8. The variable-draft vessel of claim 7 wherein said one aft vertical translation mechanism and said one stern vertical translation mechanism are independently actuatable to enable control of the attitude of said center hull.

9. The variable-draft vessel of claim 6 wherein said hydraulic force actuator comprises:

a guide rod, wherein said guide rod depends from said center hull;

a hydraulic cylinder, wherein said hydraulic cylinder depends from said support plate; and

a rod, wherein said rod is operatively coupled at a first end to said hydraulic cylinder and extends therefrom or retracts therein in response to changes in hydraulic pressure within said cylinder, and wherein said rod is fixedly coupled, at a second end thereof, to said center hull.

10. The variable-draft vessel of claim 9 wherein said element received by said non-metallic bearing is said guide rod.

11. The variable-draft vessel of claim 9 wherein when said rod is fully extended from said cylinder, said center hull and said side hull are at a maximum vertical distance relative to each other.

12. The variable-draft vessel of claim 9 wherein when said rod is fully retracted within said cylinder, said center hull and said two side hulls are at a minimum vertical distance relative to each other.

13. An apparatus for vertically translating a center hull relative to a side hull, wherein said apparatus comprises:

(a) a hydraulic force actuator;

(b) a non-metallic bearing, wherein said non-metallic bearing slidably receives an element of said hydraulic force actuator; and

(c) a support plate, wherein said support plate couples to side hull and receives said non-metallic bearing.

14. The apparatus of claim 13 wherein said hydraulic force actuator comprises:
a guide rod, wherein said guide rod depends from said center hull;
a hydraulic cylinder, wherein said hydraulic cylinder depends from said support plate; and
a rod, wherein said rod is operatively coupled at a first end to said hydraulic cylinder and extends therefrom or retracts therein in response to changes in hydraulic pressure within said cylinder, and wherein said rod is fixedly coupled, at a second end thereof, to said center hull.

15. The apparatus of claim 14 wherein said element received by said non-metallic bearing is said guide rod.

16. The apparatus of claim 14 wherein when said rod is fully extended from said cylinder, said center hull and said side hull are at a maximum vertical distance relative to one another.

17. The apparatus of claim 14 wherein when said rod is fully retracted within said cylinder, said center hull and said side hull are at a minimum vertical distance relative to one another.

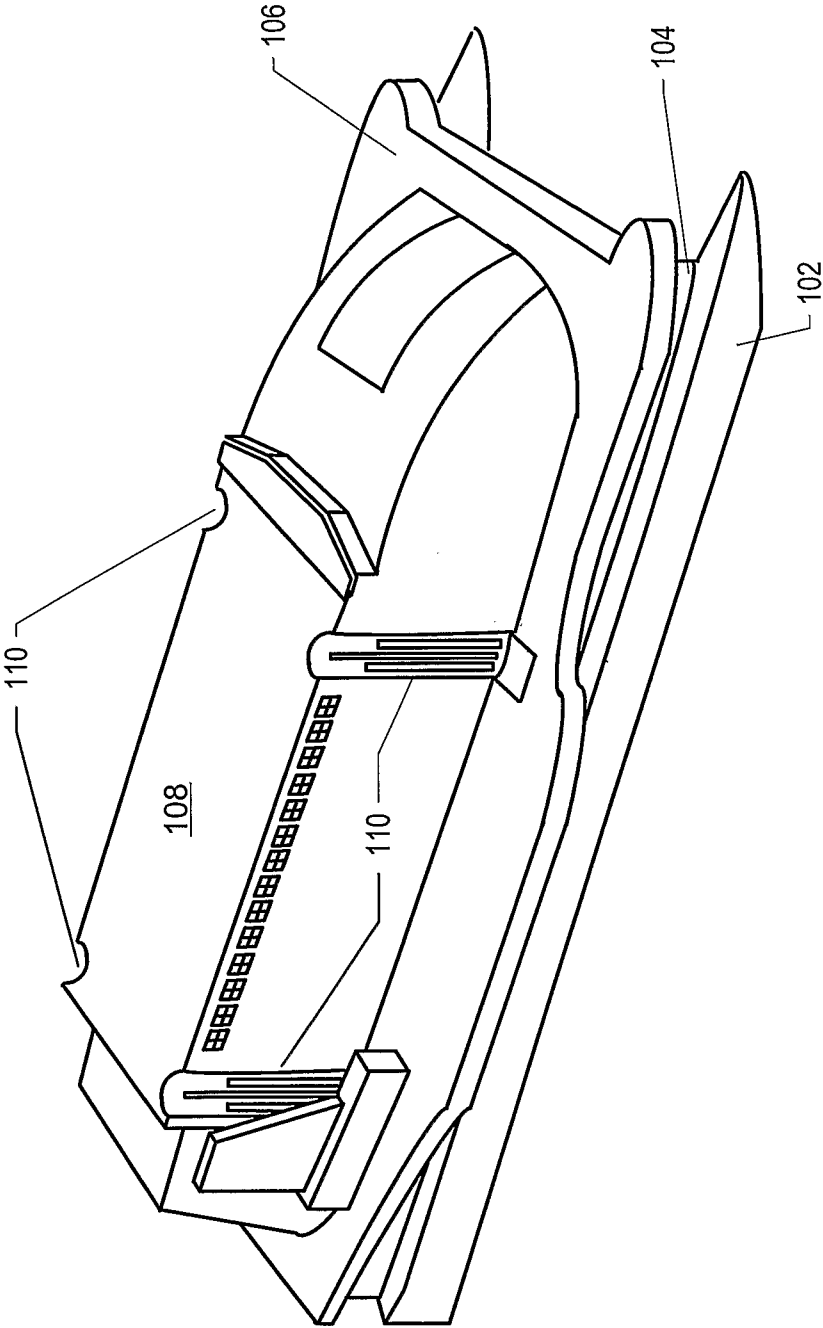


Figure 1

Figure 2

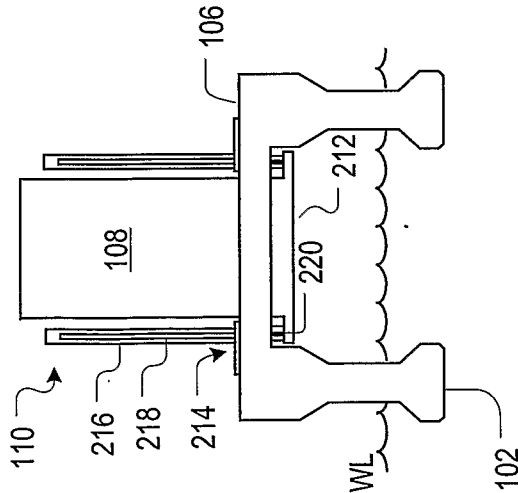


Figure 3

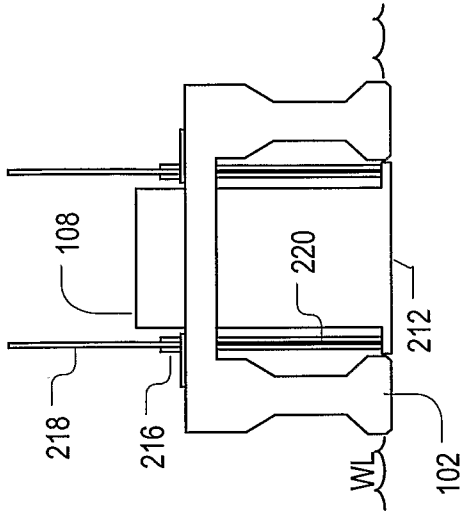


Figure 4

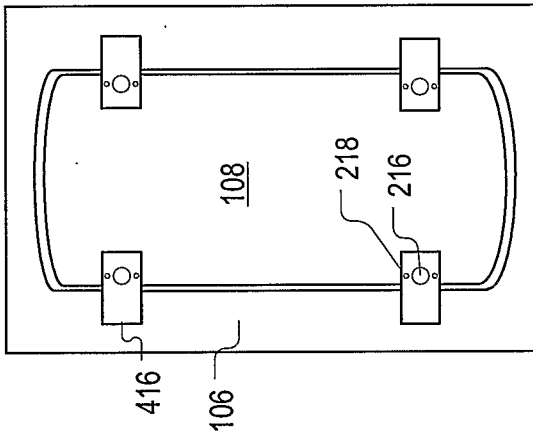


Figure 5




Figure 6

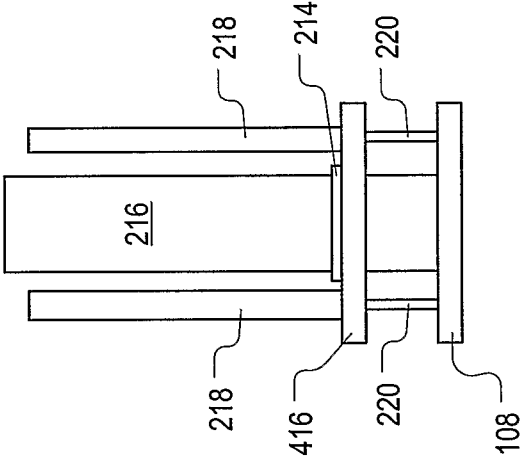


Figure 7

