

(19)



(11)

EP 1 680 007 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.04.2013 Bulletin 2013/15

(51) Int Cl.:
A61B 19/00 (2006.01)

(21) Application number: **04757075.9**

(86) International application number:
PCT/US2004/022978

(22) Date of filing: **16.07.2004**

(87) International publication number:
WO 2005/009215 (03.02.2005 Gazette 2005/05)

(54) **GUIDANCE SYSTEM AND METHOD FOR SURGICAL PROCEDURES WITH IMPROVED
FEEDBACK**

FÜHRUNGSSYSTEM UND VERFAHREN FÜR CHIRURGISCHE VERFAHREN MIT
VERBESSERTEM FEEDBACK

SYSTEME ET PROCEDE DE GUIDAGE POUR INTERVENTIONS CHIRURGICALES A
RETROACTION AMELIOREE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

• **ABOVITZ, Rony, A.**
Hollywood, FL 33021 (US)

(30) Priority: **16.07.2003 US 621119**

(74) Representative: **Gasquet, Denis**
CABINET GASQUET
Les Pléiades n 24C
Park Nord-Annecy
74370 Metz Tassy (FR)

(43) Date of publication of application:
19.07.2006 Bulletin 2006/29

(73) Proprietor: **Mako Surgical Corp.**
Fort Lauderdale, FL 33317 (US)

(56) References cited:
US-A- 5 638 819 US-A- 5 749 362
US-A- 5 928 137 US-A- 6 006 127
US-A1- 2001 034 530 US-A1- 2002 120 188
US-B1- 6 405 072

(72) Inventors:
• **QUAID, Arthur, E.**
Hollywood, FL 33020 (US)

EP 1 680 007 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD OF THE INVENTION

[0001] The present invention relates generally to computer-assisted surgery systems and surgical navigation systems, and more particularly to a system and method for conveying depth information during a medical procedure.

BACKGROUND OF THE INVENTION

[0002] The functions of a computer-assisted surgery (CAS) system may include pre-operative planning of a procedure, presenting pre-operative diagnostic information and images in useful formats, presenting status information about a procedure as it takes place, and enhancing performance. The CAS system may be used for procedures in traditional operating rooms, interventional radiology suites, mobile operating rooms or outpatient clinics. Many approaches to CAS have been attempted commercially. The procedure may be any medical procedure, whether surgical or non-surgical.

[0003] Navigation systems are used to display the positions of surgical tools with respect to pre- or intraoperative, image datasets. These images include intraoperative images, such as two-dimensional fluoroscopic images, and preoperative three dimensional images generated using, for example, magnetic resonance imaging (MRI), computer tomography (CT) and positron emission tomography (PET). The most popular navigation systems make use of a tracking or localizing system. These systems locate markers attached or fixed to an object, such as an instrument or a patient, and track the position of markers. These tracking systems are optical and magnetic, but also include acoustic systems. Optical systems have a stationary stereo camera pair that observes passive reflective markers or active infrared LEDs attached to the tracked tools. Magnetic systems have a stationary field generator that emits a magnetic field that is sensed by small coils integrated into the tracked tools. These systems are sensitive to nearby metal objects.

[0004] While navigation systems are relatively easy to integrate into the operating room, a fundamental limitation is that they have restricted means of communication with the surgeon. Most systems transmit information to the surgeon via a computer monitor. Conversely, the surgeon transmits information to the system via a keyboard and mouse, touchscreen, voice commands, control pendant, or foot pedals, and also by moving the tracked tool. The visual displays of navigation systems may at best display multiple slices through three-dimensional diagnostic image datasets, which are not easy to interpret for complex 3-D geometries. These displays also require the surgeon to focus his visual attention away from the surgical field.

[0005] When defining a plan using a tracked tool, it can be difficult to simultaneously position the tool appropri-

ately in multiple degrees of freedom (DOFs). Similarly, when aligning a tracked instrument with a plan, it is difficult to control the position of the tool in multiple simultaneous DOFs, especially where high-accuracy is desirable. It is perhaps not a coincidence that navigation systems have had their largest acceptance in cranial neurosurgery, where most applications involve specifying a trajectory to a feature of interest without hitting critical features. Often, the tip of the tool is pressed against the anatomy and pivoted, effectively decoupling the position and orientation planning of the trajectory.

[0006] Autonomous robots have been applied commercially to joint replacement procedures. These systems make precise bone resections, improving implant fit and placement relative to techniques that rely on manual instruments. Registration is performed by having the robot touch fiducial markers screwed into the bones or a series of points on the bone surfaces.

[0007] Cutting is performed autonomously with a high-speed burr, although the surgeon can monitor progress and interrupt it if necessary. Bones must be clamped in place during registration and cutting, and are monitored for motion, which then requires re-registration. Deficiencies reported by users of these systems include the large size of the robot, poor ergonomics, the need for rigidly clamping the bone for the 45-60 minutes required for registration and cutting, and the need for increasing the incision by 50-100 mm to provide adequate access for the robot. Furthermore, autonomous robots generally function best in highly structured environments, as evidenced by the rigid clamping of the bones of interest and making larger incisions to keep soft tissue away from the robot.

[0008] Except for specific steps of some surgical procedures, modern surgeries do not tend to provide well-structured environments for autonomous robots. A robot is generally not able to keep track of the surgical staff and instrumentation required to support a procedure. Although strict management of the operating environment might make this possible, the complexity of the human body will always provide a high degree of unstructuredness.

[0009] Robotic technology can also be used to improve upon standard practice without requiring autonomous operation. Notable commercial systems of this type include teleoperated robotic systems for laproscopic surgeries ranging from gall-bladder removal to closed-chest beating heart coronary surgery. These systems provide a console for the surgeon that includes a high-fidelity display and a master input device. The slave robot is coupled to the master and physically interacts with the anatomy. The benefits of these systems are primarily in providing an ergonomic working environment for the surgeon while improving dexterity through motion scaling and tremor reduction. Although the master console would normally be in the same room as the patient, an interesting byproduct of these systems is that they enable telesurgery. However, the robots have minimal autonomy in

these systems, which is not surprising given the complexity involved in manipulating and altering soft tissue.

SUMMARY OF THE INVENTION

[0010] It is often desirable to define objects with respect to images of an anatomy displayed using an image guided surgery system. For non-trivial objects, or those with complicated two or three dimensional forms, it may be difficult to present information in a manner that is simple for a user to understand. The local distance to a surface of interest, such as the surface of the defined object, or to a desired position, the local penetration distance of the surface of interest, or haptic repulsion force, often provides the most useful information for augmenting the interaction of the user with the image guided surgery system. The scalar value of the local distance may be conveyed to the user by visual, audio, tactile, haptic, or other means.

[0011] US 2002/0120188 discloses a system to avoid damaging nerves by providing haptic feed back.

The invention is defined by the appended independent claims. Preferred embodiments are described in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] For a more complete understanding of the present invention, the objects and advantages thereof, reference is now made to the following descriptions taken in connection with the accompanying drawings in which:

FIGURE 1 is a diagrammatic illustration of an exemplary operating room in which a haptic device is used with a computer-assisted surgery system;

FIGURE 2 illustrates an exemplary haptic device being used in conjunction with a computer-assisted surgery system;

FIGURES 3A and 3B illustrate different types of haptic objects;

FIGURE 3C is a flowchart of an exemplary method for intra-operative haptic planning of a surgical procedure;

FIGURE 4A illustrates the use of a dynamic haptic object for placement of a haptic device;

FIGURE 4B is a flowchart of a method for interactive haptic positioning of a medical device, coupled to a haptic device;

FIGURE 5 illustrates the use of an exemplary haptic device in conjunction with a computer-assisted surgery system;

FIGURE 6A illustrates an exemplary haptic device being used for haptic sculpting of physical objects;

FIGURE 6B illustrates an exemplary haptic object for haptic sculpting of physical objects;

FIGURE 6C is a flowchart of a method for dynamically modifying a haptic object;

FIGURES 7A and 7B illustrate the use of an exem-

plary haptic device and a surgical tool to define a haptic object;

FIGURE 8 illustrates the use of an exemplary haptic device as an input device;

FIGURE 9 is a flowchart of a representative method for using a haptic device as an input device;

FIGURE 10 illustrates a system for conveying depth information during a medical procedure; and

FIGURE 11 is a flowchart of a method for conveying depth information during a medical procedure.

DETAILED DESCRIPTION OF THE DRAWINGS

[0013] In the following description, like numerals refer to like elements. References to "surgeon" include any user of a computer-assisted surgical system, a surgeon being typically a primary user. References to "surgical procedure" include any medical procedure, whether interventional or non-interventional, an interventional procedure being typically the primary procedure.

[0014] A haptic device is a mechanical or electro-mechanical device that interacts and communicates with a user, such as a surgeon, using sensory information such as touch, force, velocity, position, and/or torque. Some robots may be used as haptic devices, though haptic devices may include devices that are not necessarily considered to be robots in a conventional sense. Haptic devices typically have little autonomy.

[0015] In general, a component of interest may be optionally coupled to the haptic devices. A component of interest may comprise a medical device, for example a surgical tool, a microscope, a laser range finder, a camera, a surgical light, an endoscope, an ultrasound probe, a radiotherapy device, interventional medical tools, rehabilitative systems for physical therapy, and/or the like. The terms "medical device", "surgical device" and "surgical tool" are used interchangeably herein.

[0016] For example, when used during surgery, such devices cooperatively hold a surgical instrument in conjunction with the surgeon. The surgeon moves the surgical instrument with the assistance of, or input from, the haptic device. Alternatively, in a teleoperation system, the haptic device may exclusively hold the surgical instrument. In such an implementation, the surgeon moves a "master" haptic device that is coupled to a "slave" device in order to interactively manipulate the surgical tool. In a teleoperation system, the master haptic device may be physically separated from the surgical site to provide a more ergonomic or immersive working position for the surgeon and/or allow the surgeon to perform the surgery remotely. In an impedance mode, a haptic device measures or senses the pose (position, orientation, velocity, and/or acceleration) of the surgical instrument and applies forces and/or torques ("wrench") to the instrument. In an "admittance" mode, a haptic device measures the wrench at some location on the device (or surgical instrument) and acts to modify the position of the instrument. There may be a static, quasi-static, or dynamic

mapping between the sensed pose and output wrench. Common mappings may include wrenches that result from the tool interacting with "virtual" objects defined by or with input from a user, which may include mathematical or simulated mechanical constraints.

[0017] A "haptic object" is used herein to describe such a mapping. In some cases, a haptic object may only produce non-zero outputs for certain joint angles of the haptic device, or only for certain endpoint positions and/or orientations of the haptic device. A haptic object may be a smoothly time varying mapping and/or may only exist for certain times. A haptic object may have an associated spatial or geometric representation that corresponds to locations where the mapping is discontinuous or has other properties that can be felt by the user when interacting with the haptic object. For example, if a haptic object only produces non-zero outputs when the endpoint of the haptic device lies within a spherical region in space, then it may be useful to present a corresponding spherical representation to the user. However, a haptic object may not necessarily have such a clearly defined boundary or similar internal structures. A haptic object may be active over the entire range of endpoint positions, endpoint orientations, and/or joint positions of the haptic device or only a portion of these ranges. There may be multiple haptic objects active at any given time, possibly in overlapping portions of space.

[0018] A "haptic cue" is used to describe an aspect of the mapping of a haptic object. Having a cue may convey information or produce a desired effect when the user interacts with the haptic object. Haptic cues and haptic objects do not necessarily correspond to user interface or software programming components in a particular embodiment and may be simply one of many ways to design, implement, present to the user the mappings between the inputs and outputs of the haptic device.

[0019] The reduction or elimination of autonomy increases the comfort level of users, such as surgeons. Any time a robot moves autonomously, the surgeon is no longer in control and must simply observe the robot's progress. Robot motions have to be slow to provide adequate time for the surgeon to respond should something unusual happen. If, however, a robot acts, at least mostly, in a passive manner, even if capable of active motions, then the surgeon does not cede control to the robot.

[0020] Using a device capable of active motions in such a way that it only acts like a passive device from the user's perspective has advantages. Active actuators can be used to counteract the effect of gravity, allowing a greater variety of mechanism designs. The device can be used in an autonomous mode for performing automated testing and service procedures.

[0021] FIGURE 1 is a diagrammatic illustration of an exemplary operating room in which a haptic device 113 is used with a computer-assisted surgery system 11. Computer-assisted surgery system 11 comprises a display device 30, an input device 34, and a processor based system 36, for example a computer. Input device 34 may

be any input device now known or later developed, for example, a keyboard, a mouse, a trackball, and/or the like. Display device 30 may be any display device now known or later developed for displaying two-dimensional and/or three-dimensional images, for example a monitor, a wearable display, a projection display, a head-mounted display, stereoscopic views, a display device capable of displaying image(s) projected from an image projecting device, for example a projector, and/or the like. If desired, display device 30 may be a display device capable of displaying a holographic image. If desired, display device 30 may be a touch screen and be used as an input device.

[0022] Haptic device 113 is, in the illustrated example, a robotic device. Haptic device 113 may be controlled by a processor based system, for example a computer 10. Computer 20 may also include power amplification and input/output hardware. Haptic device 113 may communicate with computer-assisted surgery system 11 by any communication mechanism now known or later developed, whether wired or wireless.

[0023] Also shown in FIGURE 1 is a storage medium 12 coupled to processor based system 36. Storage medium 12 may accept a digital medium which stores software and/or other data. A surgical tool or instrument 112 is shown coupled to haptic device 113. Surgical tool 112 is preferably mechanically coupled to haptic device 113, such as by attaching or fastening it. However, if desired, surgical tool 112 may be coupled, either directly or indirectly, to haptic device 113 by any other method, for example magnetically. If desired, vacuum may be used to couple surgical tool 112 to haptic device 113. Surgical tool 112 may be haptically controlled by a surgeon remotely or haptically controlled by a surgeon 116 present in proximity to surgical tool 112.

[0024] Haptic object 110 is a virtual object used to guide and/or constrain the movement and operations of surgical tool 112 to a target area inside a patient's anatomy 114, for example the patient's leg. In this example, haptic object 110 is used to aid the surgeon to target and approach the intended anatomical site of the patient. Haptic feedback forces are used to slow and/or stop the surgical tool's movement if it is detected that a portion of surgical tool 112 will intrude or cross over predefined boundaries of the haptic object. Furthermore, haptic feedback forces can also be used to attract (or repulse) surgical tool 112 toward (or away from) haptic object 110 and to (or away from) the target. If desired, surgeon 116 may be presented with a representation of the anatomy being operated on and/or a virtual representation of surgical tool 112 and/or haptic object 110 on display 30.

[0025] When surgical tool 112 is haptically controlled by a surgeon remotely, for example when conducting a teleoperation, the surgeon controls the movement of the surgical tool using the master haptic device and/or a real or simulated display of the surgical tool, patient anatomy, and/or additional haptic or visual objects designed to aid the surgical procedure. Haptic feedback forces may be transmitted by slave haptic device 113 to the surgeon at

the remote location via the master haptic device to guide the surgeon. Alternatively, the haptic feedback forces may be generated at the master device and transmitted to the surgeon directly. In some cases either the slave or master device may be a positioning device with little or no haptic capabilities.

[0026] The CAS system preferably includes a localization or tracking system that determines or tracks the position and/or orientation of various trackable objects, such as surgical instruments, tools, haptic devices, patients, and/or the like. The tracking system continuously determines, or tracks, the position of one or more trackable markers disposed on, incorporated into, or inherently a part of the trackable objects, with respect to a three-dimensional coordinate frame of reference. Markers can take several forms, including those that can be located using optical (or visual), magnetic or acoustical methods. Furthermore, at least in the case of optical or visual systems, location of an object's position may be based on intrinsic features, landmarks, shape, color, or other visual appearances, that, in effect, function as recognizable markers.

[0027] Any type of tracking system may be used, including optical, magnetic, and/or acoustic systems, that may or may not rely on markers. Present day tracking systems are typically optical, functioning primarily in the infrared range. They usually include a stationary stereo camera pair that is focused around the area of interest and sensitive to infrared radiation. Markers emit infrared radiation, either actively or passively. An example of an active marker is a light emitting diodes (LEDs). An example of a passive marker is a reflective marker, such as ball-shaped marker with a surface that reflects incident infrared radiation. Passive systems require a an infrared radiation source to illuminate the area of focus. A magnetic system may have a stationary field generator that emits a magnetic field that is sensed by small coils integrated into the tracked tools.

[0028] With information from the tracking system on the location of the trackable markers, CAS system 11 is programmed to be able to determine the three-dimensional coordinates of an end point or tip of a tool and, optionally, its primary axis using predefined or known (e.g. from calibration) geometrical relationships between trackable markers on the tool and the end point and/or axis of the tool. A patient, or portions of the patient's anatomy, can also be tracked by attachment of arrays of trackable markers. In the illustrated example, the localizer is an optical tracking system that comprises one or more cameras 14 that preferably track a probe 16. As shown in FIGURE 1, cameras 14 may be coupled to processor based system 36. If desired, cameras 14 may be coupled to computer 10. Probe 16 may be a conventional probe now known or later developed. If desired, the probe may be rigidly attached to haptic device 113 or integrated into the design of haptic device 113.

[0029] If desired, in an implementation, processor based system 36 may comprise a portion of image guided

surgery software to provide minimal user functionality e.g., retrieval of previously saved surgical information, preoperative surgical planning, determining the position of the tip and axis of instruments, registering a patient and preoperative and/or intraoperative diagnostic image datasets to the coordinate system of the tracking system, etc. Image guided surgery using this method may not be possible with the computer alone. As such, full user functionality may be enabled by providing the proper digital medium to storage medium 12 coupled to computer 36. The digital medium may comprise an application specific software module. The digital medium may also comprise descriptive information concerning the surgical tools and other accessories. The application specific software module may be used to assist a surgeon with planning and/or navigation during specific types of procedures. For example, the software module may display predefined pages or images corresponding to specific steps or stages of a surgical procedure. At a particular stage or part of a module, a surgeon may be automatically prompted to perform certain tasks or to define or enter specific data that will permit, for example, the module to determine and display appropriate placement and alignment of instrumentation or implants or provide feedback to the surgeon. Other pages may be set up to display diagnostic images for navigation and to provide certain data that is calculated by the system for feedback to the surgeon. Instead of or in addition to using visual means, the CAS system could also communicate information in ways, including using audibly (e.g. using voice synthesis) and tactilely, such as by using a haptic interface of device. For example, in addition to indicating visually a trajectory for a drill or saw on the screen, a CAS system may feedback to a surgeon information whether he is nearing some object or is on course with an audible sound. To further reduce the burden on the surgeon, the module may automatically detect the stage of the procedure by recognizing the instrument picked up by a surgeon and move immediately to the part of the program in which that tool is used.

[0030] The software module may be such that it can only be used a predefined number of times. If desired, the software module functions only when used in conjunction with the portion of the image guided surgery software that resides on computer 36. The software which resides on computer 36 in conjunction with the software on the digital medium processes electronic medical diagnostic images, registers the acquired images to the patient's anatomy, and/or registers the acquired images to any other acquired imaging modalities, e.g., fluoroscopy to CT, MRI, etc. If desired, the image datasets may be time variant, i.e. image datasets taken at different times may be used. Media storing the software module can be sold bundled with disposable instruments specifically intended for the procedure. Thus, the software module need not be distributed with the CAS system. Furthermore, the software module can be designed to work with specific tools and implants and distributed with

those tools and implants. Moreover, CAS system can be used in some procedures without the diagnostic image datasets, with only the patient being registered. Thus, the CAS system need not support the use of diagnostic images in some applications - i.e. an imageless application.

[0031] An example of the illustrated robotic arm is a robotic arm manufactured by Barrett Technology, and referred to as the "Whole-Arm Manipulator" or "WAM". This robotic arm has a cable transmission, which provides high bandwidth, backdrivability, and force fidelity. However, other robotic devices capable of impedance or admittance modes of haptic interaction could be used. For example, direct-drive systems or systems with other types of low-friction transmissions or systems with a combination of transmission types may also be well-suited to serve as a haptic device for surgical applications. Furthermore, the haptic device need not necessarily take the form of a robotic arm. The WAM robotic arm has a four degrees of freedom of movement. However, it is augmented by a 1-DOF direct-drive wrist for trajectory-based medical applications. If desired, degrees of freedom may be added or removed without affecting the scope of the illustrated invention.

[0032] Though it has some advantages, a cable transmission has some disadvantages. It requires careful installation and maintenance to prevent the possibility of failure during a procedure. Furthermore, a cable transmission is not as stiff as geared transmissions. Similar deficiencies may also be found in haptic devices using other types of transmissions.

[0033] These deficiencies may be addressed by augmenting existing position sensors that are mounted on drive motors with additional redundant sensors. These sensors may be of various types, including without limitation rotary encoders or resolvers, tilt sensors, heading (compass) sensors, sensors that detect the direction of gravity, an optical, magnetic or acoustical tracking system (such as optical camera systems of the type commonly used to track surgical instruments), or laser-based position sensing. The output of these sensors can be compared with the original sensors to detect discrepancies that may indicate problems in the transmissions or sensors. In addition, the added sensors can be used to detect both low bandwidth deflections in the cable transmissions, which the system can then easily compensate for using well-known control techniques. The sensor may also detect the high bandwidth deflections in the cable transmissions, which can provide an additional input to the servo loop and permit improved stability of the servo system, using well-known control techniques for systems that include sensors on both the drive and load sides of a transmission. The sensor can also improve the accuracy of the determination of the pose of the arm by reducing or eliminating the effect of deflections of the arm links and/or transmission. Such sensors could also be used to overcome similar deficiencies in robotic devices using other types of transmission systems.

[0034] When performing surgery, a haptic device capable of holding a tool, e.g. a drill guide or other similar constraint or attachment mechanism for surgical tools is positioned relative to the patient such that it can attain the poses appropriate for a variety of approaches for a particular procedure. It is also registered to the physical anatomy such that it can correlate information in diagnostic or planning image datasets, which can be two or three dimensional, to locations in physical space using well-known registration techniques. The image datasets may be one or more images generated using for example, magnetic resonance imaging (MRI), computer tomography (CT), positron emission tomography (PET), magnetic resonance angiography (MRA), single photon emission computed tomography (SPECT), magnetic resonance venography (MRV), contrast enhanced MR venography (CEMRV), CT angiography, CT myelography, MR angiography, MR myelography, fluoroscopy, optical imaging, isotope imaging, ultrasound microscopy, laproscopic ultrasound, and MR spectrometry. Such images may include, for example, x-ray images, digital x-ray images, computer tomography images, MRI images, MRA images, MR spectrometric images, PET images, MRV images, SPECT images, CEMRV images, CT angiographic images, CT myelographic images, MR myelographic images, flair images, two-dimensional fluoroscopic images, three-dimensional fluoroscopic images, two-dimensional ultrasonic images, three-dimensional ultrasonic images, ultrasound microscopy images, laproscopic ultrasound images, optical images, isotopic images, laser depth maps, line arts, sketches, "cartoon" representations, holographic images, and/or the like.

[0035] Features to be avoided, such as blood vessels, tendons, nerves, and critical areas of the brain can be automatically, semi-automatically, or manually defined on the image datasets. Features targeted by the procedure, such as tumors, osteophytes, anatomical targets for deep-brain stimulation, biopsy sites, anatomical sites for implant placement, or other regions of the anatomy can also be automatically, semi-automatically, or manually defined on the image datasets.

[0036] The image dataset(s), coupled with definitions of features to be avoided, can be used to create haptic "cues" that indicate to the surgeon that a violation of sensitive anatomy is taking place. A general function of these types of cues is to apply forces and/or torques that tend to repulse the haptic device from poses where an instrument attached to the device would, for example, impact the defined critical features. Similarly, the image dataset(s), coupled with the definitions of features to be targeted can also used to create haptic cues that indicate to the surgeon that the desired target region would be reached by the surgical instrument appropriately attached to the haptic arm. A general function of these types of cues is to attract the haptic device to such poses or lock the haptic device into these poses once they are attained.

[0037] While the haptic device can be deployed as a

fully integrated component of a computer-aided surgery system, there are advantages to having the haptic device act as an optional peripheral to such a system. The system is then convenient to use for procedures that do not require the use of the haptic device. There are also development and architectural advantages to this approach. The haptic device will likely require a real-time operating system or special motion control hardware to generate high-frequency updates for the haptic control system. The computer-aided surgery system will have different requirements, such as fast graphics processing hardware and compatibility requirements with a range of user input and output devices, so that there are advantages of having two computer systems to meet the differing uses. Separating the computer surgery and haptic arm components also has safety advantages. The haptic device therefore preferably contains only computing software and hardware that is necessary for ensuring high-performance, stable, and safe operation. The computer aided surgery system can contain software and hardware for connecting to a hospital network, displaying various graphical views, supporting various user input/output devices, managing libraries of implant and instrument databases, and/or any other functionality useful in such a system. This architecture also allows developers with minimal knowledge of haptic systems to build applications that use the haptic device. The physical interface between these two systems can be wired or wireless, such as a serial, USB, or other cable communications interface, or wireless ethernet, wireless serial, infra-red or other wireless communications system. The software interface between these systems would include a set of commands that allows the computer aided surgery system to control operation of the haptic device. For example, the computer-aided surgery system may send a command to the haptic device requesting it to enter into a joystick-like input mode with certain stiffness parameters. The haptic arm system checks if the parameters are safe and otherwise acceptable, and then enters into such a mode or responds with an appropriate error message. The computer-aided surgery system and haptic device may also be integrated into a single system unit, or may be implemented using a single or a multi-processor computing device. The CAS system, the haptic device and/or computer 10 may also be integrated into another piece of equipment, such as an imaging equipment (e.g., fluoroscopy, CT, MR, ultrasound, and/or the like), an equipment cart in the room where the medical procedure is performed, and/or the like.

[0038] Referring to FIGURE 2, representative "haptic object" 20 is a two-dimensional virtual plane. However, it is only an example of haptic objects generally, which may be zero (e.g. a point), one (e.g. a virtual line or path), two (e.g. a virtual plane or flat surface), or three dimensional (e.g. a virtual curved surface, a cube or other solid object), and may have simple or complex geometric shapes. Haptic object 20 is preferably defined with respect to the space of a physical object, such as patient

anatomy 114. Haptic object 20 is defined to guide and/or constrain the movement of haptic device 113. The distance between haptic device 113 and haptic object 20 is shown in FIGURE 2 by X and the distance between patient's anatomy 114 and haptic object 20 is shown by X_1 . Haptic object 20 may be used in connection with generating force feedback on haptic device 113. The generation of force feedback may also depend on various factors, for example, the velocity at which haptic device 113 is approaching patient's anatomy 114, the position of haptic device 113, haptic object 20, and/or the like. An algorithm which computes the current position of haptic device 113 relative to haptic object 20 may be used to provide information to the surgeon about the location of haptic device 113 relative to haptic object 20. When haptic device 113 comes within a predefined distance of haptic object 20, a stiffness parameter may be changed to make it more difficult to move haptic device 113. If desired, force may be applied in a direction away from anatomy 114 to resist the movement of haptic device 113 toward anatomy 114 or to move haptic device 113 away from anatomy 114.

[0039] It may not be appropriate to implement rigid haptic objects, such as virtual surfaces and walls, in certain cases. A surgeon will lose the ability to feel the anatomy in any direction that is rigidly constrained by the haptic device. In many applications, precise localization of anatomical features cannot be achieved by simply combining diagnostic datasets with a tool tracking system or precision robotic devices. Changes in the anatomy after the diagnostic datasets are taken, unsensed motion in the kinematic chain connecting the anatomical features of interest and the tracking system's camera or haptic device, registration errors, and inaccuracies in the localization devices will contribute to positioning errors. Although CAS systems may be used to position the surgical tool very close to the target region, more accurate positioning is often difficult or prohibitively costly. In some medical procedures, such as pedicle screw placement in the upper thoracic and cervical portions of the spine, deep brain neurosurgical procedures, etc., a slight inaccuracy may adversely affect the medical procedure being performed. Therefore, it is desirable in these types of procedures that a surgeon retain an ability to feel the anatomy.

[0040] Haptic devices can be used for registering patients to CAS systems and diagnostic data sets of the patient's anatomy, for example, by attaching a probe and touching it to a few selected anatomical landmarks, implanted fiducials, or multiple points on a surface of interest. They can be used for haptic exploration of diagnostic datasets to augment the visual display of this information. This exploration may occur intra-operatively while registered to the actual patient anatomy or pre-operatively in a purely virtual way. This haptic exploration is especially useful for exploring complex three-dimensional structures, where the surgeon's highly developed sense of touch can be used to explore complexities or subtleties

of the dataset that may be difficult or impossible to display adequately on a two-dimensional or even three-dimensional visual display.

[0041] While performing traditional freehand surgery, surgeons rely on local anatomical features to ensure proper positioning of the surgical tool. If the ability of the surgeon to feel the patient anatomy is preserved, the surgeon can explore the local anatomy and correct these localization errors based on his expert knowledge of structures of interest. In this way, the final positioning is determined by nearby anatomical features rather than a tracking system sitting across the operating room or a robot whose base may not be rigidly connected to the patient.

[0042] A portion of surgical tool 112 coupled with a haptic device, for example the tip of surgical tool 112, may be used to sense properties of the local anatomy. The properties of the local anatomy may be used to position surgical tool 112 or to verify the proper positioning of surgical tool 112. The properties that may be sensed or monitored by the tool include electrical properties of the anatomy, force, pressure, stiffness, conductivity, etc. The information from the tip may be provided back to CAS system 11. The information may then, if desired, be correlated with information from diagnostic image datasets of the patient. If desired, information from the tool may be used to augment or replace the information from the image datasets. In either case the information may be used for better placement of surgical tool 112.

[0043] Location or position information of the tool may be sensed and provided back to CAS system 11 without the use of a separate sensor. The surgeon may manually move surgical tool 112 to the desired position. Position information of the tip of surgical tool 112 in the desired position may be determined directly by CAS system 11 and/or computer 10 without the use of a separate sensor. Other properties of the anatomy may be sensed by placing sensors at the tip of surgical tool 112. The output from the sensors may be provided back to CAS system 11 for processing.

[0044] The collected information may be used for a variety of purposes, such as alerting the user to registration errors, fully or partially correcting registration errors, displaying graphical representations of the information on display device 30, defining haptic objects to assist the user, displaying graphical representations of the information on display device 30 superimposed over one or more images of the anatomy, and/or the like. If desired, the collected information may be logged for use in machine learning techniques.

[0045] The combination of a haptic device and a CAS system is also useful for combining haptic exploration of diagnostic datasets and use of the haptic device as a primary input device for planning. In this way, haptic exploration naturally leads the user to a suitable plan for performing a procedure. Additionally, in some circumstances it is possible to have the haptic device and the tool coupled with it in the correct position for performing

a procedure as a result of this exploration/planning process, eliminating the need to move the haptic device into position as a separate step.

[0046] Referring to FIGURE 3A, it may be desirable in certain procedures to confine the surgical instrument to a small working volume, in which case it may stay within a working area inside a haptic object during the entire procedure. It may be necessary in certain cases to segment or define manually certain important features, but for most applications automated segmentation of the diagnostic datasets will be sufficient for providing appropriate haptic feedback.

[0047] In the illustrated embodiment, one or more attractive haptic objects are associated with a target region for performing the surgical procedure and one or more repulsive haptic objects are associated with anatomical features to be avoided during the surgical procedure. For example, as shown in FIGURE 3A, haptic object 22 defines a working area or volume for constraining movement of surgical tool 112. On the other hand, as shown in FIGURE 3B, haptic object 24 defines a working area or volume for constraining movement of surgical tool 112 so that it is prevented from coming close to critical regions, such as nerves 25, organs 27, etc. For example, once the haptic objects are defined, the user performs surgical planning by pushing haptic device 113 around until a pose is found where the cues from the attractive haptic objects are active indicating that surgical tool 112, when attached to haptic device 113, would reach the target region, and where the cues from the repulsive haptic objects are inactive, indicating that surgical tool 112 would not penetrate any of the defined sensitive anatomical regions. In most cases, these requirements will not fully constrain the pose of the arm and the user can move the arm within this range of acceptable approaches based on any secondary criteria a user finds appropriate. In some cases, the arm may achieve an equilibrium state where multiple attractive or repulsive haptic cues act in opposite directions. The user might mistake this configuration to be an acceptable pose, even though the target region might not be reached or the critical anatomy regions might be violated. The user may be alerted to this situation in a number of ways, including audible or visual indicators, or by a haptic cue such as a vibration of haptic device 113. The user could then correct this situation by pushing the haptic device away from this pose. Once in a pose satisfactory to the user, haptic device 113 can be locked into position, using hardware brakes, control servoing techniques, or any other appropriate method to provide a stable physical reference for the surgical procedure.

[0048] If fine adjustments are desired, the haptic device can be operated using a mode where motion scaling, constraints, or other methods are used to make such corrections that might otherwise be beyond the dexterity of the surgeon. For example, a control servo can be enabled to lock the device to a certain finite stiffness at the approximate desired pose. The surgeon can then make

fine adjustments to this pose using a variety of methods. For example, the surgeon may use a touch screen, a keyboard, a mouse, a trackball or voice inputs. If desired, the surgeon may push the end of the haptic device in the desired direction. In response to these inputs, the system would adjust the desired pose appropriately, possibly in small increments that would be difficult to achieve by direct positioning of the haptic device. It may be desirable to lock only a portion of the pose so that the surgeon can focus on a more limited number of adjustments at one time. This fine adjustment may occur after the coarse haptic positioning is complete, simultaneous with the coarse haptic positioning, or interleaved with the coarse haptic positioning.

[0049] For example, selecting a trajectory for a cranial neurosurgical procedure such as a biopsy, tumor resection, or deep-brain stimulation is a complicated 3-D planning problem. The surgeon must find a path to a target area while avoiding blood vessels and sensitive areas of the brain. If these regions can be turned into repulsive haptic objects, planning such a procedure may be as simple as applying a haptic constraint that keeps the trajectory of a tool guide passing through the target of interest, and allowing the user to pivot the device about this point until it settles into a suitable pose where none of the repulsive haptic objects are violated.

[0050] FIGURE 3C is a flowchart of an exemplary method 140 for intra-operative haptic planning of a surgical procedure. Haptic device 113 is placed in the operating room such that surgical tool 112 may be positioned over a large portion of a clinically reasonable range of surgical approaches for a given surgical procedure. Surgical planning using method 140 is performed in the presence of the patient and preferably without surgical tool 112 being coupled to haptic device 113. Surgical tool 112 may be a non-contact medical device, such as a diagnostic or therapeutic radiation source. If desired, surgical planning using method 140 may be performed with surgical tool 112 coupled to haptic device 113 but being in a retracted state. When surgical tool 112 comprises a non-contact medical device, it is preferably in a disabled state. A representation of the anatomy of the patient to be operated on may be displayed on display device 30 along with a "virtual tool". The virtual tool may be a high-fidelity representation or a schematic representation of surgical tool 112, such as an axis, a point, or other feature of surgical tool 112. The virtual tool indicates relative to the anatomy of the patient, the position and/or angle of surgical tool 112 or some portion thereof if the surgical tool had been coupled to haptic device 113 in its normal or enabled state.

[0051] In step 142, haptic device 113 is registered to the anatomy of the patient. If desired, the representation of the anatomy of the patient displayed on display device 30 may also be registered with the anatomy of the patient so that information in diagnostic or planning datasets may be correlated to locations in the physical space. Any method for registering, now known or later developed,

may be used. In step 144, the target region is defined. The target region may be, for example, a tumor, an osteophyte, an anatomical target for deep-brain stimulation, a bone channel, and/or the like. The target region may be defined in any manner now known or later developed. For example, the user, such as the surgeon, may manually identify the target region on display device 30. If desired, the surgeon may define the target region by touching one or more points on the target region or circling the target region on display device 30 with a tool. Alternatively, the surgeon may define the target region by pointing a tool mounting axis of haptic device 113 to the target region or by using haptic device 113 as an input device. Preferably, the identified target region is automatically highlighted on display device 30. The tool mounting axis of haptic device 113 may be of any shape, for example curved, straight, and/or the like. Regardless of the manner in which the target region is defined, it is desirable that once defined, the target region be clearly displayed on display device 30 for confirmation. One or more attractive haptic objects, such as haptic object 22 of FIGURE 3A, may be associated with the target region.

[0052] In step 146, anatomical obstacles to be avoided are defined. The anatomical obstacles comprise features to be avoided during surgery, such as major blood vessels, tendons, nerves, critical areas of the brain, organs, healthy bones or other tissues, and/or the like. The anatomical obstacles may be defined in any manner now known or later developed. For example, the surgeon may manually identify the anatomical obstacles on display device 30. If desired, the surgeon may define the anatomical obstacles by touching one or more points on the anatomical obstacles or circling the anatomical obstacles on display device 30 with a tool. Alternatively, the surgeon may define the anatomical obstacles by pointing the tool mounting axis of haptic device 113 to the anatomical obstacles or by using haptic device 113 as an input device. Preferably, the identified anatomical obstacles are highlighted on display device 30. Regardless of the manner in which the anatomical obstacles are defined, it is desirable that, once defined, the anatomical obstacles are clearly displayed on display device 30 for confirmation. One or more repulsive haptic objects, such as haptic object 24 of FIGURE 3B, may be associated with the defined anatomical obstacles. Preferably, each anatomical obstacle has one repulsive haptic object associated with it, although if desired more than one repulsive haptic object may be associated with an anatomical obstacle.

[0053] In step 148, haptic device 113 is positioned, preferably by the surgeon, such that if surgical tool 112 were coupled to haptic device 113 or if surgical tool 112 were in an operating state, then the appropriate portion of the surgical tool would have the desired relationship with the target region. For example, when coupled to haptic device 113, surgical tool 112 would penetrate the target region. Surgical tool 112 is in its operating state when it is coupled to haptic device 113 and is not retracted and/or is not disabled. Step 148 is preferably performed

without regard to whether or not the tool may intersect the anatomical obstacles in this position. A virtual tool displayed on display device 30 is such that its position and orientation corresponds to the position and orientation of surgical tool 112 if surgical tool 112 had been mounted on haptic device 113 or if surgical tool 112 were in its normal operating state. Thus, the surgeon may position haptic device 113 in the desired pose while viewing the display on device 30, such that the virtual tool has the appropriate relation with the target region.

[0054] In step 152, a determination is made as to whether the virtual tool is intersecting any anatomical obstacles. If the virtual tool is not intersecting any anatomical obstacles, then the process starting at step 162 is executed. Otherwise, the process starting at step 154 is executed. In step 154, haptic cues are provided by haptic device 113 to the user. The haptic cues may be provided to the user based on one or more haptic objects, for example the attractive haptic object(s) associated with the target region and/or the repulsive haptic object(s) associated with the anatomical obstacles. The repulsive haptic object(s) generate forces and/or torques that guide haptic device 113 away from poses where the virtual tool would intersect the anatomical obstacles. Preferably, the repulsive haptic cues are active when the virtual tool penetrates the repulsive haptic objects or is in proximity to the repulsive haptic objects. The attractive haptic object(s) cause the haptic device to generate forces and/or torques that guide haptic device 113 toward poses where the virtual tool has the desired relationship with the target region.

[0055] It is possible that the position of haptic device 113 may be such that cues from multiple haptic objects cancel each other out even though the virtual tool may be violating the anatomical obstacles. As such, in step 156, a determination is made as to whether haptic cues from multiple obstacles are canceling each other out. If haptic cues from multiple obstacles are not canceling each other out, then the process starting at step 158 may be executed. If haptic cues from multiple obstacles are canceling each other out, then in step 160, a special haptic cue, for example a vibration, may be provided to alert the user of this situation and the process starting at step 158 may be executed.

[0056] In step 158, haptic device 113 is moved, preferably by the surgeon. Haptic device 113 is preferably moved based at least in part on the haptic cues provided by haptic device 113 to the surgeon. The position of surgical tool 112 had it been coupled to haptic device 113 is tracked by the virtual tool and displayed on display device 30. Preferably, the user moves haptic device 113 until an equilibrium pose is found. In the equilibrium position, the cues created by the attractive haptic objects are active and those created by the repulsive haptic objects are inactive. The process starting at step 152 may then be executed to determine whether the virtual tool is intersecting any anatomical obstacles.

[0057] In step 162, a determination is made as to

whether the user is satisfied with the trajectory to the target region. The user may make this determination by viewing the virtual tool relative to the target region as illustrated on display device 30. If the user is not satisfied with the position and/or the orientation of the virtual tool, then the process starting at step 158 may be executed. If the user is satisfied with the position and the orientation of the virtual tool relative to the target region and the obstacles, then the process starting at step 164 may be executed. The user may indicate its satisfaction in one or more of a number of ways. For example, the user may issue a voice command to indicate that it is satisfied with the position and orientation of the virtual tool. If desired, the user may activate a foot pedal or a button associated with the computer-assisted surgery system or haptic device 113 to indicate its satisfaction. If desired, the user may indicate its satisfaction via a touch screen, a keyboard, a mouse, and/or the like, associated with the computer-assisted surgery system or haptic device 113. In step 164, haptic device 113 may be locked in the current pose.

[0058] Once the pose of haptic device 113 is locked, the surgical procedure may be performed, for example by coupling surgical tool 112 to haptic device 113 or by placing surgical tool 112 in its fully functional or operational configuration. Because the pose of surgical tool 112 relative to the anatomy has already been determined with the aid of the virtual tool, surgical tool 112 will achieve the desired position when it is coupled to haptic device 113 or when it is configured for use.

[0059] The illustrated method for intra-operative haptic planning of a surgical procedure may be implemented in software, hardware, or a combination of both software and hardware. The steps discussed herein need not be performed in the stated order. Several of the steps could be performed concurrently with each other. Furthermore, if desired, one or more of the above described steps may be optional or may be combined without departing from the scope of the present invention. Furthermore, one or more of the above described steps may be performed outside the operating room to save time spent in the operating room. For example, steps 144 and 146 may be performed prior to bringing the patient into the operating room and prior to step 142..

[0060] A technical advantage of this exemplary embodiment for intra-operative haptic planning of a surgical procedure is that it provides for tighter coupling of the planning and execution phases of the surgical procedure. Planning for the surgical procedure is preferably performed intra-operatively with respect to the patient. Thus, when planning is complete, the haptic device is in position for executing the surgical plan. No additional motion of the haptic device is required to initiate the execution phase. Furthermore, by using a virtual tool to determine the trajectory of the real surgical tool to the target region, injury to anatomical features may be avoided during the planning phase.

[0061] A haptic object may be of any shape or size. As

shown in FIGURE 4A, haptic object 26 may be funnel shaped to guide a medical device, for example a surgical tool, coupled to haptic device 113 toward a target area on anatomy 114 of the patient. The path of the haptic object may depend on a surgical plan. An algorithm may be used to create the funnel shaped haptic object illustrated in FIGURE 4A. The information desired to create the funnel shaped haptic object may be based on a surgical plan. If desired, haptic object 26 may move with haptic device 113. This allows guidance of the surgical tool toward the target area from the current position of haptic device 113. Thus, the surgical tool may be guided toward the target area from any position in proximity to anatomy 114. Furthermore, the surgical tool may be guided from a current pose to a desired pose.

[0062] Haptic object 26 may be of any shape, for example, a line, a curve, a cylinder, a funnel, and/or the like. Haptic object 26 is, in the illustrated example, defined as a virtual pathway to facilitate interactive positioning of haptic device 113 and/or surgical tool 112 coupled to haptic device 113 at a desired position. Haptic object 26 guides surgical tool 112 coupled to haptic device 113 from an initial position and/or pose toward a target area and/or a desired pose relative to anatomy 114 of the patient. If desired, haptic object 26 may guide surgical tool 112 to the target area along a path or trajectory 28. The path or trajectory 28 from the initial position to the target area may depend on the surgical plan. The path may be of any shape, for example a straight line, a curve, a funnel, a cylinder, and/or the like. Based at least in part on haptic object 26, haptic forces are applied to haptic device 113 as the user moves the surgical tool or haptic device to guide the user in moving the surgical tool 112 along path 28 toward the target area.

[0063] Haptic object 26 is preferably steerable or reconfigurable. For example, the haptic object may be defined to move or to change position and/or orientation as the haptic device (or the surgical tool or instrument coupled to it) moves. This allows, for example, the user to guide surgical tool 112 toward the target area from almost any position in proximity to anatomy 114. This reconfigurability or steerability of haptic object 26 also allows the user to guide surgical tool 112 to the desired pose from its current position and/or pose.

[0064] Haptic object 26 may also be allowed to move from a pre-defined path or position in order to avoid obstacles, preferably without deviating from the target area. This is especially useful in avoiding obstacles in the path of haptic device 113 that computer-assisted surgery system 11 may not be aware of. Thus, surgical tool 112 may be steered by the user toward the target area without colliding with other surgical tools and equipment, the patient, or operating room staff.

[0065] Steering, moving or reconfiguring is, in a preferred embodiment, in response to application of a force or torque on the haptic device or the haptic object that exceeds a threshold value. For example, if the user pushes haptic device 113 against the haptic object with a force

that exceeds a threshold, then the haptic object will be repositioned, reconfigured or modified to a new configuration based on the input force or torque. Preferably, haptic object 26 moves in the direction of the force or torque thereby providing an intuitive method for repositioning or realigning haptic object 26.

[0066] If desired, haptic object 26 may move to a new location if the target area is changed. Thus, as shown in FIGURE 4A, haptic object 26 may be moved from an initial position to a new position, as shown by haptic object 26', in response to a change in the target area.

[0067] In an alternative embodiment, haptic object 26 may be defined as virtual linear or non-linear springs, dampers, clutches, and/or the like, logically applied to one or more joints of haptic device 113. One or more joints of haptic device 113 may comprise virtual detents corresponding to the final desired pose of haptic device 113. Preferably, standard joint-space control techniques are used to implement the haptic objects at each joint and conventional inverse kinematics techniques are used to determine the joint positions corresponding to the desired Cartesian position/angle of the haptic device. The user may avoid obstacles by specifying the sequence in which the joints of haptic device 113 "lock" into their detents. The user may be permitted to modify the selected sequence by "unlocking" joints during positioning of surgical tool 112, especially if the sequence is determined through a trial-and-error technique. Interactive unlocking of a joint by the user may be based on the magnitude, duration or dynamic property of the force and/or the torque at that joint by the user. A graphical user interface, a footswitch, a keyboard, a button, and/or the like, communicatively coupled to haptic device 113 may be used to unlock a joint. If desired, once the desired pose is achieved, the ability to unlock the joints may be disabled to prevent inadvertent motion of haptic device 113.

[0068] In another alternative embodiment, haptic object 26 may be defined by virtual linear or non-linear springs, dampers, clutches, and/or the like, logically associated with one or more redundant degrees-of-freedom of haptic device 113. For example, if a haptic device comprising of four joints is used to position the tip of surgical tool 112, then the haptic device 113 may be moved along one of the degrees-of-freedom without affecting the position of the tip. Haptic object 26 may be associated with the redundant degree-of-freedom to permit the user to interactively modify the position of haptic device 113.

[0069] FIGURE 4B is a flowchart of a method 170 for interactive haptic positioning of a medical device, for example surgical tool 112 mounted to haptic device 113, using a reconfigurable or steerable haptic object 26, all as shown in FIGURE 4A. If desired, the reconfigurability of the haptic object may be user-configurable such that the user may turn this feature ON or OFF depending on the application or depending on the step of a particular application. When the reconfiguration feature is enabled, method 170 is preferably executed periodically.

[0070] In step 172, a determination is made as to whether the medical device is in a desired pose. This determination may be made by using sensing information from one or more position sensors, such as encoders or resolvers, which may be integrated in the haptic device. If desired, this determination may be made by using sensing information from an external device, such as a laser interferometer, a camera, and/or other tracking device.

[0071] If in step 172, it is determined that the medical device is in the desired pose, then in step 174, haptic interaction forces and/or torques to maintain the pose of the medical device are determined. This determination may be made based at least in part on the position and/or velocity of the haptic device and/or the medical device relative to the desired pose. Any control algorithm now known or later developed may be used for this determination, for example, robust control, adaptive control, hybrid position/force control, Proportional-Derivative (PD) control, Proportional-Integral-Derivative (PID) control, Cartesian based control, inverse Jacobian control, transpose Jacobian control, and/or the like. The determined haptic interaction forces and/or torques may be transformed and provided to the haptic device. If in step 172, it is determined that the medical device is not in the desired pose, then in step 176, haptic interaction forces and/or torques to maintain the medical device within a haptic object are determined so that the medical device may be guided toward the target area. In step 178, a determination is made as to whether the result of at least one scalar valued function of the haptic interaction forces and/or torques calculated in step 176 exceeds at least one reconfiguration threshold. The reconfiguration threshold may be user-configurable. A scalar valued function computes a value based on one or more input values. In an exemplary embodiment, the scalar valued function may be the square root of the sum of the squares of the input values. A scalar valued function may be applied to one or more haptic interaction forces to provide a scalar value. The resulting scalar value may be compared to the reconfiguration threshold. Dynamic properties of the haptic interaction forces and/or torques, such as direction, duration, and/or the like, may also be considered.

[0072] If the result of none of the scalar valued functions exceeds the reconfiguration threshold, then the process ends. Otherwise in step 180, haptic object 26 is modified based at least in part on the haptic interaction forces and/or torques. For example, if the surgeon guides the haptic device such that the haptic device in effect pushes against the haptic object, the value of the scalar valued function of the haptic interaction forces and/or torques generated to keep the haptic device within the haptic object may exceed the reconfiguration threshold. In such a case, it is desirable that the haptic object be modified, for example in the direction of the force applied by the surgeon such that the surgical tool is maintained within the haptic object. The modification of the haptic object may comprise changing the size of the haptic object,

changing the shape of the haptic object, pivoting the haptic object along the target area of the patient's anatomy, and/or the like.

[0073] A technical advantage of this exemplary embodiment for interactive haptic positioning of a medical device is that by modifying a haptic object based on the haptic interaction forces and/or torques, greater flexibility is provided to the surgeon. Thus, the surgeon may approach the target area without colliding with other surgical tools and equipment, the patient or operating room staff, and still be provided with haptic cues to enable the surgeon to guide the surgical tool to the target area.

[0074] The illustrated method for interactive positioning of a haptic device using a reconfigurable (repositionable, steerable) haptic object may be used in any situation where it is desirable to move the haptic device, optionally coupling a component of interest, such as a medical device, for example a surgical tool, and/or the like, within a cluttered or safety-critical environment. If desired, the haptic device itself may be the component of interest. The illustrated method may be used in a variety of applications, such as a procedure where virtual constraints and/or haptic cues are used to move the component of interest into a predefined location and/or orientation and safety or other concerns make autonomous device motions undesirable. For example, the method may be used in an implant placement procedure, a biopsy procedure, deposition of therapeutic implants, diagnostic palpation of internal or external anatomy, tumor removal, radiation therapy, artistic or commercial sculpting, artistic or commercial painting, scientific or engineering experiments, such as surface digitizing, sample collection, circuit board probing, manual assembly, fabrication or testing of mechanical and/or electronic components or assemblies, material handling, and/or the like. For rehabilitation and/or physical therapy applications, a haptic device may be coupled to the patient using an orthotic device, which may require the patient to grasp a handle. In such an embodiment, the haptic device may be coupled to a computer system having a user console. The computer system may or may not be a CAS system, but may be a computer system designed for rehabilitative or physical therapy applications. If desired, the computer system may be integrated with computer 10. The orthotic device may have straps, braces, shells, or cast features to provide a firm or loose connection as desired. The orthotic device allows the haptic device to guide, monitor, and/or assist rehabilitative motions or other exercises. For example, the patient or a therapist may couple the patient's arm or leg to the haptic device and lead it through a desired motion while the haptic device records the properties of the motion. The motion can then be repeated multiple times without the assistance of the therapist. The haptic device may also be used to monitor the patient's efforts to move by noticing how much effort is required to move the patient, or through the use of force sensing devices which may be coupled to the haptic device at or near the location where the patient interfaces with the

haptic device. The haptic device may also be used to simply constrain the patient's motion to the defined path which requires the patient to advance along the defined path using their own strength. Modes where there is a shared effort between the patient and the haptic device may also be advantageous. It is desirable that when used in this manner, the haptic device operate in a safe manner because it is so close to the patient, who may have only partial function in one or more extremities. It may be undesirable for the haptic device to move to new positions automatically or autonomously. However, it may be desirable to reposition the haptic device, for example to permit initial attachment to or grasping by the patient, so that the haptic device may be moved to different starting positions between different exercises or repetitions of the same exercise, or in the course of performing the rehabilitative motions or exercises. A physical therapist may provide the interactive input for repositioning the haptic device. If desired, the patient may provide such input while interfacing with the haptic device.

[0075] The illustrated method for interactive haptic positioning of a surgical tool using a reconfigurable or steerable haptic object may be implemented in software, hardware, or a combination of both software and hardware. The steps discussed herein need not be performed in the stated order. Several of the steps could be performed concurrently with each other. Furthermore, if desired, one or more of the above described steps may be optional or may be combined without departing from the scope of the present invention. Referring now to FIGURE 5, when the user interacts with a haptic object, such as haptic object 20, it is sometimes desirable to know the magnitude of forces applied to the haptic object or the amount that a real or virtual tool or implant is penetrating the haptic object. For non-trivial haptic objects, or those with complicated two or three dimensional forms, it may be difficult to present this information in a manner that is simple for the user to understand. However, the desirable piece of information is often the local penetration distance or haptic repulsion force. While these can be up to three-dimensional vector quantities, the magnitude (or length) of such vectors, possibly in the direction of a local unit normal of the haptic object, are most useful for augmenting the haptic interaction of the user. These magnitudes are simple one-dimensional quantities and can be conveyed to the user in a variety of methods, including meters, dials, numerical displays, graphs, and other visual methods, but also with audio, tactile, haptic, or other means.

[0076] Though a complete message is conveyed directly by haptic device 113 to the hand of the surgeon, a visual or audible display can be used to support rich interactions between the user and the system. For example, well known and commercially available speech recognition techniques can be used to provide a verbal method for the user to communicate information or instructions to the computer aided surgery system. Speech output from the computer aided surgery system 11 can also be

used for communicating information to the user including status information, warning messages, event notification, and responses to user queries, whether communicated verbally or through some other method. Computer monitors, projection displays, wearable displays, head-mounted displays, stereoscopic views, holographic displays, and/or other visual display devices can be used to provide schematic anatomic representations, images of diagnostic datasets, instructions or guides for the surgical procedure, depictions of virtual and haptic objects, system status information, patient information, and other information that is easily communicated over a visual display. Any other input or output device could similarly be used to augment the haptic interaction between the user and the computer surgery system.

[0077] A visual and/or audio display of the penetration into a haptic object of a predetermined stiffness of a surgical device's depth, force and/or velocity is provided. The haptic object is based upon information from the computer-assisted surgical system. The display is one-dimensional in order to facilitate the communication of the local penetration magnitude of the surgical device into the haptic object.

[0078] During surgery, the haptic device may be used to enhance the performance of the surgeon in, for example, such tasks as holding a tool steady, making straight cuts, or moving a tool tip along a path or surface. The haptic device can replace mechanical cutting jigs and alignment apparatus used for aiding in the placement of and preparation of anatomy for implanted medical devices. Virtual haptic surfaces may be used to replace physical cutting blocks. The virtual haptic surfaces in this instance are preferably software entities that can be easily and cheaply created from the models of the implant. The virtual haptic surfaces can be created with curved shapes, which more closely match the underlying anatomy and enable implant designs that require less bone or tissue removal.

[0079] Sculpting of a physical object, such as a bone, frequently requires multiple planar features to be created in the bone and/or on the surface of the bone. A haptic object may be defined to assist in such sculpting. The shape of the defined haptic object may correspond substantially to the desired resulting shape of the physical object after sculpting. The physical object and the haptic object may have segments or surfaces with abrupt transitions and/or may have portions with short radius of curvature. As such, it is possible that a surgical tool coupled to the haptic device and being used to sculpt the physical object may abruptly fall off one segment causing unintentional damage to the physical object or other objects in the vicinity of the physical object, or be distracting or disturbing to the user. A segment may be one-dimensional, two-dimensional or three-dimensional.

[0080] In order to address this problem, haptic object is dynamically modified during sculpting in order to prevent the surgical tool or the haptic device from following an abrupt transition from one segment of the haptic object

to another segment. Preferably, the haptic object remains in the modified form only so long as it is desirable to prevent abrupt transitioning of the surgical tool or the haptic device from one segment to another. Once the cutting or portion thereof is complete, the haptic object may be returned to its original configuration, for example to its original shape, size, orientation, and/or the like. The modification of the haptic object may comprise creating another haptic segment that prevents the surgical tool from following an abrupt transition from one segment of the haptic object to another segment of the haptic object, modifying an existing segment of the haptic object, for example by extending the existing segment beyond its boundary, and/or the like.

[0081] FIGURE 6A illustrates an exemplary haptic device being used for haptic sculpting of physical objects with high curvature. FIGURE 6B illustrates an exemplary haptic object 20 for haptic sculpting of physical objects with high curvature. Referring now to FIGURES 6A and 6B, in certain cases, the desired shape for an anatomical region to be prepared with the aid of a haptic object may include sharp external edges. It is difficult to properly execute cuts without slipping off these edges, resulting in rounding of the edges and other unwanted artifacts in the resulting contour of the anatomy. An improved method for preparing these types of shapes involves dynamically enabling and disabling portions of the haptic surface. In particular, this method is helpful if a haptic object contains at least one sharp external edge where the local angle between the two portions joined by the edge as depicted in FIGURES 6A and 6B is less than 180 degrees. The method includes a way of selecting one of these portions, which may include any of the user input modalities mentioned herein, but the preferred method is based on proximity to the haptic object. When one of the portions is selected, that portion of the haptic object is extended beyond the joining edge to provide a continuous guide surface. When the extension is no longer required, the user can return the haptic object to its original configuration by moving the haptic arm away from the portion or using any other input modality.

[0082] For example, in a total or unicompartmental knee replacement procedure, multiple planar cuts are often required to prepare the femur for the femoral implant. A haptic object is defined in software that contains portions closely related to the desired femoral cuts. In experiments, when the user attempts to resect the bone using a cutting burr mounted in the haptic arm using the full haptic object, it is difficult to make the straight cuts without slipping from one portion to another and frequently moving the burr beyond the desired region. This slipping may result in damage to tendons, blood vessels, ligaments, and other structures and distract the user. If instead, each cutting plane of the haptic object is extended when the user brings the cutting burr within close proximity to that portion, it is much easier to create straight cuts without moving beyond the local anatomical site. The portion is returned to its original extent by simply

moving back away from it, at which time the user can bring the cutting burr into contact with any of the other portions to extend them in a similar manner. While foot pedals, voice commands, or other input modalities can be used to control the extension of each plane, controlling them in the preferred manner described previously requires no additional hardware and is extremely simple for the user. However, a visual display of the haptic object and the extended portion is also helpful for helping the user to understand more complex haptic objects, especially where their view of the cutting is limited due to obstructions or a minimally-invasive technique.

[0083] FIGURE 6A shows an exemplary system for dynamically extending a haptic object. A representation of the physical object, for example the anatomy of the patient to be sculpted, may be displayed on display device 30. The representation of the physical object may comprise a two-dimensional or three-dimensional drawing or image. The image could be, for example, a two-dimensional medical diagnostic dataset or a three-dimensional medical diagnostic dataset of the patient. In FIGURE 6A, haptic object 20 includes two different portions (20' and 20'') divided by a well defined edge 21. When haptic device 113, the surgical tool, or the virtual surgical tool comes within a predefined distance, say R_1 , of one portion, say portion 20', that portion of haptic object 20 is activated. If desired, the activated portion of the haptic object 20 may be extended as shown by the broken lines 23 in FIGURE 6A. When haptic device 113 moves to within a predefined distance of another portion, say portion 20'', the new portion of haptic object 20 may be activated. If desired, the newly activated portion of haptic object 20 may be extended.

[0084] It is desirable that haptic object 20 with high curvature be logically divided into or be approximated by a plurality of portions or segments without high curvature. For example, as shown in FIGURE 6A, haptic object 20 may be logically divided into a plurality of portions 20' and 20'' separated by an edge 21. Although, it is preferable to logically divide a haptic object into a plurality of segments, the haptic object itself may be defined using a logical combination of a plurality of segments. For example, a plurality of segments may be initially defined and the haptic object may be defined as a logical combination of one or more of the plurality of segments. If desired, the haptic object may comprise a regular or irregular arrangement of volume elements, or voxels, some or all of which may be labeled. It may be desirable to only label the voxels on the surface of the object in this manner.

[0085] FIGURE 6C is a flowchart of a method 120 for dynamically modifying a haptic object, such as haptic object 20 of FIGURES 6A and 6B. If desired, the dynamic modification feature may be user-configurable such that the user may turn this feature ON or OFF depending on the application or depending on the step of a particular application. When the dynamic modification feature is enabled, method 120 is preferably executed periodically.

[0086] In step 122, a determination is made as to whether a configuration of the haptic object, say haptic object 20, has already been modified, for example by modifying a segment of the haptic object or by adding a new segment. In the preferred embodiment, the value of a configuration flag may be checked to determine if haptic object 20 has already been modified. If haptic object 20 has not already been modified, then in step 124, a determination is made as to whether one or more criteria for modifying the configuration of haptic object 20 is satisfied. The criteria may be proximity of surgical tool 112 coupled to haptic device 113 to haptic object 20, penetration of haptic object 20 by surgical tool 112, gestural motions of surgical tool 112, gestural or other motion of surgical tool 112 relative to the position of haptic object 20, a fixed or variable time period, detection of an unwanted slippage over edge 21, and/or the like. If desired, the criteria may be proximity of the representation of surgical tool 112 to haptic object 20, penetration of the boundaries of haptic object 20 by the representation of surgical tool 112, gestural or other motion of the representation of surgical tool 112 relative to the position of haptic object 20, and/or the like. When modification of the configuration of haptic object 20 comprises modifying a segment of haptic object 20, preferably the same criteria is used to determine if any of the segments should be modified. However, if desired, different segments may be modified based on different criteria. In such an embodiment, each of the plurality of segments may have one or more criteria associated with it.

[0087] If in step 124, it is determined that at least one criteria for modifying the configuration of haptic object 20 is satisfied, then in step 126, the segment to be modified is selected. Alternatively, a segment in proximity to which a new haptic segment is to be created may be selected in step 126. In an alternative embodiment, the process starting at step 126 may be executed if a predefined logical combination of a set of criteria are satisfied. Preferably, the segment that is closest to haptic device 113 is selected. However, if desired, other criteria may be used to select a segment. For example, if surgical tool 112 has crossed an edge between two or more segments since the last time method 120 was executed, then one of the segments associated with the edge that was crossed may be selected. Alternatively, the segment being penetrated by surgical tool 112 may be selected. In step 128, the configuration of the selected segment is modified, preferably by extending the selected segment in a desired direction of movement of haptic device 113. The configuration flag may be set to indicate that haptic object 20 has been modified.

[0088] The method for modifying the configuration of the selected segment is preferably based at least in part on the manner in which the haptic object is represented. This representation may be based on surface polygons, voxels, non-uniform rational B-splines (NURBs), constructive solid geometry, and/or any other method for representing haptic objects now known or later developed.

The modified segment may be represented in any manner which may or may not be the same as those used to represent the original haptic object. Preferably, the selected segment is extended such that the extended portion is continuous with the segment along one of its high curvature edges. The extension may be flat or curved. The segment may be extended a fixed or variable distance beyond the original segment, or could be extended to intersect another portion of the haptic object or the edge of a workspace. The method used for extending the segment depends on the method used for representing the extension. For example, if a haptic object is represented with surface polygons, then the polygons that lie within the segment of interest and adjacent to one of its boundaries are identified. A neighboring segment that lies beyond the original segment and has the same normal direction as the original polygon may be enabled. For a voxel representation, the voxels may be labeled to indicate whether they behave as solid or filled regions of space for configurations of the haptic object with different extended segments, which may be automatically, semi-automatically, or manually designed. The selected neighboring segment may be added to the haptic object. Thus, as illustrated in FIGURE 6A, if portion 20' of haptic object 20 is the selected segment, then portion 20' may be extended beyond its original boundary, for example as shown by broken lines 23. Alternatively, if desired, a new haptic segment may be created in proximity to the selected segment.

[0089] In step 130, haptic interaction forces and/or torques for the haptic object are calculated. The haptic interaction forces and/or torques may be transformed and provided to haptic device 113. For example, it may be desirable to compute appropriate forces and torques for the actuators of the haptic device to apply such that the desired haptic interaction forces and/or torques will be produced. In some cases, it may be desirable to alter position or velocity commands to the actuators to produce the desired effect. The haptic interaction forces and/or torques from the selected segment may be used to guide haptic device 113 in a desired direction away from, toward, or aligned with physical object 114 to be sculpted. The haptic interaction forces and/or torques may be repulsive, attractive, frictional, viscous, impulsive, detent, regulatory (for example designed to maintain cutting speeds or feed rates), and/or the like. If desired, the haptic interaction forces and/or torques may be calculated using a mathematical, control theory, or machine learning algorithm.

[0090] If in step 124, it is determined that the criteria for modifying the configuration of haptic object 20 is not satisfied, then the process starting at step 130 may be executed.

[0091] If in step 122, it is determined that the configuration of haptic object 20 has already been modified, then in step 134, a determination is made as to whether one or more predefined criteria for maintaining haptic object 20 in the modified configuration is satisfied. These criteria

may or may not be the same as those considered when the configuration of haptic object 20 was initially modified. Preferably, if at least one criterion for maintaining the haptic object in the modified configuration is satisfied, then the process starting at step 130 may be executed. Otherwise, in step 136, the modified haptic object is returned to its original configuration. The configuration flag may be reset to indicate that haptic object 20 has not been modified. After execution of step 136, the process starting at step 130 may be executed. In an alternative embodiment, the process starting at step 130 may be executed if in step 134 it is determined that a predefined logical combination of a set of criteria are satisfied.

[0092] As illustrated in FIGURE 6A, when haptic device 113 or surgical tool 112 coupled to haptic device 113 comes within a predefined distance R_1 of one portion of haptic object 20, say portion 20', that portion of haptic object 20 may be activated and modified such that it extends beyond its original boundary as shown by dashed lines 23. While haptic device 113 or surgical tool 112 is in close proximity to portion 20' or maintains contact with portion 20', portion 20' remains modified. Surgical tool 112 may be used during that time to sculpt the portion of physical object 114 corresponding to portion 20' to a desired shape. When the sculpting of the portion of physical object 114 corresponding to portion 20' is completed, the user may move haptic device 113 away from portion 20'. Portion 20' may then be returned to its original configuration. When haptic device 113 or surgical tool 112 moves to within a predefined distance of another portion of haptic object 20, say portion 20'', portion 20'' of haptic object 20 may be activated and modified such that it extends beyond its original boundary.

[0093] The illustrated method for dynamically modifying a haptic object may be used in a variety of applications, such as any procedure where a virtual constraint and/or haptic cues are used to guide a user using a haptic device for sculpting a physical object or shape that has high curvature. For example, the method may be used in fabrication of components for consumer or industrial products, for the reproduction or creation of artistic pieces, such as sculptures, for shaping bones in an orthopedic procedure, and/or the like.

[0094] The illustrated method for dynamically modifying a haptic object may be implemented in software, hardware, or a combination of both software and hardware. The steps discussed herein need not be performed in the stated order. Several of the steps could be performed concurrently with each other. Furthermore, if desired, one or more of the above described steps may be optional or may be combined without departing from the scope of the present invention.

[0095] A technical advantage of this exemplary embodiment for dynamically modifying a haptic object is that the sculpting of the physical object may be performed in a more controlled manner. Thus, during a surgical procedure, unintentional damage to parts of the body may be avoided and the user can feel more comfortable using

the system. Another technical advantage is that the user does not have to move its attention away from the working volume when switching from one segment to another segment of the haptic object. Yet another technical advantage is that shapes with high curvature may be operated on more easily than if only the entire haptic object were used.

[0096] FIGURE 8 illustrates the use of an exemplary haptic device 113 as an input device. Haptic device 113 and a haptic object 20 in real space are illustrated. Haptic device 113 may also be used as an input device, allowing information to pass from the user to CAS system 11, and providing functionality similar to common user interface devices, such as a mouse, touchpad, keyboard, joystick, flight controller, haptic joystick, or any other input device. When used as an input device, it may be used for defining anatomical reference geometry, manipulating the position and/or orientation of virtual implants, manipulating the position and/or orientation of surgical approach trajectories, manipulating the position and/or orientation of bone resections, and the selection or placement of any other anatomical or surgical feature. Haptic device 113 may also be used for more generic user interface functions, including but not limited to, moving a cursor 31 (FIGURE 8), selecting buttons or other similar user interface objects, selecting pull-down menus, manipulating on-screen dials, knobs, and other controls. When in this user-input mode the haptic device can be constrained to move in only certain directions which may be defined relative to the position of a predetermined portion of the haptic device, relative to the position of the patient or a portion of the patient anatomy, or relative to images or 3-D models of schematic, virtual, atlas, or actual patient anatomical features. The predetermined portion of the haptic device may be capable of moving.

[0097] As illustrated in display 30 of FIGURE 8, haptic device 113 may be used as an input device to change the position, shape, size, etc. of haptic object 20. An example of an application of haptic device 113 used in this mode is planning the placement of a knee implant. After acquiring appropriate anatomical images of the anatomy of interest, the computer surgery system enters a mode where a cursor appears on a display visible to the user. The user grasps the arm to move the position of the cursor, possibly in multiple views. When satisfied with the position of the cursor, the user fixes it in the desired position through the use of a foot pedal, button, wired or wireless control pendant, voice command, or other input, or through the application of a force or torque to the haptic arm, or moving the haptic arm in a distinctive gesture, such as a tap, twist, or other gesture that is easily distinguishable from the user interactions during the cursor positioning. After the first position is set, a second cursor is used to define the endpoint of a line connecting to the two or three-dimensional position of the first cursor. The second cursor is moved, as above, to define an anatomical axis of the femur bone and its position is fixed using one of the above mentioned techniques. The two or three

dimensional position and orientation of the implant can then be manipulated by the user using the haptic device as an input device. The implant is constrained by the system such that one of its surfaces is perpendicular to the anatomical reference line, but its position and orientation can be adjusted by the user. It is also possible to allow deviations from the anatomical axis, possibly coupled with displays of such deviations relative to anatomical reference frames familiar to the user. For example, the varus/valgus angle of the implant relative to the anatomical reference line can be adjusted and displayed to allow appropriate alignment of the knee implants. This general technique can be adapted to plan the approach and/or placement of minimally invasive hip and knee implants, trauma fixation pins, pedicle screws, biopsy needles, radioactive beads, radiotherapy beam emitter, or any other medical device.

[0098] With a haptic device, the surgeon can use tools identical or very similar to those used in standard practice. By exploiting the haptic features of the device, the need for awkward teach pendants or GUI-based robot controls may be reduced or eliminated. Switching between freehand and assisted steps of a procedure is quickly performed by simply pushing the device out of the way, similar to familiar operating room objects such as microscopes and overhead lights. While the systems may be internally complex, the surgeon must be shielded from this complexity so that he can focus all of his attention on his patient.

[0099] For example, the haptic arm can hold itself at a reference position using a joint-based or Cartesian control algorithm. The user applies forces and/or torques to the arm, either on an interaction handle or end-effector or at any point on the arm, which cause the arm to deflect from the reference position. The amount and direction of the deflection is continuously communicated to the computer system to modify the position of any desired virtual reference geometric feature or user interface object.

[0100] In another example, the haptic arm can hold itself at a reference position using a joint-based or Cartesian control algorithm but with two degrees of freedom left unconstrained. The user can then move the arm in the unconstrained directions to provide two-dimensional control of a user-interface object, such as a cursor, implant, or other geometric or virtual surface entity. A similar technique can be used for one degree of freedom manipulation of objects, such as user interface slider bars, implant lengths, positions of objects along a reference trajectory, or any other one-dimensional control such as audio volume, image brightness, object scaling, image zooming, and the like. A similar technique can be used for higher than three degree of freedom positioning of implants or virtual or haptic objects. The haptic object's position may also be constrained relative to any relevant anatomical features for a particular application. For example, a knee implant may be constrained to have the proper alignment relative to the anatomical axis of the leg, or to achieve proper ligament balance, but with the

other degrees of freedom controllable by the user in the manner described above.

[0101] The stiffness or damping of the control algorithm may vary in different directions to indicate preferential directions of motion which may be aligned with any direction as described in the previous paragraph. This stiffness variation may include zero stiffness along certain directions or may lock the user to the preferred directions once the deviation from the reference position exceeds some threshold value. This stiffness variation assists with simplifying the planning process by allowing the user to focus their attention on a limited number of degrees of freedom at a time. For example, the user may set the position of an implant along one or two directions first, then set the position of the implant along an additional direction or directions without disturbing the set directions.

[0102] The stiffness and damping variations can occur automatically depending on the physical interaction of the user with the haptic device and does not require the use of another input device such as a voice command, control pendant, or foot pedal. Any such simplification has benefits in reducing service costs, simplified system use, and improved safety. This general method of planning also allows the surgeon to perform planning without having to leave the normal operating position to interact with the computer-aided surgery system or requiring an assistant to control the computer-aided surgery system or requiring the introduction of additional input devices other than the haptic device which is already being used for execution of the surgical plan. An additional benefit of this use of a haptic device is that the motion of the controlled object can be scaled relative to the motion of the arm, so that it can be positioned to a precision better than the user can position a real object, eliminating the deleterious effects of the user's hand tremor and any force disturbances arising from friction, backlash, magnetic detent forces, and other force disturbances arising from the haptic arm. It should be noted that the primary function of the object controlled by the haptic device is something other than monitoring the pose of the haptic device or monitoring the pose of a component of interest that may or may not be coupled to the haptic device.

[0103] FIGURES 7A and 7B illustrate the use of a haptic device and a surgical tool to define a haptic object. In the illustrated example, haptic device 113 is being used as an input device to define haptic object 182. In order to use haptic device 113 as an input device to define haptic object 182, the user grasps surgical tool 112 coupled to haptic device 113. If desired, the user may grasp haptic device 113 itself. Using surgical tool 112 the user traces the boundaries of a desired region, for example a portion of the anatomy with respect to which the haptic object is to be defined. The user may trace the boundary, for example by touching the end of surgical tool 112 to portions of the desired region of the anatomy. The motion of surgical tool 112 may be recorded and the locations of the endpoints traced by the user computed. The ge-

ometry and/or location of haptic object 182 may be determined based at least in part on the location of the endpoints. A haptic device creation mode may be used to specify the desired shape of the haptic object. For example, to create a cylindrical haptic object that corresponds to a resected portion 184 of anatomy 114, the user can trace a plurality of points on the boundary of resected portion 184. An appropriate cylindrical haptic object may be created using any technique now known or later developed.

[0104] Material and other properties of the anatomy may be defined by probing the anatomy. For example, surgical tool 112 may include a force measurement device coupled to the tip of surgical tool 112. Alternatively, if desired, instead of surgical tool 112, a probe comprising a force measurement device may be coupled to haptic device 113. When the user interfaces the force measurement device against a portion of anatomy 114, the force may be measured by the force measurement device. The measured force may be displayed as a function of the distance the anatomy moves, if any, upon application of the force. The stiffness of that portion of anatomy 114 may be calculated as the ratio of the force to the distance. If desired, haptic device 113 itself may be interfaced with a portion of anatomy 114 and the force determined based on the torques provided by the actuators. In such an embodiment, haptic device 113 may make small or large movements or press against portions of anatomy 114 in an autonomous mode without any physical assistance from the user. The force may be determined using any Jacobian method now known or later developed. The graphical representation 186 of FIGURE 7B illustrates the force with which surgical tool 112 comes in contact with anatomy 114 as a function of displacement of anatomy 114.

[0105] If desired, other types of sensing devices may be coupled to haptic device 113 or surgical tool 112 to determine other properties of anatomy 114. These properties may be used to determine the type of tissue that is in proximity to haptic device 113. Thus, haptic device 113 may be used to differentiate between hard and soft bones, healthy and diseased tissues, different types of healthy tissues, boundaries of anatomical structures, etc. Based on information received from haptic device 113, the type of the tissue may be automatically determined by CAS system 11 and displayed on display device 30.

[0106] FIGURE 9 is a flowchart of a representative method 190 for using haptic device 113 as an input device. In step 192, the input mode is initiated. The user may initiate the input mode by any mechanism now known or later developed. For example, the user may use a graphical user interface, a footswitch, a keyboard, a button, and/or the like, to indicate that the user desires to use haptic device 113 as an input device. Haptic device 113 may control a plurality of objects. However, it is desirable that it only control a single object at one time. As such, in step 194, an identification of an object to be controlled is received. The controlled object may be a cursor,

a button, an on-screen dial, a knob, a slider bar, or other similar user interface object, a virtual implant, a surgical approach trajectory, a bone resection, and/or the like. The user may select the object to be controlled by any method now known or later developed, for example by selecting the object using a conventional input device.

[0107] In step 196, a reference pose for haptic device 113 may be stored. The reference pose is preferably the current pose of haptic device 113. For example, in this step, position information about the tip of haptic device 113 may be stored. In step 198, the controlled object is correlated with haptic device 113. The correlation of the controlled object with haptic device 113 is desirable so that movement of haptic device 113 may be translated or mapped into a corresponding movement or action relative to the controlled object. The correlation or mapping allows a determination of the amount or direction of movement of the controlled object in response to movement of haptic device 113. For example, the user may specify that movement of haptic device 113 by one unit should cause a controlled object, for example cursor 31, to move by ten pixels on display device 30.

[0108] The user may move haptic device 113 around to control the object selected in step 194. In step 200, a change in pose of haptic device 113 is determined. The change in pose of haptic device 113 is preferably determined relative to the reference pose of haptic device 113. The change in pose of haptic device 113 may comprise, for example, a change in position of the tip of haptic device 113. In step 202, the reference pose of haptic device 113 may be updated. Preferably, the reference pose is updated based at least in part on the change in pose of haptic device 113. If desired, the reference pose may be updated based at least in part on a wrench applied to haptic device by the user. The wrench may be explicitly measured by a sensor. If desired, the wrench may be implicit in that the haptic device can determine that a wrench is being applied.

[0109] In step 204, new parameters for the controlled object are calculated. The parameters of the controlled object may be, for example its pose, position, angle, size, color, shape, orientation, view direction, brightness, contrast, table indices, status, mode, configuration, and/or the like. The new parameters may be calculated based on the change in pose of haptic device 113 and/or the wrench applied to haptic device by the user. If desired, the new parameters may be calculated based on the change in reference pose of haptic device 113. Preferably, correlation information obtained in step 198 is used to calculate the new parameters. The new parameters may be used to change the controlled object. Thus, for example, when the controlled object is cursor 31 and there is a change in pose of haptic device 113, then a new pose for the controlled object may be determined based on the new parameters. In step 206, the controlled object is changed based on the new parameters. Thus, for example, if the controlled object is cursor 31, then the position of cursor 31 on display device 30 may be

changed based at least in part on the new parameters calculated in step 204.

[0110] In step 208, a haptic wrench applied by the haptic device to the medical device and/or the user is determined. The haptic wrench may be determined based on the new parameters of the controlled object, the change in pose of haptic device 113, and/or the current pose of haptic device 113.

[0111] In step 210, the determined haptic wrench is applied to haptic device 113. Instead of allowing haptic device 113 to be moved in any direction, it may be desirable to constrain the movement of haptic device 113. The determined haptic wrench when applied to haptic device 113 prevents it from moving in certain undesirable directions. For example, if the controlled object is capable of moving in only one dimension, it may be desirable to constrain the motion of haptic device 113 so that haptic device 113 moves in only one direction. As another example, when the object being controlled is cursor 31 on display device 30, then it may be desirable to constrain the movement of haptic device 113 to a two-dimensional plane corresponding to display device 30. As a further example, if it is not desirable for haptic device 113 to move large distances from the reference pose, the haptic wrench may act to return haptic device 113 to the reference pose in one or more directions.

[0112] Within the input mode, haptic device 113 may be used in a position control mode or a rate control mode. In the position control mode, the change in pose of the controlled object tracks the change in pose of haptic device 113. For example, if haptic device 113 is moved in a particular direction by one unit, the controlled object moves in a corresponding direction by a corresponding amount. When haptic device 113 is released, it stays in its new pose.

[0113] On the other hand, in the rate control mode, the displacement of haptic device 113 from the reference pose and/or the wrench applied to the haptic device by the user, may control the velocity of the controlled object. For example, if haptic device 113 is maintained in its reference pose (or if no wrench is applied to the haptic device by the user), then the rate of movement of the controlled object is zero. The displacement of haptic device 113 from the reference pose (or the magnitude of the wrench applied by the user to the haptic device) determines the velocity of movement of the controlled object with the velocity of movement being proportional to the displacement of the controlled object (or to the magnitude of the wrench applied to the haptic device). When it is desirable to move the controlled object, haptic device 113 is simply moved (or pushed) in the direction of the desired motion of the controlled object. When haptic device 113 is released it moves back to the reference pose due to application, in step 210, of the haptic wrench determined in step 208. Thus, in the rate control mode, the controlled object may be moved a substantial distance without substantially moving haptic device 113.

[0114] In step 212, a determination is made as to

whether haptic device 113 is still operating in the input mode. If haptic device 113 is not operating in the input mode, then the process terminates. Otherwise, in step 214, a determination is made as to whether a new object to be controlled has been specified. If a new object to be controlled has not been specified then the process starting at step 200 to determine the change in pose of haptic device 113 may be executed. Otherwise, the process starting at step 194 to receive identification of the new object to be controlled is executed.

[0115] For example, in one embodiment, the reference pose may be associated with the desired trajectory of a drill guide attached to haptic device 113. In such an embodiment, updating the reference pose in step 202 comprises changing the desired trajectory of the drill guide. When the user moves haptic device 113 from the reference pose for a prolonged period of time, the reference pose will be updated to move in the direction of the user's deflection. If, in step 210, an appropriate haptic feedback wrench is applied, then upon release of haptic device 113 by the user, haptic device 113 will assume the new reference pose. When the user is satisfied with the reference pose and the input mode is terminated in step 212, haptic device 113 will be in a pose such that the drill guide is aligned with the desired trajectory.

[0116] The illustrated method for using a haptic device as an input device may be implemented in software, hardware, or a combination of both software and hardware. The steps discussed herein need not be performed in the stated order. Several of the steps could be performed concurrently with each other. Furthermore, if desired, one or more of the above described steps may be optional or may be combined without departing from the scope of the present invention.

[0117] A technical advantage of using a haptic device as an input device in the manner described above is that the use of an additional input device may be avoided thereby reducing the clutter in the operating room.

[0118] FIGURE 10 illustrates a system for conveying scalar information during a medical, surgical or interventional procedure. Haptic device 113 may be deployed as a fully integrated component of CAS system 11 or act as an optional peripheral to such a system. Location or position information of tool 112 coupled to haptic device 113 may be sensed and provided back to CAS system 11 with or without the use of sensor(s) 14.

[0119] Medical, surgical and interventional procedures will be referred to collectively as "medical procedures." The medical procedure may involve resecting a portion of an anatomy, such as for a joint replacement, joint resurfacing, tumor removal, bone deformity correction and/or the like. If desired, the medical procedure may involve applying a synthetic, biologic, or therapeutic substance to a surface or region of interest, or placing a sensor, probe, implant or radioactive material in a desired position, surface or volume. When a user interacts, for example, with a haptic object, it is sometimes desirable to know the magnitude of forces applied to the haptic

object or the amount that a real or virtual tool or implant is penetrating the haptic object. For non-trivial haptic objects, or those with complicated two or three dimensional forms, it may be difficult to present this information in a manner that is simple for the user to understand. The desirable piece of information is often the local distance to a surface of interest or to a desired position, the local penetration distance of the surface of interest, or haptic repulsion force. While these can be up to three-dimensional vector quantities, the magnitude (or length) of such vectors, possibly in the direction of a local unit normal to the haptic object, are most useful for augmenting the haptic interaction of the user. These magnitudes are simple one-dimensional quantities and can be conveyed to the user in a variety of methods, including meters, dials, numerical displays, graphs, and other visual methods, but also with audio, tactile, haptic, or other means.

[0120] In the exemplary embodiment of FIGURE 10, CAS system 11 is communicatively coupled to an audio source 216, for example a speaker, and display device 30. During an exemplary medical procedure, anatomy 114, which in the embodiment of FIGURE 10 is a bone, is to be cut along haptic object 20 using the surface of haptic object 20 as a guide surface. During the medical procedure, one-dimensional information, for example information regarding the scalar distance D of the tip of tool 112 from the surface of an object of interest, for example haptic object 20, is provided to the user, preferably but not necessarily automatically. CAS system 11 may be programmed, for example, to automatically provide this scalar information based on the stage of the procedure, the type of tool being used, the tool's position or proximity to an object (including surface) of interest, or other cues that assist CAS system 11 in identifying the object with respect to which magnitude information will be determined and displayed.

[0121] In an exemplary embodiment, prior to initiation of the cutting operation, the value of D is positive. A value of zero for D indicates that the tip of cutting tool 112 is at the desired depth inside anatomy 114. In the exemplary embodiment, the desired depth is at the surface of haptic object 20. A negative value for D indicates that the depth of the tip of cutting tool 112 inside the bone is more than that desired. One-dimensional information may be communicated to the surgeon by any of a variety of methods, such as visual, audio, tactile, haptic, and/or the like. For example, a visual indicator 218, for example a level meter, a dial, numerical displays, graphs, etc., may be used to indicate the value of D on display device 30 or any other device in proximity to the user. If desired, audio source 216, visual indicator 218 and/or display device 30 may be provided closer to the user, for example on tool 112, haptic arm 113, other handheld tools, instruments or accessories, or wearable visual, audio, haptic, or tactile displays. For example, tool 112 may include a simple display device or a multi-colored indicator, for example a multi-colored LED indicator, a multi-colored lamp indicator, a LED level meter, and/or the like, to indicate the

cutting depth to the user. In such an embodiment, the user does not need to take their attention away from the surgical working area. Similarly, tool 112 may include an audio source to indicate the cutting depth to the user. In such an embodiment, the audio indication from audio source 216 may be easily heard by the user because of its proximity to the user.

[0122] If desired, audio indicators or tones from speaker 216 may be provided instead of or in addition to visual indicator 218. For example, a series of beeps may be provided to indicate the value of D. As the value of D decreases, the interval between the beeps may be reduced correspondingly. If desired, the beeps may turn into a buzzing or any other sound when the value of D becomes zero and into a different sound, for example, a high pitched sound when the value of D becomes negative. In an exemplary embodiment, a positive value for D is an acceptable value and a negative value for D is an unacceptable value.

[0123] An advantage of providing an audio indicator is that the surgeon does not have to take his/her eyes off the patient's anatomy, such as bone 114. However, if the noise in the operating room makes it difficult for the surgeon to hear an audio indicator, then a visual indicator may be more appropriate.

[0124] If a haptic system or device is used, such as shown in the illustrated exemplary embodiment, a tactile indication may be provided through haptic arm 113 or through an auxiliary device. In an embodiment, haptic arm 113 vibrates to provide tactile indication to the user. The frequency, amplitude, waveform, and/or other property of vibration of haptic arm 113 is dependent on distance D. In another embodiment, a vibrating device may be provided on the user's body. The frequency, amplitude, waveform, and/or other property of vibration of the vibrating device is dependent on distance D. An advantage of providing a tactile indication is that the surgeon does not have to take his/her eyes off bone 114.

[0125] Because the one-dimensional information is easy to communicate to the user, the user is able to focus his attention on the task of cutting knowing that an audio indication, a tactile indication or a quick glance at visual indicator 218 will inform him if he is cutting to the appropriate depth.

[0126] Depth information may also be displayed to the user in situations where the user is not using a haptic device. For example, the user may be cutting the bone freehand with a tool whose pose is tracked by a tracking system. In such an embodiment, the user does not have the benefit of the haptic feedback that will tend to apply forces to the tool that keep it on the surface of a haptic object or prevent it from penetrating a haptic object. Instead of a haptic object, a simple geometric object, e.g., a curve, a point, line, a surface or a volume, may be used as the object of interest. The object of interest may be identified to the CAS system or the CAS system may determine it based on other information it has. For example, the object of interest may be defined directly with

respect to the patient or with respect to a diagnostic image of the patient, or it can be derived or determined by the CAS system from other anatomical points or features identifiable by a user. The CAS system knows the position of the tool relative to the object of interest and displays one-dimensional depth information. In such a system, D may be calculated by determining the distance from the tip of tool 112 to the desired depth of cut of the object of interest. If desired, the object of interest may comprise a curve, a point, a surface, a line, a volume, or a set of desired positions. The object of interest may be a haptic object, a geometric object and/or the desired shape of the portion of the anatomy.

[0127] If desired, in an alternative embodiment, the one dimensional depth display may be augmented with two-dimensional representations of the cutting depth at each point on the surface or three-dimensional representations of each point in space. The two-dimensional or three-dimensional representation may be a schematic or realistic depiction of the surface of interest. A property, for example color, brightness, and/or the like, of points of the surface of interest may be based at least in part on the distance between the tool and the respective points when the tool was closest to the respective points during the medical procedure. For example, different colors may be used to denote the distance between the tool and the points. The position of the tool when it was closest to a point during the medical procedure is determined and the distance between the tool and the point calculated. The color of the point reflects the distance from the tool to the point when it was closest to that point.

[0128] FIGURE 11 is a flowchart of a method 220 for conveying depth information during a medical procedure. Method 220 is preferably executed periodically. In step 222, the distance of tool 112 from the desired surface is determined. Preferably, the distance D of the tip of tool 112 from the surface of an object, such as haptic object 20, is determined. The process for determining a value for D depends upon how the object is represented internally. This representation of the object may be based on surface polygons, voxels, NURBs, constructive solid geometry, and/or any other method for representing geometrical objects now known or later developed. The distance from the current location of tool 112 to an appropriate point on the surface of haptic object 20 is calculated. The calculated distance is assigned a positive or negative value depending on the relative position of the tip of tool 112 and bone 114 with respect to the surface of haptic object 20. In the example illustrated in FIGURE 10, if the tip of tool 112 and bone 114 are on opposite sides of the surface of haptic object 20, then D is assigned a positive value. Otherwise, D is assigned a negative value.

[0129] In step 224, the determined distance is mapped to a desired output format for display to the user. For example, the distance may be mapped to an appropriate color, audio frequency, time period, sound, image, haptic cue, and/or the like. Preferably, the mapping is performed

based at least in part on the value of D. Table A below shows an exemplary mapping table for a system where visual signals are provided to the user.

Table A

D (Millimeter)	OUTPUT FORMAT
1-2	Green light
0.1-0.99	Yellow Light
0.0-0.09	Red Light
<0.0	Black Light

[0130] In step 226, the determined distance is conveyed to the user in the desired output format. If the desired output format is a visual indicator, then in an exemplary embodiment an indicator of the appropriate color is displayed. For example, as specified in exemplary Table A, if the value of D is within an acceptable range, say between 1 and 2 millimeters, then a green indicator is displayed, if the value of D is between 0.1 and 0.99 millimeters, then a yellow indicator is displayed, if the value of D is between 0.0 and 0.09 millimeters, then a red indicator is displayed and if the value of D is in an unacceptable range, say less than zero, then a black indicator is displayed. In the embodiment of FIGURE 10, information about distance D is displayed by level meter 218. As the value of D changes, the color of a level in level meter 218 is changed. If the desired output format is an audio indicator, then in an exemplary embodiment, distance information is conveyed by beeps as discussed herein with reference to FIGURE 10.

[0131] A technical advantage of an exemplary embodiment of the present invention is that during a medical procedure information about the depth of a tool may be provided to the user in a simple manner so that the user may focus his/her attention on the medical procedure.

Claims

1. A method for use of a computer-assisted surgery system during a medical procedure, comprising:

receiving information on an object of interest which includes anatomical structures and a haptic object that defines at least one cutting surface tracking a position of a handheld surgical tool mechanically coupled to a haptic device that provides for feedback to a user;
determining a scalar distance between a current position of said tool and at least the cutting surface in said object of interest; and
providing an indication of said scalar distance to a user of said tool **characterized in that** said anatomical structures include bone and said haptic object defines a desired shape to be

- sculpted in the bone;
2. The method of claim 1, wherein said providing step comprises providing a visual indication of said scalar distance to said user of said tool. 5
 3. The method of claim 2, further comprising, prior to said providing step, selecting a type of visual indication to provide to said user. 10
 4. The method of claim 2, wherein said visual indication is provided by a visual indicator selected from the group consisting of a level meter, a dial, a numerical display, and a graph. 15
 5. The method of claim 2, wherein said providing step comprises providing said visual indication of said scalar distance on a display device associated with a computer-assisted surgery system. 20
 6. The method of claim 2, wherein said providing step comprises providing said visual indication of said scalar distance on a display device disposed on the haptic device. 25
 7. The method of claim 2, wherein said providing step comprises providing said visual indication of said scalar distance on a display device disposed on the handheld surgical tool used in proximity to an anatomy of a patient. 30
 8. The method of claim 3, further comprising selecting a color for said visual indication based at least in part on said scalar distance. 35
 9. The method of claim 2, further comprising, prior to said providing step, selecting said visual indication based at least in part on said scalar distance. 40
 10. The method of claim 2, wherein said object of interest comprises a portion of an anatomy of a patient. 45
 11. The method of claim 2, wherein said object of interest is selected from the group consisting of a curve, a point, a surface, a volume, and a set of desired positions. 50
 12. The method of claim 2, wherein said providing step comprises providing a predetermined visual indication indicating that said scalar distance is within an acceptable range. 55
 13. The method of claim 2, wherein said providing step comprises providing a predetermined visual indication indicating that said scalar distance is in an unacceptable range.
 14. The method of claim 1, wherein said providing step comprises changing a stiffness parameter of the force feedback indicative of said scalar.
 15. The method of claim 1, wherein said providing step further comprises causing vibration of the handheld surgical tool that is in contact with said user.
 16. The method of claim 1, further comprising selecting a type of indication based at least in part on said scalar distance.
 17. The method of claim 1, wherein said providing step comprises providing said indication indicating that said scalar distance is within an acceptable range.
 18. The method of claim 1, wherein said providing step comprises providing said indication indicating that said scalar distance is in an unacceptable range.
 19. The method of claim 1, wherein said cutting surface is selected from the group consisting of a curve, a point, a line, a flat surface, a curved surface, a volume, and a set of desired positions.
 20. The method of claim 1, wherein said providing step comprises providing an audio indication of said scalar distance to said user of said tool.
 21. The method of claim 21, further comprising, prior to said providing step, selecting a type of audio indication to provide to said user.
 22. The method of claim 21, wherein said providing step comprises providing said audio indication of said scalar distance via an audio device associated with a computer-assisted surgery system.
 23. The method of claim 21, wherein said providing step comprises providing said audio indication of said scalar distance via an audio device disposed on the haptic device associated with a computer-assisted surgery system.
 24. The method of claim 21, wherein said providing step comprises providing said audio indication of said scalar distance via an audio device disposed on the handheld surgical tool used in proximity to an anatomy of a patient.
 25. The method of claim 21, further comprising, prior to said providing step, selecting said audio indication based at least in part on said scalar distance.
 26. The method of claim 21, wherein said cutting surface of the haptic object defines a desired shape for an anatomy of a patient.
 27. The method of claim 21, wherein said object of in-

- terest comprises a portion of an anatomy of a patient.
28. The method of claim 21, wherein said object of interest is selected from the group consisting of a curve, a point, a surface, a volume, and a set of desired positions. 5
29. The method of claim 21, wherein said providing step comprises providing a predetermined audio indication indicating that said scalar distance is within an acceptable range. 10
30. The method of claim 21, wherein said providing step comprises providing a predetermined audio indication indicating that said scalar distance is in an unacceptable range. 15
31. A computer-assisted surgery system for use during a medical procedure, comprising: 20
- application logic operatively associated with said computer-assisted surgery system and operable to:
- receive information on an object of interest which includes anatomical structures and a haptic object that defines at least one cutting surfaces 25
- track a position of a handheld surgical tool coupled to a haptic device that provides for feedback to a user; 30
- determine a scalar distance between a current position of said tool and at least the cutting surface in said object of interest; and
- provide an indication of said scalar distance to a user of said tool **characterized in that** said anatomical structures include bone and said haptic object defines a desired shape to be sculpted in the bone. 35
32. The system of claim 31, wherein said application logic is further operable to provide a visual indication of said scalar distance to said user of said tool. 40
33. The system of claim 32, wherein said application logic is further operable to select a type of visual indication to provide to said user. 45
34. The system of claim 32, wherein said visual indication is provided by a visual indicator selected from the group consisting of a level meter, a dial, a numerical display, and a graph. 50
35. The system of claim 32, wherein said application logic is further operable to provide said visual indication of said scalar distance on a display device associated with said computer-assisted surgery system. 55
36. The system of claim 32, wherein said application logic is further operable to provide said visual indication of said scalar distance on a display device disposed on the haptic device associated with said computer-assisted surgery system.
37. The system of claim 32, wherein said application logic is further operable to provide said visual indication of said scalar distance on a display device disposed on the handheld surgical tool used in proximity to an anatomy of a patient.
38. The system of claim 33, wherein said application logic is further operable to select a color for said visual indication based at least in part on said scalar distance.
39. The system of claim 32, wherein said application logic is further operable to select said visual indication based at least in part on said scalar distance.
40. The system of claim 32, wherein said object of interest comprises a portion of an anatomy of a patient.
41. The system of claim 32, wherein said object of interest is selected from the group consisting of a curve, a point, a surface, a volume, and a set of desired positions.
42. The system of claim 32, wherein said application logic is further operable to provide a predetermined visual indication indicating that said scalar distance is within an acceptable range.
43. The system of claim 32, wherein said application logic is further operable to provide a predetermined visual indication indicating that said scalar distance is in an unacceptable range.
44. The system of claim 31, wherein said application logic is further operable to change a stiffness parameter of the force feedback according to said scalar distance to said user of said tool.
45. The system of claim 31, wherein said application logic is further operable to cause vibration of the handheld surgical tool in contact with said user.
46. The system of claim 31, wherein said application logic is further operable to select a type of indication based at least in part on said scalar distance.
47. The system of claim 31, wherein said application logic is further operable to provide said indication indicating that said scalar distance is within an acceptable range.
48. The system of claim 31, wherein said application log-

ic is further operable to provide said indication indicating that said scalar distance is in an unacceptable range.

49. The system of claim 31, wherein said cutting surface is selected from the group consisting of a curve, a point, a line, a flat surface, a curved surface, a volume, and a set of desired positions. 5
50. The system of claim 31, wherein said application logic is further operable to provide an audio indication of said scalar distance to said user of said tool. 10
51. The system of claim 50, wherein said application logic is further operable to select a type of audio indication to provide to said user. 15
52. The system of claim 50, wherein said application logic is further operable to provide said audio indication of said scalar distance via an audio device associated with said computer-assisted surgery system. 20
53. The system of claim 50, wherein said application logic is further operable to provide said audio indication of said scalar distance via an audio device disposed on the haptic device associated with said computer-assisted surgery system. 25
54. The system of claim 50, wherein said application logic is further operable to provide said audio indication of said scalar distance via an audio device disposed on the handheld surgical tool used in proximity to an anatomy of a patient. 30
55. The system of claim 50, wherein said application logic is further operable to select said audio indication based at least in part on said scalar distance. 35
56. The system of claim 50, wherein said cutting surface of the haptic object defines a desired shape for an anatomy of a patient. 40
57. The system of claim 50, wherein said object of interest comprises a portion of an anatomy of a patient. 45
58. The system of claim 50, wherein said object of interest is selected from the group consisting of a curve, a point, a surface, a volume, and a set of desired positions. 50
59. The system of claim 50, wherein said application logic is further operable to provide a predetermined audio indication indicating that said scalar distance is within an acceptable range. 55
60. The system of claim 50, wherein said application logic is further operable to provide a predetermined audio indication indicating that said scalar distance is

in an unacceptable range.

61. The system of claim 50 wherein said application logic comprises computer executable software code.
62. A computer-assisted surgery system for use during a medical procedure, comprising:

a computer readable storage medium storing instructions which when executed by the computer-assisted surgery system cause the computer-assisted surgery system to execute the steps of any one of claims 1-31.
63. The computer-assisted surgery system of claim 62, wherein said object of interest is selected from the group consisting of a curve, a point, a line, a surface, a volume, and a set of desired positions.

Patentansprüche

1. Verfahren zur Verwendung eines computergestützten Chirurgiesystems während eines medizinischen Vorgangs, umfassend:

Erfassen von Informationen über ein zu behandelndes Objekt, das anatomische Strukturen einschließt, und über ein haptisches Objekt, das mindestens eine Schnittfläche definiert;
Nachverfolgen einer Position eines handgeführten chirurgischen Instruments, das mechanisch mit einer haptischen Vorrichtung gekoppelt ist, welche Rückmeldungen für einen Anwender bereitstellt;
Bestimmen eines skalaren Abstands zwischen einer aktuellen Position des Instruments und mindestens der Schnittfläche im zu behandelnden Objekt; und
Bereitstellen einer Anzeige des skalaren Abstands für einen Anwender des Instruments, **dadurch gekennzeichnet, dass** die anatomischen Strukturen Knochen einschließen und das haptische Objekt eine gewünschte Form definiert, die in dem Knochen geformt werden soll.
2. Verfahren nach Anspruch 1, wobei der Schritt des Bereitstellens das Bereitstellen einer optischen Anzeige des skalaren Abstands für den Anwender des Instruments umfasst.
3. Verfahren nach Anspruch 2, ferner umfassend das Auswählen einer Art von optischer Anzeige vor dem Schritt des Bereitstellens, um diese für den Anwender bereitzustellen.
4. Verfahren nach Anspruch 2, wobei die optische Anzeige durch einen optischen Anzeiger bereitgestellt

ist, der ausgewählt ist aus der Gruppe, bestehend aus einem Pegelmesser, einer Skala, einer Ziffernanzeige und einer grafischen Darstellung.

5. Verfahren nach Anspruch 2, wobei der Schritt des Bereitstellens das Bereitstellen der optischen Anzeige des skalaren Abstands auf einer Anzeigevorrichtung umfasst, welche mit einem computergestützten Chirurgiesystem verbunden ist. 5
6. Verfahren nach Anspruch 2, wobei der Schritt des Bereitstellens das Bereitstellen der optischen Anzeige des skalaren Abstands auf einer Anzeigevorrichtung umfasst, welche auf der haptischen Vorrichtung angeordnet ist. 10
7. Verfahren nach Anspruch 2, wobei der Schritt des Bereitstellens das Bereitstellen der optischen Anzeige des skalaren Abstands auf einer Anzeigevorrichtung umfasst, die auf einem handgeführten chirurgischen Instrument angeordnet ist, welches in der Nähe einer Anatomie eines Patienten verwendet wird. 20
8. Verfahren nach Anspruch 3, ferner umfassend das Auswählen einer Farbe für die optische Anzeige, basierend mindestens teilweise auf dem skalaren Abstand. 25
9. Verfahren nach Anspruch 2, ferner umfassend das Auswählen der optischen Anzeige vor dem Schritt des Bereitstellens, basierend mindestens teilweise auf dem skalaren Abstand. 30
10. Verfahren nach Anspruch 2, wobei das zu behandelnde Objekt einen Abschnitt einer Anatomie eines Patienten aufweist. 35
11. Verfahren nach Anspruch 2, wobei das zu behandelnde Objekt aus der Gruppe ausgewählt ist, bestehend aus einer Kurve, einem Punkt, einer Fläche, einem Volumen und einer Reihe von gewünschten Positionen. 40
12. Verfahren nach Anspruch 2, wobei der Schritt des Bereitstellens das Bereitstellen einer zuvor festgelegten optischen Anzeige umfasst, welche anzeigt, dass der skalare Abstand innerhalb eines zulässigen Bereichs liegt. 45
13. Verfahren nach Anspruch 2, wobei der Schritt des Bereitstellens das Bereitstellen einer zuvor festgelegten optischen Anzeige umfasst, welche anzeigt, dass sich der skalare Abstand innerhalb eines nicht zulässigen Bereichs befindet. 50
14. Verfahren nach Anspruch 1, wobei der Schritt des Bereitstellens das Verändern eines Steifigkeitsparameters der Kraftrückkopplung umfasst, welche indi-

kativ für diesen Skalar ist.

15. Verfahren nach Anspruch 1, wobei der Schritt des Bereitstellens ferner das Auslösen einer Vibration des handgeführten chirurgischen Instruments umfasst, welches in Kontakt mit dem Anwender steht.
16. Verfahren nach Anspruch 1, ferner umfassend das Auswählen einer Art von Anzeige, basierend mindestens teilweise auf dem skalaren Abstand.
17. Verfahren nach Anspruch 1, wobei der Schritt des Bereitstellens das Bereitstellen der Anzeige umfasst, welche anzeigt, dass der skalare Abstand innerhalb eines zulässigen Bereichs liegt.
18. Verfahren nach Anspruch 1, wobei der Schritt des Bereitstellens das Bereitstellen der Anzeige umfasst, welche anzeigt, dass sich der skalare Abstand innerhalb eines nicht zulässigen Bereichs befindet.
19. Verfahren nach Anspruch 1, wobei die Schnittfläche ausgewählt ist aus der Gruppe, bestehend aus einer Kurve, einem Punkt, einer Linie, einer flachen Fläche, einer gekrümmten Fläche, einem Volumen und einer Reihe von gewünschten Positionen.
20. Verfahren nach Anspruch 1, wobei der Schritt des Bereitstellens das Bereitstellen einer akustischen Anzeige des skalaren Abstands für den Anwender des Instruments umfasst.
21. Verfahren nach Anspruch 20, ferner umfassend das Auswählen einer Art von akustischer Anzeige vor dem Schritt des Bereitstellens, um diese für den Anwender bereitzustellen.
22. Verfahren nach Anspruch 20, wobei der Schritt des Bereitstellens das Bereitstellen der akustischen Anzeige des skalaren Abstands über eine akustische Vorrichtung umfasst, welche mit einem computergestützten Chirurgiesystem verbunden ist.
23. Verfahren nach Anspruch 20, wobei der Schritt des Bereitstellens das Bereitstellen der akustischen Anzeige des skalaren Abstands über eine akustische Vorrichtung umfasst, die auf der haptischen Vorrichtung angeordnet ist, welche mit einem computergestützten Chirurgiesystem verbunden ist.
24. Verfahren nach Anspruch 20, wobei der Schritt des Bereitstellens das Bereitstellen der akustischen Anzeige des skalaren Abstands über eine akustische Vorrichtung umfasst, die auf dem handgeführten chirurgischen Instrument angeordnet ist, welches in der Nähe einer Anatomie eines Patienten verwendet wird.

25. Verfahren nach Anspruch 20, ferner umfassend das Auswählen der akustischen Anzeige vor dem Schritt des Bereitstellens, basierend mindestens teilweise auf dem skalaren Abstand.
26. Verfahren nach Anspruch 20, wobei die Schnittfläche des haptischen Objekts eine gewünschte Form für eine Anatomie eines Patienten definiert.
27. Verfahren nach Anspruch 20, wobei das zu behandelnde Objekt einen Abschnitt einer Anatomie eines Patienten aufweist.
28. Verfahren nach Anspruch 20, wobei das zu behandelnde Objekt aus der Gruppe ausgewählt ist, bestehend aus einer Kurve, einem Punkt, einer Fläche, einem Volumen und einer Reihe von gewünschten Positionen.
29. Verfahren nach Anspruch 20, wobei der Schritt des Bereitstellens das Bereitstellen einer zuvor festgelegten akustischen Anzeige bereitstellt, welche anzeigt, dass der skalare Abstand innerhalb eines zulässigen Bereichs liegt.
30. Verfahren nach Anspruch 20, wobei der Schritt des Bereitstellens das Bereitstellen einer zuvor festgelegten akustischen Anzeige umfasst, welche anzeigt, dass der skalare Abstand in einem nicht zulässigen Bereich liegt.
31. Computergestütztes Chirurgesystem zur Verwendung während eines medizinischen Vorgangs, aufweisend:
- eine Anwendungslogik, welche funktionswirksam mit dem computergestützten Chirurgesystem verbunden ist und in der Lage ist:
- Information über ein zu behandelndes Objekt, das anatomische Strukturen einschließt, und ein haptisches Objekt, das mindestens eine Schnittfläche definiert, zu erfassen;
- eine Position eines handgeführten chirurgischen Instruments nachzuverfolgen, das mit einer haptischen Vorrichtung verbunden ist, welche für einen Anwender Rückmeldungen bereitstellt;
- einen skalaren Abstand zwischen einer aktuellen Position des Instruments und zumindest der Schnittfläche im zu behandelnden Objekt zu bestimmen, und
- eine Anzeige des skalaren Abstands für einen Anwender des Instruments bereitzustellen,

dadurch gekennzeichnet, dass die anatomi-

schen Strukturen Knochen einschließen und das haptische Objekt eine gewünschte Form definiert, die in dem Knochen geformt werden soll.

- 5 32. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, eine optische Anzeige des skalaren Abstands für den Anwender des Instruments bereitzustellen.
- 10 33. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, eine Art einer optischen Anzeige auszuwählen und für den Anwender bereitzustellen.
- 15 34. System nach Anspruch 32, wobei die optische Anzeige durch einen optischen Anzeiger bereitgestellt ist, der ausgewählt ist aus der Gruppe, bestehend aus einem Pegelmesser, einer Skala, einer Ziffernanzeige und einer grafischen Darstellung.
- 20 35. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, die optische Anzeige des skalaren Abstands auf einer Anzeigevorrichtung bereitzustellen, welche mit dem computergestützten Chirurgesystem verbunden ist.
- 25 36. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, die optische Anzeige des skalaren Abstands auf einer Anzeigevorrichtung bereitzustellen, die auf der haptischen Vorrichtung angeordnet ist, welche mit dem computergestützten Chirurgesystem verbunden ist.
- 30 37. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, die optische Anzeige des skalaren Abstands auf einer Anzeigevorrichtung bereitzustellen, die auf dem handgeführten chirurgischen Instrument angeordnet ist, welches in der Nähe einer Anatomie eines Patienten verwendet wird.
- 35 38. System nach Anspruch 33, wobei die Anwendungslogik ferner in der Lage ist, eine Farbe für die optische Anzeige auszuwählen, basierend mindestens teilweise auf dem skalaren Abstand.
- 40 39. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, die optische Anzeige auszuwählen, basierend mindestens teilweise auf dem skalaren Abstand.
- 45 40. System nach Anspruch 32, wobei das zu behandelnde Objekt einen Abschnitt einer Anatomie eines Patienten aufweist.
- 50 41. System nach Anspruch 32, wobei das zu behandelnde Objekt ausgewählt ist aus der Gruppe, bestehend aus einer Kurve, einem Punkt, einer Fläche, einem Volumen und einer Reihe von gewünschten Positio-
- 55

nen.

42. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, eine zuvor festgelegte optische Anzeige bereitzustellen, welche anzeigt, dass der skalare Abstand innerhalb eines zulässigen Bereichs liegt.
43. System nach Anspruch 32, wobei die Anwendungslogik ferner in der Lage ist, eine zuvor festgelegte optische Anzeige bereitzustellen, welche anzeigt, dass der skalare Abstand in einem nicht zulässigen Bereich liegt.
44. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, einen Steifigkeitsparameter der Kraftrückkopplung gemäß dem skalaren Abstand für den Anwender des Instruments zu verändern.
45. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, eine Vibration des handgeführten chirurgischen Instruments auszulösen, welches mit dem Anwender in Kontakt steht.
46. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, eine Art der Anzeige auszuwählen, basierend mindestens teilweise auf dem skalaren Abstand.
47. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, die Anzeige bereitzustellen, welche anzeigt, dass der skalare Abstand innerhalb eines zulässigen Bereichs liegt.
48. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, die Anzeige bereitzustellen, welche anzeigt, dass der skalare Abstand in einem nicht zulässigen Bereich liegt.
49. System nach Anspruch 31, wobei die Schnittfläche ausgewählt ist aus der Gruppe, bestehend aus einer Kurve, einem Punkt, einer Linie, einer flachen Fläche, einer gekrümmten Fläche, einem Volumen und einer Reihe von gewünschten Positionen.
50. System nach Anspruch 31, wobei die Anwendungslogik ferner in der Lage ist, eine akustische Anzeige des skalaren Abstands für den Anwender des Instruments bereitzustellen.
51. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, eine Art der akustischen Anzeige zur Bereitstellung für den Anwender auszuwählen.
52. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, die akustische Anzeige

des skalaren Abstands über eine akustische Vorrichtung bereitzustellen, welche mit dem computergestützten Chirurgiesystem verbunden ist.

53. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, die akustische Anzeige des skalaren Abstands über eine akustische Vorrichtung bereitzustellen, die auf der haptischen Vorrichtung angeordnet ist, welche mit dem computergestützten Chirurgiesystem verbunden ist.
54. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, die akustische Anzeige des skalaren Abstands über eine akustische Vorrichtung bereitzustellen, die auf dem handgeführten chirurgischen Instrument angeordnet ist, welches in der Nähe einer Anatomie eines Patienten verwendet wird.
55. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, die akustische Anzeige auszuwählen, basierend mindestens teilweise auf dem skalaren Abstand.
56. System nach Anspruch 50, wobei die Schnittfläche des haptischen Objekts eine gewünschte Form für eine Anatomie eines Patienten definiert.
57. System nach Anspruch 50, wobei das zu behandelnde Objekt einen Abschnitt einer Anatomie eines Patienten aufweist.
58. System nach Anspruch 50, wobei das zu behandelnde Objekt aus der Gruppe ausgewählt ist, bestehend aus einer Kurve, einem Punkt, einer Fläche, einem Volumen und einer Reihe von gewünschten Positionen.
59. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, eine zuvor festgelegte akustische Anzeige bereitzustellen, welche anzeigt, dass der skalare Abstand innerhalb eines zulässigen Bereichs liegt.
60. System nach Anspruch 50, wobei die Anwendungslogik ferner in der Lage ist, eine zuvor festgelegte akustische Anzeige bereitzustellen, welche anzeigt, dass der skalare Abstand in einem nicht zulässigen Bereich liegt.
61. System nach Anspruch 50, wobei die Anwendungslogik einen computerausführbaren Softwarecode umfasst.
62. Computergestütztes Chirurgiesystem zur Verwendung während eines medizinischen Vorgangs, umfassend:

ein Computer lesbares Speichermedium, das Anweisungen speichert, welche bei ihrer Ausführung durch das computergestützte Chirurgesystem das computergestützte Chirurgesystem dazu veranlassen, die Schritte gemäß einem der Ansprüche 1-31 auszuführen.

63. Computergestütztes Chirurgesystem nach Anspruch 62, wobei das zu behandelnde Objekt ausgewählt ist aus der Gruppe, bestehend aus einer Kurve, einem Punkt, einer Linie, einer Fläche, einem Volumen und einer Reihe von gewünschten Positionen.

Revendications

1. Procédé d'utilisation d'un système de chirurgie assisté par ordinateur pendant une procédure médicale, comprenant :

la réception d'informations sur un objet d'intérêt qui comprend des structures anatomiques et un objet haptique qui définit au moins une surface de coupe,
le suivi d'une position d'un outil chirurgical manuel mécaniquement raccordé à un dispositif haptique qui fournit un retour à un utilisateur ;
la détermination d'une distance scalaire entre une position actuelle dudit outil et au moins la surface de coupe dans ledit objet d'intérêt ; et
la fourniture d'une indication de ladite distance scalaire à un utilisateur dudit outil, **caractérisé en ce que** lesdites structures anatomiques comprennent l'os et ledit objet haptique définit une forme souhaitée à sculpter dans l'os.

2. Procédé selon la revendication 1, dans lequel ladite étape de fourniture comprend la fourniture d'une indication visuelle de ladite distance scalaire audit utilisateur dudit outil.
3. Procédé selon la revendication 2, comprenant en outre, avant ladite étape de fourniture, la sélection d'un type d'indication visuelle à fournir audit utilisateur.
4. Procédé selon la revendication 2, dans lequel ladite indication visuelle est fournie par un indicateur visuel choisi dans le groupe constitué d'un dispositif de mesure de niveau, un cadran, un écran numérique, et un graphique.
5. Procédé selon la revendication 2, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication visuelle de ladite distance scalaire sur un dispositif d'affichage associé à un système de chirurgie assisté par ordinateur.

6. Procédé selon la revendication 2, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication visuelle de ladite distance scalaire sur un dispositif d'affichage positionné sur le dispositif haptique.

7. Procédé selon la revendication 2, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication visuelle de ladite distance scalaire sur un dispositif d'affichage positionné sur l'outil chirurgical manuel, utilisé à proximité de l'anatomie d'un patient.

8. Procédé selon la revendication 3, comprenant en outre la sélection d'une couleur pour ladite indication visuelle, sur la base au moins en partie de ladite distance scalaire.

9. Procédé selon la revendication 2, comprenant en outre, avant ladite étape de fourniture, la sélection de ladite indication visuelle, sur la base, au moins en partie, de ladite distance scalaire.

10. Procédé selon la revendication 2, dans lequel ledit objet d'intérêt comprend une partie de l'anatomie d'un patient.

11. Procédé selon la revendication 2, dans lequel ledit objet d'intérêt est choisi dans le groupe constitué d'une courbe, un point, une surface, un volume et un ensemble de positions souhaitées.

12. Procédé selon la revendication 2, dans lequel ladite étape de fourniture comprend la fourniture d'une indication visuelle prédéterminée indiquant que la distance scalaire est dans une gamme acceptable.

13. Procédé selon la revendication 2, dans lequel ladite étape de fourniture comprend la fourniture d'une indication visuelle prédéterminée indiquant que ladite distance scalaire est dans une gamme inacceptable.

14. Procédé selon la revendication 1, dans lequel ladite étape de fourniture comprend le changement d'un paramètre de rigidité du retour de force indicatif de ladite distance scalaire.

15. Procédé selon la revendication 1, dans lequel ladite étape de fourniture comprend en outre la réalisation de vibrations de l'outil chirurgical manuel qui est en contact avec ledit utilisateur.

16. Procédé selon la revendication 1, comprenant en outre la sélection d'un type d'indication, basé au moins en partie sur ladite distance scalaire.

17. Procédé selon la revendication 1, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication, indiquant que ladite distance scalaire est

dans une gamme acceptable.

18. Procédé selon la revendication 1, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication, indiquant que ladite distance scalaire est dans une gamme inacceptable. 5
19. Procédé selon la revendication 1, dans lequel ladite surface de coupe est choisie dans le groupe constitué d'une courbe, un point, une ligne, une surface plane, une surface courbe, un volume, et un ensemble de positions souhaitées. 10
20. Procédé selon la revendication 1, dans lequel ladite étape de fourniture comprend la fourniture d'une indication audio de ladite distance scalaire audit utilisateur dudit outil. 15
21. Procédé selon la revendication 20, comprenant en outre, avant ladite étape de fourniture, la sélection d'un type d'indication audio à fournir audit utilisateur. 20
22. Procédé selon la revendication 20, dans lequel ladite étape de fourniture comprend la fourniture d'une indication audio de ladite distance scalaire, par le biais d'un dispositif audio associé à un système de chirurgie assisté par ordinateur. 25
23. Procédé selon la revendication 20, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication audio de ladite distance scalaire, par le biais d'un dispositif audio positionné sur le dispositif haptique associé à un système de chirurgie assisté par ordinateur. 30
24. Procédé selon la revendication 20, dans lequel ladite étape de fourniture comprend la fourniture de ladite indication audio de ladite distance scalaire, par le biais d'un dispositif audio positionné sur l'outil chirurgical manuel utilisé à proximité de l'anatomie d'un patient. 35
25. Procédé selon la revendication 20, comprenant en outre, avant ladite étape de fourniture, la sélection de ladite indication audio, sur la base, au moins en partie, de ladite distance scalaire. 40
26. Procédé selon la revendication 20, dans lequel ladite surface de coupe de l'objet haptique définit une forme souhaitée pour l'anatomie d'un patient. 45
27. Procédé selon la revendication 20, dans lequel ledit objet d'intérêt comprend une partie de l'anatomie d'un patient. 50
28. Procédé selon la revendication 20, dans lequel ledit objet d'intérêt est choisi dans le groupe constitué d'une courbe, un point, une surface, un volume et 55

un ensemble de positions souhaitées.

29. Procédé selon la revendication 20, dans lequel ladite étape de fourniture comprend la fourniture d'une indication audio prédéterminée, indiquant que ladite distance scalaire est dans une gamme acceptable.
30. Procédé selon la revendication 20, dans lequel ladite étape de fourniture comprend la fourniture d'une indication audio prédéterminée, indiquant que ladite distance scalaire est dans une gamme inacceptable.
31. Système de chirurgie assisté par ordinateur à utiliser pendant une procédure médicale, comprenant :

une logique d'application opérationnellement associée audit système de chirurgie assisté par ordinateur et utilisable pour :

recevoir des informations sur un objet d'intérêt qui comprend des structures anatomiques et un objet haptique qui définit au moins une surface de coupe, suivre une position d'un outil chirurgical manuel raccordé à un dispositif haptique qui fournit un retour à un utilisateur ;
déterminer une distance scalaire entre une position actuelle dudit outil et au moins la surface de coupe dans ledit objet d'intérêt ;
et
fournir une indication de ladite distance scalaire à un utilisateur dudit outil, **caractérisé en ce que** lesdites structures anatomiques comprennent l'os et ledit objet haptique définit une forme souhaitée à sculpter dans l'os.
32. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour fournir une indication visuelle de ladite distance scalaire audit utilisateur dudit outil.
33. Système selon la revendication 32, dans lequel ladite logique d'application est en outre utilisable pour sélectionner un type d'indication visuelle à fournir audit utilisateur.
34. Système selon la revendication 32, dans lequel ladite indication visuelle est fournie par un indicateur visuel choisi dans le groupe constitué d'un dispositif de mesure de niveau, un cadran, un écran numérique et un graphique.
35. Système selon la revendication 32, dans lequel ladite application logique est en outre utilisable pour fournir ladite indication visuelle de ladite distance scalaire sur un dispositif d'affichage associé audit système de chirurgie assisté par ordinateur.

36. Système selon la revendication 32, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication visuelle de ladite distance scalaire sur un dispositif d'affichage positionné sur le dispositif haptique associé audit système de chirurgie assisté par ordinateur.
37. Système selon la revendication 32, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication visuelle de ladite distance scalaire sur un dispositif d'affichage positionné sur l'outil chirurgical manuel, utilisé à proximité de l'anatomie d'un patient.
38. Système selon la revendication 33, dans lequel ladite logique d'application est en outre utilisable pour choisir une couleur pour ladite indication visuelle, sur la base, au moins en partie, de ladite distance scalaire.
39. Système selon la revendication 32, dans lequel ladite logique d'application est en outre utilisable pour sélectionner ladite indication visuelle, sur la base, au moins en partie, de ladite distance scalaire.
40. Système selon la revendication 32, dans lequel ledit objet d'intérêt comprend une partie de l'anatomie d'un patient.
41. Système selon la revendication 32, dans lequel ledit objet d'intérêt est choisi dans le groupe constitué d'une courbe, un point, une surface, un volume et un ensemble de positions souhaitées.
42. Système selon la revendication 32, dans lequel ladite logique d'application est en outre utilisable pour fournir une indication visuelle prédéterminée, indiquant que ladite distance scalaire est dans une gamme acceptable.
43. Système selon la revendication 32, dans lequel ladite logique d'application est en outre utilisable pour fournir une indication visuelle prédéterminée, indiquant que ladite distance scalaire est dans une gamme acceptable.
44. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour changer un paramètre de rigidité du retour de force selon ladite distance scalaire audit utilisateur dudit outil.
45. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour provoquer la vibration de l'outil chirurgical manuel en contact avec ledit utilisateur.
46. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour sélectionner un type d'indication, sur la base, au moins en partie, de ladite distance scalaire.
47. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication, indiquant que ladite distance scalaire est dans une gamme acceptable.
48. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication, indiquant que ladite distance scalaire est dans une gamme inacceptable.
49. Système selon la revendication 31, dans lequel ladite surface de coupe est choisie dans le groupe constitué d'une courbe, un point, une ligne, une surface plane, une surface incurvée, un volume et un ensemble de positions souhaitées.
50. Système selon la revendication 31, dans lequel ladite logique d'application est en outre utilisable pour fournir une indication audio de ladite distance scalaire audit utilisateur dudit outil.
51. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour sélectionner un type d'indication audio à fournir audit utilisateur.
52. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication audio de ladite distance scalaire, par le biais d'un dispositif audio associé audit système de chirurgie assisté par ordinateur.
53. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication audio de ladite distance scalaire, par le biais d'un dispositif audio positionné sur le dispositif haptique associé audit système de chirurgie assisté par ordinateur.
54. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour fournir ladite indication audio de ladite distance scalaire, par le biais d'un dispositif audio positionné sur l'outil chirurgical manuel utilisé à proximité de l'anatomie d'un patient.
55. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour choisir ladite indication audio, sur la base, au moins en partie, de ladite distance scalaire.
56. Système selon la revendication 50, dans lequel ladite surface de coupe de l'objet haptique définit une forme souhaitée pour l'anatomie d'un patient.

57. Système selon la revendication 50, dans lequel ledit objet d'intérêt comprend une partie de l'anatomie d'un patient.
58. Système selon la revendication 50, dans lequel ledit objet d'intérêt est choisi dans le groupe constitué d'une courbe, un point, une surface, un volume et un ensemble de positions souhaitées. 5
59. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour fournir une indication audio prédéterminée, indiquant que ladite distance scalaire est dans une gamme acceptable. 10
60. Système selon la revendication 50, dans lequel ladite logique d'application est en outre utilisable pour fournir une indication audio prédéterminée, indiquant que ladite distance scalaire est dans une gamme inacceptable. 15 20
61. Système selon la revendication 50, dans lequel ladite logique d'application comprend un code logiciel exécutable sur ordinateur. 25
62. Système de chirurgie assisté par ordinateur, à utiliser pendant une procédure médicale, comprenant :
- des instructions de stockage d'un milieu de stockage lisibles sur ordinateur qui, lorsqu'elles sont exécutées par le système de chirurgie assisté par ordinateur, provoquent l'exécution, par ledit système de chirurgie assisté par ordinateur, des étapes selon l'une quelconque des revendications 1 à 31. 30 35
63. Système de chirurgie assisté par ordinateur selon la revendication 62, dans lequel ledit objet d'intérêt est choisi dans le groupe constitué d'une courbe, un point, une ligne, une surface, un volume et un ensemble de positions souhaitées. 40

45

50

55

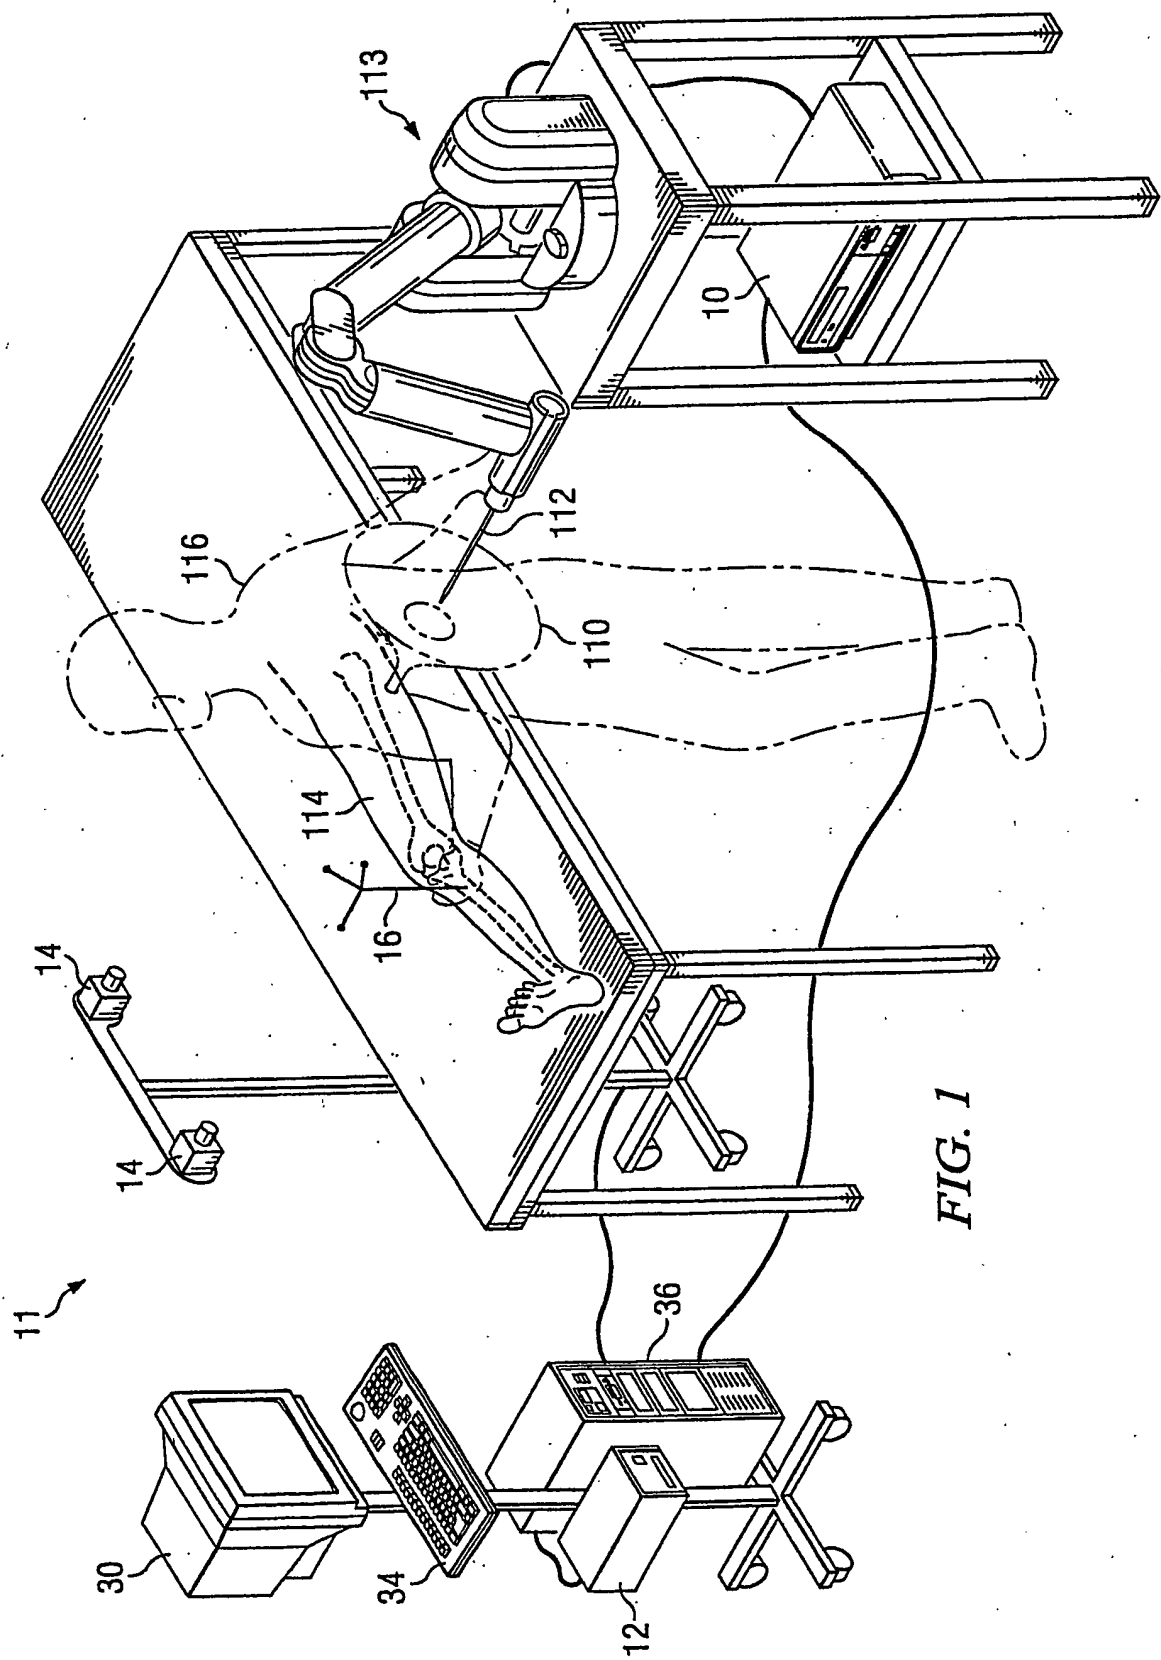
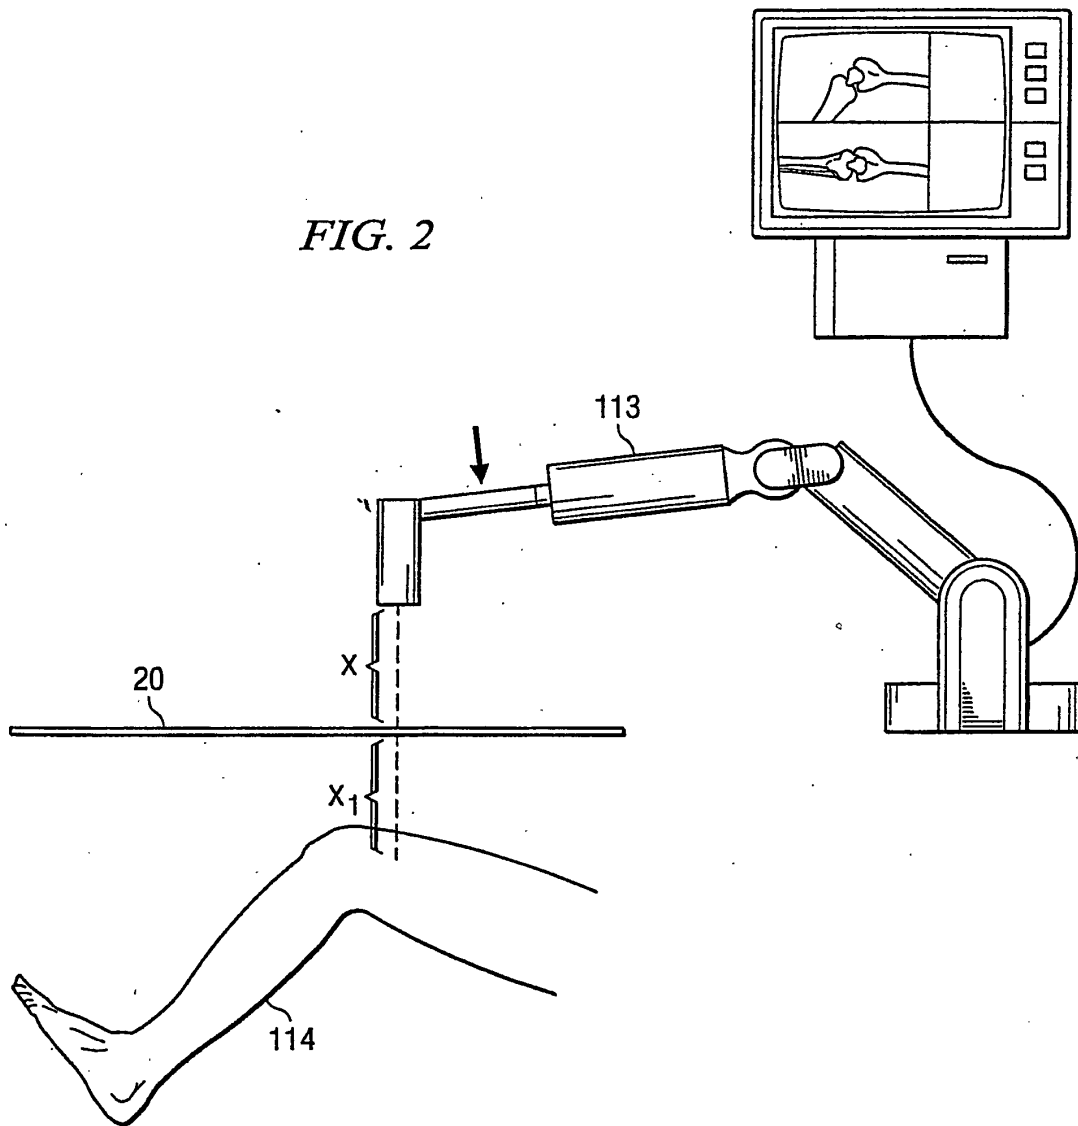
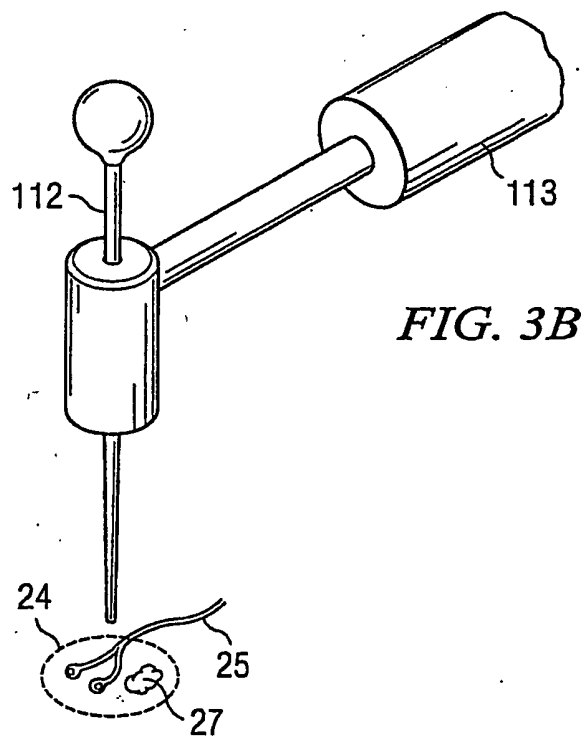
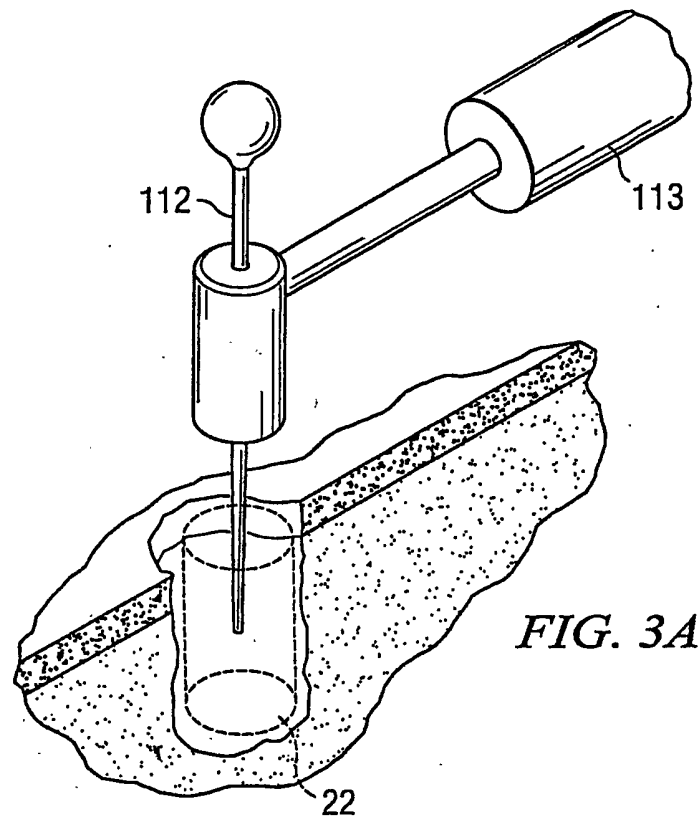


FIG. 2





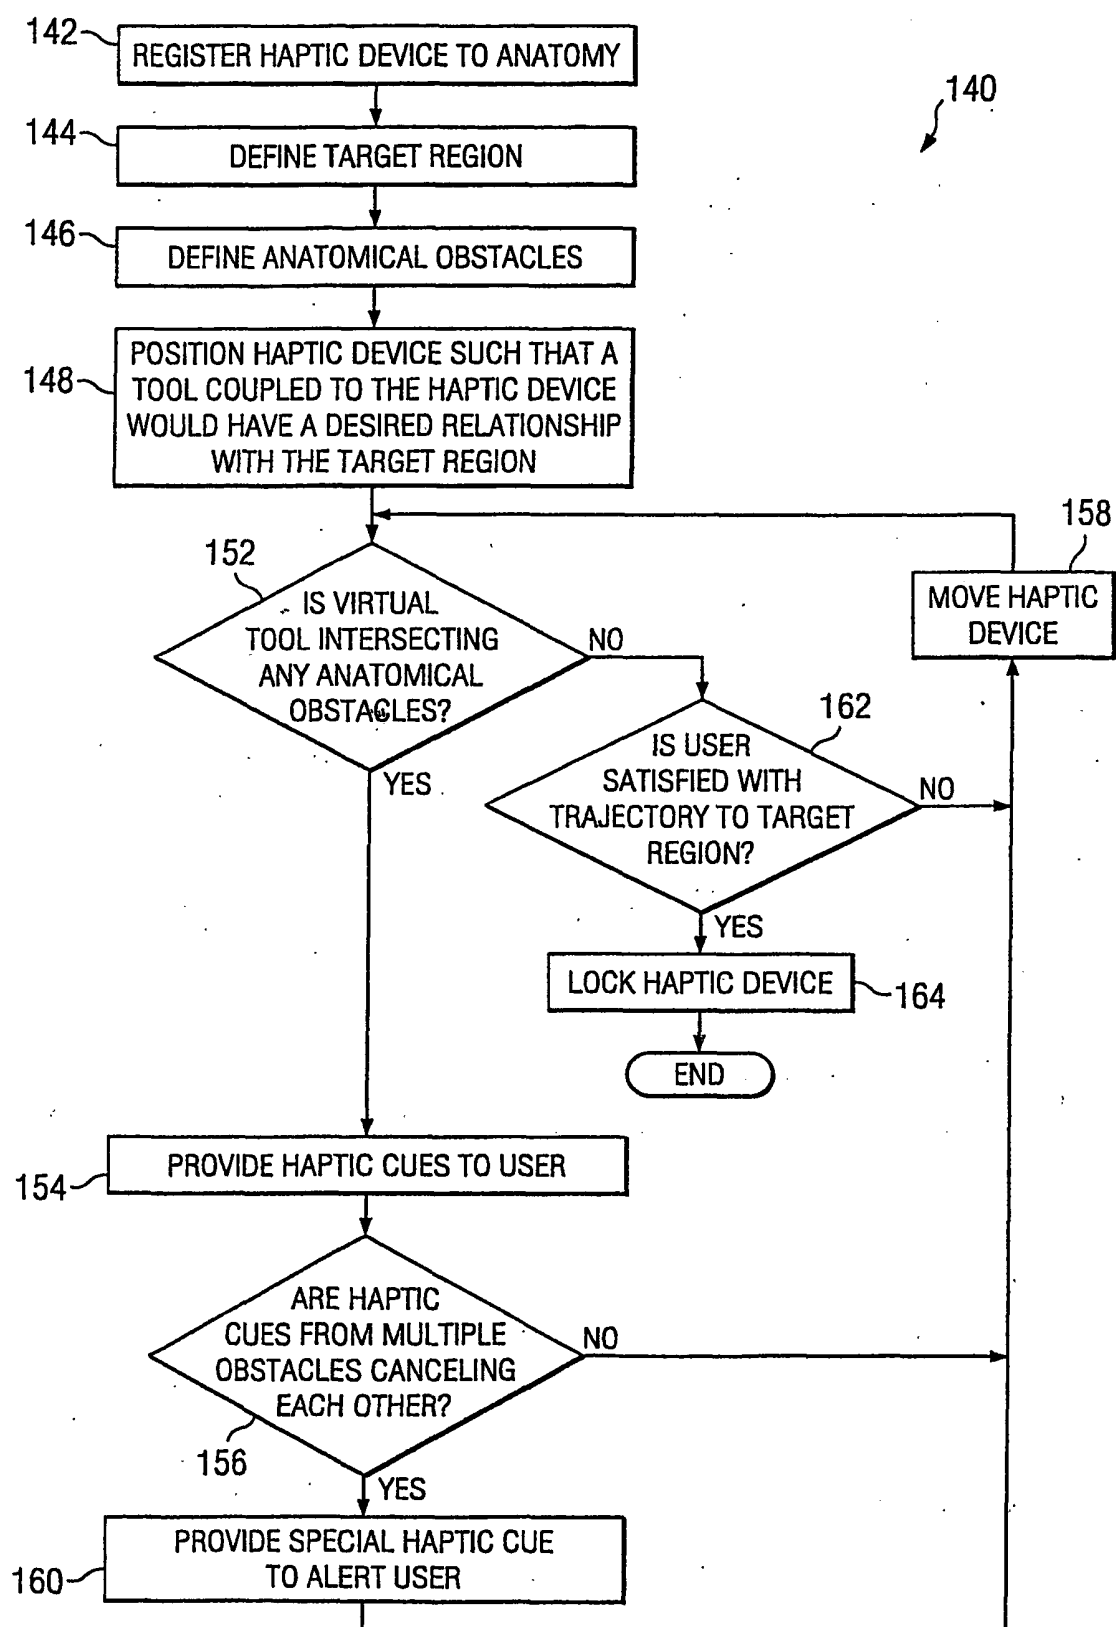
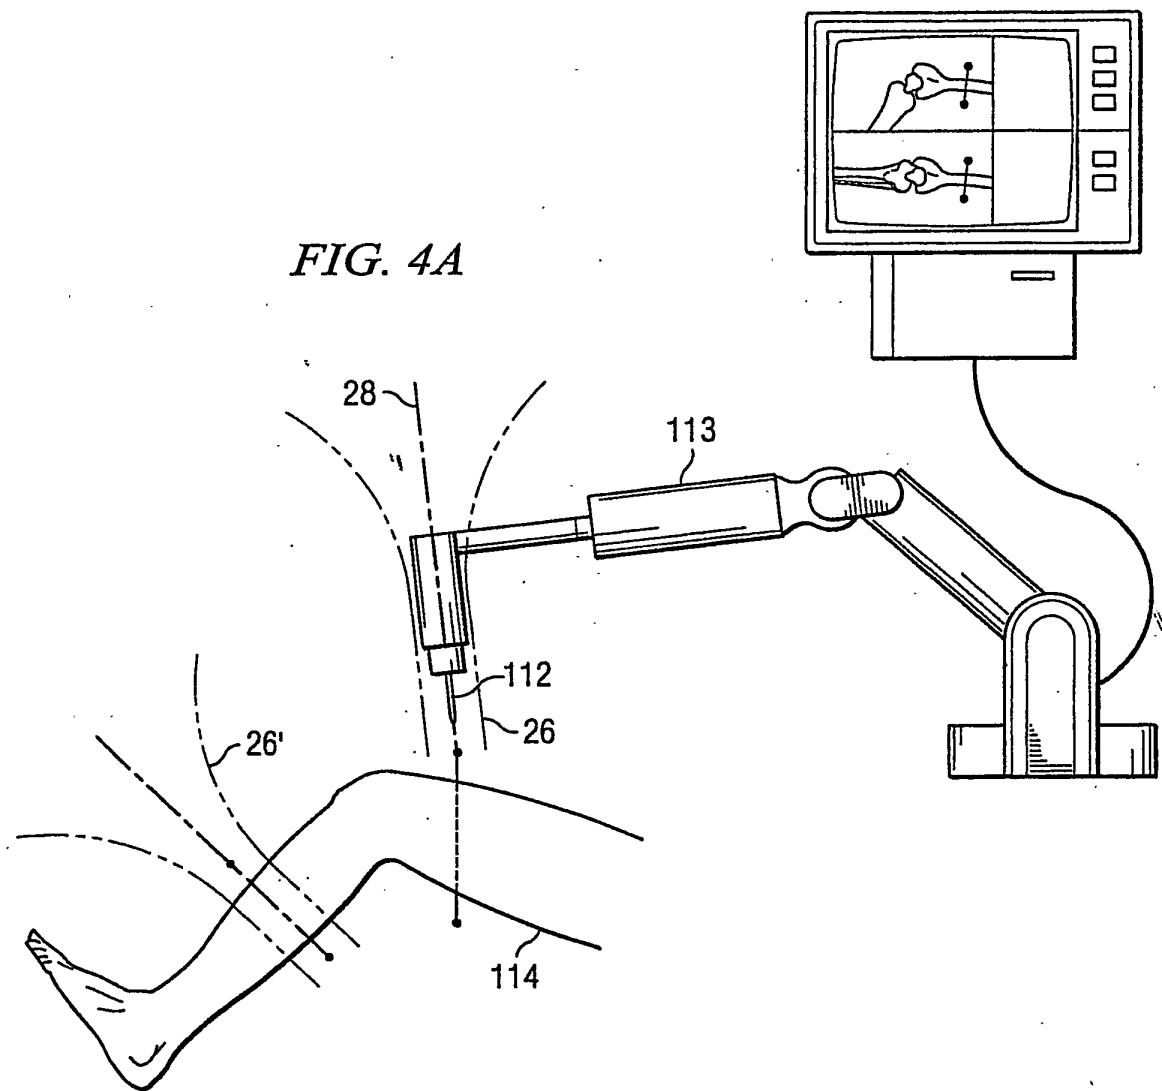


FIG. 3C

FIG. 4A



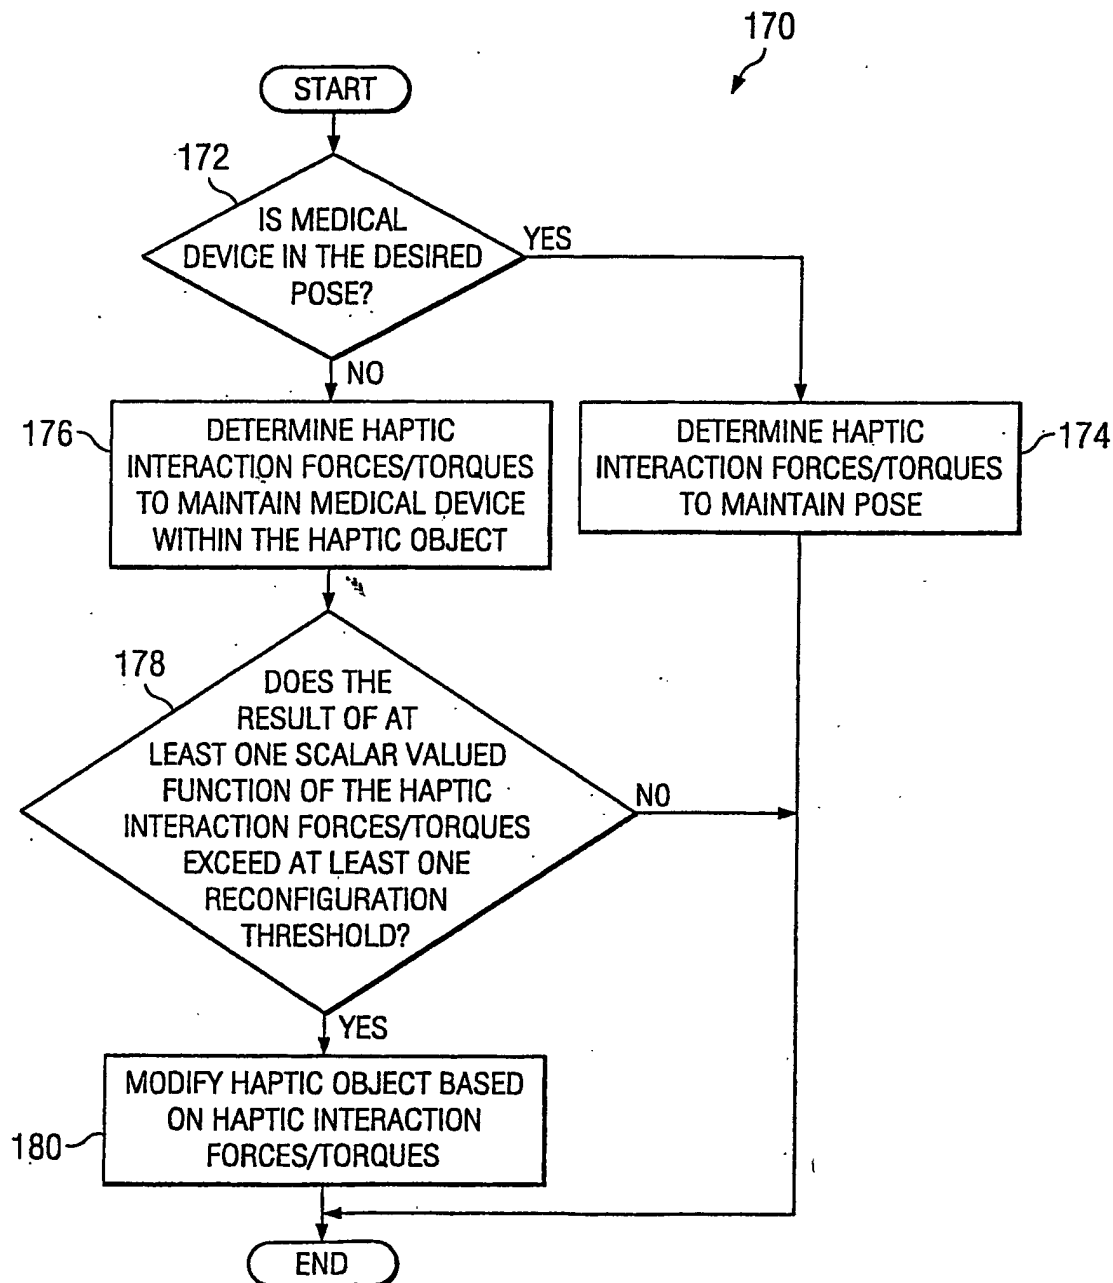
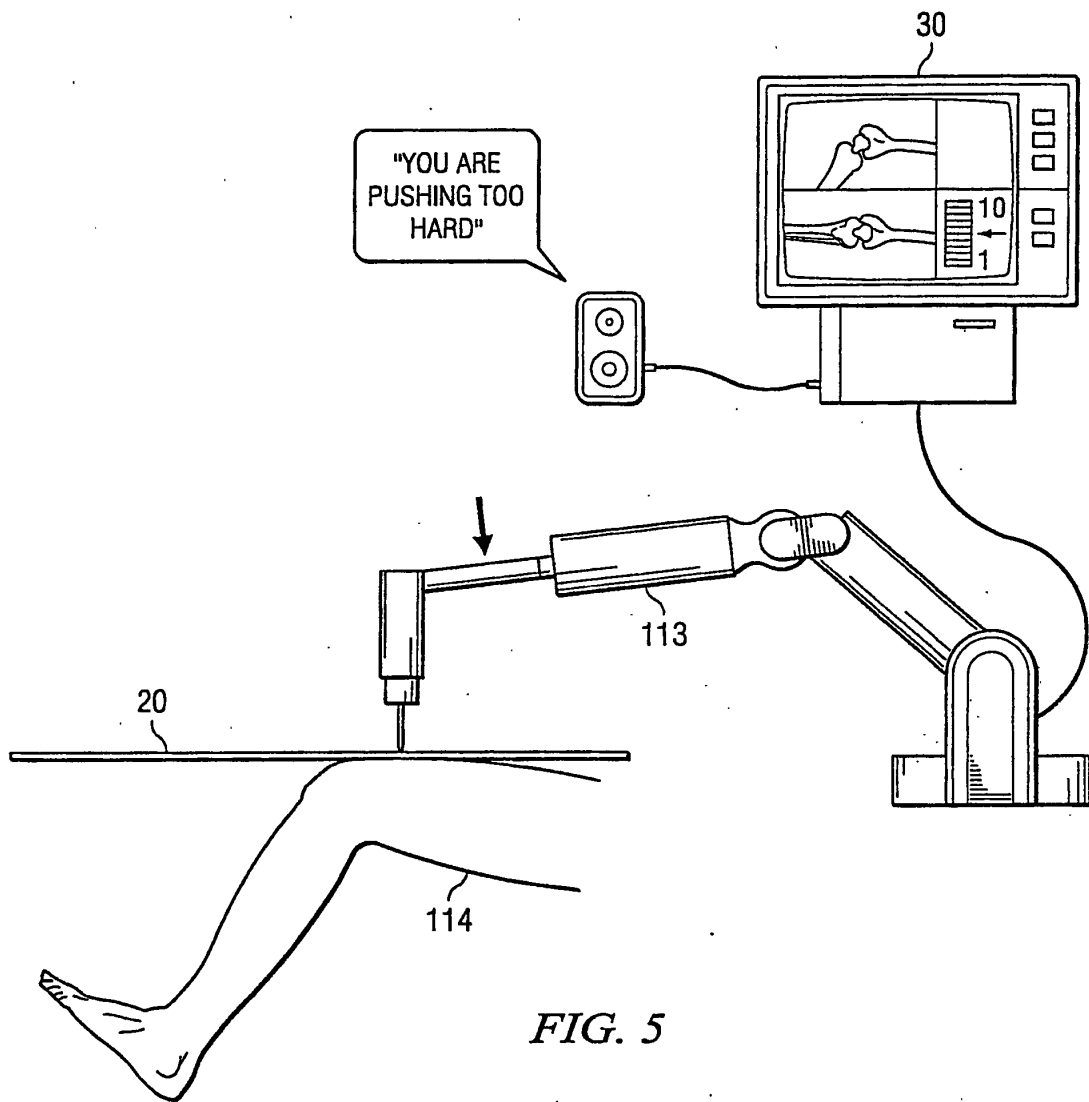
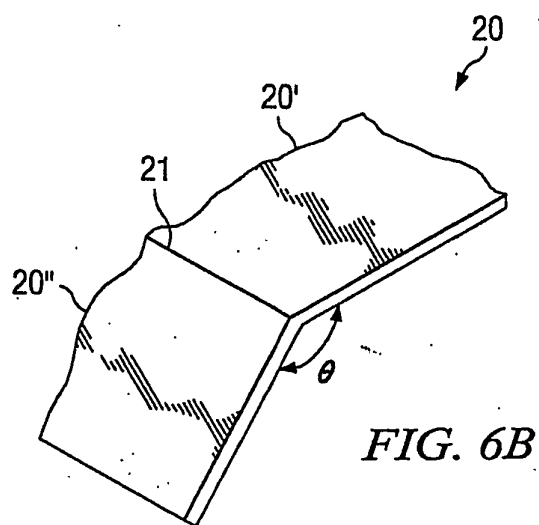
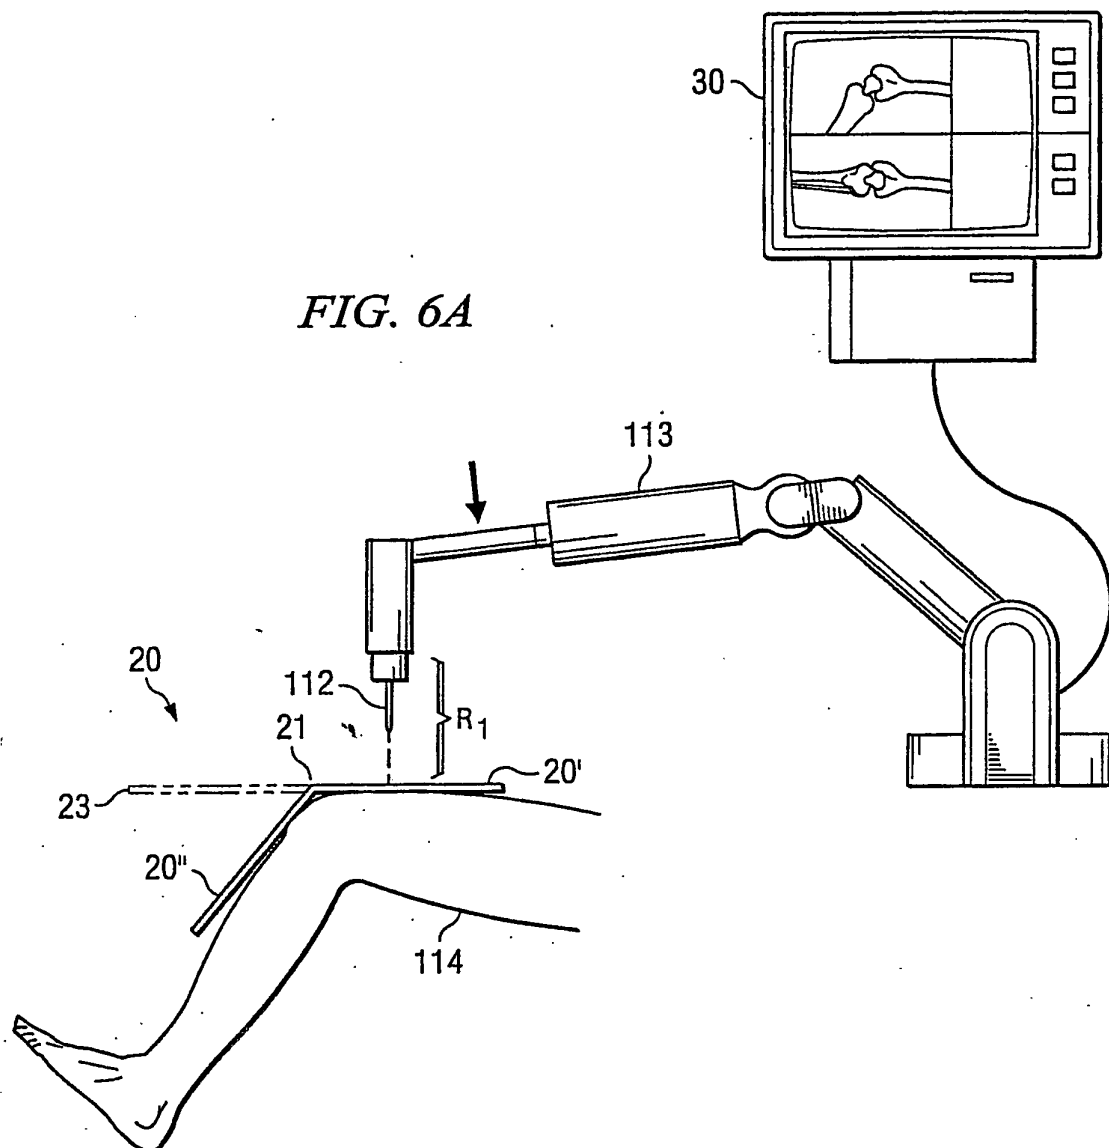


FIG. 4B





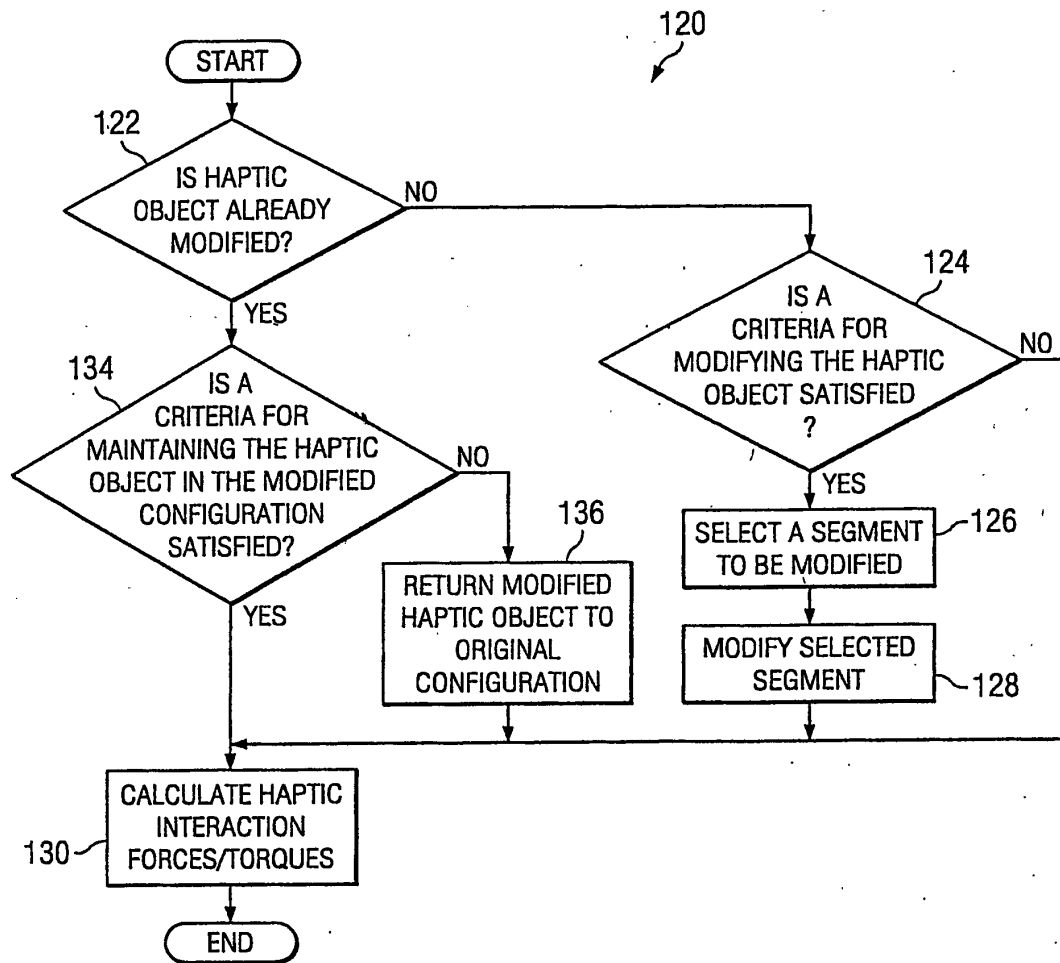
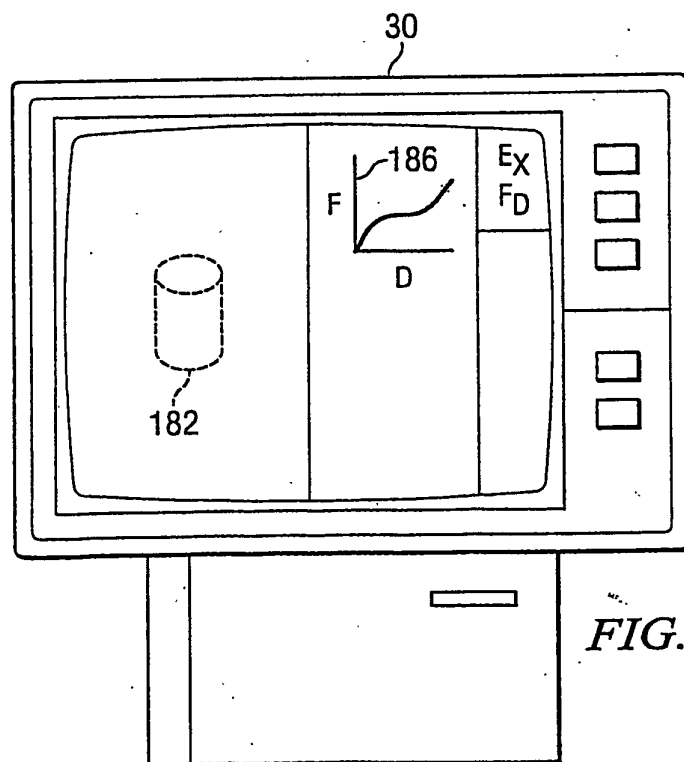
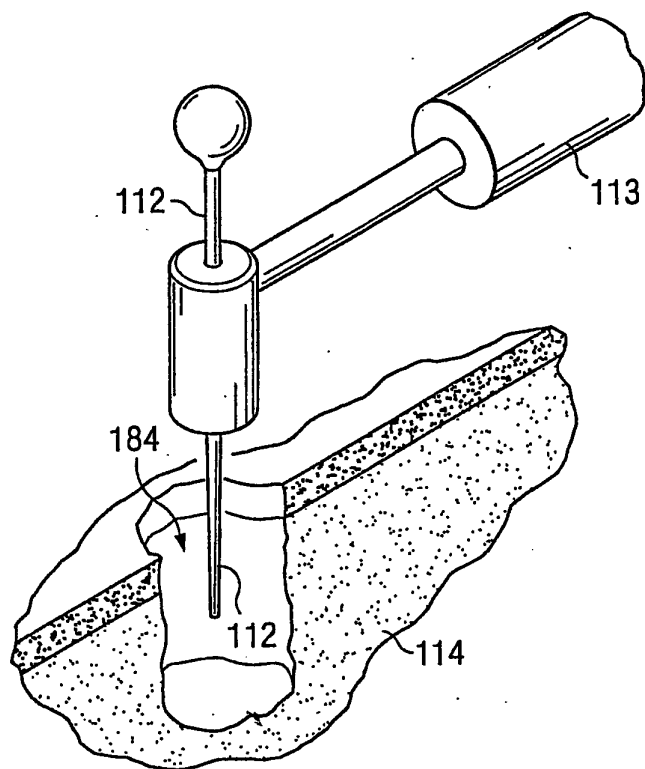


FIG. 6C






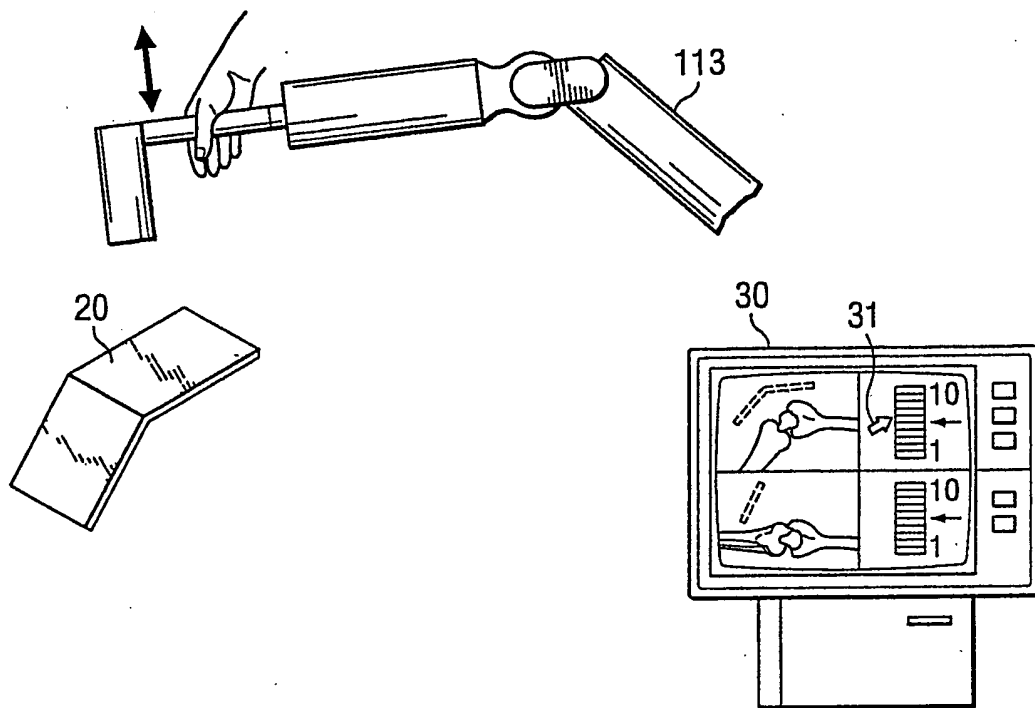


FIG. 8

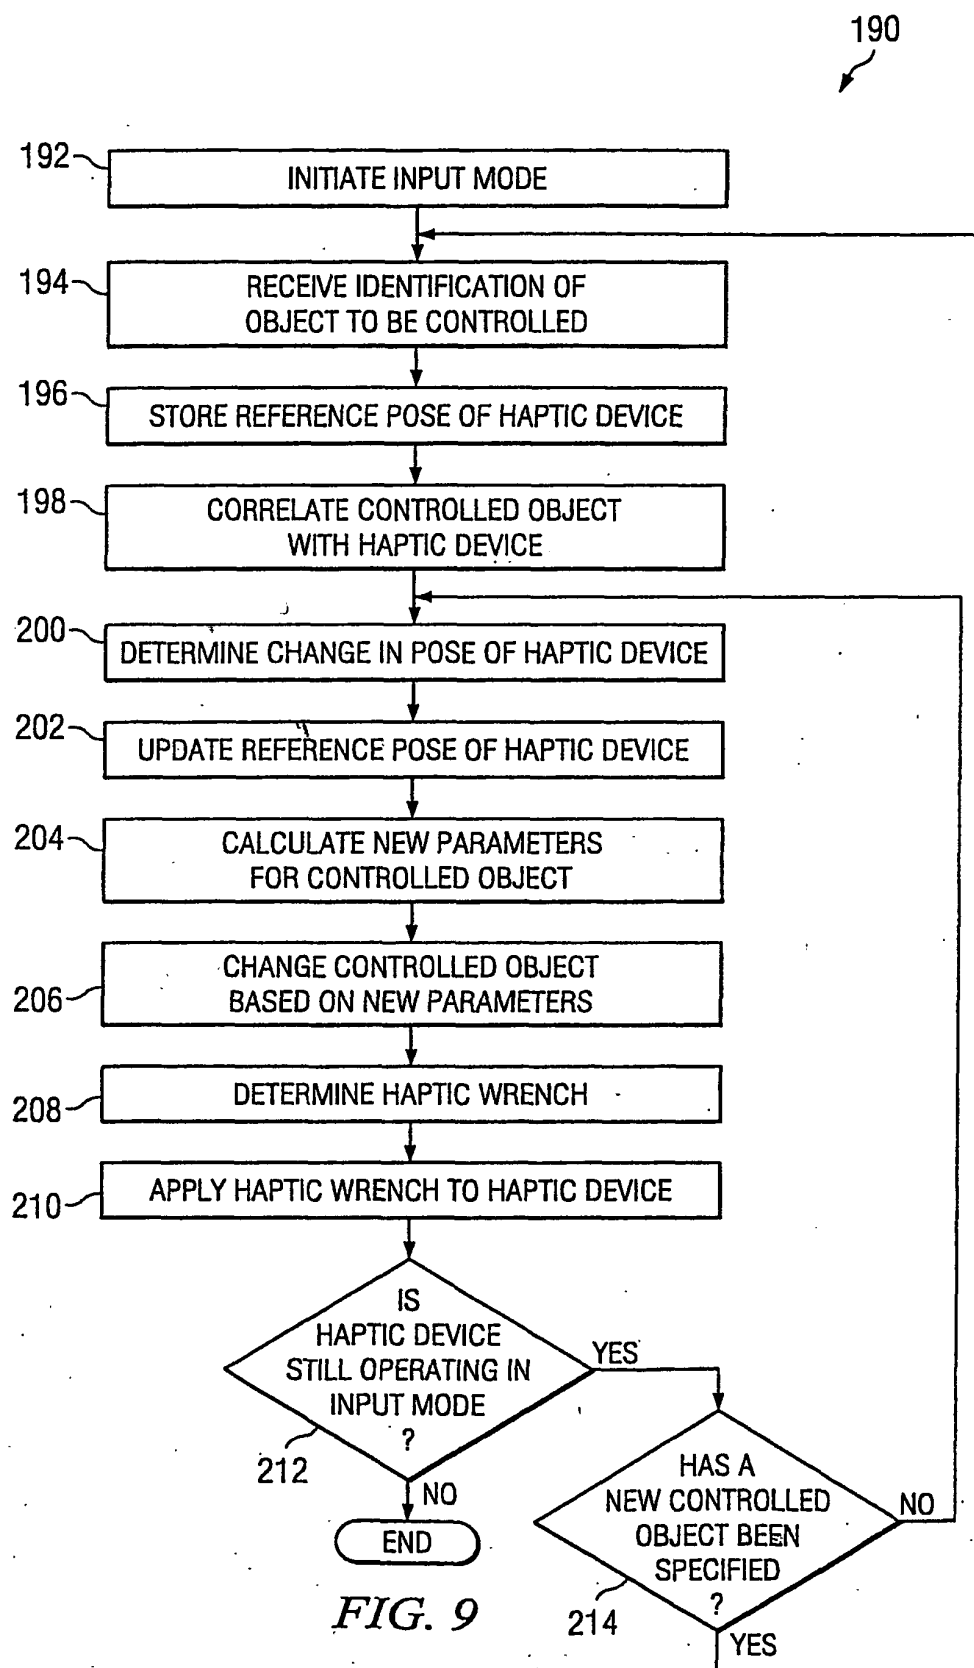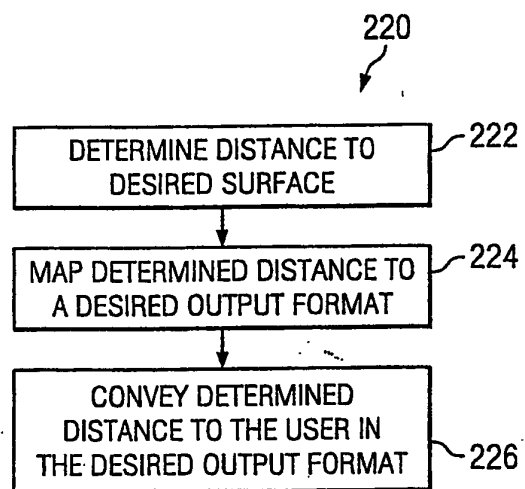

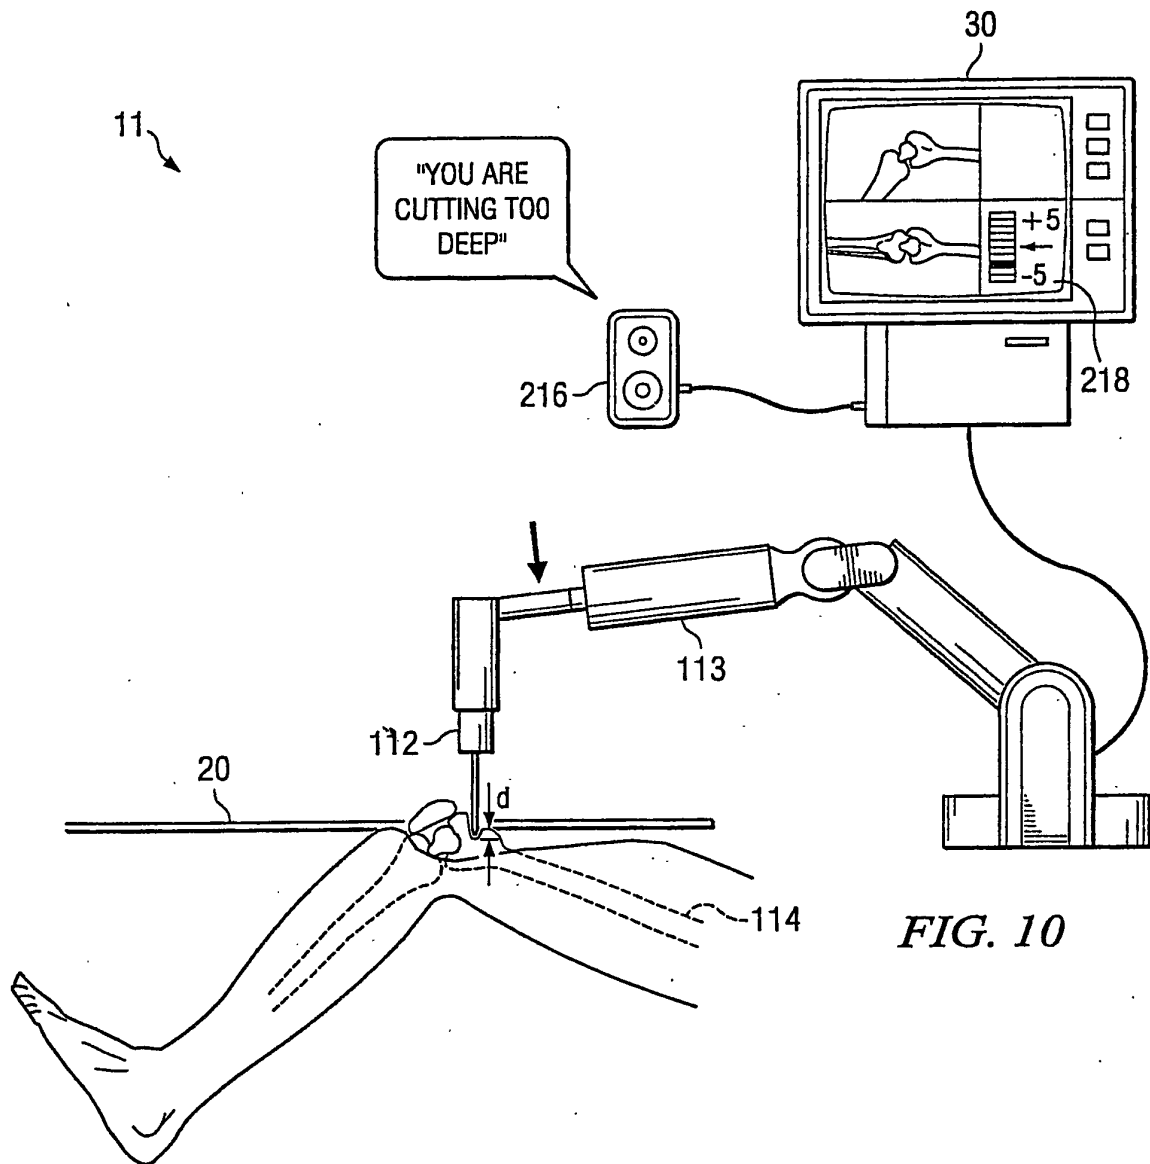

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20020120188 A [0011]