



(86) Date de dépôt PCT/PCT Filing Date: 2009/06/29
(87) Date publication PCT/PCT Publication Date: 2010/01/21
(45) Date de délivrance/Issue Date: 2017/08/08
(85) Entrée phase nationale/National Entry: 2010/12/29
(86) N° demande PCT/PCT Application No.: IL 2009/000644
(87) N° publication PCT/PCT Publication No.: 2010/007614
(30) Priorités/Priorities: 2008/06/29 (US61/076,652);
2008/11/10 (US61/112,783)

(51) Cl.Int./Int.Cl. *A61N 2/00* (2006.01),
A61N 1/32 (2006.01), *A61N 1/40* (2006.01)


(72) Inventeurs/Inventors:
RON EDOUTE, ODED, IL;
RON EDOUTE, ORIT, IL;
KREMIN, ITZHAK, IL;
POLYAKOV, VADIM, IL

(73) Propriétaire/Owner:
VENUS CONCEPT LTD, IL

(74) Agent: INTEGRAL IP

(54) Titre : APPAREIL ESTHETIQUE UTILE POUR ACCENTUER LE RAJEUNISSEMENT DE LA PEAU ET PROCEDES ASSOCIES

(54) Title: AN ESTHETIC APPARATUS USEFUL FOR INCREASING SKIN REJUVENATION AND METHODS THEREOF

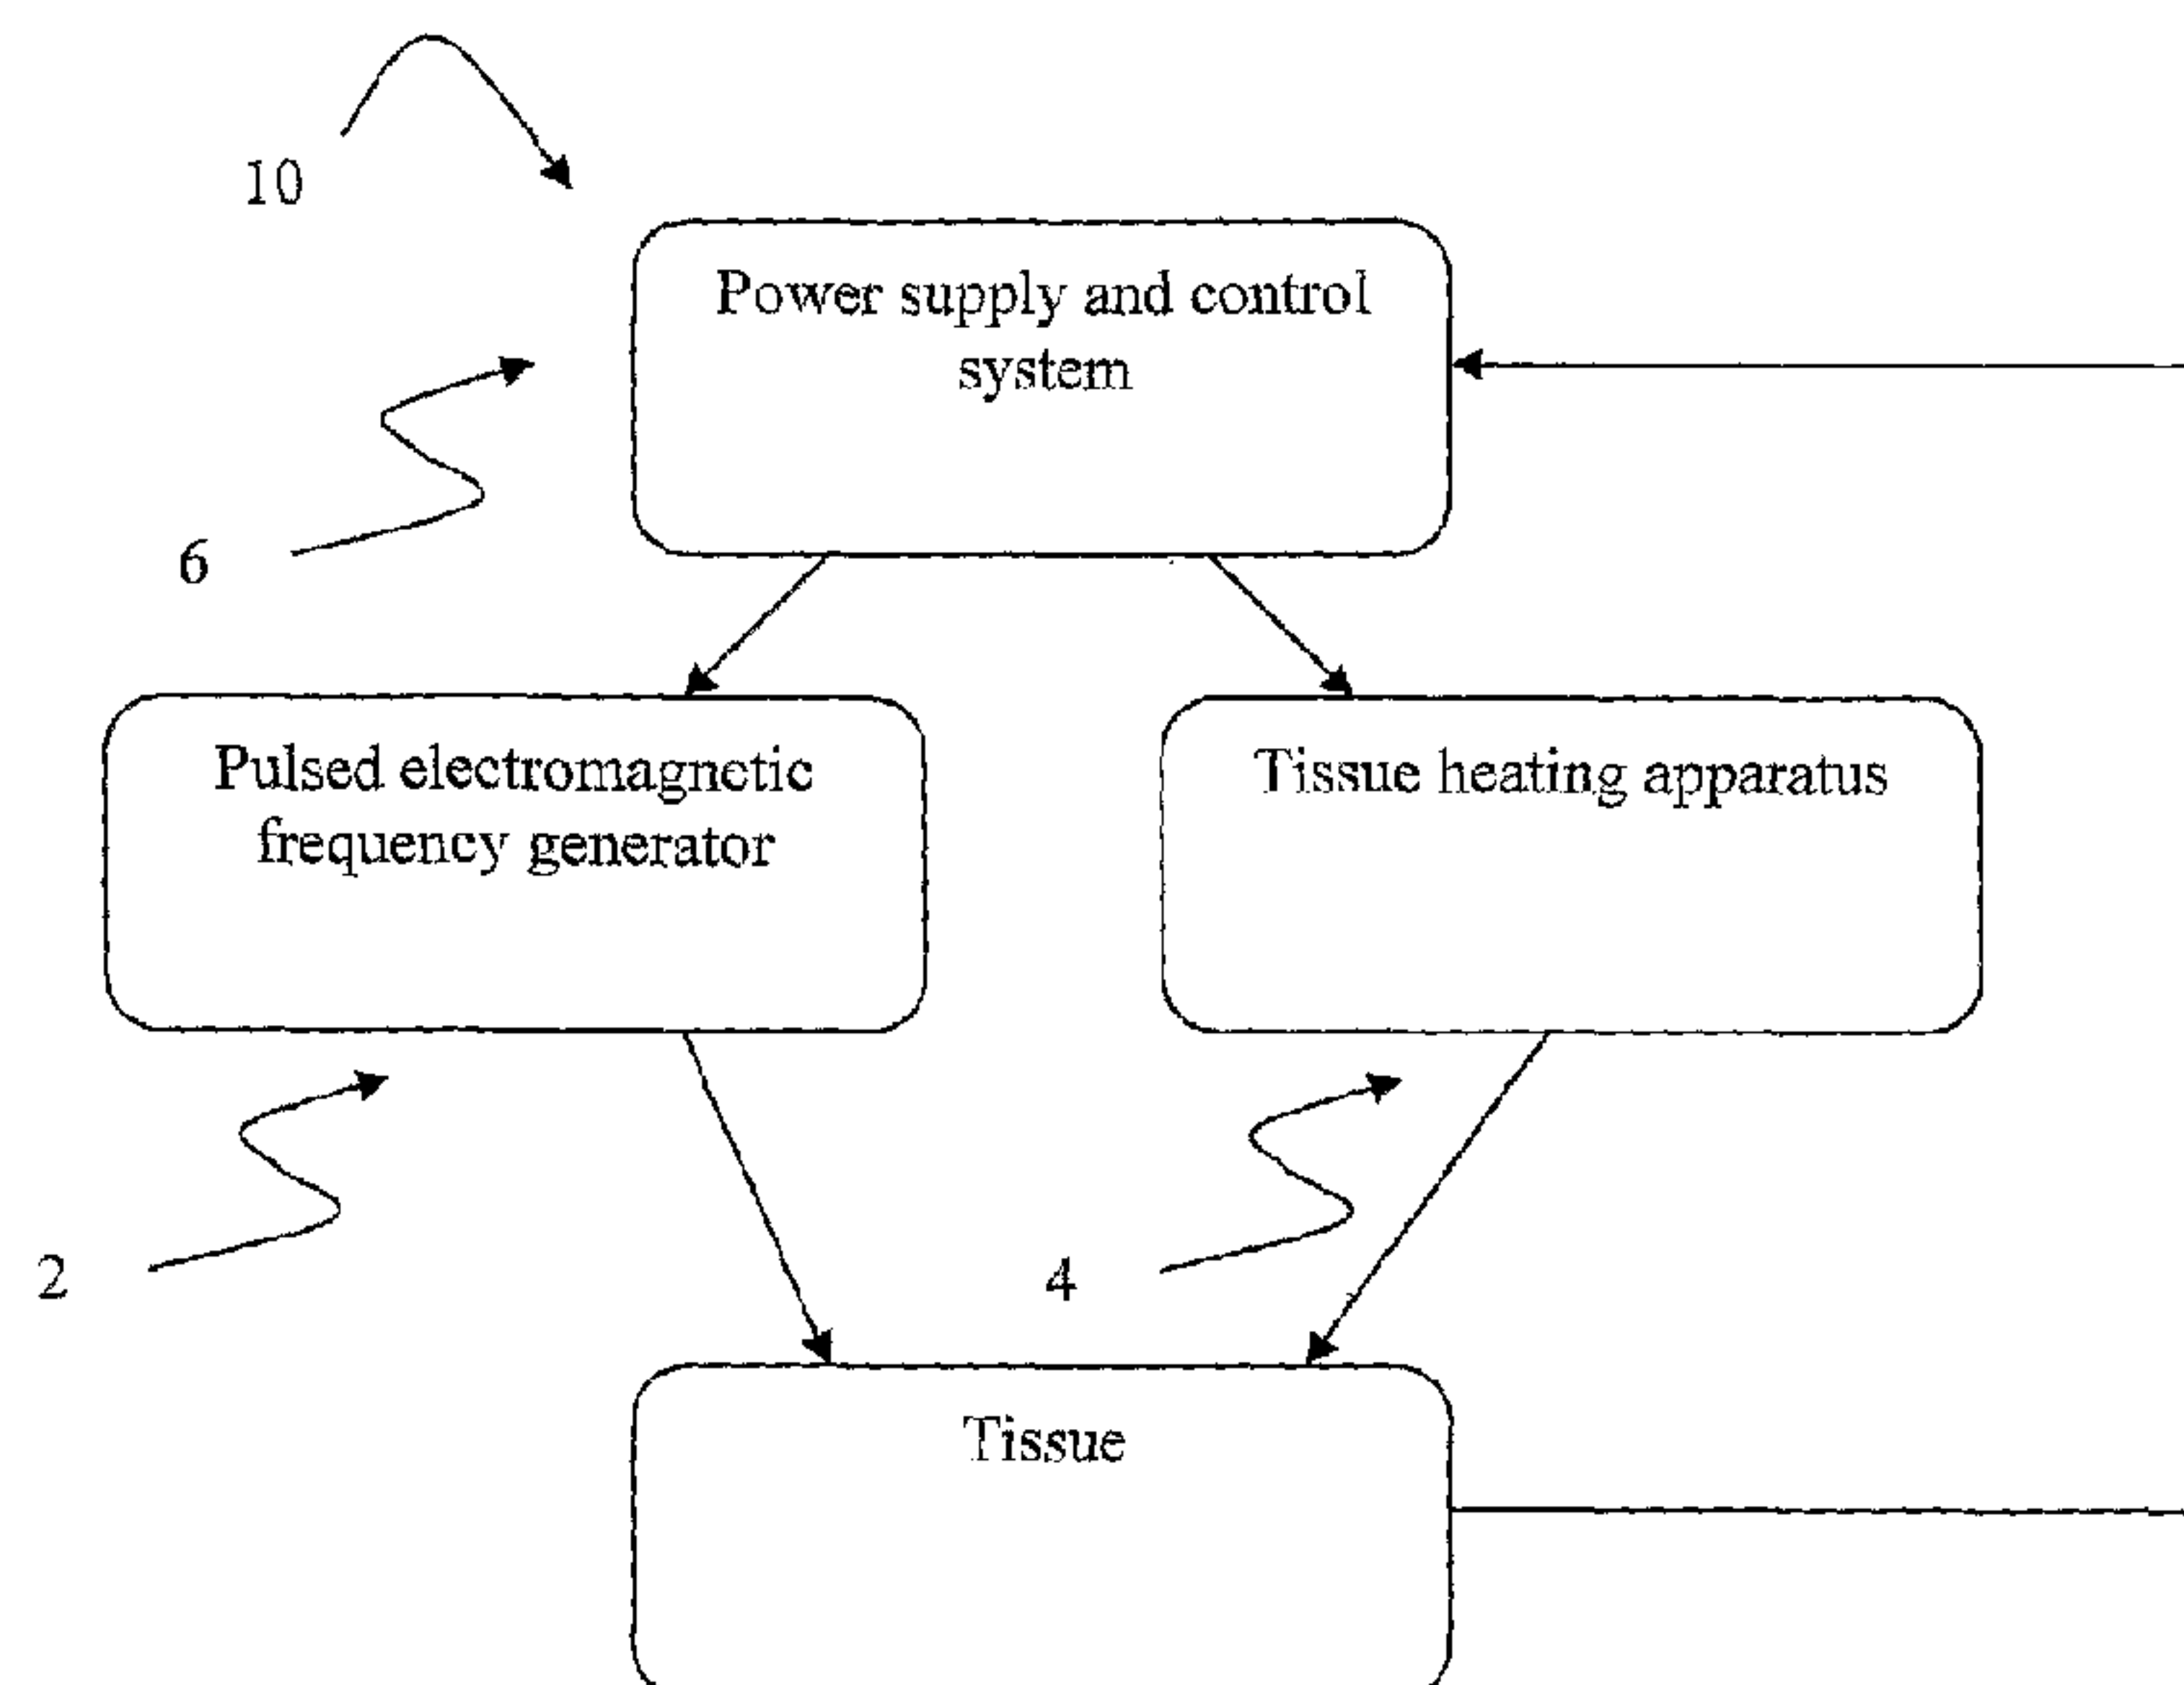

(57) Abrégé/Abstract:

The present invention provides a system for increasing skin rejuvenation of a region of a patient's skin comprising a pulsed electromagnetic field (PEMF) frequency generator for constantly providing electromagnetic pulses to said region of a patient's skin and a deep tissue diathermy device for constantly applying heat to said region of a patient's skin up to temperature T. The system is adapted for simultaneously applying heat and PEMF to the region of a patient's skin, - wherein application of the system increases skin rejuvenation such that the skin rejuvenation increase (SRI) is greater than the sum of the SRI provided by electromagnetic pulses increase and the SRI provided by the deep tissue diathermy device increase.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
21 January 2010 (21.01.2010)(10) International Publication Number
WO 2010/007614 A3

(51) International Patent Classification:

A61N 2/00 (2006.01) A61N 1/40 (2006.01)
A61N 1/32 (2006.01)

(21) International Application Number:

PCT/IL2009/000644

(22) International Filing Date:

29 June 2009 (29.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/076,652 29 June 2008 (29.06.2008) US
61/112,783 10 November 2008 (10.11.2008) US(71) Applicant (for all designated States except US): **VENUS TECHNOLOGIES LTD** [IL/IL]; 38 Ha'Barzel St., 69710 Tel Aviv (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RON EDOUTE, Oded** [IL/IL]; 14A Josef Milo St., 69643 Tel Aviv (IL). **RON EDOUTE, Orit** [IL/IL]; 14A Josef Milo St., 69643 Tel Aviv (IL). **KREMIN, Itzhak** [IL/IL]; 7 Remez St., 53242 Givatayim (IL). **POLYAKOV, Vadim** [IL/IL]; 38 Henrieta Sold St., 49532 Petach Tikva (IL).(74) Agent: **DR. EYAL BRESSLER LTD.**; 11 Tuval St., 52522 Ramat Gan (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: AN ESTHETIC APPARATUS USEFUL FOR INCREASING SKIN REJUVENATION AND METHODS THEREOF

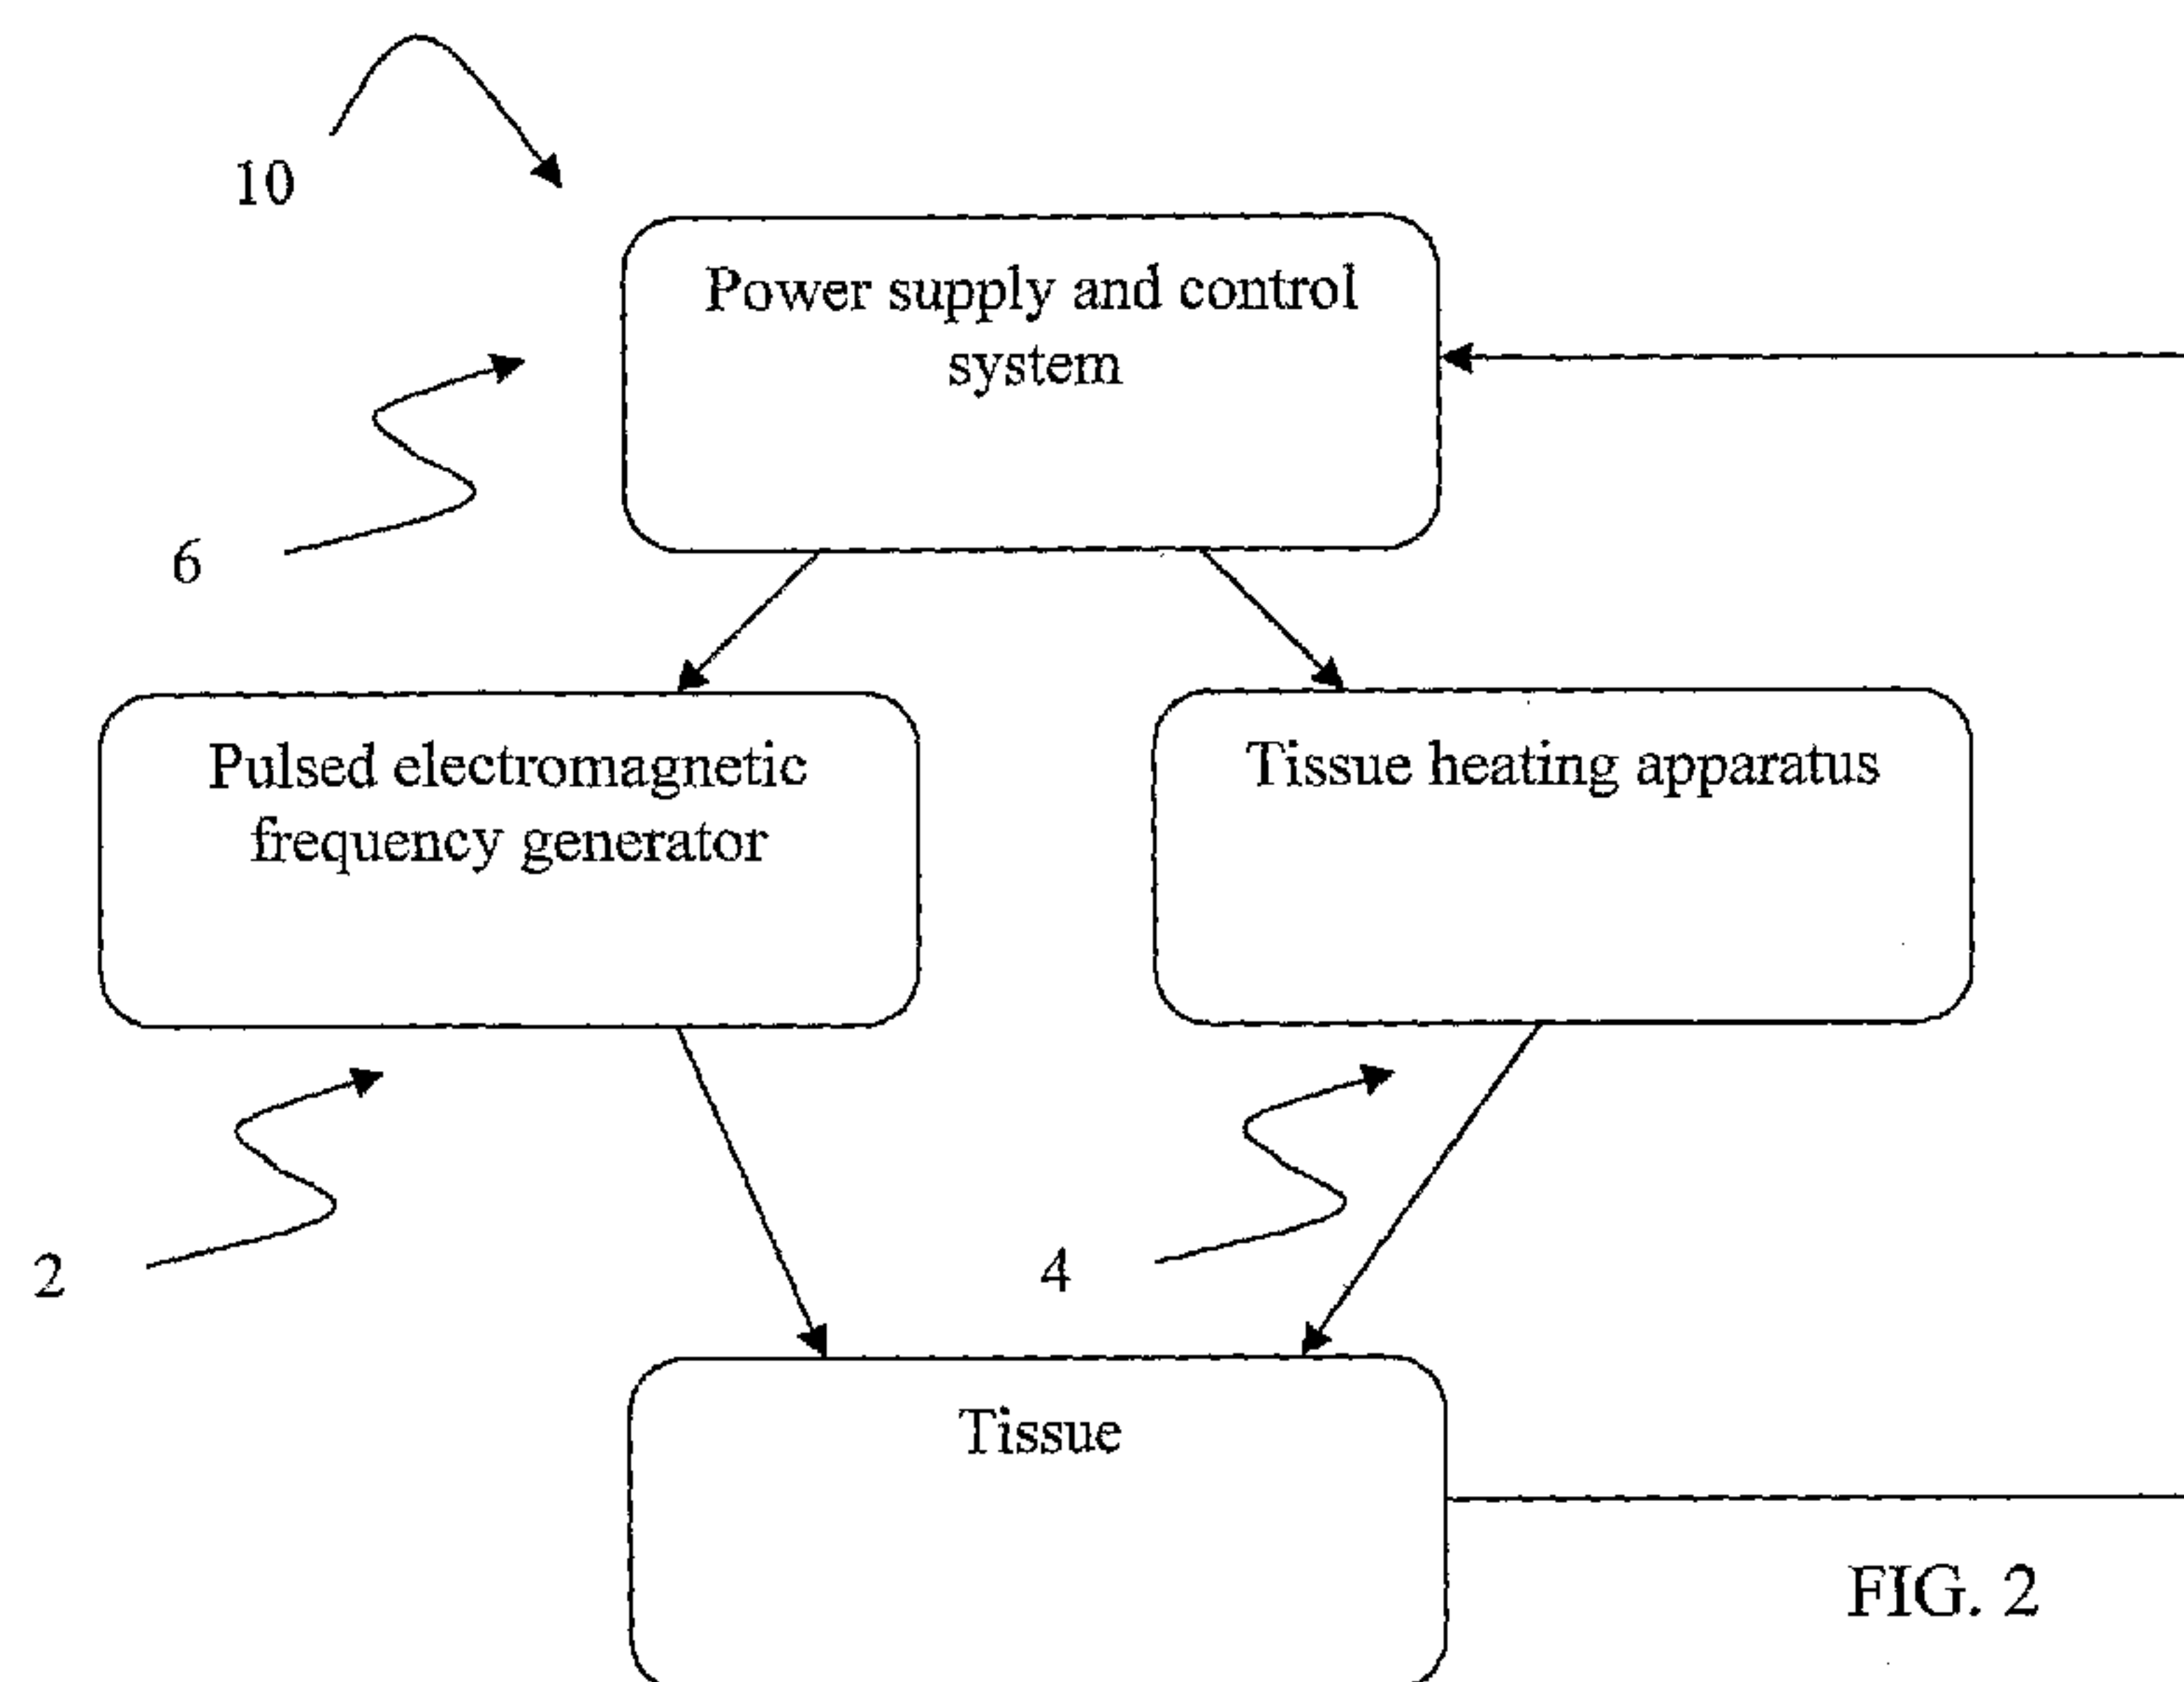


FIG. 2

(57) Abstract: The present invention provides a system for increasing skin rejuvenation of a region of a patient's skin comprising a pulsed electromagnetic field (PEMF) frequency generator for constantly providing electromagnetic pulses to said region of a patient's skin and a deep tissue diathermy device for constantly applying heat to said region of a patient's skin up to temperature T. The system is adapted for simultaneously applying heat and PEMF to the region of a patient's skin, wherein application of the system increases skin rejuvenation such that the skin rejuvenation increase (SRI) is greater than the sum of the SRI provided by electromagnetic pulses increase and the SRI provided by the deep tissue diathermy device increase.

WO 2010/007614 A3



Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
6 May 2010

AN ESTHETIC APPARATUS USEFUL FOR INCREASING SKIN REJUVENATION AND METHODS THEREOF

FIELD OF THE INVENTION

This invention generally relates to an esthetic device used to improve skin viability and skin rejuvenation, and a method of using the device.

BACKGROUND OF THE INVENTION

Improving the appearance of the skin has been the goal of many esthetic products and procedures for many years, since a tight skin, without wrinkles or cellulite, has a younger and more appealing appearance. Apart from age related changes, the skin also suffers from exposure to chemical and physical injuries, such as tobacco, cosmetics, esthetics and radiation from the sun and other sources. Those factors contribute to the decrease in collagen production, to reduced elasticity, and the appearance of wrinkles.

A few main approaches to tightening of the skin are common practice today. The surgical approach carries disadvantages related to the anesthesia, the surgical complications, and the healing process, which may cause scars. The chemical peel approach usually involves injury to the outermost layer of the skin – the epidermis – which may cause discoloration. Since collagen fibers are found in the dermis – the subcutaneous layer of the skin, and since heat was shown to contract these fibers and generate their production [Zelickson BD, Kist D, Bernstein E, Brown DB, Ksenzenko S, Burns J, Kilmer S, Mehregan D, Pope K. Histological and ultrastructural evaluation of the effects of a radiofrequency-based nonablative dermal remodeling device: a pilot study. Arch Dermatol. 2004 Feb;140(2):204-9], methods of differentially heating the dermis (*deep tissue diathermy*) have recently arisen.

A unique method of treating the dermis is called Pulsed Electromagnetic Fields (PEMF) therapy. This method usually employs electromagnetic radiation of different frequencies - ranging from static magnetic fields, through extremely low frequencies (ELF) to higher radiofrequencies (RF) - administered in pulses.

PEMF works in few ways. Due to the radiation absorbed in the tissue, it can be heated to various temperatures, depending on the power applied, the frequency transmitted, and more importantly the tissue characteristics. Eventually, the tissue can be warmed to denaturation temperatures, which cause coagulation necrosis and tissue damage. It can also be heated to

lower temperatures, which proved to result in the afore-mentioned contraction of collagen fibers.

Another *modus operandi* involves non thermal effects. These rely on specific tissue components and their reaction to the applied radiation characteristics. These effects might be due to large charged molecules and their reaction to various frequencies and frequency harmonies, charged small ions in the cell membranes affecting the cells function and reactions to hormones and chemical signals, charged small ions in the extracellular space and other poorly understood mechanisms.

Furthermore, applying the radiation in pulses was also found to have non thermal effects. Yet more, only a specific combination of frequency, duty cycle and transmitted power achieve a specific tissue response. Recent scientific research has confronted these challenges and found the PEMF characteristics needed for the desired biophysical response.

It is now commonly accepted that weak electromagnetic fields (EMF) administered in pulses are capable of initiating various healing processes in fractures, multiple sclerosis and Parkinson's disease, and even delivering pain relief; however it seems that most of the conditions that seem most likely to respond to PEMF are musculoskeletal. The FDA has allowed the use of pulsed radiofrequency electromagnetic field for treatment of pain and edema in superficial soft tissues two decades ago. [Rosch, P.J., Markov, M.S., eds. Bioelectromagnetic Medicine, Marcel Dekker, NY, 251- 264].

The use of PEMF can also be recruited for cosmetic purposes as described above. Several studies have addressed the effect of PEMF on dermal components. For example, *in vivo* trials showed that pulsed electromagnetic field of certain field intensities and frequencies increased epidermal collagen synthesis [Ahmadian S, Zarchi SR, Bolouri B. Effects of extremely-low-frequency pulsed electromagnetic fields on collagen synthesis in rat skin. Biotechnol Appl Biochem. 2006 Feb;43(Pt 2):71-5]. This new formed collagen increases skin elasticity and rejuvenates its appearance.

In vitro trials showed that PEMF increased the degree of endothelial cell tubulization and proliferation, and augmented angiogenesis primarily by stimulating endothelial release of FGF-2, inducing paracrine and autocrine changes in the surrounding tissue [Tepper OM et al. Electromagnetic fields increase *in vitro* and *in vivo* angiogenesis through endothelial release of FGF-2. FASEB J. 2004 Aug;18(11):1231-3. Epub 2004 Jun 18]. Angiogenesis, the sprouting of new blood vessels, increases blood flow to the tissue, which in turn increases oxygen and nutritional substances delivery to the tissue. This effect is most beneficial for an

injured tissue, promoting rapid and improved healing. The growth factor released further enhances the healing process, both in quality and time of improvement.

The scientific evidence of the effect of PEMF on tissues was utilized in various applications. For example, US20050182462A1 discloses healthy deep tissue heating using PEMF for the purpose of causing contraction and tightening of the skin.

PEMF has also been used to improve skin wound healing. For example, WO08064272 discloses a method of treating a severe diabetic ulcer using PEMF. The patent also discloses the addition of intermittent compression therapy (ICT) and the use of low intensity ultrasound (up to 50 W/cm²), the latter aimed at inhibiting microbial growth.

Other methods of heating the dermis used non pulsating RF radiation, applied by antenna or electrodes. For example, WO98005380 discloses a method of tightening skin using an RF electromagnetic energy delivery device.

Improving the results of skin tightening based on dermis diathermy is still a long felt need, both for esthetic and therapeutic purposes.

SUMMARY OF THE INVENTION

It is one object of the present invention to provide a system (10) adapted to increase skin rejuvenation of a region of a patient's skin, said system comprising

- a. a pulsed electromagnetic field (PEMF) frequency generator (2) for constantly providing electromagnetic pulses to said region of a patient's skin; and,
- b. a deep tissue diathermy device (4) for constantly applying heat to said region of a patient's skin up to temperature T;

said system (10) is adapted for simultaneously applying heat and PEMF to said region of a patient's skin; wherein application of said system increases said skin rejuvenation such that said skin rejuvenation increase (SRI) is greater than the sum of said SRI provided by electromagnetic pulses increase and said SRI provided by said deep tissue diathermy device increase.

It is another object of the present invention to provide the system as defined above, wherein said electromagnetic pulse is a triangular shaped at frequency of 25 Hz and intensity of 20 Gauss.

It is another object of the present invention to provide the system as defined above, wherein said electromagnetic pulse is square shaped at a frequency of 16 Hz, duration of about 5 milliseconds and intensity of 12 Gauss.

It is another object of the present invention to provide the system as defined above, wherein said deep tissue diathermy device (4) is selected from any device emitting RF radiation or any means adapted for producing electrical current absorbed by subcutaneous tissue.

It is another object of the present invention to provide the system as defined above, wherein said deep tissue diathermy device (4) additionally comprises:

- a. at least one electrical output device adapted to generate RF electromagnetic energy;
- b. at least two electrodes electrically coupled to said electrical output device and placed on said skin region, wherein all said electrodes are adapted to simultaneously apply said RF energy to said skin region.

It is another object of the present invention to provide the system as defined above, wherein said deep tissue diathermy device (4) additionally comprises:

- a. at least one electrical output device adapted to generate electrical current;
- b. at least two electrodes electrically coupled to said electrical output device and placed on said skin region, wherein all said electrodes are adapted to simultaneously apply said electrical current to said skin region.

It is another object of the present invention to provide the system as defined above, wherein said system reduces side effects and/or harmful effects of said electromagnetic pulses and/or said deep tissue diathermy such that said reduction of said side effects and/or said harmful effects is greater than the sum of said reduction of said electromagnetic pulses and/or said reduction of said deep tissue diathermy.

It is another object of the present invention to provide the system as defined above, wherein said system additionally comprising a control system (6) adapted to regulate said electromagnetic pulses and/or said electromagnetic pulses.

It is another object of the present invention to provide the system as defined above, wherein said pulsed electromagnetic frequency generator is adapted to provide a dynamic magnetic field such that said electromagnetic pulses vary with time.

It is another object of the present invention to provide the system as defined above, wherein the shape of said electromagnetic pulse is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

It is another object of the present invention to provide the system as defined above, wherein the magnetic field intensity B of each pulse applied by said pulsed electromagnetic frequency generator (2) ranges between about 0 and about 3 Tesla.

It is another object of the present invention to provide the system as defined above, wherein the duration of each pulse applied by said pulsed electromagnetic frequency generator (2) ranges between about 3 and about 1000 milliseconds.

It is another object of the present invention to provide the system as defined above, wherein the frequency F applied by the pulses of said pulsed electromagnetic frequency generator (2) ranges between about 1 Hz and about 1M Hz.

It is another object of the present invention to provide the system as defined above, wherein the energy E applied by the pulses of said pulsed electromagnetic frequency generator (2) ranges between about 1 and about 150 watts per pulse.

It is another object of the present invention to provide the system as defined above, wherein said deep tissue diathermy device (4) is selected in a non-limiting manner from a group consisting of an ultrasonic diathermy, an optical device, electromagnetic induction, sound waves emitting instrument, direct heat applying instrument, or from any other means of heating subcutaneous tissue to temperature T .

It is another object of the present invention to provide the system as defined above, wherein said optical device is adapted to emit light in wavelengths absorbed by subcutaneous tissue such that said subcutaneous tissue is heated.

It is another object of the present invention to provide the system as defined above, wherein said sound waves emitting instrument is adapted to emit sound waves absorbed by the subcutaneous tissue such that said subcutaneous tissue is heated.

It is another object of the present invention to provide the system as defined above, wherein said temperature T is higher than about 30 and lower than about 80 degrees.

It is another object of the present invention to provide the system as defined above, wherein said power supply and control system (6) monitors physical tissue parameters and changes applied heat and electromagnetic pulses accordingly.

It is another object of the present invention to provide the system as defined above, wherein said power supply and control system (6) additionally comprising:

- a. processing means, adapted to store in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue

- impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- b. sensing means; adapted to sense electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , Intensity I of said ultrasound irradiation, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
 - c. regulating means, adapted to allow said electromagnetic radiation and heat radiation if said parameters are within said safe treatment parameters and to stop the electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

It is another object of the present invention to provide the system as defined above, wherein said power supply and control system (6) includes a mechanism for skin cooling.

It is another object of the present invention to provide the system as defined above, wherein said system (10) is encased in at least one platform.

It is another object of the present invention to provide the system as defined above, wherein said pulsed electromagnetic frequency generator (2) and said deep tissue diathermy device (4) have more than one applicator to treat more than one body part simultaneously.

It is another object of the present invention to provide the system as defined above, wherein said pulsed electromagnetic frequency generator (2) has electrostatic shielding.

It is another object of the present invention to provide the system as defined above, especially adapted to increase skin rejuvenation in the immediate (short) range.

It is another object of the present invention to provide the system as defined above, especially adapted to increase skin rejuvenation in the intermediate range.

It is another object of the present invention to provide the system as defined above, especially adapted to increase skin rejuvenation in the long range.

It is another object of the present invention to provide the system as defined above, wherein said system is especially adapted to operate according to IEC selected from a group consisting of IEC 60601-2-35, IEC 60601-2-33, IEC 60601-2-29, IEC 60601-2-9, IEC 60601-2-5, IEC 60601-2-3, IEC 60601-1-8, IEC 60601-1-6, IEC 60601-1-4, IEC 60601-1-3, IEC 60601-1-2, IEC 60601-1-1 or any combination thereof.

It is another object of the present invention to provide a method (400) of increasing skin rejuvenation of a region of a patient's skin. The method comprises steps selected inter alia from:

- a. obtaining (i) pulsed electromagnetic frequency generator; and, (ii) a deep tissue diathermy device;
- b. applying heat to a subcutaneous tissue within said region up to temperature T; and,
- c. applying pulses of electromagnetic field to said region;

wherein said increasing of said skin rejuvenation is greater than the sum of said applying heat to a subcutaneous tissue within said region increase and said applying pulses electromagnetic therapy to said region increase.

It is another object of the present invention to provide a method (410) of increasing skin rejuvenation of a region of a patient's skin. The method comprises steps selected inter alia from:

- a. obtaining (i) pulsed electromagnetic frequency generator; and, (ii) a deep tissue diathermy device;
- b. applying pulses of electromagnetic field to said region; and,
- c. applying heat to a subcutaneous tissue within said region up to temperature T;

wherein said increasing of said skin rejuvenation is greater than the sum of said applying heat to a subcutaneous tissue within said region and said applying pulses electromagnetic therapy to said region

It is another object of the present invention to provide a method (420) of increasing skin rejuvenation of a region of a patient's skin. The method comprises steps selected inter alia from:

- a. obtaining (i) pulsed electromagnetic frequency generator; and, (ii) a deep tissue diathermy device;
- b. applying heat to a subcutaneous tissue within said region up to temperature T; whilst simultaneously applying pulses of electromagnetic field to said region;

wherein said increasing of said skin rejuvenation is greater than the sum of said applying heat to a subcutaneous tissue within said region and said applying pulses electromagnetic therapy to said region.

It is another object of the present invention to provide the methods as defined above, wherein said system reduces side effects and/or harmful effects of said electromagnetic pulses and/or said deep tissue diathermy such that said reduction of said side effects and/or said harmful

effects is greater than the sum of said reduction of said electromagnetic pulses and/or said reduction of said deep tissue diathermy.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of monitoring and/or controlling said steps of applying heat to a subcutaneous tissue within said region and/or said step of applying pulsed electromagnetic therapy to said region.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of applying a dynamic magnetic field onto said region.

It is another object of the present invention to provide the methods as defined above, additionally comprising steps of

- a. storing in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- b. sensing electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , Intensity I of said ultrasound irradiation, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- c. allowing said electromagnetic radiation and said heat radiation if parameters within said safe treatment parameters and to stop the electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting the shape of said electromagnetic pulse is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of applying a triangular shaped electromagnetic pulse at frequency of 25 Hz and intensity of 20 Gauss.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of applying a square shaped electromagnetic pulse at a frequency of 16 Hz, duration of about 5 milliseconds and intensity of 12 Gauss.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting said deep tissue diathermy device (4) from any device emitting RF radiation or any means adapted for producing electrical current absorbed by subcutaneous tissue.

It is another object of the present invention to provide the methods as defined above, wherein said step of applying heat to a subcutaneous tissue additionally comprising steps of

- a. obtaining at least one electrical output device adapted to generate RF electromagnetic energy;
- b. electrically coupling at least two electrodes to said electrical output device;
- c. placing said at least two electrodes on said skin region; and,
- d. simultaneously applying via all said electrodes said RF energy to said skin region.

It is another object of the present invention to provide the methods as defined above, wherein said step of applying heat to a subcutaneous tissue additionally comprising steps of

- a. obtaining at least one at least one electrical output device adapted to generate electrical current;
- a. electrically coupling at least two electrodes to said electrical output device;
- b. placing said at least two electrodes on said skin region; and,
- c. simultaneously applying via all said electrodes said electrical current to said skin region.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting said temperature T from a region of about 30 to about 80 degrees.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting the duration of each pulse applied by said pulsed electromagnetic frequency generator (2) to be higher than about 3 and lower than about 1000 milliseconds.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting the magnetic field intensity B of each pulse applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 0 and lower than about max magnetic field used in MRI devices (i.e., 3 Tesla).

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting the frequency F applied by the pulses applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 1 and lower than about 1M Hz.

It is another object of the present invention to provide the methods as defined above, additionally comprising step of selecting the energy E applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 1 and lower than about 150 watts per pulse.

It is another object of the present invention to provide the methods as defined above, wherein step of applying heat is applied for about 0.01 to 60 minutes.

It is another object of the present invention to provide the methods as defined above, wherein the heat and the pulsed electromagnetic therapy are applied simultaneously, sequentially or separately.

It is another object of the present invention to provide the methods as defined above, wherein said method is repeated 1 to 100 times in each treatment.

It is another object of the present invention to provide the methods as defined above, wherein said treatment is repeated more than once.

It is another object of the present invention to provide the methods as defined above, wherein said step of applying heat is performed by devices selected from a group consisting of: ultrasonic diathermy, an optical device, electromagnetic induction, sound waves emitting instrument, direct heat applying instrument, or from any other means of heating subcutaneous tissue to temperature T .

It is another object of the present invention to provide the methods as defined above, especially adapted to increase skin rejuvenation in the immediate (short) range

It is another object of the present invention to provide the methods as defined above, especially adapted to increase skin rejuvenation in the intermediate range.

It is another object of the present invention to provide the methods as defined above, especially adapted to increase skin rejuvenation in the long range.

It is another object of the present invention to provide the methods as defined above, wherein said method is especially adapted to operate according to IEC selected from a group

consisting of IEC 60601-2-35, IEC 60601-2-33, IEC 60601-2-29, IEC 60601-2-9, IEC 60601-2-5, IEC 60601-2-3, IEC 60601-1-8, IEC 60601-1-6, IEC 60601-1-4, IEC 60601-1-3, IEC 60601-1-2, IEC 60601-1-1 or any combination thereof.

It is another object of the present invention to provide an integrated system (20) adapted to increase skin rejuvenation of a region of a patient's skin, said system comprising at least two electrodes (41) adapted to be placed on said region of a patient's skin; each of said electrodes is at least partially coiled via a coil 42; wherein each of said electrodes is adapted for both (i) providing electromagnetic pulses to said region of a patient's skin; and, (ii) applying heat up to temperature T to said region of a patient's skin; further wherein *all* of said electrodes are adapted to simultaneously provide said electromagnetic pulses to said region of a patient's skin and apply heat to said region of a patient's skin.

It is another object of the present invention to provide the integrated system as defined above, wherein said heat applied to said region of a patient's skin is obtained by emitting RF radiation or via producing electrical current absorbed by subcutaneous tissue.

It is another object of the present invention to provide the integrated system as defined above, wherein application of said system increases said skin rejuvenation such that said skin rejuvenation increase (SRI) is greater than the sum of said SRI provided by electromagnetic pulses increase and said SRI provided by said deep tissue diathermy device increase.

It is another object of the present invention to provide the integrated system as defined above, wherein said electromagnetic pulse is a triangular shaped at frequency of 25 Hz and intensity of 20 Gauss.

It is another object of the present invention to provide the integrated system as defined above, wherein said electromagnetic pulse is square shaped at a frequency of 16 Hz, duration of about 5 milliseconds and intensity of 12 Gauss.

It is another object of the present invention to provide the integrated system as defined above, wherein said system reduces side effects and/or harmful effects of said electromagnetic pulses and/or said deep tissue diathermy such that said reduction of said side effects and/or said harmful effects is greater than the sum of said reduction of said electromagnetic pulses and/or said reduction of said deep tissue diathermy.

It is another object of the present invention to provide the integrated system as defined above, wherein said system additionally comprising a control system (6) adapted to regulate said electromagnetic pulses and/or said electromagnetic pulses.

It is another object of the present invention to provide the integrated system as defined above, wherein said system is adapted to provide a dynamic magnetic field such that said electromagnetic pulses vary with time.

It is another object of the present invention to provide the integrated system as defined above, wherein the shape of said electromagnetic pulse is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

It is another object of the present invention to provide the integrated system as defined above, wherein the magnetic field intensity B of each pulse applied by said pulsed electromagnetic frequency generator (2) ranges between about 0 and about 3 Tesla.

It is another object of the present invention to provide the integrated system as defined above, wherein the duration of each pulse applied by said system ranges between about 3 and about 1000 milliseconds.

It is another object of the present invention to provide the integrated system as defined above, wherein the frequency F applied by the pulses of said system ranges between about 1 Hz and about 1M Hz.

It is another object of the present invention to provide the integrated system as defined above, wherein the energy E applied by the pulses of said system ranges between about 1 and about 150 watts per pulse.

It is another object of the present invention to provide the integrated system as defined above, wherein said temperature T is higher than about 30 and lower than about 80 degrees.

It is another object of the present invention to provide the integrated system as defined above, wherein said power supply and control system (6) monitors physical tissue parameters and changes applied heat and electromagnetic pulses accordingly.

It is another object of the present invention to provide the integrated system as defined above, wherein said power supply and control system (6) additionally comprising:

- a. processing means, adapted to store in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue

- impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- b. sensing means; adapted to sense electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , Intensity I of said ultrasound irradiation, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
 - c. regulating means, adapted to allow said electromagnetic radiation and heat radiation if said parameters are within said safe treatment parameters and to stop the electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

It is another object of the present invention to provide the integrated system as defined above, wherein said power supply and control system (6) includes a mechanism for skin cooling.

It is another object of the present invention to provide the integrated system as defined above, especially adapted to increase skin rejuvenation in the immediate (short) range.

It is another object of the present invention to provide the integrated system as defined above, especially adapted to increase skin rejuvenation in the intermediate range.

It is another object of the present invention to provide the integrated system as defined above, especially adapted to increase skin rejuvenation in the long range.

It is another object of the present invention to provide the integrated system as defined above, wherein said system is especially adapted to operate according to IEC selected from a group consisting of IEC 60601-2-35, IEC 60601-2-33, IEC 60601-2-29, IEC 60601-2-9, IEC 60601-2-5, IEC 60601-2-3, IEC 60601-1-8, IEC 60601-1-6, IEC 60601-1-4, IEC 60601-1-3, IEC 60601-1-2, IEC 60601-1-1 or any combination thereof.

It is another object of the present invention to provide a method of increasing skin rejuvenation of a region of a patient's skin. The method comprises steps selected inter alia from:

- a. obtaining an integrated system (20) adapted to increase skin rejuvenation; said integrated system (20) comprises: at least two electrodes (41) adapted to be placed on said region of a patient's skin; each of said electrodes is at least partially coiled via a coil 42;

b. applying heat to a subcutaneous tissue within said region up to temperature T whilst simultaneously applying pulses of electromagnetic field to said region; wherein said increasing of said skin rejuvenation is greater than the sum of said applying heat to a subcutaneous tissue within said region and said applying pulses electromagnetic therapy to said region

It is another object of the present invention to provide the method as defined above, wherein said step of applying heat to a subcutaneous tissue within said region up to temperature T additionally comprising step of applying electrical current absorbed by subcutaneous tissue.

It is another object of the present invention to provide the method as defined above, wherein said system reduces side effects and/or harmful effects of said electromagnetic pulses and/or said deep tissue diathermy such that said reduction of said side effects and/or said harmful effects is greater than the sum of said reduction of said electromagnetic pulses and/or said reduction of said deep tissue diathermy.

It is another object of the present invention to provide the method as defined above, additionally comprising step of monitoring and/or controlling said steps of applying heat to a subcutaneous tissue within said region and/or said step of applying pulsed electromagnetic therapy to said region.

It is another object of the present invention to provide the method as defined above, additionally comprising step of applying a dynamic magnetic field onto said region.

It is another object of the present invention to provide the method as defined above, additionally comprising step of applying a triangular shaped electromagnetic pulse at frequency of 25 Hz and intensity of 20 Gauss.

It is another object of the present invention to provide the method as defined above, additionally comprising step of applying a square shaped electromagnetic pulse at a frequency of 16 Hz, duration of about 5 milliseconds and intensity of 12 Gauss.

It is another object of the present invention to provide the method as defined above, additionally comprising steps of

- a. storing in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F, power P, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B, tissue impedance, specific

- absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- b. sensing electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , Intensity I of said ultrasound irradiation, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
 - c. allowing said electromagnetic radiation and said heat radiation if parameters within said safe treatment parameters and to stop the electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

It is another object of the present invention to provide the method as defined above56, additionally comprising step of selecting the shape of said electromagnetic pulse is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

It is another object of the present invention to provide the method as defined above56, additionally comprising step of selecting said temperature T from a region of about 30 to about 80 degrees.

It is another object of the present invention to provide the method as defined above56, additionally comprising step of selecting the duration of each pulse applied by said pulsed electromagnetic frequency generator (2) to be higher than about 3 and lower than about 1000 milliseconds.

It is another object of the present invention to provide the method as defined above56, additionally comprising step of selecting the magnetic field intensity B of each pulse applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 0 and lower than about 3 Tesla.

It is another object of the present invention to provide the method as defined above56, additionally comprising step of selecting the frequency F applied by the pulses applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 1 and lower than about 1M Hz.

It is another object of the present invention to provide the method as defined above56, additionally comprising step of selecting the energy E applied by said step of applying pulsed

electromagnetic therapy to said region to be higher than about 1 and lower than about 150 watts per pulse.

It is another object of the present invention to provide the method as defined above56, wherein step of applying heat is applied for about 0.01 to 60 minutes.

It is another object of the present invention to provide the method as defined above56, wherein the heat and the pulsed electromagnetic therapy are applied simultaneously, sequentially or separately.

It is another object of the present invention to provide the method as defined above56, wherein said method is repeated 1 to 100 times in each treatment.

It is another object of the present invention to provide the method as defined above56, wherein said treatment is repeated more than once.

It is another object of the present invention to provide the method as defined above56, wherein said step of applying heat is performed by devices selected from a group consisting of: ultrasonic diathermy, an optical device, electromagnetic induction, sound waves emitting instrument, direct heat applying instrument, or from any other means of heating subcutaneous tissue to temperature T.

It is another object of the present invention to provide the method as defined above56, especially adapted to increase skin rejuvenation in the immediate (short) range

It is another object of the present invention to provide the method as defined above56, especially adapted to increase skin rejuvenation in the intermediate range.

It is still an object of the present invention to provide the method as defined above56, especially adapted to increase skin rejuvenation in the long range.

It is lastly an object of the present invention to provide the method as defined above56, wherein said method is especially adapted to operate according to IEC selected from a group consisting of IEC 60601-2-35, IEC 60601-2-33, IEC 60601-2-29, IEC 60601-2-9, IEC 60601-2-5, IEC 60601-2-3, IEC 60601-1-8, IEC 60601-1-6, IEC 60601-1-4, IEC 60601-1-3, IEC 60601-1-2, IEC 60601-1-1 or any combination thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be implemented in practice, a few preferred embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

FIGS. 1A - 1D schematically present a skin viability improving system (10), comprising a pulsed electromagnetic frequency generator (2) and a deep tissue diathermy device (4).

FIG. 1E is a diagram illustrating an example of electrical current applied by the deep tissue diathermy device (4). The current involves a maximal amplitude of 160 volts, and a frequency close to 1 Hz.

FIG. 2 schematically presents a skin viability improving system (10), comprising a pulsed electromagnetic frequency generator (2), a deep tissue diathermy device (4) and a power supply and control system (6).

FIG. 3 schematically presents square waves at a rate of 16 Hz in duration of about 5 milliseconds in an intensity of 12 Gauss which stimulate angiogenesis.

FIG. 4 schematically presents triangular wave pulses at a frequency of 25 Hz and intensity of 20 Gauss which stimulate collagen production.

FIGS. 5 - 6 illustrate another embodiment of the skin viability improving system (20).

FIGS. 7 - 12 schematically present the methods of improving skin viability (400-420).

FIGS. 13A-13C are pictures of one patient out of the study group treated with the device of the present invention.

FIGS. 14A-14C are pictures of one patient out of the first control group treated with the device of the present invention on the right side and RF on the left side.

FIGS. 15A-15C are pictures of one patient out of the second control group treated with the device of the present invention on the right side and PEMF on the left side.

FIGS. 16A-16C are pictures of one patient out of the third control group treated with the device of the present invention on the right side. The left side was treated with PEMF followed by RF.

DETAILED DESCRIPTION OF THE DRAWINGS

The following description is provided, alongside all chapters of the present invention, so as to enable any person skilled in the art to make use of said invention and sets forth the best modes contemplated by the inventor of carrying out this invention. Various modifications, however, will remain apparent to those skilled in the art, since the generic principles of the present invention have been defined specifically to provide means and method for increasing the viability of the skin. Yet more the present invention provides means and system for skin tightening and rejuvenation.

It is one object of the present invention to disclose a device used to improve skin viability, by a synergistic approach of deep tissue diathermy combined with application of PEMF, wherein at least two devices of deep tissue diathermy are incorporated, one of them based on PEMF

therapy. The latter improves the healing process initiated by the at least one other device of deep tissue diathermy.

The term "**Pulsed Electromagnetic Fields (PEMF)**" refers hereinafter in a non-limiting manner to electromagnetic radiation of different frequencies - ranging from static magnetic fields, through extremely low frequencies (ELF) to radiofrequencies (RF) - administered in pulses.

The term "**Radio Frequency (RF)**" refers hereinafter in a non-limiting manner to part of the electromagnetic spectrum with frequency range of about 3 Hz to 300 GHz.

The term "**Extremely Low Frequencies (ELF)**" refers hereinafter in a non-limiting manner to part of the RF electromagnetic spectrum with frequency range of about 3 Hz to 30 GHz

The term "**collagen**" refers hereinafter in a non-limiting manner to a long, fibrous structural protein which is a major component of the extracellular matrix that supports most tissues and gives cells structure. It is responsible for skin strength and elasticity, and its degradation leads to wrinkles that accompany aging.

The term "**epidermis**" refers hereinafter in a non-limiting manner to the outermost layer of the skin.

The term "**dermis**" refers hereinafter in a non-limiting manner to a layer of skin beneath the epidermis that consists of connective tissue, and cushions the body from stress and strain.

The term "**deep tissue diathermy**" refers hereinafter in a non-limiting manner to a device which heats tissues beneath the epidermis.

The term "**electric diathermy**" refers hereinafter in a non-limiting manner to a device which uses high frequency alternating electric or magnetic fields, sometimes with no electrode or device contact to the skin, to induce gentle deep tissue heating by induction. For collagen fiber stimulation, typical electrical parameters may include, in a non limiting manner, frequency of about 1 MHz, energy of about 80 joule per 1 square tissue volume, applied for about 6 seconds.

The term "**ultrasonic diathermy**" refers hereinafter in a non-limiting manner to heating of tissues by ultrasound.

The term "**about**" refers hereinafter to a range of 25% below or above the referred value.

The term "**physical tissue parameters**" refers hereinafter to parameters such as tissue temperature, electric current, tissue impedance, specific absorption rate (SAR), treatment depth and superficial muscle contractions.

The term "**angiogenesis**" refers hereinafter to the sprouting of new blood vessels.

The term **"square wave"** refers hereinafter to a non-sinusoidal waveform named for its triangular shape.

The term **"triangle wave"** refers hereinafter to a non-sinusoidal waveform named for its triangular shape.

The term **"International Electrotechnical Commission Standards (IEC) 60601-1"** refers hereinafter to a medical electrical equipment standard. More specifically it refers to general requirements for basic safety and essential performance.

The term **"IEC 60601-1-1"** refers hereinafter to medical electrical equipment standard. More specifically it refers to general requirements for safety - Collateral standard: Safety requirements for medical electrical systems. The IEC 60601-1 set of standards are divided into three distinct areas. The first area is the basic standard IEC 60601-1. This is the general requirement for all electrical medical based products. The second area is the collateral standards, which cover across the board issues such as combining into a system with other devices, EMC, radiation protection, and programmable electronic medical systems (software, firmware, etc.). The standard numbers are IEC 60601-1-1, -1-2, -1-3, and -1-4 respectively. The third area is the particular standards that deal with a specific type of medical device. The particular standards are identified as IEC 60601-2-XX where XX identifies the particular standard number for the particular type of medical equipment. An example would be IEC 60601-2-3 which is the particular standard for short-wave therapy equipment.

The term **"IEC 60601-1-2"** refers hereinafter to medical electrical equipment standard. More specifically it refers to general requirements for basic safety and essential performance - Collateral standard: Electromagnetic compatibility - Requirements and tests.

The term **"IEC 60601-1-3"** refers hereinafter to medical electrical equipment standard. More specifically it refers to general requirements for basic safety and essential performance - Collateral Standard: Radiation protection in diagnostic X-ray equipment.

The term **"IEC 60601-1-4"** refers hereinafter to medical electrical equipment standard. More specifically it refers to general requirements for safety - Collateral Standard: Programmable electrical medical systems.

The term **"IEC 60601-1-6"** refers hereinafter to medical electrical equipment standard. More specifically it refers to general requirements for basic safety and essential performance - Collateral standard: Usability.

The term **"IEC 60601-1-8"** refers hereinafter to medical electrical equipment standard. More specifically it refers to general requirements for basic safety and essential performance -

Collateral Standard: General requirements, tests and guidance for alarm systems in medical electrical equipment and medical electrical systems.

The term "IEC 60601-2-3" refers hereinafter to medical electrical equipment standard. More specifically it refers to particular requirements for the safety of short-wave therapy equipment.

The term "IEC 60601-2-5" refers hereinafter to medical electrical equipment standard. More specifically it refers to particular requirements for the safety of ultrasonic physiotherapy equipment.

The term "IEC 60601-2-9" refers hereinafter to medical electrical equipment. More specifically it refers to particular requirements for the safety of patient contact dosimeters used in radiotherapy with electrically connected radiation detectors.

The term "IEC 60601-2-29" refers hereinafter to medical electrical equipment standard. More specifically it refers to particular requirements for the basic safety and essential performance of radiotherapy simulators.

The term "IEC 60601-2-33" refers hereinafter to medical electrical equipment standard. More specifically it refers to particular requirements for the safety of magnetic resonance equipment for medical diagnosis.

The term "IEC 60601-2-35" refers hereinafter to medical electrical equipment standard. More specifically it refers to particular requirements for the safety of blankets, pads and mattresses intended for heating in medical use.

The present invention relates to a physical therapeutic methods and systems. In said systems a dynamic magnetic pulse and electromagnetic heating systems are incorporated together to accomplish a physical therapy, epically skin tightening and rejuvenation.

The present invention provides a system adapted to increase skin rejuvenation of a region of a patient's skin. The system comprising in a non-limiting manner the following:

- a. a pulsed electromagnetic field (PEMF) frequency generator (2) for constantly providing electromagnetic pulses to said region of a patient's skin; and,
- b. a deep tissue diathermy device (4) applying heat to said region of a patient's skin up to temperature T;

The system (10) is adapted for simultaneously apply heat and PEMF to said region of a patient's skin. Furthermore, the system increases the skin rejuvenation such that the increase is greater than the sum of the electromagnetic pulses increase and the deep tissue diathermy.

Furthermore the system reduces side effects and/or harmful effects of the electromagnetic pulses and/or said deep tissue diathermy such that said reduction of said side effects and/or

said harmful effects is greater than the sum of said reduction of said electromagnetic pulses and/or said reduction of said deep tissue diathermy.

It is another object of the present invention to provide an integrated system (20) adapted to increase skin rejuvenation of a region of a patient's skin. The system comprising at least two electrodes adapted to be placed on said region of a patient's skin; each of said electrodes is at least partially coiled via a coil. It is emphasized that each of said electrodes is adapted for both (i) providing electromagnetic pulses to said region of a patient's skin; and, (ii) applying heat up to temperature T to said region of a patient's skin. Furthermore, it is emphasized that all of said electrodes are adapted to simultaneously provide electromagnetic pulses to said region of a patient's skin; and, apply heat up to temperature T to said region of a patient's skin.

The decrease in the side effects of the deep tissue diathermy by the healing effect of the pulsed electromagnetic frequency therapy.

Reference is now made to figures 1a - 1d, illustrating the system 10 for increasing skin rejuvenation. As described above, the system comprising a pulsed electromagnetic frequency generator (2) for providing electromagnetic pulses to the region of a patient's skin; and, a deep tissue diathermy device (4) adapted to apply heat to the region of a patient's skin up to temperature T.

It is emphasized that the system increases the skin rejuvenation such that the increase is greater than the sum of the electromagnetic pulses increase and the deep tissue diathermy.

By exposing the tissue (a region of a patient's skin) to the combination of regulated heat and a pulsed electromagnetic field a *synergic* effect of improving skin rejuvenation is obtained.

The present invention relies on 2 effects, the thermal effect and the electromagnetic pulse effect:

The thermal effect includes heating the tissue such that when the tissue is heated to a sufficiently high temperature, tissue injury is produced. Furthermore, when heat is generated within the dermis, it usually causes contraction and thickening of collagen fibers. This results in an overall tightened and rejuvenated appearance of the skin.

Heat within the dermis creates a limited thermal injury. The body's natural response to this injury is to produce collagen at the site of the wound. This results in firmer, thicker, more youthful skin. Usually the skin is heated to temperatures below 60 degrees for short periods of time. The thermal effect i.e., can be produced by:

1. Optical means – by emitting light in different wavelengths absorbed by subcutaneous tissue such that said tissue is heated; or

2. Electrical means – by passing electrical current; or
3. Electromagnetic means – by transmitting or inducting (electromagnetic induction) electromagnetic field on the skin; or
4. Sound waves – specifically in the ultrasound frequencies; or
5. Physical means – such as massage or applying warm substance adjacent to the skin; or any combination thereof.

The **electromagnetic pulses** (either dynamic or static) may start natural healing processes which usually occur in response to an injury (especially, angiogenesis, and generation of new collagen fibers via the release of tissue growth factors).

Said electromagnetic field generates movements of charged molecules (ions) within the inter cellular fluids. This movement generates heat which may enhance the thermal effect discussed earlier.

It is acknowledged that healing is the process by which the cells in the body regenerate and repair to reduce the size of a damaged area. Healing incorporates both the removal of necrotic tissue (demolition), and the replacement of this tissue.

The replacement can happen in two ways:

1. by regeneration: the necrotic cells are replaced by the same tissue as was originally there.
2. by repair: injured tissue is replaced with scar tissue.

The Pulsed Electromagnetic Fields (PEMF) applied by the system 10, as described above, has no thermal effects. Said no thermal effects rely on the tissue components and their reaction to the applied radiation characteristics. These effects might be due to the reaction of large charged molecules and various frequencies and frequency harmonies, charged small ions in the cell membranes affecting the cells function and reactions to hormones and chemical signals, charged small ions in the extracellular space and other purely understood mechanisms.

Furthermore, applying the radiation in pulses was also found to have non thermal effects. Yet more, only a specific combination of frequency, duty cycle and transmitted power achieve a specific tissue response.

It is now commonly accepted that electromagnetic fields (EMF) or PEMF are capable of initiating various healing processes and for treatment of pain and edema in superficial soft tissues two decades ago. [Rosch, P.J., Markov, M.S., eds. Bioelectromagnetic Medicine, Marcel Dekker, NY, 251- 264].

The present invention utilizes PEMF (combined with heat applying source) for cosmetic purposes as described above. The important role of PEMF in the specific field intensities and frequencies increases epidermal collagen synthesis. This new formed collagen increases skin elasticity and rejuvenates its appearance. Furthermore, PEMF increases the degree of endothelial cell tubulization and proliferation, and augmented angiogenesis primarily by stimulating endothelial release of FGF-2, inducing paracrine and autocrine changes in the surrounding tissue. Angiogenesis, the sprouting of new blood vessels, increases blood flow to the tissue, which in turn increases oxygen and nutritional substances delivery to the tissue. This effect is most beneficial for an injured tissue, promoting rapid and improved healing. The growth factor released further enhances the healing process, both in quality and time of improvement.

The following discloser is a more detailed description of the two combined effects.

As disclosed earlier, the present invention discloses a system 10 which incorporates both regulated heating means and electromagnetic pulses.

As described above, the heat can be produced by:

1. Optical means – by emitting light in different wavelengths absorbed by subcutaneous tissue such that said tissue is heated.
2. Electrical means – by passing electrical current.
3. Electromagnetic means – by transmitting or inducting (electromagnetic induction) electromagnetic field on the skin.
4. Sound waves – specifically in the ultrasound frequencies.
5. Physical means – such as massage or applying warm substance adjacent to the skin.

Reference is now made to figures 1b-1d, illustrating the system 10 according to preferred embodiment of the present invention.

According to a preferred embodiment of the present invention, the deep tissue diathermy device (4) comprises:

- a. at least one electrical output device adapted to generate electrical current; and,
- b. at least two electrodes (41) electrically coupled to said electrical output device and placed on said skin region.

According to said embodiment *all* said electrodes are adapted to *simultaneously* apply said electrical current to said skin region.

Figure 1b illustrates system 10 in which the deep tissue diathermy device (4) comprises 4 electrodes (denoted by numerical reference 41).

Figures 1c-1d illustrate the system 10 in which the deep tissue diathermy device (4) comprises 8 electrodes (denoted by numerical reference 41).

Reference is now made to figure 1e illustrating an example of electrical current applied by the deep tissue diathermy device (4). The current involves a maximal amplitude of 160 volts, and a frequency close to 1 Hz.

According to another embodiment of the present invention, the pulsed electromagnetic frequency generator is adapted to provide an electromagnetic field which varies with time (dynamic magnetic field).

According to another embodiment of the present invention, the pulsed electromagnetic frequency generator (2) which provides electromagnetic pulses to the patient's skin is positioned near the treated tissue and emits a dynamic magnetic field which varies with time. The dynamic magnetic field can vary according to any specific treatments. For examples, to stimulate angiogenesis, pulses at a frequency of 16 Hz, intensity of 12 Gauss and duration of about 5 milliseconds are generated. Alternatively, to stimulate collagen production a triangular wave pulses at a frequency of 25 Hz and intensity of 20 Gauss are generated.

The deep tissue diathermy device (4) is adapted to apply heat to said region of a patient's skin up to temperature T. According to one embodiment of the present invention the heat is applied by passing electrical current through the tissue. The electrical current can be performed in one of the following three manners:

1. Through at least one electrode which is in direct physical contact with the skin;
2. through at least one electrode which is not in physical contact with the skin, and the electrical current is transferred by induction.
3. through at least one antenna which passes the electrical current to the skin via electromagnetic induction.

Reference is now made to figure 2, which illustrates another embodiment of the present invention, According to that embodiment the system additionally comprising a control system (6) adapted to regulate said electromagnetic pulses and/or said electromagnetic pulses.

According to another embodiment of the present invention the treatment is provided only in safe treatment parameters.

Safe treatment parameters are defined by the parameters in table 1:

Table 1: safe treatment parameters

<i>parameter</i>	<i>Values</i>
Time, t	0-600 Minutes
Temperature, T	25-80 Celsius
Duty cycle t/T	0-100%
Frequency MHz	DC – 10Mhz
power P	0-100Watt
Energy E	0-200 Jowls
magnetic field intensity B	0-10 Tesla
Depth D of said treated tissue	30 Millimeters

Unsafe safe treatment parameters are defined by the parameters in table 2:

Table 2: unsafe treatment parameters

<i>parameter</i>	<i>Values</i>
Time, t	>10 hours (none stop)
Temperature, T	>80 Celsius
Duty cycle t/T	N/A
Frequency MHz	>10 MHz
power P	>100 Watt
Energy E	>200 Jowls
magnetic field intensity B	>10 Tesla
Depth D of said treated tissue	>30 Millimeter

According to another embodiment the, control system (6) additionally comprising:

(a) processing means, adapted to store in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue,

duty cycle t/T , Frequency F , power P , Intensity I of said ultrasound diathermy, energy E applied by the pulses of said pulsed electromagnetic frequency generator, treatment depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), superficial muscle contractions or a combination thereof;

(b) sensing means; adapted to sense electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of time t of said treatment, temperature T of said tissue, duty cycle t/T , Frequency F , power P , Intensity I of said ultrasound diathermy, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;

(c) regulating means, adapted to allow said pulsed electromagnetic radiation and heat radiation if said parameters are within said safe treatment parameters and to stop the pulsed electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

According to another embodiment, the system as defined above, additionally comprising sensors for monitoring physical parameters selected from a group consisting of time t of said treatment, temperature T of said tissue, duty cycle t/T , Frequency F , power P , energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof.

The sensors receives said parameters from the treated tissue and changes the parameters of the pulsed electromagnetic frequency generator (2) and the deep tissue diathermy device (4) to optimize the effect of each component and/or to augment the synergistic effect of both components, whilst avoiding harm to the tissue.

According to another embodiment of the present invention the shape of the electromagnetic pulse is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

According to another embodiment, the system as defined above is adapted to provide electromagnetic pulse at a frequency of 16 Hz which increases from 0 Gauss to 12 Gauss.

According to another embodiment, the system as defined above is adapted to provide electromagnetic square wave pulse at a frequency of 16 Hz which increases from 0 Gauss to 12 Gauss.

According to another embodiment, the system as defined above is adapted to provide short square waves at a rate of 16 Hz in duration of about 5 milliseconds in an intensity of 12

Gauss. Such square wave pulses are especially provided to stimulate angiogenesis. Reference is now made to **figure 3**, which illustrates such square wave pulse.

According to another embodiment, the system as defined above is adapted to provide triangular wave pulses at a frequency of 25 Hz and intensity of 20 Gauss. Such pulses are especially provided to stimulate collagen production. Reference is now made to **figure 4**, which illustrates such triangular wave pulses.

According to another embodiment, the system as defined above is adapted to provide alternating current (AC) at a frequency of 1 MHz.

According to another embodiment, the system as defined above is adapted to provide intensity of about $80 \text{ J/cm}^2\text{sec}$.

According to another embodiment of the present invention the magnetic field intensity B of each pulse applied by said pulsed electromagnetic frequency generator (2) ranges between about 0 and about the max magnetic field used in MRI devices (i.e., 3 Tesla).

According to another embodiment of the present invention, the duration of each pulse applied by said pulsed electromagnetic frequency generator (2) ranges between about 3 and about 1000 milliseconds.

According to another embodiment of the present invention, the frequency F applied by the pulses of said pulsed electromagnetic frequency generator (2) ranges between about 1 and about 1M Hz.

According to another embodiment of the present invention, the energy E applied by the pulses of said pulsed electromagnetic frequency generator (2) ranges between about 1 and about 150 watts per pulse.

According to another embodiment of the present invention, the deep tissue diathermy device (4) is selected in a non-limiting manner from a group consisting of electric diathermy or any device emitting RF radiation absorbed by subcutaneous tissue.

According to another embodiment of the present invention, the deep tissue diathermy device (4) is selected in a non-limiting manner from a group consisting of an ultrasonic diathermy, an optical device, electromagnetic induction, sound waves emitting instrument, direct heat applying instrument, or from any other means of heating subcutaneous tissue to temperature T.

According to another embodiment of the present invention, the optical device is adapted to emit light in wavelengths absorbed by subcutaneous tissue such that said subcutaneous tissue is heated.

According to another embodiment of the present invention, the sound waves emitting instrument is adapted to emit sound waves absorbed by the subcutaneous tissue such that said subcutaneous tissue is heated.

According to another embodiment of the present invention, the temperature T is higher than about 30 and lower than about 80 degrees.

According to another embodiment of the present invention, the power supply and control system (6) includes a mechanism for skin cooling.

According to another embodiment of the present invention, system (10) is encased in at least one platform.

According to another embodiment of the present invention, the pulsed electromagnetic frequency generator (2) and said deep tissue diathermy device (4) have more than one applicator to treat more than one body part simultaneously.

According to another embodiment of the present invention, the pulsed electromagnetic frequency generator (2) has electrostatic shielding.

It should be emphasized that the system as defined in any of the embodiments produces synergic outcomes in the following three ranges:

The immediate (short) range, in the intermediate range and in the long range.

In the immediate (short) range – the contraction and thickening of collagen fibers occur, which in turn results in an overall tightened and rejuvenated appearance of the skin.

In the intermediate range (i.e., about two to three weeks) - new epidermal cells and new collagen fibers are produced.

In the long range (i.e., about a month) – the cellulite is scattered.

Reference is now made to Figures 5-6 illustrating another system (20) according to a preferred embodiment of the present invention. According to this embodiment, an integrated system (20) adapted to increase skin rejuvenation of a region of a patient's skin is provided.

The system 20 comprising at least two electrodes (41) adapted to be placed on said region of a patient's skin; each of said electrodes is at least partially coiled (or looped) via a coil (42).

It should be emphasized that each of said electrodes is adapted for both (i) providing electromagnetic pulses to said region of a patient's skin (via said coil); and, (ii) applying heat up to temperature T to said region of a patient's skin.

Furthermore, it should be emphasized that all said electrodes provide simultaneously electromagnetic pulses to said region of a patient's skin; and, apply heat up to temperature T to said region of a patient's skin.

The heat is provided to the skin by applying electrical current through said electrodes which is absorbed by subcutaneous tissue.

Figure 5 illustrates such a system 20 comprising 4 electrodes (denotes as 41) and figure 6 illustrates such a system comprising 8 electrodes (denotes as 41).

It should be emphasized that the application of said system 20 increases said skin rejuvenation such that said skin rejuvenation increase (SRI) is greater than the sum of said SRI provided by electromagnetic pulses increase and said SRI provided by said deep tissue diathermy device increase.

According to another embodiment of the present invention the electromagnetic pulse in system 20 is a triangular shaped at frequency of 25 Hz and intensity of 20 Gauss.

According to another embodiment of the present invention the electromagnetic pulse in system 20 is square shaped at a frequency of 16 Hz, duration of about 5 milliseconds and intensity of 12 Gauss.

According to another embodiment of the present invention, the system 20 reduces side effects and/or harmful effects of said electromagnetic pulses and/or said deep tissue diathermy such that said reduction of said side effects and/or said harmful effects is greater than the sum of said reduction of said electromagnetic pulses and/or said reduction of said deep tissue diathermy.

According to another embodiment of the present invention, the system 20 additionally comprising a control system (6) adapted to regulate said electromagnetic pulses and/or said electromagnetic pulses.

According to another embodiment of the present invention, the system is adapted to provide a dynamic magnetic field such that said electromagnetic pulses vary with time.

According to another embodiment of the present invention, the shape of said electromagnetic pulse in system 20 is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

According to another embodiment of the present invention, the magnetic field intensity B in system 20 of each pulse applied by said pulsed electromagnetic frequency generator (2) ranges between about 0 and about 3 Tesla.

According to another embodiment of the present invention, the duration of each pulse applied in system 20 ranges between about 3 and about 1000 milliseconds.

According to another embodiment of the present invention, the frequency F applied by the pulses of said system ranges between about 1 Hz and about 1M Hz.

According to another embodiment of the present invention, the energy E applied by said system ranges between about 1 and about 150 watts per pulse.

According to another embodiment of the present invention, the temperature T is higher than about 30 and lower than about 80 degrees.

According to another embodiment of the present invention, the power supply and control system (6) in system (20) monitors physical tissue parameters and changes applied heat and electromagnetic pulses accordingly.

According to another embodiment of the present invention, the power supply and control system (6) additionally comprising:

- a. processing means, adapted to store in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- b. sensing means; adapted to sense electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of time t of said treatment, temperature T of said tissue, ratio t/T , Frequency F , power P , Intensity I of said ultrasound irradiation, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B , tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- c. regulating means, adapted to allow said electromagnetic radiation and heat radiation if said parameters are within said safe treatment parameters and to stop the electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

According to another embodiment of the present invention, the power supply and control system (6) includes a mechanism for skin cooling.

According to another embodiment of the present invention, the system (20) is especially adapted to increase skin rejuvenation in the immediate (short) range.

According to another embodiment of the present invention, the system (20) is especially adapted to increase skin rejuvenation in the intermediate range.

According to another embodiment of the present invention, the system (20) is especially adapted to increase skin rejuvenation in the long range.

Reference is now made to **Figure 7**, schematically illustrating one possible method (400) of increasing skin rejuvenation of a region of a patient's skin. The method comprising steps selected inter alia from obtaining (i) pulsed electromagnetic frequency generator; and, (ii) a deep tissue diathermy device (401); applying heat to a subcutaneous tissue within said region up to temperature T (402); said temperature T is optimized for production of new dermal ground substance and collagen contraction. While the collagen contraction tightens the skin and conceals wrinkles immediately, the dermal proliferation and new collagen production has a later effect. The next step is applying additional pulsed electromagnetic field (403) which generates a healing mechanism of the heated skin, which includes growth factor and cytokines release and eventually angiogenesis.

Reference is now made to **Figure 8**, which illustrates another preferred method of the present invention. According to this embodiment, the method 400 additionally comprises the step of: monitoring and/or controlling said steps of applying heat to a subcutaneous tissue within said region and/or said step of applying pulsed electromagnetic therapy to said region (404).

Reference is now made to **Figure 9**, schematically illustrating one possible method (410) of increasing skin rejuvenation of a region of a patient's skin. The method comprising steps selected inter alia from obtaining (i) pulsed electromagnetic frequency generator; and, (ii) a deep tissue diathermy device (411). The next step is applying additional pulsed electromagnetic field (412) which generates a healing mechanism of the heated skin, which includes growth factor and cytokines release and eventually angiogenesis. The final step is applying heat to a subcutaneous tissue within said region up to temperature T (413); said temperature T is optimized for production of new dermal ground substance and collagen contraction. While the collagen contraction tightens the skin and conceals wrinkles immediately, the dermal proliferation and new collagen production has a later effect.

Reference is now made to **Figure 10**, which illustrates another preferred method of the present invention. According to this embodiment, the method 410 additionally comprises the step of: monitoring and/or controlling said steps of applying heat to a subcutaneous tissue within said region and/or said step of applying pulsed electromagnetic therapy to said region (414).

Reference is now made to **Figure 11**, schematically illustrating one possible method (420) of increasing skin rejuvenation of a region of a patient's skin. The method comprising steps selected inter alia from obtaining (i) pulsed electromagnetic frequency generator; and, (ii) a

deep tissue diathermy device (421). The next step is applying additional pulsed electromagnetic field (422) whilst simultaneously applying heat to a subcutaneous tissue within said region up to temperature T. The electromagnetic pulses generate a healing mechanism of the heated skin, which includes growth factor and cytokines release and eventually angiogenesis. The heat applied temperature T is optimized for production of new dermal ground substance and collagen contraction. While the collagen contraction tightens the skin and conceals wrinkles immediately, the dermal proliferation and new collagen production has a later effect.

Reference is now made to **Figure 12**, which illustrates another preferred method of the present invention. According to this embodiment, the method 420 additionally comprises the step of: monitoring and/or controlling said steps of applying heat to a subcutaneous tissue within said region and/or said step of applying pulsed electromagnetic therapy to said region (424).

According to another embodiment of the present invention, each of the methods as defined above additionally comprising step of selecting said temperature T from a region of about 30 to about 80 degrees.

According to another embodiment of the present invention, each of the methods as defined above additionally comprising step of applying a dynamic magnetic field onto said region.

According to another embodiment of the present invention, each of the methods as defined above additionally comprising steps of:

- a. storing in a communicable database predetermined parameters defining (i) safe treatment parameters and (ii) unsafe treatment parameters; said parameters are selected from a group consisting of time t of said treatment, temperature T of said tissue, duty cycle t/T , Frequency F, power P, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B, tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;
- b. sensing electromagnetic radiation and heat radiation parameters selected from a group consisting of time t of time t of said treatment, temperature T of said tissue, duty cycle t/T , Frequency F, power P, Intensity I of said ultrasound diathermy, energy E applied by the pulses of said pulsed electromagnetic frequency generator, depth D of said treated tissue, magnetic field intensity B,

tissue impedance, specific absorption rate (SAR), treatment depth, superficial muscle contractions or a combination thereof;

- c. allowing said electromagnetic radiation and said heat radiation if parameters are within said safe treatment parameters and stopping the electromagnetic radiation if the radiation parameters are in said unsafe treatment parameters.

According to another embodiment of the present invention, the step of applying heat is performed by devices selected from a group consisting of: ultrasonic diathermy, an optical device, electromagnetic induction, sound waves emitting instrument, direct heat applying instrument, or from any other means of heating subcutaneous tissue to temperature T.

According to another embodiment of the present invention, each of the methods as defined above additionally comprising step of selecting the magnetic field intensity B of each pulse applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 0 and lower than about max magnetic field used in MRI devices (i.e., 3 Tesla).

According to another embodiment of the present invention, each of the methods as defined above additionally comprising step of selecting the frequency F applied by the pulses applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 1 Hz and lower than about 1 MHz.

According to another embodiment of the present invention, each of the methods as defined above additionally comprising step of selecting the energy E applied by said step of applying pulsed electromagnetic therapy to said region to be higher than about 1 and lower than about 150 watts per pulse.

According to another embodiment of the present invention, in each of the methods as defined above the step of applying heat lasts about 0.01 to 100 minutes.

According to another embodiment of the present invention, in each of the methods as defined above the pulsed electromagnetic field lasts about 0.01 to 100 minutes.

According to another embodiment of the present invention, in each of the methods as defined above the steps of applying heat and applying the pulsed electromagnetic therapy are simultaneous, sequential or separate.

According to another embodiment of the present invention, in each of the methods as defined above the method is repeated 1 to 100 times in each treatment.

According to another embodiment of the present invention, a typical protocol for the pulsed electromagnetic frequency generator (4) includes for example, and in a non limiting manner, a preset number of 1 microsecond period pulses with duty cycle of 50% and

a pause of up to 250 microsecond (in which the preset number of pulses correlates with energy to be supplied to skin under the treatment.)

According to another embodiment of the present invention, a typical protocol for the pulsed electromagnetic frequency generator (4) includes for example, and in a non limiting manner 10 pulses, of 1 microsecond period with 50% duty cycle and preset pause of up to 512 microseconds (in which the pause correlates with energy to be supplied to skin under the treatment).

According to another embodiment of the present invention, a typical protocol for the pulsed electromagnetic frequency generator (4) includes for example, and in a non limiting manner, a repetition of the previous protocol, wherein the number of pulses administered is a multiplication of 10.

According to another embodiment of the present invention, in each of the methods as defined above the treatment is repeated more than once.

According to another embodiment of the present invention, each of the methods as defined above additionally comprising step of selecting the shape of said electromagnetic pulse is selected in a non-limiting manner from a group consisting of square wave, a sine wave, a triangular wave, sawtooth wave, ramp waves, spiked wave or any other mathematical combination.

It should also be appreciated that the above described description of methods and apparatus are to be interpreted as including apparatus for carrying out the methods, and methods of using the apparatus of any type as well known to a person of ordinary skill, and which need not be described in detail herein for enabling a person of ordinary skill to practice the invention.

For the main embodiments of the invention, the particular selection of type and model is not critical, though where specifically identified, this may be relevant. The present invention has been described using detailed descriptions of embodiments thereof that are provided by way of example and are not intended to limit the scope of the invention. No limitation, in general, or by way of words such as “may”, “should”, “preferably”, “must”, or other term denoting a degree of importance or motivation, should be considered as a limitation on the scope of the claims or their equivalents unless expressly present in such claim as a literal limitation on its scope. It should be understood that features and steps described with respect to one embodiment may be used with other embodiments and that not all embodiments of the invention have all of the features and/or steps shown in a particular figure or described with respect to one of the embodiments. That is, the disclosure should be considered complete

from combinatorial point of view, with each embodiment of each element considered disclosed in conjunction with each other embodiment of each element (and indeed in various combinations of compatible implementations of variations in the same element). Variations of embodiments described will occur to persons of the art. Furthermore, the terms "comprise," "include," "have" and their conjugates, shall mean, when used in the claims, "including but not necessarily limited to." Each element present in the claims in the singular shall mean one or more element as claimed, and when an option is provided for one or more of a group, it shall be interpreted to mean that the claim requires only one member selected from the various options, and shall not require one of each option. The abstract shall not be interpreted as limiting on the scope of the application or claims.

It is noted that some of the above described embodiments may describe the best mode contemplated by the inventors and therefore may include structure, acts or details of structures and acts that may not be essential to the invention and which are described as examples. Structure and acts described herein are replaceable by equivalents performing the same function, even if the structure or acts are different, as known in the art. Therefore, the scope of the invention is limited only by the elements and limitations as used in the claims.

EXAMPLES

Examples are given in order to prove the embodiments claimed in the present invention. The example, which is a clinical test, describes the manner and process of the present invention and set forth the best mode contemplated by the inventors for carrying out the invention, but are not to be construed as limiting the invention.

EXAMPLE 1

A clinical test was performed to demonstrate the synergic effect of the combined PEMF and the deep tissue diathermy device.

The aim of the example is to evaluate the synergetic effect of the combined technology and compare it to each technology individually.

A multi polar magnetic pulsed synthesizer which simultaneously emits RF and magnetic pulses in varying phases that homogeneously cause supra normal temperatures over the treated area and penetrates the dermis and hypodermis was used.

METHOD

The test included 40 women at the age of 42-61 years.

They were divided to 4 groups; 1 study group and 3 control groups, each group included 10 clients. All participants were selected very punctiliously according to predefined criteria which included loosen skin in the forehead, eyes and neck area.

All groups were treated for skin tightening of the face (forehead & eyes) and neck. In all groups the **right side** of the face and neck was treated only by the use of combined technology and the **left side** of the face and neck was treated according the following:

Study group: the combined technology as well.

First control group: RF technology.

Second control group: PMF (Pulsed Magnetic Field) technology.

Third control group: PMF technology and 2 hours later RF technology.

Sessions were conducted once a week for a period of 8 weeks.

Each session lasted 40 minutes (20 minutes each side) except of the third control group which lasted 60 minutes (right side 20 minutes and left side 40 minutes because we used 2 different technologies).

Clinical results were collected in two paths; objective and subjective.

Objective method

Objective method was conducted by taking photographs in order to assess the changes in the tightness of the skin induced by the treatments.

The pictures were taken before and after treatments by the same operator under the same conditions. The pictures were taken while the participant sat in front of a chart with vertical and horizontal lines with the camera placed at the same height distance and with the same lightening conditions.

Subjective method

Subjective method was conducted by clients' self report.

The subjective method was conducted by questions that each client had to fill after every treatment, referring the immediate results they had noticed on each treated side, the notice of accumulative effect, the satisfaction of the patients from the results, sensation of the treatments etc.

The patients received satisfaction questionnaire which included yes/no questions and questions to be grade on 1 to 5 satisfaction scales (1- represents "Not At All" and 5 represents "Very Much").

Additionally there were open questions adapted to enable the patients the ability to express any kind of feeling following the treatments.

The following questionnaire was handed to the patients after each treatment (except of specific questions):

	<i>Question</i>	<i>Score</i>	<i>Full Answer</i>
	Do you see any visual changes on the right side that was treated? Please describe in the "Full Answer" column.	Not at all 1 2 3 4 5 Very much	
	Are you satisfied from the visual changes on the right side that was treated?	Not at all 1 2 3 4 5 Very much	
	Is there any specific feeling you feel on the right side that was treated (tightness, lifting, stretched, fullness, swelled, loosen, ache, scratching)? Please describe in the "Full Answer" column.	Yes/No	
	Are you satisfied from the feeling you feel on the right side that was treated?	Not at all 1 2 3 4 5 Very much	
	Do you see any visual changes on the left side that was treated? Please describe in the "Full Answer" column.	Not at all 1 2 3 4 5 Very much	
	Are you satisfied from the visual changes on the left side that was treated?	Not at all 1 2 3 4 5 Very much	
	Is there any specific feeling you feel on the left side that was treated (tightness, lifting, stretched, fullness, swelled, loosen, ache, scratching)? Please describe in the "Full Answer" column.	Yes/No	
	Are you satisfied from the feeling you feel on the left side that was treated?	Not at all 1 2 3 4 5 Very much	
Answer only from the second treatment	How long did the visual results last on the right side that was treated (Please describe in the "Full Answer" column)?		

	<i>Question</i>	<i>Score</i>	<i>Full Answer</i>
Answer only from the second treatment	How long did the visual results last on the left side that was treated (Please describe in the "Full Answer" column)?		
Answer only after the 5 th treatment	Do you feel that the results on the left side that was treated were accumulated from the first treatment?	Yes/No	
Answer only after the 5 th treatment	Do you feel that the results on the right side that was treated were accumulated from the first treatment?	Yes/No	
Answer after the 8 th treatment	Do you feel that the results on the left side that was treated were accumulated from the first treatment?	Yes/No	
Answer after the 8 th treatment	Do you feel that the results on the right side that was treated were accumulated from the first treatment?	Yes/No	
General comments			

RESULTS

Study group

All patients have shown immediate and highly noticeable results on both sides, after the first treatment; the skin tightness of the face and neck increased, it was smoother and with less wrinkles.

Further, after 5 treatments it was noticeable that the results were accumulated (based on comparison between pictures before the first treatment and pictures before the 5th treatment). After 8 treatments the skin tightness increased significantly. All clients indicated great satisfaction from the immediate visual results (tightness & stretched) as well as the long term results.

The average score of visual results and satisfaction on the right treated side was 4.66 (on 1 to 5 scale) and on the left treated side the average score was 4.8. 100% of the clients reported that the results on both sides remained all week along the sessions and were accumulated.

They report feeling of tightness, firm and highly comfort during the treatment in terms of the sensation ("Feels like hot stones massage") and expressed satisfaction from the sort time of the treatment.

Reference is now made to figures 13a-13c which are pictures of one patient out of the study group treated with the device of the present invention. The pictures were taken before the treatment (see figure 13a1 for the forehead and figure 13a2 for the neck), after the first treatment (see figure 13b1 for the forehead and figure 13b2 for the neck) and after the 8th treatment (see figure 13c1 for the forehead and figure 13c2 for the neck).

First control group

All patients have shown immediate results on both sides, after the first treatment. However the results were more significant in terms of tightening and wrinkles fading on the right side compare to the left side.

The average score of visual results and satisfaction on the right treated side was 4.93 compare to the left treated side which was 4.8.

Following 5 treatment it was noticeable that the results were accumulated significantly on the right side in comparison to the results on the left side which lasted only for few days. 90% of the clients reported that the results on the right side remained all week along the first 5 treatments and were accumulated compare to 40% of the clients that reported maintenance of the results on the left side.

After 8 treatments the skin tightness increased even more on the right side and 100% of the clients reported accumulative results compare to the results of the left side which remained almost the same and only 50% of the clients reported maintenance of the results.

Both clients indicated higher satisfaction from the immediate and long term results on the right side compare to the left side. No difference between both treated sides in terms of comfort was expressed.

Reference is now made to figures 14a-14c which are pictures of one patient out of the first control group treated with the device of the present invention on the right side and RF on the left side. The pictures were taken before the treatment (see figure 14a1 for the forehead and figure 14a2 for the neck), after the first treatment (see figure 14b1 for the forehead and figure 14b2 for the neck) and after the 8th treatment (see figure 14c1 for the forehead and figure 14c2 for the neck).

Second control group

All patients have shown immediate and very noticeable results (skin tightening and wrinkles fading) on the right side after the first treatment and the results have improved after the 5th and the 8th treatment.

The average score of visual results and satisfaction on the right treated side was 5.00 compare to the left treated side which was only 1.9.

It should be pointed out that on the left side they didn't show any results in terms of skin tightness along the treatments, although after the 4th treatment the skin showed some improvement (it looked more glowing and nourished).

All clients indicated high satisfaction from the immediate and long term results on the right side. 100% of the clients reported that the results on the right side remained all week along the first 5 treatments and were accumulated (and up to the 8th treatment) compare to 10% of the clients that reported maintenance of the results on the left side.

As for the left side, they reported after the 5th treatment satisfaction from the improved skin's condition and look, although they expressed some disappointment from not having results in terms of skin tightening. They reported high comfort in terms of the treatment sensation during the treatment of both sides.

Reference is now made to figures 15a-15c which are pictures of one patient out of the second control group treated with the device of the present invention on the right side and PEMF on the left side. The pictures were taken before the treatment (see figure 15a1 for the forehead and figure 15a2 for the neck), after the first treatment (see figure 15b1 for the forehead and figure 15b2 for the neck) and after the 8th treatment (see figure 15c1 for the forehead and figure 15c2 for the neck).

Third control group

All patients have shown on the right side very noticeable immediate and accumulative results (skin tightening and wrinkles fading).

The satisfaction was very high.

On the left side visual results are seen; the immediate results were similar to the right side, however the accumulative results were less significant and noticeable compare with the left side.

The average score of visual results and satisfaction on the right treated side was 4.83 compare to the left treated side which was only 2.36.

90% of the clients reported that the results on the right side remained all week along the first 5 treatments (and up to the 8th treatment) and were accumulated.

Only 30% of the clients reported maintenance of the results on the left side. In term of satisfaction the clients expressed inconvenient due to the long duration of the treatment.

Reference is now made to figures 16a-16c which are pictures of one patient out of the third control group treated with the device of the present invention on the right side. The left side was treated with PEMF followed by RF. The pictures were taken before the treatment (see figure 16a1 for the forehead and figure 16a2 for the neck), after the first treatment (see figure

16b1 for the forehead and figure 16b2 for the neck) and after the 8th treatment (see figure 16c1 for the forehead and figure 16c2 for the neck).

The following tables (tables 3 and 4) summaries the results:

Table 3: average score (1 to 5 scale) of all participant in each group following all the treatments:

Question	Study group	Control 1	Control 2	Control 3
Do you see any visual changes on the right side that was treated?	4.7	4.9	5	4.9
Are you setisfied from the visual changes on the right side that was treated?	4.7	5	5	4.8
Are you setisfied from the feeling you feel on the right side that was treated?	4.6	4.9	5	4.8
Do you see any visual changes on the left side that was treated?	4.9	2.5	1.9	2.4
Are you setisfied from the visual changes on the left side that was treated?	4.8	2.6	2	2.3
Are you setisfied from the feeling you feel on the left side that was treated?	4.7	2.4	1.8	2.4

Table 4: results of "Yes/No" Questions of all the patients in each group following all the treatments

Question	Study group		Control 1		Control 2		Control 3	
	Yes	No	Yes	No	Yes	No	Yes	No
Is there any specific feeling you feel on the right side that was treated? (tightness, lifting stretched, fullness, swelled, loosen, ache, scratching)?	80%	20%	90%	10%	100%	0%	80%	20%
Is there any specific feeling you feel on the left side that was treated? (tightness, lifting stretched, fullness, swelled, loosen, ache, scratching)?	90%	10%	60%	40%	40%	60%	50%	50%
Answer only after the 5th treatment:								
Do you feel that the results on the left side that was treated were accumulated from the first treatment?	100%	0%	40%	60%	10%	90%	30%	70%

Answer only after the 5th treatment: Do you feel that the results on the right side that was treated were accumulated from the first treatment?	100%	0%	90%	10%	100%	0%	90%	10%
Answer only after the 8th treatment: Do you feel that the results on the left side that was treated were accumulated from the first treatment?	100%	0%	50%	50%	20%	80%	30%	70%
Answer only after the 8th treatment: Do you feel that the results on the right side that was treated were accumulated from the first treatment?	100%	0%	100%	0%	100%	0%	100%	0%

CONCLUTIONS

The synergetic effect of the device of the present invention clearly shows objectively and subjectively superior results when compare to the treatments in which only RF, or only PEMF were used.

It has shown that clients who were treated on the left side with PEMF technology had a much clearer difference between both sides. This is probably since they have not seen any tightness effect on the left side.

In addition it was shown that clients that were treated with the device of the present invention on both sides felt significant changes along the treatment. Yet more, it was harder for them to see the difference between both sides since both sides were treated with the device of the present invention and both sides had improved in the same way. 80%-100% out of all 40 participants answered "Yes" regarding questions concerning the tightness of the skin and the accumulative results on the right treated area. Only 10%-50% that were treated on the left side with other technology answered "Yes" regarding questions concerning the tightness of the skin and the accumulative results.

The results with the combined technology (the device provided by the present invention) were immediate and they maintained and improved from one treatment to the other. **Immediate skin tightening** has been seen due to the change of collagen fibers formation (they become shorter and thicker and as a result harder) induced by thermal technique of the RF.

Long lasting results has been seen due to the increase of new collagen fibers synthesis by using thermal (RF) and non-thermal (PEMF) technologies induced by the device of the present invention enables the formation change of greater amount of collagen fibers and as a results created physiological buttress that enabled better structural support of the skin.

The assets of the device of the present invention to the medical field are:

- Synergistic effect that stimulates dermal fibroblasts which produce new collagen, elastic and reticular fibers by using different mechanisms (Heating & non heating);
- Changing the form of a greater amount of collagen fiber by making them shorter and thicker; and,
- Angiogenesis - increasing the formation of new small blood vessels.

What is claimed is:

1. An integrated system adapted to increase skin rejuvenation of a region of a patient's skin, said system comprising:

at least two electrodes adapted to be placed on said region of a patient's skin;

an electromagnetic field generator adapted to generate electromagnetic field pulses;

a control system; and

at least two helical coils,

wherein:

each of said electrodes is encircled by at least one of said at least two helical coils;

none of said electrodes is configured to penetrate said skin;

each of said electrodes is configured to provide electromagnetic pulses to said region of a patient's skin, said electromagnetic pulses provided to said electrode by said helical coils;

each of said electrodes is configured to apply heat up to temperature T in a range of 25 degrees Celsius to 80 degrees Celsius;

said control system is adapted to control said electromagnetic field generator and application of heat by said electrodes; and

all of said electrodes are adapted to simultaneously provide said electromagnetic pulses to said region of a patient's skin and to apply said heat to said region of a patient's skin.

2. The system according to claim 1, wherein said heat applied to said region of a patient's skin is obtained by emitting RF radiation or via producing electrical current absorbed by subcutaneous tissue.

3. The system according to claim 1, wherein said electromagnetic pulse is a triangular shaped waveform at a frequency of 25 Hz and an intensity of 20 Gauss.

4. The system according to claim 1, wherein said electromagnetic pulse is a square shaped waveform at a frequency of 16 Hz, duration of about 5 milliseconds and an intensity of 12 Gauss.

5. The system according to claim 1, wherein said system is adapted to provide a dynamic magnetic field such that said electromagnetic pulses vary with time.
6. The system according to claim 1, wherein each of said electromagnetic pulses has a shape of a square wave, or a sine wave, or a triangular wave, or a sawtooth wave, or a ramp wave, or a spiked wave or any combination thereof.
7. The system according to claim 1, wherein said control system monitors physical tissue parameters and changes said applied heat and said electromagnetic pulses accordingly.
8. The system according to claim 1, wherein a magnetic field intensity B of each pulse applied by said pulsed electromagnetic frequency generator ranges between about 0 Tesla and about 3 Tesla.
9. The system according to claim 1, wherein the duration of each pulse applied by said system ranges between about 3 milliseconds and about 1000 milliseconds.
10. The system according to claim 1, wherein a frequency F applied by the pulses of said system ranges between about 1 Hz and about 1M Hz.
11. The system according to claim 1, wherein an energy E applied by the pulses of said system ranges between about 1 watt per pulse and about 150 watts per pulse.
12. The system according to claim 1, wherein said control system includes a mechanism for skin cooling.
13. Use of the system according to any one of claims 1 – 12 for increasing skin rejuvenation of a region of a patient's skin.

1/17

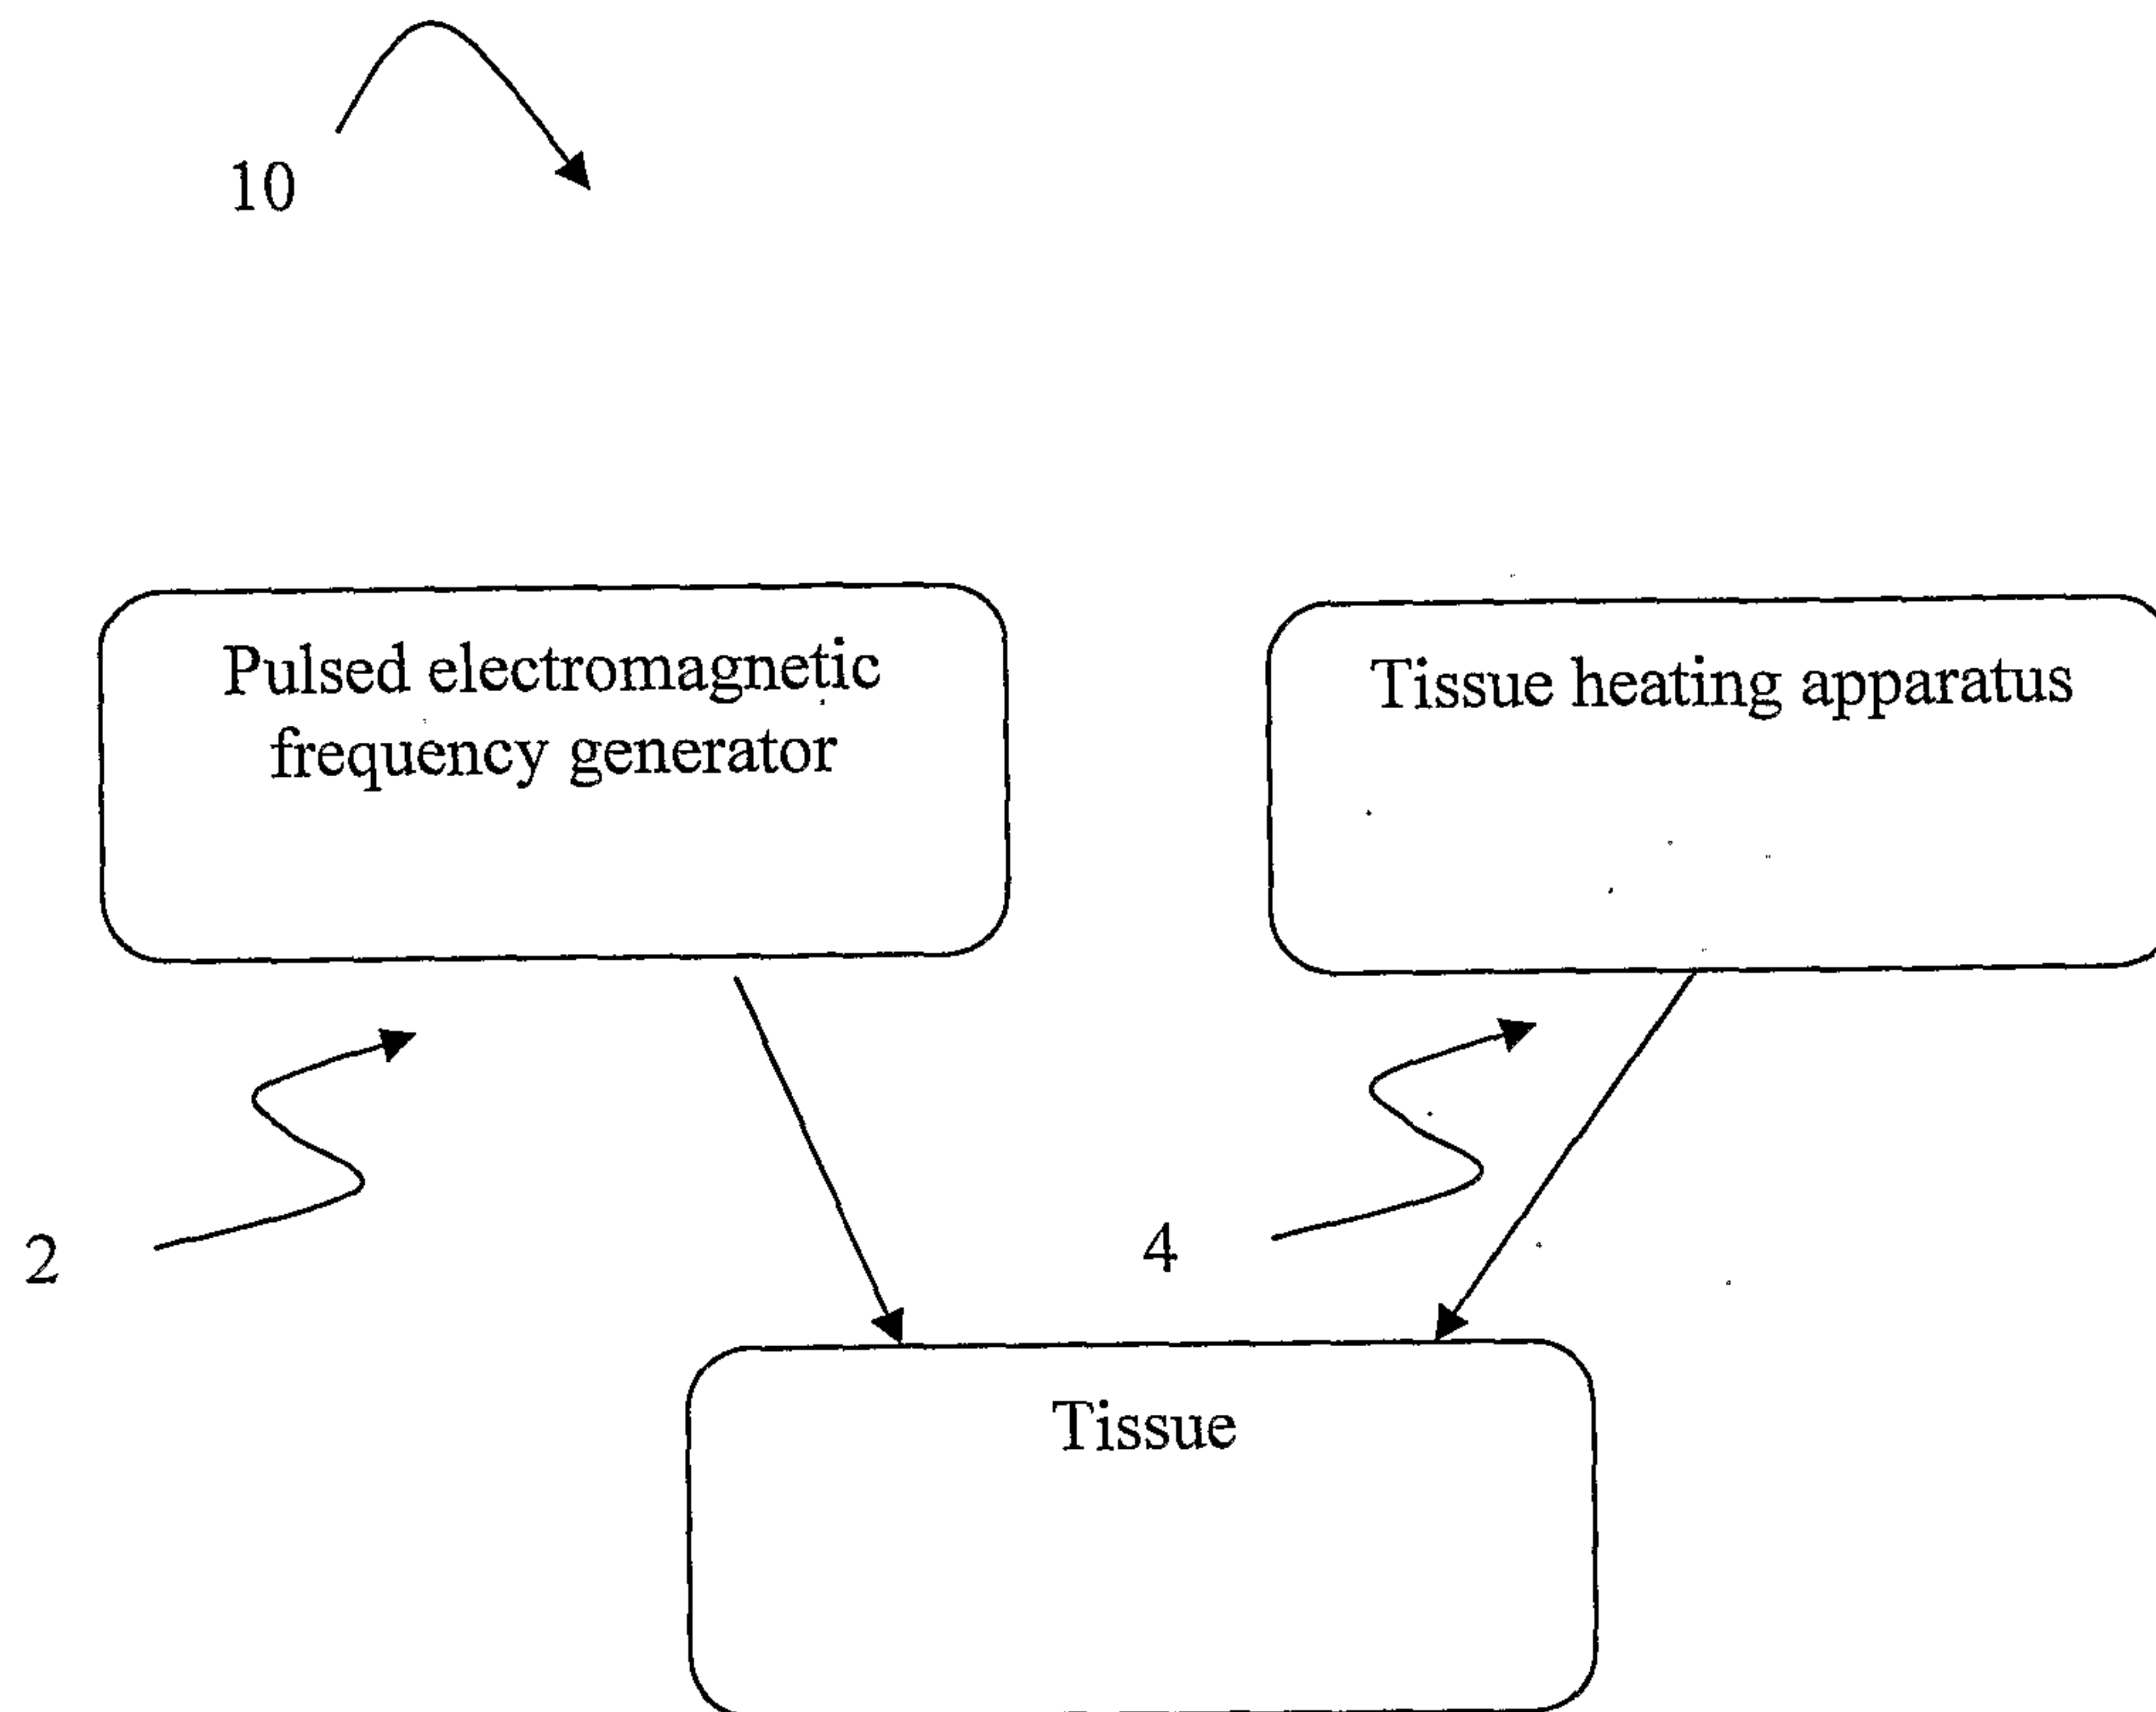


FIG. 1A

2/17

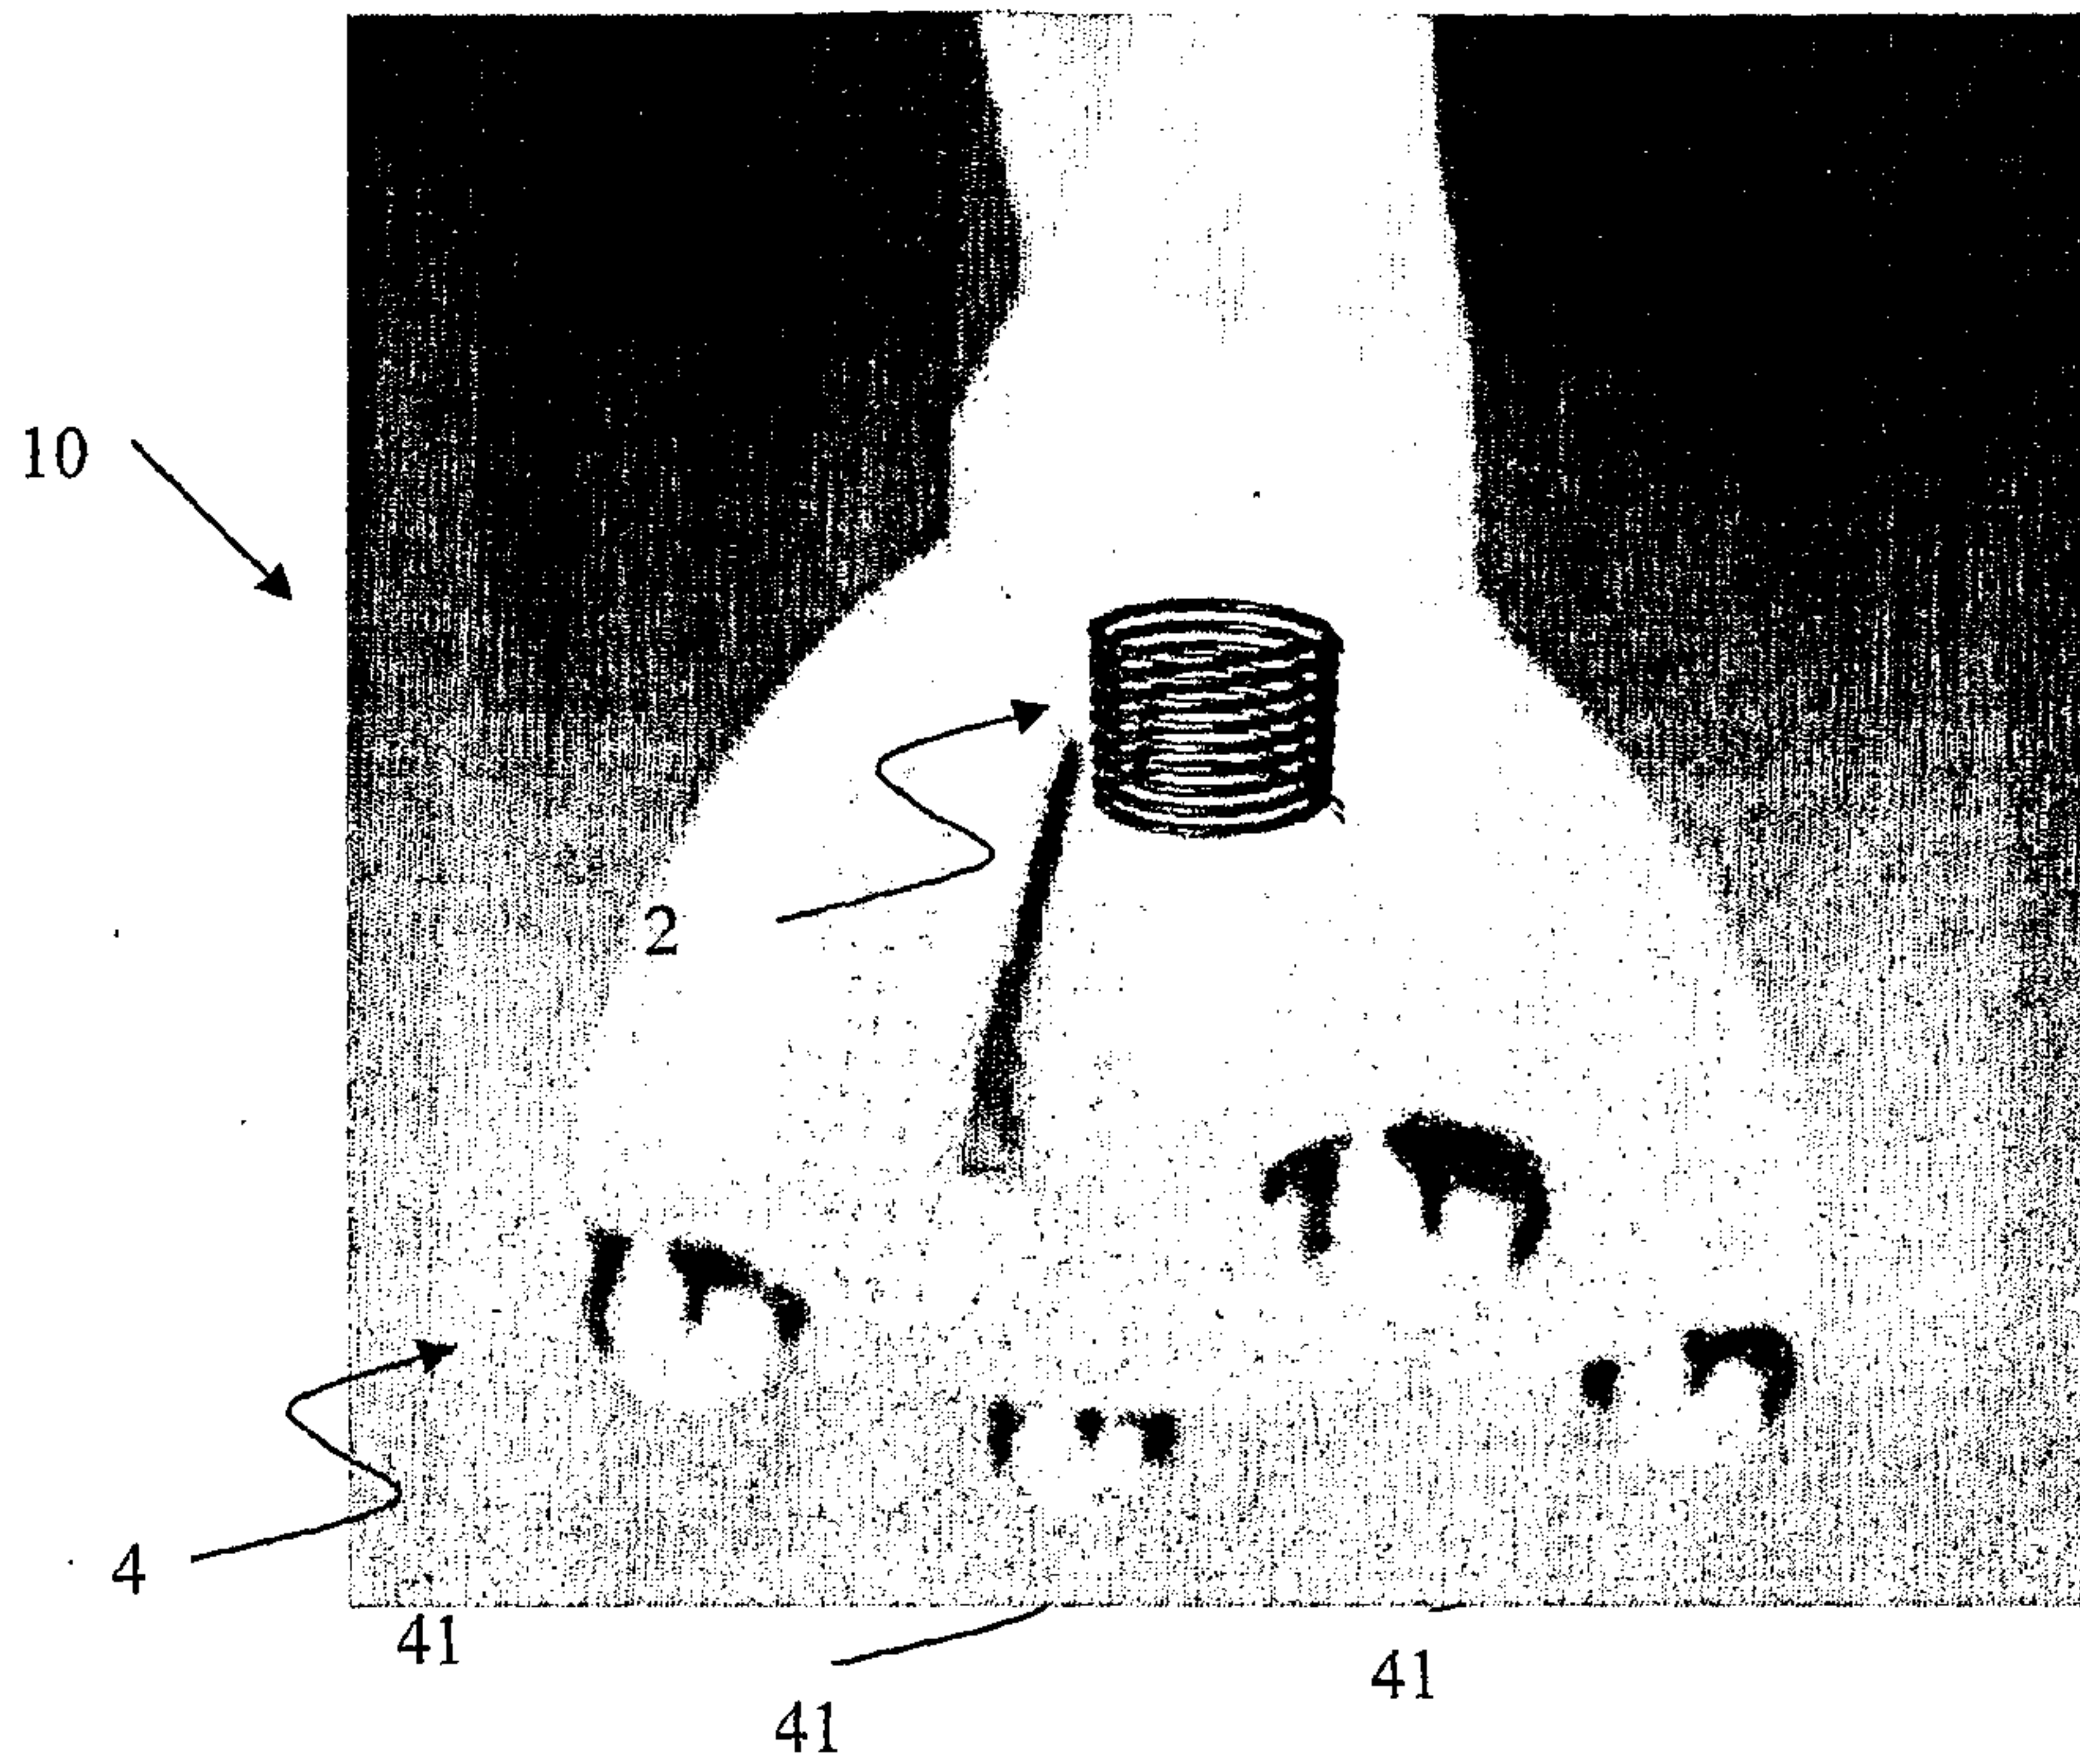


FIG. 1B

3/17

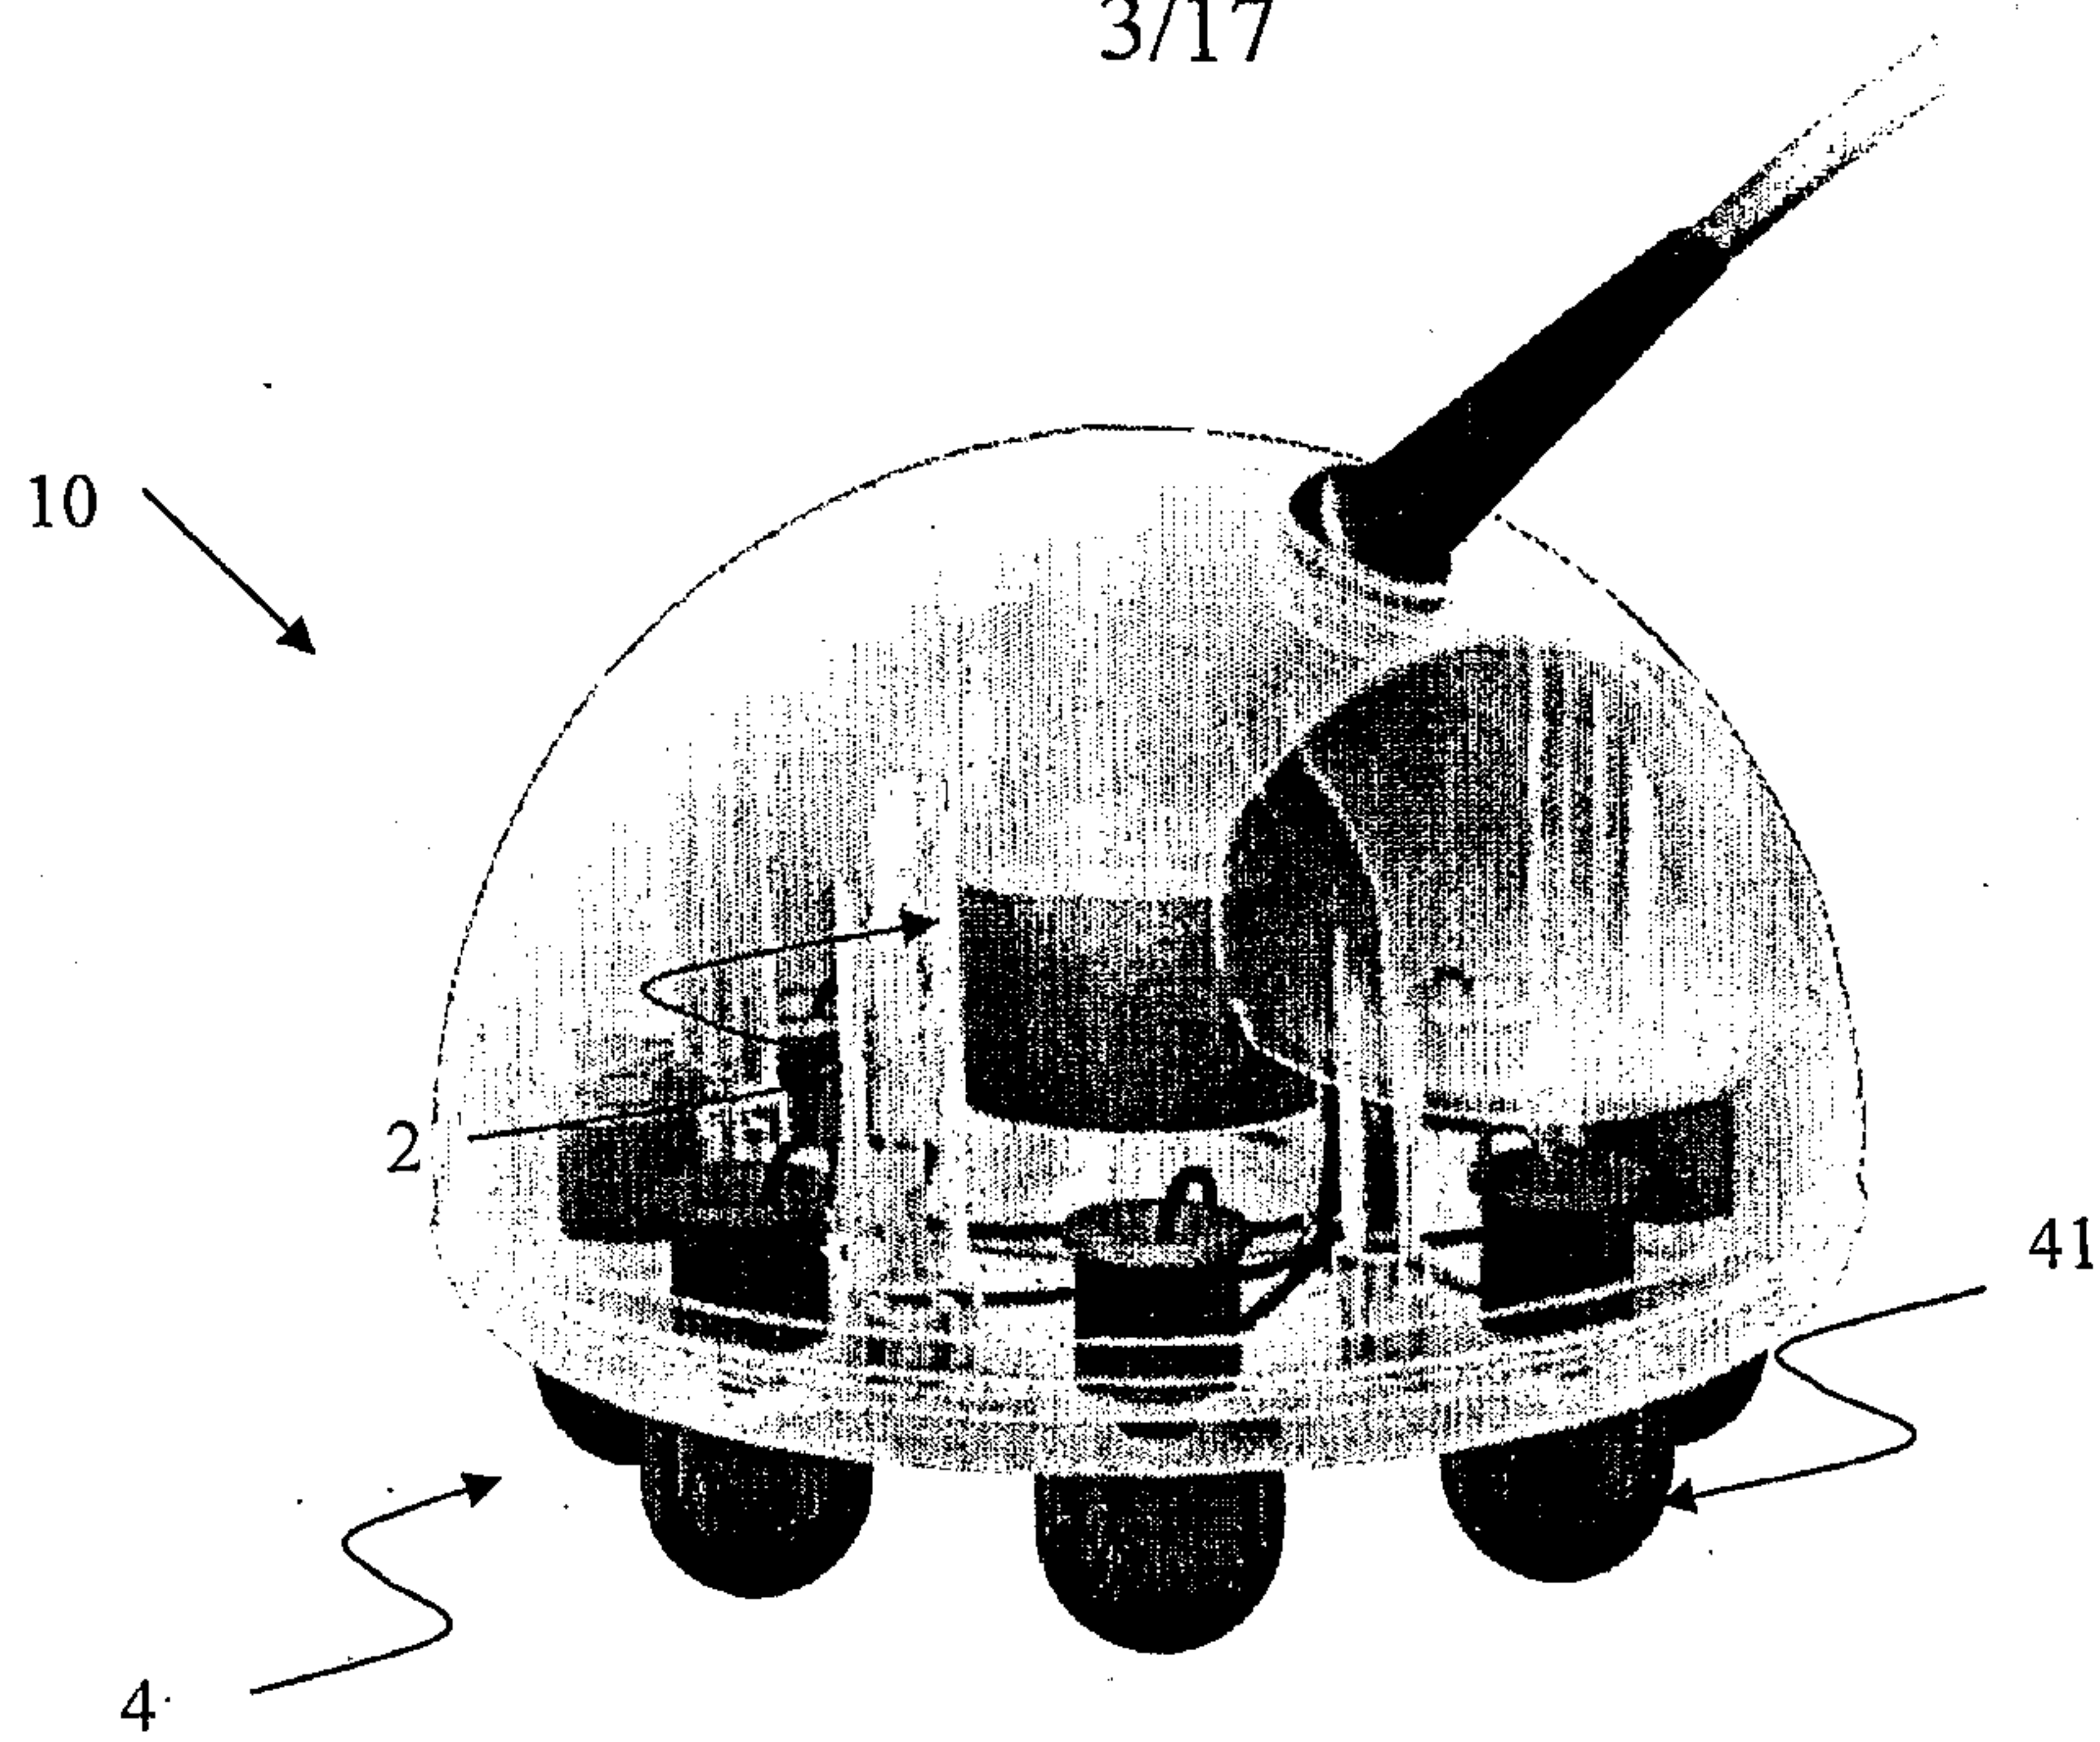


FIG. 1C

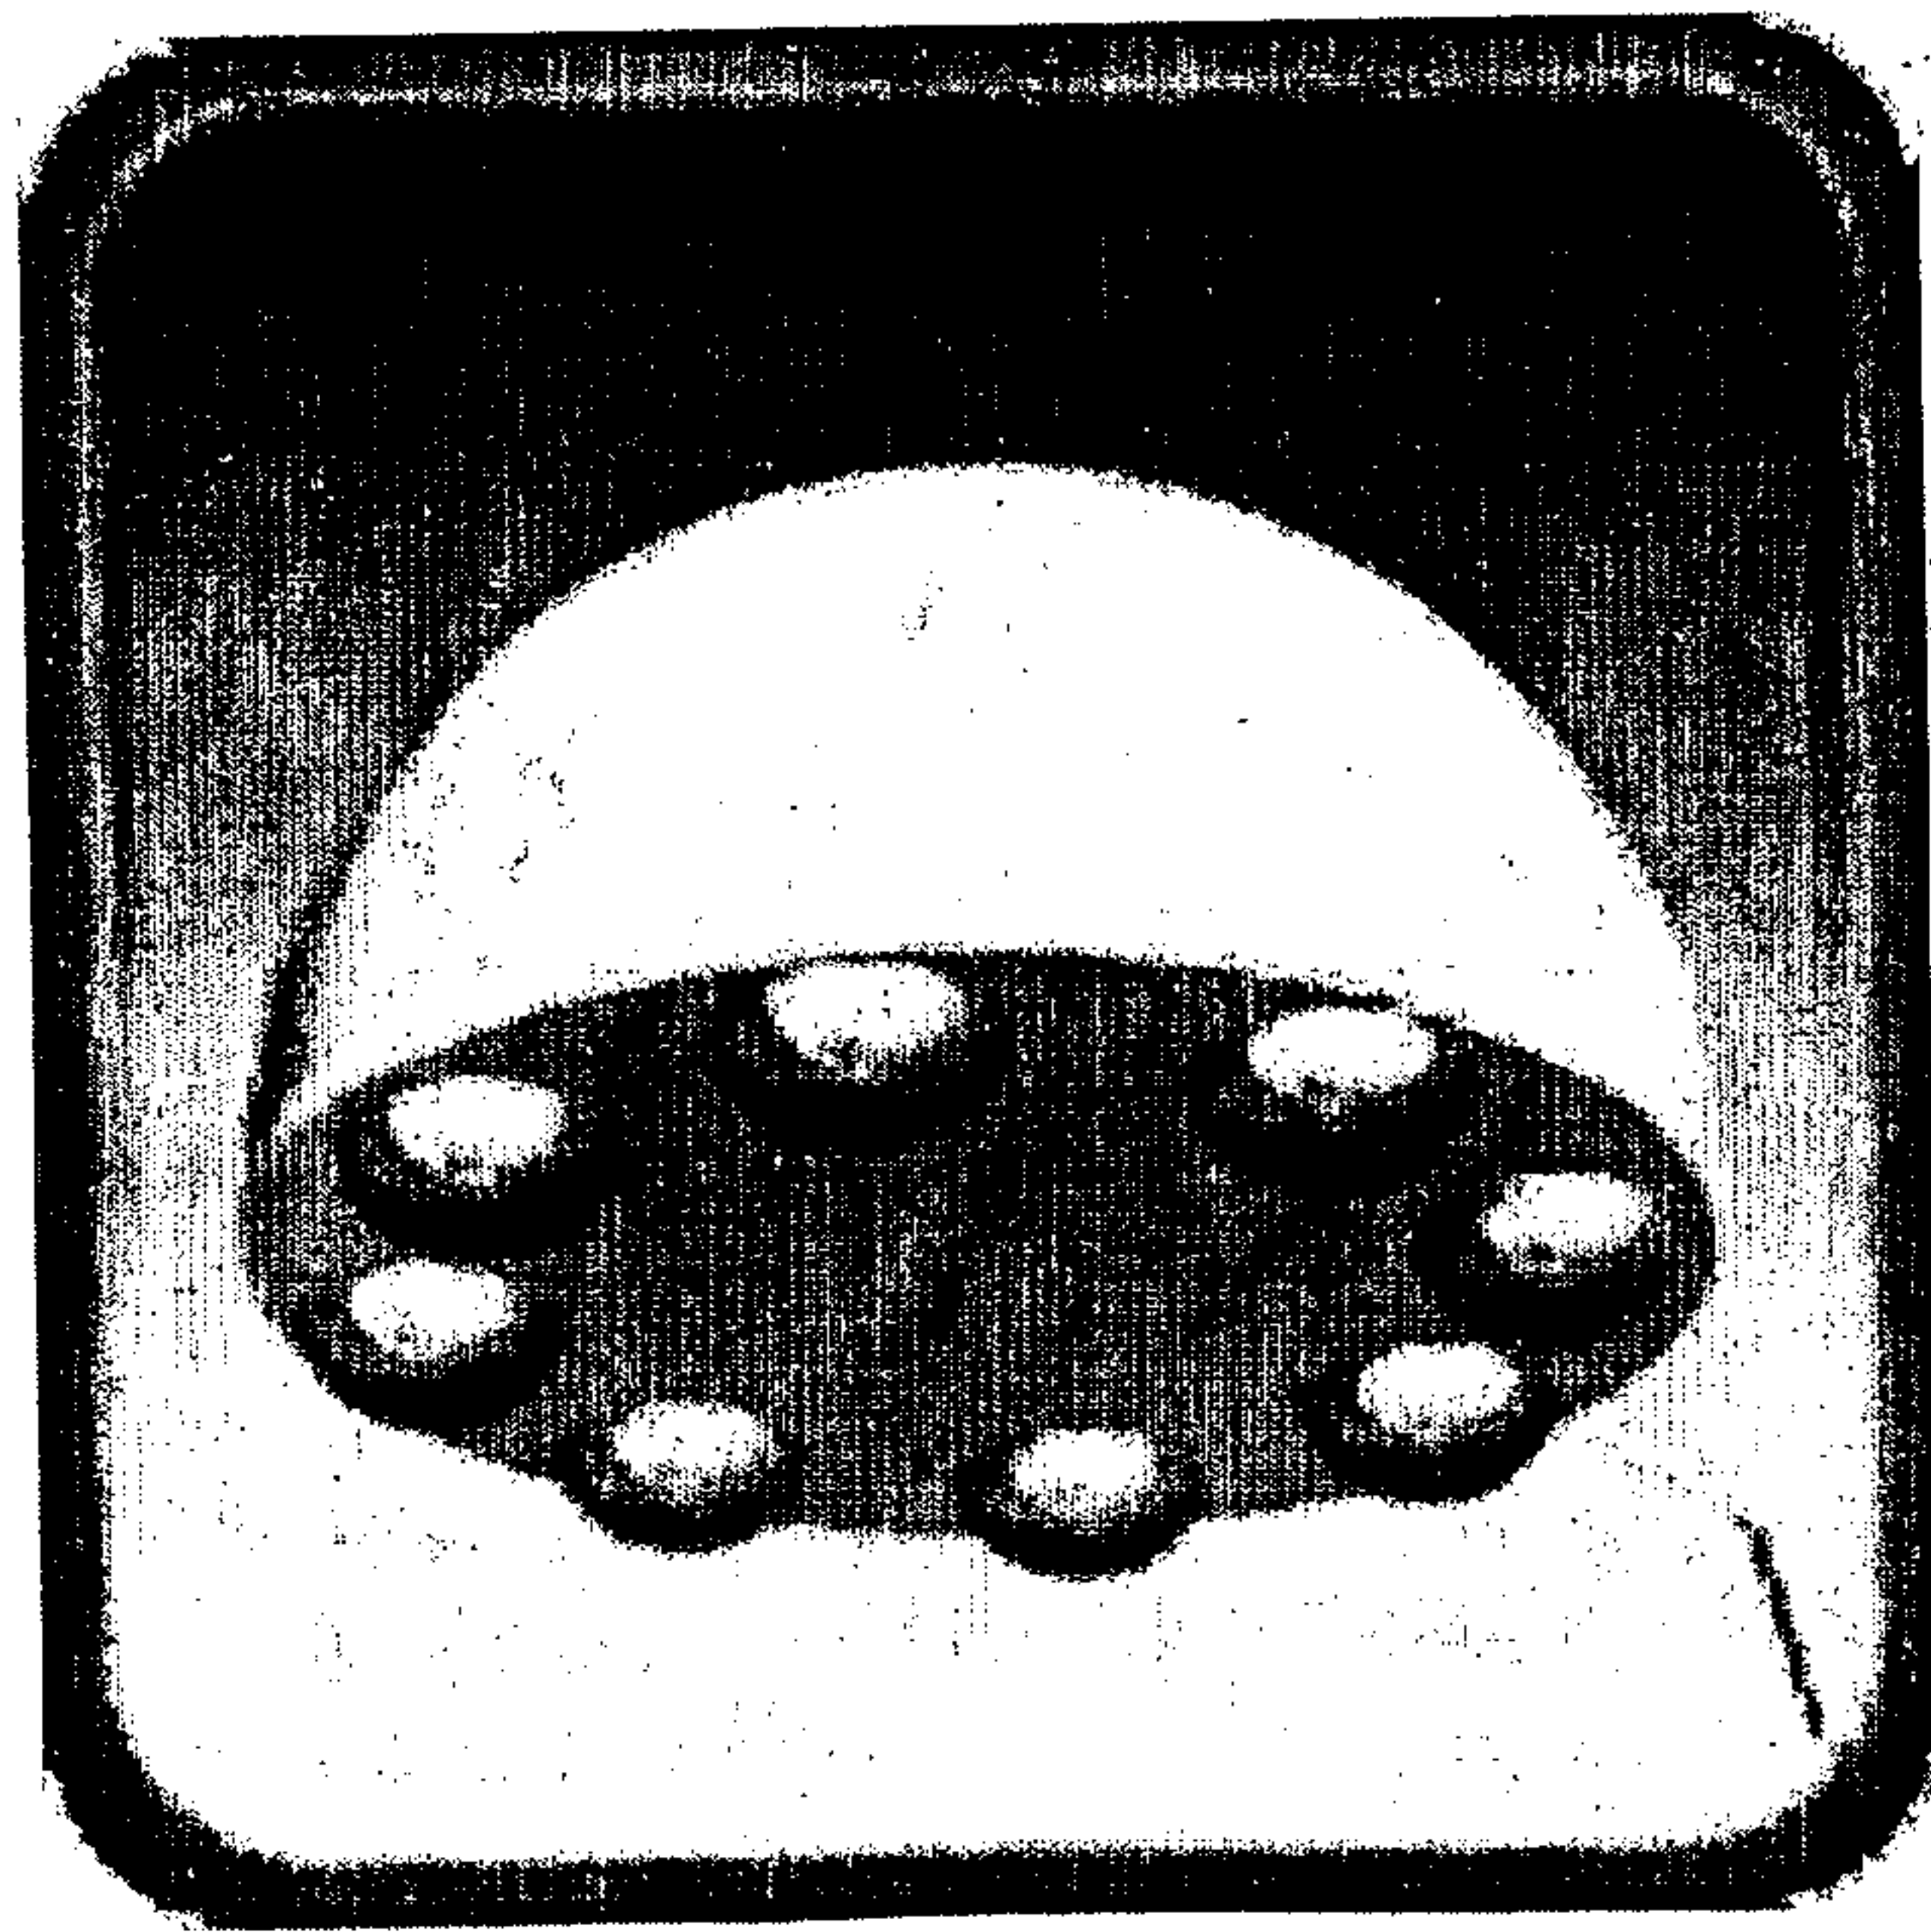


FIG. 1D

4/17

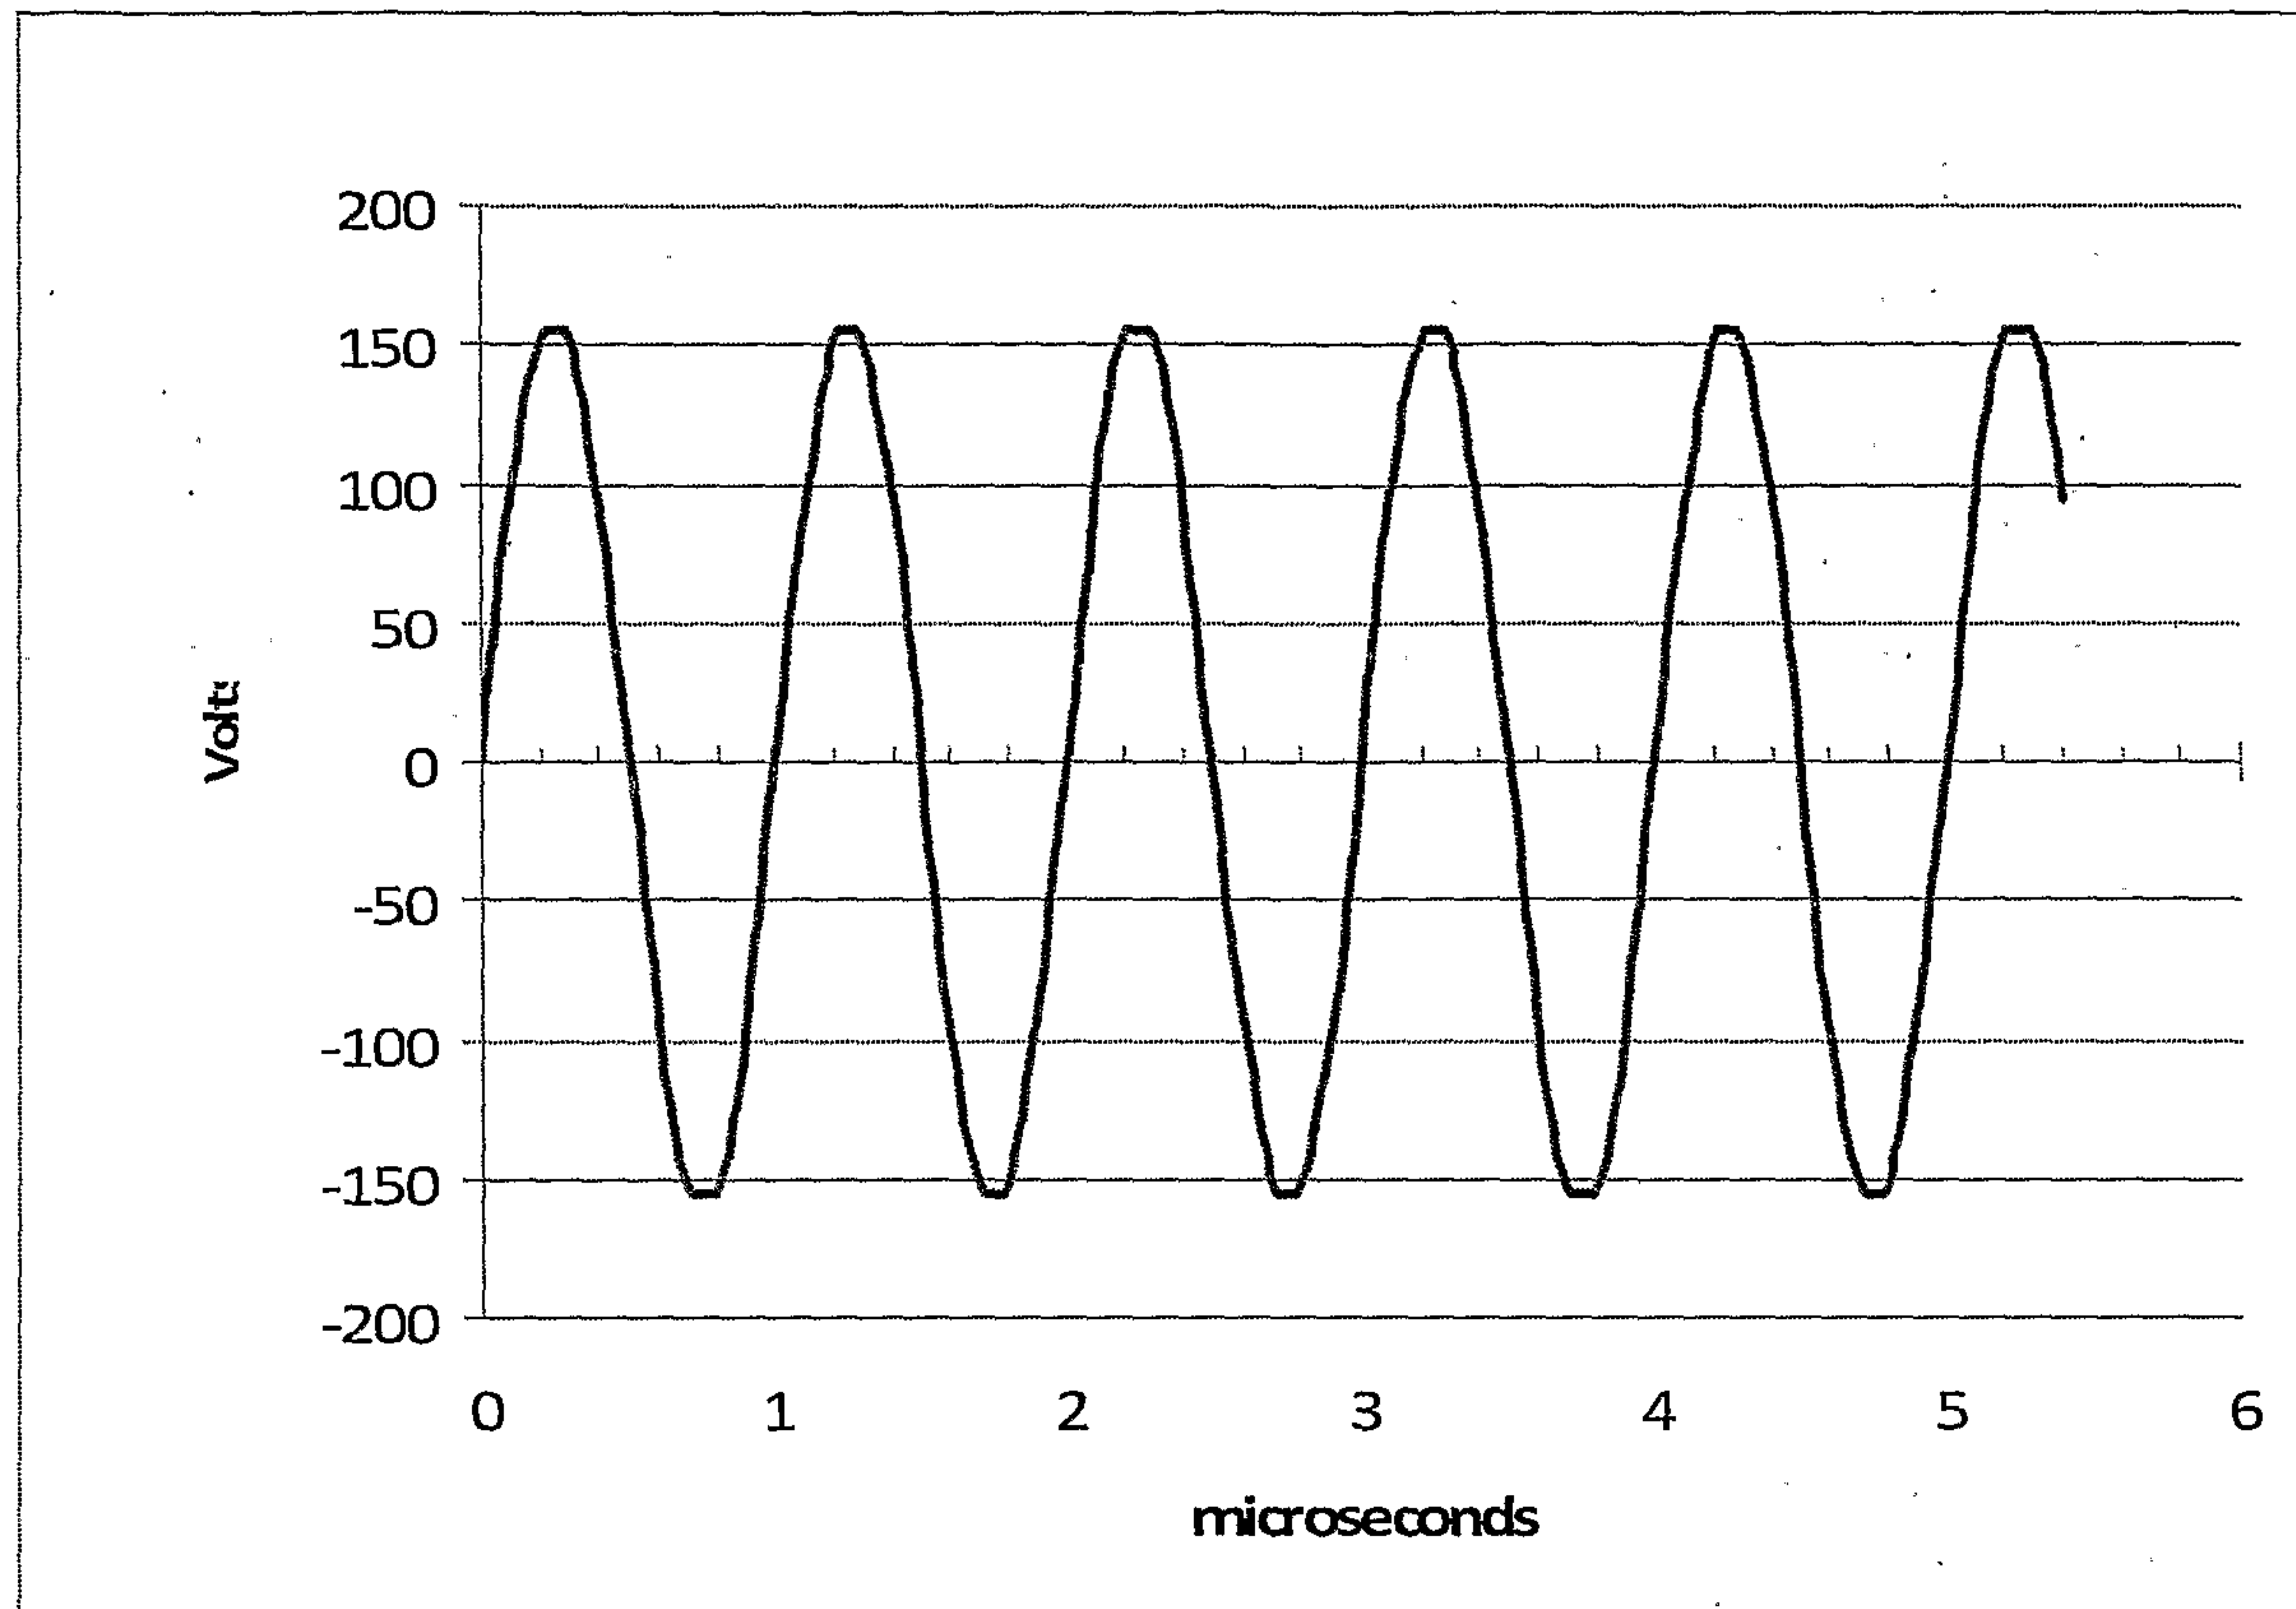


FIG. 1E

5/17

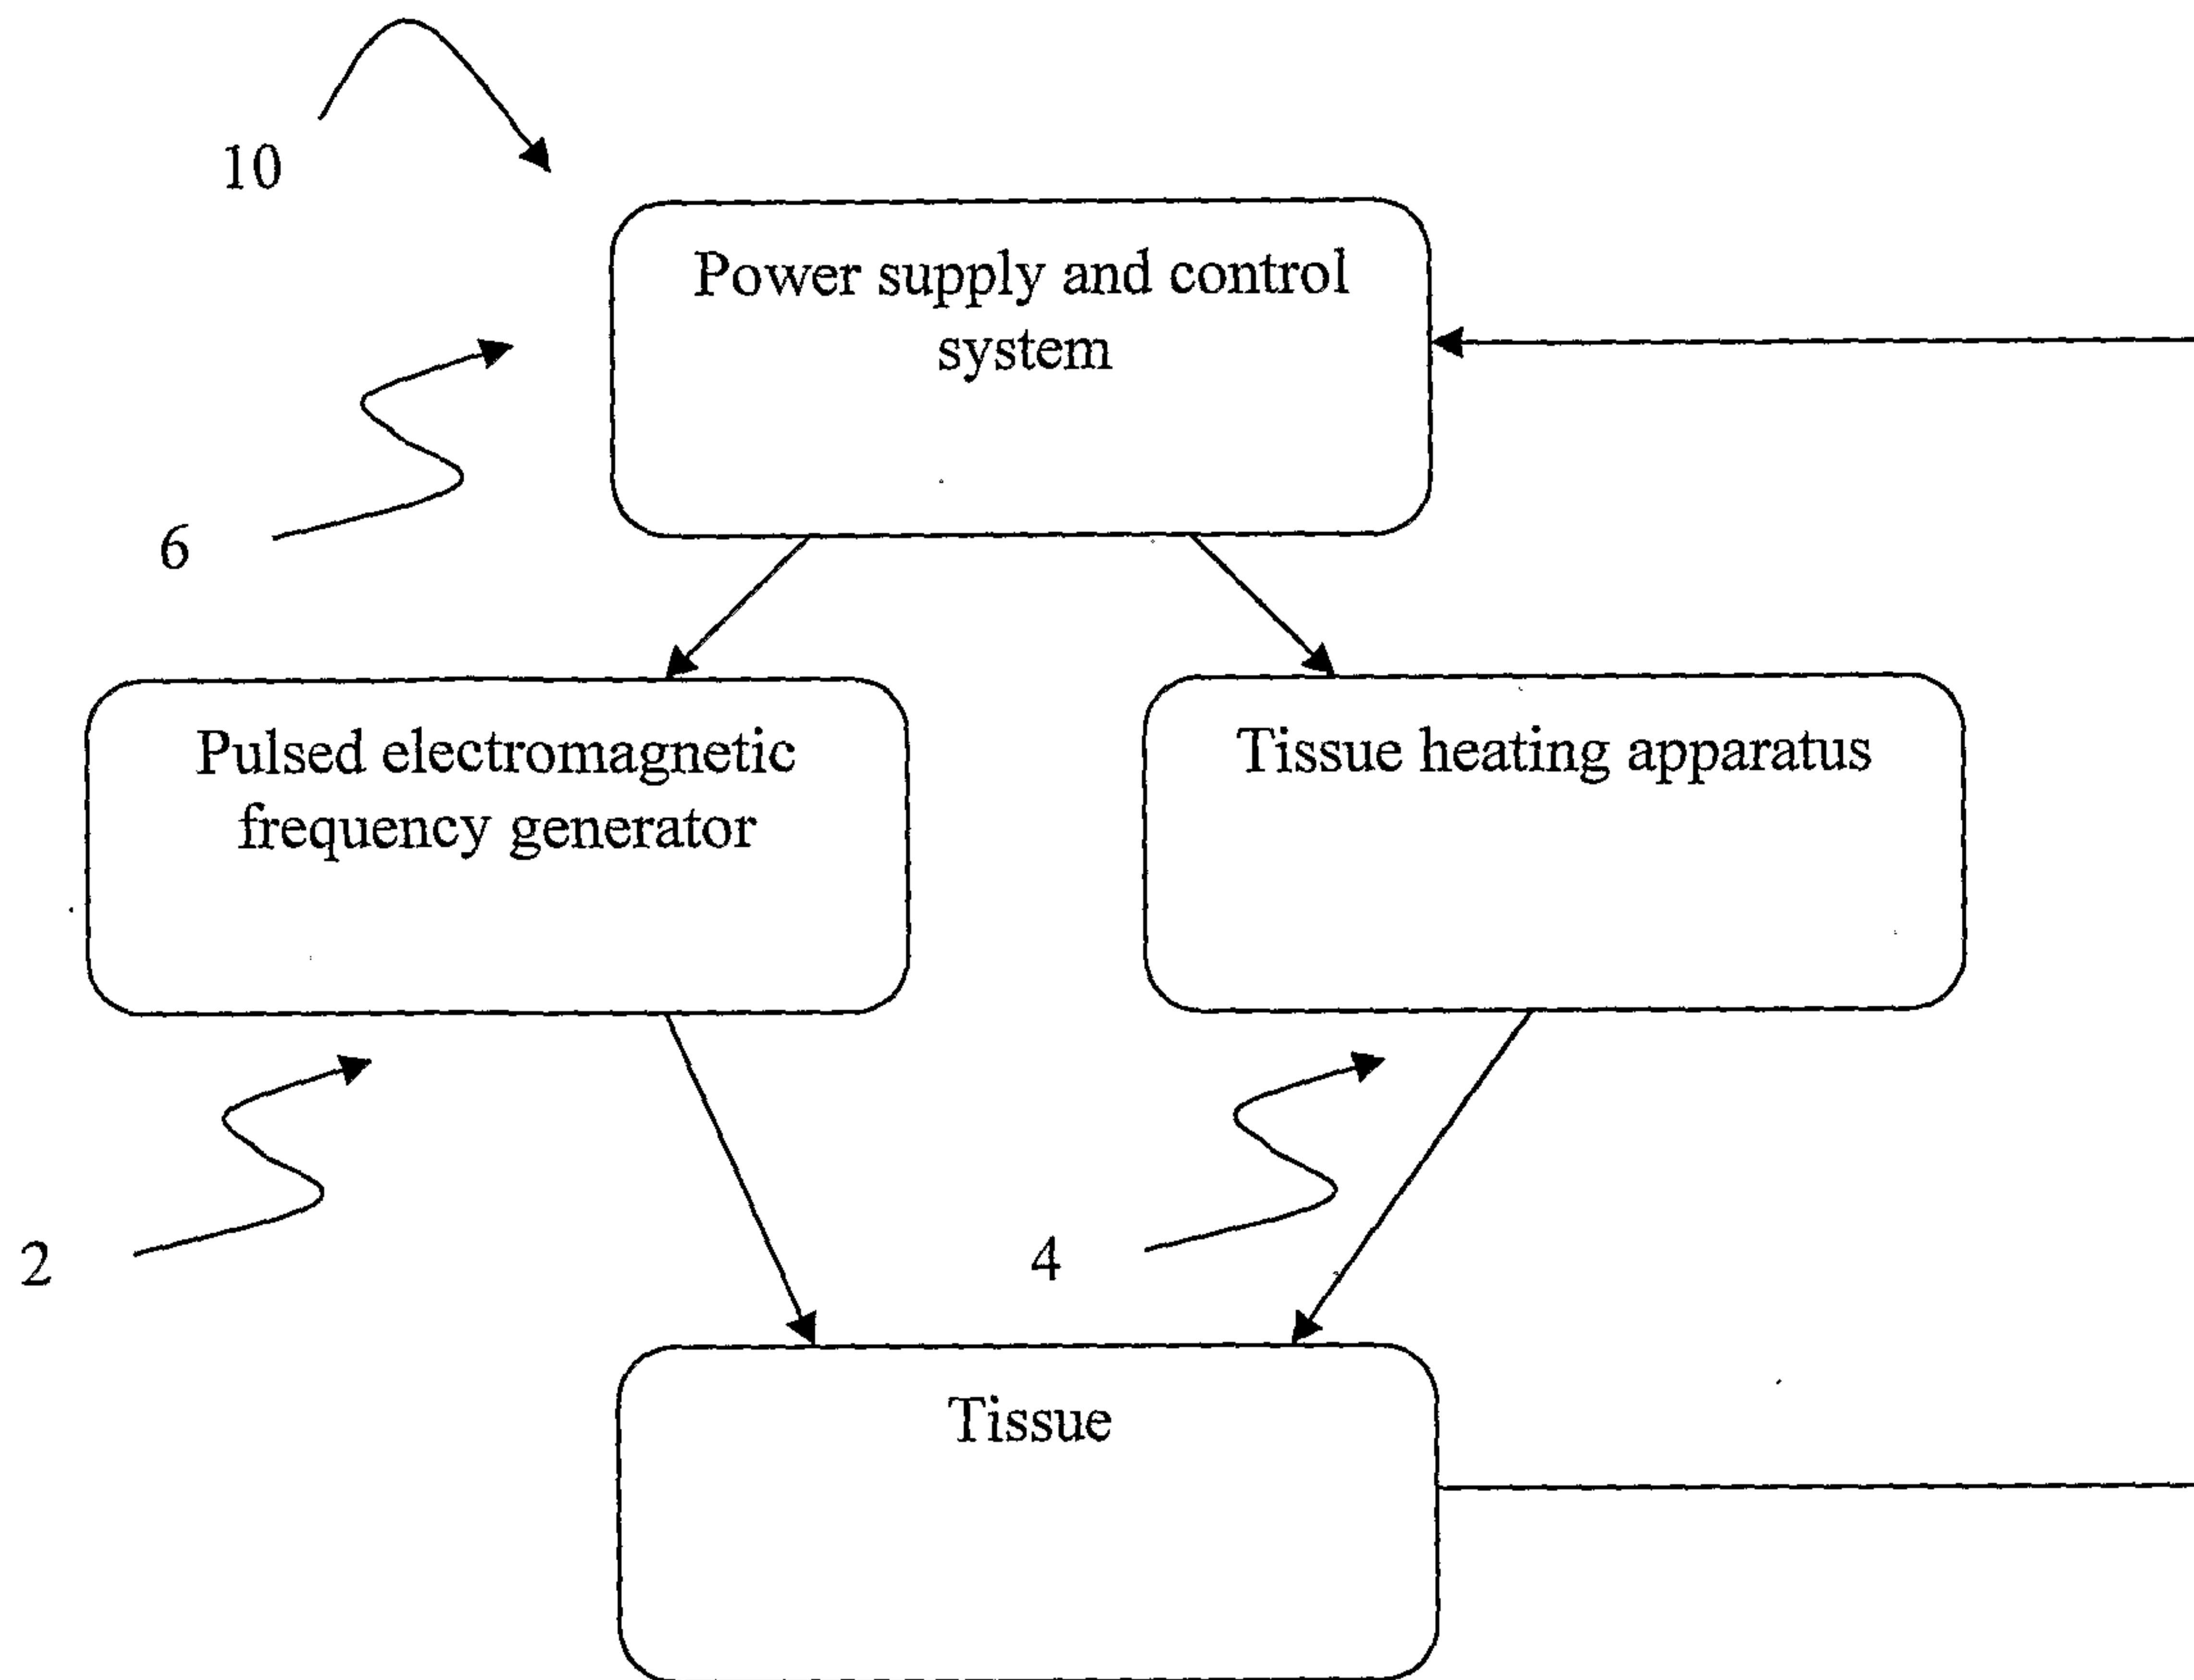


FIG. 2

6/17

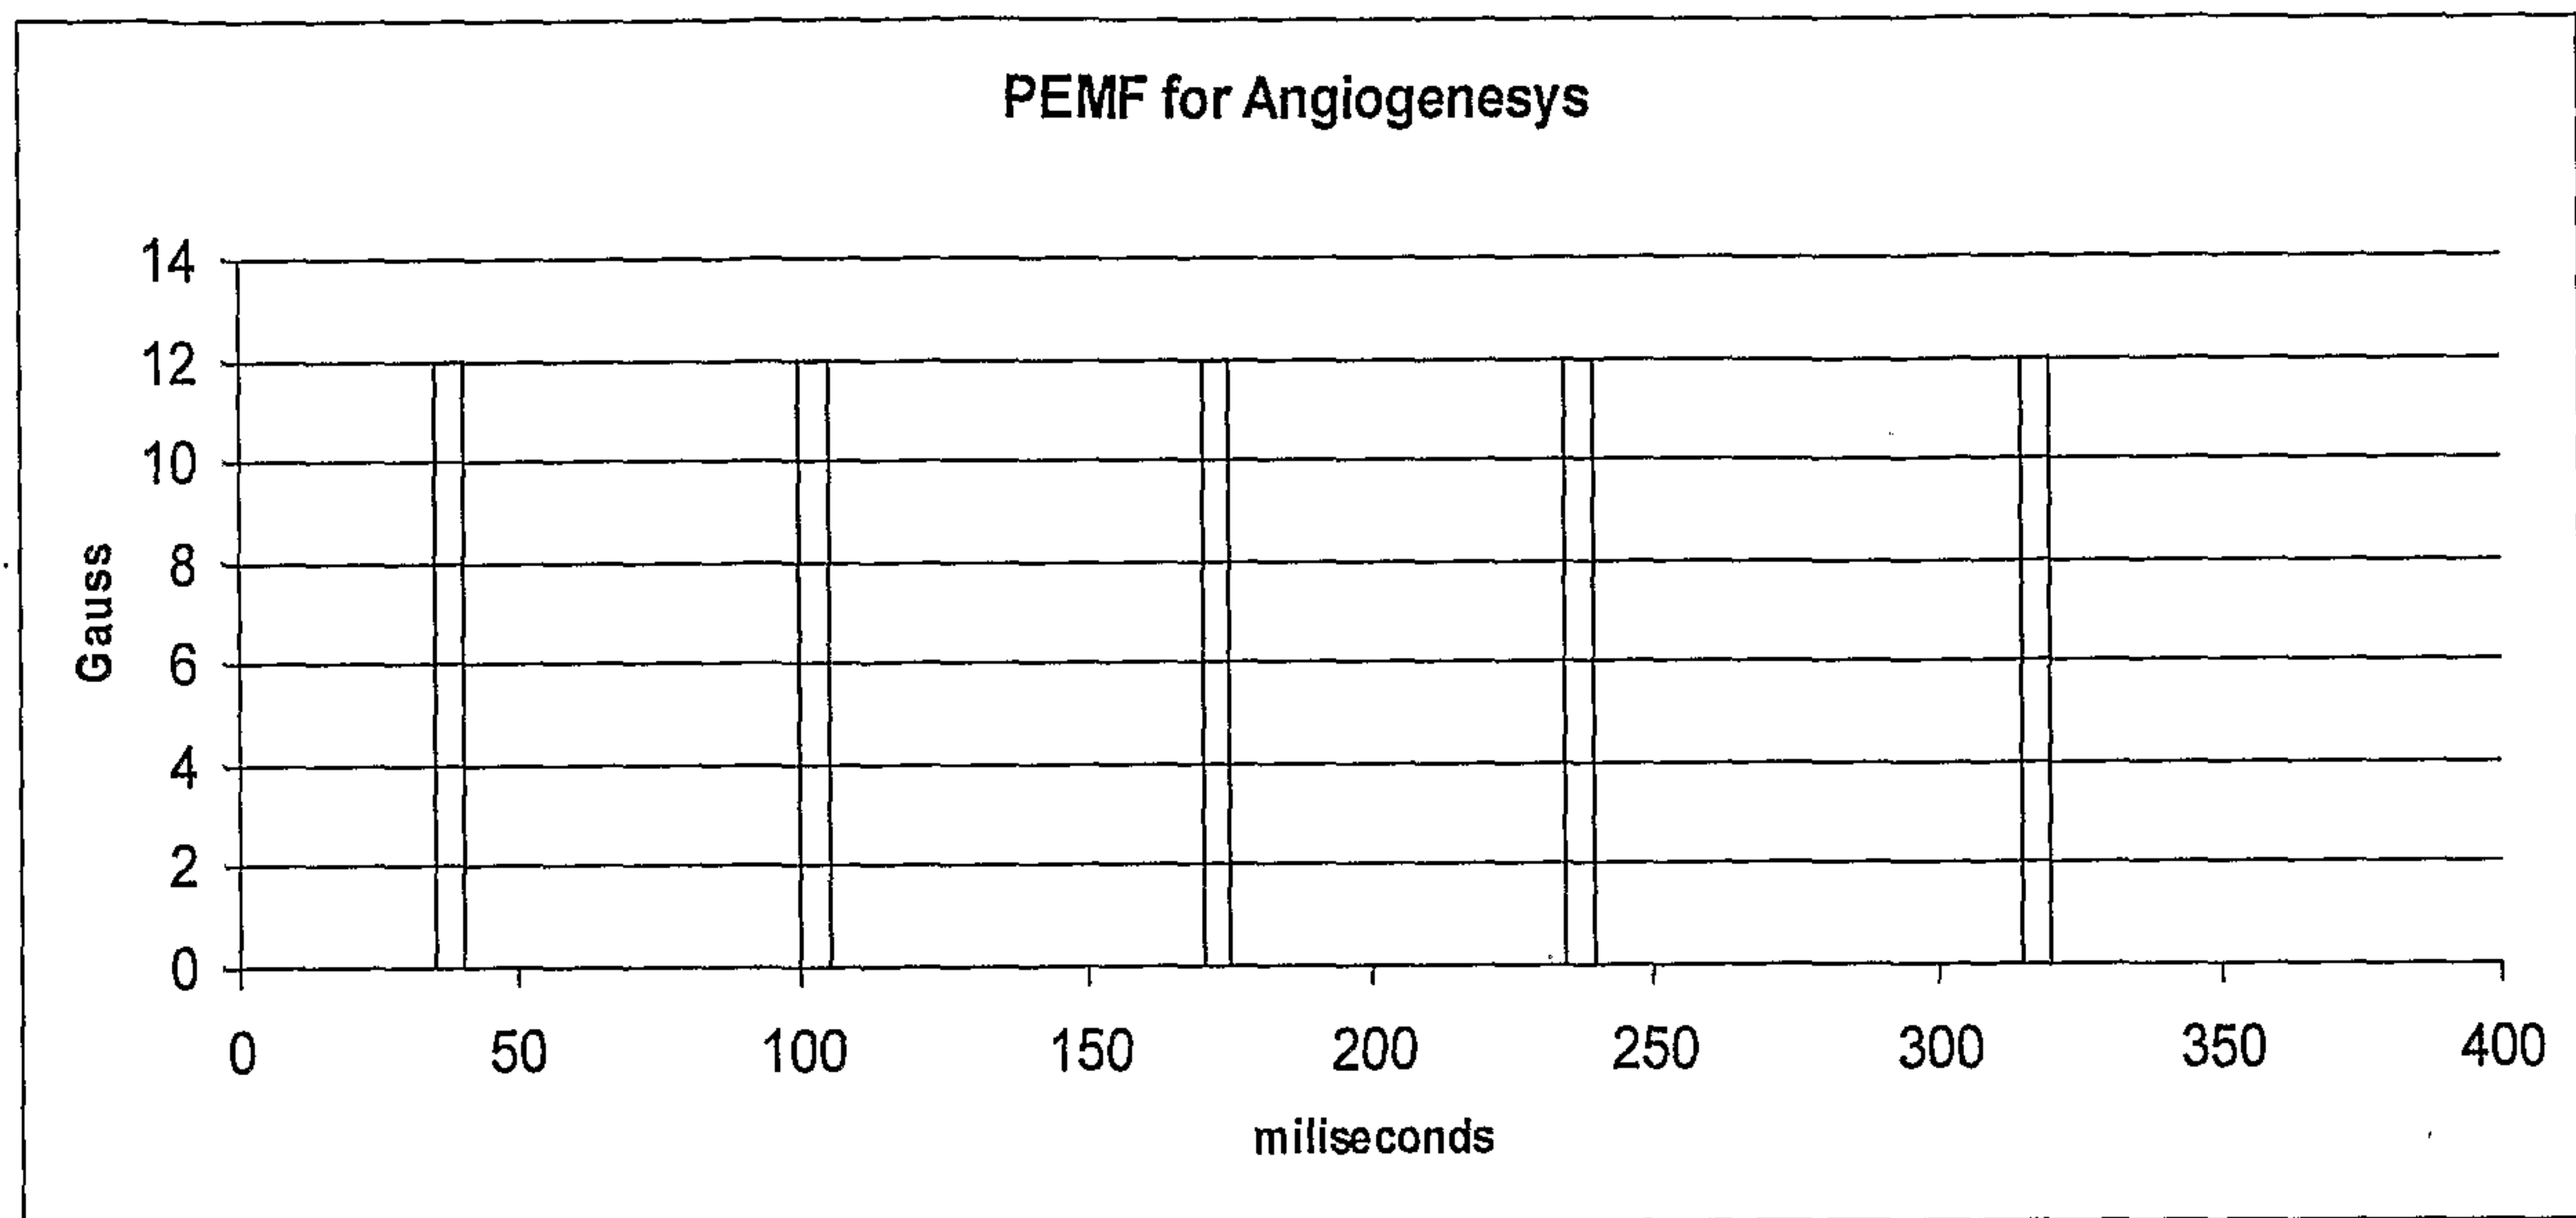


FIG. 3

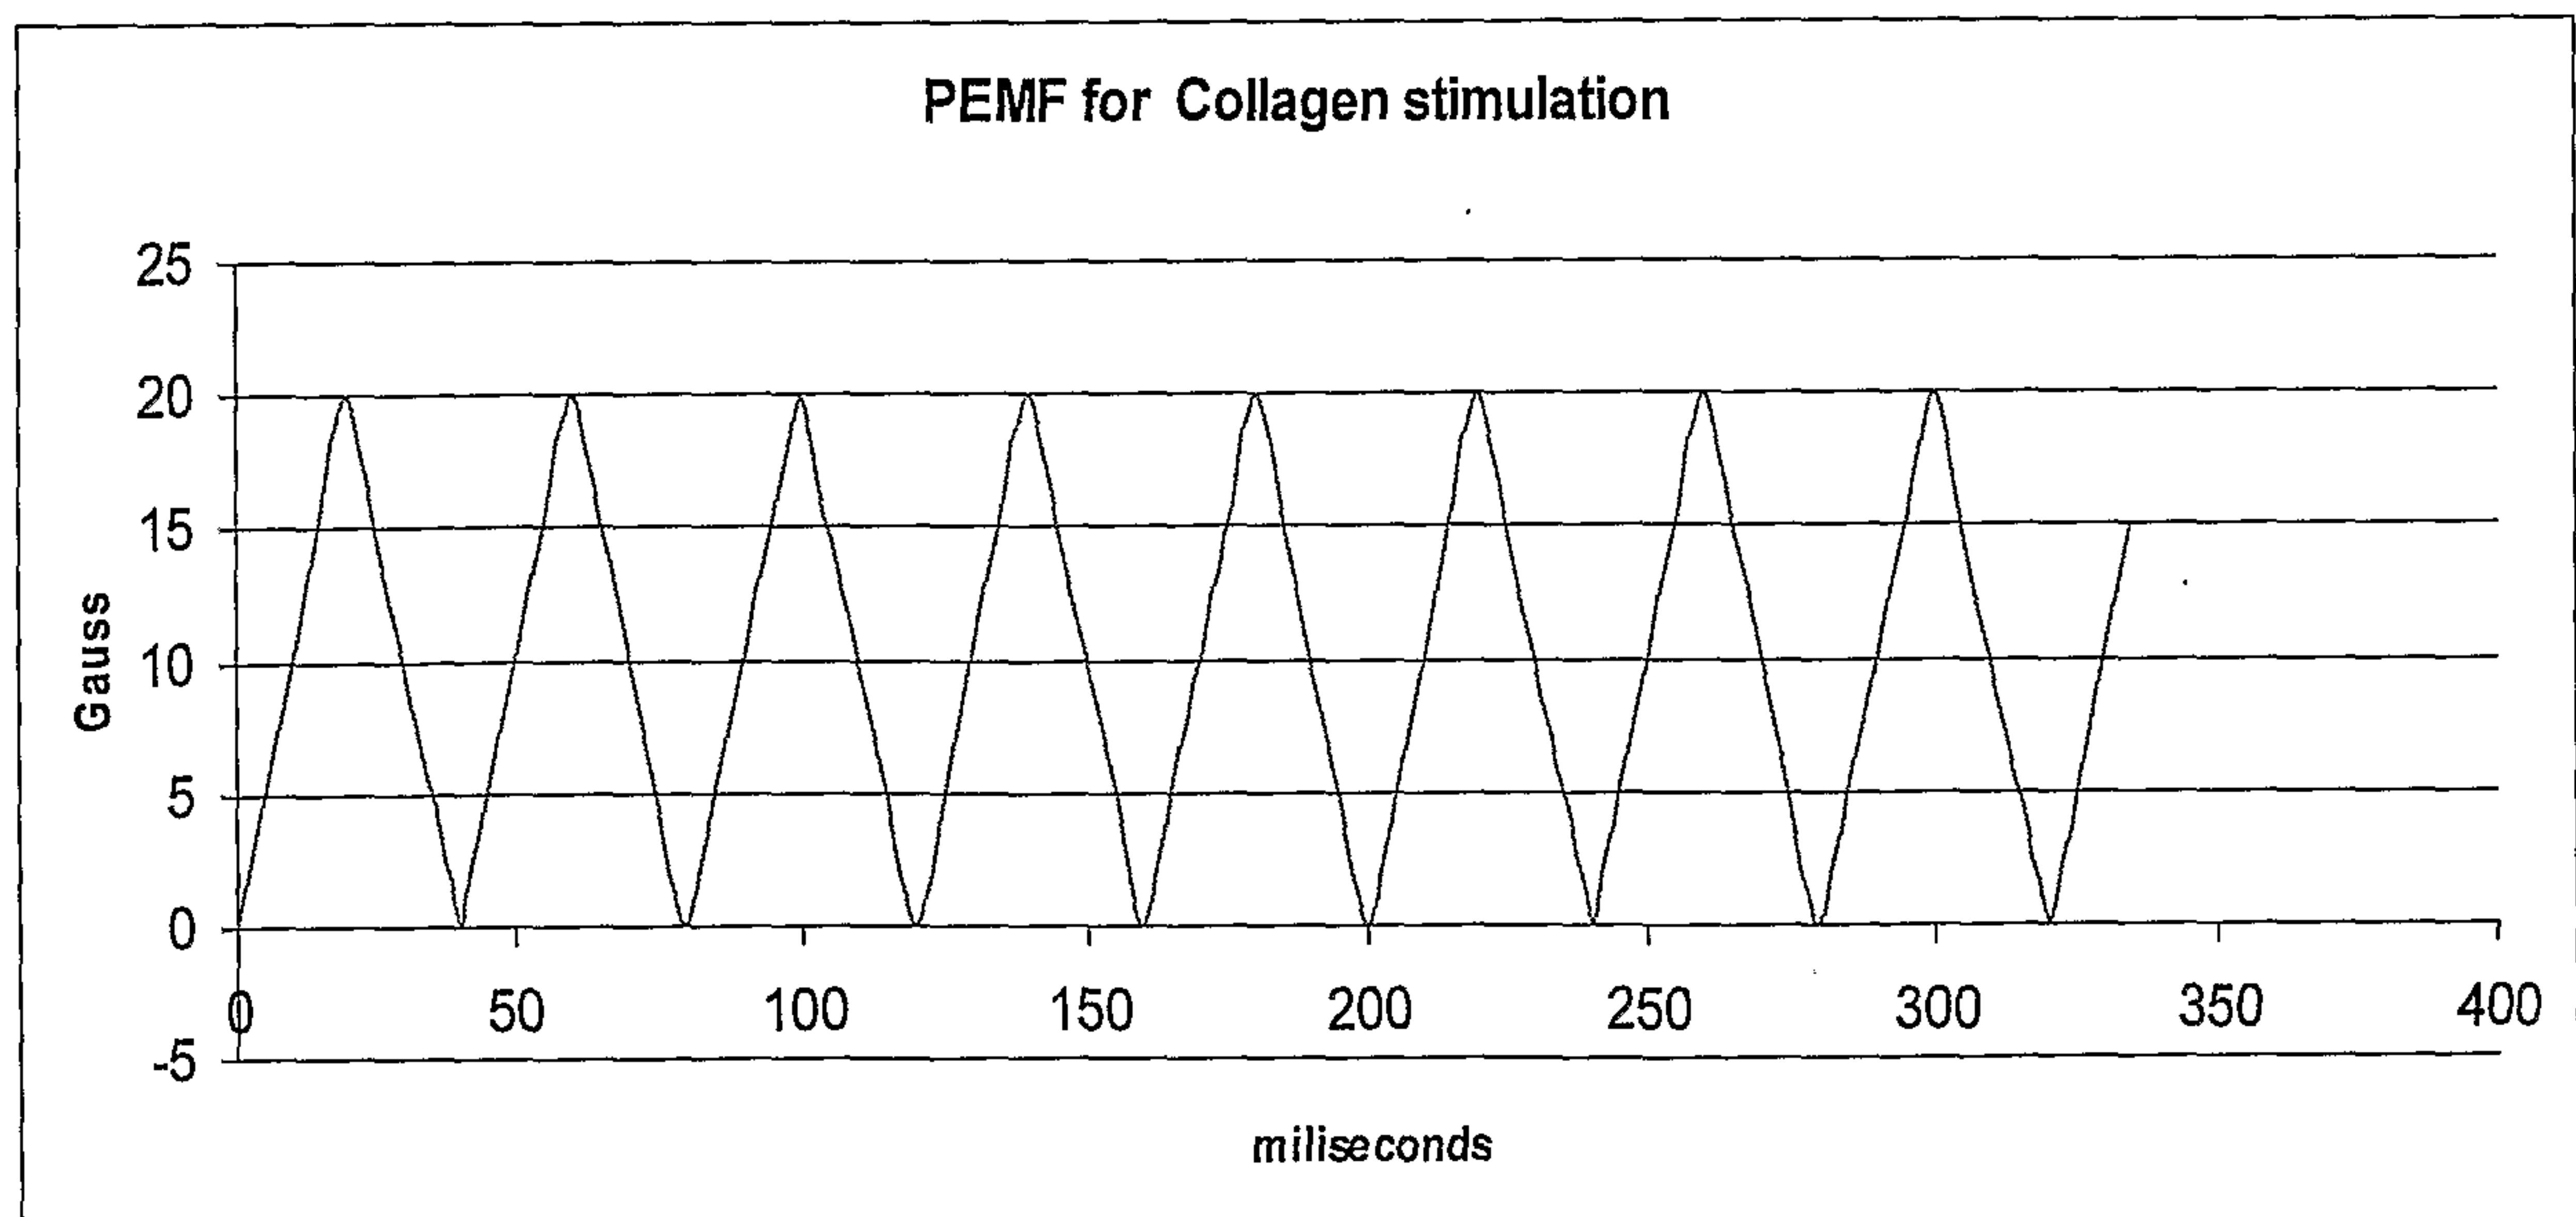


FIG. 4

7/17

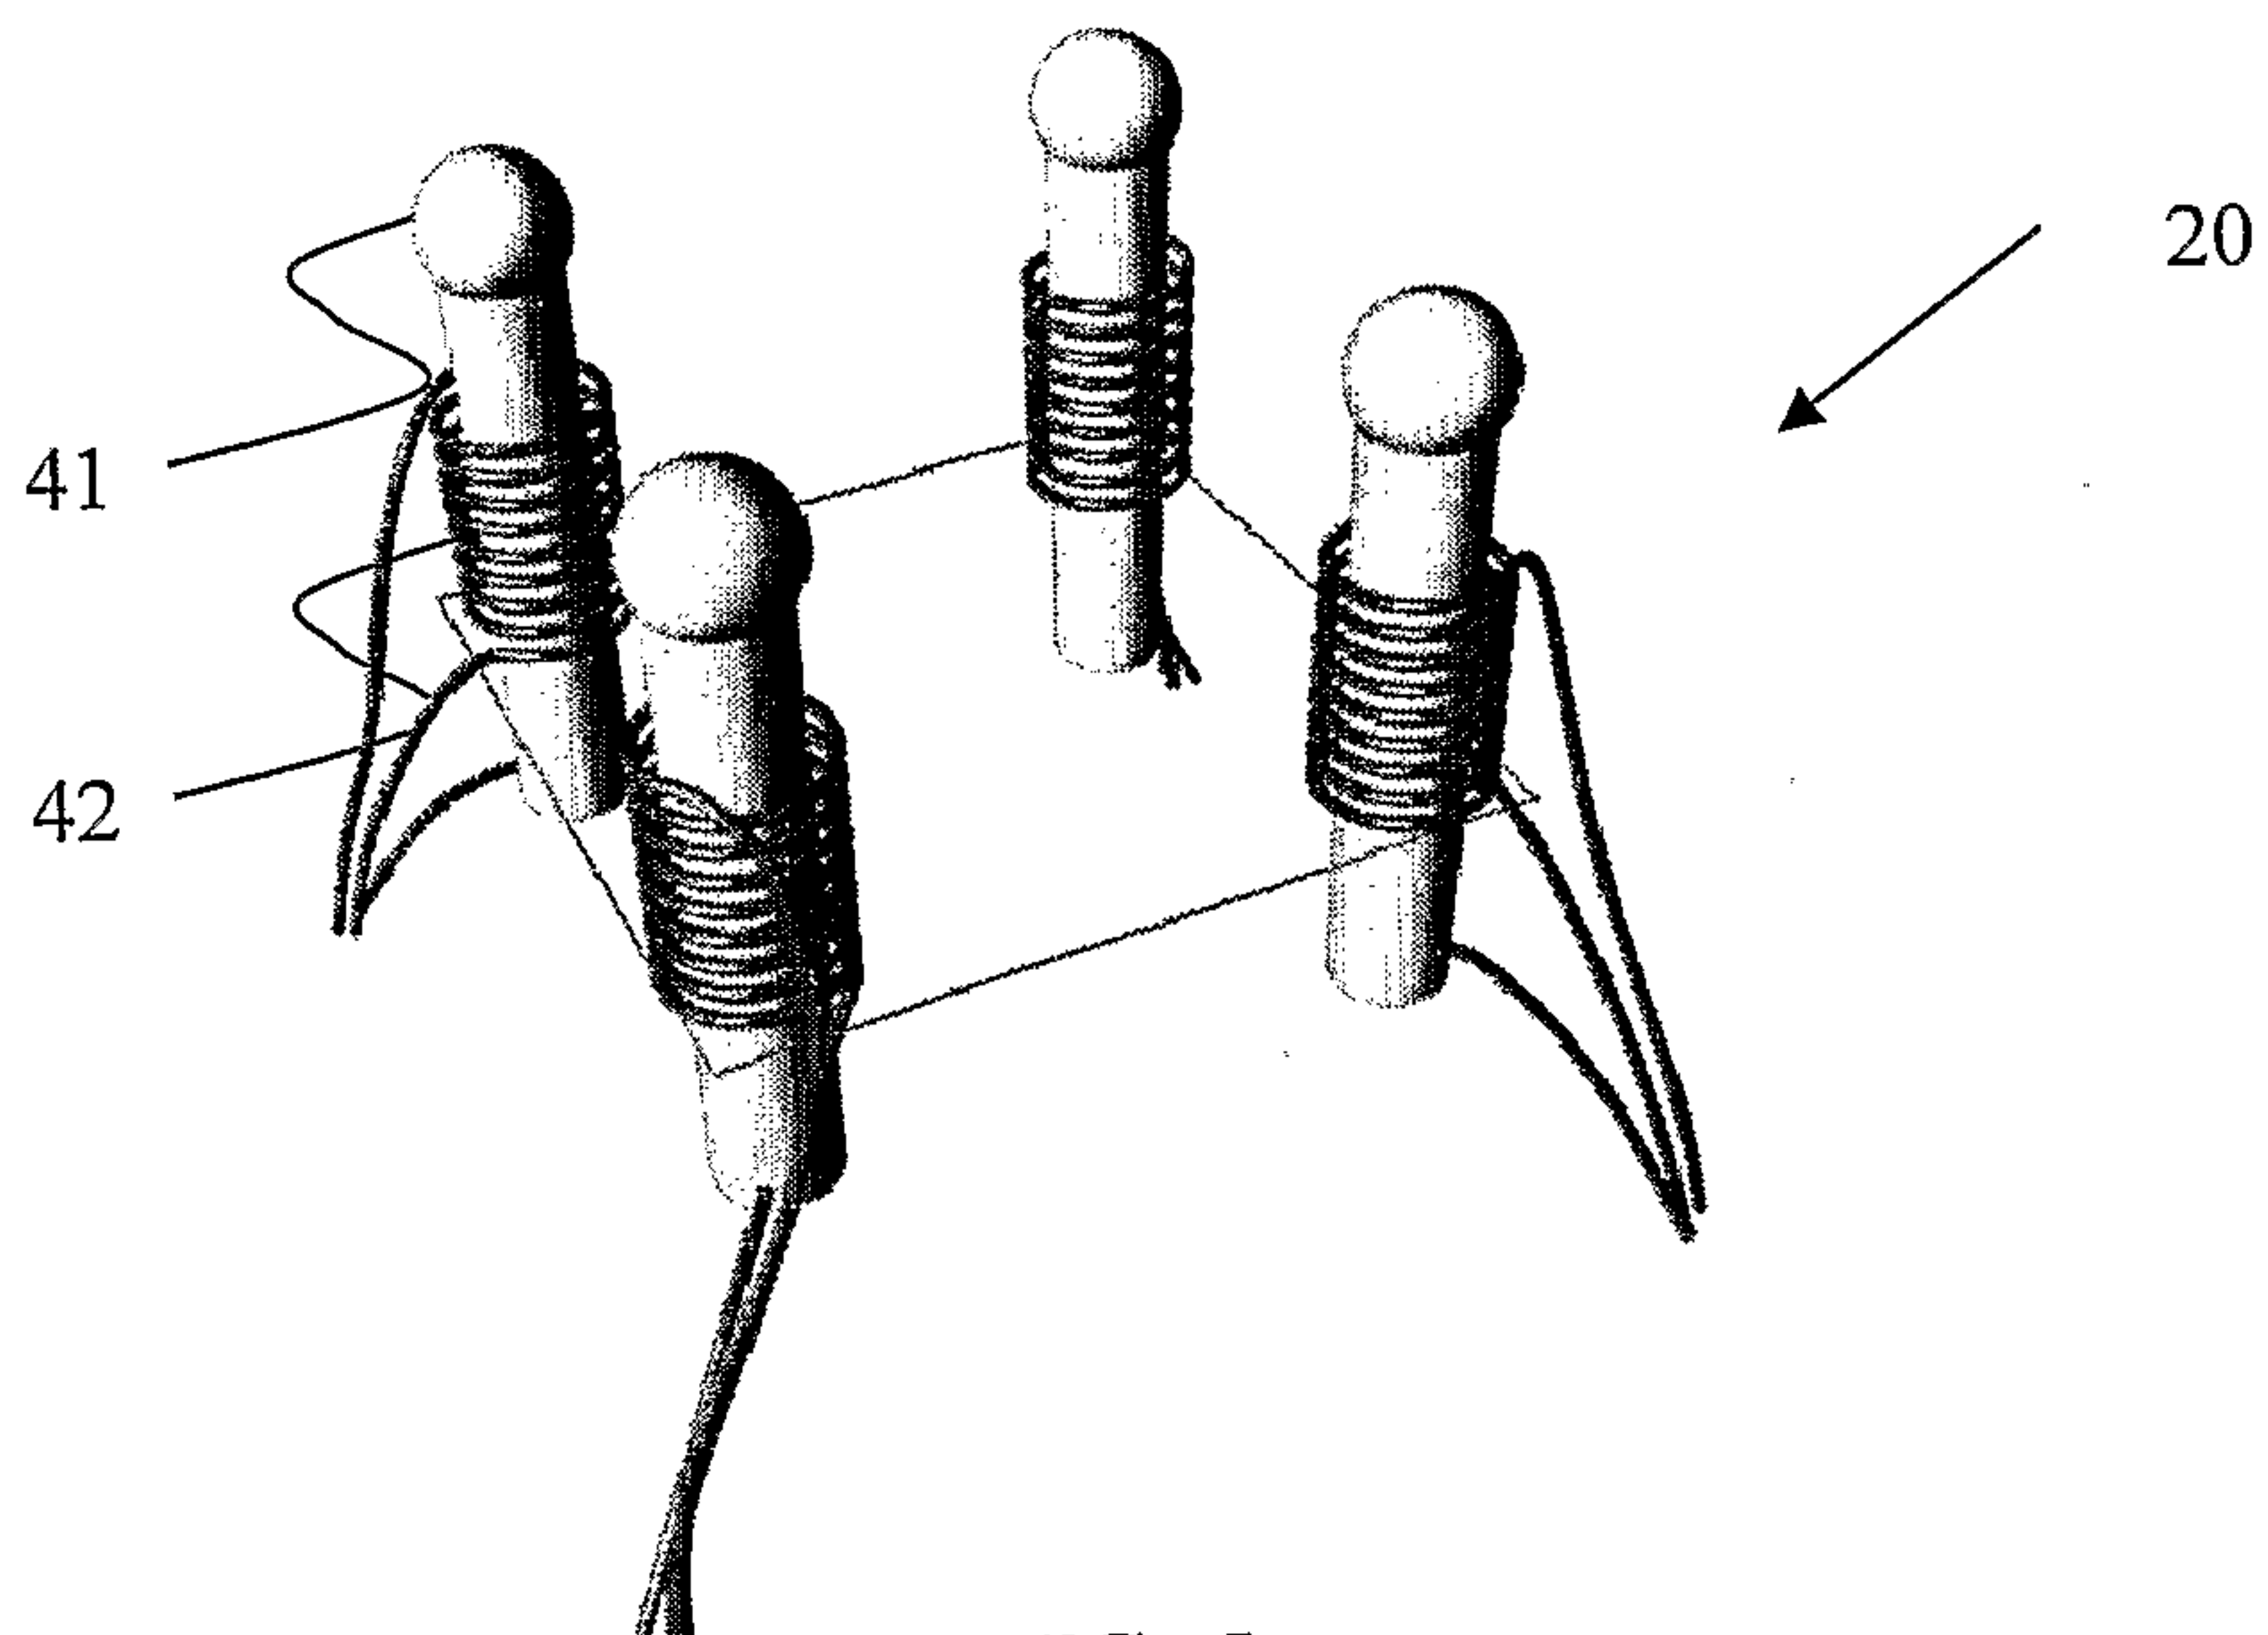


FIG. 5

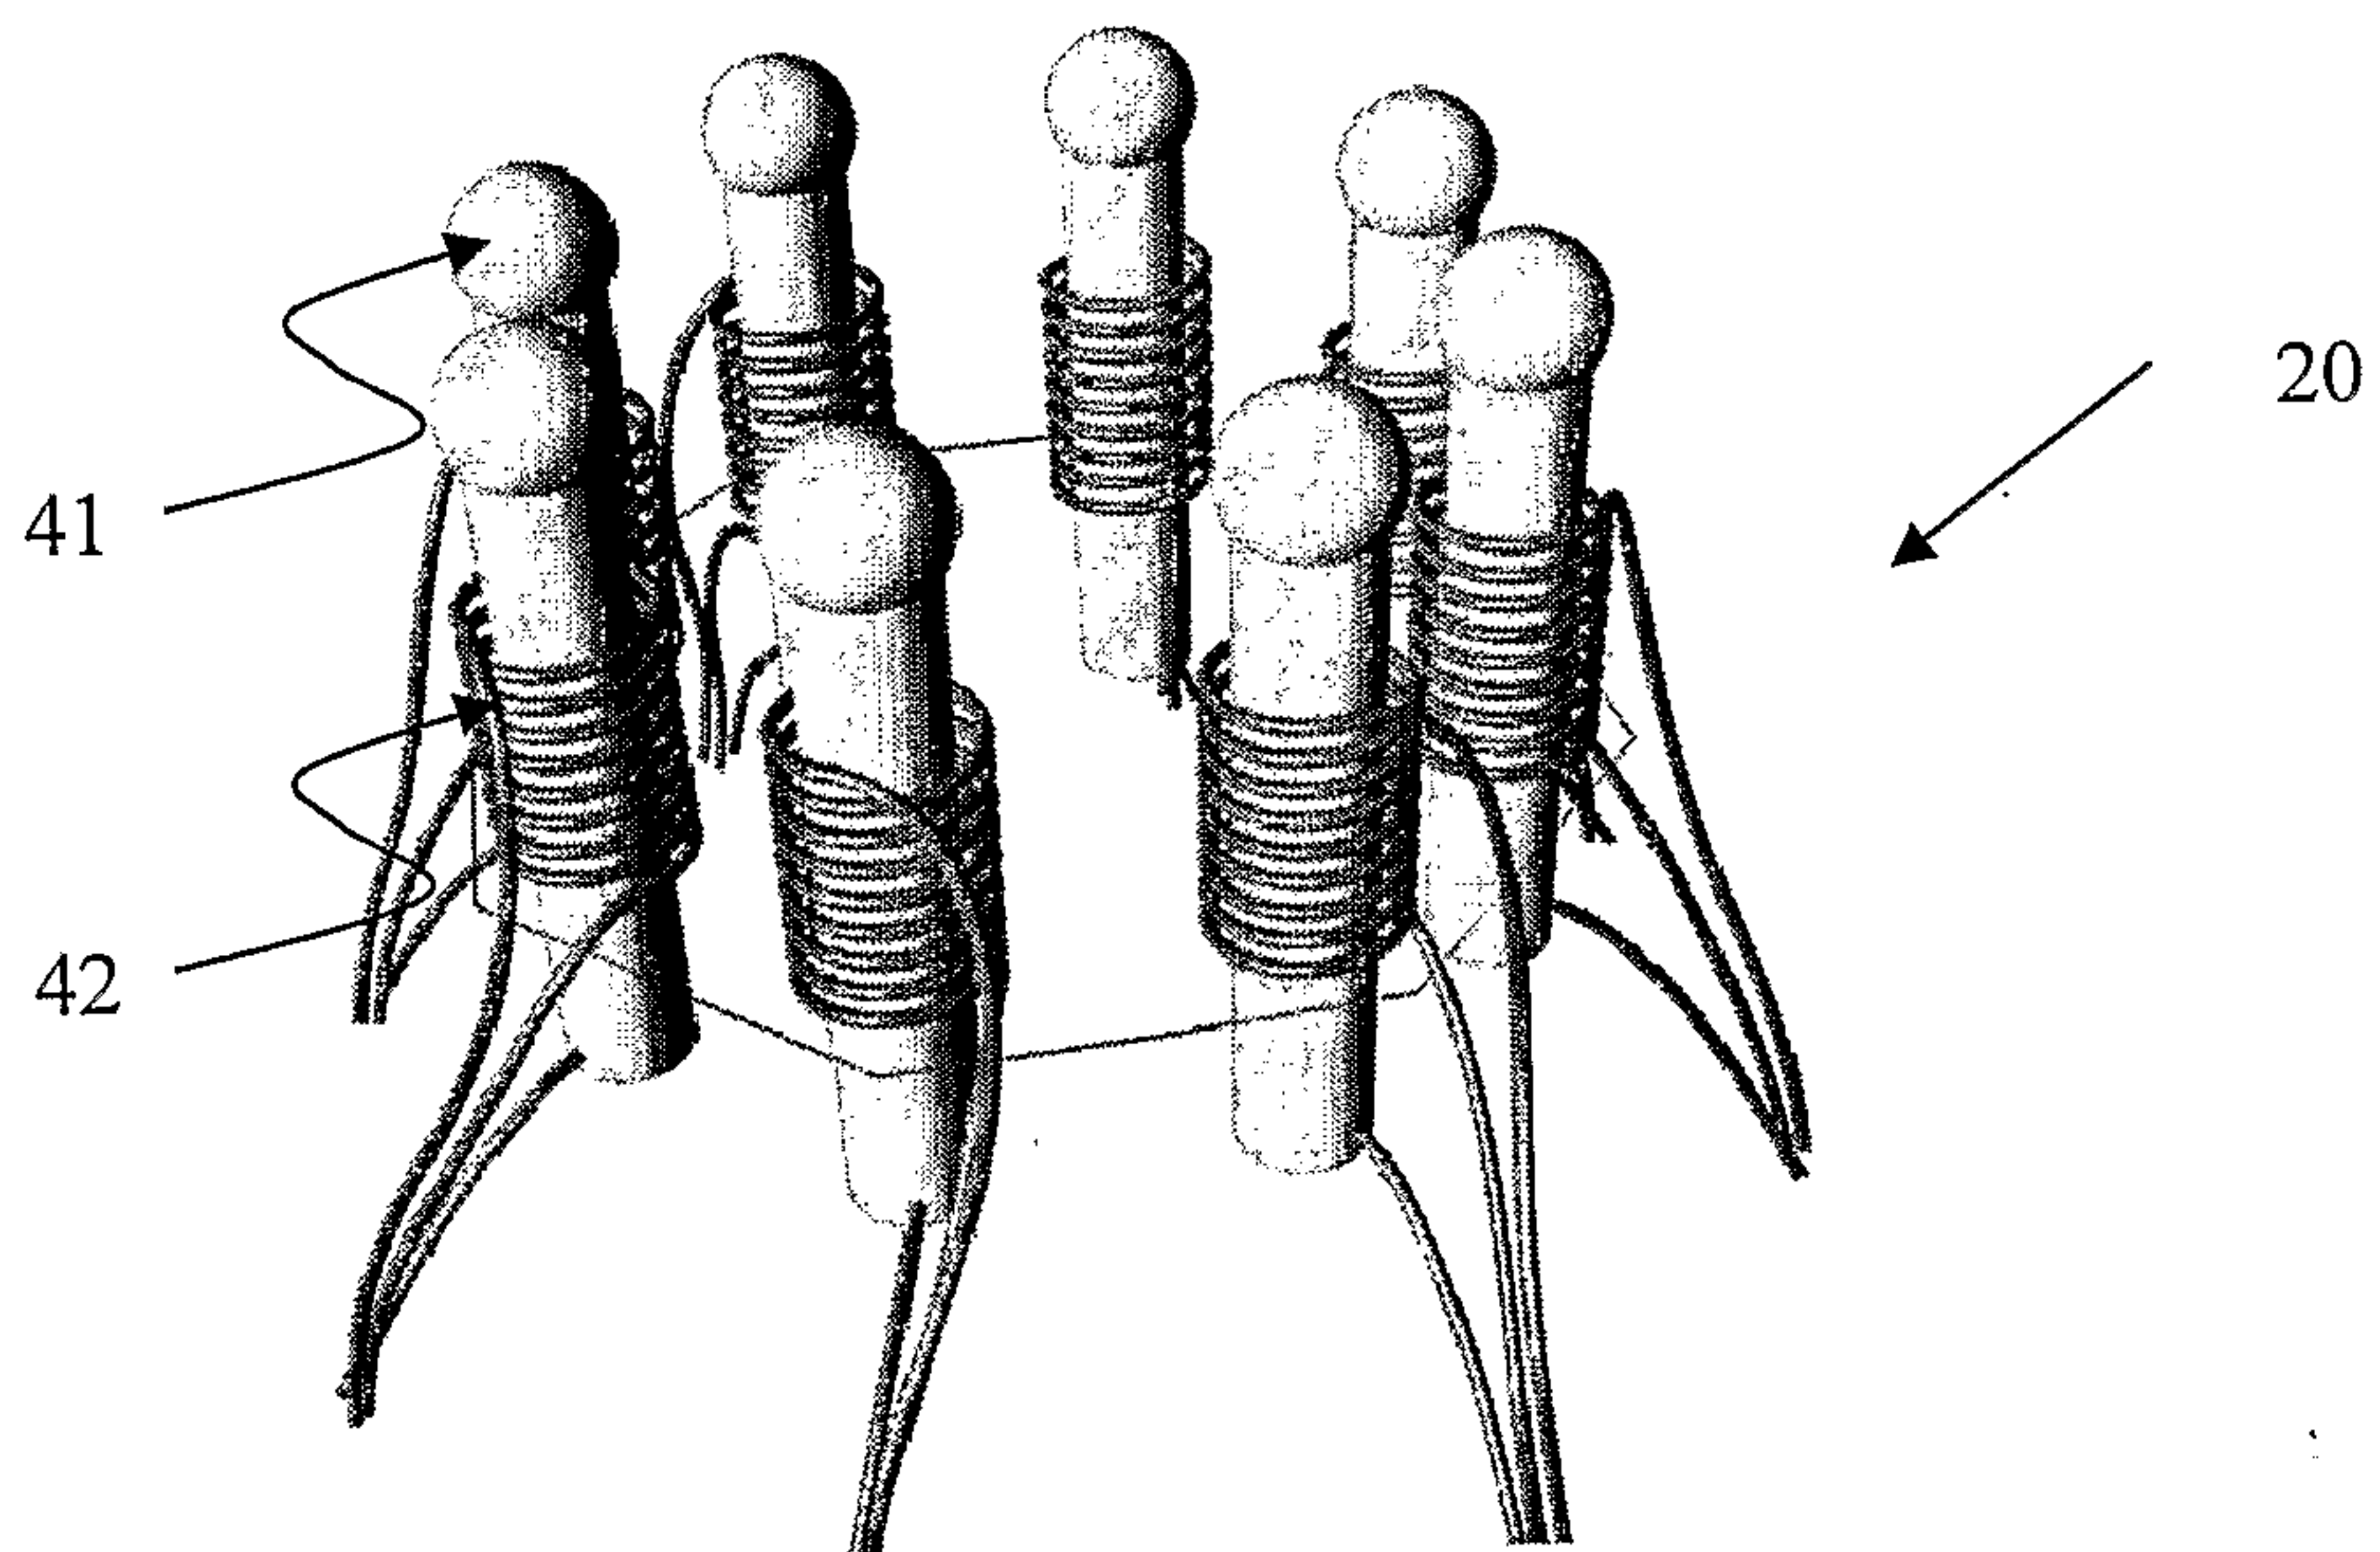


FIG. 6

8/17

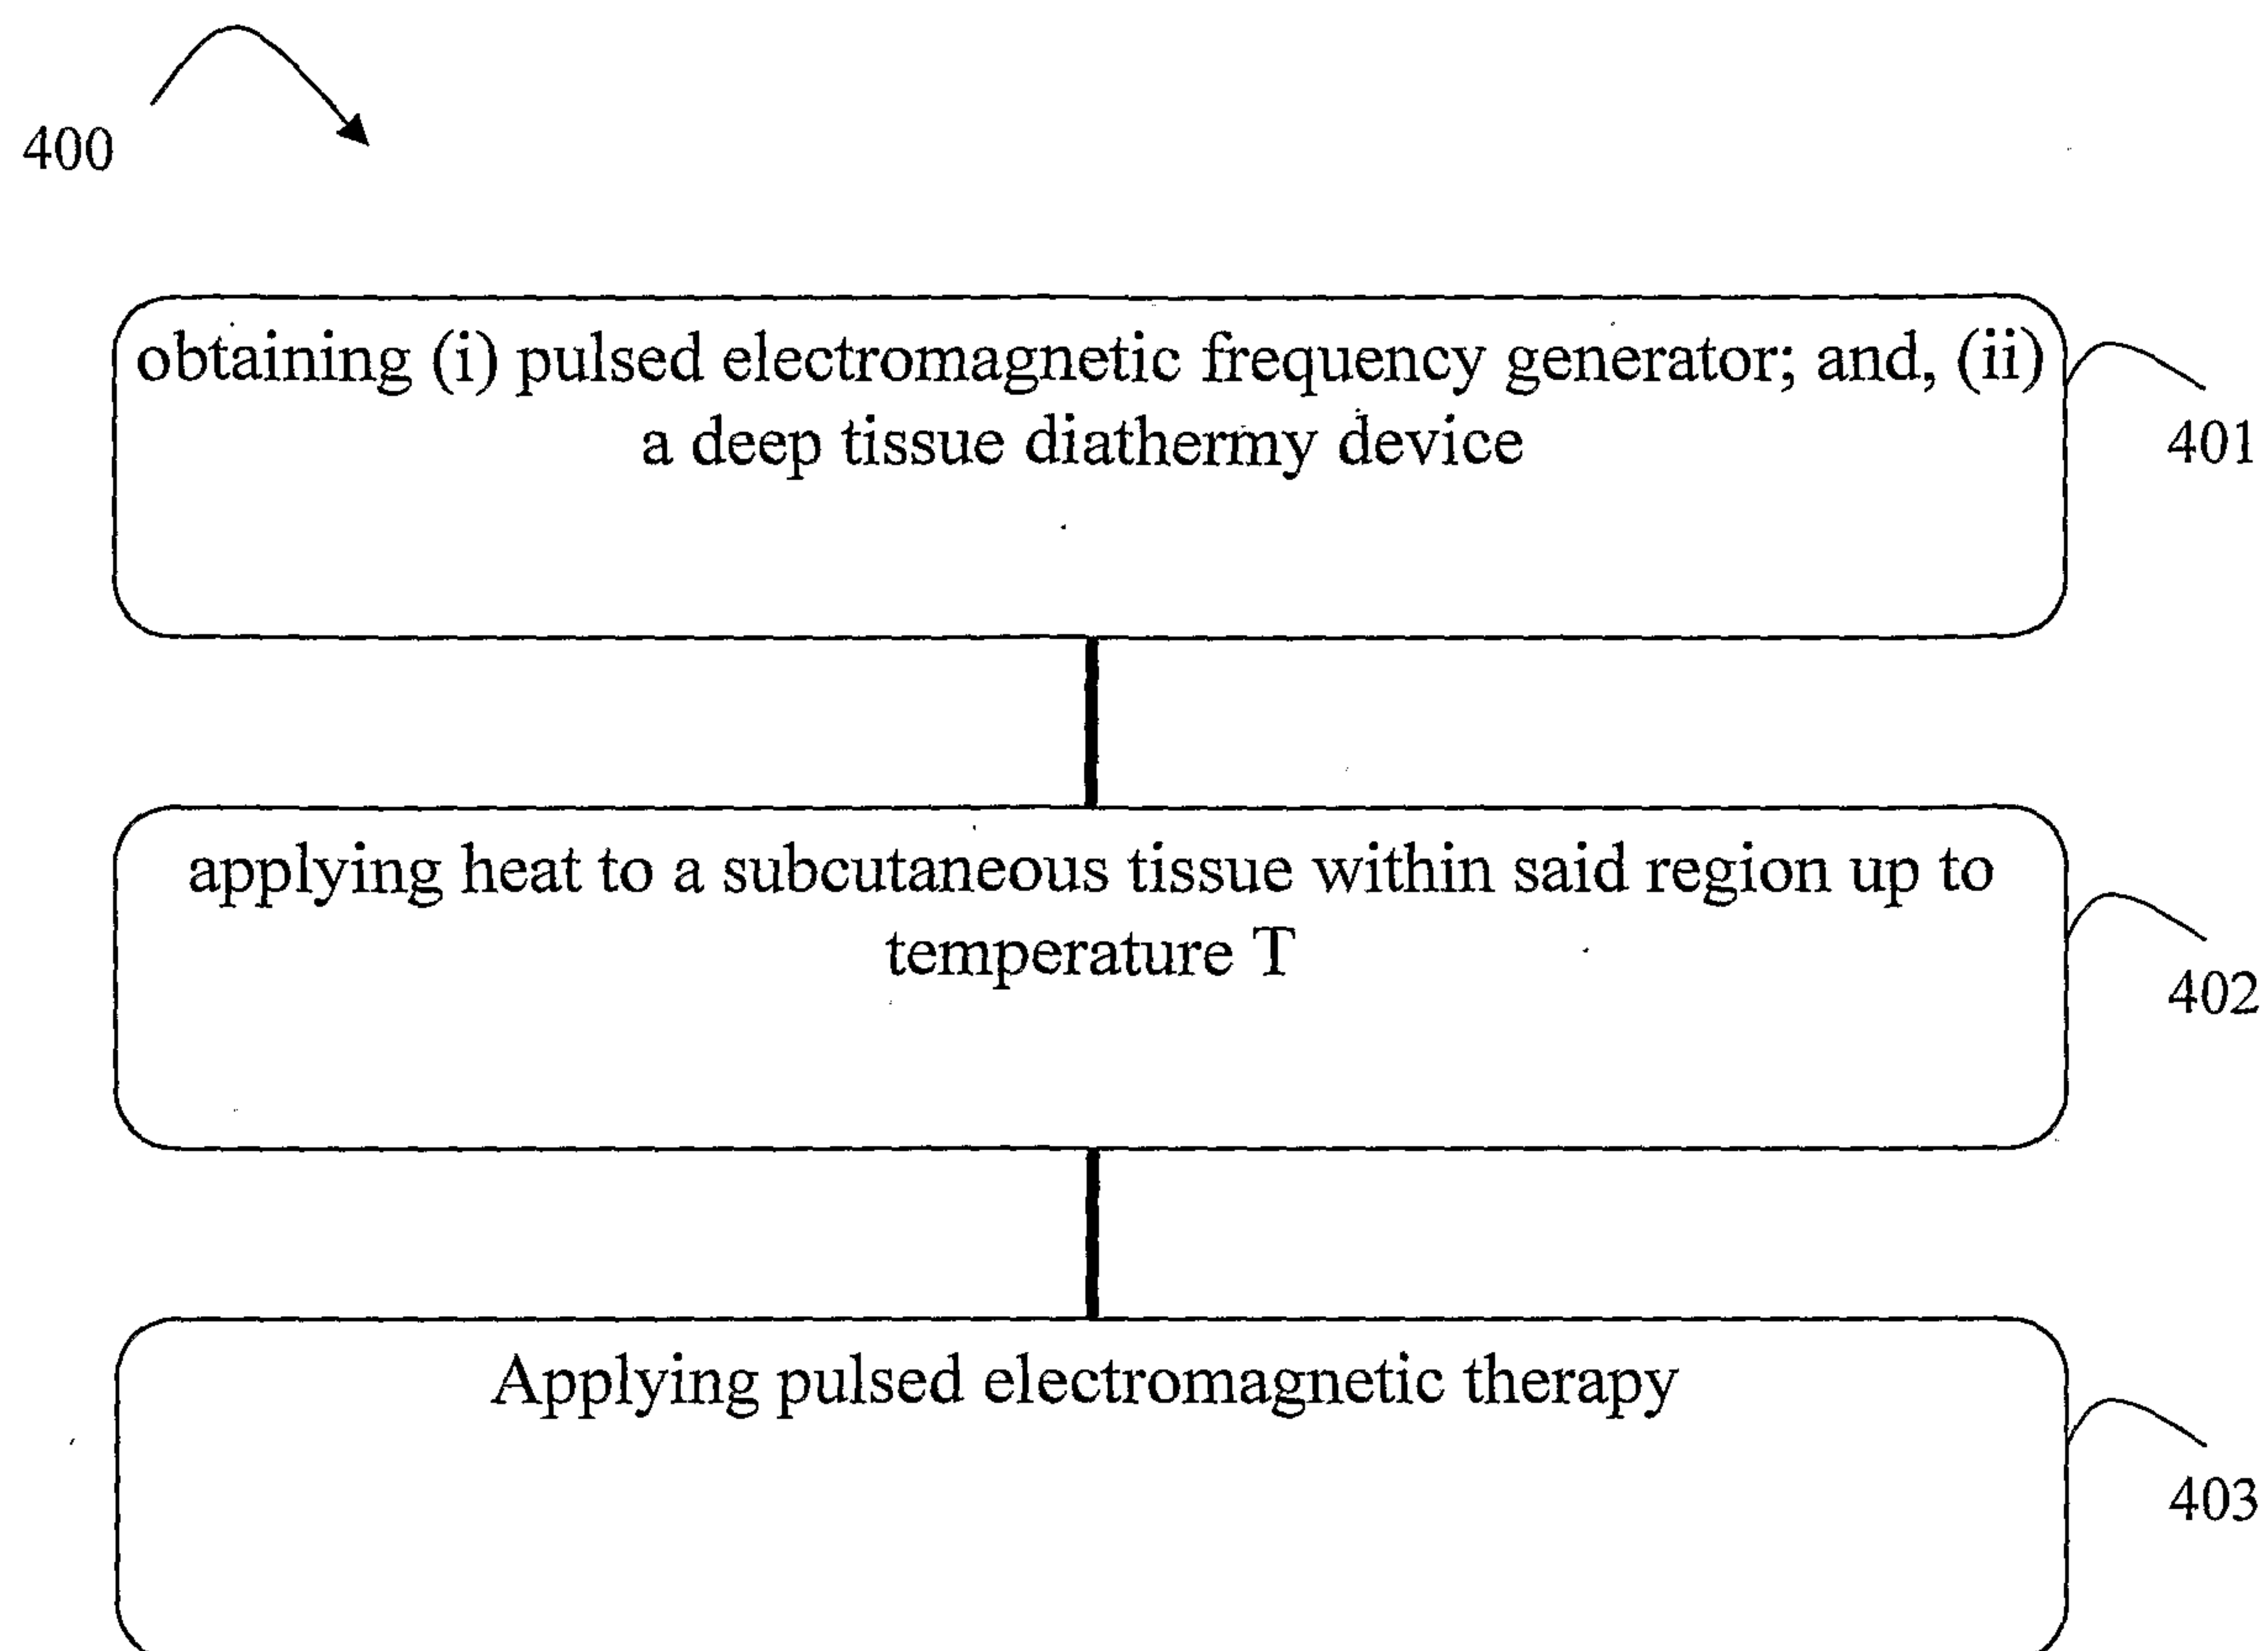


FIG. 7

9/17

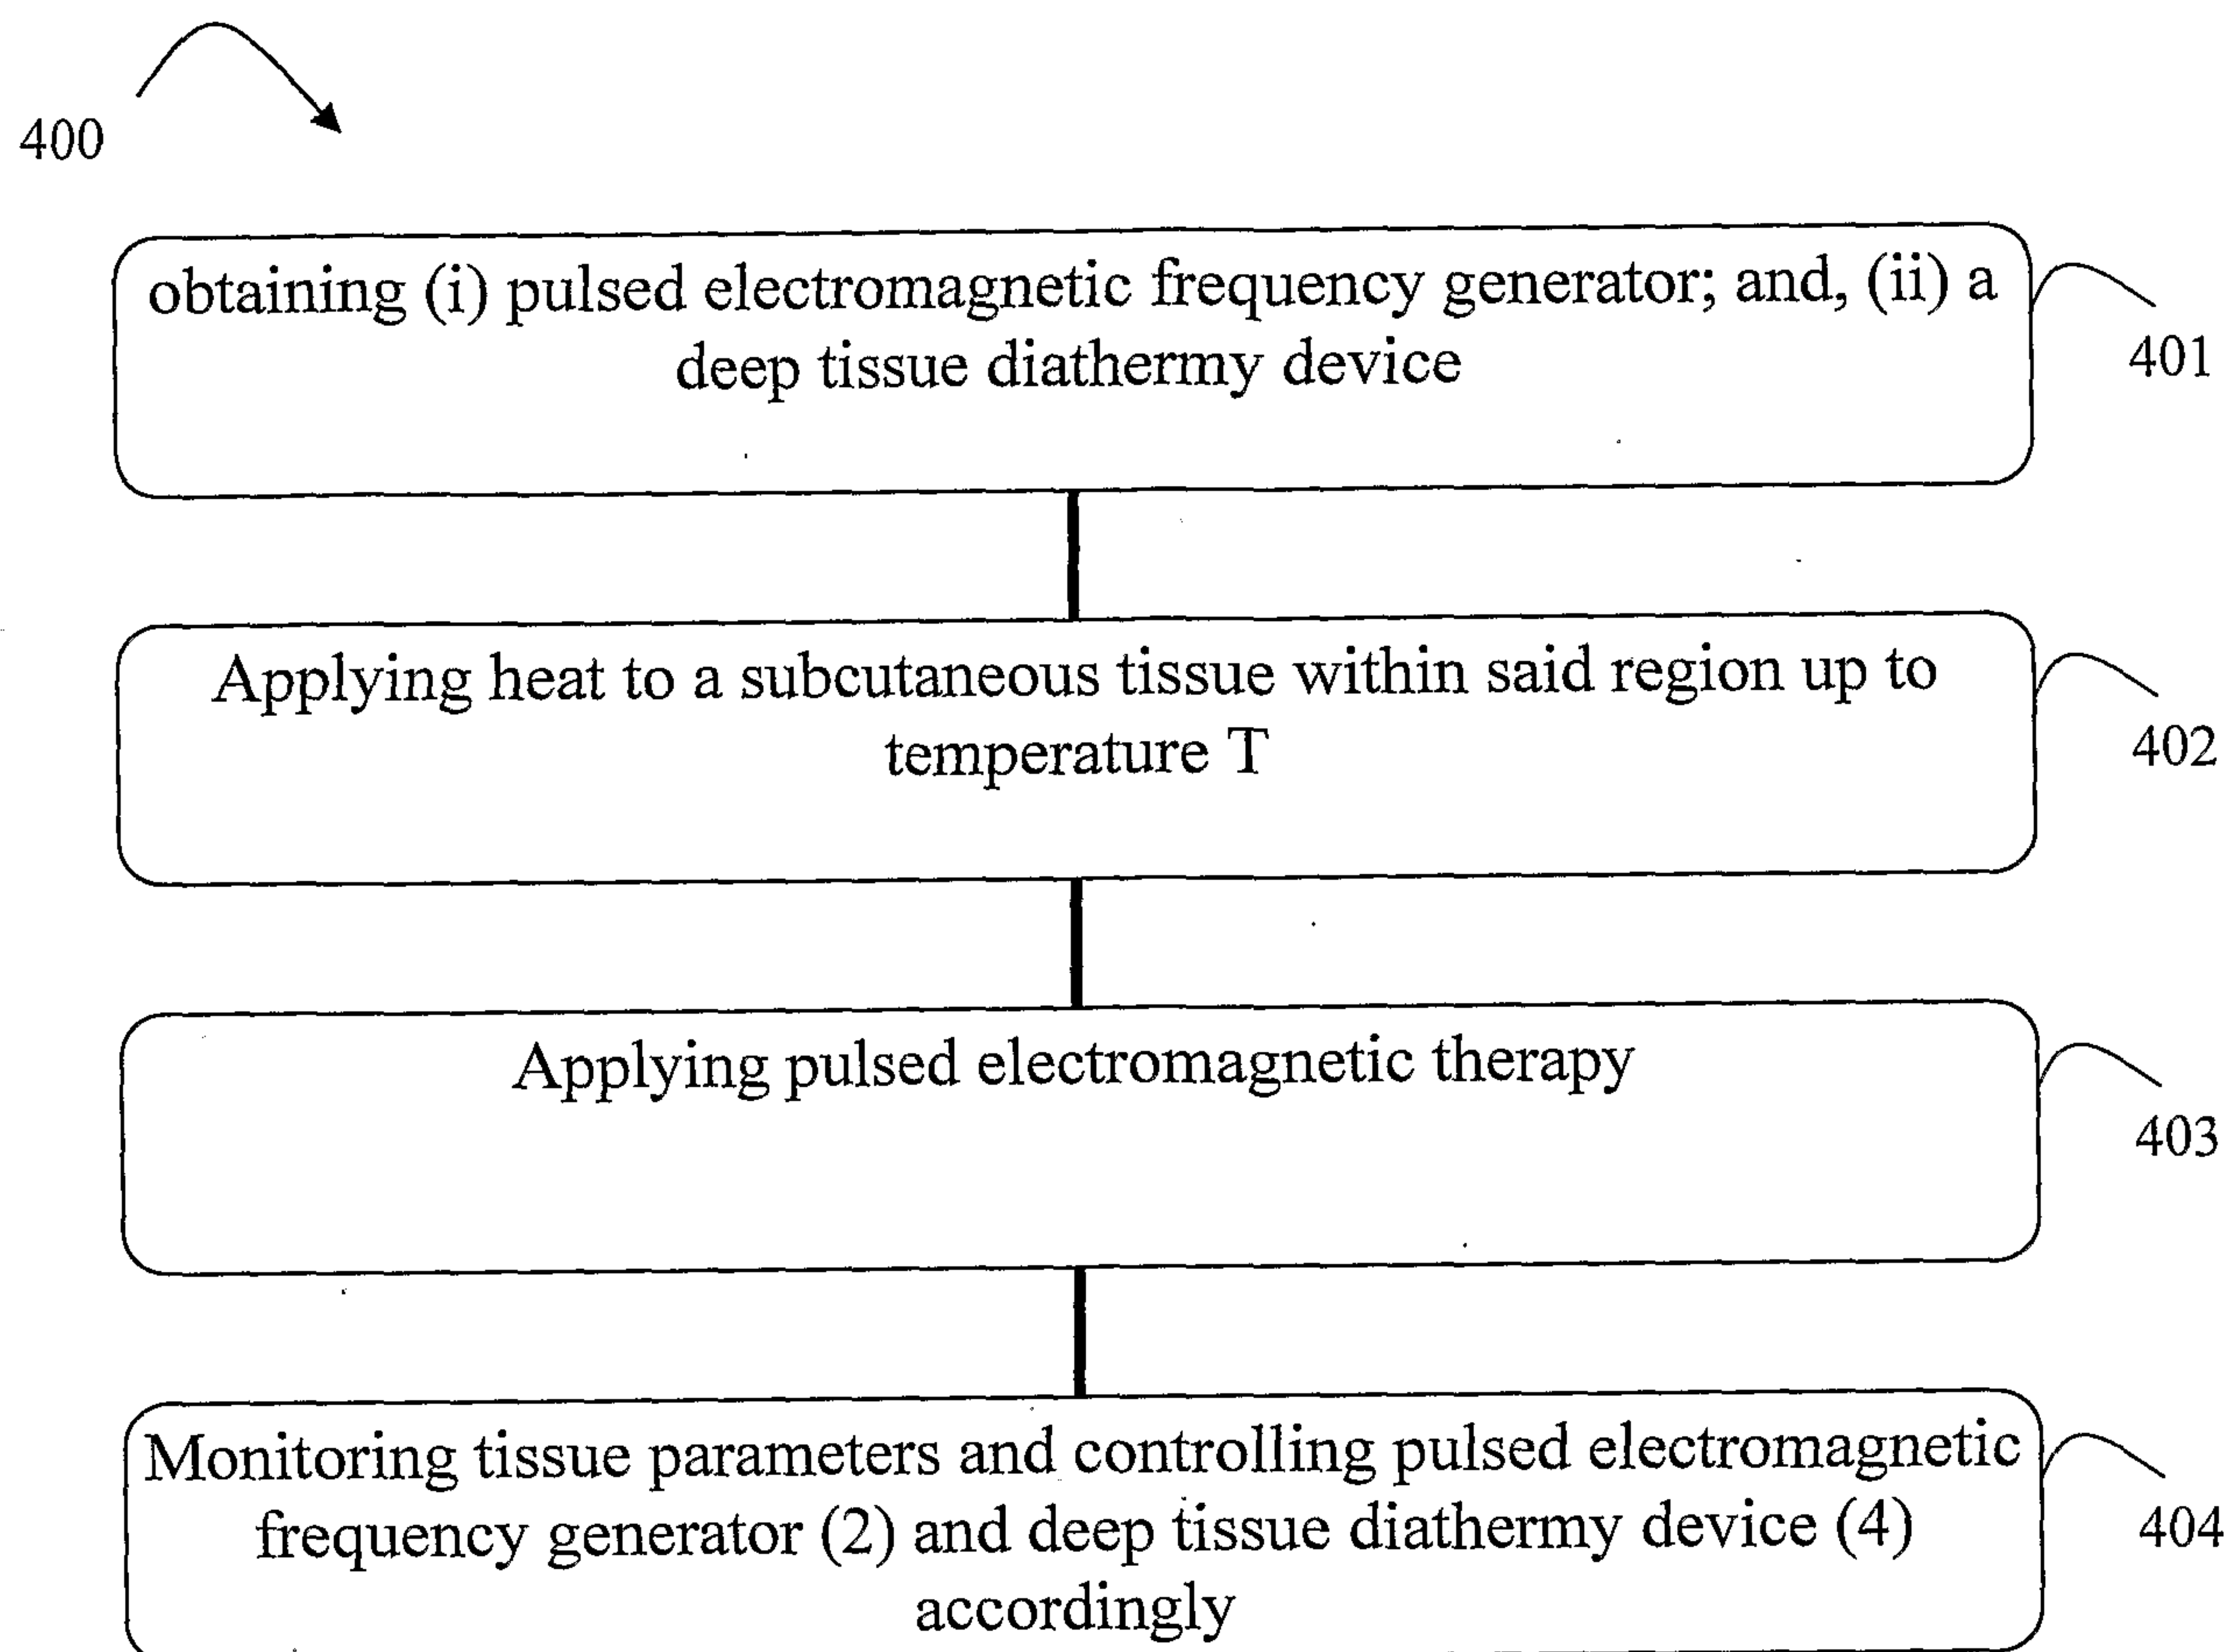


FIG. 8

10/17

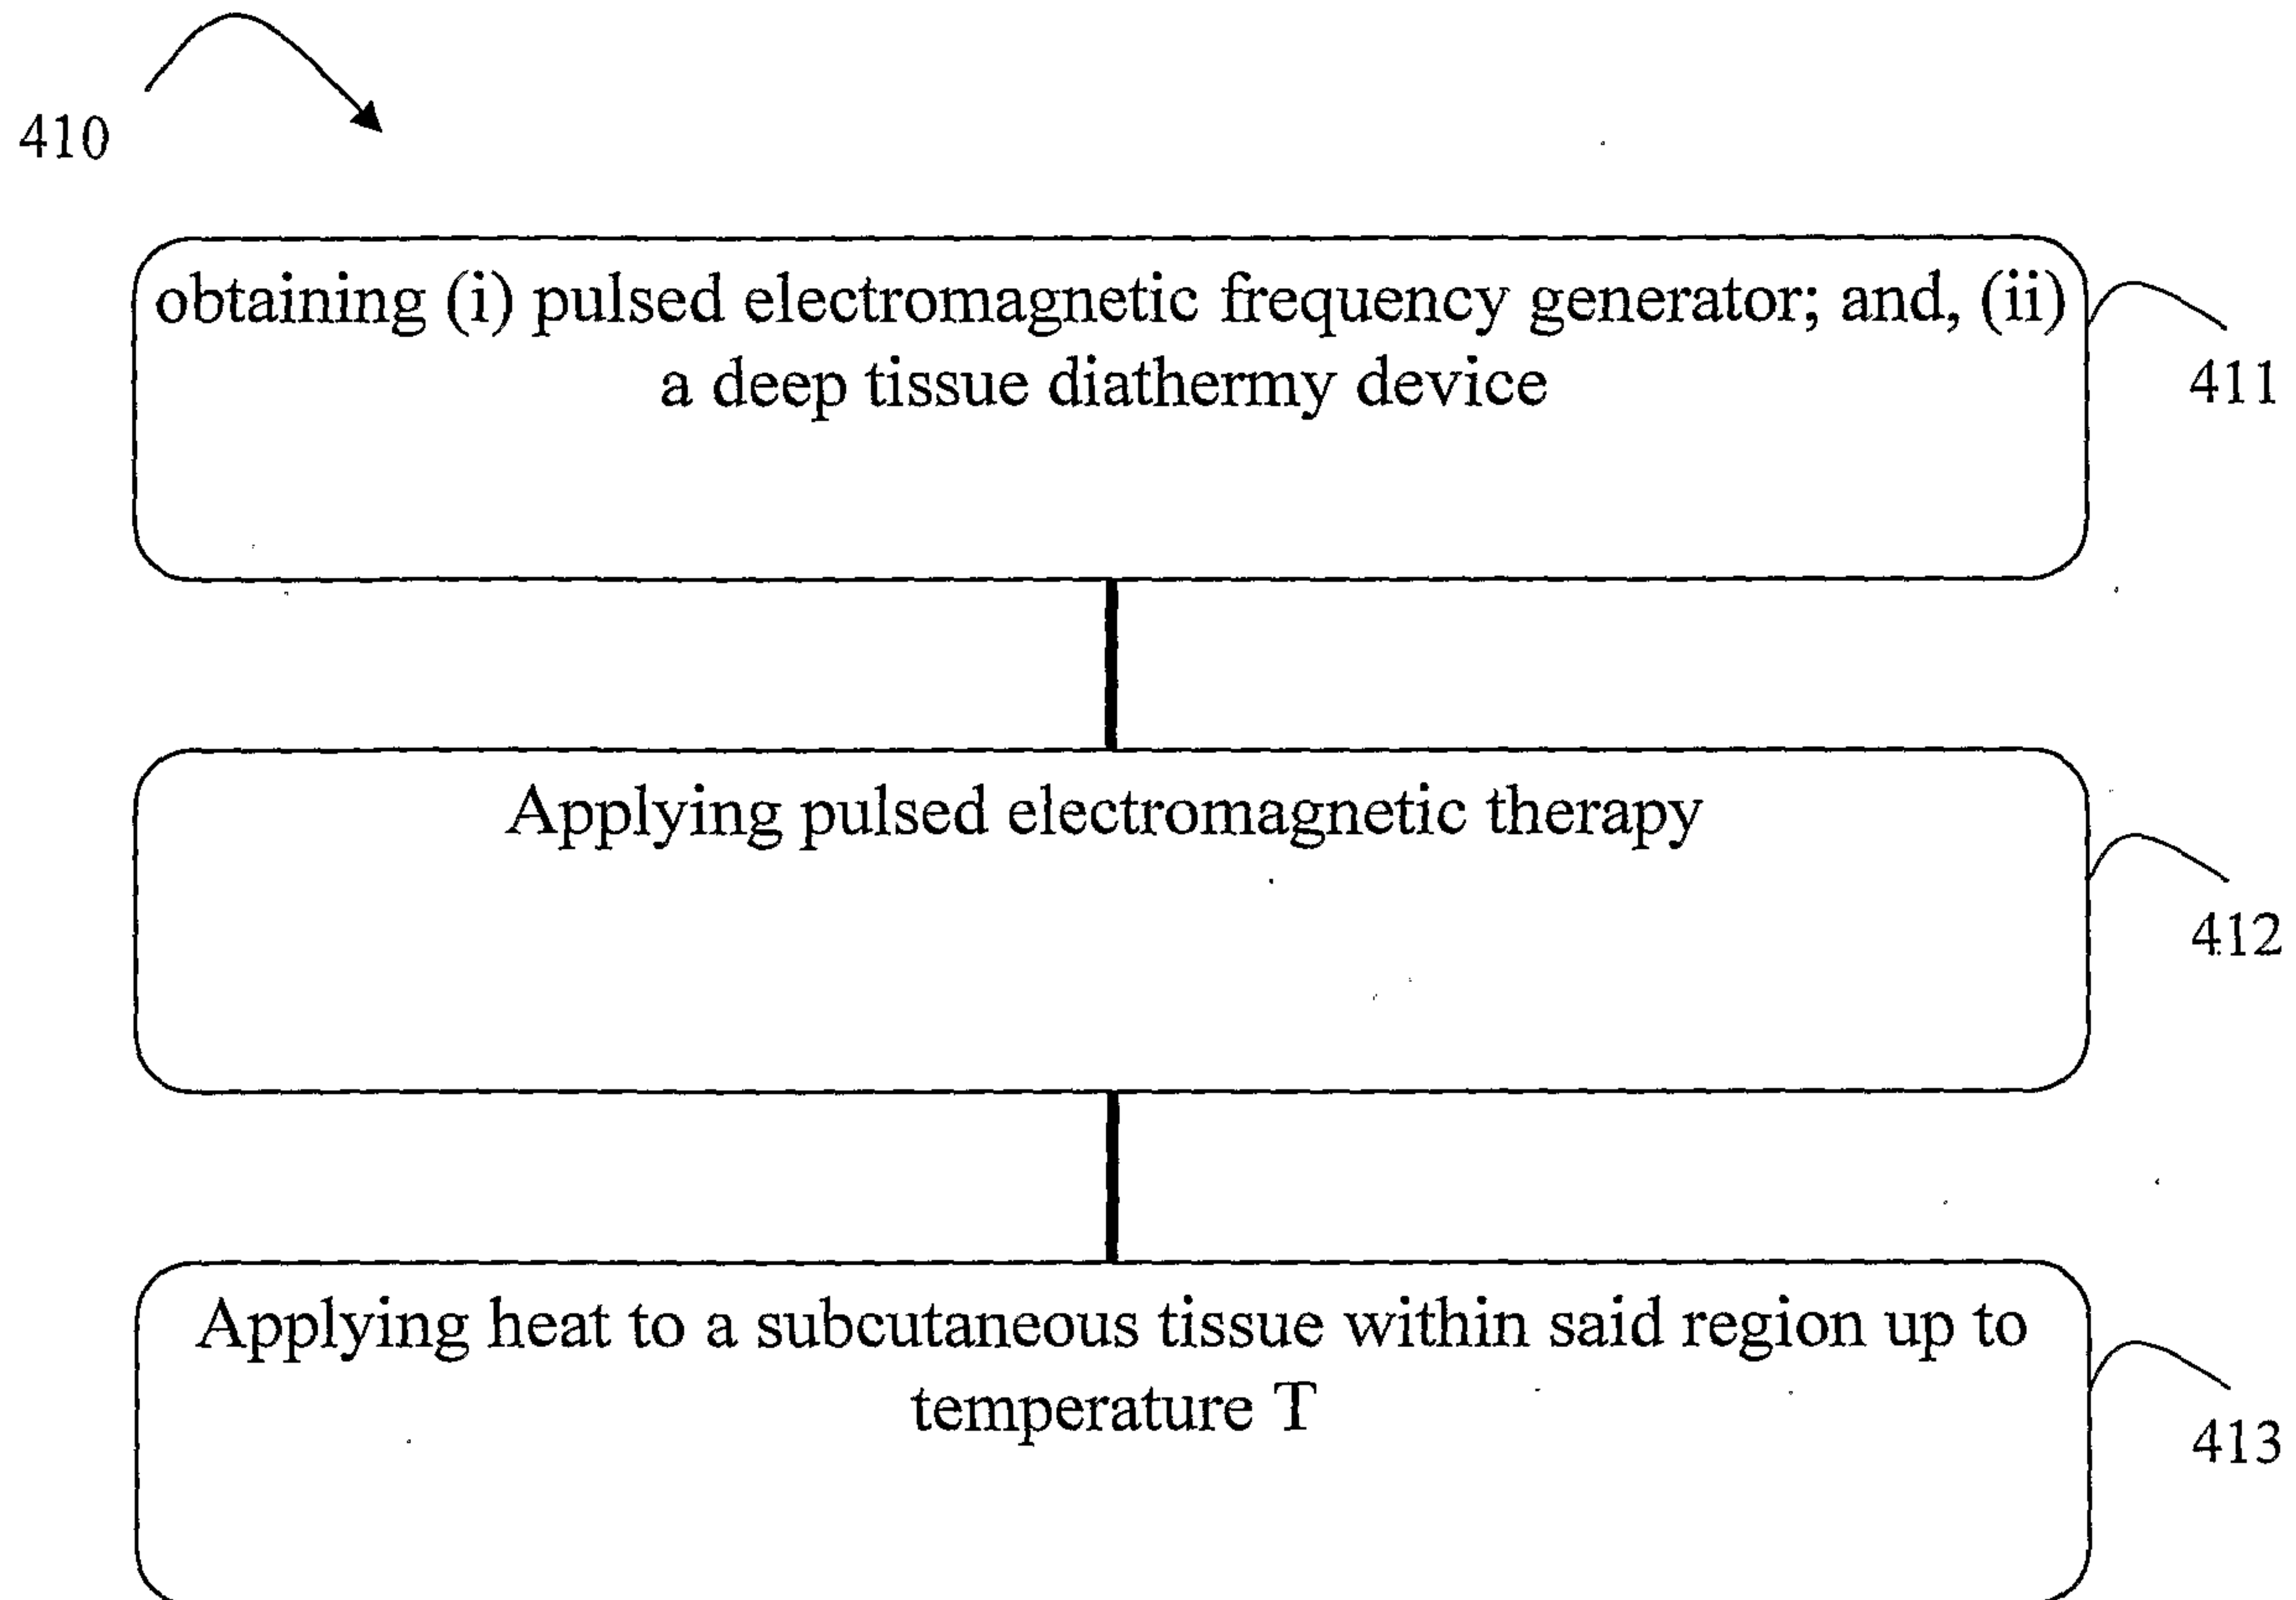


FIG. 9

11/17

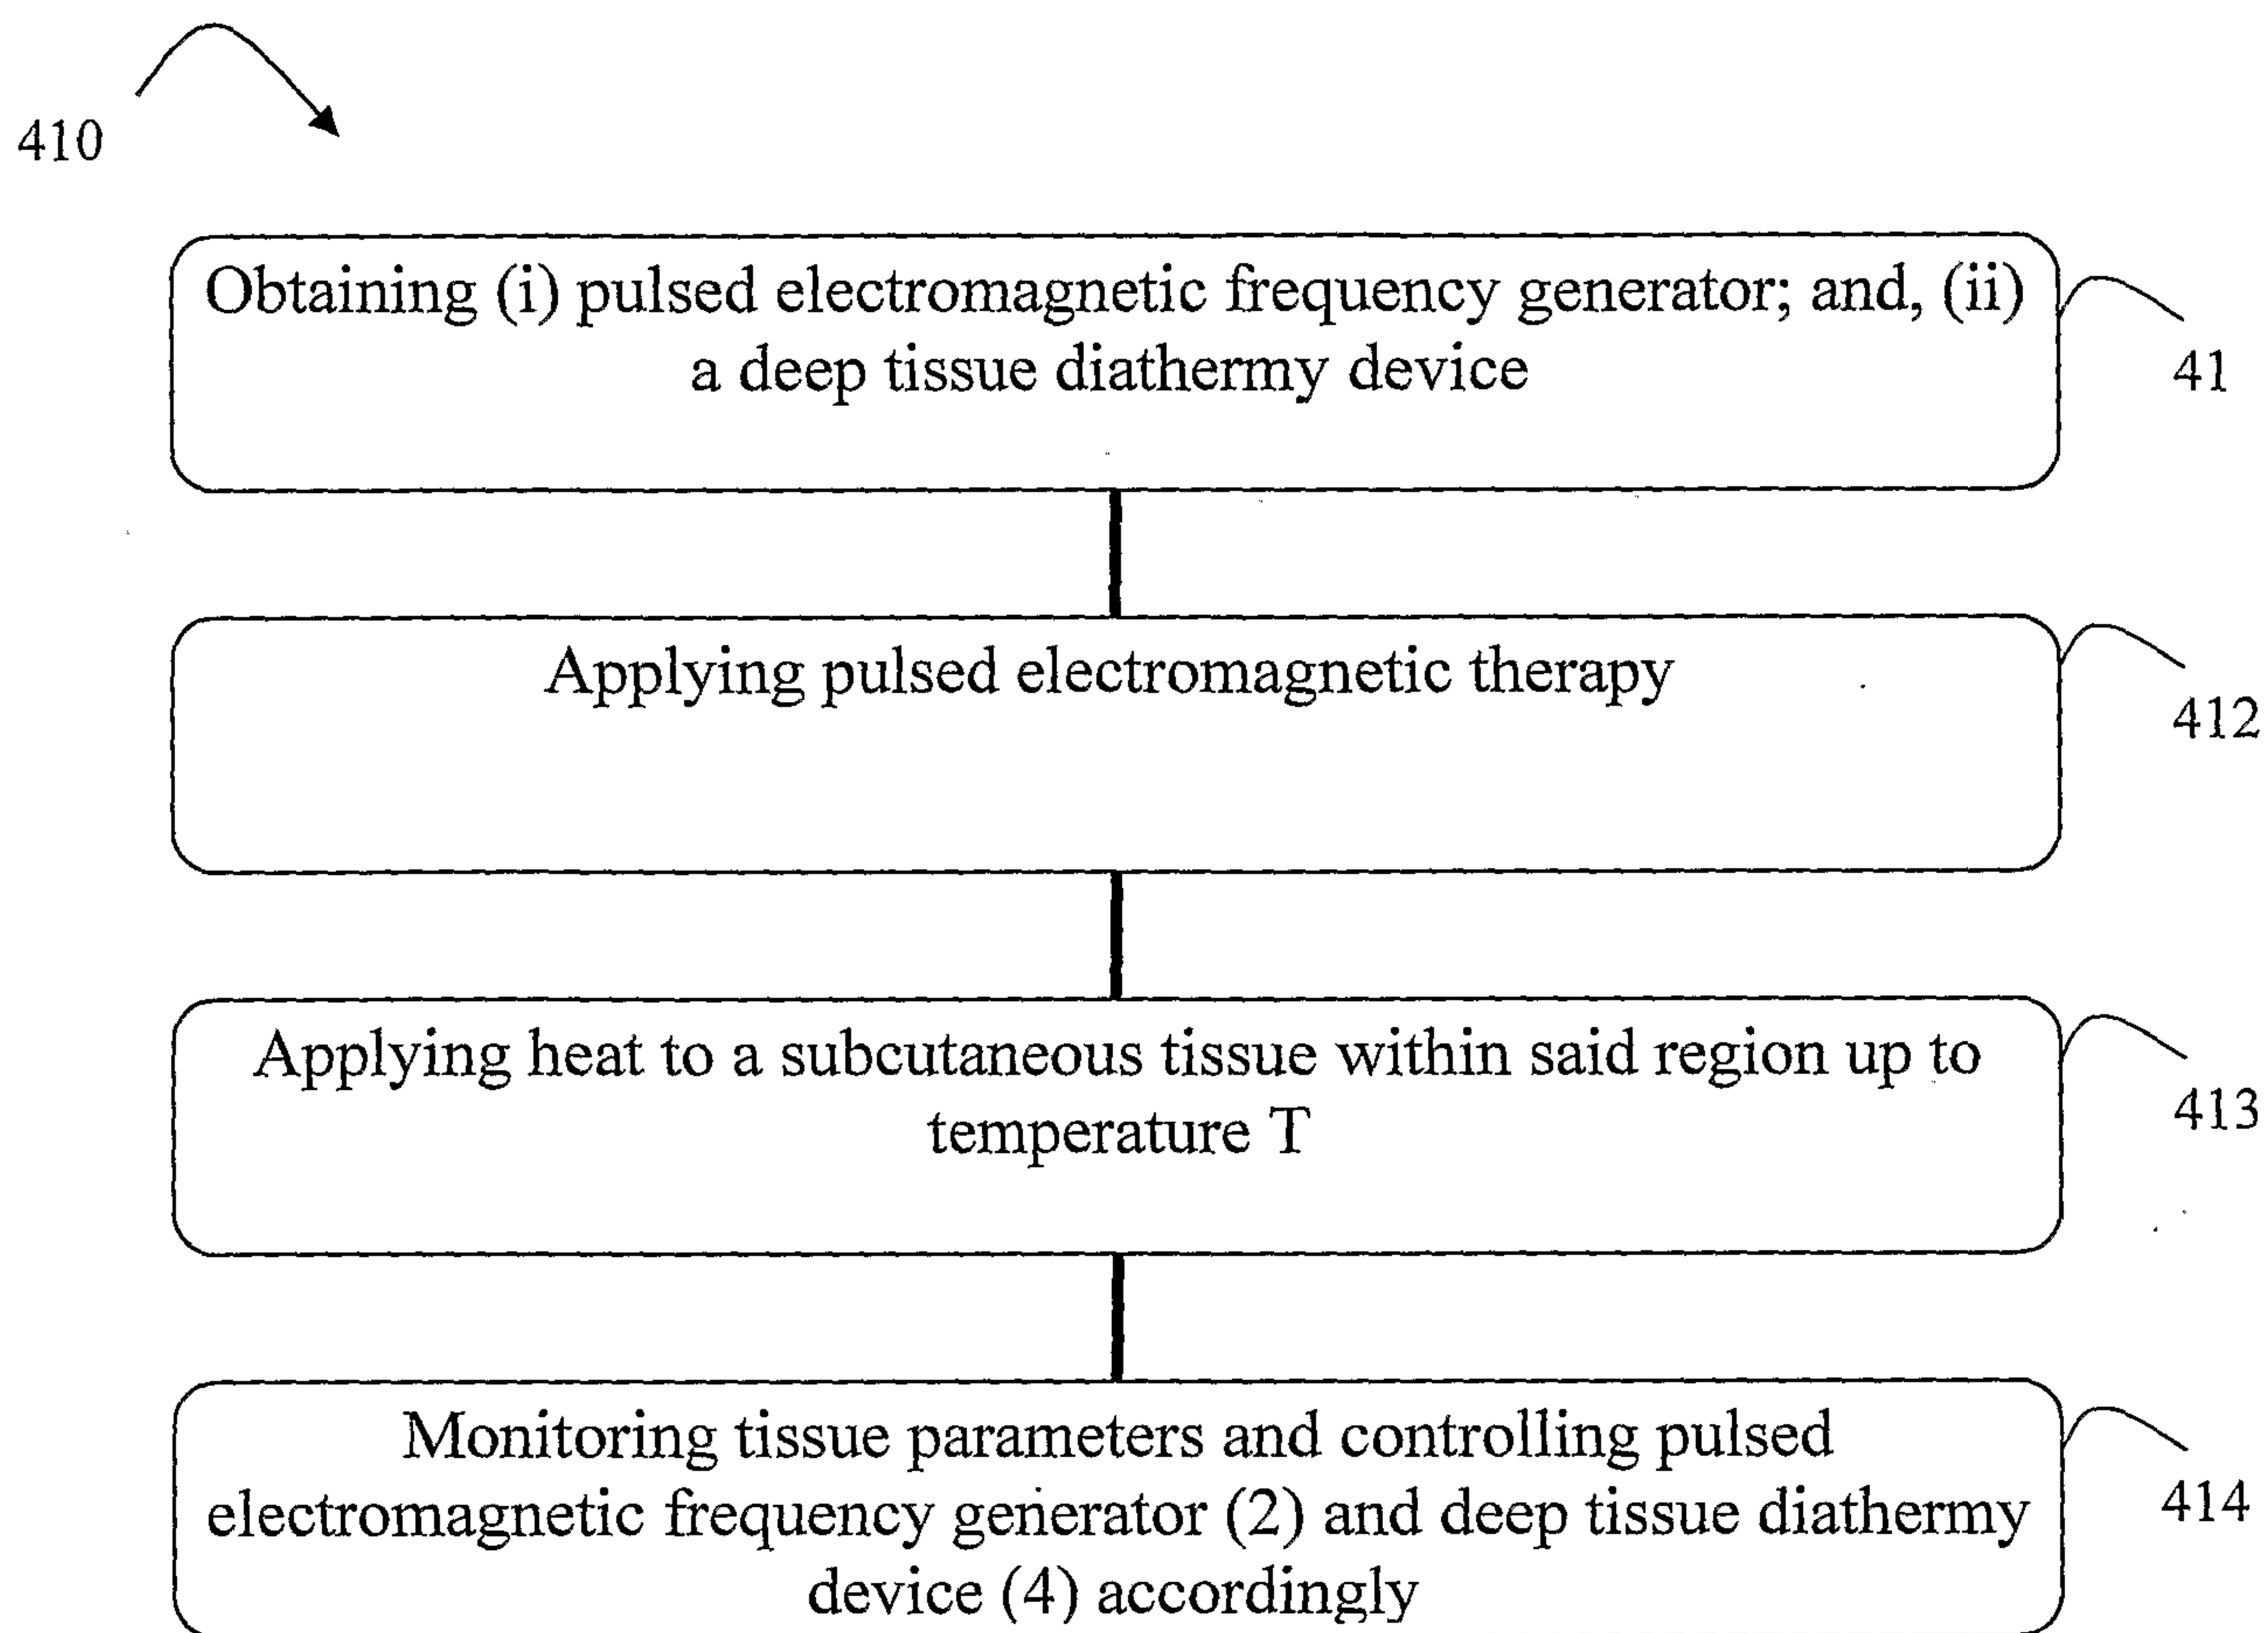


FIG. 10

12/17

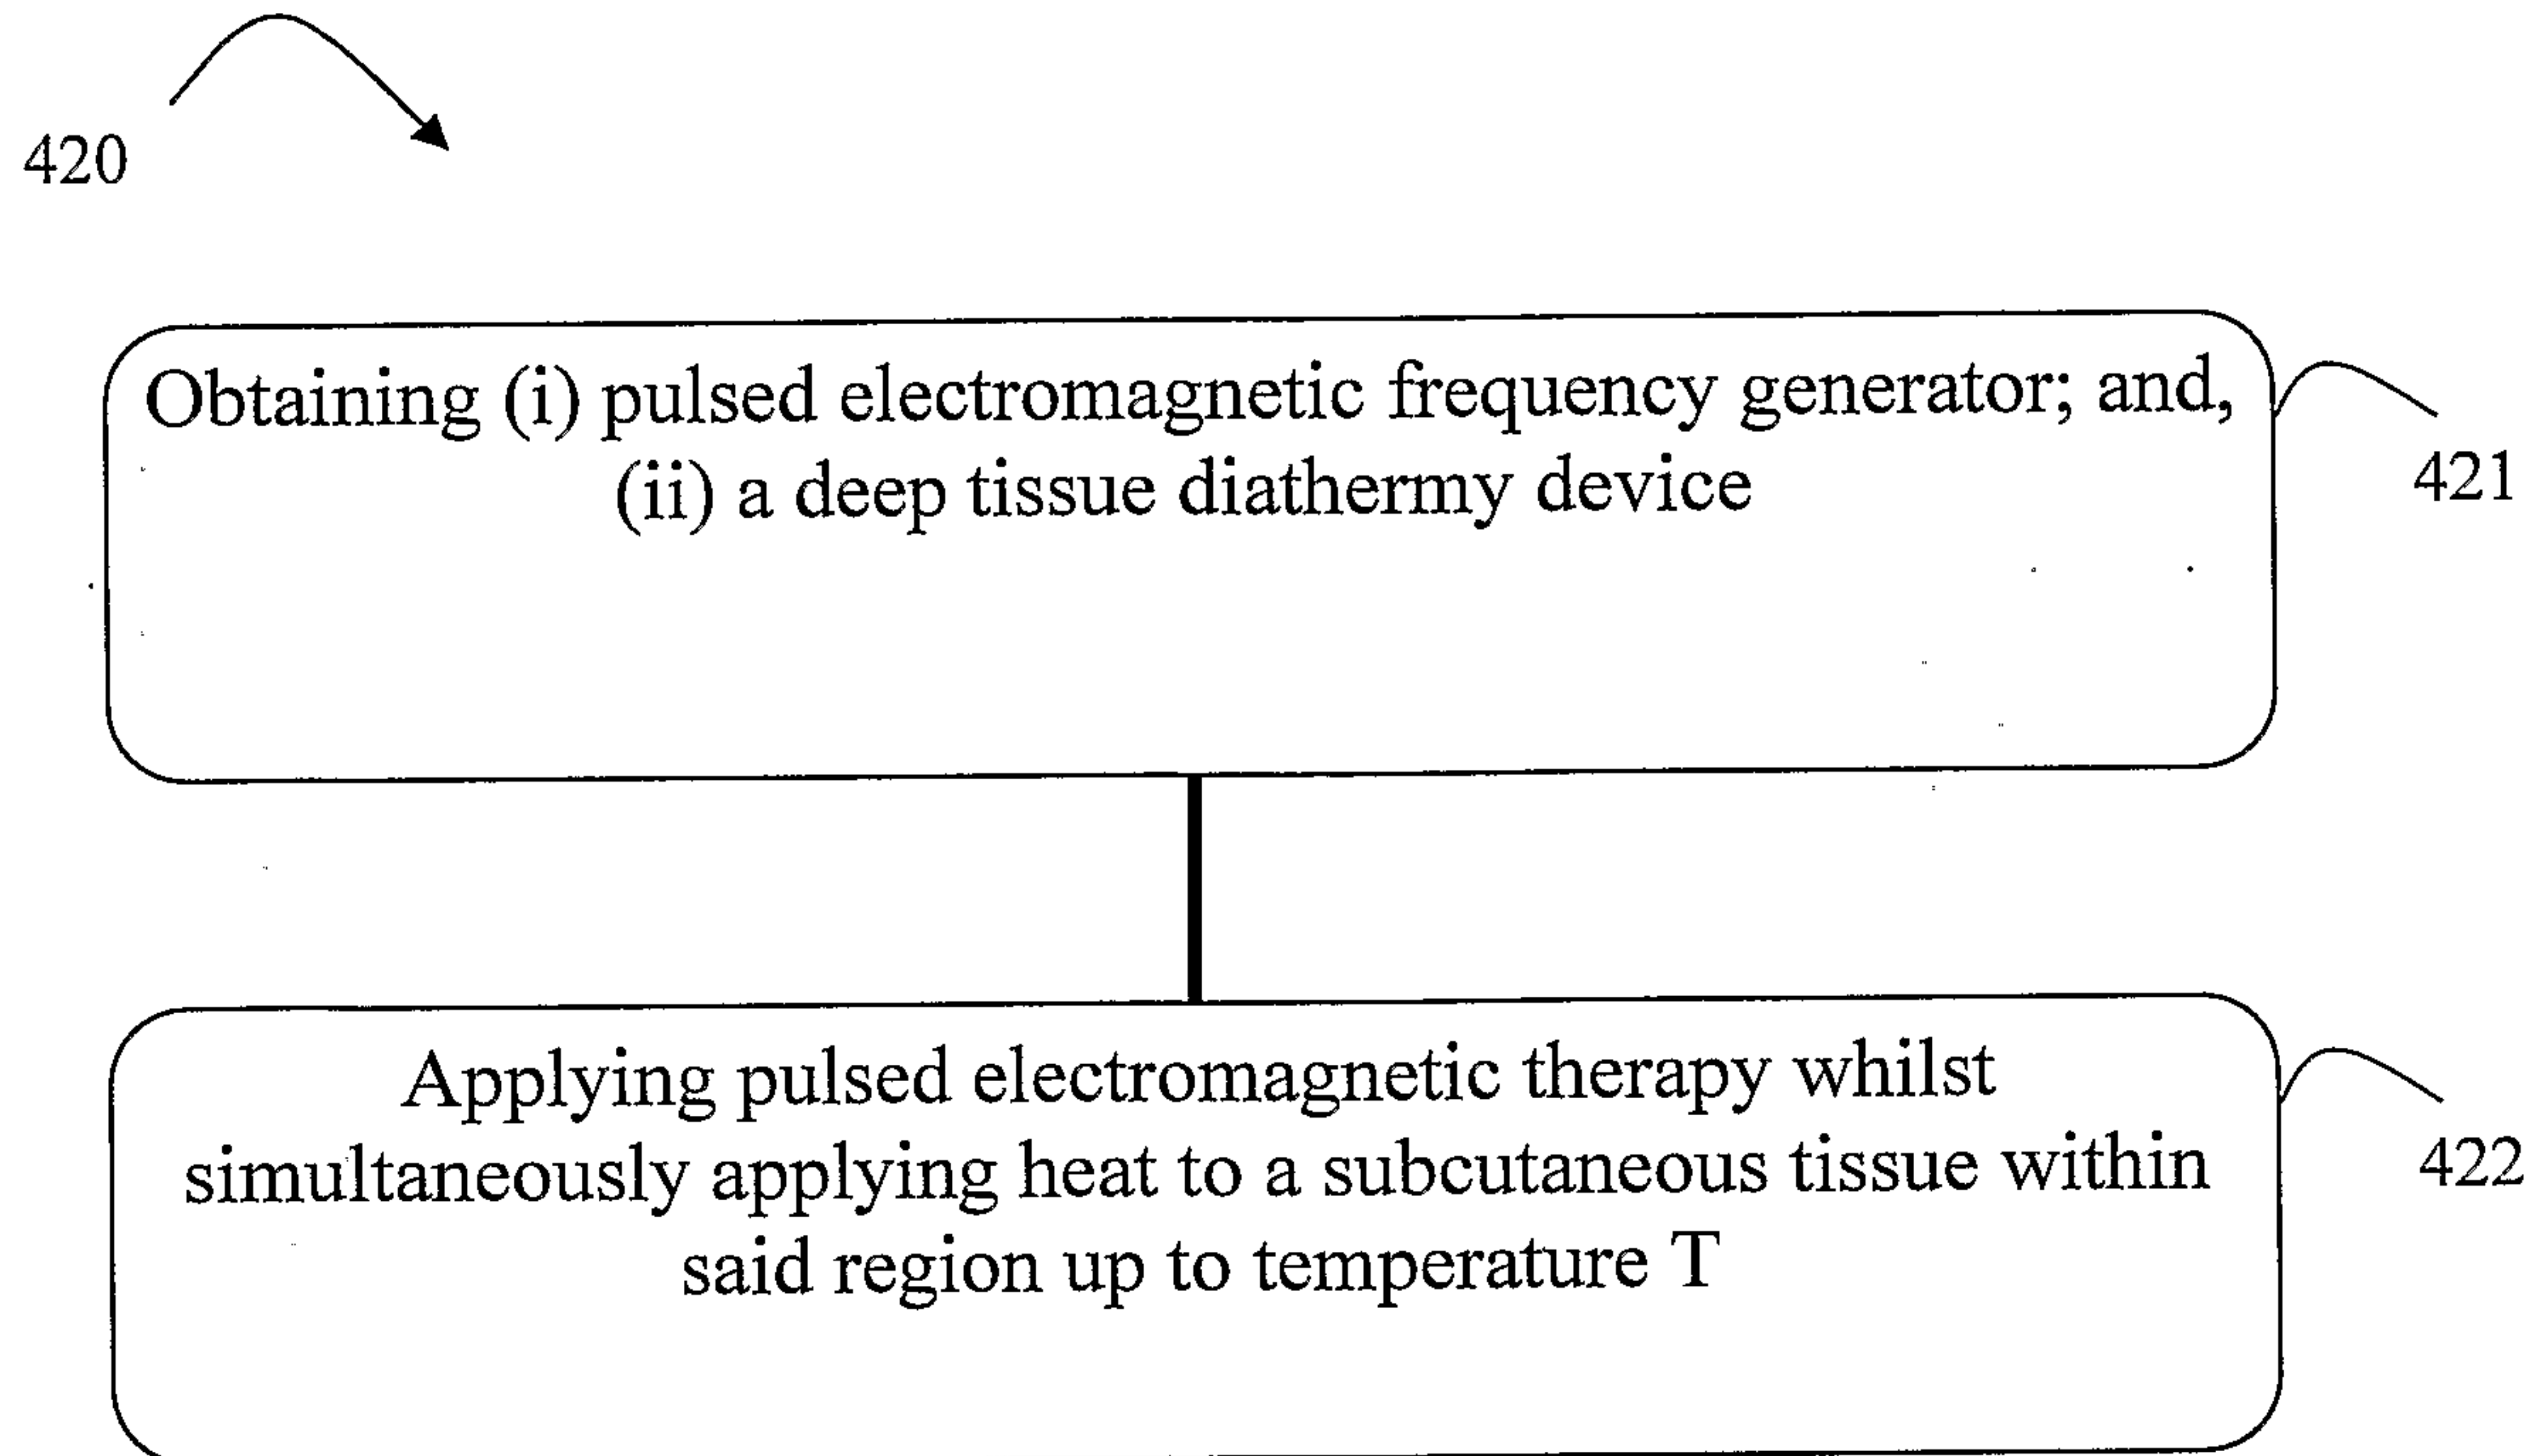


FIG. 11

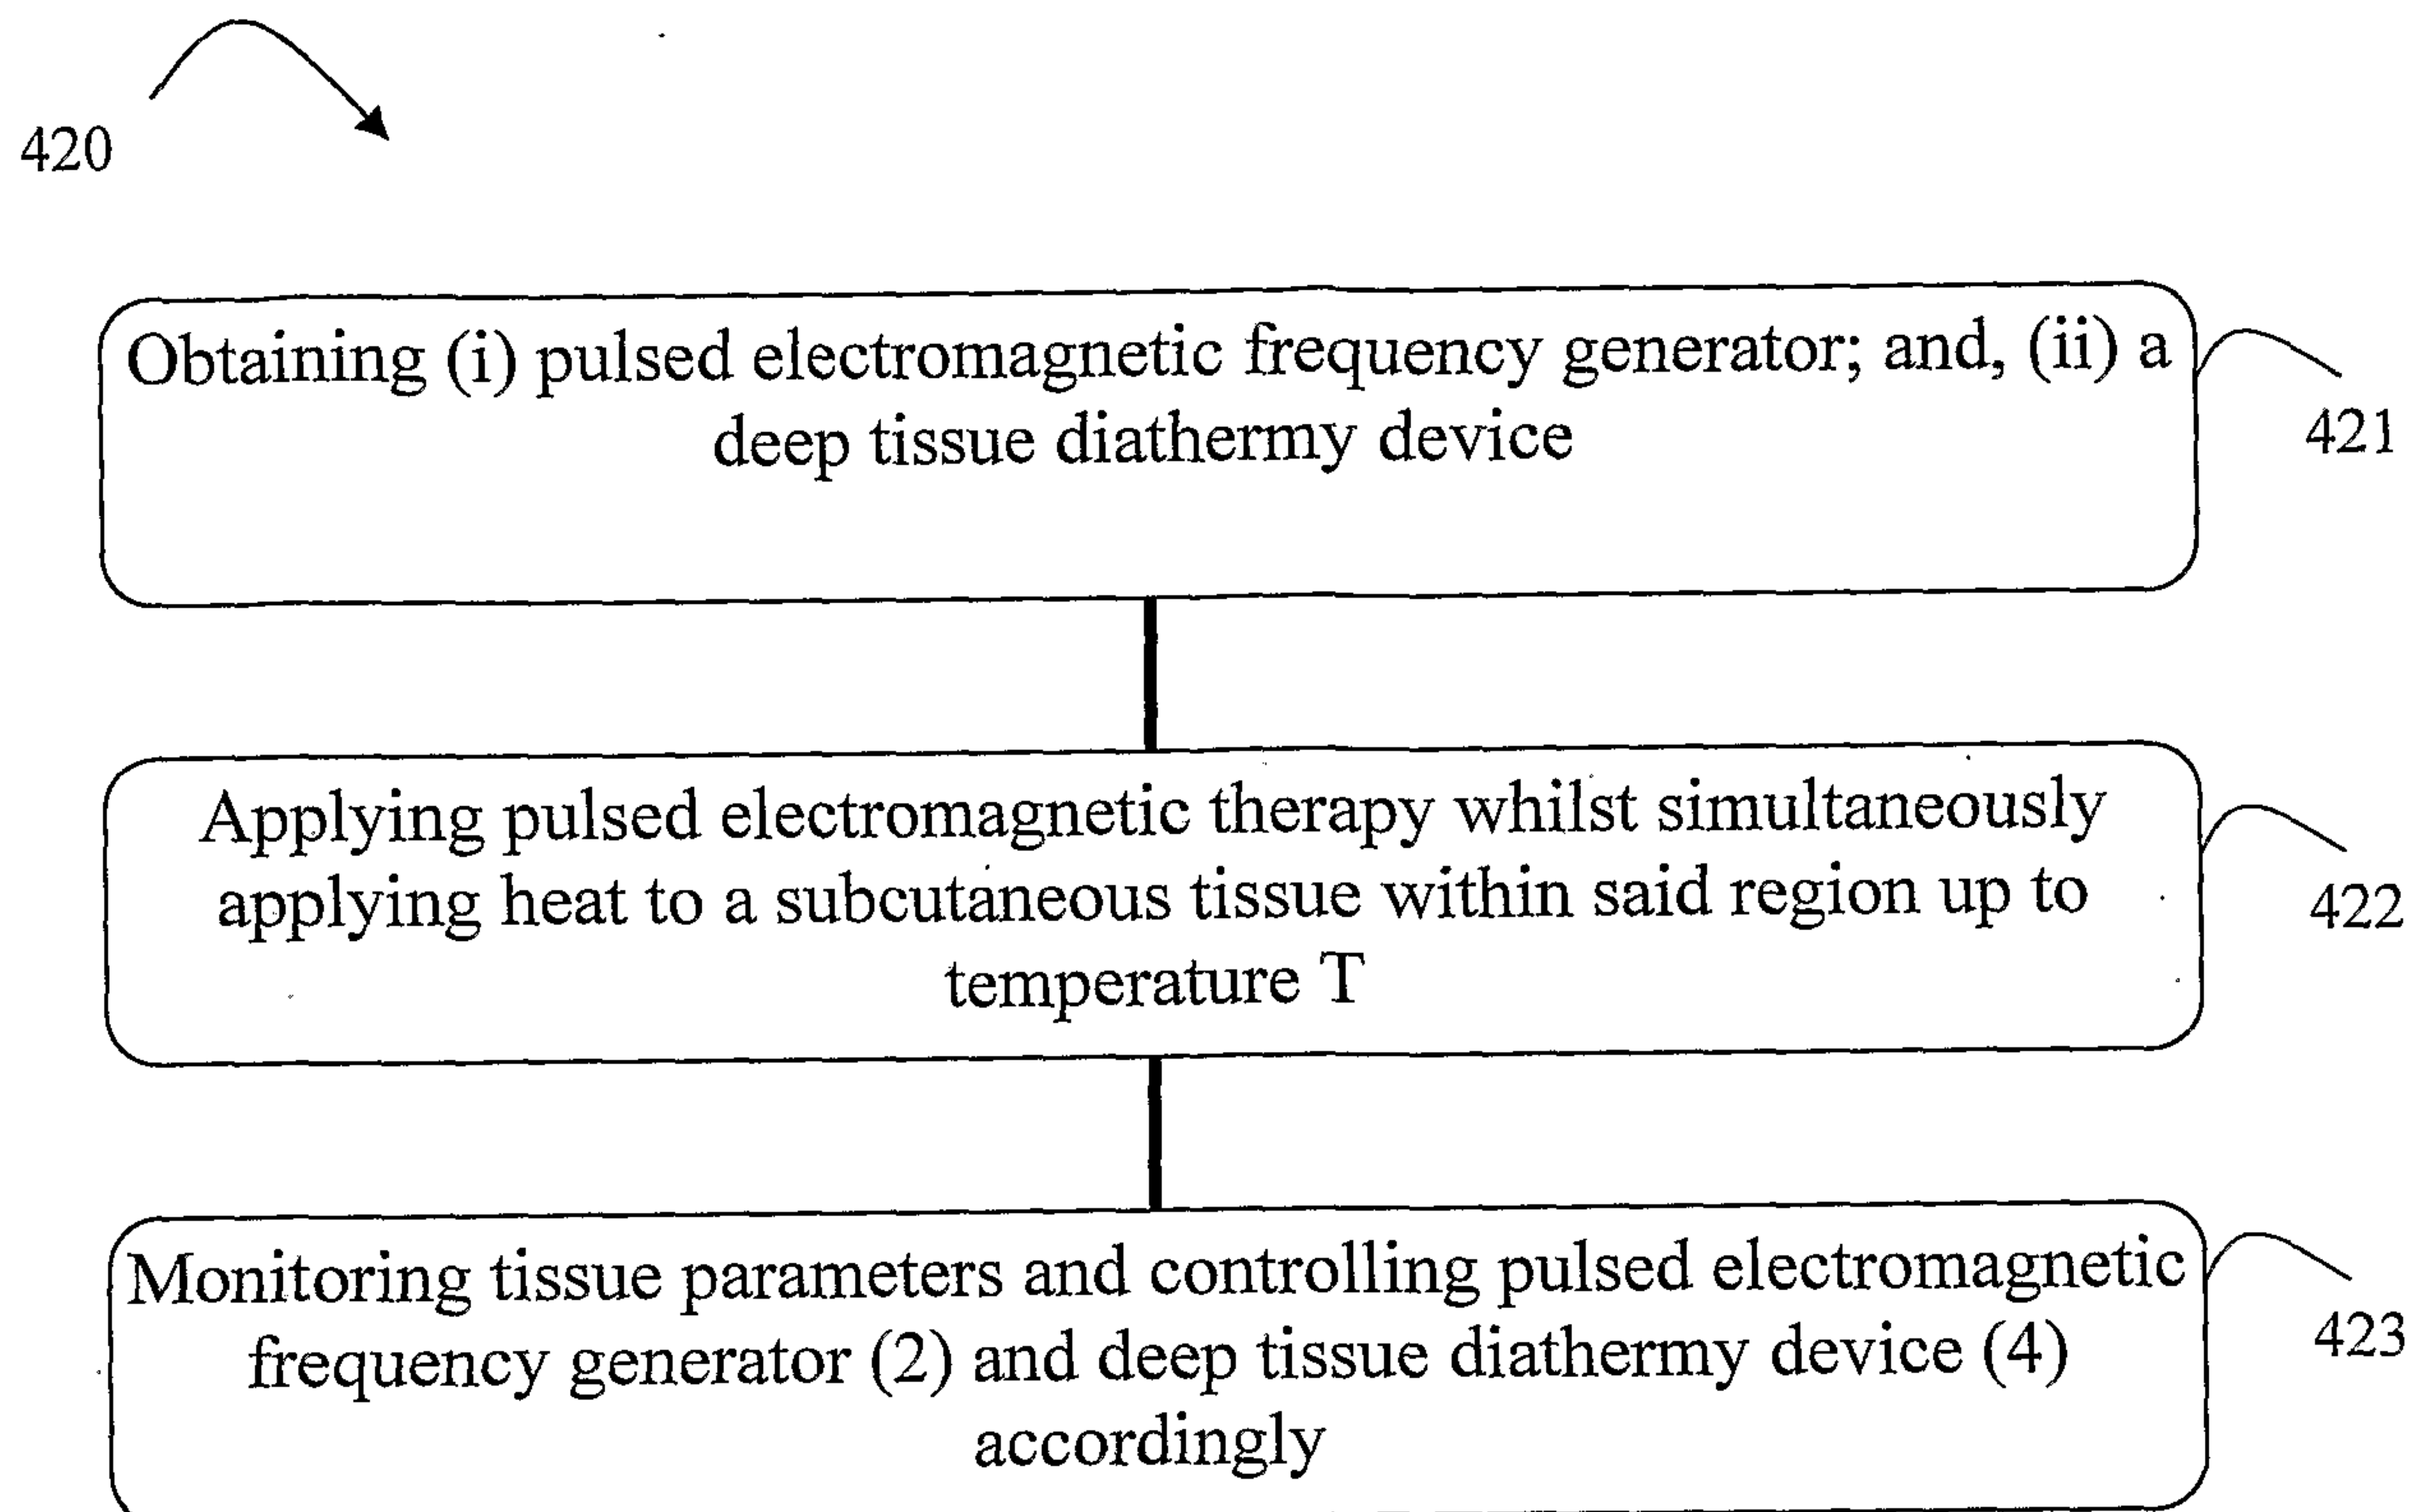


FIG. 12

14/17



FIG. 13c1

FIG. 13b1

FIG. 13a1



FIG. 13c2

FIG. 13b2

FIG. 13a2

WO 2010/007614

PCT/IL2009/000644

15/17

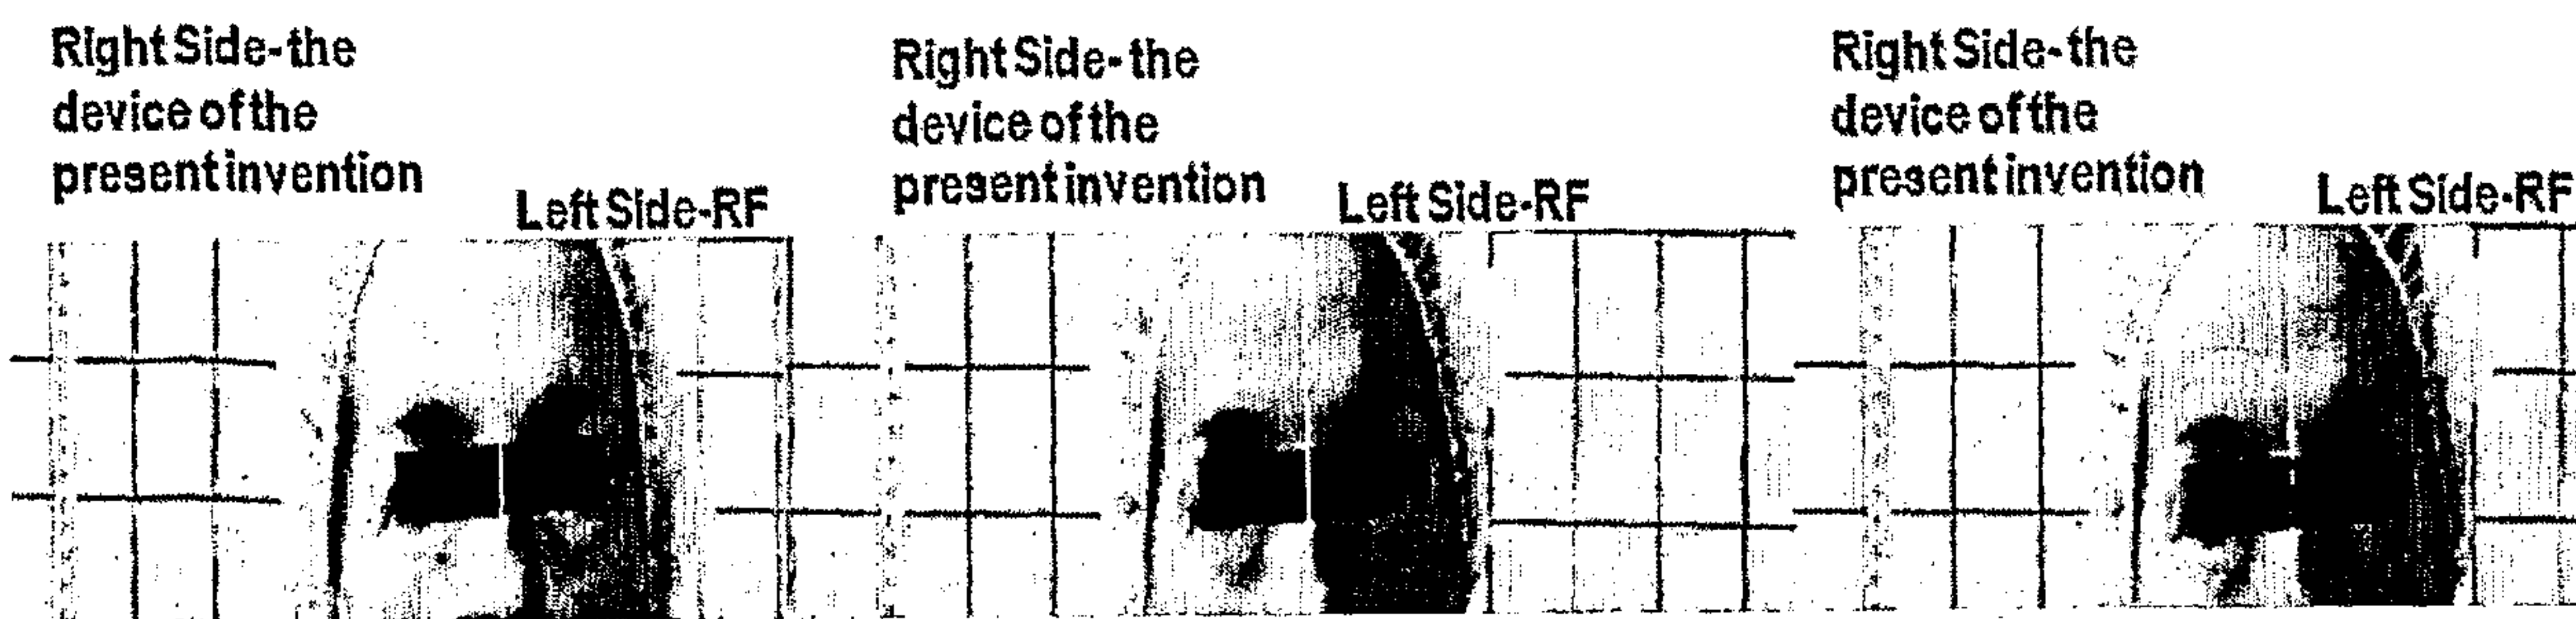


FIG. 14C1

FIG. 14B1

FIG. 14A1

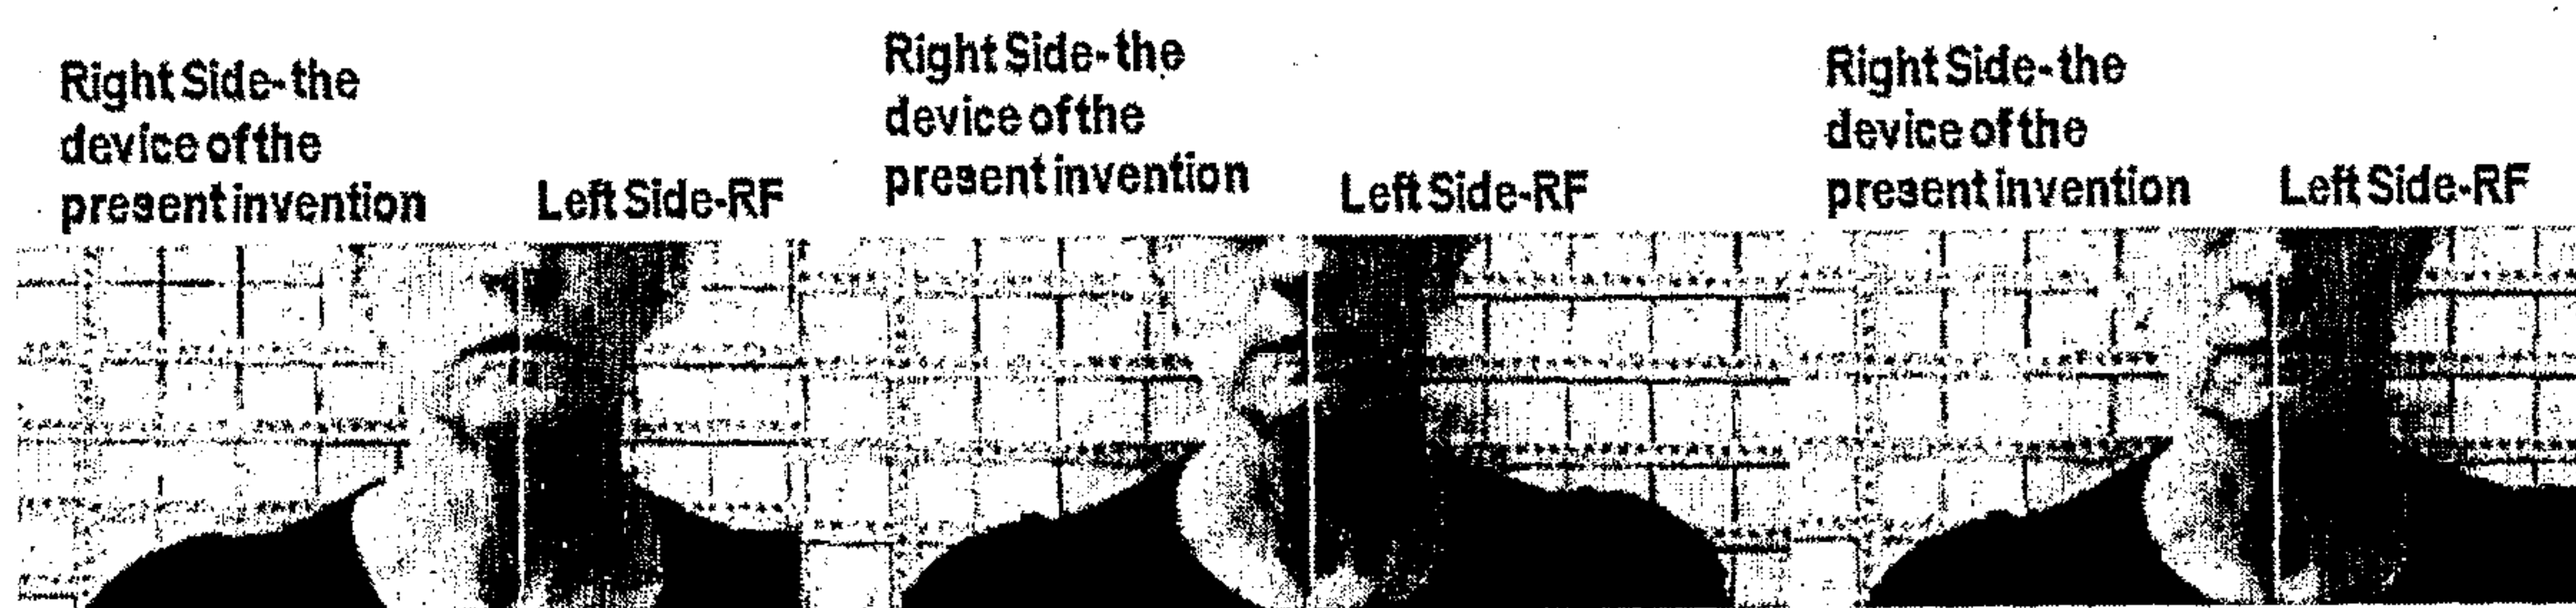


FIG. 14C2

FIG. 14B2

FIG. 14A2

16/17

Right Side-the
device of the
present invention Left Side-PEMF



FIG. 15C1

Right Side-the
device of the
present invention Left Side-PEMF



FIG. 15B1

Right Side-the
device of the
present invention Left Side-PEMF



FIG. 15A1

Right Side-the
device of the
present invention Left Side-PEMF



FIG. 15C2

Right Side-the
device of the
present invention Left Side-PEMF



FIG. 15B2

Right Side-the
device of the
present invention Left Side-PEMF



FIG. 15A2

17/17

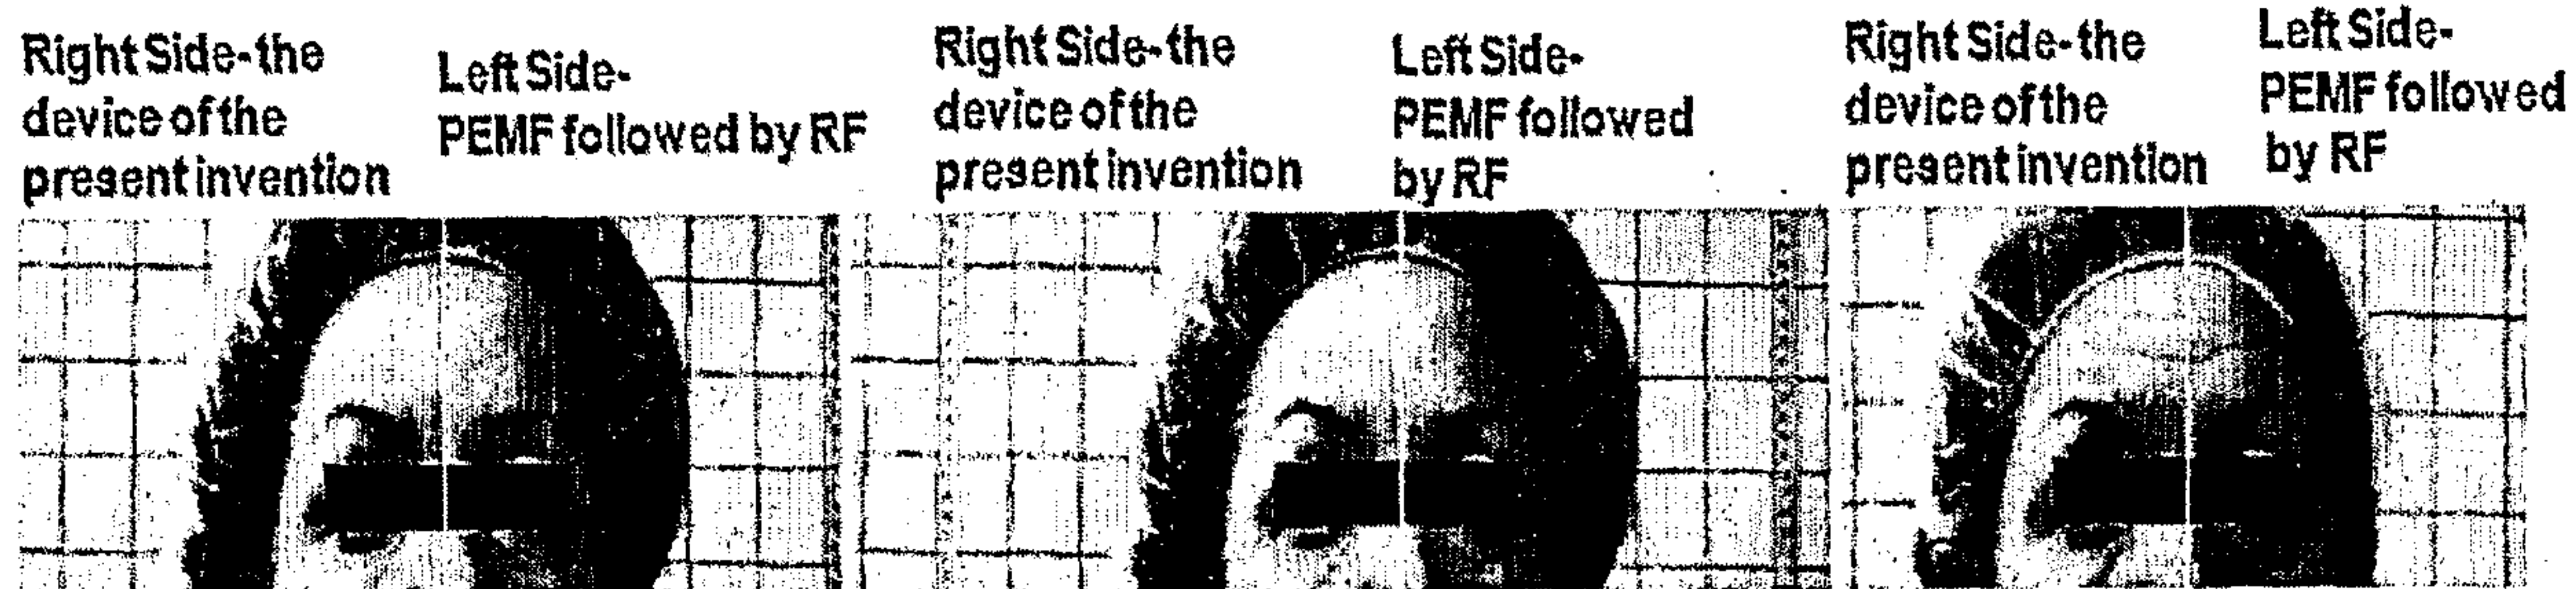


FIG. 16C1

FIG. 16B1

FIG. 16A1

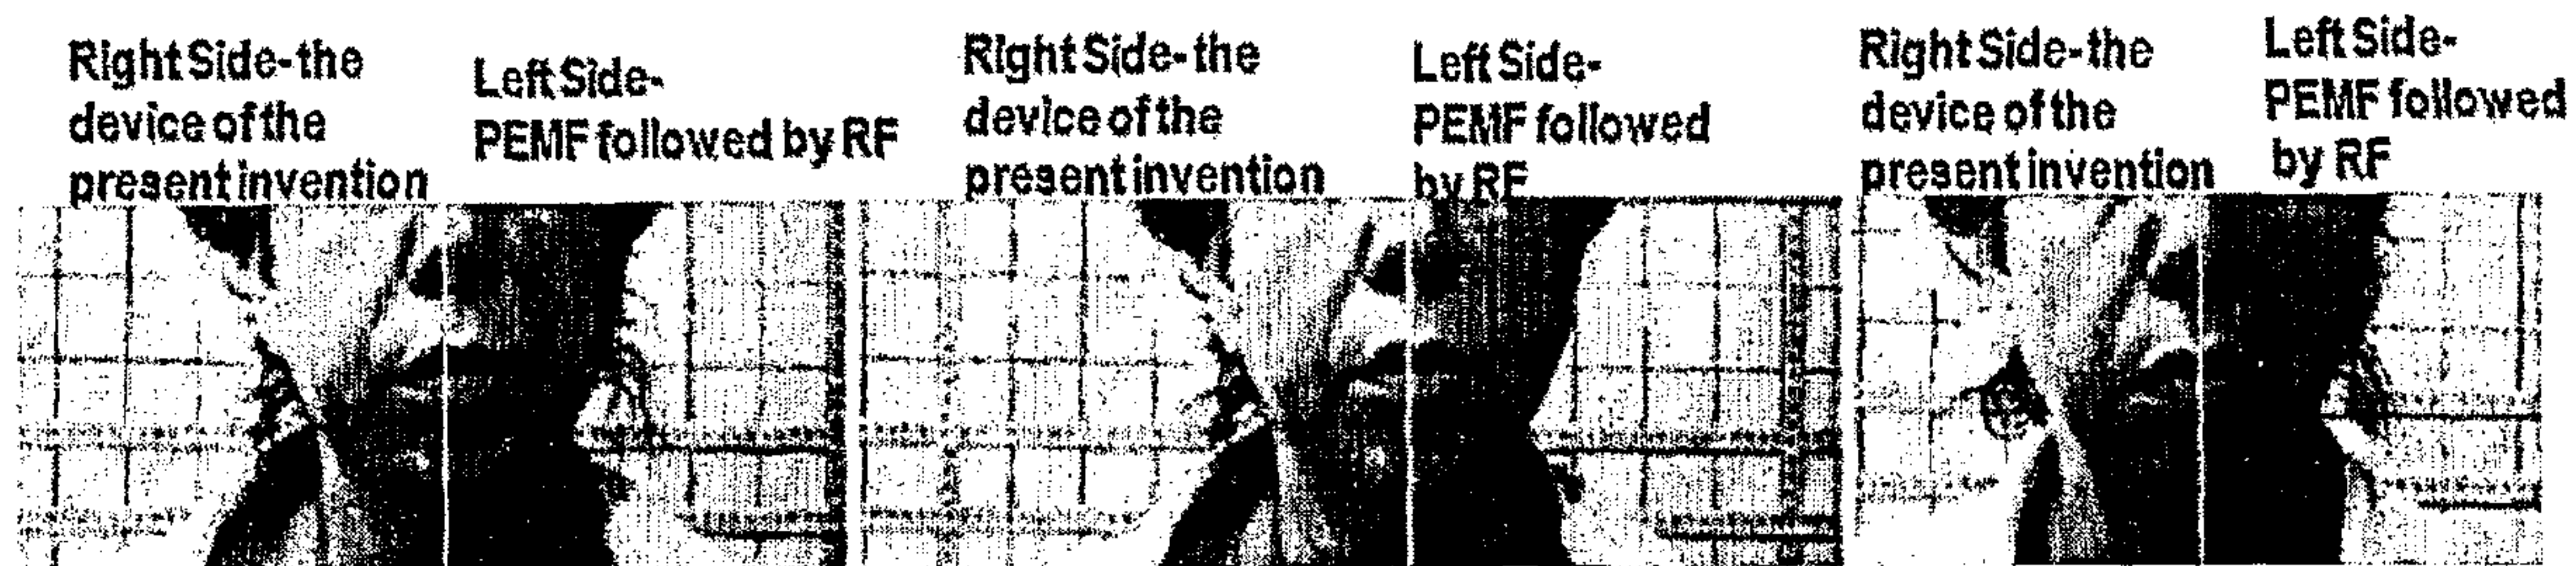


FIG. 16C2

FIG. 16B2

FIG. 16A2

