

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number
WO 2007/125377 A1

(51) International Patent Classification:
G01B 21/04 (2006.01) **G01C 25/00** (2006.01)

(21) International Application Number:
PCT/IB2006/001620

(22) International Filing Date: 28 April 2006 (28.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 ESPOO (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MURPHY, David, J.** [IE/FI]; Abrahaminkatu 15b B 19, FIN-00180 Helsinki (FI). **KAHARI, Markus** [FI/FI]; Metsäpurontie 20 C 21, FIN-00630 HELSINKI (FI). **SORVARI, Antti** [FI/FI]; Landbontie 35, FIN-01100 Itäsalmi (FI). **HUHTALA, Yka** [FI/FI]; Häyhäntie 15, FIN-00920 Helsinki (FI).

(74) Agents: **HIGGIN, Paul** et al.; Swindell & Pearson, 48 Friar Gate, Derby DE1 1GY (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CALIBRATION

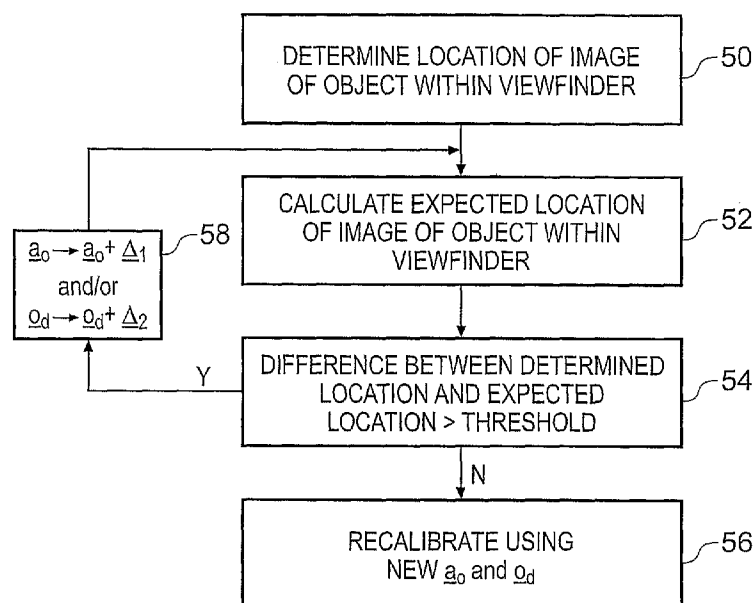

(57) Abstract: A method of calibrating a device comprising: imaging an object in a viewfinder of a device; obtaining a device location from a location mechanism and a device orientation from an orientation mechanism; and using the obtained device location and device orientation to calibrate one or more of the location mechanism and the orientation mechanism such that a difference between an expected location of the object in the viewfinder and a location of the object in the viewfinder is reduced.

TITLE

Calibration

FIELD OF THE INVENTION

5

Embodiments of the present invention relate to calibration. In particular, they relate to a method, a device and a computer program for calibrating a device location mechanism and/or a device orientation mechanism.

10 BACKGROUND TO THE INVENTION

15

It is becoming more common for electronic devices to use 'context' information. That is information that relates the electronic device to the real-world. Examples of such context information include the location of the device and the orientation of the device.

20

The location of a device may be determined by a location mechanism housed in the device and an orientation of a device may be determined by an orientation mechanism housed in the device.

25

Different technologies may be used for determining location. A number of positioning technologies exist such as, for example, base station triangulation, Global Positioning System (GPS) etc. However, any location mechanism may be subject to time varying drift or noise. A number of orientation technologies exist such as, for example, three dimensional compasses using magnetometers, gyroscopes, accelerometers etc. However, any orientation mechanism may be subject to time varying drift or noise.

30

It would therefore be desirable to compensate for variations in the accuracy of a location mechanism and/or the orientation mechanism.

BRIEF DESCRIPTION OF THE INVENTION

According to one embodiment of the invention there is provided a method of
5 calibrating a device comprising:

imaging an object in a viewfinder of a device;

obtaining a device location from a location mechanism and a device
orientation from an orientation mechanism; and

10 using the obtained device location and device orientation to calibrate one or
more of the location mechanism and the orientation mechanism such that a
difference between an expected location of the object in the viewfinder and a
location of the object in the viewfinder is reduced.

According to another embodiment of the invention there is provided a device
15 comprising:

a viewfinder for imaging an object;

a location mechanism for providing a device location;

an orientation mechanism for providing a device orientation; and

20 a calibrator for controlling the device location and/or the device orientation
such that a difference between an expected location of the object in the
viewfinder and a location of the object in the viewfinder is reduced.

According to a further embodiment of the invention there is provided a record
medium embodying a computer program for using the output from an
25 orientation mechanism, the output from a location mechanism, the location of
a predetermined object and the location of an image of the predetermined
object within a viewfinder to calibrate the output from the location mechanism
and/or the output from the orientation mechanism.

30

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention reference will now be made by way of example only to the accompanying drawings in which:

Fig. 1 schematically illustrates an electronic device for performing a calibration process;

5 Fig.2 schematically illustrates imaging of a predetermined object 30 by the device;

Fig. 3 illustrates an example of one possible calibration process; and

Fig. 4 illustrates a physical entity embodying computer program instructions.

10 DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The Figures illustrate a method of calibrating a device 10 comprising: imaging an object 30 in a viewfinder 20 of a device 10; obtaining a device location from a location mechanism 22 and a device orientation from an orientation
15 mechanism 24; and using the obtained device location and device orientation to calibrate one or more of the location mechanism 22 and the orientation mechanism 24 such that a difference between an expected location of the object 30 in the viewfinder 20 and a location of the object 30 in the viewfinder 20 is reduced.

20

Fig. 1 schematically illustrates an electronic device 10. In the example illustrated the electronic device is a hand-portable camera mobile cellular telephone, however, in other embodiments the electronic device may be any processing device that receives camera images such as a personal computer,
25 a personal digital assistant or a digital camera.

In Fig. 1 only the functional components that are necessary for describing the operation of the device in the following paragraphs are illustrated. It should be appreciated that different and/or additional components may be used in other
30 implementations. For example, although a processor and memory combination is illustrated, in other embodiments an ASIC may be used.

4

The electronic device comprises: a processor 12 for controlling the operation of the device 10, an input device for enabling a user to control the processor, a digital camera 16 for capturing an image, a radio transceiver 18 for communicating with a database 4 in a remote memory store 2 that stores the locations of different predetermined objects, a display 20 which is operable as a viewfinder for the camera 16, a location mechanism 22 which detects the location of the device 10 and provides the device location to the processor 12, an orientation mechanism 24 which detects the orientation of the device 10 and provides the device orientation to the processor 12, and a memory 26 which stores computer program instructions 28.

The computer program instructions 28, when loaded into the processor 12, enable the processor 12 to operate as a calibrator. The calibrator adapts the outputs of the location mechanism 22 and the orientation mechanism 24. This may be achieved by varying the operation of the respective mechanisms or by compensating the outputs from the respective mechanisms.

The computer program instructions 28 provide the logic and routines that enables the electronic device to perform the method illustrated in Fig 3.

The computer program instructions may arrive at the electronic device 10 via an electromagnetic carrier signal or be copied from a physical entity 60 such as a computer program product, a memory device or a record medium such as a CD-ROM or DVD.

In this example, the location mechanism is a GPS receiver and the orientation mechanism is a 3D compass but in other embodiments other location mechanisms and/or orientation mechanism may be used. An orientation mechanism may, for example, comprise a magnetometer which can provide a compass bearing and a gravimeter (accelerometer, gyroscope etc) which can provide a vertical reference. In combination, they provide a three dimensional bearing.

Fig.2 schematically illustrates the imaging of a predetermined object 30 by the device 10. The object 30 is predetermined in the sense that its location $\mathbf{a}_o$ is already stored in the database 4. The viewfinder 20 of the device 10 is located at $\mathbf{a}_d$ as determined by the location mechanism 22. The plane of the viewfinder 20 is orthogonal to the unitary vector $\mathbf{o}_d$ which may be determined by the orientation mechanism 24. An image 32 of the predetermined object 30 is at a location $\mathbf{b}_d$ within the plane of the viewfinder 20. The vectors $\mathbf{a}_o$, $\mathbf{a}_d$, and $\mathbf{o}_d$ are three dimensional vectors.

Without calibration, an expected location of the image 32 of the predetermined object 30 in the viewfinder 20 is $(k * (\mathbf{a}_o - \mathbf{a}_d) \times \mathbf{o}_d)$. This will typically be different from the actual location $\mathbf{b}_d$ of the image 32 of the predetermined object 30 in the viewfinder 20. The difference between the expected location of the image of the predetermined object 30 in the viewfinder and the location of the image of the predetermined object 30 in the viewfinder is reduced by calibration.

The calibrator 12 modifies $\mathbf{a}_d$ and/or $\mathbf{o}_d$ so that $\mathbf{b}_d = k * (\mathbf{a}_o - \mathbf{a}_d) \times \mathbf{o}_d$

i.e. so that the expected location of the image of the predetermined object 30 in the viewfinder $(k * (\mathbf{a}_o - \mathbf{a}_d) \times \mathbf{o}_d)$ becomes equal to the actual location of the image of the predetermined object 30 in the viewfinder $\mathbf{b}_d$.

The calibrator 12 therefore receives:

- a) a scaling constant k , from the camera 16, that varies with the zoom used to image the predetermined object 30,
- b) the actual location of the predetermined object $\mathbf{a}_o$ from the transceiver 18 after it has downloaded it from the remote database 4 over a wireless connection 6,
- c) the device location $\mathbf{a}_d$ provided by the location mechanism 22,

6

d) the unitary orientation vector $\mathbf{o}_d$ of the device, provided by the orientation mechanism 24 and

e) the location $\mathbf{b}_d$ of the image of the predetermined object 30 within the viewfinder 20 which can be determined by identifying the image 32 of the predetermined object 30 as a series of pixels within the display 20 of the viewfinder and determining the location of those pixels in the plane of the display 20. This may be achieved by framing a physical landmark comprising the image of the predetermined object in a box presented in the viewfinder.

An example of one possible calibration process is illustrated in Fig. 3.

The process starts at step 50 perhaps in response to a user input via the input device 14. The calibrator 12 determines the location $\mathbf{b}_d$ of the image 32 of the predetermined object 30 within the viewfinder 20.

Next at step 52, the calibrator 12 calculates an expected location $(k * (\mathbf{a}_o - \mathbf{a}_d) \times \mathbf{o}_d)$ of an image of the predetermined object 30 in the viewfinder 20.

Next at step 54, the calibrator 12 compares the determined location $\mathbf{b}_d$ of the image of the predetermined object 30 within the viewfinder and the expected location $(k * (\mathbf{a}_o - \mathbf{a}_d) \times \mathbf{o}_d)$ of an image of the predetermined object 30 in the viewfinder, if the difference exceeds a threshold T then the process branches to step 58, otherwise the process moves on to step 56.

At step 58, the calibrator 12 adapts the value(s) $\mathbf{a}_o$ and/or $\mathbf{o}_d$ used to calculate the expected location of an image of the predetermined object 30 in the viewfinder 20. The size of the adaptation may be determined using a suitable algorithm.

After step 58, the process returns to step 52.

At step 56, the calibrator 12 recalibrates the location mechanism 22 using the current value of $\mathbf{a}_o$ and the orientation mechanism 24 using the current value of $\mathbf{o}_d$.

5

Although the process has been described in relation to a single object 30, the process can occur simultaneously for multiple objects where the multiple objects are parts of the same physical object or parts of different physical objects. The physical object will typically be a landmark.

10

The multiple objects may be, for example, the topmost, bottommost, leftmost, and rightmost portions of a physical object such as a building or monument.

The method may be repeated for multiple orientations of the device 10. That is the same predetermined object or objects are still imaged by the viewfinder 20 but with a different orientation of the device 10.

15

The method may be repeated for multiple locations of the device 10. That is the same predetermined object or objects are still imaged by the viewfinder 20 but with a different location of the device.

20

After calibration, when an object 30 is imaged in a display viewfinder 20, the device 10 can determine $\mathbf{b}_d$ and then after obtaining $\mathbf{a}_d$ from its location mechanism 22 and $\mathbf{o}_d$ from its orientation mechanism 24, it can calculate $\mathbf{a}_o$ using $\mathbf{b}_d = k * (\mathbf{a}_o - \mathbf{a}_d) \times \mathbf{o}_d$. The device 10 is therefore able to associate an object 30 imaged in the display viewfinder 20 with a real world location $\mathbf{a}_o$. Data that has been associated with that real world location $\mathbf{a}_o$ may therefore be displayed on the display viewfinder 20 at the display location $\mathbf{b}_d$ or a link to the data may be displayed on the display viewfinder 20 at the display location $\mathbf{b}_d$.

25

30

8

Although embodiments of the present invention have been described in the preceding paragraphs with reference to various examples, it should be appreciated that modifications to the examples given can be made without departing from the scope of the invention as claimed.

5

Whilst endeavoring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

10

I/we claim;

CLAIMS

1. A method of calibrating a device comprising:
imaging an object in a viewfinder of a device;
5 obtaining a device location from a location mechanism and a device orientation from an orientation mechanism; and
using the obtained device location and device orientation to calibrate one or more of the location mechanism and the orientation mechanism such that a difference between an expected location of the object in the viewfinder and a
10 location of the object in the viewfinder is reduced.
2. A method as claimed in claim 1, wherein calibrating one or more of the location mechanism and the orientation mechanism minimizes the difference between the expected location of the object in the viewfinder and the location
15 of the object in the viewfinder.
3. A method as claimed in claim 1 or 2, further comprising:
calculating an expected location of the object within the viewfinder using the device location and the device orientation; and
20 comparing the expected position and the determined position as part of the calibration step.
4. A method as claimed in any preceding claim, wherein the step of calculating the expected location of the object within the viewfinder
25 additionally uses a location of the object and a scaling factor.
5. A method as claimed in claim 4, wherein the location of the object is downloaded from a remote store.
- 30 6. A method as claimed in claim 4 or 5, further comprising varying the scaling factor with the zoom factor used with the viewfinder.

10

7. A method as claimed in any preceding claim, wherein the object is a portion of a physical object.

8. A method as claimed in any preceding claim, comprising:

- 5 imaging a plurality of objects in a viewfinder of a device;
obtaining a device location from a location mechanism and a device orientation from an orientation mechanism; and
using the obtained device location and device orientation to calibrate one or more of the location mechanism and the orientation mechanism such that, for
10 each of the plurality of objects, a difference between an expected location of the object in the viewfinder and a location of the object in the viewfinder is reduced.

15 9. A method as claimed in claim 8, wherein the plurality of objects are portions of the same physical object.

10. A method as claimed in any preceding claim, repeated for the same object using at least a different orientation of the device.

20 11. A method as claimed in any preceding claim, repeated for the same object using at least a different location of the device.

25 12. A method as claimed in any preceding claim, further comprising framing a physical landmark comprising the object in a box presented in the viewfinder.

13. A method as claimed in any preceding claim wherein the viewfinder is a display.

30 14. A method as claimed in any preceding claim wherein the orientation mechanism and the location mechanism are located in the device.

15. A method as claimed in any preceding claim wherein the location mechanism is a GPS receiver.

16. A method as claimed in any preceding claim, wherein the orientation mechanism comprises a 3D compass and a gravimeter.

17. A device comprising:

a viewfinder for imaging an object;

a location mechanism for providing a device location;

an orientation mechanism for providing a device orientation; and
a calibrator for controlling the device location and/or the device orientation such that a difference between an expected location of the object in the viewfinder and a location of the object in the viewfinder is reduced.

18. A device as claimed in claim 17, wherein the calibrator calculates an expected location of the object within the viewfinder using the device location and the device orientation and compares the expected position and the determined position.

19. A device as claimed in claim 17 or 18, arranged to download a location of the object from a remote store, wherein calculating the expected location of the object within the viewfinder additionally uses the downloaded location of the object.

20. A device as claimed in any one of claims 17 to 19, further comprising a zoom function associated with the viewfinder for zooming in on a portion of the image in the viewfinder, wherein an indication of the current zoom factor is provided to the calibrator.

21. A device as claimed in any one of claims 17 to 20, wherein the calibrator calculates an expected location of an object within the viewfinder for each of a plurality of objects imaged in the viewfinder and adjusts the device location

and/or device orientation such that a difference between an expected location and a location is reduced for each of a plurality of objects imaged in the viewfinder.

5 22. A device as claimed in any one of claims 17 to 21, wherein the viewfinder is a display.

23. A device as claimed in any one of claims 17 to 22, wherein the location mechanism is a GPS receiver.

10

24. A device as claimed in any one of claims 17 to 20, wherein the orientation mechanism is a 3D compass.

15

25. A record medium embodying a computer program for using the output from an orientation mechanism, the output from a location mechanism, the location of a predetermined object and the location of an image of the predetermined object within a viewfinder to calibrate the output from the location mechanism and/or the output from the orientation mechanism.

20

26. A record medium as claimed in claim 25, wherein the computer program is operable to adapt the output from the location mechanism and/or the output from the orientation mechanism to reduce a difference between an expected location of an image of the predetermined object in a viewfinder and a location of the image of the predetermined object in the viewfinder.

1/2

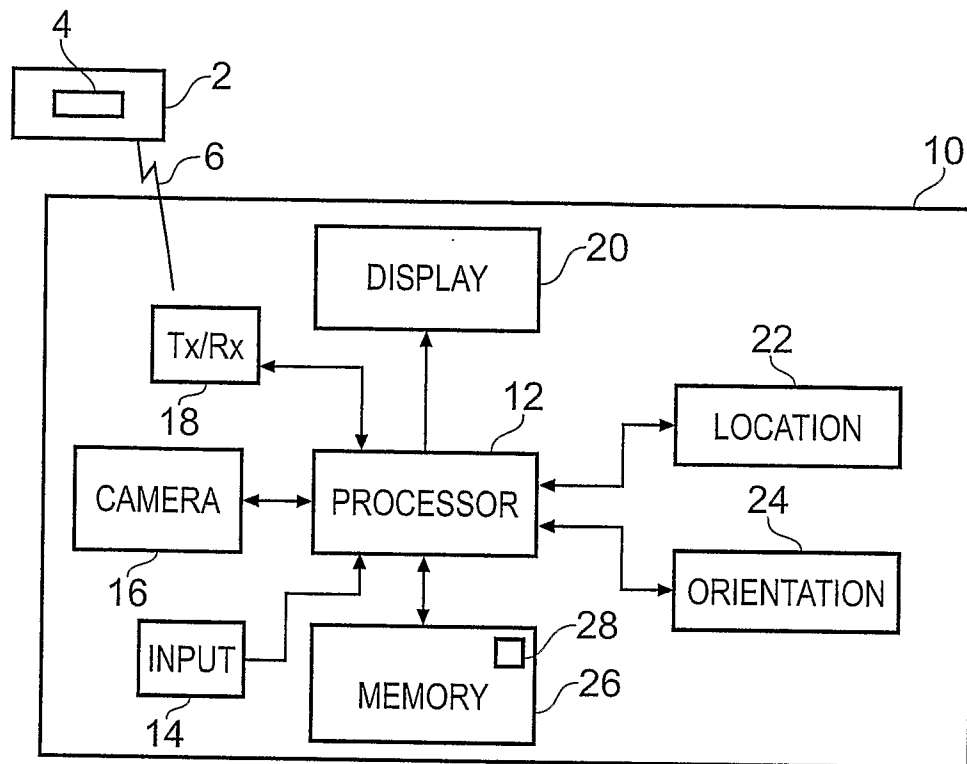


Fig. 1

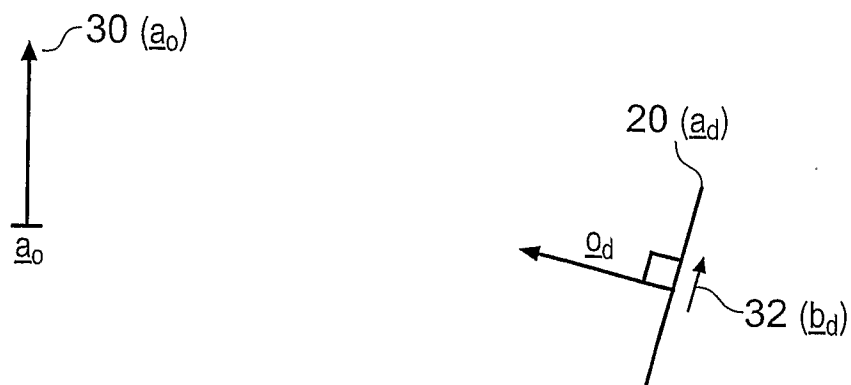


Fig. 2

2/2

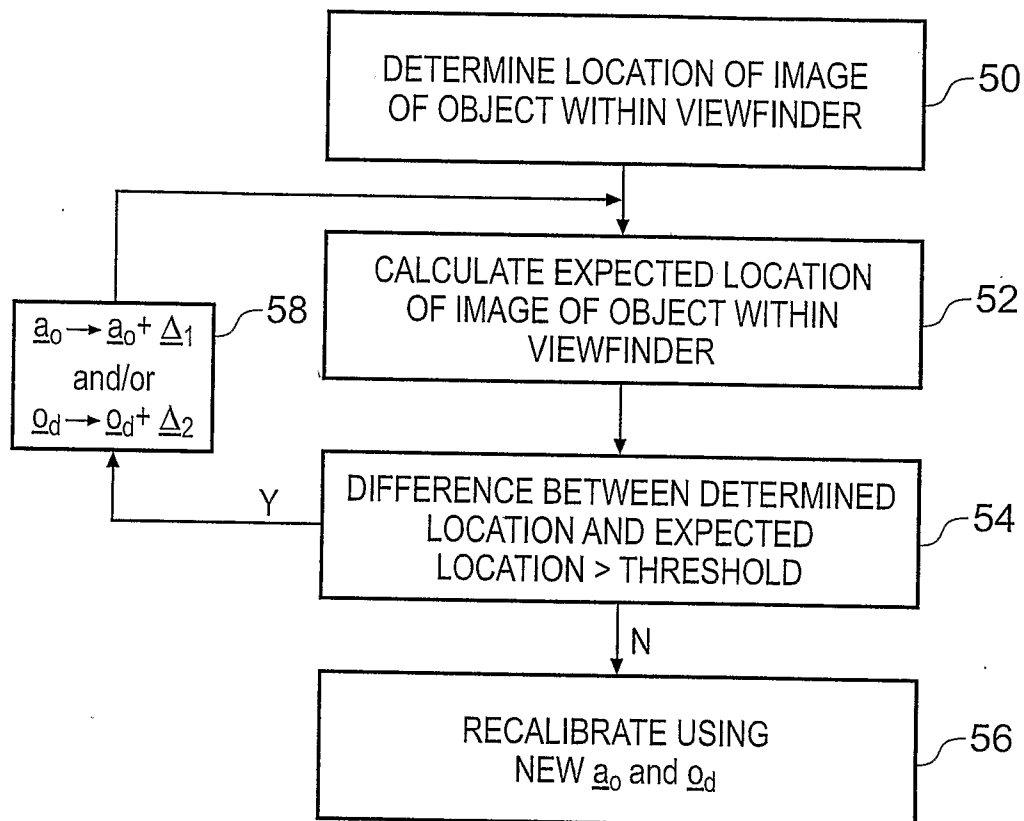


Fig. 3



Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2006/001620

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G01C, G01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6594600 B1 (PATRICK ARNOUL ET AL), 15 July 2003 (15.07.2003), column 2, line 51 - column 3, line 10, abstract --	1-26
X	US 6310644 B1 (JOHN KEIGHTLEY), 30 October 2001 (30.10.2001), column 4, line 15 - line 35, abstract --	1-26
A	WO 2004084124 A1 (KRAFT, RAYMOND,H.), 30 Sept 2004 (30.09.2004), page 2, line 15 - line 31, abstract -- -----	1-26



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 November 2006

Date of mailing of the international search report

05-12-2006

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Karin Jansdotter/MN

Telephone No. +46 8 782 25 00

International patent classification (IPC)**G01B 21/04** (2006.01)**G01C 25/00** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument (service in Swedish).

Use the application number as username.

The password is **YVSJZVTZZA**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/11/2006

International application No.
PCT/IB2006/001620

US	6594600	B1	15/07/2003	CA	2275957	A	06/05/1999
				DE	69806894	D,T	13/03/2003
				EP	0948760	A,B	13/10/1999
				SE	0948760	T3	
				ES	2181283	T	16/02/2003
				FR	2770317	A,B	30/04/1999
				JP	2001506369	T	15/05/2001
				WO	9922281	A	06/05/1999

US	6310644	B1	30/10/2001	NONE
----	---------	----	------------	------

WO	2004084124	A1	30/09/2004	US	20040225472	A	11/11/2004
----	------------	----	------------	----	-------------	---	------------
