



(43) International Publication Date
15 January 2015 (15.01.2015)

- (51) International Patent Classification:
B60G 11/04 (2006.01) *F16F 1/18* (2006.01)
B60G 11/02 (2006.01)
- (21) International Application Number:
PCT/SE2014/000087
- (22) International Filing Date:
23 June 2014 (23.06.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PCT/SE2013/000113 11 July 2013 (11.07.2013) SE
- (71) Applicant: VOLVO TRUCK CORPORATION [SE/SE];
S-405 08 Göteborg (SE).
- (72) Inventor: PREIJERT, Stefan; Mickelsmassogatan 3, S-
415 07 Göteborg (SE).
- (74) Agent: ERIKSSON, Tommy; Volvo Technology Corpora-
tion, Volvo Corporate Intellectual Property, Dept. 6820
M1.7, S-405 08 Göteborg (SE).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: VEHICLE SUSPENSION AND LEAF SPRING THEREFORE

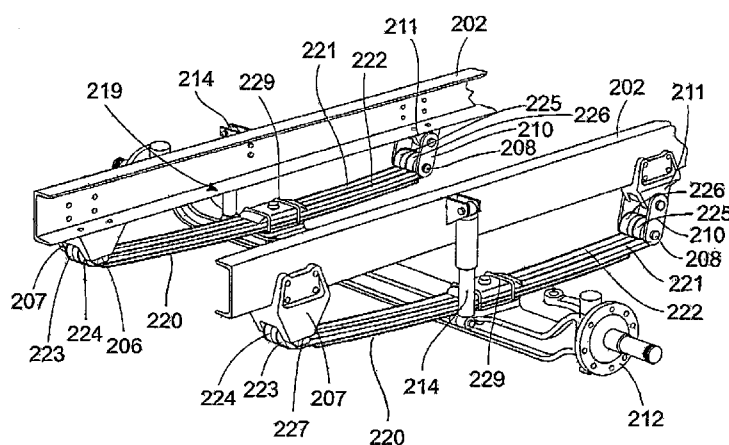


Fig.2B

(57) Abstract: The invention relates to a vehicle suspension leaf spring assembly arranged to be mounted in the longitudinal direction of the vehicle, on both sides thereof, said leaf spring assembly having a first end (223, 224), which is arranged for pivotal connection to a first bracket (207) on the vehicle; and a second end (225, 226), which is arranged for connection to a spring shackle (210) on the vehicle, wherein said leaf spring assembly is arranged to be connected to an axle (212) extending transversely of said leaf spring assembly at a position intermediate the first and second ends of said leaf spring assembly. The leaf spring assembly comprises an upper spring arrangement comprising two individual upper leaf springs (221, 222; 404, 405; 504, 505) arranged side-by-side with a predetermined spacing and extending between said first and second ends (223, 224; 225, 226), and at least one lower spring arrangement (220; 421; 521, 523) arranged below the upper leaf springs (221, 222; 404, 405; 504, 505).



VEHICLE SUSPENSION AND LEAF SPRING THEREFORE

TECHNICAL FIELD

This invention relates to a vehicle suspension comprising leaf springs, in particular a suspension for a commercial vehicle, and a leaf spring for use in
5 such a suspension.

BACKGROUND ART

In general, most commercial vehicles with a frame comprising longitudinal beams are equipped with steerable, single, tandem or multi-axle assemblies. Conventionally, the suspension systems provided for supporting and
10 damping the relative movement between each axle and the vehicle frame have included single-stage multi-leaf springs, pneumatic spring systems or a combination thereof. Many vehicles are equipped with single-stage multi-leaf springs which are designed to mechanically dampen the movement between
15 the frame and the axles during operation of the vehicle.

It is common to support such a vehicle with leaf springs which are attached at each end to the vehicle chassis and to an axle near the centre of the spring. In such an arrangement, when the suspension is loaded, the maximum bending moment in the spring occurs at the point where the axle is attached
20 to the spring and decreases in either direction from that point along the spring. In order to make the most efficient use of the spring material and to save weight, one option is to use a single leaf spring. The spring can be made tapered in either direction toward its ends from a point of maximum thickness where the axle is attached. In order to achieve acceptable
25 deflection characteristics in a tapered spring, it is necessary that it be manufactured to a relatively high degree of accuracy. The cost of manufacturing a tapered steel leaf spring is relatively high because it requires the use of special tapered rolling machines. As a result, although tapered

single leaf springs are generally available today for use with larger vehicles, such as heavy trucks, they are significantly more expensive than conventional flat springs.

Another important factor in the design of leaf spring suspensions is the
5 desired spring rate. The spring rate, which is defined as the rate of increase of force necessary to deflect the spring with deflection, is a function of the cross-sectional area moment of inertia, the length of the spring, and the elastic modulus of the spring material. In general, a single leaf spring must be
10 designed so that it is strong enough to withstand the loads imposed upon it in operation and yet have a spring rate which is low enough to provide acceptable ride qualities. Further, the desired spring rate must be achieved within the particular geometric constraints placed on the suspension, such as the maximum allowable length and deflection of the springs.

To achieve a compromise among these various design and economic
15 factors, designers frequently use "built-up" steel spring assemblies which consist of a number of separate spring leaves diminishing in length from the top of the assembly to the bottom to achieve an overall tapered shape. Normally, the leaves are clamped together at their centres where the axle is mounted but are free to slip longitudinally relative to each other when the
20 spring is deflected. The leaves are usually of constant thickness to reduce manufacturing costs, but use of tapered leaves obtains greater efficiency. As previously mentioned, however, the cost of manufacturing such tapered leaves is relatively high.

One of the principal deficiencies of a built-up steel spring assembly is its
25 weight. Due to the dramatic increase in fuel costs in recent years and the consequent necessity to reduce vehicle weight, designers are examining all major vehicle components, including suspensions, to see if ways can be found to reduce their weight without adversely affecting their cost or performance. In particular, it has been suggested that much lighter and more
30 efficient springs could be made from various state-of-the-art plastic or

composite materials rather than steel. Some of these materials are particularly attractive for use in constructing springs with non-uniform cross-sections because of the ease with which they can be moulded.

5 In spite of these efforts, plastic and composite single leaf springs have not been used commercially for a variety of reasons. It is generally accepted that springs made entirely of plastic would be impractical because of excessive bulk and insufficient resistance to wear and impact. One known plastic spring, sold under the trademark GRAFTEK by a division of Exxon Corp., is made from graphite skins with a glass fibre-reinforced epoxy core. This
10 spring has proven impractical due to high cost and its extreme unidirectional stress-carrying capability. That is, the spring is strong enough in the vertical direction but too weak in the transverse or torsional direction to be usable in common suspensions. Since vehicle springs must absorb cornering loads and high impact loads from rocks and other debris, graphite is unsatisfactory
15 as a component of a viable leaf spring. Composites of metal and plastic have been suggested to alleviate some of these graphite problems. The cost of manufacturing these composite springs has thus far been too great, however, to justify substituting them for all steel spring assemblies.

20 An additional drawback with single leaf springs is that the installation must be secured by a safety system or device at each end, in case of spring failure. For a steered front axle, the front end is provided with a safety eye to block a front axle dislocation and the rear end is provided with a steel belt or blocker. Such a safety system increases both cost and weight and give a minor axle dislocation at spring breakage that could lead to problems to maintain
25 steering control after a leaf spring breakage. After a spring breakage the vehicle can not be driven and must be towed to a service facility.

The solution according to the invention aims to provide an improved leaf spring assembly that overcomes the above problems.

DISCLOSURE OF INVENTION

The above problems are solved by a suspension and a leaf spring assembly according to the appended claims.

In the subsequent text, the vehicle referred to is a commercial type vehicle comprising a frame built up of a pair of substantially parallel beams, for instance beams with an I- or C-shaped cross-section. The suspension according to the invention is preferably, but not necessarily, intended for front wheel suspensions comprising steerable wheels. It should be noted that all distances referred to are taken when the vehicle is stationary and the suspension is in its unloaded state, unless otherwise specified.

The invention relates to a leaf spring assembly for a vehicle suspension arranged to be mounted in the longitudinal direction of the vehicle, on both sides thereof. Each leaf spring assembly is attached on opposite sides of a chassis or frame and is arranged to support one end of a transverse rigid axle. The axle is preferably, but not necessarily, a steered vehicle axle.

The leaf spring assembly has a first end, which is arranged for pivotal connection to a first bracket on the vehicle and a second end, which is arranged for connection to a spring shackle on the vehicle. In a conventional vehicle suspension, the first bracket is a front spring hanger or bracket and the second bracket is a rear spring hanger or bracket. As indicated above, the leaf spring assembly is arranged to be connected to an axle extending transversely of said leaf spring assembly at a position intermediate the first and second ends of said leaf spring assembly. The ends of an upper leaf spring in each spring assembly comprise a spring eye, also termed an eye wrap.

According to the invention, the leaf spring assembly comprises two individual upper leaf springs arranged side-by-side with a predetermined spacing and extending between said first and second ends and at least one individual lower leaf spring arrangement arranged below the upper leaf springs. The

individual upper and lower leaf springs are preferably parabolic leaf springs, wherein the upper leaf springs are identical. Consequently, the upper leaf springs have the same dimensions, with respect to longitudinal extension and cross-sectional width and height, and the same spring characteristics.

- 5 The upper leaf springs are arranged to replace a conventional single leaf spring, where the total width of the assembled upper leaf springs is equal to the width of the replaced conventional single leaf spring. In this way the assembled upper leaf springs can be mounted to existing first and second brackets, with a minimum of modification. A consequence of this mounting is
- 10 that the upper springs are mounted side-by-side in the same plane and at the same height, that is, in a side view the projections of the springs will be exactly overlapping, both in active (loaded) mode and inactive (unloaded) mode. Also, as the upper springs are arranged to replace a single leaf spring, both the upper springs will be active simultaneously at all times in active
- 15 mode. In this context, a single leaf spring is defined as one solid, parabolic leaf spring extending between said brackets. The wording "assembled upper leaf springs" or "upper spring arrangement" is defined as a pair of spaced and substantially parallel, individual and parabolic leaf springs. The wording "lower spring arrangement" is defined as a single parabolic leaf spring, or
- 20 alternatively as a pair of spaced and substantially parallel, individual and parabolic leaf springs. A "leaf spring assembly" is defined as the combined assembly of upper and lower leaf springs or spring arrangements. The leaf spring assembly according to the invention preferably comprises parabolic springs, where the width and height of each parabolic leaf spring can vary
- 25 along its extension.

The individual upper leaf springs have a predetermined spacing and a width selected to provide a predetermined total width of the leaf spring assembly. The spacing can be constant or vary along the length of the leaf spring assembly. For instance, the spacing can vary depending on the selected

30 edge radius and cross-section of the individual leaf springs. Preferably, the

individual leaf springs has a width, thickness and spacing at any position along their extension between the spring eyes, selected so that the combined second moment of inertia of the leaf spring assembly is at least equal to that of a single leaf spring with the same total width at the same position.

- 5 The second moment of area I_{x1} ; I_{y1} in the x- and y-planes through a central longitudinal axis for a single, solid upper leaf spring with a rectangular cross section is defined as:

$$I_{x1} = \frac{b_1 h_1^3}{12} \quad (1)$$

$$I_{y1} = \frac{h_1 b_1^3}{12} \quad (2)$$

- 10 where b_1 is the width and h_1 is height, or thickness, of the solid leaf spring.

For the assembled upper leaf springs according to the invention, second moment of area I_{x2} ; I_{y2} is defined as:

$$I_{x2} = 2 \times \frac{b_2 h_2^3}{12} \quad (3)$$

$$I_{y2} = 2 \times \left(\left(\frac{h_2 b_2^3}{12} \right) + (b_2 h_2 e_2^2) \right) \quad (4)$$

- 15 where $e_2 = \left(\frac{b_1}{2} \right) - \left(\frac{b_2}{2} \right) \quad (5)$

where b_2 is the width and h_2 is height, or thickness, of each of the two individual upper leaf springs.

- 20 Figure 6 shows schematic cross-sections in a vertical plane, at right angles to the main direction of a prior art spring and a pair of assembled upper leaf springs according to the invention. The above measurements are indicated in

the respective cross-section, shown as comprising rectangular shapes for simplicity.

For example, using the above equations (1)-(5), a standard single leaf spring can have a width b_1 of 100 mm and a thickness h_1 of 10 mm. If the standard
5 spring is to be replaced by a spring assembly having the same total width b_1 of 100 mm, individual widths b_2 of 29 mm and a spacing b_3 of 42 mm, then the thickness h_2 must be at least 12 mm. In this case the increase in thickness is determined by l_{x2} , as the side-by-side spring arrangement only has a limited effect on l_{y2} in the vertical plane. In this example the vertical
10 plane is arranged at the thickest point of the assembled upper leaf springs, which point is located adjacent the attachment point of the axle in this case.

Using the above values it can be calculated that l_{x2} is marginally larger than l_{x1} while the value for l_{y2} is 111 % of the value for l_{y1} . Also, the total cross-sectional area A_2 of the two springs in the assembled upper leaf springs is
15 only 70 % of the cross-sectional area A_1 of the standard spring. Consequently, by using the assembled upper leaf springs according to the invention the weight saving on each side of the vehicle for the above example is approximately 30 %. From this it can be seen that the assembled upper leaf springs according to the invention can replace a standard solid
20 leaf spring, requiring an increase in thickness limited to a few millimetres. The standard brackets and spring shackles can also be retained, allowing both the upper springs be mounted in the same holder separated by a spacer. In order to achieve a substantial weight saving without a significant increase in spring thickness, the individual widths b_2 of the inventive leaf
25 springs is preferably, but not necessarily, selected in the range of 25 % to 45 % of the total width b_1 , more preferably within the range of 30 % to 40 % of the total width b_1 . The minimum size of the gap between the individual leaf springs is limited by the size or diameter of a locator pin used for maintaining the predetermined spacing between the upper leaf springs. The locator pin

itself can be used as a spacer, or be provided with a cylindrical spacer placed onto the locator pin.

According to a first example, the leaf spring assembly comprises two individual upper leaf springs arranged side-by-side with a predetermined spacing and at least one individual lower leaf spring arranged below the spacing between the upper leaf springs. According to the invention, the width of the at least one individual lower leaf spring is at least the same as the width of a single upper leaf spring. Also, the width of the at least one individual lower leaf spring is equal to or less than the upper leaf springs and the spacing. Each individual lower leaf spring is centred below the spacing between the upper leaf springs. The lower leaf spring located immediately below the upper leaf springs is in contact with said upper leaf springs at its ends and at a central portion thereof. At its ends the upper surfaces lower leaf spring can be in direct contact with the lower surface of the upper leaf spring. In this case the lower leaf spring can be located relative to the upper leaf spring by means of cooperating locating means, such as mating projections and recesses or grooves and ridges. The locating means have an extension in the longitudinal direction of the respective spring to allow a limited relative movement during loading of the spring assembly. Alternatively, the respective ends can be connected by a bushing comprising a resilient material, such as rubber, between metal sheets attached to the respective upper and lower spring. This bushing will provide a limited relative movement during loading of the spring assembly. At the central portion, the lower leaf spring and the upper leaf springs are separated by shims, preferably made from a suitable metal. The locator pin extending through the space between the upper leaf springs can pass through an opening in the lower leaf spring in order to fix the central portion of the lower leaf spring relative to the upper leaf springs.

According to a second example, the leaf spring assembly comprises two individual upper leaf springs arranged side-by-side with a predetermined

spacing and a lower leaf spring arrangement comprising two individual lower leaf springs arranged side-by-side with a predetermined spacing. Preferably, the width of the at least one lower leaf spring arrangement is equal to or less than a leaf spring arrangement arranged immediately above this lower leaf spring arrangement. The spacing between the at least one lower leaf springs is equal to or greater than the spacing between the upper leaf springs, depending on the width of the lower leaf springs. Each lower leaf spring is located centred and immediately below a respective upper leaf spring and is in contact with said upper leaf spring at its ends and between the ends at a central portion thereof. At its ends the upper surfaces of each lower leaf spring can be in direct contact with the lower surface of its respective upper leaf spring. In this case the lower leaf springs can be located relative to the upper leaf springs by means of cooperating locating means, such as mating projections and recesses or grooves and ridges. The locating means have an extension in the longitudinal direction of the respective spring to allow a limited relative movement during loading of the spring assembly. Alternatively, the respective ends of each upper and lower spring can be connected by a bushing comprising a resilient material, such as rubber, between metal sheets attached to the respective upper and lower spring. This bushing will provide a limited relative movement during loading of the spring assembly. At the central portion, the lower leaf springs and the upper leaf springs are separated by shims, preferably made from a suitable metal. The locator pin extending through the space between the upper leaf springs can pass through the space between the lower leaf springs in order to fix the central portion of each lower leaf spring relative to the upper leaf springs.

The size of the respective lower leaf spring can be selected in the same way as indicated for the upper leaf springs. The dimensions of the assembled lower leaf springs are selected to provide the same mechanical properties as a replaced conventional single leaf spring. In the above examples, the desired total loading of the wheel suspension and the required combined properties of the upper and lower leaf springs making up the spring assembly

are used for determining the dimensions of the at least one individual lower leaf spring. Each additional lower leaf spring arrangement is mounted to the lowermost leaf spring in the same way as indicated above. The width of each additional lower leaf spring is equal to or less than that of the lower leaf spring onto which it is mounted.

Each individual upper leaf spring comprises a spring eye, or eye wrap, at the first end the leaf spring assembly and is mounted on a common bushing. The bushing is substantially cylindrical and comprises a central first spacer with a width equal to the predetermined spacing. The first spacer can be in the form of a radial flange which has opposed annular contact surfaces in contact with a side surface of a spring eye on the respective upper leaf spring.

The individual upper leaf springs are arranged side-by-side with a predetermined spacing at the intermediate position, separated by second spacer with a width equal to the predetermined spacing. The second spacer is preferably part of an axle assembly used for attaching the transverse axle to the leaf spring assembly.

The invention also relates to a vehicle suspension comprising a pair of leaf spring assemblies arranged to extend longitudinally on opposed sides of a vehicle frame. Each leaf spring assembly has a first end pivotally connected to the vehicle with a first bracket attached rigidly to the frame at a first position. A second end of the leaf spring assembly is connected to the vehicle frame with a spring shackle pivotably connected to a second bracket attached rigidly to the frame at a second position. The spring shackle is provided to compensate for length changes of the leaf spring under load conditions. The suspension further comprises an axle extending transversely of the vehicle frame which axle is mounted to each leaf spring assembly at a position intermediate its first and second ends. A damper means, such as an air spring or suspension strut, is mounted between the axle and the vehicle frame. The leaf spring assembly according to the invention comprises two individual leaf springs arranged side-by-side with a predetermined spacing

and extending between said first and second ends and at least one individual lower leaf spring arranged below the spacing between the upper leaf springs.

As stated above, the upper leaf springs are arranged to replace a conventional single leaf spring, where the total width of the assembled upper leaf springs is equal to the width of the conventional single leaf spring. Further, the upper leaf springs have the same dimensions, with respect to longitudinal extension and cross-sectional width and height, and the same spring characteristics. The upper leaf springs of the assembly have a predetermined spacing and width selected to provide a predetermined total width of the leaf spring assembly. Also, the individual upper leaf springs have a width and thickness at any position along their extension selected so that the combined second moment of inertia I_x ; I_y of the assembled upper leaf springs is at least equal to that of a single leaf spring with the same total width at the same position. As stated above, the upper springs are mounted side-by-side in the same plane and at the same height, that is, in a side view the projections of the springs will be exactly overlapping, both in active (loaded) mode and inactive (unloaded) mode. Also, both the upper springs will be active simultaneously at all times in active mode.

An example describing the effect of the spaced parallel upper leaf springs on the mechanical properties of the spring assembly is given above. From the above it can be shown that the assembled upper leaf springs according to the invention can replace a standard solid leaf spring, requiring an increase in thickness limited to a few millimetres. The standard brackets and spring shackles can thus be retained, allowing for modification of existing vehicles. As indicated above, the leaf spring assembly comprises two individual upper leaf springs arranged side-by-side with a predetermined spacing and at least one individual lower leaf spring, or at least one pair of parallel lower leaf springs with a predetermined spacing, arranged below the upper leaf springs.

According to a first example, the width of the at least one individual lower leaf spring is at least the same as the width of a single upper leaf spring. Also, the

width of the at least one individual lower leaf spring is equal to or less than the upper leaf springs and the spacing. Each individual lower leaf spring is centred below the spacing between the upper leaf springs.

According to a second example, the width of the at least one pair of lower
5 springs is equal to or less than a leaf spring arrangement arranged immediately above this lower leaf spring arrangement. In this case each lower leaf spring is centred relative to its respective upper leaf spring. The spacing between the at least one lower leaf springs is equal to or greater than the spacing between the upper leaf springs, depending on the width of
10 the lower leaf springs.

Each individual upper leaf spring comprises a spring eye at the first end the leaf spring assembly, and that each spring eye is mounted on a common bushing comprising a central first spacer with a width equal to the predetermined spacing. The individual upper leaf springs are arranged side-
15 by-side with a predetermined spacing at the intermediate position, separated by second spacer forming part of an axle assembly connecting the axle to the leaf spring assembly.

The invention is also related to a vehicle provided with a suspension comprising at least one leaf spring assembly as described in the above
20 examples.

A vehicle comprising a suspension provided with a leaf spring assembly according to the invention does not require to be secured by a safety system or safety device at each end. This is required for a standard leaf spring in case of spring failure. For a steered front axle, the safety eye provided at the
25 front end to block a front axle dislocation can be eliminated. Similarly, the steel belt or blocker provided at the rear end can be dispensed with. By eliminating this safety system both cost and weight can be decreased.

A spring breakage in a spring assembly according to the invention will still leave one individual leaf spring intact. In this way, an axle dislocation that

would normally lead to problems to maintain steering control after a standard leaf spring breakage can be avoided. After a spring breakage the vehicle can still be driven and can make its own way to a service facility.

BRIEF DESCRIPTION OF DRAWINGS

5 The invention will be described in detail with reference to the attached figures. It is to be understood that the drawings are designed solely for the purpose of illustration and are not intended as a definition of the limits of the invention, for which reference should be made to the appended claims. It should be further understood that the drawings are not necessarily drawn to
10 scale and that, unless otherwise indicated, they are merely intended to schematically illustrate the structures and procedures described herein.

Figure 1 shows a schematic commercial vehicle suspension with a leaf spring assembly according to the invention;

15 Figure 2A shows a schematic perspective view of a prior art vehicle front suspension with a standard leaf spring;

Figure 2B shows a schematic perspective view of a vehicle front suspension with a leaf spring assembly according to the invention;

20 Figure 3A shows a schematic side view of a spring hanger attachment for a front end of a leaf spring assembly;

Figure 3B shows a schematic cross-section of the spring hanger attachment in Figure 3A;

Figure 3C shows a perspective view of the spring hanger attachment in Figure 3A;

25 Figure 4 shows a schematic exploded perspective view of an axle attachment a leaf spring assembly according to the invention;

Figure 5A shows a cross-section through the axle attachment in Fig. 4;

Figure 5B shows a cross-section through an alternative axle attachment.

Figure 6 shows schematic cross-sections in a vertical plane, at right angles to the main direction of a prior art spring and a pair of assembled upper leaf springs according to the invention.

EMBODIMENTS OF THE INVENTION

Figure 1 shows a schematic commercial vehicle 101 in the form of a tractor unit. The commercial vehicle 101 comprises a chassis 102 and a driver's cab 103 mounted on the chassis. Underneath the driver's cab 103 is an internal combustion engine 104, which acts on a pair of drive wheels 106 of the commercial vehicle 101 by way of a drive train 105 comprising a clutch and a manual transmission or an automatic transmission. The internal combustion engine 104 comprises an exhaust gas system 107 with a first and a second muffler connected to a tailpipe (not shown) which expels the exhaust gases to the atmosphere. The cab 103 is also supported by a pair of steerable front wheels 108. The steerable wheels are mounted on a rigid axle 109 attached to a suspension arrangement 110. The suspension arrangement 110 comprises a leaf spring assembly 111 according to the invention supported by a front bracket 112 and a rear bracket 113 with a spring shackle 114. In the example shown in Figure 1, the spring assembly is connected to the frame 102 by an air spring or bellows 115. The suspension arrangement will be described in further detail below.

Figure 2A shows a schematic perspective view of a vehicle front suspension 201 comprising a standard prior art single leaf spring on opposite sides of a vehicle frame 202. Identical and/or mirrored components provided on opposite sides of the frame have been given the same reference number. The suspension on the near side of the frame is described below.

The figure shows a flat leaf spring front suspension 201 provided with a solid single leaf spring 203 with a front eye wrap 204 and a rear eye wrap 205. The front eye wrap 204 is connected to a spring hanger connection 206, which is attached to a spring hanger 207 attached to the frame 202. The rear eye wrap 205 is connected a spring shackle connection 208, which is attached to a spring shackle 210 connected to a spring shackle attachment 211. The spring shackle attachment 211 is attached to the frame 202. A rigid front steerable axle 212 is attached to the single leaf spring 203 by an axle attachment 213. The flat leaf spring front suspension 201 shown in Fig. 2A is provided with a damper element 214, which damper element 214 is connected to the frame 203 and to the solid front steerable axle 212 at or near the axle attachment 213. The figure shows a damper element in the form of a suspension strut, but a bellows can also be used.

Figure 2B shows a schematic perspective view of a vehicle front suspension 219 comprising a spring assembly according to the invention on opposite sides of a vehicle frame 202. Identical and/or mirrored components provided on opposite sides of the frame have been given the same reference number. Also, component parts used in common with the front suspension 201 in Figure 2A share the same reference number. The suspension on the near side of the frame is described below.

The figure shows a vehicle spring front suspension 219 provided with a leaf spring assembly comprising two individual upper leaf springs 221, 222 arranged side-by-side with a predetermined spacing and a lower spring arrangement in the form of an individual lower leaf spring 220. The individual lower leaf spring 220 is arranged centred below the spacing between the upper leaf springs 221, 222. An alternative example showing a lower spring arrangement comprising two lower leaf springs arranged side-by-side with a predetermined spacing will be described in connection with Figure 5B below. The parallel upper leaf springs 221, 222 each have a front eye wrap or spring eye 223, 224 and a rear eye wrap or spring eye 225, 226. The front eye

wraps 223, 224 are connected to a common spring hanger connection 227, which is attached to a spring hanger 207 attached to the frame 202. The spring hanger connection will be described in further detail in connection with Figures 3A-3C. The rear eye wraps 225, 226 are connected a common
5 spring shackle connection 208, which is attached to a spring shackle 210 connected to a spring shackle attachment 211. The spring shackle attachment or bracket 211 is attached to the frame 202. A rigid front steerable axle 212 is attached to the individual upper leaf springs 221, 222 by an axle attachment 229. The axle attachment will be described in further
10 detail in connection with Figure 4. The leaf spring front suspension 219 shown in Fig. 2B is provided with a damper element 214, which damper element 214 is connected to the frame 203 and to the solid front steerable axle 212 at or near the axle attachment 229. The figure shows a damper element in the form of a suspension strut, but an air spring or bellows can
15 also be used.

Referring now to Figures 2A and 3A-3C, the respective front end of the individual upper leaf springs 221, 222 are each attached to a common spring hanger connection 227. The front eye wrap or spring eye 223, 224 of each individual upper leaf spring 221, 222 is attached around a pivot bushing 301
20 in the spring hanger connection 227. The spring hanger connection 227 is connected to a spring hanger 207 attached to frame 202. The pivot bushing 301 is disposed between individual upper leaf springs 221, 222 and the spring hanger 207 to accommodate motion between these two components and to isolate the vehicle from shock.

25 While the present invention is being illustrated as having only one pivot bushing 301 disposed between individual upper leaf springs 221, 222 and frame 202, it is within the scope of the present invention to have two or possibly three or more pivot bushings disposed between individual upper leaf springs 221, 222 and frame 202 if desired. In addition, while the present
30 invention is being described as possibly having three identical pivot bushings

301 disposed between individual upper leaf springs 221, 222 and frame 202, it is within the scope of the present invention to use a different design for each bushing position if desired.

5 The spring hanger attachment being illustrated in Figures 3A-3C is intended for a front end of the spring assembly, which is connected to the frame 202 by a spring hanger 207. However, the solution can also be used for the rear end of the spring assembly, which is connected to the frame 202 by a shackle 210 disposed between the rear loops of the individual upper leaf springs 221, 222 and a spring shackle attachment 211 connected to the
10 frame 202.

The spring hanger connection 227 referred to in Figure 2B is provided with a pivot bushing 301 comprising an inner metal component 302 and a pair of elastomeric bushings 303, 304 with associated outer metal sleeves 305, 306. Inner metal component 302 includes a generally cylindrical centre section
15 307 and a pair of generally rectangular sections 308, one section 308 being disposed at each end of the centre section 307. Each rectangular section 308 has an aperture 309 extending through it which is used to secure pivot bushing 301 to the appropriate spring hanger connection, or spring hanger bracket. The centre section 307 is provided with a central radial flange 310,
20 which forms a spacer. The width of the radial flange 310 is equal to the desired spacing between the individual upper leaf springs 221, 222. Also, the radial extension of the radial flange 310 is preferably equal to or less than the thickness of the adjacent sections of the individual upper leaf springs 221, 222. The radial flange can be a part of a forged centre section or comprise a
25 separate ring-shaped component welded or otherwise attached to the centre section. While the centre section 307 is illustrated as a solid generally cylindrical section, it is within the scope of the present invention to utilize a tubular inner metal design, a ball shaped pin or any other design, if desired. If a tubular inner metal is used, generally rectangular sections 308 can be
30 eliminated and a through bolt can be used to secure the pivot bushing to the

frame. In this case the flange can comprise a separate ring-shaped component as indicated above.

The elastomeric bushings 303, 304 are annular members which are located between the inner metal component 302 and their respective outer metal sleeve 305, 306 on either side of the radial flange 310. The free diameter of elastomeric bushings 303, 304 is larger than the space between inner metal component 302 and outer metal sleeves 305, 306 such that a specified percent compression is applied to the elastomeric bushings 303, 304 when assembled into the pivot bushing 301. The assembly of the pivot bushing 301 can be accomplished by first bonding elastomeric bushings 303, 304 to the inner metal component 302 on either side of the flange 310 and then inserting this combination into each outer metal sleeves 305, 306. Another method of assembling pivot bushing 301 would be to first bond elastomeric bushings within each outer metal sleeve 305, 306 and then inserting the inner metal component 302 into the respective elastomeric bushing 303, 304. The present invention can use either method of assembly. The elastomeric bushings can be bonded to either the inner metal component 302 or the outer metal sleeves 305, 306, it can be bonded to both inner metal component 302 and the outer metal sleeves 305, 306 or it can be assembled to inner metal component 302 or outer metal sleeve 305, 306 without bonding.

According to a first example, each outer metal sleeve 305 is part of a cup shaped body, as indicated on the left hand side of the flange 310 in Figure 3B. In this case, two identical and opposed cup shaped bodies would be assembled onto the inner metal component 302 with the elastomeric bushings 303, 304 from opposite ends of said inner metal component 302. The cup shaped bodies are formed by the outer metal sleeve 305 and a radial wall 311 located at the outer, opposed ends of the respective outer metal sleeves 305. The radial wall 311 extends towards, but not into contact with, the centre section 307.

According to a second example, shown in Figure 3B, the outer metal sleeves 305, 306 are part of a first and a second cup shaped body on opposite sides of the flange 310. The first cup shaped body comprises a first sleeve in the form of the outer metal sleeve 305 and a radial wall 311 located at the outer end of the outer metal sleeves 305. The radial wall 311 extends towards, but not into contact with, the centre section 307. The first cup shaped body encloses the first elastomeric bushings 303. The second cup shaped body comprises a second sleeve 306 and a cover 312 in the form of an annular wall 313 which has an outwardly extending flange 314 at the outer end of the second sleeve 306. The second sleeve 306 can also include an optional stepped portion 315 adjacent its outer end in order to compensate for spring distortion. The cup shaped body 306, 313 is assembled over the second elastomeric bushing 304. Because the flange 314 extends outwardly, the elastomeric bushing 304 can be assembled from this flanged end. The outwardly extending flange 314 is formed prior to the assembly of the cup shaped body 306, 313 and the second elastomeric bushing 304. The flanged end of the cup shaped body 306, 313 allows the assembly of the cup shaped body and the elastomeric bushing 304. Once these two components are assembled, the cover 312 is secured to the outwardly extending flange 314 to complete the encapsulation of the elastomeric bushing 304.

The annular wall 313 has a ring portion 320, a contoured portion 321 and a plurality of radially outwardly extending crimp portions 322. The ring portion 320 is disposed adjacent the flange 314 and the crimp portions 322 are bent around flange 314 as shown in Figure 3B to secure the annular wall 313 to the second sleeve 306 to form the cup shaped body. The contoured portion 321 provides the mating surface to the elastomeric second bushing 304 and will thus control the spring rate for the pivot bushing 301 by controlling the encapsulation and the deformation of the elastomeric bushing 304. Another advantage associated with the pivot bushing 301 is that axial motion of the pivot bushing 301 with respect to the individual upper leaf springs 221, 222 is limited in one direction due to flange 314 and cover 312. Because the axial

loading for a pivot bushing is significantly higher in one direction, the pivot bushing 301 can be assembled to the individual upper leaf springs 221, 222 in the appropriate direction in such a way that the flange 314 and the cover 312 can resist the significantly higher axial loading.

- 5 When adapting the front leaf spring attachment from fitting a standard single leaf spring to fitting a leaf spring assembly according to the invention, it is merely required to replace the standard spring hanger connection with a spring hanger connection as shown in Figures 3A-3C. As indicated above, this spring hanger connection can also be used for the rear leaf spring
10 attachment.

Figure 4 shows an exploded perspective view of an axle attachment 401 for an axle assembly 402 connected to a leaf spring assembly according to the invention. The axle assembly is intended for a commercial vehicle with single a front axle 403 having a leaf spring assembly comprising a pair of spaced
15 parallel upper leaf springs 404, 405 and a lower leaf spring 421 on each side (one shown) of a vehicle frame (see Figure 2B).

The axle 403 preferably has an enlarged mounting pad 406 in the area adjacent the end of the axle. The basic purpose for the pad 406 is to provide a mounting location for the leaf springs 404, 405, 421. Since the weight of a
20 truck is resting on the upper leaf springs 404, 405 and the lower leaf spring 421, the pad 406 is basically receiving a weight bearing load. As is well-known, U-bolt clamps 407, 408 are adapted to engage a spring block 409 on top of the springs 404, 405 and clamp the parts of the assembly together.

The U-bolts clamps 407, 408 pass through corresponding apertures 410 in
25 the pad 406 with a loose fastener fit and are fastened by nuts (not shown) at the underside of the pad 406. All the U-bolts 407, 408 are intended to ensure the upper leaf springs stay centred relative to the pad 406 and are clamped down to prevent relative movement. There is no critical locating function associated with the U-bolts 407, 408. The upward force of the truck body

against the U-bolts 407, 408 acting through the upper leaf springs 404, 405 and the lower leaf spring 421 is limited to relatively minor upward momentum and centrifugal forces as the truck moves over bumps and around curves.

A single locating aperture 411 is formed in the standard axle 403 at the pad 406. This is used to allow the upper leaf springs 404, 405 and the lower leaf spring 421 to be located with respect to the pad 406 during assembly. A locating pin 412 mounted in the aperture 411 extends upwards from the pad 406 and is fitted with a cylindrical spacer 413 placed onto the locating pin 412. The locating pin 412 and the spacer 413 passes through an aperture (Fig.5) in the lower leaf spring 421 and between the spaced parallel upper leaf springs 404, 405. In the area of the axle attachment 401, below the spring block 409, the spaced parallel upper leaf springs 404, 405 and the lower leaf spring 421 are separated by shims (Fig.5). A bumper 414 is provided on the top of the spring block 409 for absorbing the shock in the event that the vehicle load causes the leaf springs 404, 405, 421 to bottom out. The axle attachment 401 further comprises a mounting plate 415 with front and rear skirt portions 416, 417, respectively, extending downwards into contact with the front and rear surfaces of the pad 406. In the example shown, the mounting plate 415 is provided with an attachment 418 for a suspension strut ("214"; Fig.2B), but it would also be possible to use an air spring for this purpose.

Located centrally in the mounting plate 415 is a locating aperture 419 aligned with the central aperture 411 on the mounting pad 406. The pin 412 is made from hardened steel and has a shear modulus high enough to hold the parts rigidly together. The size of the pin 412 and the corresponding locating apertures 411, 419 is calculated to the size of the loading on the axle assembly. The U-bolt clamps 407, 408 extend through the apertures 420 in the plate 415 with a loose fastener fit to assure ease of assembly of these parts. The upper spring block 409 and the U-bolt clamps 407, 408 are not

required to perform any resisting function and thus can be standard parts previously used.

In assembling the leaf springs 404, 405, 421 on a standard axle 403, the mounting plate 415 is placed over the locating pin 412 and the cylindrical spacer 413. The locating pin 412 and the cylindrical spacer 413 will extend
5 out of the locating aperture 419, through an aperture (Fig.5) in the lower leaf spring 421 and into a predetermined spacing between the parallel upper leaf springs 404, 405. The upper surface of the cylindrical spacer 413 is preferably located level with or below the upper surface of the respective
10 upper springs 404, 405. The locating pin 412 extends upwards from the pad 406 level with or above the upper surface of the cylindrical spacer 413. In the latter case, a recess is provided in the lower surface of the spring block 409. The cylindrical spacer 413 can be attached to the locating pin 412 by means of a force fit or by means of cooperating threads.

15 Alternatively, the cylindrical spacer can be placed onto the locating pin and into contact with the upper surface of the plate. According to a further alternative, the cylindrical spacer can be an integral part of the plate.

When adapting axle attachment 401 from fitting a standard single leaf spring to fitting a leaf spring assembly according to the invention, it is merely
20 required to enlarge the locating aperture in the mounting plate and to attach the cylindrical spacer to the locating pin. The cylindrical spacer can extend through the lower leaf spring, as indicated in Figure 5, or merely be placed in the space between the upper leaf springs.

Figure 5A shows a cross-section through the axle assembly 401 between the
25 U-bolt clamps 407, 408. The figure shows the U-bolt clamps 407, 408 holding the spring block 409, the upper leaf springs 404, 405, the lower leaf spring 421, shims 422 separating the upper and lower springs and the plate 415 onto the axle 403. The U-bolt clamps 407, 408 are fastened by nuts 425, 426 at the underside of the pad 406. The components are located by the locating

pin 412 and the cylindrical spacer 413. The locating pin 412 extends upwards into a recess is provided in the lower surface of the spring block 409. The cylindrical spacer 413 is located immediately below the upper surface of the respective upper spring 404, 405.

- 5 The lower leaf spring 421 is located immediately below the upper leaf springs 404, 405 and in contact with said upper leaf springs via metal shims 422 at a central portion, as described above. At its ends the upper surfaces of the lower leaf spring are in direct contact with the lower surfaces of the upper leaf springs. In this case the lower leaf spring is located relative to the upper leaf
10 springs by means of cooperating locating means, such as mating projections and recesses or grooves and ridges (not shown). Such locating means are well known in the art and will not be described in further detail. The locating means have an extension in the longitudinal direction of the respective spring to allow a limited relative movement during loading of the spring assembly.
- 15 Alternatively, the respective ends of the upper and lower springs are connected by a bushing comprising a resilient material, such as rubber, cured between metal sheets. The bushing is attached to the respective upper and lower springs. Such a bushing will provide a limited relative movement during loading of the spring assembly.
- 20 Figure 5B shows a cross-section through an alternative axle assembly 501 between a pair of U-bolt clamps 507, 508. Figure 5B is substantially identical to Figure 5A, with the difference that the single lower spring has been replaced by a pair of parallel, spaced lower springs 521, 523. Figure 5B shows the U-bolt clamps 507, 508 holding a spring block 509, the upper leaf
25 springs 504, 505, the lower leaf springs 521, 523, shims 522, 524, separating the upper and lower springs, and a plate 515 onto an axle 503. The U-bolt clamps 507, 508 are fastened by nuts 525, 526 at the underside of a pad 506. The components are located by a locating pin 512 attached to the pad 506 and a cylindrical spacer 513 fitted onto the locating pin 512. Where the
30 spacing between the upper and lower leaf springs differ, the locating pin can

be stepped (not shown) to accommodate for a larger spacing between the lower leaf springs. The locating pin 512 extends upwards into a recess is provided in the lower surface of the spring block 509. The cylindrical spacer 513 is located immediately below the upper surface of the respective upper spring 504, 505.

The lower leaf springs 521, 523 are located immediately below the upper leaf springs 504, 505 and in contact with said upper leaf springs via metal shims 522, 524 at a central portion, as described above. At their respective ends the upper surfaces of the lower leaf springs are in direct contact with the respective lower surface of the upper leaf springs. In this case each lower leaf spring is centred relative to its respective upper leaf spring and is located by means of cooperating locating means, such as mating projections and recesses or grooves and ridges (not shown). The locating means have an extension in the longitudinal direction of the respective spring to allow a limited relative movement during loading of the spring assembly. Alternatively, the respective ends are connected by a bushing comprising a resilient material, such as rubber, cured between metal sheets. The bushing is attached to the respective upper and lower springs. Such a bushing will provide a limited relative movement during loading of the spring assembly.

The invention is not limited to the above embodiments, but may be varied freely within the scope of the appended claims.

CLAIMS

1. A vehicle suspension leaf spring assembly arranged to be mounted in the longitudinal direction of the vehicle, on both sides thereof, said leaf spring assembly having a first end (223, 224), which is arranged for pivotal connection to a first bracket (207) on the vehicle; and a second end (225, 226), which is arranged for connection to a spring shackle (210) on the vehicle, wherein said leaf spring assembly is arranged to be connected to an axle (212) extending transversely of said leaf spring assembly at a position intermediate the first and second ends of said leaf spring assembly, characterized in that the leaf spring assembly comprises an upper spring arrangement comprising two individual upper leaf springs (221, 222; 404, 405; 504, 505) arranged side-by-side in the same plane with a predetermined spacing and extending between said first and second ends (223, 224; 225, 226), and at least one lower spring arrangement (220; 421; 521, 523) arranged below the upper leaf springs (221, 222; 404, 405; 504, 505).
2. The leaf spring assembly according to claim 1, characterized in that said upper leaf springs (221, 222; 404, 405; 504, 505) are arranged to replace a single leaf spring, where the total width of the upper leaf springs (221, 222; 404, 405; 504, 505) and the spacing is equal to the width of the single leaf spring.
3. The leaf spring assembly according to claim 1 or 2, characterized in that each individual upper leaf spring (221, 222; 404, 405; 504, 505) has a predetermined width selected within the range 25 % to 45 % of the total width of the leaf spring assembly.
4. The leaf spring assembly according to any one of the above claims, characterized in that the individual upper leaf springs (221, 222; 404, 405; 504, 505) have a width and thickness at any position along their extension selected so that the combined second moment of inertia (I_x ; I_y) of

the upper leaf springs (221, 222; 404, 405; 504, 505) in the vertical and horizontal planes is at least equal to that of a single upper leaf spring (221, 222; 404, 405; 504, 505) with the same total width.

- 5 5. The leaf spring assembly according to any one of the above claims, characterized in that each individual upper leaf spring comprises a spring eye (223, 224; 225, 226) at the first and second ends of the leaf spring assembly, and that each spring eye (223, 224; 225, 226) is mounted on a common bushing (301) comprising a central first spacer (310) with a width equal to said predetermined spacing.
- 10 6. The leaf spring assembly according to any one of the above claims, characterized in that the individual upper leaf springs (221, 222; 404, 405; 504, 505) are arranged side-by-side with a predetermined spacing at the intermediate position, separated by an intermediate spacer (413) with a width equal to said predetermined spacing.
- 15 7. The leaf spring assembly according to any one of the above claims 1-6, characterized in that the lower spring arrangement comprises at least one individual lower leaf spring (220; 421) arranged below the spacing between the upper leaf springs (221, 222; 404, 405; 504, 505).
- 20 8. The leaf spring assembly according to claim 7, characterized in that the width of the at least one individual lower leaf spring (220; 421) is at least the same as the width of a single upper leaf spring (221, 222; 404, 405; 504, 505).
- 25 9. The leaf spring assembly according to any one of the above claims 7-8, characterized in that the width of the at least one individual lower leaf spring (220; 421) is equal to or less than the upper leaf springs (221, 222; 404, 405; 504, 505) and the spacing.
10. The leaf spring assembly according to any one of the above claims 7-9, characterized in that each individual lower leaf spring (220; 421) is

centred below the respective upper leaf spring (221, 222; 404, 405; 504, 505).

11. The leaf spring assembly according to any one of the above claims 1-6, characterized in that the at least one lower leaf spring arrangement
5 (521,523) comprises two individual lower leaf springs (221, 222; 404, 405; 504, 505) arranged side-by-side with a predetermined spacing.

12. The leaf spring assembly according to claim 11, characterized in that the width of the at least one lower leaf spring arrangement (521,523) is equal to or less than a leaf spring arrangement
10 arranged immediately above this lower leaf spring arrangement (521,523).

13. The leaf spring assembly according to any one of the above claims, characterized in that the spacing between the at least one lower leaf springs (221, 222; 404, 405; 504, 505) is equal to or greater than the spacing between the upper leaf springs (221, 222; 404, 405; 504, 505).

15 14. A vehicle suspension comprising a pair of leaf spring assemblies arranged to extend longitudinally on opposed sides of a vehicle frame (202), each leaf spring assembly having a first end (223, 224) pivotally connected to the vehicle with a first bracket (207) attached rigidly to the frame (202) at a first position; and a second end (225, 226) connected to the vehicle frame
20 with a spring shackle (210) pivotably connected to a second bracket (211) attached rigidly to the frame (202) at a second position, in order to compensate for length changes of the leaf spring under load conditions, said suspension further comprising an axle (212) extending transversely of the vehicle frame which axle is mounted to each upper leaf spring (221, 222;
25 404, 405; 504, 505) at a position intermediate its first and second ends (223, 224; 225, 226), and a damper means (114; 214) mounted between the axle (109; 212) and the vehicle frame (102; 202), characterized in that said leaf spring assembly comprises two individual upper leaf springs (221, 222; 404, 405; 504, 505) arranged side-by-side in the same plane with a

predetermined spacing and extending between said first and second ends (223, 224; 225, 226), and at least one lower spring arrangement (220; 421; 521, 523) arranged below the upper leaf springs (221, 222; 404, 405; 504, 505).

- 5 15. The vehicle suspension according to claim 14, characterized in that said upper leaf springs (221, 222; 404, 405; 504, 505) are arranged to replace a single leaf spring, where the total width of the upper leaf springs (221, 222; 404, 405; 504, 505) and the spacing is equal to the width of the single leaf spring.
- 10 16. The vehicle suspension according to claim 14 or 15, characterized in that each individual upper leaf spring (221, 222; 404, 405; 504, 505) has a predetermined width selected within the range 25 % to 45 % of the total width of the leaf spring assembly .
- 15 17. The vehicle suspension according to any one of the above claims 14-16, characterized in that the individual upper leaf springs (221, 222; 404, 405; 504, 505) have a width and thickness at any position along their extension selected so that the combined second moment of inertia (I_x ; I_y) of the upper leaf springs (221, 222; 404, 405; 504, 505) in the vertical and horizontal planes is at least equal to that of a single leaf spring with the same
- 20 total width at the same position.
18. The vehicle suspension according to any one of the above claims 14-17, characterized in that each individual upper leaf spring (221, 222; 404, 405; 504, 505) comprises a spring eye (223, 224; 225, 226) at the first end of the leaf spring assembly , and that each spring eye is mounted on a
- 25 common bushing (301) comprising a central first spacer (310) with a width equal to the predetermined spacing.
19. The vehicle suspension according to any one of the above claims 14-18, characterized in that the individual upper leaf springs (221, 222; 404, 405; 504, 505) are arranged side-by-side with a predetermined spacing

at the intermediate position, separated by a intermediate spacer (413) forming part of an axle attachment connecting the axle (212; 403) to the leaf spring assembly .

20. The vehicle suspension according to any one of the above claims 14-19,
5 characterized in that the lower spring arrangement comprises at least one individual lower leaf spring (220) arranged below the spacing between the upper leaf springs (221, 222; 404, 405; 504, 505).

21. The vehicle suspension according to any one of the above claims 14-20,
characterized in that the width of the at least one individual lower
10 leaf spring (220; 421) is at least the same as the width of a single upper leaf spring (221; 222).

22. The vehicle suspension according to any one of the above claims 14-21,
characterized in that the width of the at least one individual lower
leaf spring (220; 421) is equal to or less than the upper leaf springs (221,
15 222; 404, 405; 504, 505) and the spacing.

23. The vehicle suspension according to any one of the above claims 14-22,
characterized in that each individual lower leaf spring (220; 421) is
centered below the spacing between the upper leaf springs (221, 222; 404,
405; 504, 505).

20 24. The vehicle suspension according to any one of the above claims 14-19,
characterized in that the at least one lower leaf spring arrangement (521,523) comprises two individual lower leaf springs (221, 222; 404, 405; 504, 505) arranged side-by-side with a predetermined spacing.

25 25. The vehicle suspension according to claim 24, characterized in
that the width of the at least one lower leaf spring arrangement (521,523) is
equal to or less than a leaf spring arrangement arranged immediately above
this lower leaf spring arrangement (521,523).

26. The vehicle suspension according to any one of the above claims 24 or 25, characterized in that the spacing between the at least one lower leaf springs (221, 222; 404, 405; 504, 505) is equal to or greater than the spacing between the upper leaf springs (221, 222; 404, 405; 504, 505).
- 5 27. Vehicle, characterized in that said vehicle is provided with a suspension according to any one of claims 14-26.

1/6

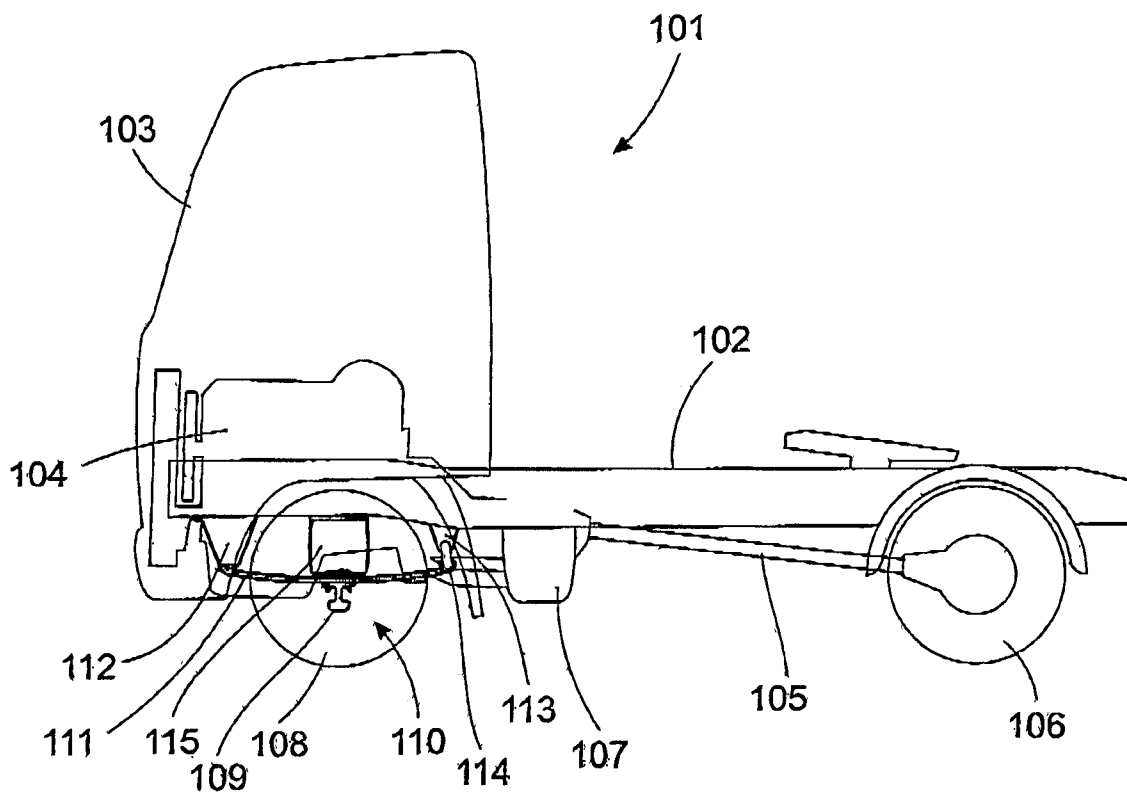


Fig.1

2/6

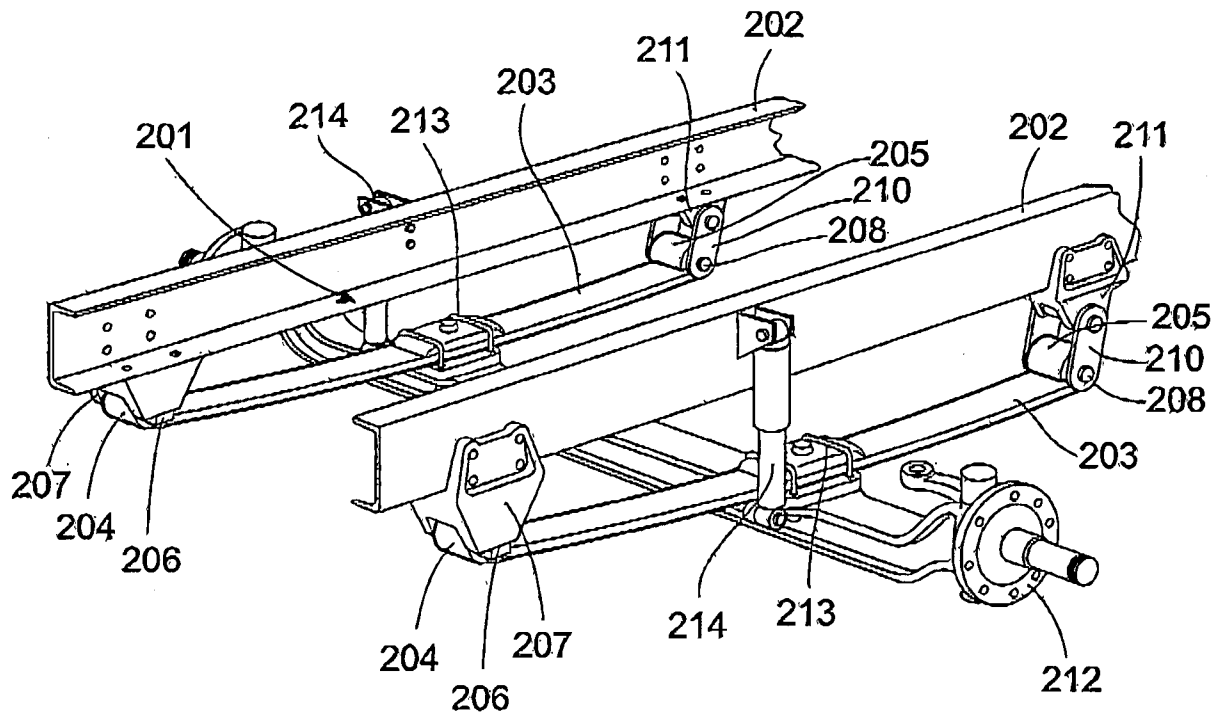


Fig.2A
(PRIOR ART)

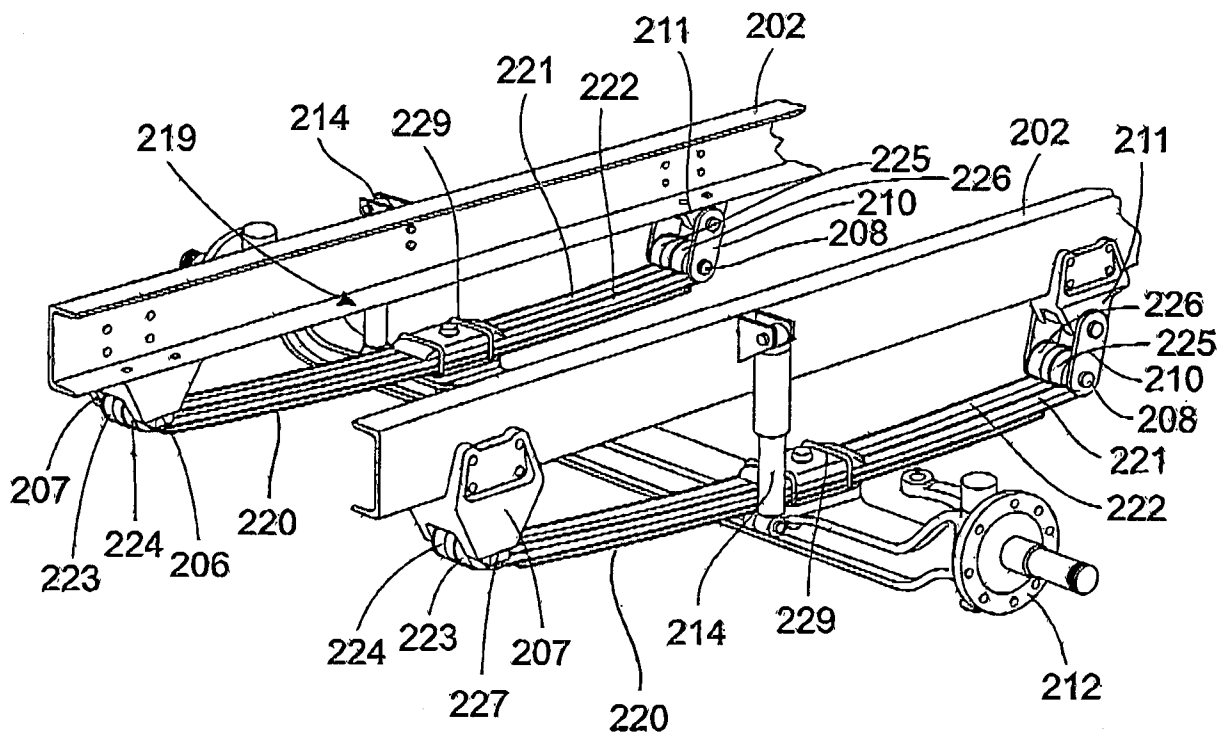


Fig.2B

3/6

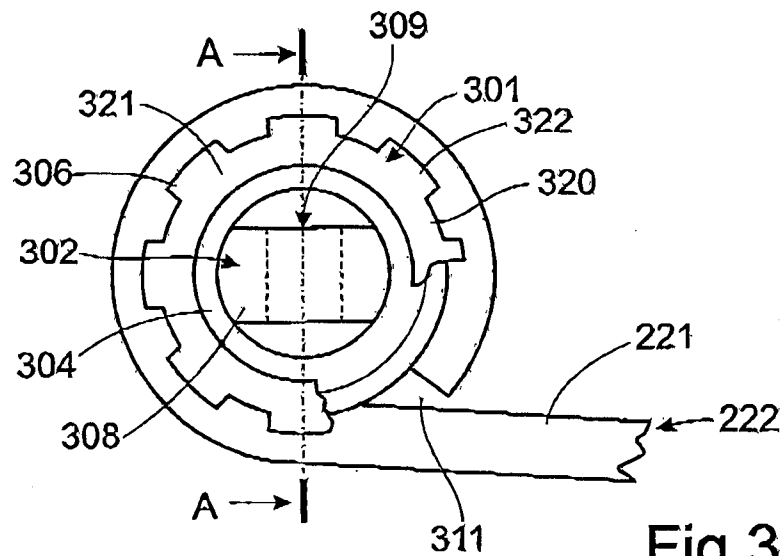


Fig.3A

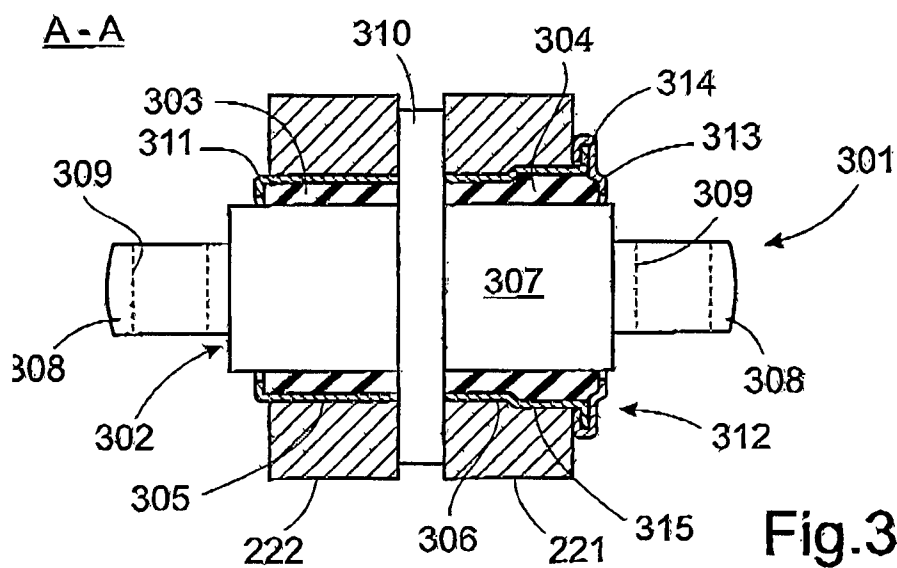


Fig.3B

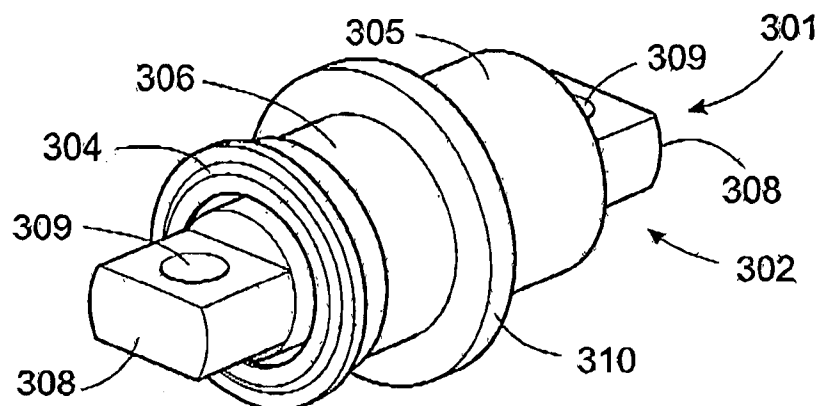


Fig.3C

4/6

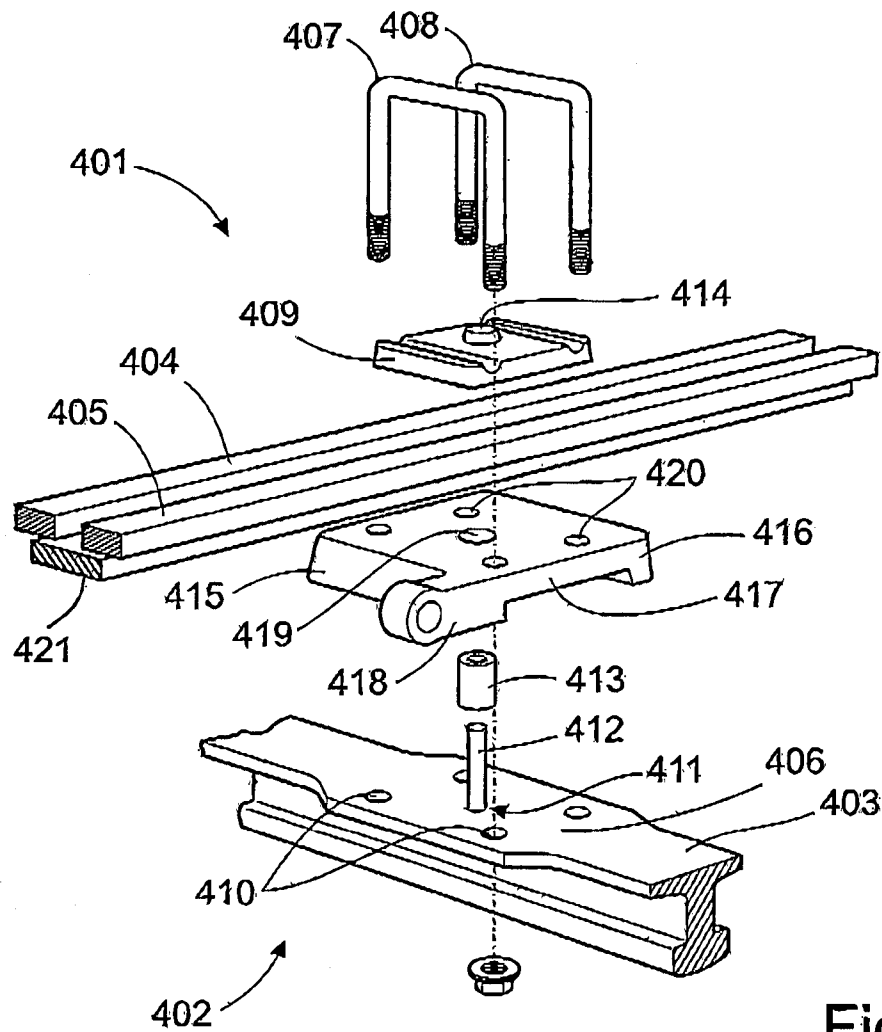


Fig.4

5/6

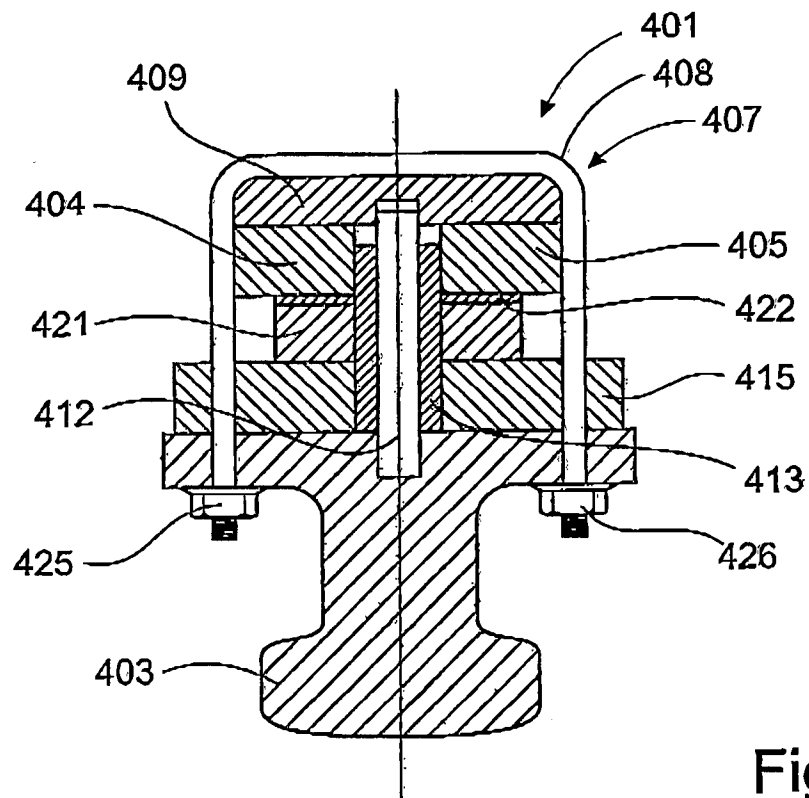


Fig.5a

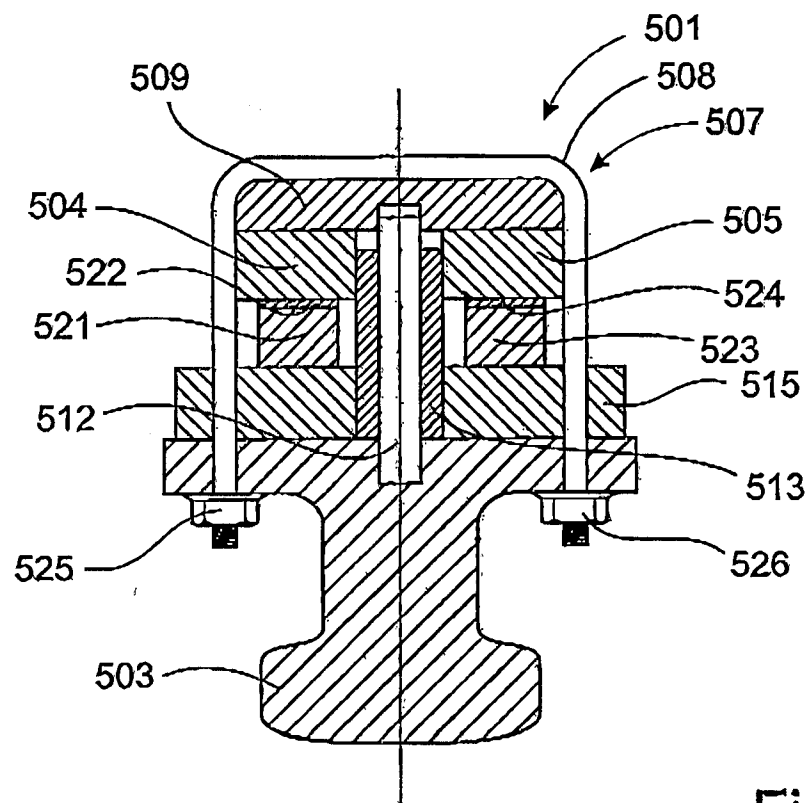


Fig.5b

6/6

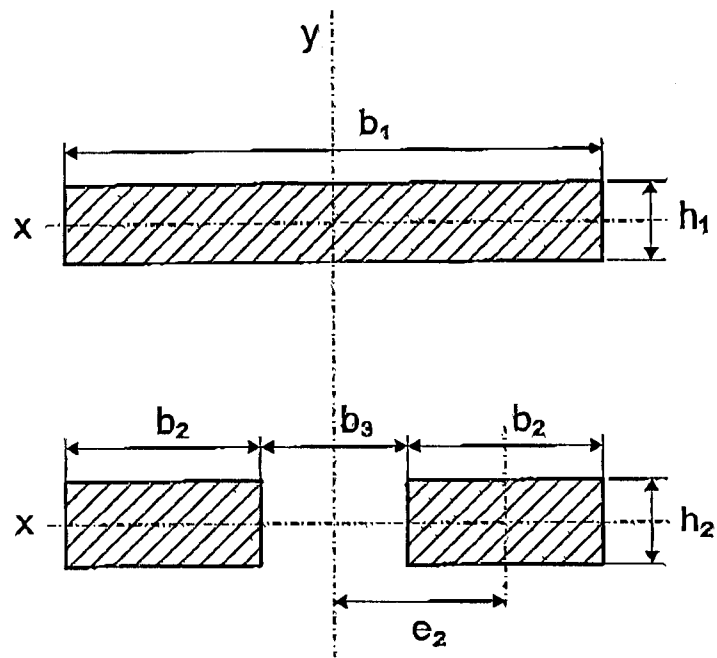


Fig.6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2014/000087

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B60G, F16F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data, COMPENDEX, INSPEC, SAE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 1244843 A (LAMBERT ALFRED WALTER), 2 September 1971 (1971-09-02); page 3, line 129 - page 4, line 15; figures --	1-27
Y	US 20040004337 A1 (HARSHBARGER M CHAD), 8 January 2004 (2004-01-08); abstract; figure 3 --	1-27
A	GB 191319657 A (BUGATTI ETTORE), 15 January 1914 (1914-01-15); figures --	1-27
A	US 3975005 A (DUCHEMIN MICHEL LEON), 17 August 1976 (1976-08-17); figures --	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

17-11-2014

Date of mailing of the international search report

17-11-2014

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Carl Fröderberg

Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/SE2014/000087

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3190632 A (BELA BARENYI), 22 June 1965 (1965-06-22); figure 4 --	1-27
A	US 4460167 A (SILVIS JOHN E ET AL), 17 July 1984 (1984-07-17); figures 1,6 --	1-27
A	JP 3125039 A (HORI KIRI SPRING MFL), 28 May 1991 (1991-05-28); figures --	1-27
A	WO 2010067146 A1 (RENAULT TRUCKS ET AL), 17 June 2010 (2010-06-17); figure 2 --	1-27
A	DE 102005060110 A1 (MAN NUTZFAHRZEUGE AG), 28 June 2007 (2007-06-28); figures 1,2 --	1-27
A	US 4519591 A (BUSH JOHN W ET AL), 28 May 1985 (1985-05-28); figures 1,2,5 --	1-27
A	CN 202946599 U (CHANGGE CITY SAIDAN AUTO PARTS MFG CO LTD), 22 May 2013 (2013-05-22); (abstract) Retrieved from: EPODOC database; Original document: figure 1 --	1-27
A	CN 202879180 U (LI DAHAI), 17 April 2013 (2013-04-17); (abstract) Retrieved from: EPODOC database; Original document: figure 1 --	1-27
P, A	CN 203543567 U (UNIV SHANDONG JIAOTONG), 16 April 2014 (2014-04-16); (abstract) Retrieved from: EPODOC database; Original document: figures -- -----	1-27

Continuation of: second sheet

International Patent Classification (IPC)

B60G 11/04 (2006.01)

B60G 11/02 (2006.01)

F16F 1/18 (2006.01)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2014/000087

GB	1244843 A	02/09/1971	NONE		
US	20040004337 A1	08/01/2004	NONE		
GB	191319657 A	15/01/1914	DE	262210 C	-
			FR	461834 A	12/01/1914
US	3975005 A	17/08/1976	BE	826121 A1	16/06/1975
			DE	2512923 A1	02/10/1975
			ES	435572 A1	16/12/1976
			FR	2266058 A1	24/10/1975
			GB	1448078 A	02/09/1976
			IT	1030353 B	30/03/1979
			NL	7503251 A	30/09/1975
			SE	7503393 A	29/09/1975
US	3190632 A	22/06/1965	GB	980372 A	13/01/1965
US	4460167 A	17/07/1984	NONE		
JP	3125039 A	28/05/1991	AT	218604 T	15/06/2002
			CA	2203544 C	24/04/2007
			CN	1161708 A	08/10/1997
			CN	1069673 C	15/08/2001
			DE	69526957 T2	02/01/2003
			EP	0788529 B1	05/06/2002
			ES	2173972 T3	01/11/2002
			JP	H09511780 A	25/11/1997
			KR	100385236 B1	19/08/2003
			US	5843219 A	01/12/1998
			WO	9612772 A1	02/05/1996
WO	2010067146 A1	17/06/2010	NONE		
DE	102005060110 A1	28/06/2007	NONE		
US	4519591 A	28/05/1985	AU	556997 B2	27/11/1986
			AU	1734583 A	23/02/1984
			BR	8304419 A	27/03/1984
			CA	1220799 A1	21/04/1987
			DE	3330054 A1	23/02/1984
			ES	282932 Y	01/05/1986
			FR	2532023 B1	06/12/1985
			GB	2125514 B	29/05/1986
			IT	1170441 B	03/06/1987
			JP	S5950239 A	23/03/1984
			MX	162512 A	15/05/1991
			SE	8304377 A	21/02/1984
CN	202946599 U	22/05/2013	NONE		
CN	202879180 U	17/04/2013	NONE		
CN	203543567 U	16/04/2014	NONE		