



US00RE44173E

(19) **United States**
(12) **Reissued Patent**
Noll et al.

(10) **Patent Number:** **US RE44,173 E**
(45) **Date of Reissued Patent:** **Apr. 23, 2013**

(54) **METHOD FOR IMPROVING RF SPECTRUM EFFICIENCY WITH REPEATER BACKHAULS**

(75) Inventors: **John R. Noll**, Satellite Beach, FL (US);
Christopher J. Peters, Malabar, FL (US);
Jeffrey W. Smith, Palm Bay, FL (US);
Terry L. Williams, Melbourne Beach, FL (US)

(73) Assignee: **Treble Investments Limited Liability Company**, Wilmington, DE (US)

(21) Appl. No.: **13/171,272**

(22) Filed: **Jun. 28, 2011**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **7,092,714**
Issued: **Aug. 15, 2006**
Appl. No.: **10/074,514**
Filed: **Feb. 12, 2002**

U.S. Applications:

(63) Continuation of application No. 12/191,866, filed on Aug. 14, 2008, now Pat. No. Re. 42,605.

(51) **Int. Cl.**
H04Q 7/20 (2006.01)

(52) **U.S. Cl.**
USPC **455/446**; 455/15; 455/41.2; 455/63.1;
370/310; 370/312; 370/339

(58) **Field of Classification Search** 455/41.2,
455/63.1, 446
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,727,590 A 2/1988 Kawano et al.
5,771,017 A 6/1998 Dean et al.

6,049,315 A	4/2000	Meyer
6,124,824 A	9/2000	Xu et al.
6,188,875 B1	2/2001	Evans
6,345,188 B1	2/2002	Keskitalo et al.
6,577,869 B1	6/2003	Garrison
6,801,514 B2	10/2004	Ma
2001/0016504 A1	8/2001	Dam et al.
2002/0013164 A1	1/2002	Leifer et al.
2002/0045431 A1	4/2002	Bongfeldt
2002/0123365 A1	9/2002	Thorson et al.
2002/0147031 A1	10/2002	Hood
2002/0187813 A1	12/2002	Guo
2002/0193147 A1	12/2002	Li et al.
2003/0054813 A1	3/2003	Riley et al.
2005/0059342 A1	3/2005	Engels et al.

OTHER PUBLICATIONS

USPTO; Office Action dated Aug. 5, 2004 in U.S. Appl. No. 10/074,514.

(Continued)

Primary Examiner — Patrick Edouard


Assistant Examiner — Julio Perez

(74) *Attorney, Agent, or Firm* — Brundidge & Stanger, P.C.

(57) **ABSTRACT**

A spectrally efficient wireless communication system that includes a plurality of base stations communicating indirectly with a plurality of wireless communications devices through a plurality of repeaters. The method can generally comprise communicating indirectly between a first base station and a wireless communication device using a first repeater and a first RF backhaul link. A control processor associated with the first base station can control a first smart antenna system. The system selectively configures the first smart antenna system to spatially isolate communications on the first RF backhaul from communications on a second RF backhaul of a second repeater.

7 Claims, 4 Drawing Sheets

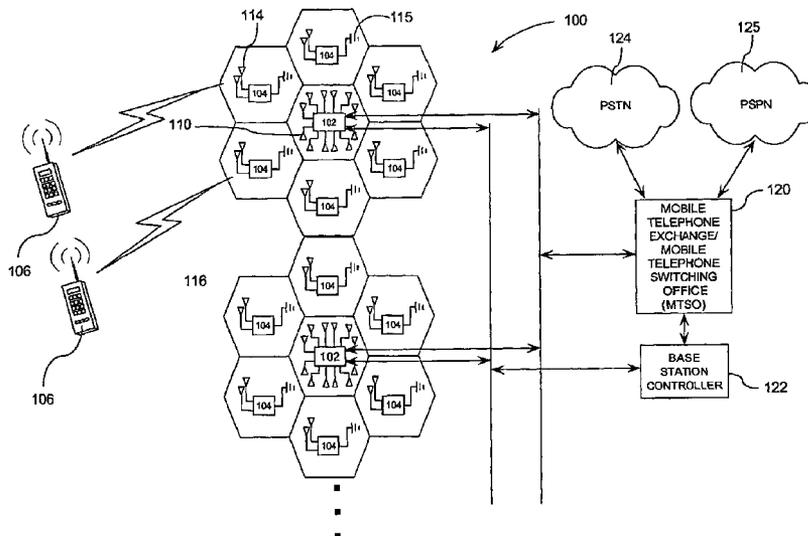

US RE44,173 E

Page 2

OTHER PUBLICATIONS

USPTO; Office Action dated May 6, 2005 in U.S. Appl. No. 10/074,514.

USPTO; Final Office Action dated Oct. 21, 2005 in U.S. Appl. No. 10/074,514.

USPTO; Advisory Action dated Feb. 8, 2006 in U.S. Appl. No. 10/074,514.

USPTO; Notice of Allowance dated Mar. 27, 2006 in U.S. Appl. No. 10/074,514.

USPTO; Notice of Allowance dated Mar. 24, 2011 in U.S. Appl. No. 12/191,866.

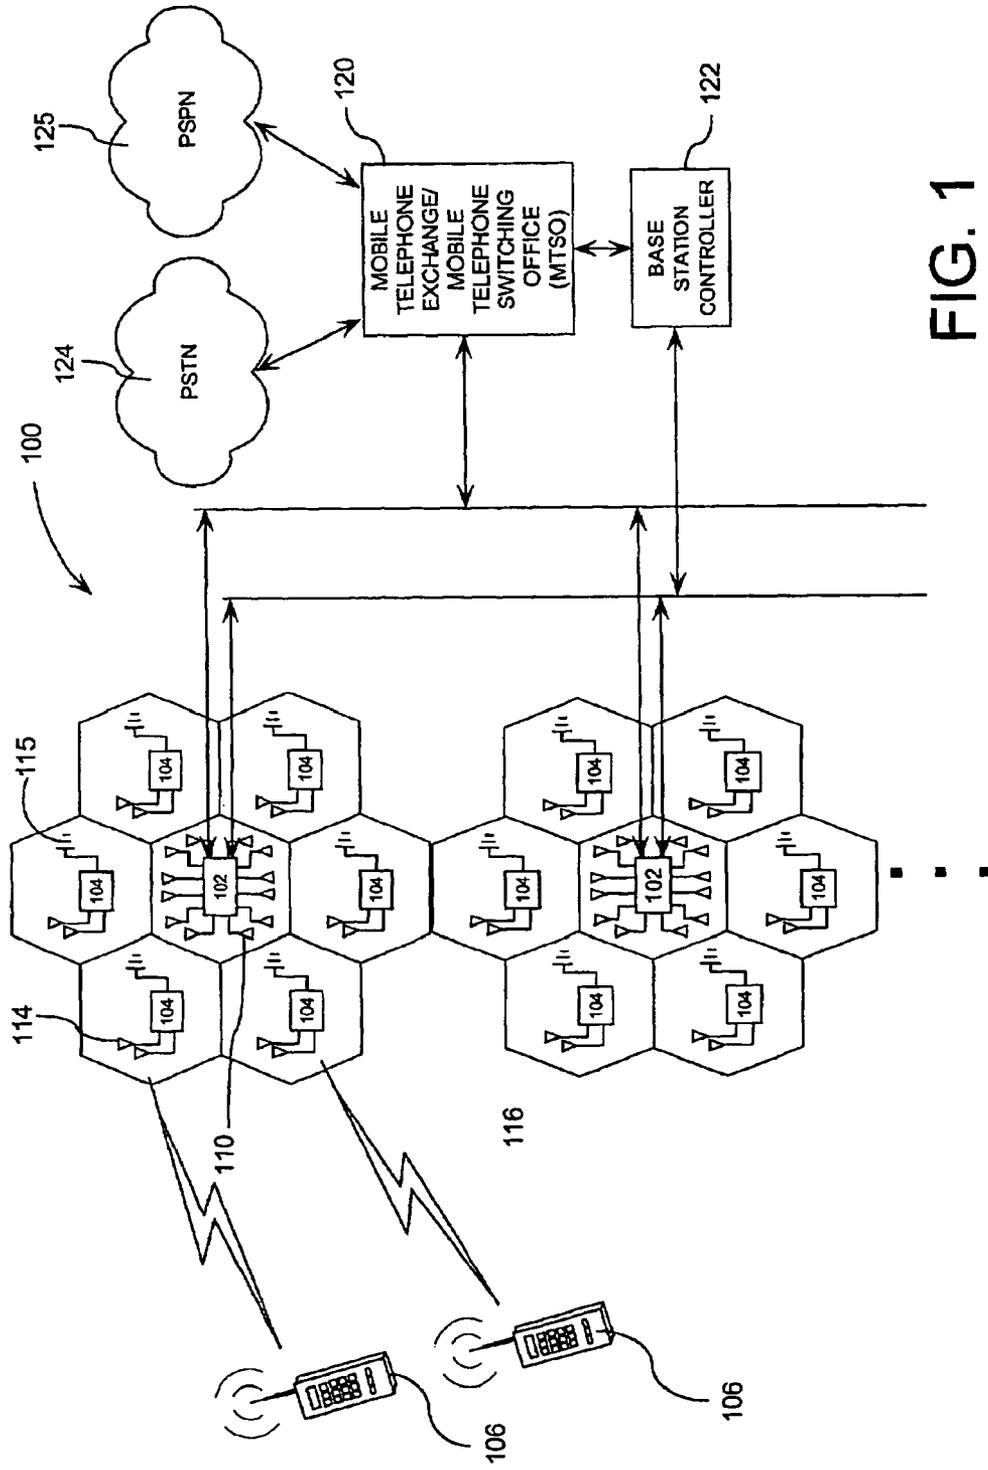


FIG. 1

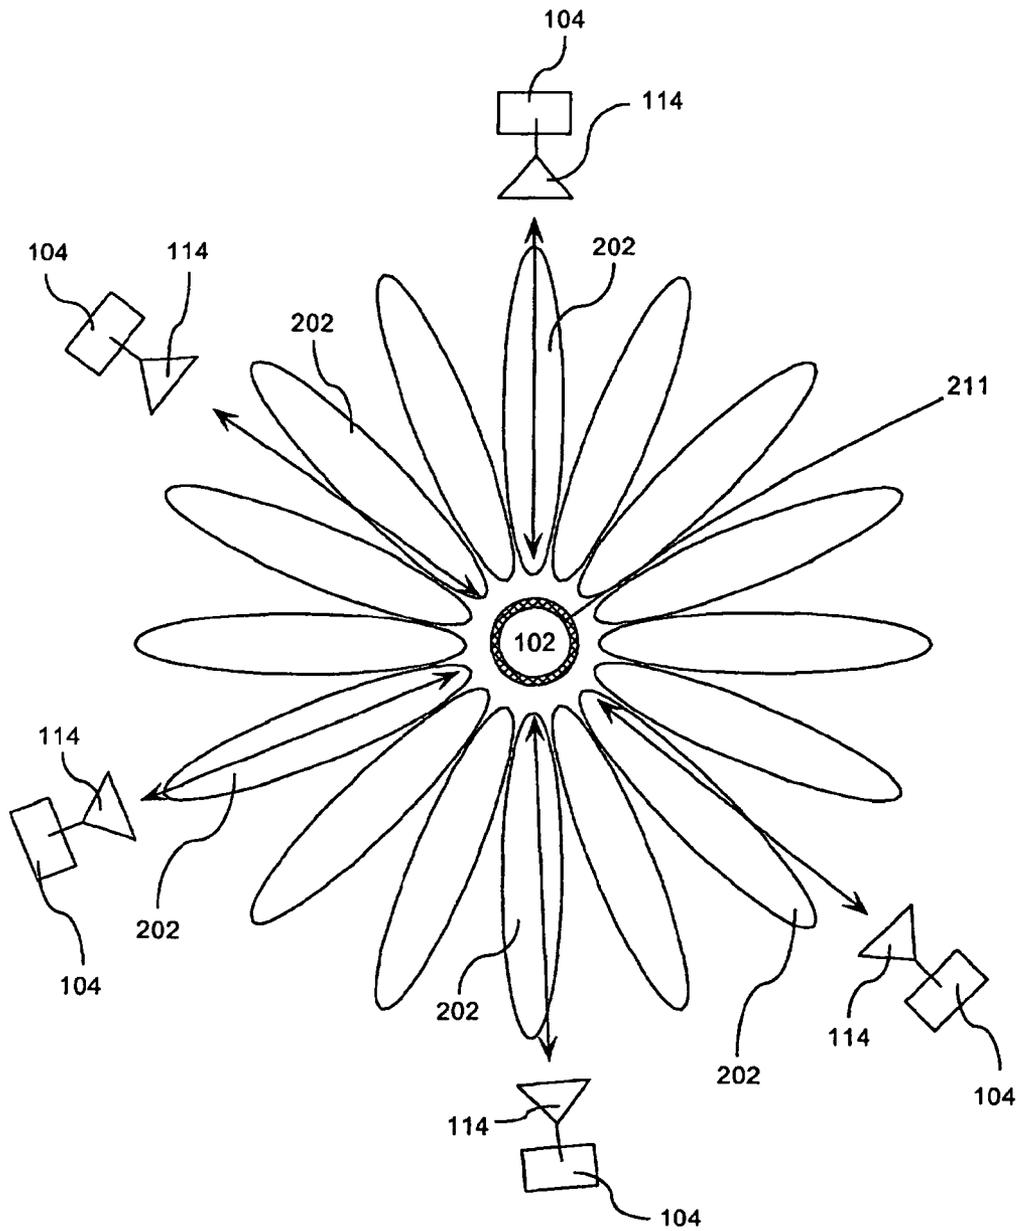


FIG. 2

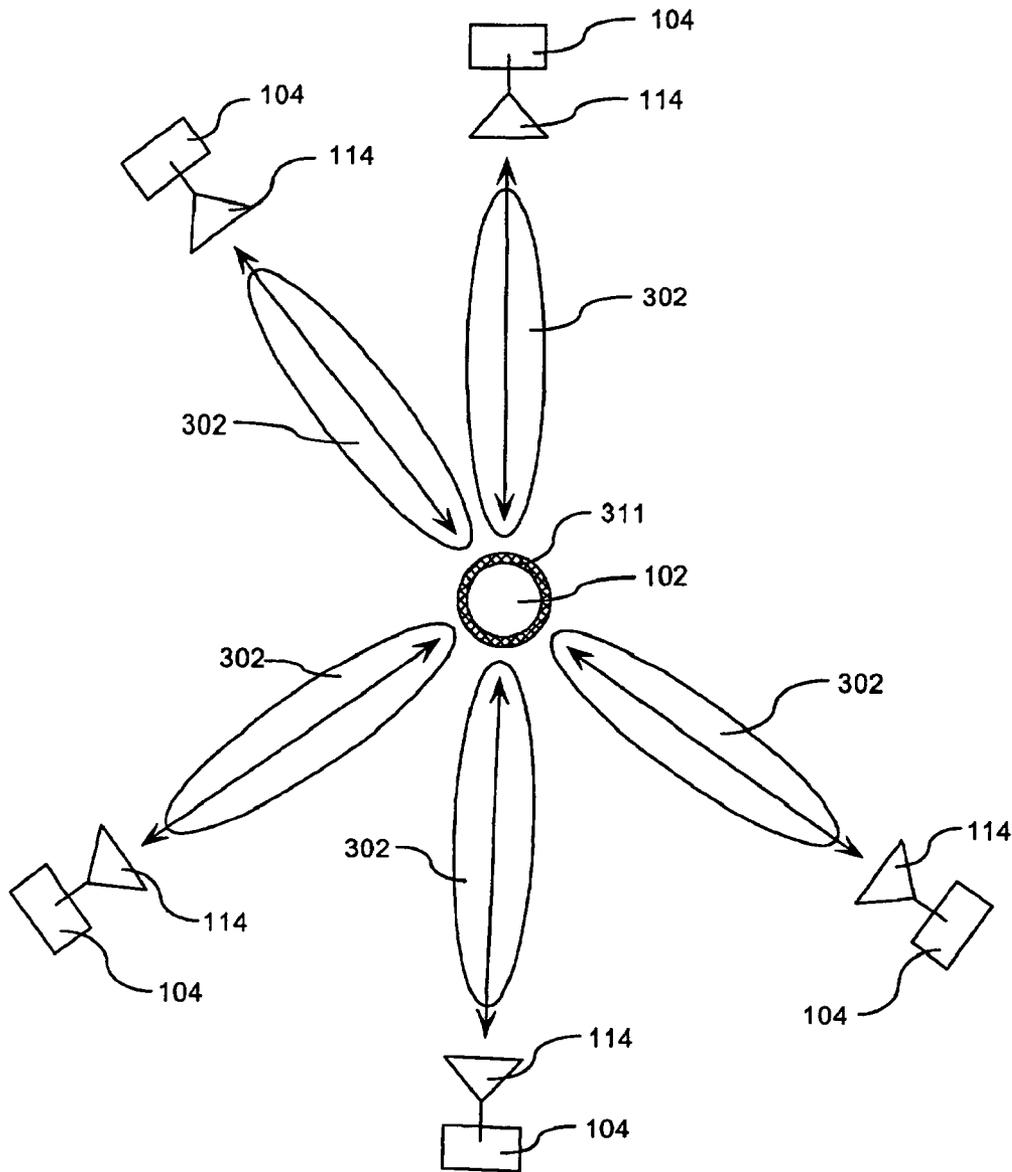


FIG. 3

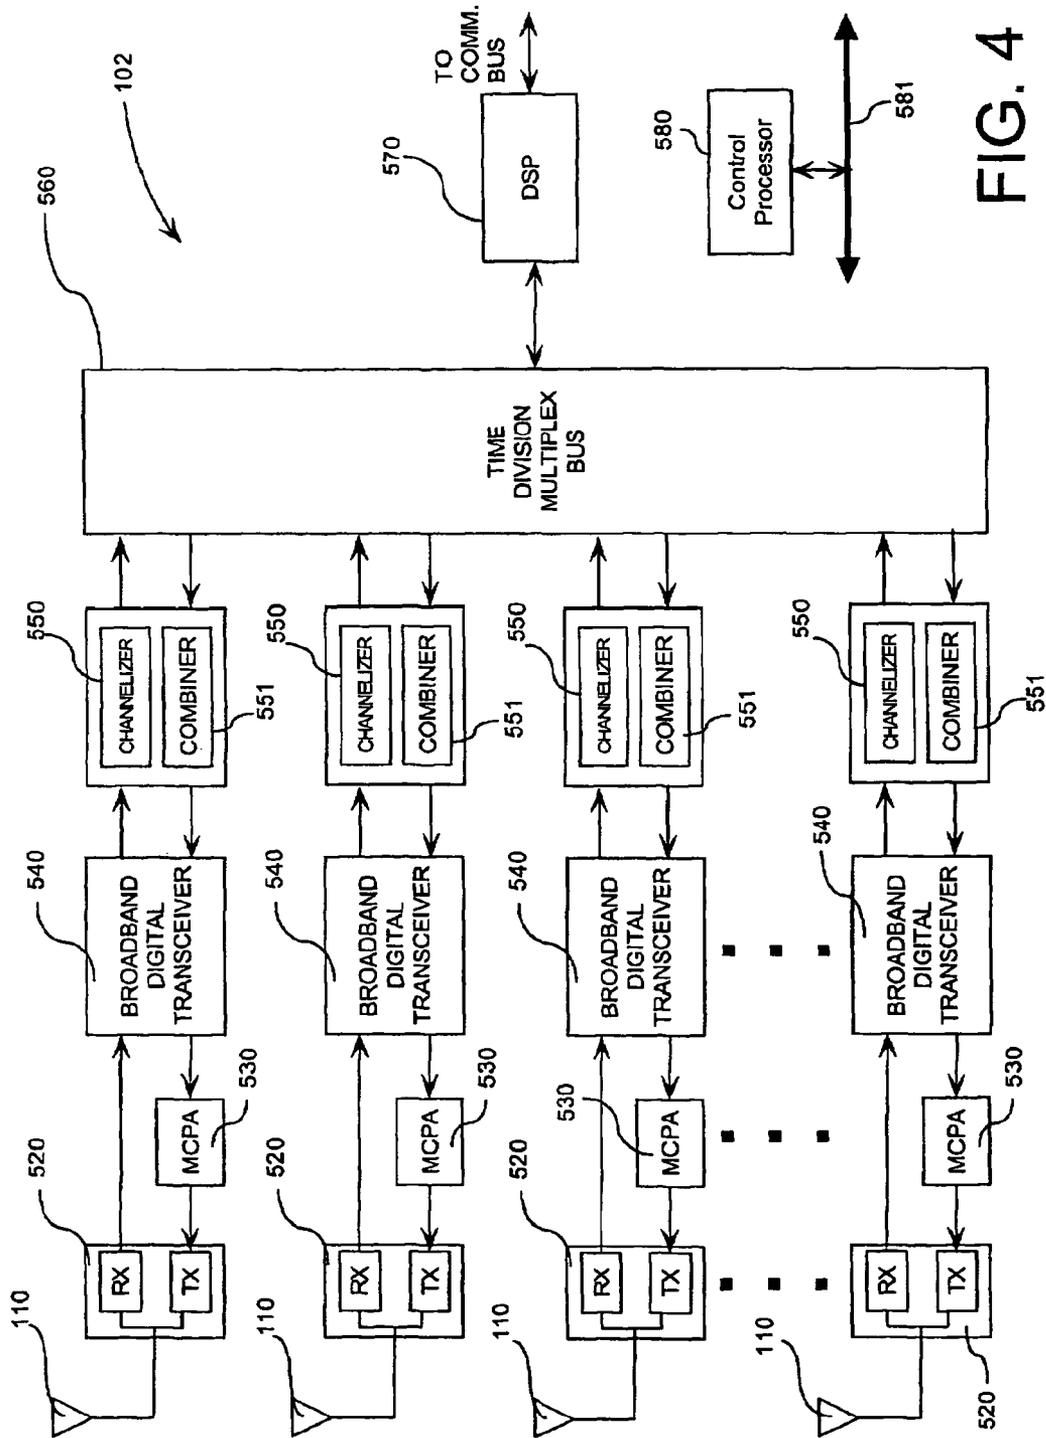


FIG. 4

METHOD FOR IMPROVING RF SPECTRUM EFFICIENCY WITH REPEATER BACKHAULS

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

RELATED APPLICATION INFORMATION

This is a continuation reissue application of U.S. Reissue Application No. 12/191,866, filed Aug. 14, 2008 now U.S. Pat. No. Re 42,605, which is a reissue application of U.S. Pat. No. 7,092,714, issued Aug. 15, 2006.

BACKGROUND OF THE INVENTION

1. Technical Field

The inventive arrangements relate generally to mobile telecommunications systems and more particularly to a more efficient use of RF spectrum allocation for repeater/base station backhaul links.

2. Description of the Related Art

In a wireless telecommunication system, a base station communicates with mobile communication devices via communication channels, known in the art as ground links. By itself, a base station can only cover a limited area with ground links. This limited coverage area is referred to in the art as a cell. Other devices, such as repeaters, are sometimes used to expand the range of a base station to cover a larger geographic area. To a limited extent, non-translating repeaters extend the range that a base station can cover within the same cell. A frequency translating repeater can provide coverage within the same cell or for a separate cell from the cell of its serving base station. Repeaters are typically placed beyond the range of a base station's ground link so as to expand the base station's service to cover those cells. A group of cells covered by a base station utilizing repeaters is known as a cell cluster. The present invention applies generally to the class of repeaters known as frequency translating repeaters.

A backhaul communication link allows the base station to communicate with the repeaters for receiving and transmitting information to/from the mobile communications devices. Some base station units and repeaters are configured with a backhaul channel that operate "in band", i.e. in a portion of the limited frequency spectrum allocated for ground links. Other base stations may support the backhaul in a licensed or unlicensed band other than the band allocated for ground links. However, use of in unlicensed bands is typically undesirable due to interference from uncontrolled sources. Likewise availability of spectrum in a licensed band other than the band used for ground links may be limited as well as costly. In conventional systems, a different backhaul carrier frequency is required for communication between a base station and each associated frequency translating repeater. However, in systems that select the backhaul from a portion of the limited frequency spectrum allocated for ground links, such multiple backhaul frequencies reduce the available ground link bandwidth.

A base station may support a number of repeaters that are geographically distributed in any direction from the base station. The repeater would typically utilize a narrow beam antenna to receive downlink signals and transmit uplink signals to its serving base station. This narrow beam antenna focuses transmitted uplink signal to its serving base station and also limits interference to unintended base stations. How-

ever, the base station typically would employ an omnidirectional or broad beam directional antenna that could support multiple backhauls to different geographically diverse repeaters. Because the downlink (base station-to-repeater) backhaul is transmitted in a broad direction rather than focused to the intended repeater, this broad transmission generates interference for unintended repeaters thus limiting spectral efficiency. Likewise, more power is required to be transmitted than would be necessary than if the base station antenna were using narrow beamwidth antenna. On the uplink the base station may receive a signal from an unintended repeater on the same frequency as an intended repeater.

Smart antenna systems are known in the art as a way for multiple communication links to improve spectral efficiency by spatially isolating those communications links from each other thus reducing interference. For example, switched beam systems are available that may consist of a plurality of narrow antenna beams arranged in a pattern to cover an omnidirectional area. In switched beam systems, each antenna requires one or more dedicated transceivers and transmit amplifiers together with associated RF cabling. This arrangement permits communications between the base station and a plurality of remote transceivers to occur concurrently on the same frequency, but through different antennas.

Another smart antenna system is comprised of an array of antenna elements that are used to perform adaptive spatial processing. The system works by electronically forming RF beams and nulls by adjusting the phase and amplitude of each communication channel through each of the antennas in the array. Adaptive spatial signal processing applied to RF signals of each of the antenna elements permits RF energy to be focused to/from a specific direction to/from the same base station, thus reducing interference between remote communication devices on the same frequency that are spatially separated.

Smart antennas have been applied to support spatial division multiple access (SDMA) systems for improving spectral efficiency. These systems make use of the spatial separation of remote communication devices enabling multiple remote devices to communicate with an SDMA base station on the same frequency. SDMA can be implemented using adaptive antenna systems or switched beam systems.

Much study has been performed to apply SDMA to mobile networks; however, thus far in practice, SDMA systems have been limited to fixed wireless networks, such as wireless local loop (WLL) systems, due to the tremendous computation power required to track a large number of mobiles and monitoring spatial separation of those on the same frequency to prevent unacceptable degradation in signal quality.

Smart antennas have been applied to improve spectral efficiency by reduction of interference allowing higher frequency reuse across a mobile network. Each cell in a cell cluster may use unique RF frequencies for that cell; however, those RF frequencies may be reused in cells of another cell cluster. By reducing interference through the use of smart antennas, cells of different clusters using the same frequencies may be placed geographically closer, allowing those frequencies to be used more often, thus improving spectral efficiency.

Hence, in a network making use of frequency translating repeaters, what is needed is a mobile communication system that can take advantage of existing smart antenna technology for more efficient use of frequency spectrum, in particular the loss of spectral efficiency due to the use of backhaul communication channels.

SUMMARY OF THE INVENTION

The invention concerns a method and system for implementing a more spectrally efficient wireless communication

system that includes a plurality of base stations communicating indirectly with a plurality of wireless communications devices through a plurality of repeaters. The method can generally comprise communicating indirectly between a first base station and a wireless communication device using a first repeater and a first RF backhaul link. A control processor associated with the first base station can control a first smart antenna system. The system selectively configures the first smart antenna system to spatially isolate communications on the first RF backhaul from communications on a second RF backhaul of a second repeater.

The first base station can communicate with a second wireless communication device using the second repeater and the second RF backhaul link. Alternatively, the second repeater can communicate with a second base station located in a communication cell separate from the first base station. In the latter case, the method can further include the steps of selectively controlling a second smart antenna system of the second base station for improved spectral efficiency. Specifically, this can be accomplished by selectively configuring the second smart antenna system to spatially isolate communications on the second RF backhaul link from communications on the first RF backhaul link.

The controlling step mentioned above can include the step of selecting from an antenna array at least one antenna element for use by the first base station in producing a directional antenna pattern having a major lobe in the direction of the first repeater. According to one embodiment, the controlling step can further comprise selecting a plurality of antenna elements from the antenna array for use by the first base station and adjusting phase and/or amplitude of RF signals received and transmitted by the plurality of antenna elements to produce the directional antenna pattern. Similarly, the controlling step can involve selecting a plurality of antenna elements from the antenna array for use by the base station and adjusting at phase and/or amplitude of RF signals received and transmitted by the plurality of antenna elements to produce a null in the directional antenna pattern. For example, the null can be selectively directed toward the second repeater.

According to an alternative embodiment, the invention can comprise a first base station configured for communicating indirectly with a wireless communication device using a first repeater and a first RF backhaul link. The base station can include a first smart antenna system operatively associated with the first base station. The first smart antenna system can be selectively configured by a control processor for spatially isolating communications on the first RF backhaul from communications on a second RF backhaul of a second repeater. The first base station can communicate with a second wireless communication device using the second repeater and the second RF backhaul link. Alternatively, the second repeater can be arranged for communicating with a second base station located in a communication cell separate from the first base station.

The second base station can comprise a second control processor for selectively controlling a second smart antenna system of the second base station. The second smart antenna system can be arranged for spatially isolating communications on the second RF backhaul link from communications on the first RF backhaul link. The control processor can select from an antenna array at least one antenna element for use by the first base station. According to one aspect of the invention, the antenna element or elements can be used to produce a directional antenna pattern having a major lobe in the direction of the first repeater.

According to another aspect of the invention, the control processor can select a plurality of antenna elements from the

antenna array for use by the first base station. In that case, the first smart antenna system can include phase and amplitude controllers for adjusting at least one of a phase and amplitude of RF signals received and transmitted by the plurality of antenna elements to produce the directional antenna pattern. Similarly, the control processor can select a plurality of antenna elements from the antenna array for use by the first base station and the first smart antenna system can include phase and amplitude controllers for adjusting phase and/or amplitude of RF signals received and transmitted by the plurality of antenna elements to produce a null in the directional antenna pattern. The null can be selectively directed toward the second repeater.

BRIEF DESCRIPTION OF THE DRAWINGS

There are presently shown in the drawings embodiments, which are presently preferred, it being understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown.

FIG. 1 shows a simple diagram of a mobile communications network incorporating a base station and repeaters.

FIG. 2 shows a base station using a switched-beam antenna array to communicate with multiple repeaters simultaneously.

FIG. 3 shows a base station using an adaptive antenna array to communicate with multiple repeaters simultaneously.

FIG. 4 shows a simplified block diagram of a base station incorporating smart antennas.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is a diagram of a mobile communications network 100 incorporating base stations 102, repeaters 104, and mobile communication devices 106. Generally, base stations 102 can facilitate communication among mobile communication devices 106 and between mobile communication devices 106 and other data networks, for example a public switched telephone network (PSTN) 124 or a public switched packet network (PSPN) 125. Signals communicated to and from a PSTN or PSPN pass through a mobile telephone switching office (MTSO) 120. Base stations 102 can receive communication signals from MTSO 120 and modulate the signals to format them for transmission through base station antennas 110. Base stations 102 can also receive signals transmitted to base station antennas 110 from repeaters 104, or mobile communication units 106. These signals are communicated to the MTSO 120. Base station controller 122 can incorporate a management application to manage the operations of a plurality of base stations 102.

Base stations 102 conventionally communicate with mobile communication devices 106 via groundlinks. By itself, a base station 102 can only cover a limited area with groundlinks. This limited coverage area is referred to in the art as a cell. Hence, repeaters 104 are typically placed in cells outside the reach of a base station's groundlink to expand the base station's service to cover those cells. A group of cells covered by a base station 102 and its associated repeaters 104 is referred to in the art as a cell cluster.

Repeaters 104 can receive communications transmitted from a corresponding base station 102 over a backhaul link and can forward the communications to mobile communication devices 106 through antennas 114. Likewise, repeaters 104 can receive communications transmitted from mobile

communication devices **106** and forward these communications to the corresponding base station **102** over the backhaul link through antennas **115**.

According to a preferred embodiment of the invention, base station **102** can incorporate suitable hardware and software for implementing smart antenna processing. Such processing can permit a single frequency to be used for implementing multiple backhaul links between a base station **102** and multiple repeaters **104**, or for improved frequency re-use in a system of base stations making use of such smart antennas for implementing repeater backhaul links. Implementing multiple repeater backhaul links on the same RF frequencies, either within a cell or among a group of cells, can be highly advantageous as it increases the available bandwidth for ground link communications with mobile communication devices **106**.

Smart antenna processing systems as described herein can include switched-beam antenna systems, adaptive antenna processing, or any other system incorporating special processing techniques to focus antenna propagation patterns for reducing co-channel or adjacent channel interference. FIG. **2** shows a base station **102** that incorporates a conventional switched-beam antenna array **211** for communication with mobile units **106** and repeaters **104**. The switched-beam antenna array **211** comprises 16 antenna elements, each having a 22.5 degree beamwidth, so as to cover a 360 degree propagation angle. However, those skilled in the art will appreciate that the invention is not limited in this regard. Rather, the switched-beam antenna array **211** can comprise any other desired arrangement of multiple narrow beam antennas, each with an individual antenna pattern **202** covering a narrow azimuth region. As is conventional in such systems, each switched beam antenna associated with antenna array **211** requires a dedicated transceiver and a transmit amplifier together with associated RF cabling. This arrangement permits a base station to communicate with one or more remote repeaters on the same backhaul frequency without substantial interference. It can also permit base stations in a cell cluster to have improved levels of frequency reuse by allowing a common set of backhaul frequencies to be used more often by different base stations within the cell cluster.

In addition to providing concurrent communications with multiple repeaters on a single backhaul frequency, the arrangement in FIG. **2** can also be used to concurrently permit groundlink communications on the same frequency between a base station **102** and a mobile communication unit **106**. Groundlink communications with a mobile transceiver unit **106** can be switched from one antenna element to another as the mobile communication unit **106** moves from a region covered by one antenna element to a region covered by another antenna element.

FIG. **3** illustrates an adaptive antenna type system according to an alternative preferred embodiment in which adaptive spatial processing is used to define and steer antenna patterns **302**. The geometry of the adaptive array determines spatial resolution of the signals transmitted or received, i.e. the amount of coverage in a given spatial region. Commonly used adaptive array types are the uniform linear and circular arrays. For any given geometry, the phases and amplitudes of the currents exciting the array elements as well as the number of array elements determine the transmission power of the array in a certain direction. The phases and amplitudes of the currents on the antenna array elements can be electronically adjusted using amplitude and phase controllers such that transmitted signals in a certain direction add in phase, and maximum power is directed in that direction. Due to the

reciprocal nature of adaptive antennas, this approach is also generally applicable to enhance the receive gain of an antenna array in a particular direction as well.

The embodiment of FIG. **3** is similar to that of FIG. **2** except that use of the adaptive antenna techniques as opposed to switched-beam antennas makes the angular positioning of the repeaters **104** around the base station **102** less critical. More particularly, since adaptive array processing permits provides greater flexibility in directing the antenna pattern **302** in a particular direction as compared to switched-beam antennas, there is greater flexibility in the positioning of the repeaters. Adjacent repeaters **104** need only be separated enough so that each major lobe pattern **202** does not significantly overlap any two or more repeaters using the same frequency. Adaptive spatial processing has the further advantage in this context of permitting the antenna array to create RF nulls in the direction of interfering co-channel signals operating on the same frequency. This reduces the strength of undesired signals interfering with RF received from a desired repeater. In any case the adaptive antenna array **311** can permit base station **102** to communicate with multiple repeaters **104** on a same backhaul frequency at the same time without significant interference between the signals. It can also allow multiple base stations, which are nearby to one another to communicate with multiple repeaters on a same backhaul frequency.

Referring to FIG. **4**, base station **102** can have a selected number of antenna elements **110** in a switched-beam or adaptive array antenna system. Each antenna element has a dedicated receive apparatus chain comprising duplexer **520**, broadband digital transceiver **540**, and a channelizer/combiner **550** (including analog to digital converter). A suitable interface such as time division multiplex bus **560** can be provided for facilitation communications between the dedicated receive apparatus chain and digital signal processor board (DSP) **570**. The DSP **570** can provide signal processing, for example beam forming (in the case of adaptive array processing), antenna selection (in the case of switched-beam antenna processing), signal modulation, signal calibration, etc. DSP **570** can include a plurality of individual digital signal processors for performing these tasks for each channel.

For transmission, each antenna element **110** has a dedicated transmit apparatus chain comprising duplexer **520**, multi-carrier power amplifier (MCPA) **530**, broadband digital transceiver **540**, combiner **551** (including digital to analog converter), time division multiplex bus **560**, DSP **570**, and associated connectors inclusive. Similar to its function on the receive path, DSP **570** can perform antenna switching or adaptive array beam forming. DSP **570** can also apply any other desired signal processing to the transmit signals, for example switching transmit signals between antenna elements when transmitting through a switched-beam antenna array.

A control processor **580** can be provided for controlling the operation of the major system components including the bus **560**, and each channelizer **550**, combiner **551**, broadband digital transceiver **540**, MCPA **530**. The control processor can communicate with these system components using a control bus **581**. Where a switched-beam antenna system is used, the control processor **580** can select one or more antennas **110** to operate exclusively with each of the plurality of repeaters **104**, where each antenna or combination of antennas can having an antenna pattern **202** comprising a major lobe exhibiting gain in a direction of one of the repeaters **104**. RF signals communicated to and from the base station **102** for each of the

plurality of repeaters **104** can be processed separately in one of the plurality of the transceivers **540** associated with each of the antennas.

Alternatively, where an adaptive array approach is used, the control processor **580** can adjust a phase, amplitude or both for RF signals associated with all of the plurality of antennas of the antenna array. These operations can be performed in the channelizer and combiner blocks or within DSP **570**. In this way the system can combine the RF signals to create an antenna pattern **302** comprising a major lobe exhibiting gain in a direction of one of the plurality of repeaters **104**. The control processor **580** can also adjust a phase and/or amplitude of RF signals associated with each of the plurality of antennas **110** of the antenna array for combining the RF signals to create an antenna pattern comprising nulls in the direction of at least one other of the plurality of repeaters concurrently operating on the common RF carrier frequency.

It should be understood that the examples and embodiments described herein are for illustrative purposes only and that various modifications or changes in light thereof will be suggested to persons skilled in the art and are to be included within the spirit and purview of this application. The invention can take many other specific forms without departing from the spirit or essential attributes thereof for an indication of the scope of the invention.

We claim:

[1. In a wireless communication system with a plurality of base stations communicating indirectly with a plurality of wireless communications devices, a method for more efficient use of radio spectrum, comprising:

communicating indirectly between a first base station and a wireless communication device using a first repeater and a first RF backhaul link between said first repeater and said first base station;

controlling a first smart antenna system of said first base station for improved spectral efficiency by selectively configuring said first smart antenna system to spatially isolate communications on said first RF backhaul link from communications on a second RF backhaul link of a second repeater operating on the same RF carrier frequency as the first RF backhaul link.]

[2. The method according to claim **1** wherein said communicating step further comprises said first base station communicating with a second wireless communication device using said second repeater and said second RF backhaul link.]

[3. The method according to claim **1** wherein said second repeater communicates with a second base station located in a communication cell separate from said first base station.]

[4. The method according to claim **3** further comprising selectively controlling a second smart antenna system of said second base station for improved spectral efficiency by selectively configuring said second smart antenna system to spatially isolate communications on said second RF backhaul link from communications on said first RF backhaul link.]

[5. The method according to claim **1** wherein said controlling step further comprises selecting from an antenna array at least one antenna element for use by said first base station in producing a directional antenna pattern having a major lobe in the direction of said first repeater.]

[6. The method according to claim **5** wherein said controlling step further comprises selecting a plurality of antenna elements from said antenna array for use by said first base station and adjusting at least one of a phase and amplitude of RF signals received and transmitted by said plurality of antenna elements to produce said directional antenna pattern.]

[7. The method according to claim **5** wherein said controlling step further comprises selecting a plurality of antenna elements from said antenna array for use by said base station and adjusting at least one of a phase and amplitude of RF signals received and transmitted by said plurality of antenna elements to produce a null in said directional antenna pattern, said null selectively directed toward said second repeater.]

[8. In a wireless communication system with a plurality of base stations communicating indirectly with a plurality of wireless communications devices through a plurality of repeaters, a system for providing more efficient use of radio spectrum, comprising:

a first base station configured for communicating indirectly with a wireless communication device using a first repeater and a first RF backhaul link between said first repeater and said first base station;

a first smart antenna system operatively associated with said first base station, said first smart antenna system selectively configured by a control processor for spatially isolating communications on said first RF backhaul link from communications on a second RF backhaul link of a second repeater operating on the same RF carrier frequency as the first RF backhaul link.]

[9. The system according to claim **8** wherein said first base station communicates with a second wireless communication device using said second repeater and said second RF backhaul link.]

[10. The system according to claim **8** wherein said second repeater communicates with a second base station located in a communication cell separate from said first base station.]

[11. The system according to claim **10** wherein said second base station comprises a second control processor for selectively controlling a second smart antenna system of said second base station for spatially isolating communications on said second RF backhaul link from communications on said first RF backhaul link.]

[12. The system according to claim **8** wherein said control processor selects from an antenna array at least one antenna element for use by said first base station, and said at least one antenna element produces a directional antenna pattern having a major lobe in the direction of said first repeater.]

[13. The system according to claim **12** wherein said control processor selects a plurality of antenna elements from said antenna array for use by said first base station and said first smart antenna system includes phase and amplitude controllers for adjusting at least one of a phase and amplitude of RF signals received and transmitted by said plurality of antenna elements to produce said directional antenna pattern.]

[14. The system according to claim **12** wherein said control processor selects a plurality of antenna elements from said antenna array for use by said first base station and said first smart antenna system includes phase and amplitude controllers for adjusting at least one of a phase and amplitude of RF signals received and transmitted by said plurality of antenna elements to produce a null in said directional antenna pattern, said null selectively directed toward said second repeater.]

15. A control processor configured to:

spatially isolate communications on a first RF backhaul link from communications on a second RF backhaul link operating on a same RF carrier frequency as said first RF backhaul link,

wherein said control processor is operably coupled to a first smart antenna system associated with said first base station for providing more efficient use of radio spectrum, wherein said second RF backhaul link is transmitted via a second repeater, and

wherein a first base station communicates indirectly with a wireless communication device using a first repeater and said first RF backhaul link between said first repeater and said first base station.

16. The control processor configured according to claim 15, wherein said first base station communicates with a second wireless communication device using said second repeater and said second RF backhaul link.

17. The control processor configured according to claim 15, wherein said second repeater communicates with a second base station located in a communication cell separate from said first base station.

18. The control processor configured according to claim 15, further configured to selectively control a second smart antenna system of said second base station for improved spectral efficiency by selectively configuring said second smart antenna system to spatially isolate communications on said second RF backhaul link from communications on said first RF backhaul link.

19. The control processor configured according to claim 18, further configured to select from an antenna array at least one antenna element for use by said first base station in producing a directional antenna pattern having a major lobe in the direction of said first repeater.

20. The control processor configured according to claim 15, further configured to select a plurality of antenna elements from an antenna array for use by said first base station and adjusting at least one of a phase or an amplitude of RF signals received and transmitted by said plurality of antenna elements to produce a directional antenna pattern.

21. The control processor configured according to claim 15, further configured to select a plurality of antenna elements from an antenna array for use by said first base station and adjust at least one of a phase or an amplitude of RF signals received and transmitted by said plurality of antenna elements to produce a null in a directional antenna pattern, said null selectively directed toward said second repeater.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : RE44,173 E
APPLICATION NO. : 13/171272
DATED : April 23, 2013
INVENTOR(S) : Noll et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Specification

In Column 4, Line 41, delete “example” and insert -- example, --, therefor.

In Column 6, Line 39, delete “example” and insert -- example, --, therefor.


In Column 6, Line 53, delete “example” and insert -- example, --, therefor.

In Column 6, Line 57, delete “bus” and insert -- time division multiplex bus --, therefor.

In the Claims

In Column 8, Line 39, in Claim 12, delete “easy” and insert -- array --, therefor.

Signed and Sealed this
Tenth Day of December, 2013



Margaret A. Focarino
Commissioner for Patents of the United States Patent and Trademark Office