



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2776768 C 2014/12/02

(11)(21) **2 776 768**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 2012/05/14

(41) Mise à la disp. pub./Open to Public Insp.: 2012/09/26

(45) Date de délivrance/Issue Date: 2014/12/02

(30) Priorité/Priority: 2011/05/25 (EP11167434.7)

(51) Cl.Int./Int.Cl. *C25B 1/04* (2006.01),
B60L 11/18 (2006.01), *C25B 5/00* (2006.01),
C25B 9/00 (2006.01), *H01M 8/06* (2006.01)

(72) Inventeur/Inventor:
FERTMAN, MARK, CA

(73) Propriétaire/Owner:
NIM ENERGY, CA


(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : GENERATEUR DE PUISSANCE ET D'HYDROGENE

(54) Title: POWER AND HYDROGEN GENERATOR

(57) **Abrégé/Abstract:**

Arrangement for producing hydrogen from an electrolyte solution, in particular an aqueous solution, the arrangement comprising a hydrogen-developing body, which is in particular plate-shaped or cylinder-shaped, in the electrolyte- contacting surface of which regions formed from magnesium, Mg, or zinc, Zn, or the like, or an alloy thereof alternate with regions formed from ferrum, Fe, or a Fe alloy, or the like, and means for accumulating hydrogen which has developed on the surface of the body.

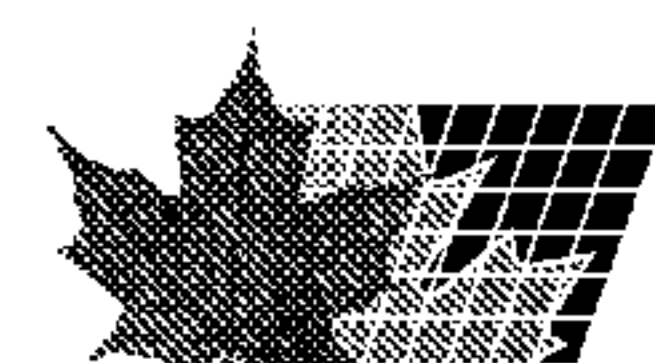

Abstract

Arrangement for producing hydrogen from an electrolyte solution, in particular an aqueous solution, the arrangement comprising a hydrogen-developing body, which is in particular plate-shaped or cylinder-shaped, in the electrolyte-contacting surface of which regions formed from magnesium, Mg, or zinc, Zn, or the like, or an alloy thereof alternate with regions formed from ferrum, Fe, or a Fe alloy, or the like, and means for accumulating hydrogen which has developed on the surface of the body.

Fig. 1A

Power and Hydrogen Generator

Description

The present invention relates to a power and hydrogen generator, in which seawater and/or an alkaline solution is usable as electrolyte.


Such electrochemical energy sources are suited for a number of applications. Examples have been ships and other watercraft, electronic devices, toys and the like, and highly promising future applications can be seen on a large scale in the growing field of renewable energies. Various types of so-called seawater cells are known, which use seawater as electrolyte and which comprise a number of basic components, especially a cathode and an anode. One of the known types of a seawater cell is a magnesium/oxygen battery comprising a magnesium anode, which utilizes seawater as electrolyte as well oxygen dissolved in the seawater as oxidizing agent.

The chemical processes taking place in this cell are the following:


On the anode, magnesium is dissolved according to the equation



On the cathode, oxygen is consumed according to the equation

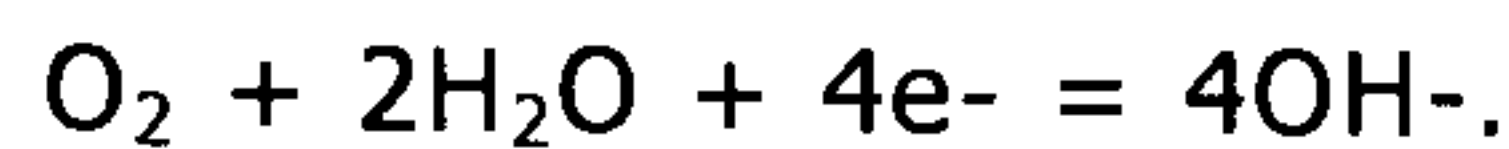

Summarizing, this can be described in a simplified manner as follows:

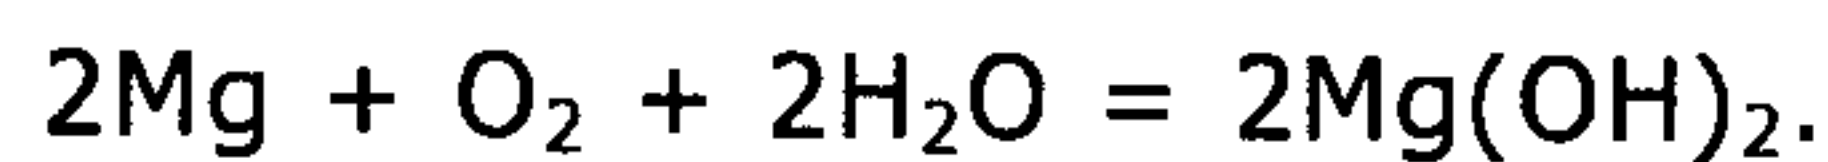

The anode material can be, for example, magnesium, zinc, a mixture of these elements and alloys thereof.

US 4,822,698 discloses an energy cell/battery for use in seawater. This battery works according to the aforementioned electrochemical reactions, with magnesium or zinc being used as anode material and an oxygen electrode as cathode. The oxygen supplied to the cathode is dissolved in the seawater. This seawater battery consists of a cylindrical oxygen electrode cathode. The structure comprises single or several anode rods, which contain magnesium or zinc. The oxygen electrode is similar to those used in many ways in other batteries, e.g. in US 6,372,371 B1. In seawater saturated with air, the disclosed battery is capable of supplying approximately 1.5 volt with 50 mA. The cathode has a size of approximately 800 cm². The battery has a relatively small energy density of about 1W/m².

US 5,405,717 discloses a seawater cell, the power of which is slightly increased as compared to that of US 4,822,698. This power increase is caused by the effect of waves, which increases the flow of the seawater through the cathode so as to supply oxygen. The cell structure includes water flow conducting means, which make the water flow through the cell. US 5,225,291 discloses a seawater battery, which is operable with or without dissolved oxygen due to the use of a hybrid cathode. US 5,427,871 relates to galvanic seawater cells and batteries, respectively, which use oxygen dissolved in the seawater as oxidizing agent.

Another galvanic type of seawater batteries, in which normally seawater is used as an electrolyte, comprises a magnesium anode and a cathode of copper chloride or silver chloride. These long-term batteries do not need oxygen dissolved in seawater, but they have a small output energy density, are generally heavy and require much space. A Mg/CuCl battery with a watt-year as output energy may have a length of 8 ½ feet, a diameter of 9 inches and a weight of approximately 100 pounds. Moreover, these batteries have a limited flexibility with respect to the design and are restricted to a longitudinal shape. Examples are described in US 4,601,961, US 5,288,564, or US 6,656,628 B2.

Metal-air cells are known primary cells, comprising an anode made of metal, e.g. of aluminum, magnesium or zinc, and an air cathode, which is disposed with a small spacing from the metallic anode, but does not touch the same. A suited electrolyte is provided in a space between the cathode and anode. The anode is immersed into the electrolyte. Different embodiments of such batteries and methods for the production and use of such batteries are known from the prior art, compare, for example, US 5,004,654, US 5,360,680, US 5,376,471, US 5,415,949, US 5,316,632. Typical metal-air batteries and metal-air fuel cells, respectively, are described, for example, in US 6,127,061.

Besides their use in the above-referenced electrical energy generators, magnesium or electrochemically related metals and their alloys, placed in aqueous solutions, have been used to generate hydrogen, which is being considered as an important energy source of the future. Basic concepts in this regard have been developed by Pacheco, e.g. in US 6,834,623, and this concept has meanwhile matured into semi-commercial products; see www.mee-t.com or www.pachecogenerator.com. In JP 2003 221 201 A a hydrogen generating device is disclosed, which contains magnesium alloy particles consisting of granular magnesium and a plurality of catalytic nickel or iron particulates on the surface and at the inside of the granular magnesium in a closed reactor vessel.

Based on the above-described prior art it is an object of the present invention to provide an improved electrochemical energy source, which specifically also

serves as a hydrogen source, constructed in a simple manner and being highly efficient.

This and other objects are solved by an arrangement for producing hydrogen according to claim 1 and, more specially, by an electrochemical arrangement for producing hydrogen and generating electrical power according to claim 9. Likewise, a process for producing hydrogen and, more preferably, for producing hydrogen and electrical power, are being described herein.

It is an important aspect of the invention, to provide, as an essential part of the arrangement, a hydrogen-developing body in or on the electrolyte-contacting surface of which regions formed from magnesium, Mg, or the like, or an alloy thereof alternate with regions formed from ferrum, Fe, or a Fe alloy, or the like. Herein, the wording "or the like" designates chemical elements or alloys therefrom which in the electrochemical behaviour are close to magnesium on the one hand or close to ferrum on the other and which, therefore, could replace magnesium on the one hand and ferrum on the other, in their respective function as described below, at least to a certain extent. Among others, zinc, Zn, can, in principle, be used to replace magnesium, whereas on the other hand carbon might replace ferrum or, more specifically, steel.

In an embodiment of the invention, the electrolyte-contacting surface of the body comprises at least a first sheet formed from Mg or a Mg alloy and a second sheet formed from Fe or a Fe alloy, the first and second sheet being closely bonded to each other, wherein the first or the second sheet is basically continuous and correspondingly the second or the first sheet comprises a plurality of apertures, the surface of the basically continuous sheet being capable to contact the electrolyte solution through the apertures of the non-continuous sheet. In an alternative embodiment, the regions formed from ferrum or the like can be deposited on an substrate made from magnesium or the like by means of a deposition process, e.g. a galvanic process.

In another embodiment, the hydrogen-developing body is plate-shaped and comprises at least one of islands, strips, meanders, and a grid of Fe or Fe al-

loy, in particular of steel, in or on a matrix of Mg or Zn or a Mg or Zn alloy, or vice versa. In an alternative embodiment, the hydrogen-developing body is cylinder-shaped and comprises at least one of islands, strips, meanders, a grid, rings and a helix of Fe or Fe alloy, in particular of steel, in or on a matrix of Mg or Zn or a Mg or Zn alloy, or vice versa.

Still further, in preferred embodiments a plurality of hydrogen developing bodies, in particular plate-shaped bodies in a face-to-face configuration or cylinders in a coaxial configuration can be comprised in the arrangement. More specifically, the hydrogen-developing bodies each comprise two electrolyte-contacting surfaces, and more preferably the two electrolyte-contacting surfaces of each hydrogen-developing body are formed from a continuous first sheet and to non-continuous second sheets, wherein to both surfaces of the continuous first sheet one of the non-continuous second sheet is bonded.

In all of the above mentioned arrangements, hydrogen gas is developed along the respective surface regions formed from magnesium or a Mg alloy or the like, and this process runs in a more efficient way, and almost pure hydrogen gas can be obtained in an easier way than in prior art hydrogen generators, basically without additional purification from oxygen, which is being generated together with the hydrogen.

Still further, the proposed arrangement comprises means for accumulating hydrogen which has been developed on the surface of the body. In a preferred embodiment, the means for accumulating hydrogen comprise actively driven exhaustions means.

According to a process aspect of the present invention, an arrangement as described above is being set in a container comprising the electrolyte solution or in a flow of the electrolyte solution, and the hydrogen developed on the surface of the body or bodies is being accumulated. In such process, salt water, waste water or tap water is used as an electrolyte solution.

In a further embodiment of the proposed arrangement, preferably to be used in combined renewable energy systems, the body or at least part of the bodies for developing hydrogen is arranged as an anode of an electrochemical cell and at least one cathode is provided and electrically connected to the anode or anodes, respectively, wherein the anode/s and cathode/s are arranged to form a metal/air type cell consuming oxygen. More specifically, in a further embodiment the cathode or cathodes, respectively, are arranged in close spatial relationship to the anode or anodes, respectively, in particular in a stack of alternating plate-shaped cathodes and anodes or a coaxial cylindrical arrangement of alternating cathodes and anodes.

The arrangement comprises electrically driven exhaust means which are connected to the metal/air type cell, preferably via energy buffering means.

In a still further embodiment hydrogen storing means are connected directly to the means of accumulating hydrogen, without means for purifying the gas developed by the arrangement. Correspondingly, under process aspects it is proposed that the hydrogen developed on the surface of the body or bodies is being accumulated without external purification and/or at least part of the electrical power produced by the arrangement is used for exhausting the hydrogen into hydrogen storing means.

The arrangements proposed herein may comprise a single cell or a plurality of cells and, moreover, additional suited components/ frames/casings/ and devices, such as DC/DC converters or the like. The (or each) anode is arranged with a small spatial distance from the cathode, that is, it is spaced apart from the same, but does not touch the cathode. An electrolyte is provided between the anode and cathode.

The anode is made of a material selected from the group consisting of aluminum, zinc, magnesium and alloys thereof. In addition, effective amounts of additives may be provided of Ga, In, Sn, Cd, Pb. Preferably, the air/gas diffusion cathode comprises several layers, namely at least one current collector

mesh, a gas-impermeable, hydrophilic, active layer with a high-dispersion porous carbon and a gas-permeable, hydrophobic layer.

In a further embodiment, the hydrogen-developing body or hydrogen-developing bodies is/are arranged in a hermetically closed reactor vessel, the reactor vessel comprising a water inlet, a hydrogen outlet, and a steam outlet and control means for controlling the intake of the aqueous solution and the output of steam produced in the reactor body in an exothermal reaction at the electrolyte-contacting surfaces of the hydrogen-developing body or bodies. Preferably, the control means comprise start/stop means for starting or stopping the hydrogen production and steam generation.

In an embodiment of a power supply system, the steam outlet is, via steam connection control means, selectively connected to a steam machine and the hydrogen outlet is, via hydrogen connection control means, selectively connected to hydrogen storing means and/or a fuel cell and/or hydrogen driven machine.

The casing of the arrangement, which is especially made of plastics, may comprise one or more frames or frame-like structures, on which the cathodes are each mounted in a liquid-tight manner. In a preferred embodiment the walls of the casing space form, at least approximately, a cuboid. As will be appreciated by the person skilled in the art, of course, other shapes are feasible as well, like that of a cylinder. Preferably, at least two opposite walls of the casing space are formed, at least region-wise, by the especially plate-shaped cathodes or the hydrophobic layers of the cathode, respectively.

In a further embodiment of the process, at least part of internal pressure developed in the container is used for outputting pressurized hydrogen, to drive a hydrogen-driven machine or to press hydrogen into hydrogen storing means or into a fuel cell and/or for outputting pressurized steam, to drive a steam machine.

Further aspects and effects of the invention become clear from the more detailed explanation of embodiments on the basis of the attached drawings, of which

Fig. 1A shows the components and Fig. 1B shows an assembled stack of alternating anodes and cathodes of an embodiment of the inventive arrangement for producing hydrogen and generating electrical power,

Fig. 2 is a schematic perspective view of another arrangement of hydrogen-developing bodies,

Fig. 3 is a perspective view of still another arrangement of hydrogen-developing bodies,

Fig. 4 is a block diagram of an arrangement for producing hydrogen according to an embodiment of the invention,

Fig. 5 is a block diagram of an arrangement for producing hydrogen and generating electrical energy, as a multivalent energy source

Fig. 6 is a schematic perspective view of a reactor vessel for producing hydrogen and steam,

Fig. 7 is a sectional view of this reactor vessel, and

Fig. 8 is a perspective view of a system comprising a reactor vessel of Figs. 6 and 7.

Fig. 1A shows a multi-layered anode 1 and a cathode 3 of a metal-air type battery (not shown as such). The anode 1 comprises a basic or intermediate metal sheet 1a, made of steel, and two outer metal sheets 1b, 1c, both made from a Mg alloy and comprising a regular pattern of apertures 1d. Besides

these regular apertures, all sheets of the anode 1, as well as the cathode 3, comprise mounting holes 5 close to their respective corners and longer edges.

Fig. 1B shows an assembled stack of anodes 1 and cathodes 3, to be used as the core component of a metal-air type battery. The stack 10 is being assembled by means of bolts 11 which are inserted into the mounting holes 5 of the layered anodes 1 and cathodes 3, with spacers 13a, 13b of different height inserted therebetween. In this stack, the intermediate sheet 1a and outer sheets 1b, 1c of the anode 1 are being pressed against each other without any spacing therebetween, whereas the smaller spacers 13a maintain a predetermined gap between the anodes 1 and cathodes 3 of each sub-stack, which comprises a central cathode and two anodes. The larger spacers 13b maintain a larger gap between each of these sub-stacks. In use, an electrolyte is contained or flows between the respective gaps between the anodes and cathodes or the sub-stacks, respectively.

Fig. 2 schematically shows a coaxial cylindrical arrangement 20 of hydrogen-developing bodies (i.e. cylinders) 21, each of which is made from a magnesium cylinder 21a, which may be formed by a press moulding or extruding technique and a steel helix 21b which is wound around the respective magnesium cylinder core 21a and attached thereto. It may be attached simply by means of an elastic force exerted to the magnesium core cylinder if the helix is made as a steel spring with a smaller diameter than that of the magnesium core and put onto the core in a widened state. Such embodiment has, incidentally, an advantage insofar as the steel helix adapts its diameter to a reducing diameter of the magnesium core, which is the result of Mg consumption in the process of hydrogen production. However, it is also possible to use specific fastening means, to fix the steel helix to the core cylinder.

Fig. 3 shows a stack 30 of plate-shaped hydrogen-developing bodies 31, each of which consists of a magnesium plate 31a and nickel islands 31b deposited thereon in a regular array, e.g. by means of a galvanic process.

Fig. 4 schematically shows an arrangement 40 for generating hydrogen. The arrangement comprises a plurality of hydrogen-developing plates 41, arranged in parallel to each other in a container 43 which is filled with an aqueous electrolyte 45. The container 43 has an outlet 47 which is connected, through a pump 48, to a gas tank 49 for storing the hydrogen which is generated at the surfaces of the hydrogen-generating plates 41.

Fig. 5 shows a more complex and more sophisticated arrangement 50 for producing hydrogen and generating electrical power, which comprises a flow cell 53 wherein a stack of hydrogen-developing plates 51 (similar to that of Fig. 4) is arranged in a flow of an electrolyte 55, e.g. salt water. Alternating with the hydrogen-developing bodies 51, which act as anodes, cathode plates 54 are provided in the flow cell 53 and in the electrolyte flow 55, electrically connected to the anodes in a battery-type circuit (not shown). As in the embodiment of Fig. 4 and described above, the flow cell 53 has a gas outlet 57, a gas pump 58 and a gas tank 59 for exhausting and storing the hydrogen which is produced for the arrangement. Additionally, electrical outputs 56a, 56b are provided, on the one hand for driving the pump 58 with electrical power which is generated within the arrangement, and for feeding remaining electrical energy to external loads, e.g. a boat or submarine drive system.

Fig. 6 and 7 show a perspective view or sectional view, respectively, of a hydrogen and steam generator 60, which may comprise a hydrogen-developing body or hydrogen-developing bodies as described above in detail but which can likewise contain a different hydrogen-developing arrangement. The reactor 60 comprises a thick-walled reactor vessel 61 having fastening means 61a for mounting it to a base, a vehicle body or similar. The reactor has a power locked lid or cover 62 comprising a seal 62a. To withstand a high pressure which may develop inside the vessel, robust locking means are provided at the cover, namely a three-armed clamp 63 comprising three pivotable clamping brackets 63a, a central clamping bridge 63b and a central locking screw 63c. For safety reasons, for limiting the pressure inside the vessel, in the cover 62 or at the wall of the vessel 61 a safety valve 64 is provided.

At the cover 62 (as shown in Fig. 6) or at the reactor vessel body 61 (as shown in Fig. 7), several inlets/outlets are provided, namely a water intake valve 65, hydrogen outlet valve 66 and steam outlet valve 67 (not all of which are shown in Fig. 7). A pressure gauge 68 is provided in the cover, both for safety and control purposes, and a control port 69 is provided at the side wall of the reactor vessel 61.

As can be seen in Fig. 7, the reactor vessel 61 is double-walled, thus defining an inner reactor compartment 61b and an outer reactor compartment 61c, which are connected to each other by an intake check valve 61d and an outlet check valve 61e. In the inner compartment 61b, a steam coil 71 and a fuel element (hydrogene-developing arrangement) 73 are contained. Whereas the inner compartment or chamber, respectively, 61b thus serves as hydrogen and steam developing chamber, the outer compartment or chamber, respectively, 61c is used for controlling the reaction by means of the automatic in/out check valves 61d, 61e.

The fuel element 73 being placed in the reactor, the inner compartment 61b is filled with water and locked, and the following exothermal reaction produces pure hydrogen and heats the inner chamber, thus producing steam in the steam coil 71.

Fig. 8 schematically illustrates a power supply system 80, the core part of which is the reactor 60 described above. The steam outlet of the reactor 60 is, via a control valve 81, connectable to a steam turbine 82 driving a power generator 83 and/or to a condenser 84. The water inlet of the reactor 60 is connected to a water reservoir 85, which may contain and deliver sea water or waste water or, under certain provisions, even tap water to the reactor.

The hydrogen outlet of the reactor is, via a pneumatic machine 86 and to further control valves 87a, 87b, selectively connectable to a fuel cell 88 and a hydrogen tank 89a and/or control tank 89b. Depending on the hydrogen output and pressure delivered by the reactor, this arrangement can be controlled

to deliver a maximum electrical power output by operating the pneumatic machine 86 and/or the fuel cell 88 and/or to store at least part of the produced hydrogen in a respective tank. The pneumatic machine 86 can be of the magnetic piston air cylinder type or another well-known type or being embodied by a second small turbine unit.

A system as shown in Fig. 8 can well be adapted to a large variety of applications and being scaled correspondingly, including stationary small or mid-sized power plants, land vehicle drives and boat or submarine drives.

The embodiments and aspects of the invention explained above are not determined to limit the scope of the invention, which is exclusively to be determined by the attached claims. Many modifications of the inventive concept are possible within the scope of the claims and, more specifically, arbitrary combinations of the several claim features are considered to be within the scope of the invention.

WHAT IS CLAIMED IS:

1. Arrangement for producing hydrogen from an electrolyte solution, the arrangement comprising:
 - a multi-layered hydrogen-developing body providing an electrolyte-contacting surface by a first body region formed from a first chemical element or alloy having an electrochemical behaviour similar to magnesium and a second body region formed from a second chemical element or alloy having an electrochemical behaviour similar to ferrum, the first body region and the second body region being in contact with one another without any space between the first body region and the second body region, such that a layer as the first body region alternates with a layer as the second body region of the multi-layered hydrogen-developing body; and
 - means for accumulating hydrogen which has developed on the surface of the hydrogen-developing body.
2. Arrangement according to claim 1, wherein the electrolyte-contacting surface of the hydrogen-developing body comprises at least the layer as the first body region as a first sheet formed from Mg or an Mg alloy and the layer as the second body region as a second sheet formed from Fe or a Fe alloy, the first and second sheet being closely bonded to each other providing said contact, wherein the first or the second sheet is basically continuous and correspondingly the second or the first sheet comprises a plurality of apertures, the surface of the basically continuous sheet being capable to contact the electrolyte solution through the apertures of the non-continuous sheet.
3. Arrangement according to claim 1 or 2, wherein the layer as the first body region and the layer as the second body region are plate-shaped and comprises at least one of islands, strips, meanders, and a grid of Fe or Fe alloy, in or on a matrix of Mg or Zn or a Mg or Zn alloy, or vice versa.
4. Arrangement according to claim 1 or 2, wherein the layer as the first body region and the layer as the second body region are cylinder-shaped and comprises

at least one of islands, strips, meanders, a grid, rings and a helix of Fe or Fe alloy, in or on a matrix of Mg or Zn or a Mg or Zn alloy, or vice versa.

5. Arrangement of one of claims 1 to 4, comprising a plurality of hydrogen developing bodies, each comprising two electrolyte-contacting surfaces, the two electrolyte-contacting surfaces of the layer as the first body region and the layer as the second body region are formed from a continuous first sheet and a non-continuous second sheet, wherein to both surfaces of the continuous first sheet one of the non-continuous second sheets is bonded to provide said contact.

10

6. Arrangement of claim 5, wherein the layers are plate-shaped in a face-to-face configuration or cylinders in a coaxial configuration.

7. Arrangement according to one of claims 1 to 6, wherein the means for accumulating hydrogen comprise actively driven exhaustions means.

15

8. Arrangement according to one of claims 1 to 7, comprising an aqueous solution as electrolyte solution.

9. Process for producing hydrogen from an electrolyte solution, wherein an arrangement of one of claims 1 to 8 is being set in a container comprising the electrolyte solution or in a flow of the electrolyte solution, and the hydrogen developed on the surface of the body or bodies is being accumulated.

10. Process according to claim 9, wherein salt water, waste water or tap water is used as an electrolyte solution.

25

11. Electrochemical arrangement for producing hydrogen and generating electrical power, comprising an arrangement of one of claims 1 to 8, wherein the hydrogen-developing body or at least part of plural hydrogen-developing bodies is arranged as an anode of an electrochemical cell and at least one cathode is provided and electrically connected to the anode or anodes, respectively, wherein the anode/s and cathode/s are arranged to form a metal/air type cell consuming oxygen.

30

12. Arrangement according to claim 11, wherein the cathode or cathodes, respectively, are arranged in close spatial relationship to the anode or anodes, respectively.
- 5 13. Arrangement according to claim 12, the layer as the first body region and the layer as the second body region included as part of a stack of alternating plate-shaped cathodes and anodes or a coaxial cylindrical arrangement of alternating cathodes and anodes.
- 10 14. Arrangement according to one of claims 11 to 13, comprising electrically driven exhaust means which are connected to the metal/air type cell.
15. Arrangement according to claim 14, wherein the exhaust means are connected to the metal/air type cell via energy buffering means.
- 15 16. Arrangement according to one of claims 11 to 15, wherein hydrogen storing means are connected directly to the means of accumulating hydrogen, for storing the gas developed by the arrangement without purification.
- 20 17. Arrangement according to one of claims 11 to 16, for additionally producing steam, wherein the hydrogen-developing body or hydrogen-developing bodies is/are arranged in a hermetically closed reactor vessel, the reactor vessel comprising a water inlet, a hydrogen outlet, and a steam outlet and control means for controlling the intake of the aqueous solution and the output of steam produced in the reactor
- 25 body in an exothermal reaction at the electrolyte-contacting surfaces of the hydrogen-developing body or bodies.
18. Arrangement according to claim 17, the control means comprising start/stop means for starting or stopping the hydrogen production and steam generation.
- 30 19. Power supply system comprising an arrangement of claim 17 or 18, wherein the steam outlet is, via steam connection control means, selectively connected to a steam machine and the hydrogen outlet is, via hydrogen connection control means,

selectively connected to hydrogen storing means and/or a fuel cell and/or hydrogen driven machine.

20. Process for producing hydrogen and generating electrical power, wherein an
5 arrangement of one of claims 11 to 18 is being set in a container comprising the electrolyte solution or in a flow of the electrolyte solution.

21. Process according to claim 20, wherein at least part of the electrical power
10 produced by the arrangement is used for exhausting the hydrogen into hydrogen storing means.

22. Process according to claim 20, wherein at least part of an internal pressure
developed in the container is used for outputting pressurized hydrogen, to drive a
hydrogen-driven machine or to press hydrogen into hydrogen storing means or into
15 a fuel cell and/or for outputting pressurized steam, to drive a steam machine.

23. Use of an arrangement of one of claims 11 to 18 in a drive system of a vehicle, airplane, boat or submarine.

20 24. Use of a system of claim 19 in a drive system of a vehicle, airplane, boat or submarine.

25. Arrangement according to claim 1, wherein the first chemical element or alloy is formed from zinc as having the electrochemical behaviour similar to magnesium and the second chemical element or alloy is formed from carbon or steel having the electrochemical behaviour similar to ferrum.
25

26. Arrangement according to claim 1, wherein the first chemical element or alloy is formed from aluminium as having the electrochemical behaviour similar to magnesium.
30

27. Arrangement according to claim 1, wherein the first chemical element or alloy is formed from zinc as having the electrochemical behaviour similar to magnesium.

28. Arrangement according to any one of claims 25 to 27, wherein the layer as the first body region further includes an additive selected from the group consisting of; Ga; In; Sn; Cd; and Pb.
- 5
29. Arrangement according to claim 1, wherein the layer as the first body region further includes an additive selected from the group consisting of; Ga; In; Sn; Cd; and Pb.
- 10 30. Arrangement according to claim 1, wherein the layer as the first body region and the layer as the second body region included as part of a stack of alternating anodes and cathodes.
- 15 31. Arrangement according to claim 1, wherein the electrolyte-contacting surface of the hydrogen-developing body comprises at least the layer as the first body region as a first sheet formed from Mg or an Mg alloy and the layer as the second body region as a second sheet formed from Fe or a Fe alloy, the first and second sheet being closely bonded to each other providing said contact.
- 20 32. Arrangement according to claims 1 or 31, wherein the layer as the first body region and the layer as the second body region are plate-shaped.
33. Arrangement according to claims 1 or 31, wherein the layer as the first body region and the layer as the second body region are cylinder-shaped.
- 25
34. Arrangement according to one of claims 31 to 33, wherein the layer as the second body region is deposited on a substrate made from the layer as the first body region by a deposition process.
- 30 35. Arrangement according to claim 1, wherein the layer as the second body region is deposited on a substrate made from the layer as the first body region by a deposition process.

36. An anode for an electrochemical cell configured as a multi-layered hydrogen-developing body providing an electrolyte-contacting surface by a first body region formed from a first chemical element or alloy having an electrochemical behaviour similar to magnesium and a second body region formed from a second chemical element or alloy having an electrochemical behaviour similar to ferrum, the first body region and the second body region being in contact with one another without any space between the first body region and the second body region, such that a layer as the first body region alternates with a layer as the second body region of the multi-layered hydrogen-developing body.
37. An electrochemical cell comprising the anode of claim 36, the electrochemical cell further comprising a cathode electrically connected to the anode to provide the electrochemical cell.
38. The electrochemical cell of claim 37, wherein the anode is spaced apart by a spatial distance from the cathode in order to facilitate positioning of an electrolyte between the anode and the cathode.
39. The electrochemical cell of claim 37, wherein the cathode is configured to include a plurality of layers.
40. The electrochemical cell of claim 39, wherein plurality of layers includes at least one current collector layer and another layer selected from the group consisting of: a gas-impermeable hydrophilic layer and a gas permeable hydrophobic layer.
41. The anode according to claim 36, wherein the first chemical element or alloy is formed from zinc as having the electrochemical behaviour similar to magnesium and the second chemical element or alloy is formed from carbon or steel having the electrochemical behaviour similar to ferrum.
42. The anode according to claim 36, wherein the first chemical element or alloy is formed from aluminium as having the electrochemical behaviour similar to magnesium.

43. The anode according to claim 36, wherein the first chemical element or alloy is formed from zinc as having the electrochemical behaviour similar to magnesium.
44. The anode according to any one of claims 41 to 43, wherein the layer as the
5 first body region further includes an additive selected from the group consisting of; Ga; In; Sn; Cd; and Pb.
45. The anode according to claim 36, wherein the layer as the first body region further includes an additive selected from the group consisting of; Ga; In; Sn; Cd;
10 and Pb.
46. The anode according to claim 36, wherein the layer as the first body region and the layer as the second body region included as part of a stack of alternating anodes and cathodes.
15
47. The anode according to claim 36, wherein the electrolyte-contacting surface of the hydrogen-developing body comprises at least the layer as the first body region as a first sheet formed from Mg or an Mg alloy and the layer as the second body region as a second sheet formed from Fe or a Fe alloy, the first and second
20 sheet being closely bonded to each other providing said contact.
48. The anode according to claims 36 or 47, wherein the layer as the first body region and the layer as the second body region are plate-shaped.
- 25 49. The anode according to claims 36 or 47, wherein the layer as the first body region and the layer as the second body region are cylinder-shaped.
50. The anode according to one of claims 47 to 49, wherein the layer as the second body region is deposited on a substrate made from the layer as the first body
30 region by a deposition process.
51. The anode according to claim 36, wherein the layer as the second body region is deposited on a substrate made from the layer as the first body region by a deposition process.

52. Device for producing hydrogen from an electrolyte solution, the arrangement comprising:

a housing configured for holding an electrolyte;

5 an anode in the housing, the anode as a multi-layered hydrogen-developing body providing an electrolyte-contacting surface by a first body region formed from a first chemical element or alloy having an electrochemical behaviour similar to magnesium and a second body region formed from a second chemical element or alloy having an electrochemical behaviour similar to ferrum, the first body region
10 and the second body region being in contact with one another without any space between the first body region and the second body region, such that a layer as the first body region alternates with a layer as the second body region of the multi-layered hydrogen-developing body;

a cathode in the housing and electrically coupled to the anode and spaced
15 apart by a spatial distance from the anode in order to facilitate positioning of the electrolyte between the anode and the cathode; and

means for accumulating hydrogen which has developed on the surface of the hydrogen-developing body.

20 53. Device according to claim 52, the layer as the first body region and the layer as the second body region included as part of a stack of alternating cathodes and anodes.

54. Device according to claim 52, wherein the first chemical element or alloy is
25 formed from zinc as having the electrochemical behaviour similar to magnesium and the second chemical element or alloy is formed from carbon or steel having the electrochemical behaviour similar to ferrum.

55. Device according to claim 52, wherein the first chemical element or alloy is
30 formed from aluminium as having the electrochemical behaviour similar to magnesium.

56. Device according to claim 52, wherein the first chemical element or alloy is formed from zinc as having the electrochemical behaviour similar to magnesium.

57. Device according to any one of claims 54 to 56, wherein the layer as the first body region further includes an additive selected from the group consisting of; Ga; In; Sn; Cd; and Pb.

5

58. Device according to claim 52, wherein the layer as the first body region further includes an additive selected from the group consisting of; Ga; In; Sn; Cd; and Pb.

10 59. Device according to claim 52, wherein the layer as the first body region and the layer as the second body region included as part of a stack of alternating anodes and cathodes.

15 60. Device according to claim 52, wherein the electrolyte-contacting surface of the hydrogen-developing body comprises at least the layer as the first body region as a first sheet formed from Mg or an Mg alloy and the layer as the second body region as a second sheet formed from Fe or a Fe alloy, the first and second sheet being closely bonded to each other providing said contact.

20 61. Device according to claims 52 or 60, wherein the layer as the first body region and the layer as the second body region are plate-shaped.

62. Device according to claims 52 or 60, wherein the layer as the first body region and the layer as the second body region are cylinder-shaped.

25

63. Device according to one of claims 60 to 62, wherein the layer as the second body region is deposited on a substrate made from the layer as the first body region by a deposition process.

30 64. Device according to claim 52, wherein the layer as the second body region is deposited on a substrate made from the layer as the first body region by a deposition process.

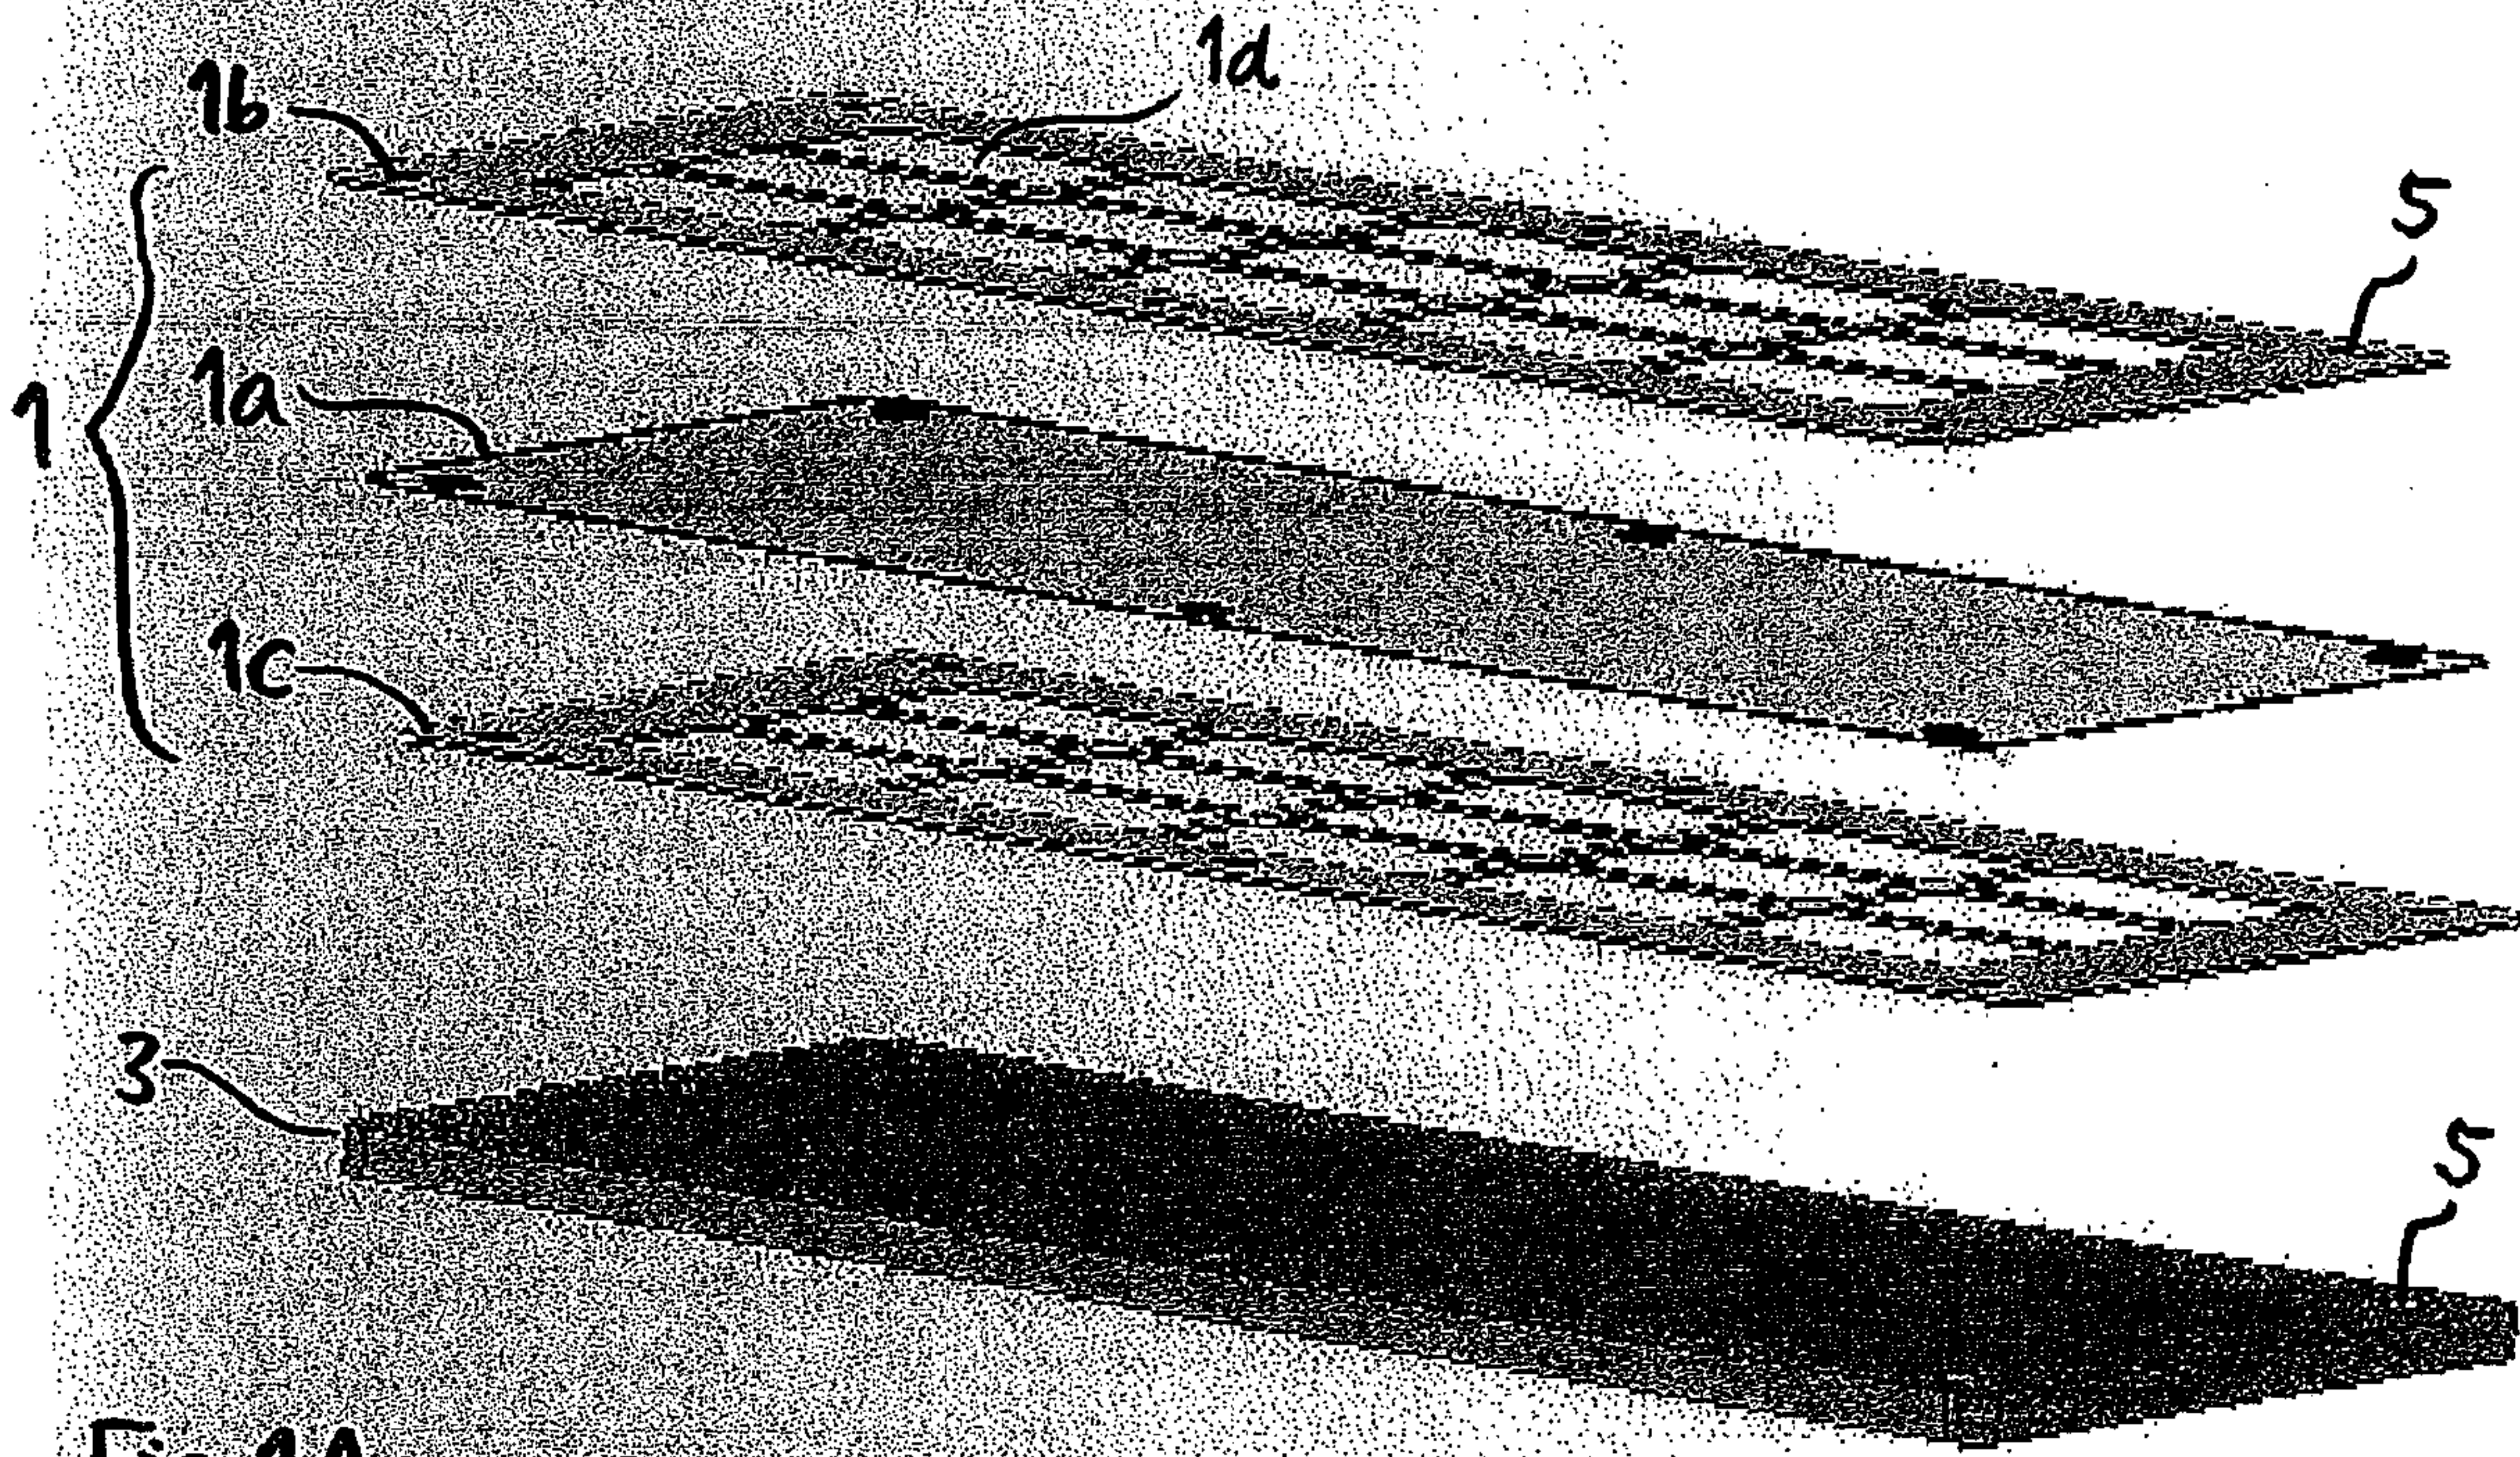


Fig. 1A

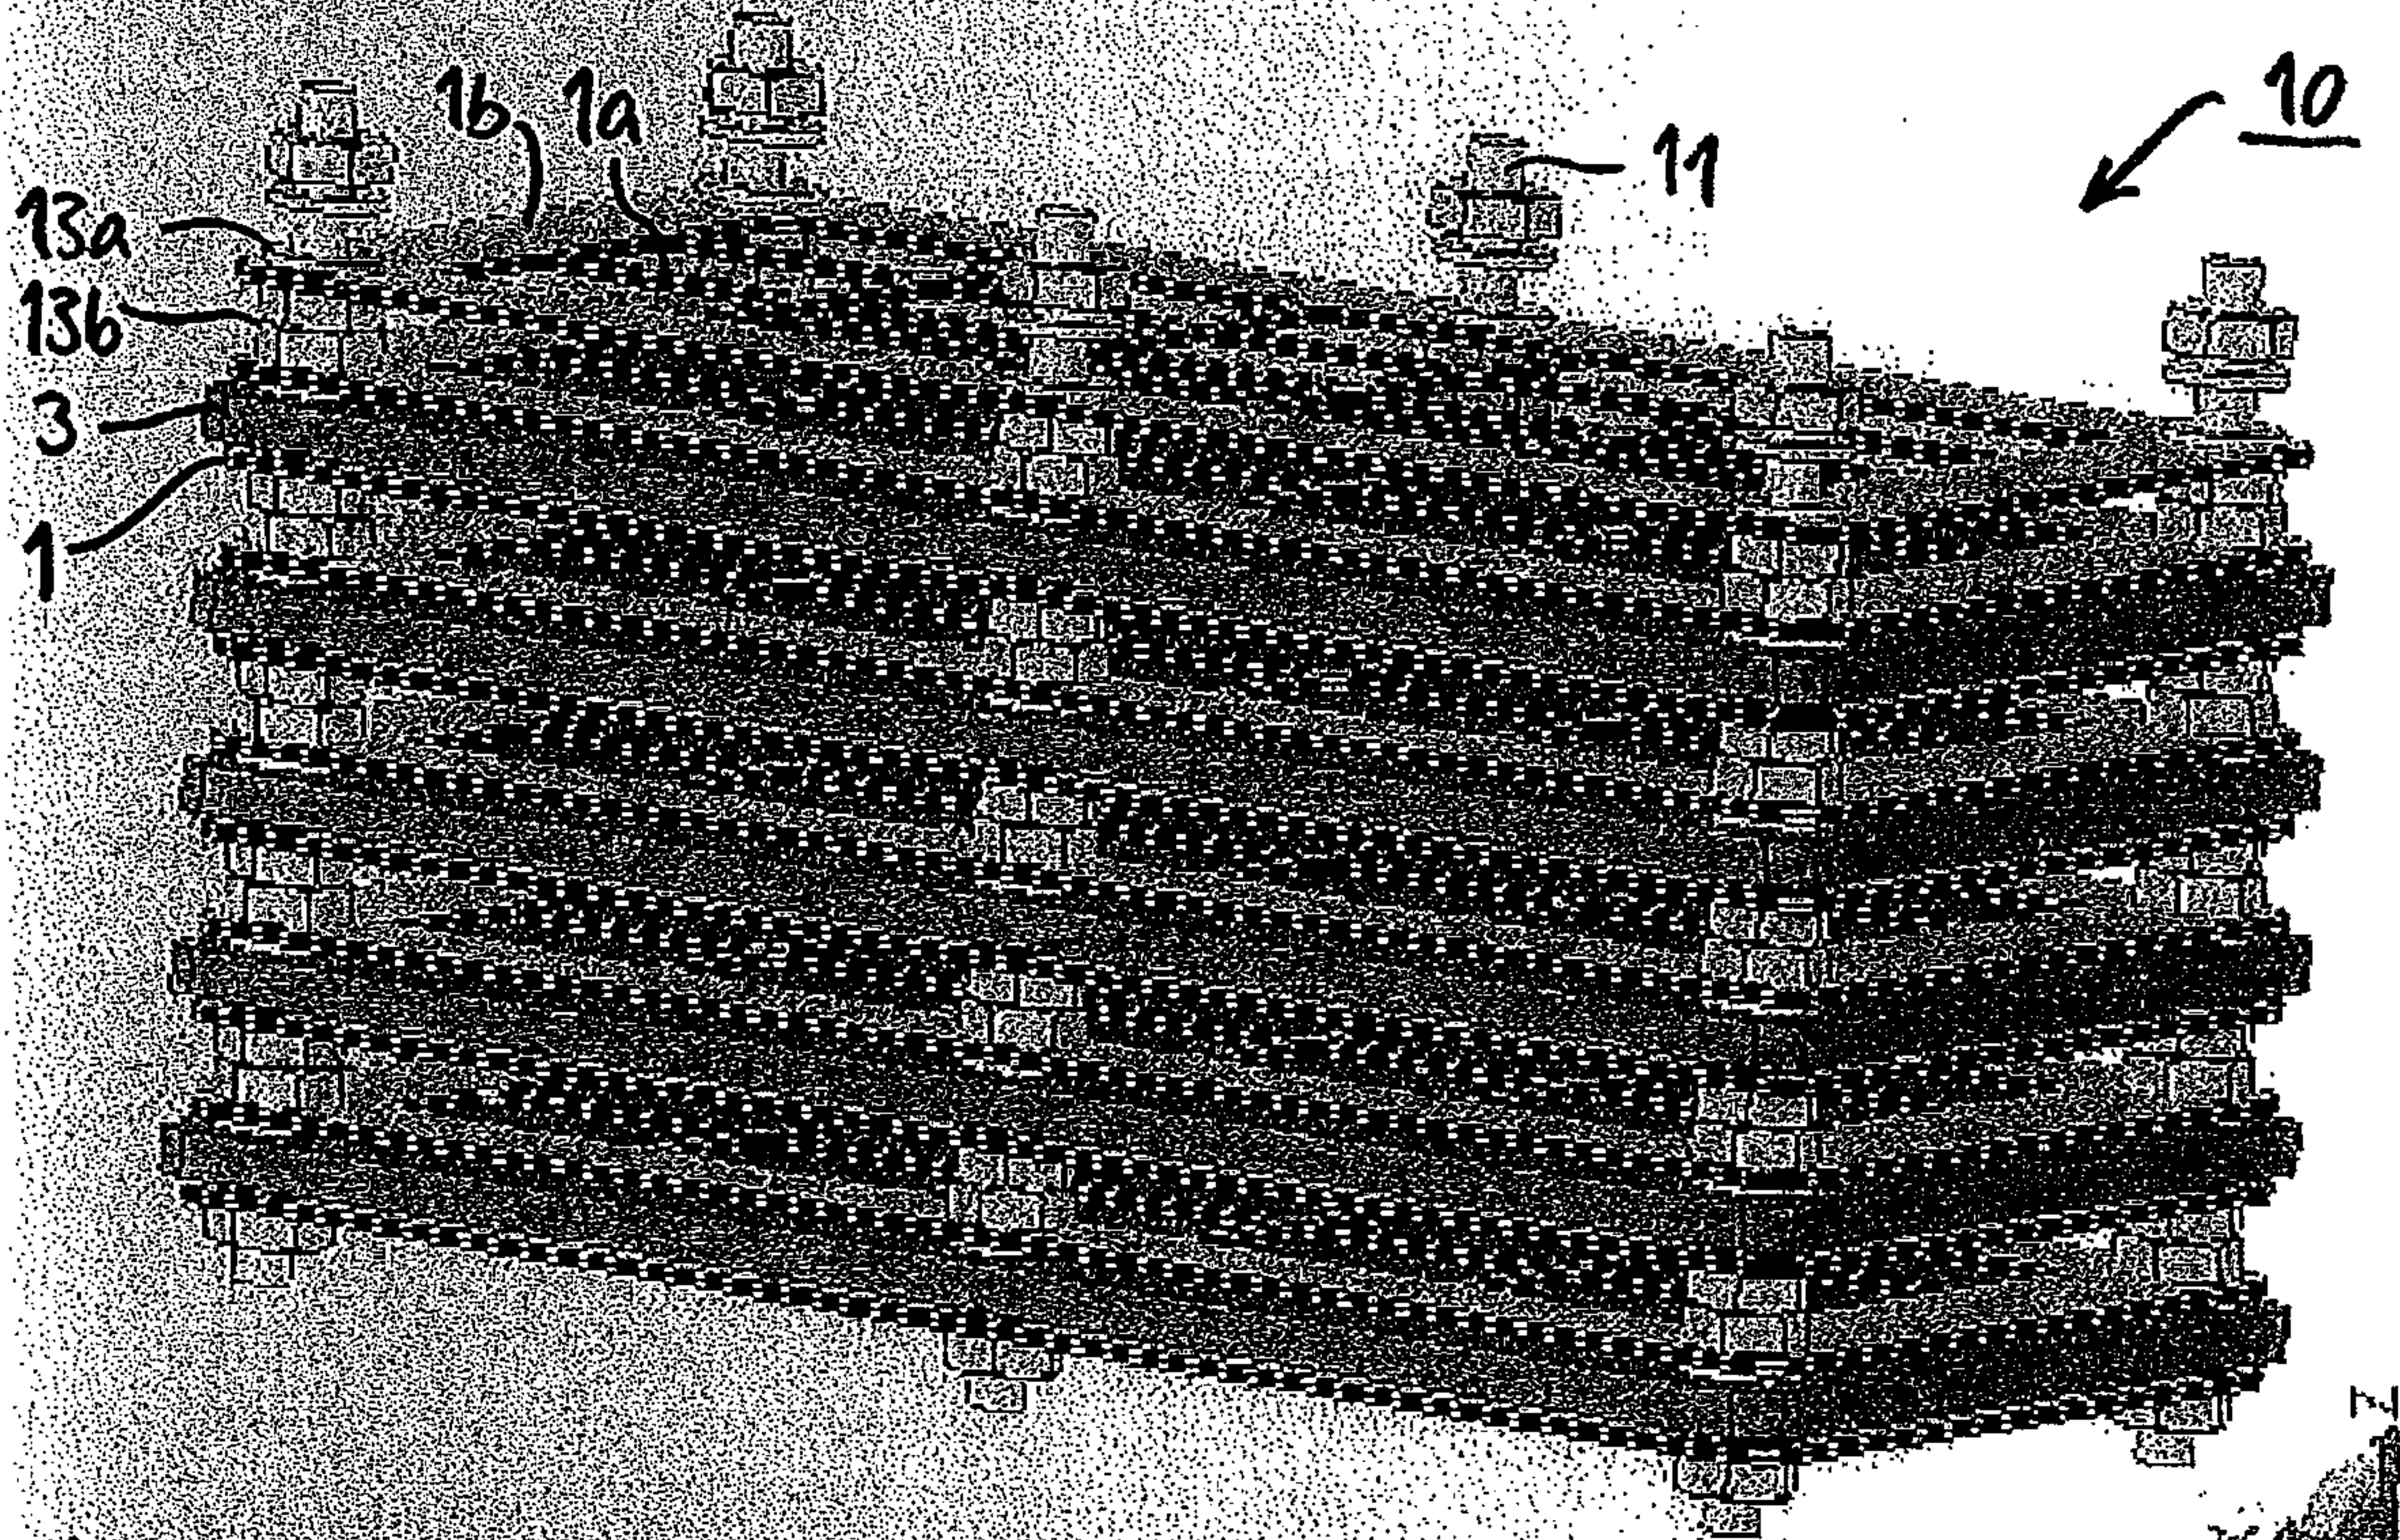


Fig. 1B

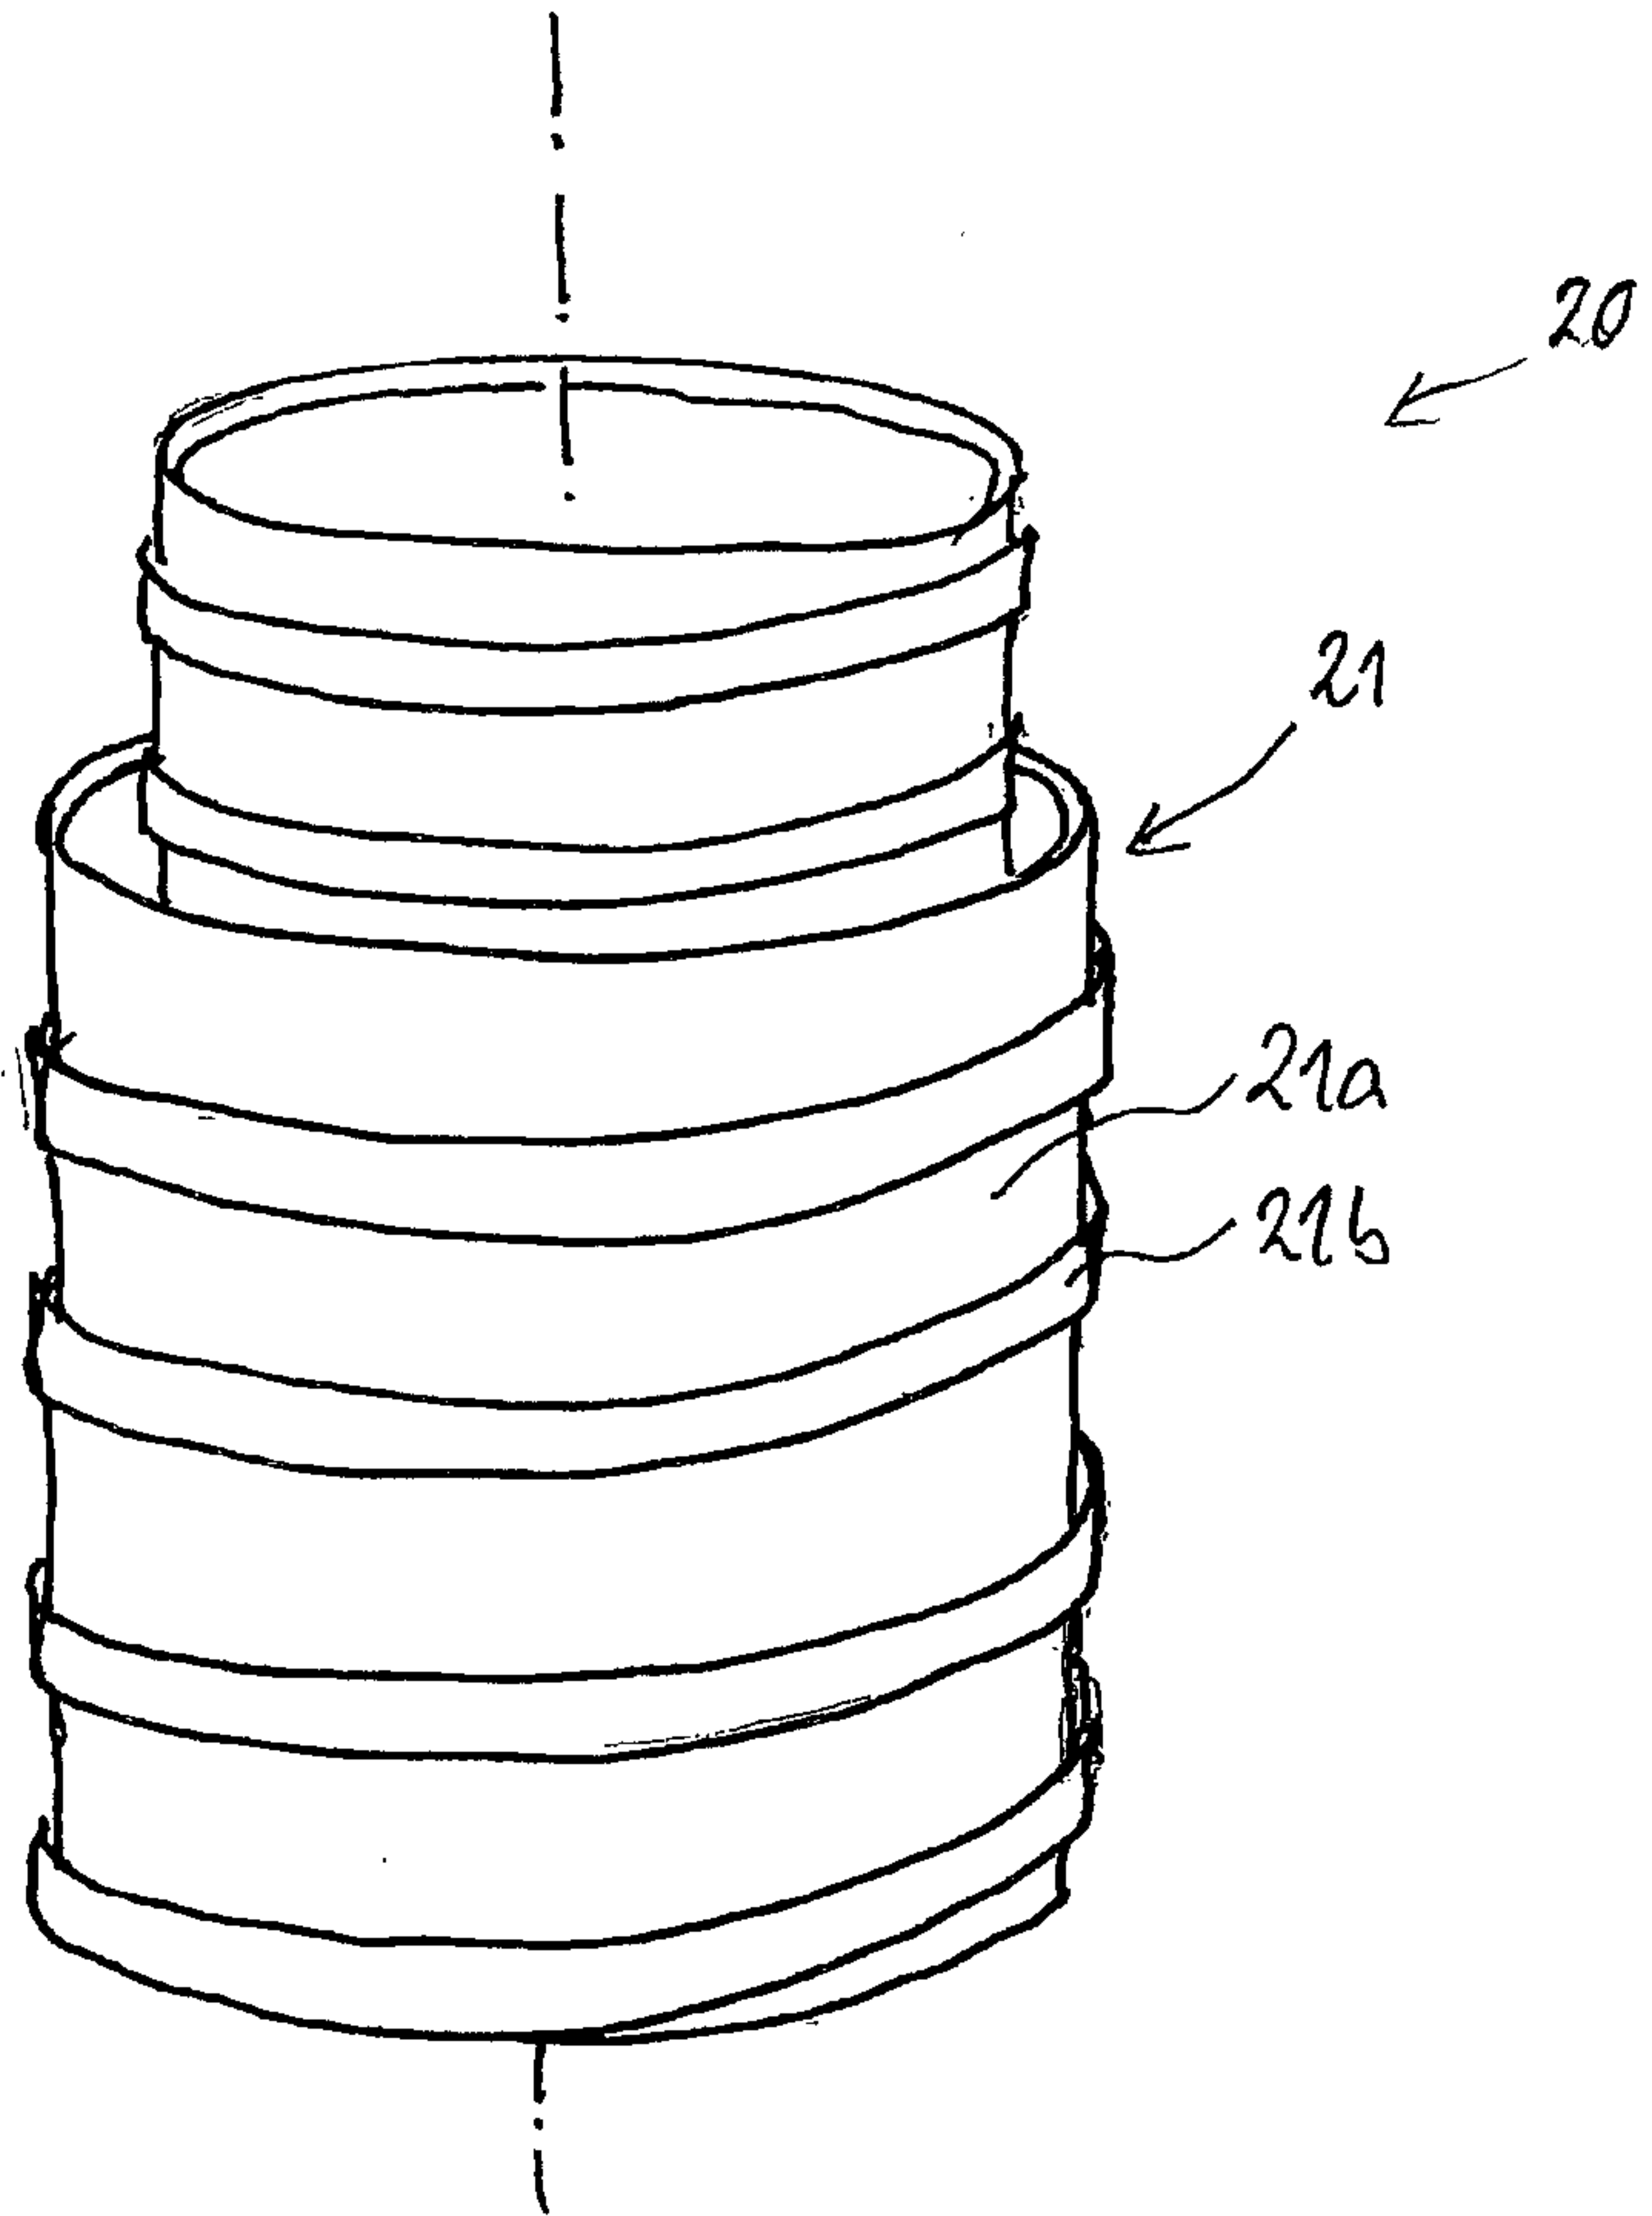


Fig. 2

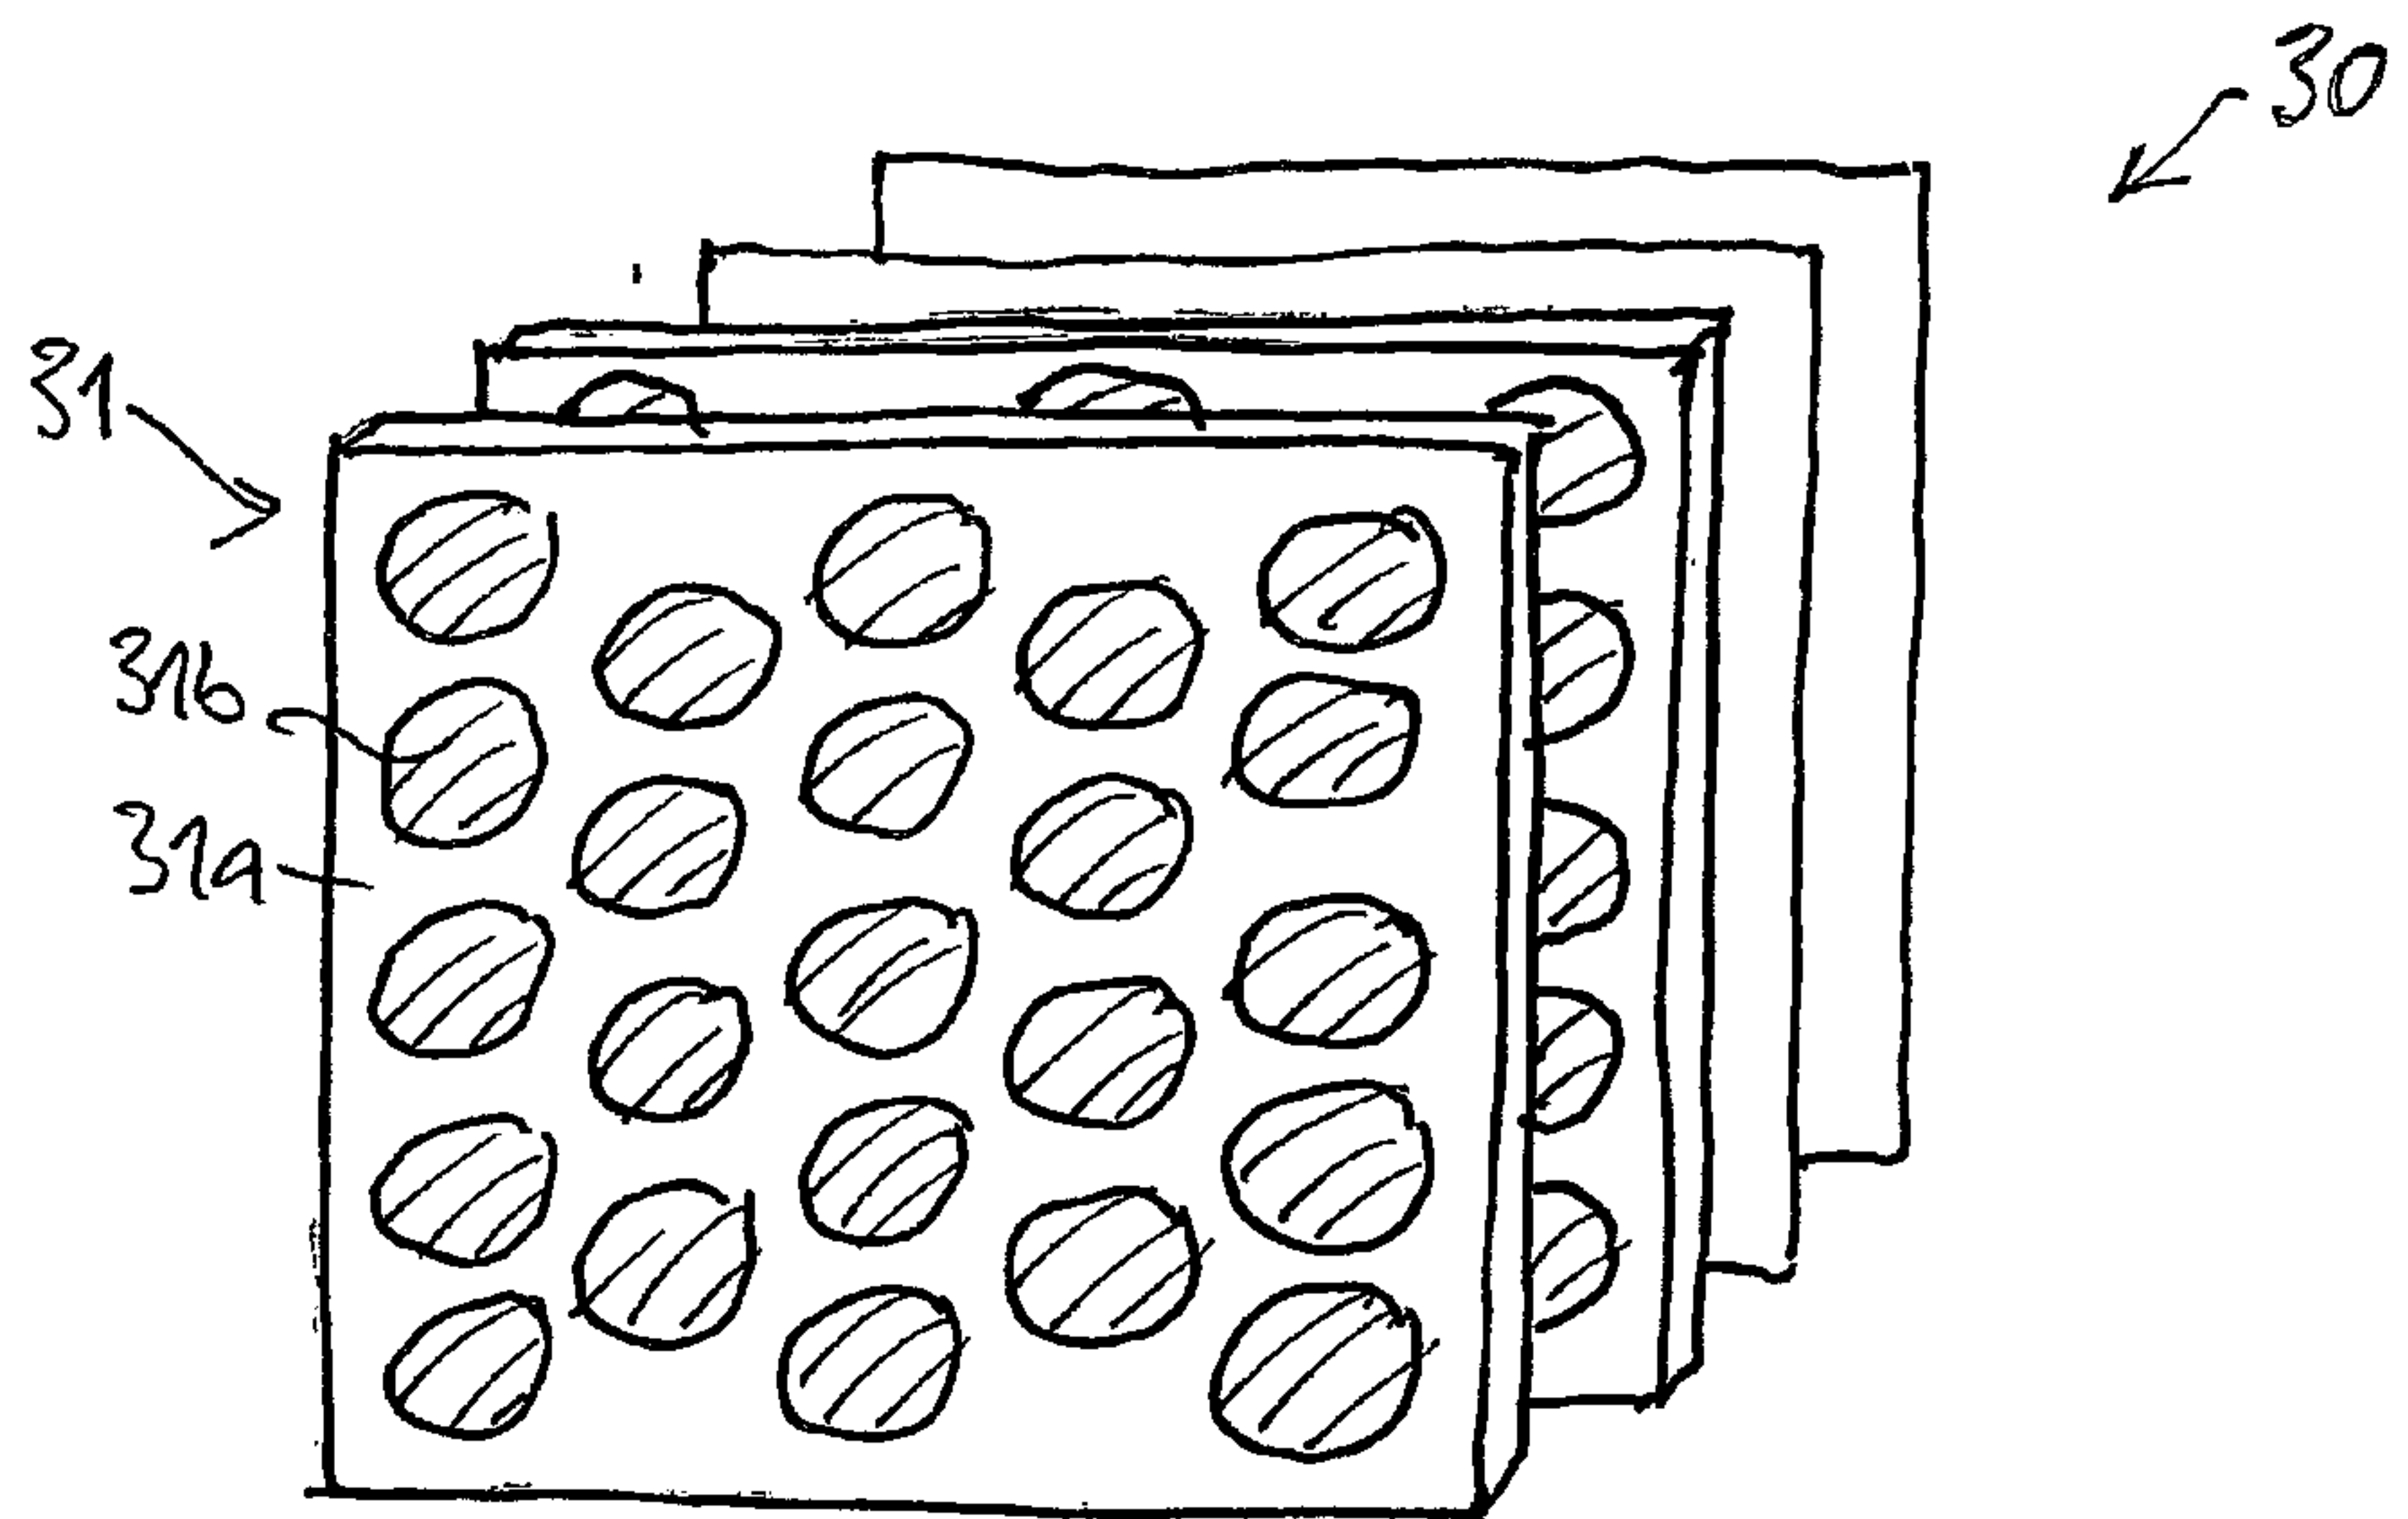


Fig. 3

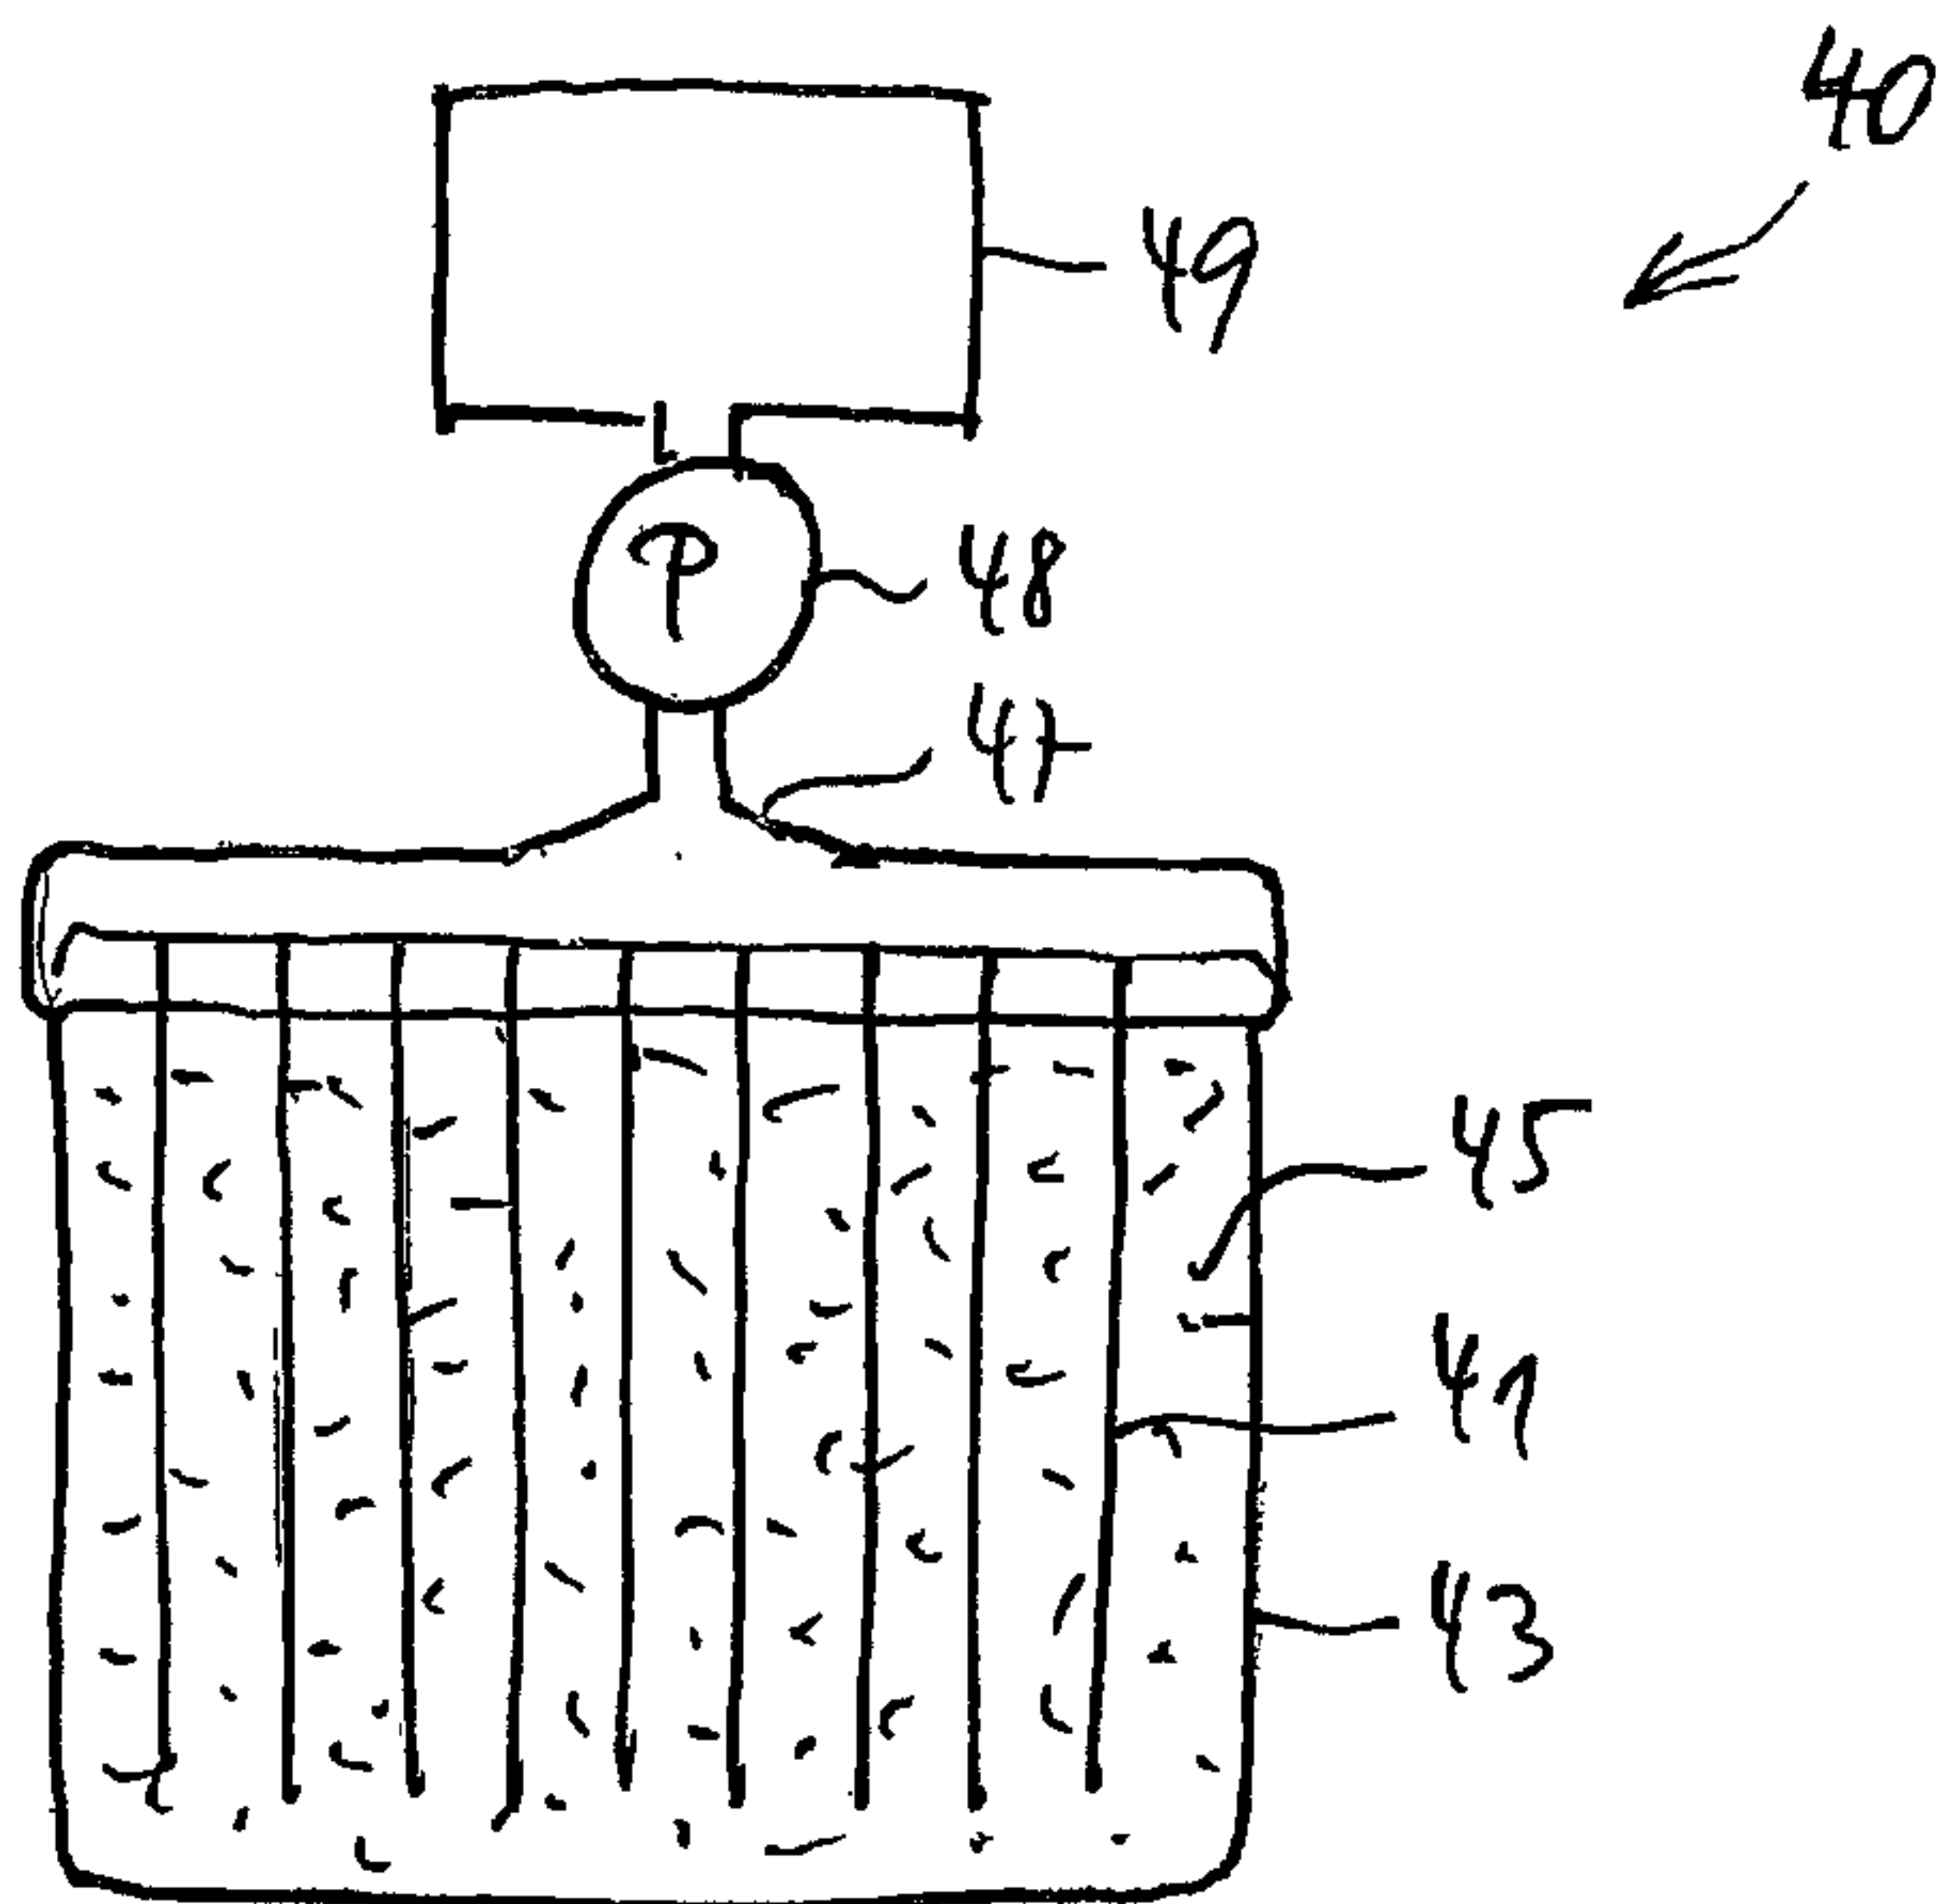


Fig. 4

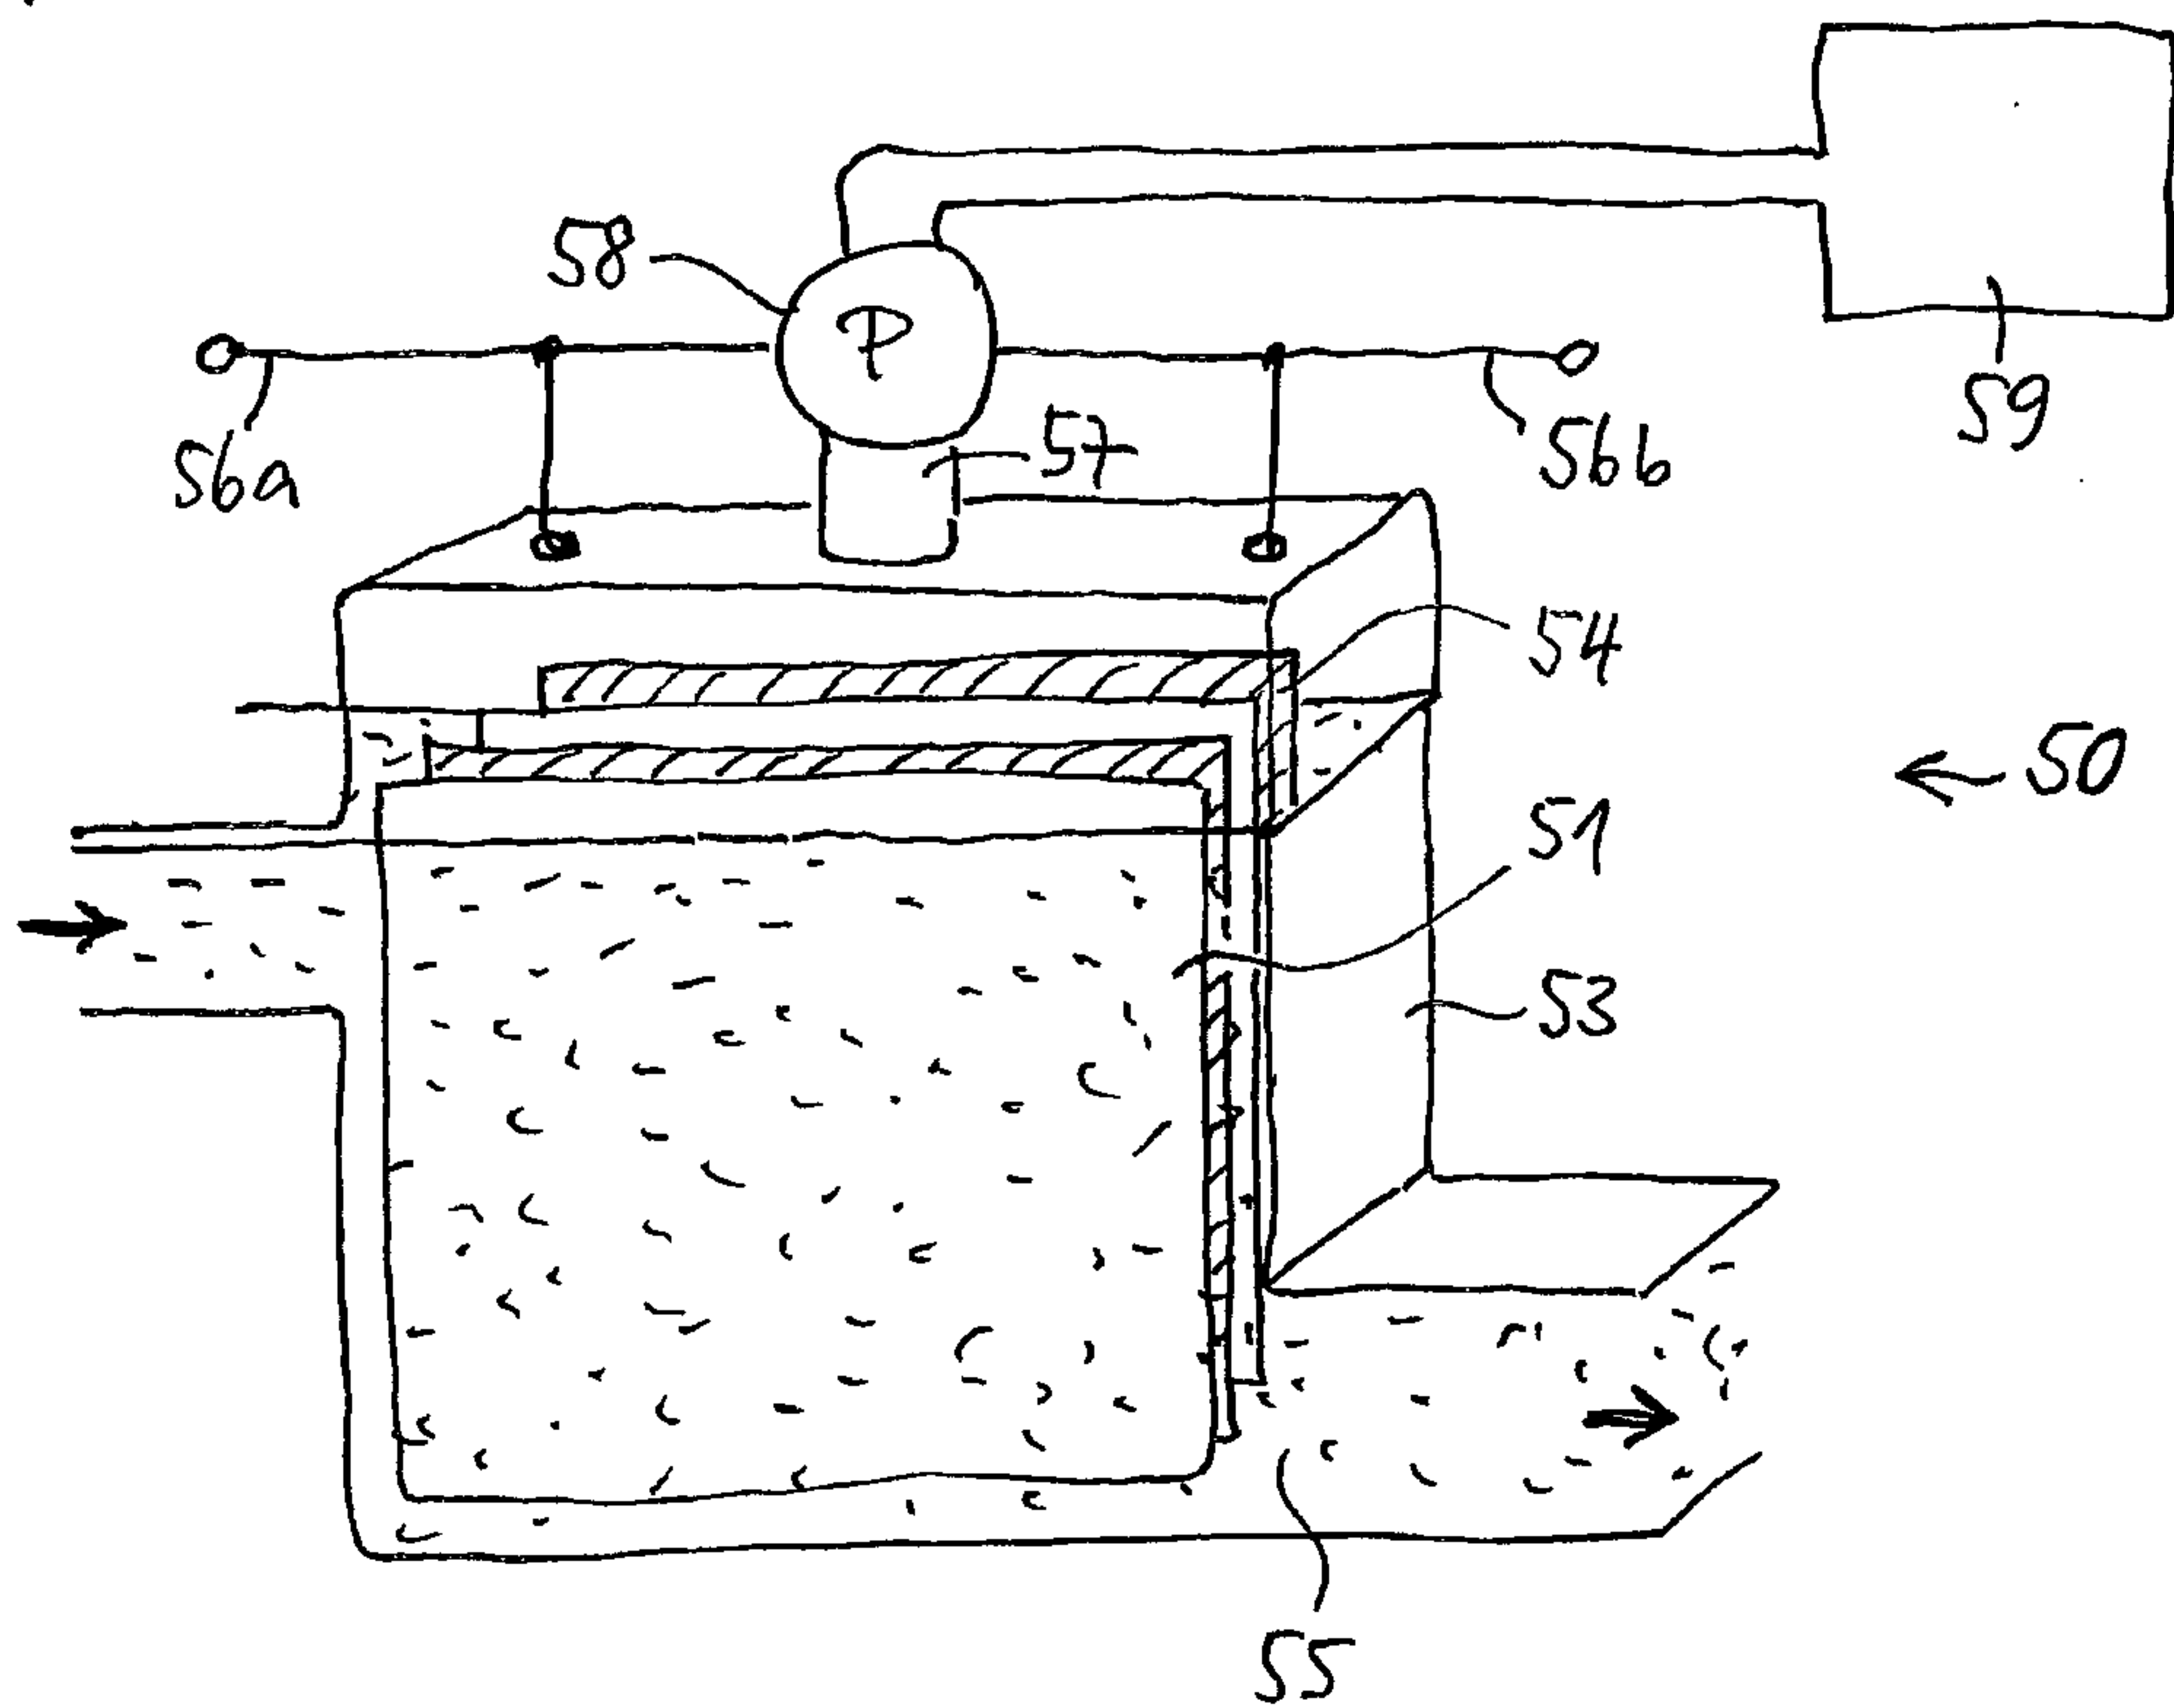


Fig. 5

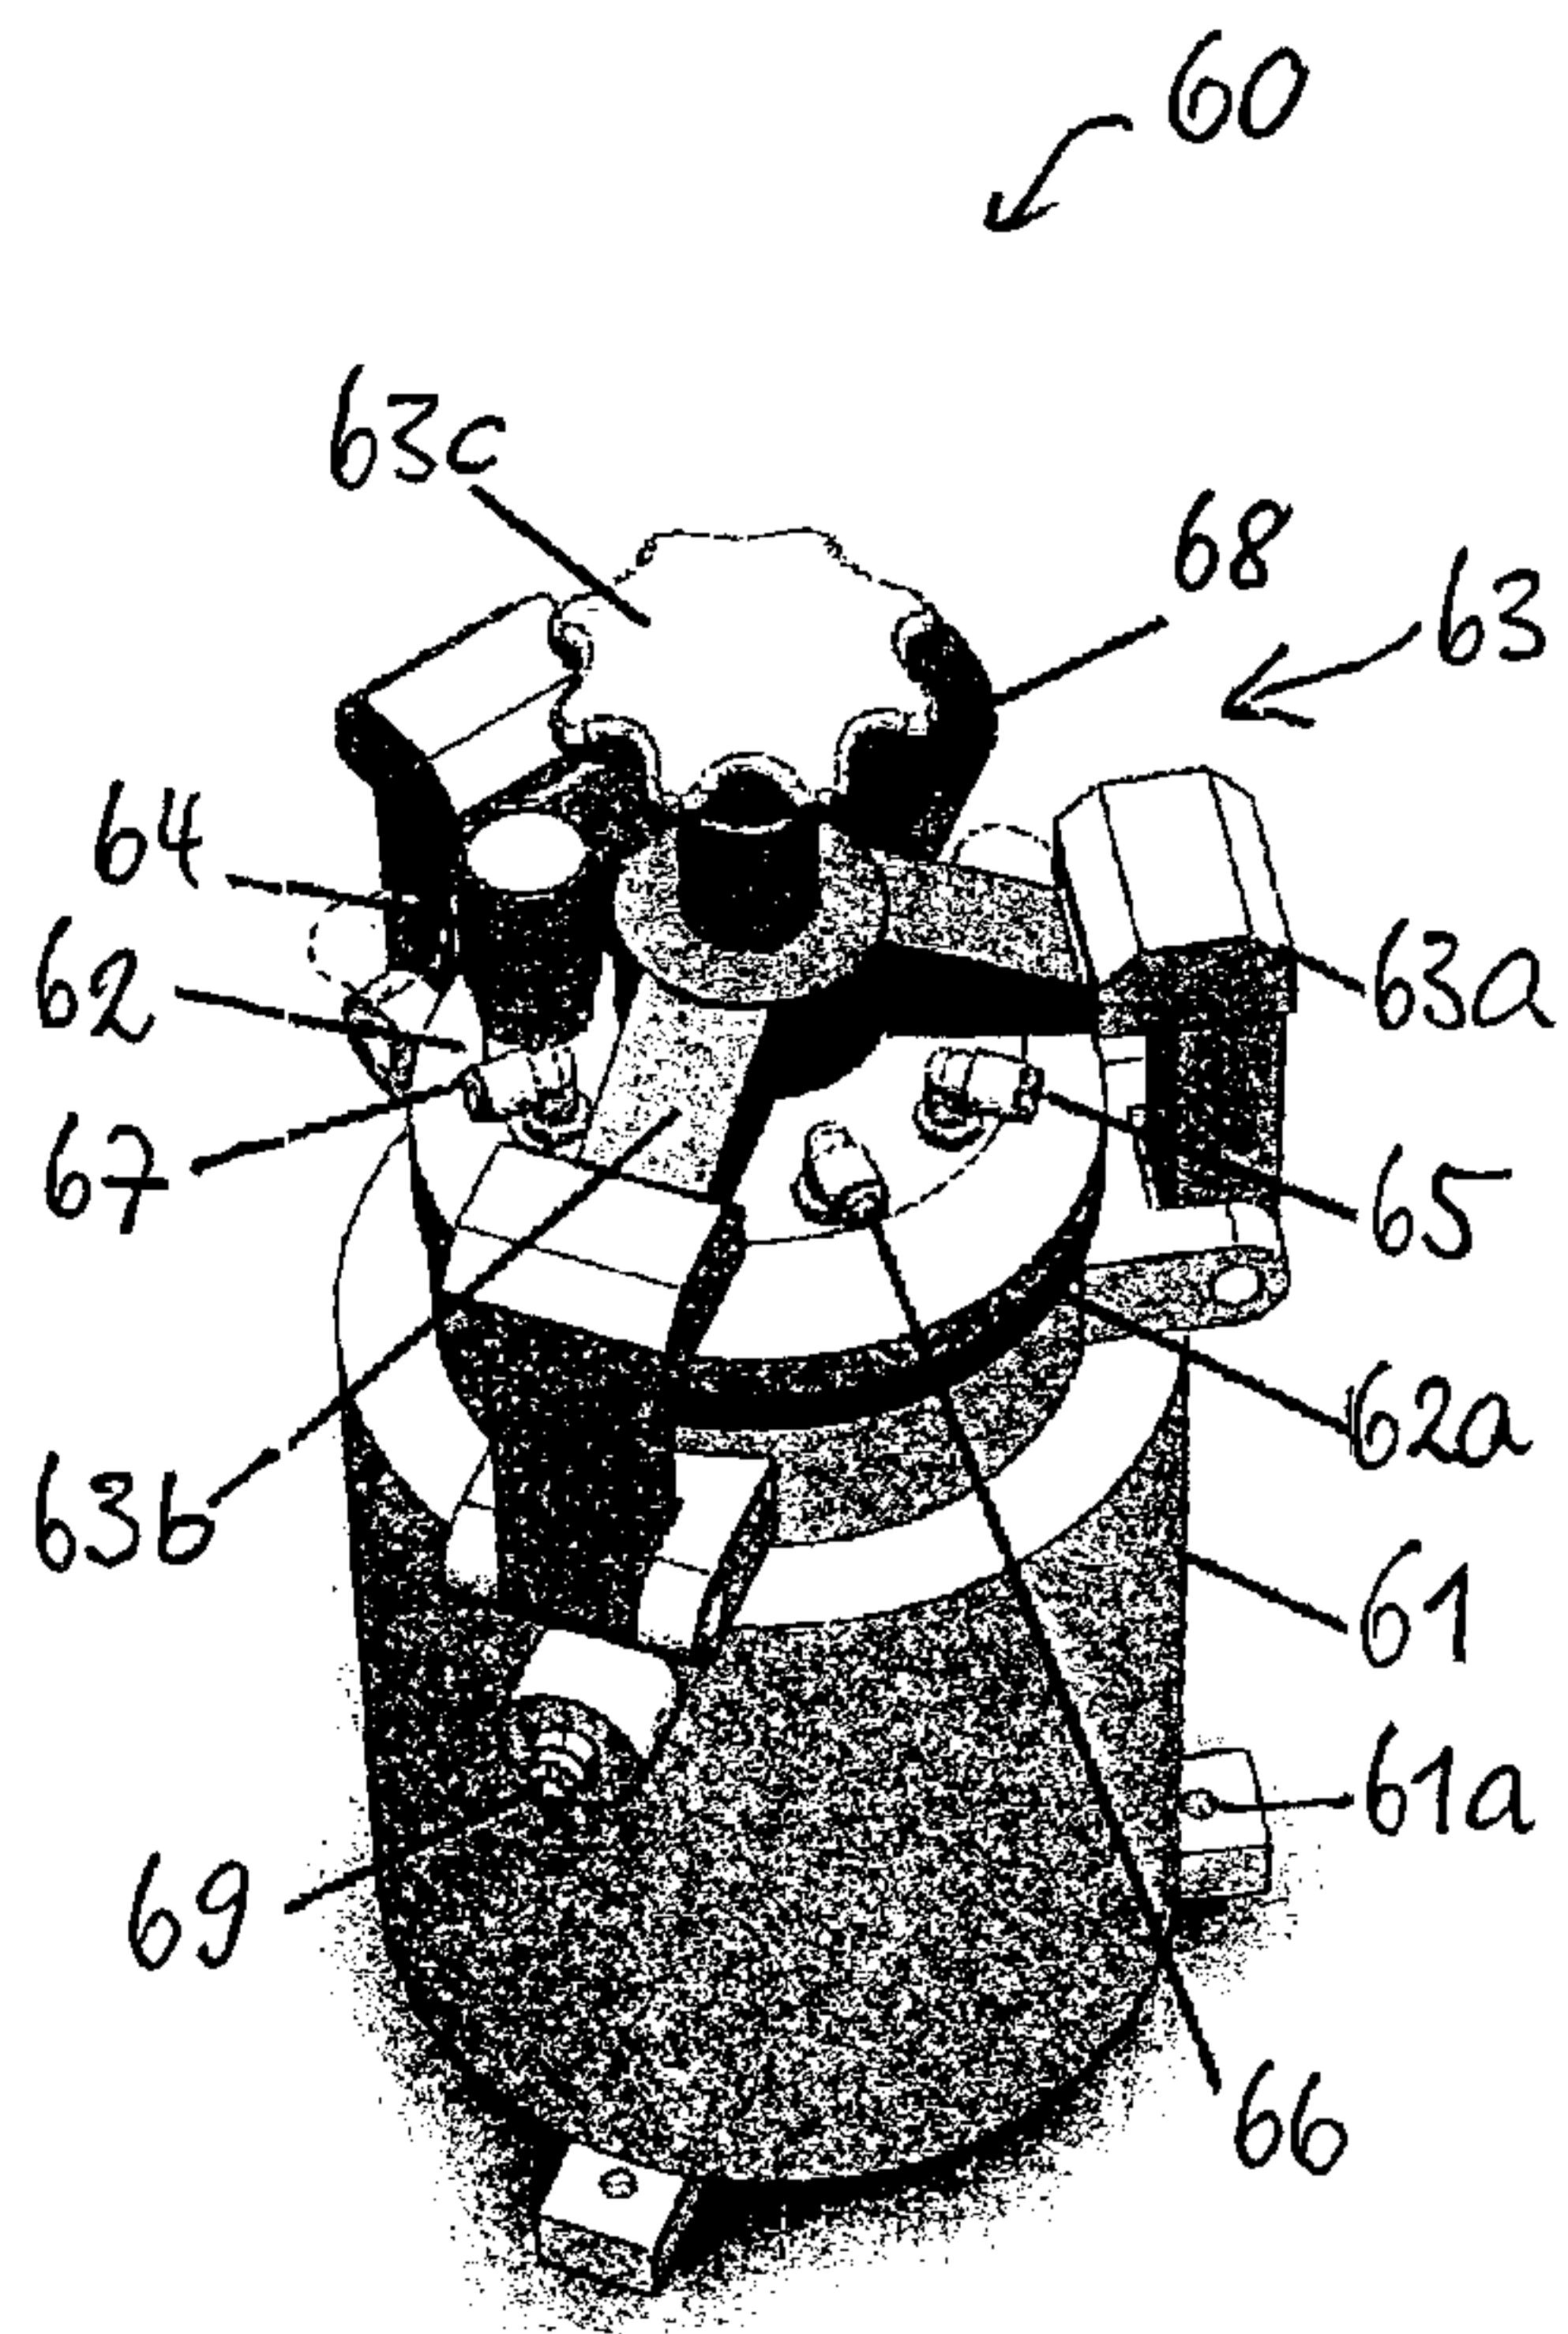


Fig. 6

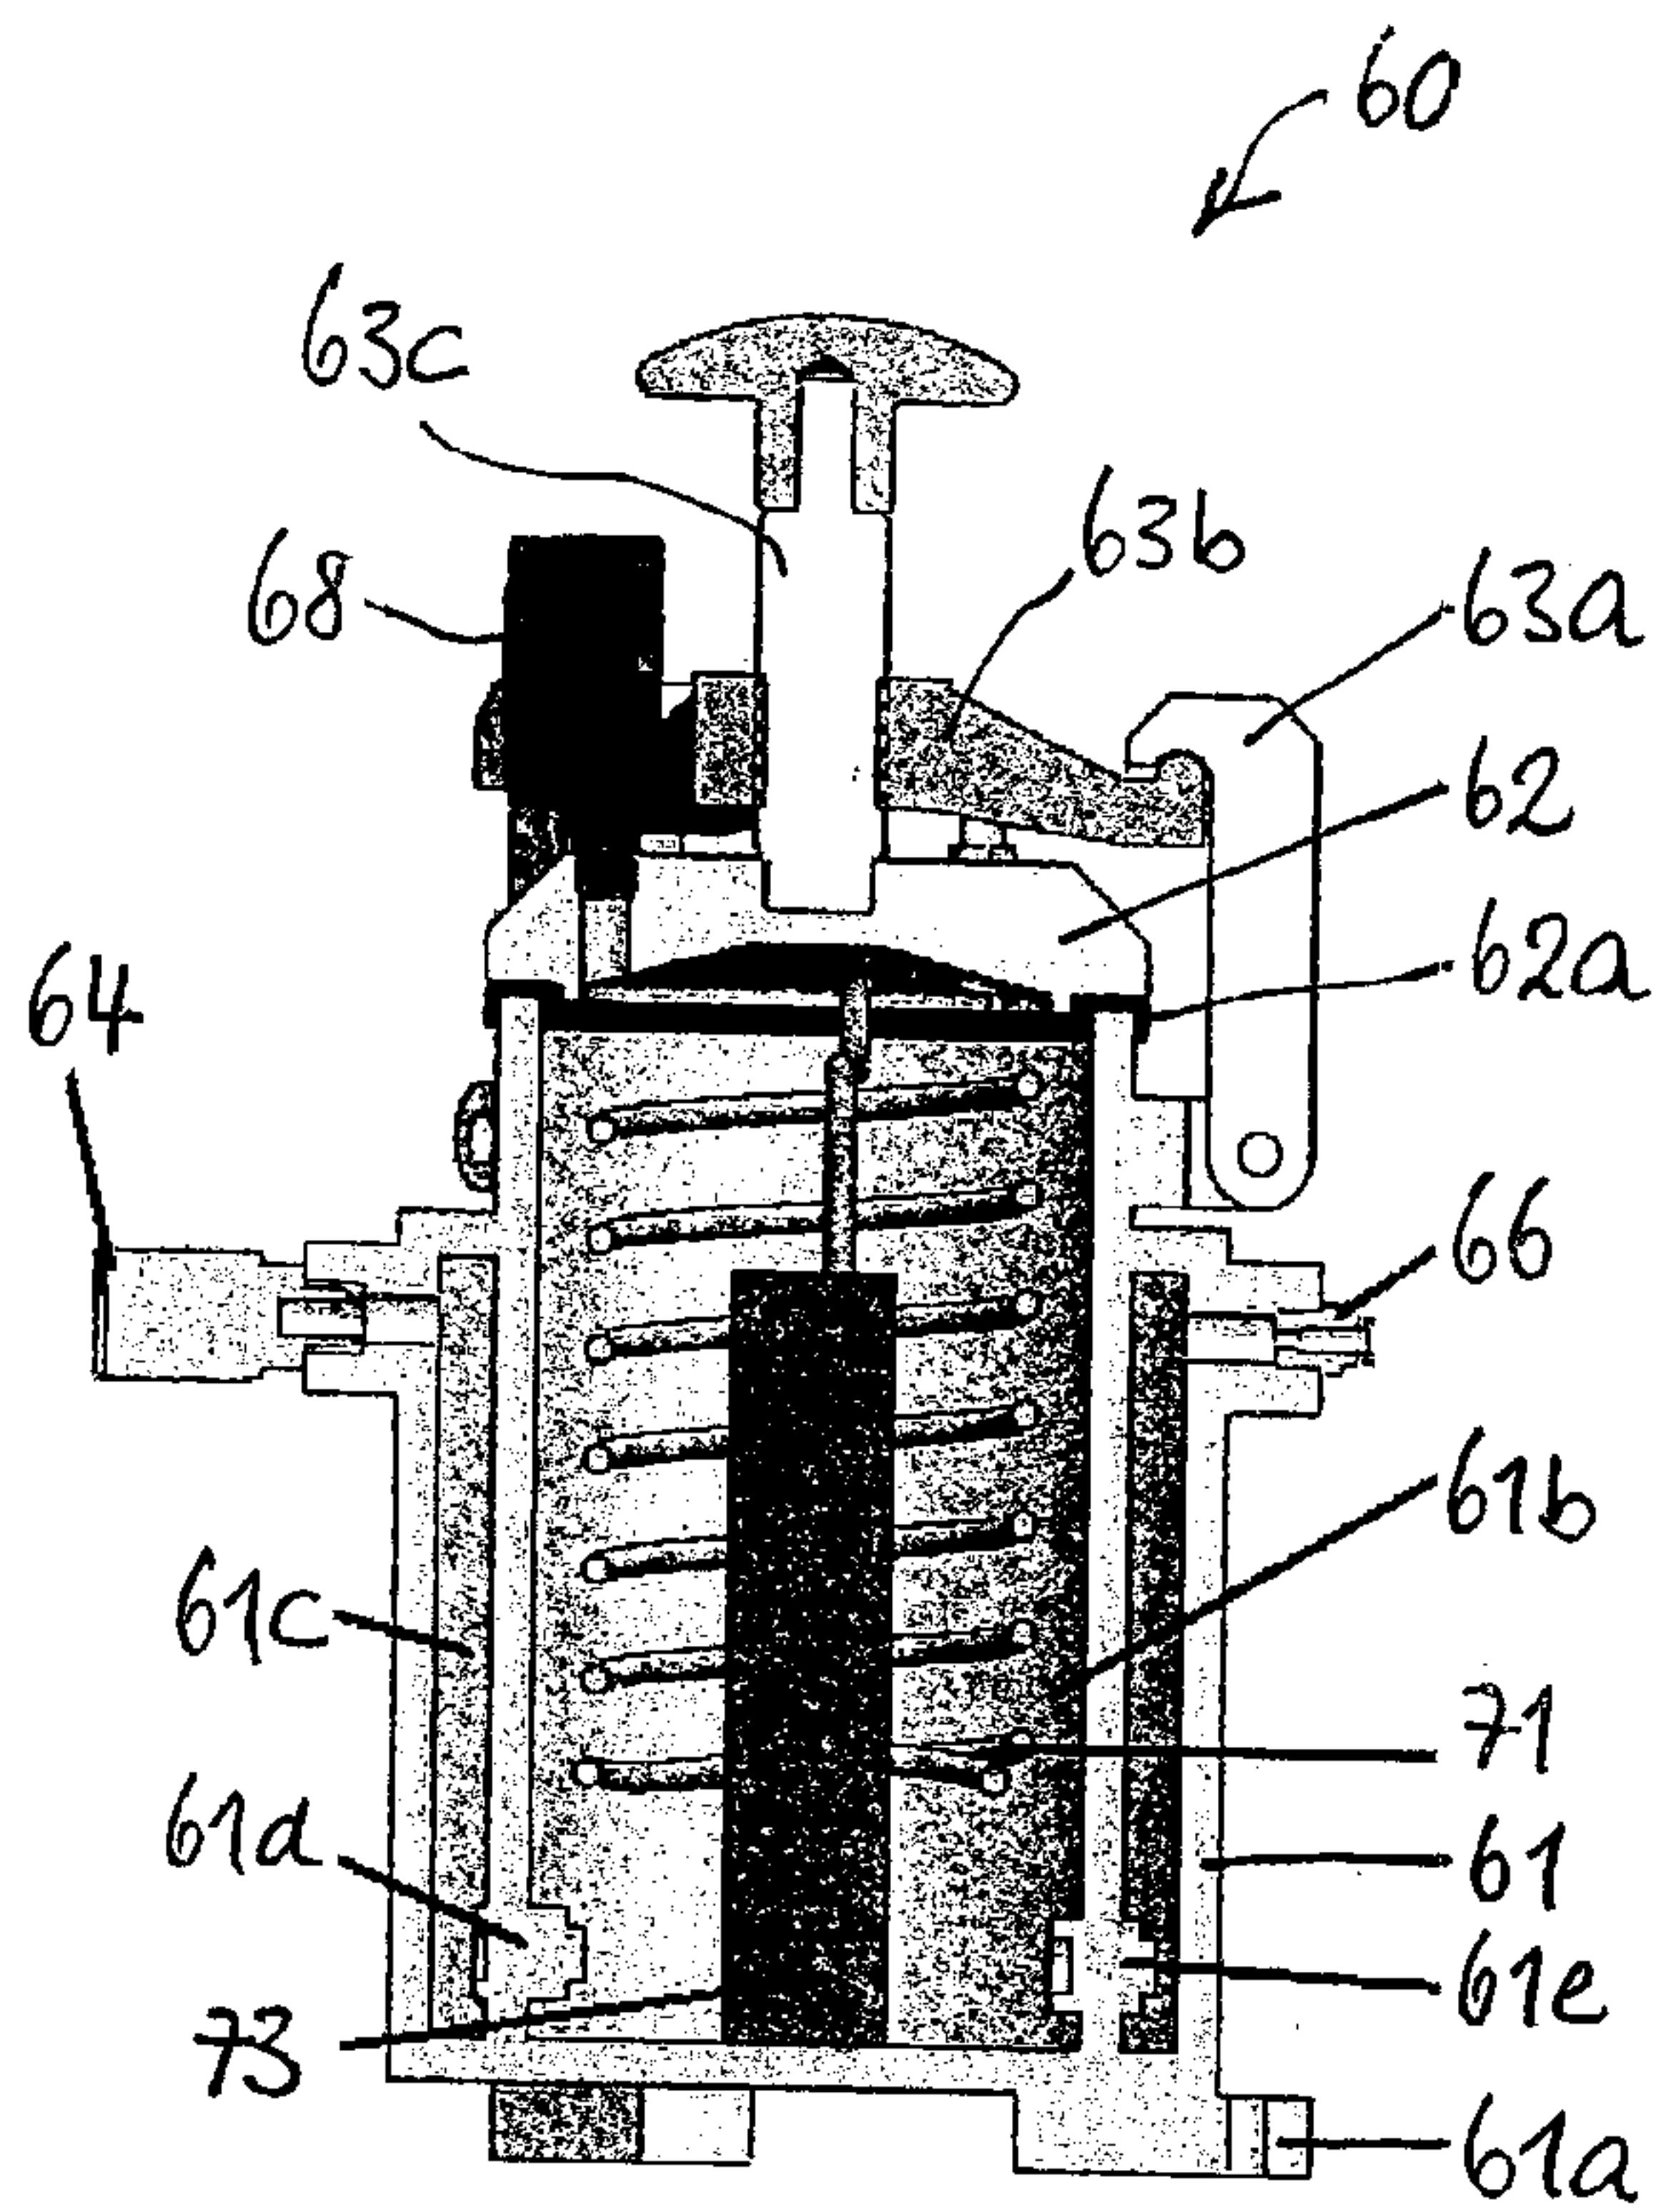


Fig. 7

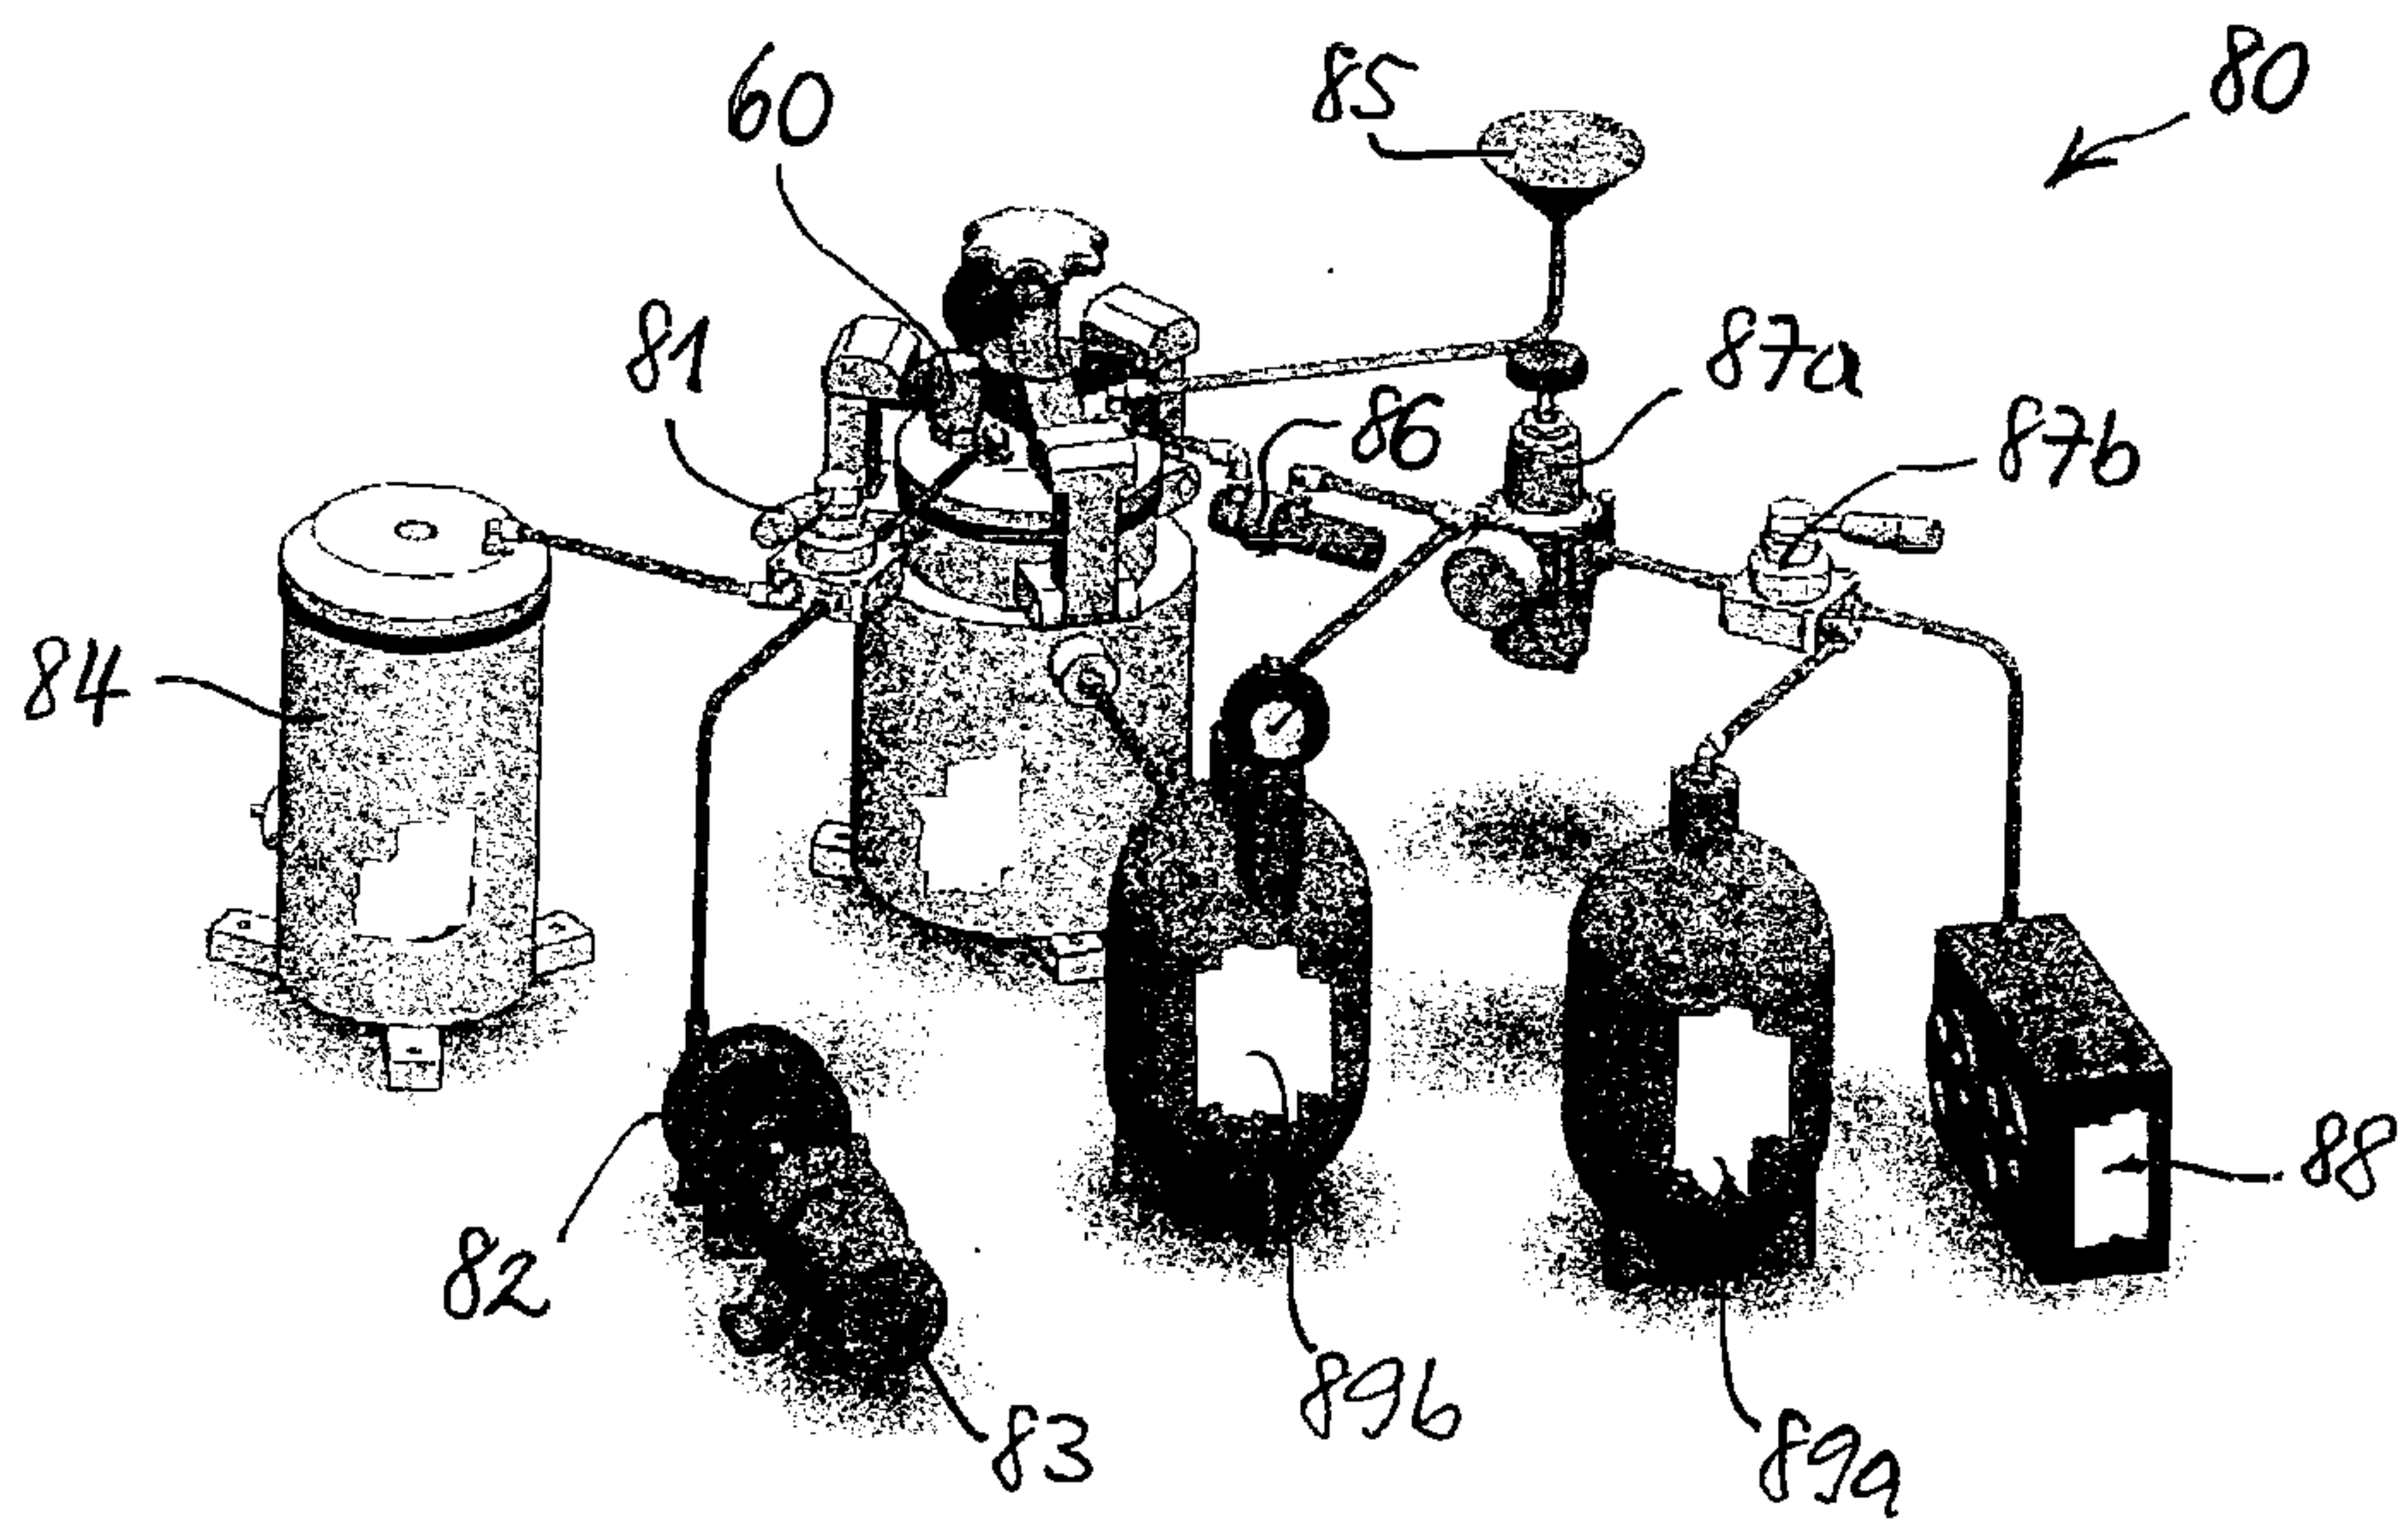


Fig. 8