



- (51) **International Patent Classification:**
H01H 3/16 (2006.01) *H01H 3/42* (2006.01)
E05D 11/00 (2006.01)
- (21) **International Application Number:**
 PCT/IB2013/061271
- (22) **International Filing Date:**
 23 December 2013 (23.12.2013)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (30) **Priority Data:**
 VI2012A000345 28 December 2012 (28.12.2012) IT
- (71) **Applicant:** PIZZATO ELETTRICA SRL [IT/IT]; Via Torino, 1, I-36063 Marostica (VI) (IT).
- (72) **Inventors:** PIZZATO, Marco; Via 4 Martiri, 7, I-36063 Marostica (VI) (IT). PIZZATO, Giuseppe; Via Camplani, 13, I-36063 Marostica (VI) (IT).
- (74) **Agent:** MAROSCIA, Antonio; Maroscia & Associati Srl, Contrà Porti, 21, I-36100 Vicenza (VI) (IT).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CL, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** ELECTRONIC HINGED SAFETY SWITCH

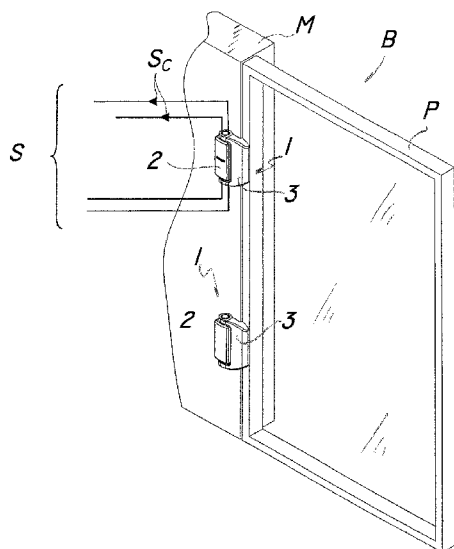


FIG. 1

(57) **Abstract:** An electronic hinged safety switch adapted for installation on protection barriers (B) of machines and/or automatic plants having one or more electric safety circuits (S). The switch comprises a substantially box-like fixed member (2) designed to be secured to a stationary part (M) of a protection barrier (B) and a movable member (3) designed to be secured to a pivotal part (P) of the protection barrier (B) and coupled to the fixed member (2) through hinge means (4). Sensing means (5) are housed in said box-like fixed member (2) for interacting with the hinge means (4) to send an electric control signal (S_c) to one or more electric safety circuits (S) at a predetermined switching angle (α). The sensing means (5) comprise at least one sensor for generating a corresponding actuation signal (S_A) at the switching angle (α), and an electronic control unit (8) operatively connected to at least one sensor (6). The electronic control unit (8) has at least one input (9) electrically connected to said sensor (6) for receiving the actuation signal (S_A) and at least one output (10) connected to the electronic safety circuits (S) for generating the electric control signal (S_c) in response to the actuation signal (S_A).

ELECTRONIC HINGED SAFETY SWITCH

Field of the invention

[0001] The present invention generally finds application in the field of electric safety devices and particularly relates to an electronic hinged safety
5 device.

Background art

[0002] Hinged safety switches are known to be used in plants or machines having areas or rooms bounded by protection barriers, and containing mechanical moving members or hazardous devices.

10 **[0003]** Particularly, these safety switches are mounted to a protection barrier having a fixed part integral with the machine or plant, and a movable panel designed to be opened by an operator.

[0004] Hinged safety switches have casing designed to be secured to the fixed part of the barrier and a movable part, which can pivot relative to the
15 enclosure, and is designed to be secured to the panel.

[0005] Furthermore, the switch comprises an electrical commutator and an actuator, which is adapted to interact with such commutator upon pivotal movement of the movable part.

20 **[0006]** As the panel is opened and/or closed, the movable part of the switch is caused to pivot relative to the casing and the actuator is triggered.

[0007] This latter will thus actuate the commutator to cause one or more electric safety circuits associated with the barrier to open and/or close.

[0008] A very common type of hinged safety switches uses mechanical commutators.

25 **[0009]** IT1362135, filed by the applicant hereof, discloses a safety switch with a mechanical commutator housed within the casing. This commutator comprises one or more movable contacts, moving along a longitudinal axis, whose displacement is driven by an actuator which is adapted to convert the rotary motion of the movable part into an axial translational motion.

30 **[0010]** Furthermore, this prior art switch may comprise LED-type optical signaling means, for confirming proper operation of the contacts and indicating where actuation occurs.

[0011] A first drawback of this prior art arrangement is that the use of mechanical commutators does not easily allow generation of electric signals with additional information concerning the position of the barrier or the state of the switch.

5 **[0012]** This is because mechanical commutators only allow switching of electrical contacts associated with safety circuits and cannot determine any inconsistent switching states of the contacts or wiring or contact unit failures.

[0013] A further drawback of this arrangement is that switches with mechanical commutators cannot be easily installed in safety plants that use a
10 data bus or a field bus connected to an electronic control unit.

[0014] The installation of hinged safety devices with analog contact units requires an appropriate analog-to-digital conversion interface, such as AS-i or the like, to be interposed between the bus and the contacts, which will increase installation costs and circuit complexity of the electrical system.

15 Disclosure of the invention

[0015] The object of the present invention is to overcome the above drawbacks, by providing an electronic hinged safety switch that is highly efficient and relatively cost-effective.

[0016] A particular object of the present invention is to provide an
20 electronic hinged safety switch that allows generation of one or more additional electric signals concerning switch operation.

[0017] Another object of the present invention is to provide an electronic hinged safety switch designed for connection to a digital communication system of the bus type or the like.

25 **[0018]** A further object of the present invention is to provide an electronic hinged safety switch that affords very quick and fully automatic enabling and/or disabling thereof by the plant during maintenance.

[0019] These and other objects, as better explained hereafter, are fulfilled by an electronic hinged safety switch as defined in claim 1.

30 **[0020]** Advantageous embodiments of the invention are obtained in accordance with the dependent claims.

Brief description of the drawings

[0021] Further features and advantages of the invention will be more apparent upon reading of the detailed description of a preferred, non-exclusive embodiment of an electronic hinged safety switch according to the invention, which is described as a non-limiting example with the help of the annexed drawings, in which:

FIG. 1 is a perspective view of a protection barrier comprising a hinged switch of the invention;

FIG. 2 is a perspective view of the switch of Fig. 1;

FIG. 3 is a wiring block diagram of the switch of Fig. 1;

FIG. 4 is a perspective view of a first detail of the switch of Fig. 1;

FIG. 5 is a top view of the detail of Fig. 4;

FIG. 6 is a first side view of the detail of Fig. 4;

FIG. 7 is a second side view of the detail of Fig. 4;

FIG. 8 is an exploded perspective view of the switch of Fig. 2.

15 Detailed description of a preferred embodiment

[0022] Referring to the above mentioned figures, a multifunctional electronic hinged safety switch, generally designated by numeral 1, is adapted for use in a protection barrier B which is designed to bound a hazardous area of a machine or a plant.

20 **[0023]** Particularly, as best shown in FIG. 1, the protection barrier B may comprise a stationary part M which is designed to be secured to the ground or the frame of the machine or plant, and a pivotal part P, such as a door or over hinged to the stationary part M.

[0024] Furthermore, the barrier B is equipped with one or more electric safety circuits S for signaling that the door D has been opened and/or closed, by varying an appropriate electric signal.

25 **[0025]** The multifunctional hinged switch 1 of the invention comprises, as best shown in FIG. 2, a substantially box-like fixed member 2 designed to be secured to a stationary part M of the protection barrier B and a movable member 3 designed to be secured to a pivotal part P of the barrier B and to be coupled to the fixed member 2 through hinge means 4.

30 **[0026]** The switch 1 further comprises sensing means 5 located in the fixed

member 2 and interacting with the hinge means 4 to send an electric control signal S_C to one or more electric safety circuits S at an adjustable switching angle α .

5 **[0027]** The switch 1 may comprise a pair of electric inputs and a pair of electric outputs, not shown, for connection of at least one safety circuit S.

[0028] According to a peculiar feature of the invention, the sensing means 5 comprise at least one sensor 6 for generating a corresponding actuation signal S_A at the switching angle α .

10 **[0029]** Furthermore, the sensing means 5 comprise an electronic control unit 8 operatively connected to a sensor 6 and having at least one input 9 electrically connected to the sensor 6 for receiving the actuation signal S_A and at least one output 10 connected to the electric safety circuits S for generating the electric control signal S_C in response to such actuation signal S_A .

15 **[0030]** Conveniently, the actuation signal may have electric parameters, such as voltage, current or frequency, that are selectively variable according to the number of switching commutations by the sensor 6.

20 **[0031]** Particularly, the electronic control unit 8 may be designed to cause the sensor 6 to be switched upon detection of a voltage applied to the input and/or an electric current circulating through the contacts.

[0032] Furthermore, the sensor 6 may generate a single actuation signal S_A .

25 **[0033]** Alternatively, the sensor 6 may comprise a plurality of electric and/or electronic contact units associated with the door P of the barrier B, each adapted to generate a corresponding assessment signal s_a .

[0034] In this case, the actuation signal S_A comprises the plurality of assessment signals s_a generated by respective electric and/or electronic contact units in the sensor 6.

30 **[0035]** Furthermore, the actuation signals s_A may have first and second levels, associated with the open and closed states of the door P of the protection barrier B respectively.

[0036] Conveniently, the sensor 6 may be selected from the group

comprising mechanical commutators and/or electronic sensors.

[0037] The electronic control unit 8, as best shown in the diagram of FIG. 3, may comprise first microprocessor means 11 for receiving the actuation signal S_A at the input 9.

5 **[0038]** The first microprocessor means 11 may be designed to process the actuation signal S_A and generate the control signal S_C to be provided at the output 10.

[0039] The control signal S_C generated by the first microprocessor means 11 may be of analog or digital type, according to the type of electric safety
10 circuits S associated with the barrier B .

[0040] Particularly, the electric safety circuits S may comprise a central unit, not shown, for detecting the open and/or closed states of the doors P of a plurality of protection barriers B by detecting a control signal S_C of digital type.

15 **[0041]** Conveniently, the control signal S_C may be null when an actuation signal S_A corresponding to the open state of the door P of the barrier B is present at the input 9.

[0042] Otherwise, the control signal S_C may be other than zero when an actuation signal S_A corresponding to the closed state of the door P of the
20 barrier B is present at the input 9.

[0043] Advantageously, the control signal may be other than zero, when the totality of the assessment signals s_A perform a passage from the first level to the second level.

[0044] Conveniently, as best schematically shown in FIG. 3, the sensor
25 may comprise electric contacts 7.

[0045] Particularly, the electronic control unit 8 may be adapted to generate a control signal other than zero, when the contacts 7 are switched from a state in which they are all open to a state in which they are all closed.

30 **[0046]** Conveniently, the electronic control unit 8 may be designed to generate an alarm signal S_X for indicating the presence of assessment signals s_A at different levels.

[0047] In this case the alarm signal S_X allows simultaneous signaling of the electric inconsistency state associated with a sensor 6 in the switch 1.

[0048] Conveniently, the electronic control unit 8 may comprise interface means 12 connected to the first microprocessor means 11 and to an external communication line 13 associated with one or more additional electric devices, not shown.

[0049] The external communication line 13 may be as used in common communication systems for electric safety plants and may comprise, for instance, a data bus or a field bus of the AS-i or AS-i Safe type.

[0050] Conveniently, the interface means 12 may transmit first data D_1 associated with the actuation signal S_A and/or the control signal S_C into the external communication line.

[0051] Furthermore, the interface means 12 may be designed to receive second data D_2 associated with the additional electric safety devices from the external communication line 13.

[0052] Particularly, the first microprocessor means 11 may be designed to generate the control signal S_C in response both to the activation signal S_A and to the second data D_2 received from the interface means 12.

[0053] Thus, the switch 1 may be installed in a cascade of interconnected safety devices, and the control signal S_C generated thereby may be influenced by the electric state of the contacts in the additional safety devices.

[0054] The first microprocessor means 11 may comprise a non-volatile memory medium (ROM), not shown, in which permanent data are stored, and a volatile memory medium (RAM), also not shown, in which temporary data are stored.

[0055] The first microprocessor means 11 may be designed to perform periodic operation checks on the non-volatile memory medium (ROM) and the volatile memory medium (RAM).

[0056] Such configuration of the first microprocessor means 11 allows the provision of a switch 1 that can meet current standards concerning totally or partially electronic safety devices.

[0057] Conveniently, the first microprocessor means 11 may be programmed for periodically starting a check-up on the sensors 6, the input 9 and the output 10.

5 [0058] Particularly, as best shown in the diagram of FIG. 3, the electronic control unit 8 may comprise one or more transistors 14 controlled by the first microprocessor means 11 and operatively connected to the output 10.

[0059] Each transistor 14 may comprise a biasing circuit, not shown, which is designed to allow it to operate as a switch by the action of the first microprocessor means 11, in ON/OFF mode.

10 [0060] The on/off operation of the transistor 14 will modify the control signal S_C sent to the electric safety circuit S and generated by the first processing means 11.

[0061] Conveniently, the first microprocessor means 11 may be designed for periodically checking proper ON/OFF transition of each transistor 14 and, as a result, proper electrical operation of the output 10.

15 [0062] Furthermore, the first microprocessor means 11 may be adapted to generate an auxiliary electric signal S_{aux} corresponding to the number of switching instances of the sensor 6.

[0063] Particularly, the first microprocessor means 11 may be adapted to detect the overall number of switching instances by the sensor 6 within a predetermined time interval.

[0064] For example, the first microprocessor means 11 may be adapted to generate an auxiliary signal S_{aux} , when the switch 1 reaches a total operating time equal to a predetermined factory-preset value.

25 [0065] Advantageously, the electrical control unit 8 may comprise second microprocessor means 15 which interact with the first microprocessor means 11 to process the actuation signal S_A and generate the control signal S_C .

30 [0066] Furthermore, the second microprocessor means 15 may be substantially symmetrical to the first microprocessor means 11 for redundant processing of the actuation signal S_A .

[0067] Thus, the second microprocessor means 15 may be designed to

only actuate the generation of the control signal S_C by the first microprocessor means 11 when such redundant processing provides results consistent with those obtained from processing by the first microprocessor means 11.

5 **[0068]** The electronic control unit 8 may comprise power supply means, not shown, for supplying power to the first 11 and second 15 microprocessor means 15, the interface means 12 and the transistors 14.

10 **[0069]** Conveniently, as best shown in FIGS. 4 to 7, the electronic control unit 8 may comprise a pair of rigid supports 16, 17 for supporting and connecting together at least the first 11 and second 15 microprocessor means, the interface means 12 and the transistors 14.

[0070] For example, each rigid support 16, 17 may be a printed circuit board PCB or the like.

15 **[0071]** Furthermore, as best shown in the illustrated configuration of the invention, the sensor 6 may be interposed between the rigid supports 16, 17 and may comprise a pair of substantially flat side walls 18, 19, which are adapted to contact respective bottom walls 20, 21 of the rigid supports 16, 17.

20 **[0072]** Conveniently, the sensor 6 may have output terminals 22 connected to the inputs 9 of the electronic processing unit 8 via corresponding interconnection cables 23.

[0073] The fixed member 2, as best shown in FIG. 8, comprises a compartment 24, which is adapted to accommodate therein the sensor 6 and the electronic control unit 8.

25 **[0074]** Furthermore, the hinge means 4 may comprise a pair of pins 25, 26 associated with the movable member 3 and pivoted to the fixed member 2.

[0075] The pins 25, 26 allow the movable member 3 to pivot relative to the fixed member 2 about a common axis of rotation R.

30 **[0076]** According to a particular configuration of the invention, as shown in the figures, the sensor 6 may be a microswitch 6' with mechanical contacts, and may comprise electric contacts 7 for generating respective assessment signals s_a .

[0077] The number of the electric contacts 7 of the microswitch 6' may depend on the number of connections in the safety circuits S.

[0078] Also, the microswitch 6' may be designed to cause switching of the contacts 7 either at the same switching angle α or at different switching angles α .

[0079] The microswitch 6' may be designed to interact with at least one of the pins 25, 26.

[0080] Furthermore, the microswitch 6' may comprise a slider 27, which is designed for translation in a direction X parallel to the common axis of rotation R, and is adapted to cause the contacts 7 to open and/or close.

[0081] Conveniently, the microswitch 6' may comprise at least one actuator element 28, operatively connected to one of the pins 25, 26, and interacting with the slider 27.

[0082] The actuator element 28 may be designed to provide conversion of the rotary motion of the pin 25, 26, into an axial motion of the slider 27.

[0083] Furthermore, the switch 1 may comprise adjustment means 29 for adjusting the switching angle α of the contacts 7 associated with at least one of the pins 25, 26.

[0084] For example the adjustment means 29 may be as disclosed in the Italian patent IT1362135, issued to the applicant hereof.

[0085] Conveniently, the switch 1 may comprise LED signaling means 30, as shown in FIGS. 2 and 8, associated with the fixed member 2.

[0086] The first microprocessor means 11 may be adapted to selectively power the signaling means 30 for generating differentiated light signals according to the actuation signal S_A and/or the control signal S_C .

[0087] Particularly, the signaling means 30 may comprise three or more LEDs for emitting a light signal associated with the electrical function of the input 9, the output 10 and the sensor 6.

[0088] Thus, an operator may easily monitor the operating state of the switch 1 by watching at the differentiated light signals emitted by the signaling means 30.

[0089] The above disclosure clearly shows that the invention fulfills the

intended objects and particularly provides a remarkably safe and versatile multifunctional hinged switch.

[0090] The multifunctional hinged switch of this invention is susceptible to a number of changes and variants, within the inventive principle disclosed in the appended claims. All the details thereof may be replaced by other technically equivalent parts, and the materials may vary depending on different needs, without departure from the scope of the invention.

[0091] While the multifunctional hinged switch has been described with particular reference to the accompanying figures, the numerals are only used for the sake of a better intelligibility of the invention and shall not be intended to limit the claimed scope in any manner.

CLAIMS

1. An electronic hinged safety switch adapted for connection to one or more electric safety circuits (S), comprising:
- a substantially box-like fixed member (2), defining an inner space (24), said fixed member (2) being designed to be secured to a stationary part (M) of a protection barrier (B) of machines or automatic plants, having one or more electric safety circuits (S);
 - a movable member (3) designed to be secured to a pivotal part (P) of the protection barrier (B) and coupled to said fixed member (2) through hinge means (4);
 - sensing means (5) housed in said box-like fixed member (2) and interacting with said hinge means (4) to send an electric control signal (S_C) to one or more electric safety circuits (S) at a predetermined switching angle (α);
- wherein said sensing means (5) comprise at least one sensor (6) for generating a corresponding actuation signal (S_A) at said switching angle (α), and an electronic control unit (8) operatively connected to said at least one sensor (6), said electronic control unit (8) having at least one input (9) electrically connected to said sensor (6) for receiving said actuation signal (S_A) and at least one output (10) connected to said one or more electric safety circuits (S) for generating said electric control signal (S_C) in response to such actuation signal (S_A);
- characterized in that said at least one sensor (6) and said electronic control unit (8) are housed in said inner compartment (24).
2. A switch as claimed in claim 1, characterized in that said at least one sensor (6) is selected from the group comprising mechanical commutators and electronic commutators.
3. A switch as claimed in claim 1, characterized in that said electronic control unit (8) comprises first microprocessor means (11) for receiving said actuation signal (S_A) through said at least one input (9) and processing it to generate said control signal (S_C).
4. A switch as claimed in claim 3, characterized in that said first

microprocessor means (11) are adapted to generate a null or non-zero control signal (S_C) respectively, when said at least one input (9) has therein an actuation signal (S_A) generated by the open state or closed state respectively of the pivotal part (P) of the protection barrier (B).

5 5. A switch as claimed in claim 4, characterized in that said actuation signal (S_A) comprises a plurality of electric assessment signals (s_a), each having a first level associated with the open state of the pivotal part (P) of the protection barrier (B) and a second level associated with the closed state of the pivotal part (P), said control signal (S_C) being other than zero when the
10 totality of said electric assessment signals perform (s_a) a transaction from said first level to said second level.

 6. A switch as claimed in claim 3, characterized in that said electronic control unit (8) comprises interface means (12) connected to said first microprocessor means (11) and to an external communication line (13)
15 associated with one or more additional electric devices.

 7. A switch as claimed in claim 6, characterized in that said interface means (12) are adapted to transmit first data (D_1) associated with said actuation signal (S_A) and/or said control signal (S_C) into said external communication line (13), and to receive second data (D_2) associated with
20 said one or more additional electric safety devices from said external communication line (13).

 8. A switch as claimed in claim 3, characterized in that said first microprocessor means (11) comprise a non-volatile memory medium (ROM) in which permanent data is stored, and a volatile memory medium (RAM) in
25 which temporary data is stored, said first microprocessor means (11) being designed to perform periodic operation checks on said non-volatile memory medium (ROM) and said volatile memory medium (RAM).

 9. A switch as claimed in claim 3, characterized in that said first microprocessor means (11) are programmed for periodically starting a check-up on said at least one sensor (6), said at least one input (9) and said at least
30 one output (10).

 10. A switch as claimed in claim 9, characterized in that said first

microprocessor means (11) are adapted to generate an auxiliary signal (S_{aux}) corresponding to the overall number of switching instances by said at least one sensor (6) in a predetermined time.

11. A switch as claimed in claim 3, characterized in that said electronic
5 control unit (8) comprises second microprocessor means (15) which interact with said first microprocessor means (11) for processing said actuation signal (S_A) and generating said control signal (S_C).

12. A switch as claimed in claim 3, characterized in that it comprises
10 signaling means (30) associated with said fixed member (2), said first microprocessor means (11) being adapted to selectively power said signaling means (30) for generating differentiated light signals according to said actuation signal (S_A) and/or said control signal (S_C).

13. A switch as claimed in claim 12, characterized in that said signaling
15 means (30) comprise one or more LEDs, which are adapted to emit light signals associated with the electrical function of the inputs of the safety circuits (S), of said at least one output (10) and said at least one sensor (6) respectively.

14. A switch as claimed in claim 1, characterized in that said hinge
20 means comprise a pair of pins (25, 26) associated with said movable member (3) and pivoted to said fixed member (2), said sensor (6) being adapted to interact with at least one of said pins (25, 26).

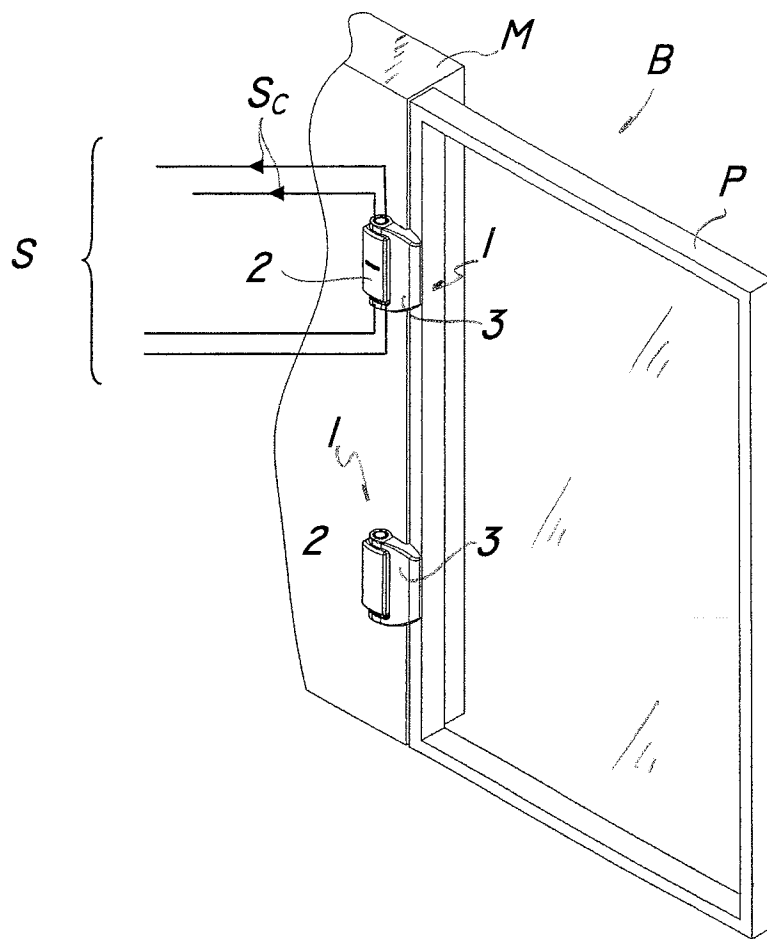


FIG. 1

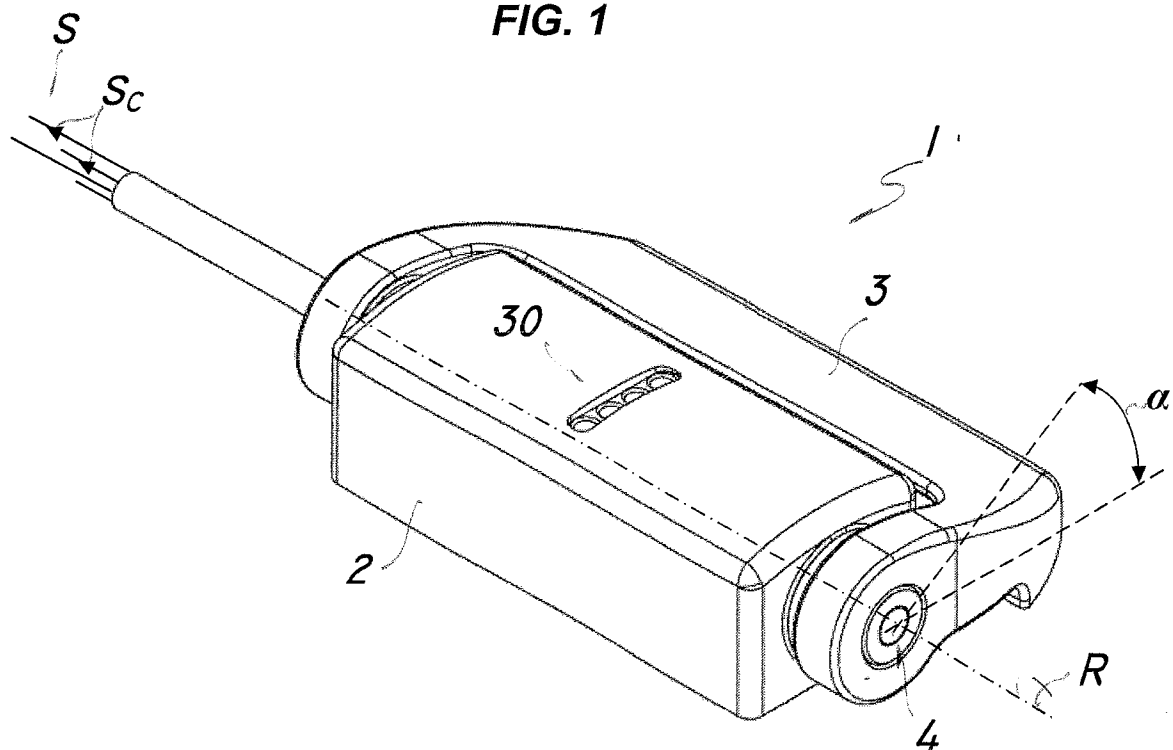


FIG. 2

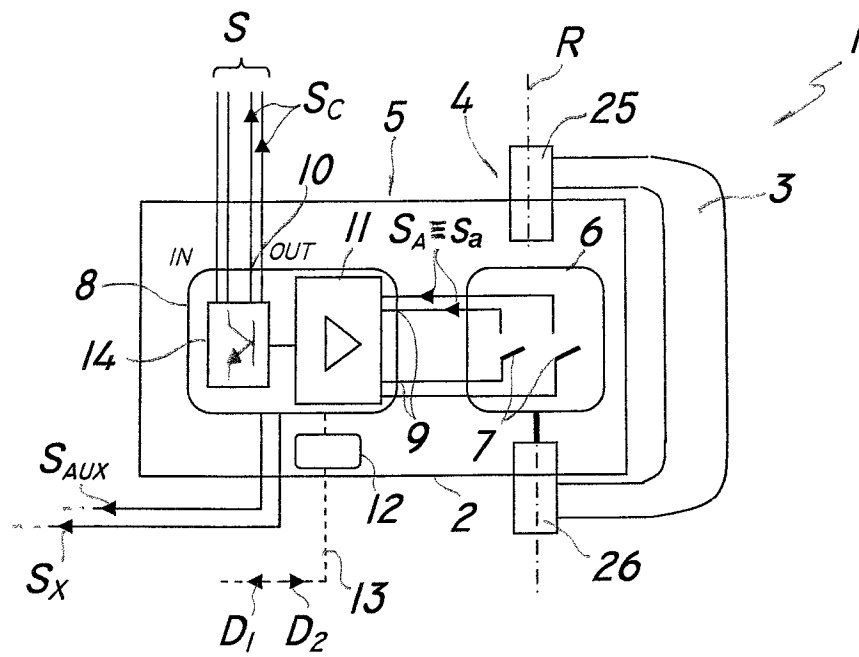


FIG. 3

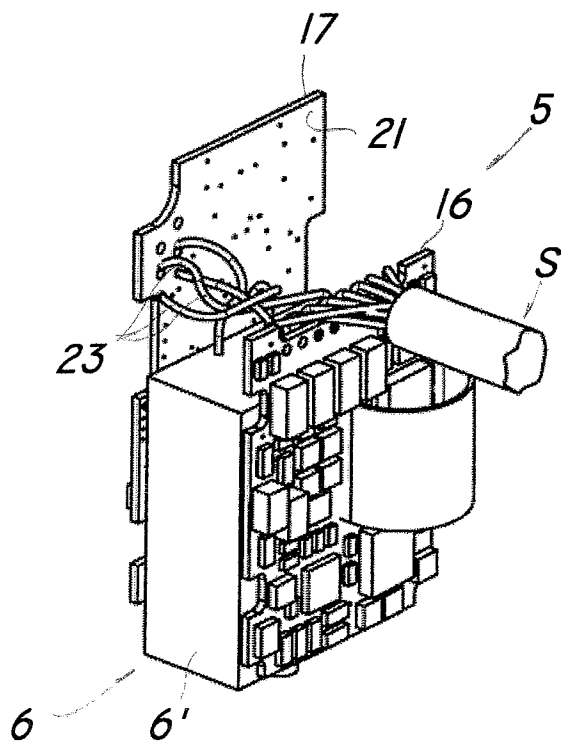


FIG. 4

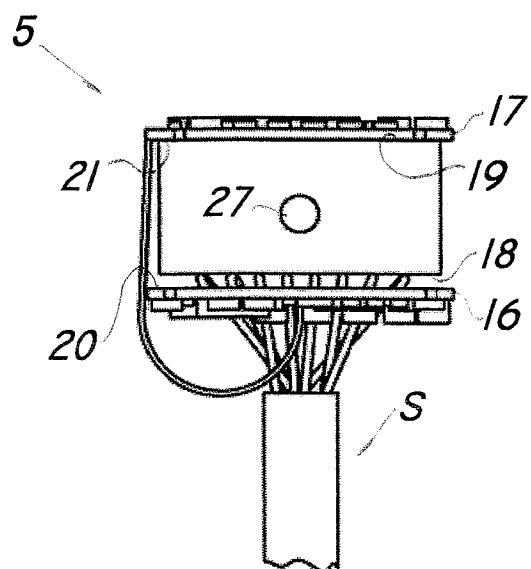


FIG. 5

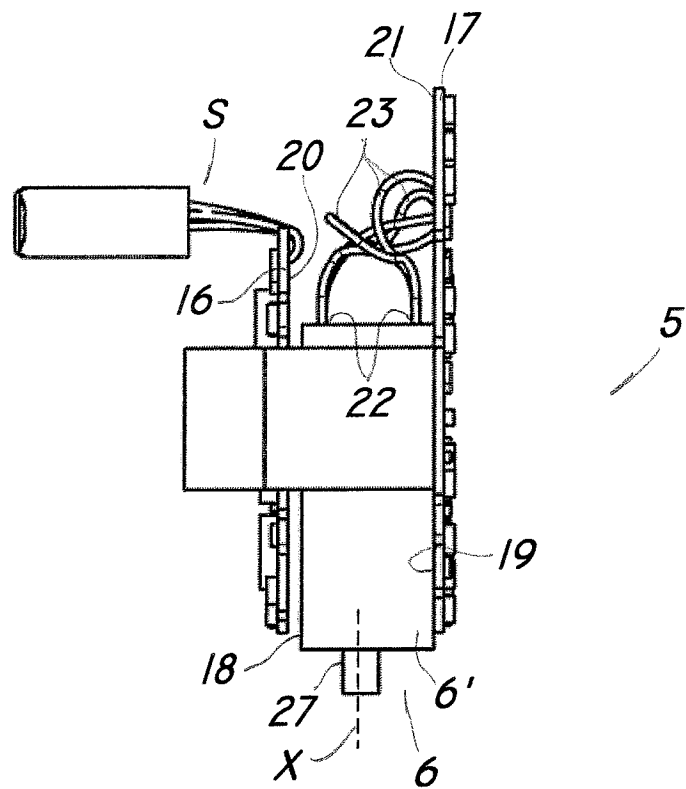


FIG. 6

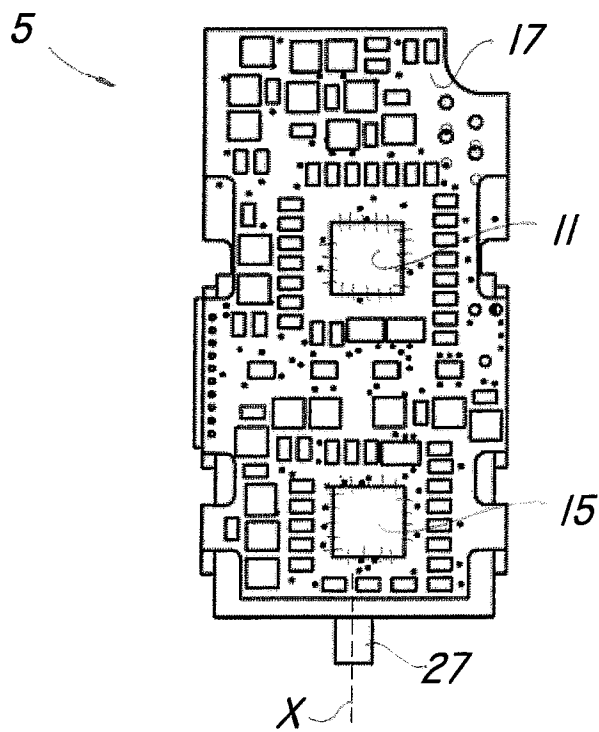


FIG. 7

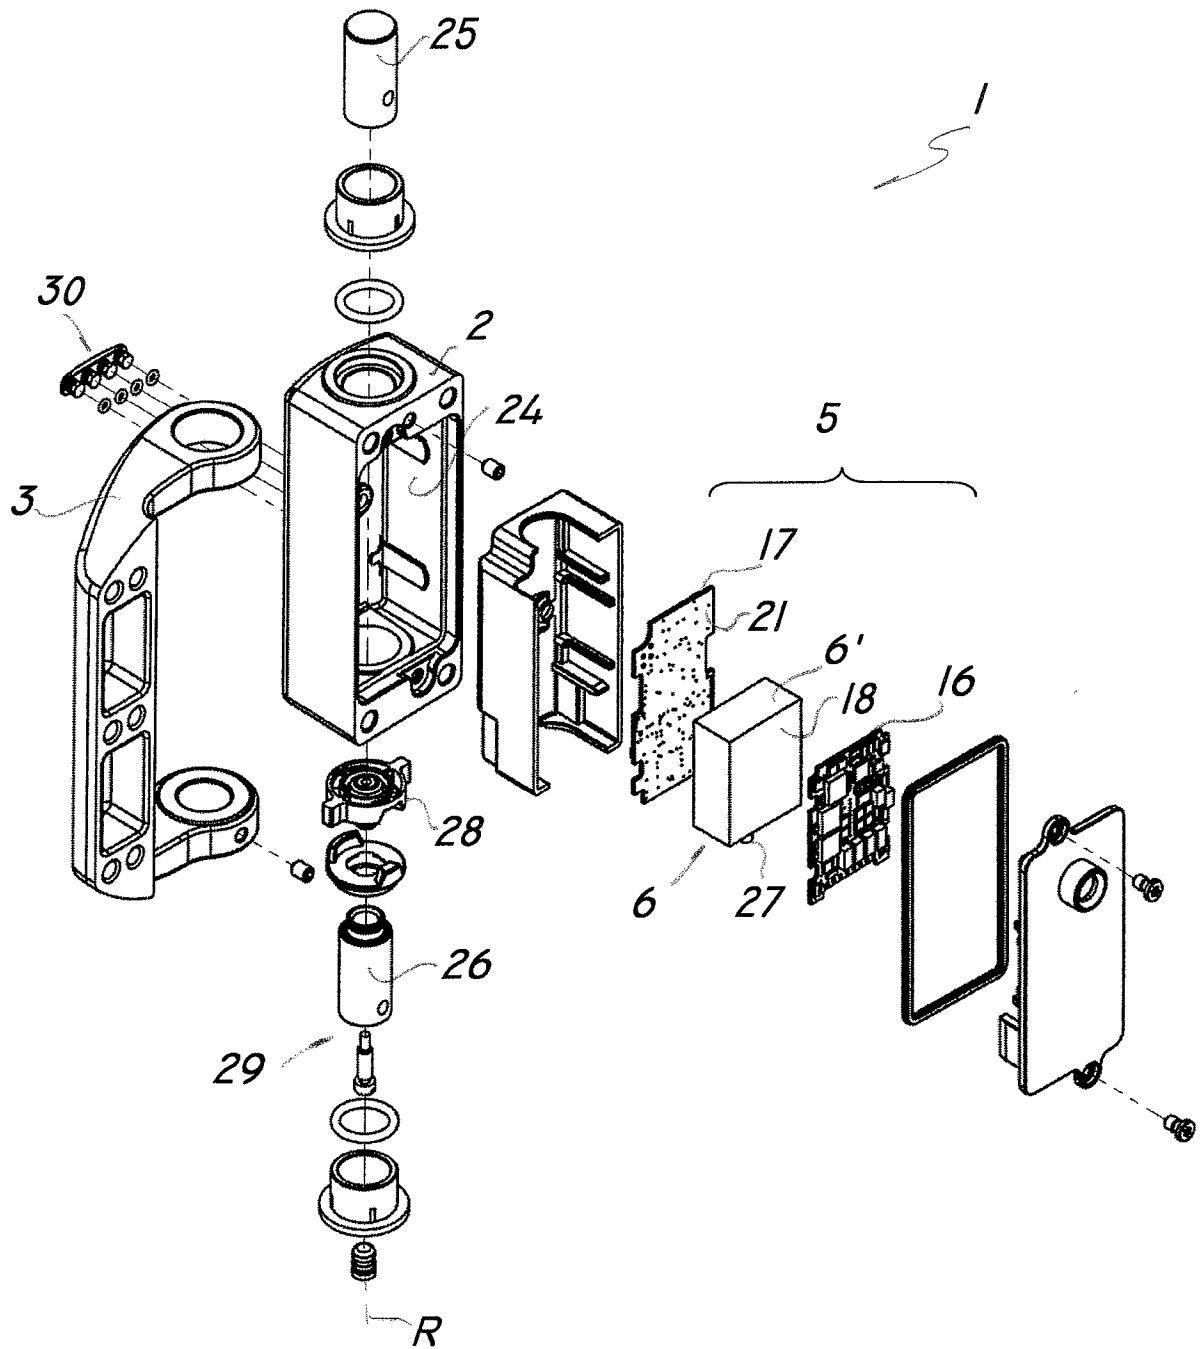


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/061271

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01H3/16 E05D11/00
ADD. H01H3/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01H E05D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 845 772 A (METROKA MICHAEL P [US] ET AL) 4 July 1989 (1989-07-04)	1-11
Y	abstract; figures 3,4,6	14
A	-----	12,13
A	US 6 373 006 B1 (TOKI NOZOMI [JP]) 16 April 2002 (2002-04-16) figure 1b	1
Y	-----	
	GB 2 150 757 A (CHENG CHAO AN; SHIU CHIN SEN; KAO CHANG HWA; CHEN DENG JN; HUANG CHEN) 3 July 1985 (1985-07-03) cited in the application figure 2	14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 April 2014

Date of mailing of the international search report

16/04/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Simonini, Stefano

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2013/061271

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4845772	A	04-07-1989	AT 142068 T	15-09-1996
			AU 610416 B2	16-05-1991
			AU 3741189 A	12-01-1990
			BR 8906967 A	11-12-1990
			CA 1296774 C	03-03-1992
			DE 68927024 D1	02-10-1996
			DE 68927024 T2	06-03-1997
			DK 30190 A	27-03-1990
			EP 0346639 A2	20-12-1989
			ES 2091189 T3	01-11-1996
			HK 1008132 A1	30-04-1999
			IE 61916 B1	30-11-1994
			IL 90261 A	13-05-1993
			JP H0244843 A	14-02-1990
			JP H0544217 B2	05-07-1993
			MX 165350 B	05-11-1992
			SG 86299 A1	19-02-2002
			US 4845772 A	04-07-1989
			WO 8912945 A1	28-12-1989

US 6373006	B1	16-04-2002	JP 3428532 B2	22-07-2003
			JP 2001127855 A	11-05-2001
			US 6373006 B1	16-04-2002

GB 2150757	A	03-07-1985	NONE	
