

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 June 2003 (05.06.2003)

PCT

(10) International Publication Number
WO 03/046086 A1

(51) International Patent Classification⁷: C09B 35/10,
35/18, C09K 11/06, C08K 5/00, C09D 11/02

COUGHLIN, Stephen, John [GB/GB]; 98 Belhaven
Park, Muirhead, North Lanarkshire G69 9FB (GB).

(21) International Application Number: PCT/EP02/12958

(74) Common Representative: CIBA SPECIALTY CHEMICALS HOLDING INC.; Klybeckstrasse 141, CH-4057 Basel (CH).

(22) International Filing Date:
19 November 2002 (19.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01811152.6 28 November 2001 (28.11.2001) EP

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): CIBA SPECIALTY CHEMICALS HOLDING INC. [CH/CH]; Klybeckstrasse 141, CH-4057 Basel (CH).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): FRASER, Iain, Frank [GB/GB]; 45 Stoneyholm Road, Kilbirnie KA25 7JS (GB). MACPHERSON, Ian, Alexander [GB/GB]; Kirklands, Balcomie Road, Crail, Fife KY10 3TN (GB). SMITH, David, MacDonald [GB/GB]; 75 Kilrymont Road, St. Andrews, Fife KY16 8DQ (GB). MARTYR, Simon [GB/GB]; 82 Pipit Rise, Bedford MK41 7JT (GB). CHISHOLM, Greig [GB/GB]; 23 Drummond Way, West Acres, Newton Mearns, Glasgow G77 6XW (GB).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NEW FLUORESCENT PIGMENTS

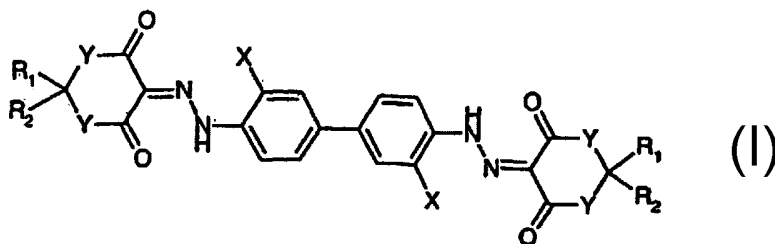

(57) Abstract: Azo compounds of formula (I), wherein X stands for halogen, in particular for chlorine, or C₁-C₄alkoxy, in particular for methoxy, Y stands for -CH₂- or -O-, R₁ and R₂, independently from each other, stand for hydrogen, C₁-C₈alkyl, or C₆-C₁₄aryl, which may be substituted up to three times with C₁-C₈alkyl, C₁-C₄alkoxy or halogen, a process for their preparation and their use as fluorescent compounds, in particular as solid fluorescent compounds, such as for special effect printing, security printing or in the opto-electronic field.



WO 03/046086 A1

New Fluorescent Pigments

The present invention relates to novel yellow and red azo compounds, a process for their preparation and their use as fluorescent compounds, in particular as solid fluorescent compounds, such as for special effect printing, security printing or in the opto-electronic field.

Pigments are differentiated from dyes by their physical characteristics rather than by chemical composition. Dyes, unlike pigments, dissolve during their application and in the process lose their crystal or particulate structure.

Fluorescent colorants, which generally are based on organic dyes, represent an important class of materials commonly used in coloring printing inks, paints and plastics to impart a desired color. Such colorants often referred to as industrial fluorescent pigments are obtained by dissolving a fluorescent dye in a suitable media, such as a resin matrix. The resin matrix is then broken to a specific size, typically of several microns, so that it may be used as a pigment.

In general, organic pigments exhibit no fluorescence or their fluorescence is only of low intensity. The prior art only describes a limited number of fluorescent organic pigments, as, for example, fluorescent C.I.Pigment Yellow 101 described in W. Herbst and K. Hunger, *Industrial Organic Pigments*, 2nd Ed., VCH Verlagsgesellschaft, Weinheim, 1997, 571-572.

Compared to dyes, pigments have several advantages, such as their good lightfastness properties or weather resistance and freedom from transfer problems.

Therefore, it is desirable to impart fluorescence to organic pigments, so as to obtain fluorescent organic pigments which may find application, e.g. in special effect printing or security printing applications showing the advantageous properties inherent to the physical characteristics of pigments and thus representing a favorable alternative to the fluorescent dyes mentioned above.


- 2 -

US 5,863,459 and 5,904,878 describe a method of enhancing the fluorescence of yellow and orange diarylide pigments by first, isolating the synthesized pigment as a dry powder and, then, adding the dried pigment to an organic solvent or water to obtain a slurry which is subjected to a heat treatment under elevated pressure for several hours. The maximum increase in spectral response achieved by the method of the prior art relative to the untreated pigment is approximately 8% when the fluorescence of an ink formulation drawn down on to a substrate is measured with a spectrophotometer. Treatment of the pigment slurry in an organic solvent, such as ethanol, yields a fluorescence intensity enhancement approximately twice the amount achieved by treatment in water. It is a disadvantage of the prior art that the pigment has to be isolated prior to the treatment and that the treatment requires an organic solvent in order to obtain appreciable results. Treatment of the pigment under severe conditions is considered to be a further disadvantage.

Therefore, a need still exists for fluorescent organic pigments, which can be obtained by a straightforward, and easily carried out process that does not show the disadvantages of the prior art and which pigments show fluorescence, in particular in the solid state, of high intensity.

Accordingly, the claimed pigments of formula (I) have been found. In addition, a process for their preparation, and their use have been found, too.

The present invention relates to azo pigments of formula (I)

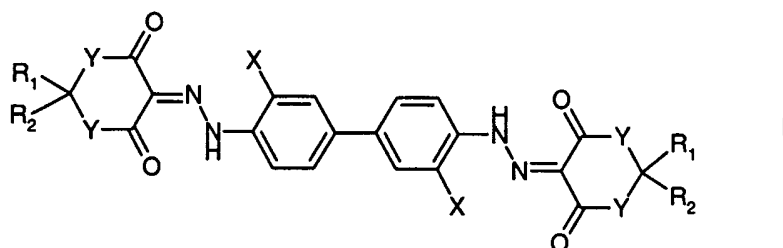

wherein X stands for halogen, in particular for chlorine, or C₁-C₄alkoxy, in particular for methoxy, Y stands for -CH₂- or -O-, preferably for -O-, and R₁ and R₂, independently from each other, stand for hydrogen, C₁-C₈alkyl, or C₆-C₁₄aryl, which may be substituted up to three times with C₁-C₈alkyl, C₁-C₄alkoxy or halogen, preferably for C₁-C₈alkyl, in particular for methyl, with the proviso that X is not methoxy if both R₁ and R₂ are methyl and Y is -O-.

- 3 -

Halogen has the meaning of fluorine, chlorine, bromine or iodine, preferably chlorine.

C₁-C₈alkyl stands for methyl, ethyl, n-, i-propyl, n-, i-, sec.-, tert.-butyl, n-pentyl, isoamyl, n-hexyl, n-heptyl, n-octyl, 2-ethylhexyl, preferably C₁-C₄alkyl such as methyl, ethyl, n-, i-propyl, n-, i-, sec.-, tert.-butyl; particular preferred is ethyl and especially methyl.


C₁-C₄alkoxy stands for methoxy, ethoxy, n-, i-propoxy, or n-butoxy, preferably for ethoxy and particularly for methoxy.

C₆-C₁₄aryl stands for phenyl, 1-, 2-naphthyl, 1-, 2-anthracenyl, 1-, 2-phenanthrenyl, preferably for phenyl.


Particularly preferred azo compounds I are those in which

- X is chlorine, Y is -O-, and R₁ and R₂ stand for hydrogen,
- X is chlorine, Y is -CH₂-, and R₁ and R₂ stand for methyl,
- X is methoxy, Y is -O-, and R₁ and R₂ stand for hydrogen,
- X is methoxy, Y is -CH₂-, and R₁ and R₂ stand for methyl.

The process for preparing the azo pigment I can be carried out in a customary way and is not particularly restricted. For example, the benzidine derivative of formula (II)

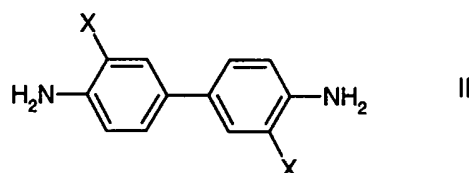

is tetrazotised at -10 to 10°C to prepare the tetrazo component. The coupling component, diketone of formula (III)




is usually dissolved in an aqueous solution of sodium hydroxide, which as a rule is then adjusted to a pH below 7, before the tetrazo component is added. Generally, the temperature during coupling is kept in the range of from -5 to 50°C, preferably -2 to 20°C. Then, the reaction mixture is usually heated for 0.1 to 2 hours to a temperature in the range

of from 50 to 100°C. After the heating step, the reaction product is separated from the reaction mixture in usual ways e.g. by filtration, optionally washed with water to remove soluble salts, and thereafter dried. Also preferably, the dried product is ground to a powder or granulated.

The novel azo pigments of formula (I) may be given an after-treatment to improve their properties, for example their dispersibility in inks, paints or plastics. Methods of after-treatment are well known to those skilled in the art.

Another embodiment of this invention is directed to the use (or method of use) of the novel azo pigments of formula (I)

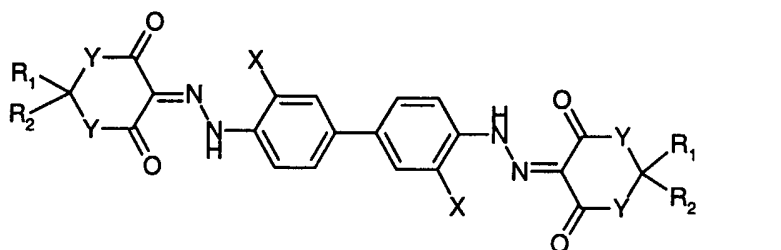

wherein X stands for halogen, in particular for chlorine, or C₁-C₄alkoxy, in particular for methoxy, Y stands for -CH₂- or -O-, preferably for -O-, and R₁ and R₂, independently from each other, stand for hydrogen, C₁-C₈alkyl, or C₆-C₁₄aryl, which may be substituted up to three times with C₁-C₈alkyl, C₁-C₄alkoxy or halogen, preferably for C₁-C₈ alkyl, in particular for methyl,

as fluorescent compounds (colourants), preferably in marking applications, in general by methods known per se, for example

(a) for mass colouring polymers, where the polymers can be polyvinyl chloride, cellulose acetate, polycarbonates, polyamides, polyurethanes, polyimides, polybenzimidazoles, melamine resins, silicones, polyesters, polyethers, polystyrene, polymethyl methacrylate, polyethylene, polypropylene, polyvinyl acetate, polyacrylonitrile, polybutadiene, polychlorobutadiene or polyisoprene, or the copolymers of the cited monomers;

(b) for the preparation of paints, paint systems, in particular automotive lacquers, coating compositions, paper colours, printing colours, inks, in particular for use in ink-jet printers, and for painting and writing purposes, as well as in electrophotography, e.g. for dry copier systems (Xerox process) and laser printers;

- (c) for security marking purposes, such as for cheques, cheque cards, currency notes, coupons, documents, identity papers and the like, where a special unmistakable colour impression is to be achieved;
- (d) as an additive to colourants, such as pigments and dyes, where a specific colour shade is to be achieved, particularly luminous shades being preferred;
- (e) for marking objects for machine recognition of these objects via the fluorescence, preferably for machine recognition of objects for sorting, e.g. including the recycling of plastics, alphanumerical prints or barcodes being preferably used;
- (f) for the production of passive display elements for a multitude of display, notice and marking purposes, e.g. passive display elements, notices and traffic signs, such as traffic lights, safety equipment;
- (g) for marking with fluorescence in the solid state;
- (h) for decorative and artistic purposes;
- (i) for modifying inorganic substrates such as aluminium oxide, silicon dioxide, titanium dioxide, tin oxide, magnesium oxide (especially "stone wood"), silicates, clay minerals, calcium-, gypsum- or cement-containing surfaces, for example coatings or plaster surfaces;
- (j) in optical light collection systems, in fluorescence solar collectors (see Nachr. Chem. Tech. Lab. 1980, 28, 716), in fluorescence-activated displays (see Elektronik 1977, 26, 6), in cold light sources used for light-induced polymerisation for the preparation of plastics, for testing of materials, for example in the production of semiconductor circuits, for analysing microstructures of integrated semiconductor components, in photoconductors, in photographic processes, in display, illumination or image converter systems, where excitation is effected by electrons, ions or UV radiation, e.g. in fluorescent displays, Braun tubes or in fluorescent lamps, as part of an integrated semiconductor circuit containing dyes as such or in combination with other semiconductors, for example in the form of an epitaxy, in chemiluminescence systems, e.g. in chemiluminescent flashlights, in luminescence immunoassays or other luminescence detection processes, as signal paints, preferably for visually emphasising strokes of writing and drawings or other graphic products, for marking signs and other objects for which a particular visual colour impression is to be achieved, in dye lasers, preferably as fluorescent dyes for generating laser beams, as optical recording medium and also as Q-switches;
- (k) for converting the frequency of light, e.g. for turning short-wave light into long-wave visible light or for doubling or tripling the frequency of laser light in non-linear optics;

(l) for tracer purposes, e.g. in biochemistry, medicine, technology and natural science, where the novel colourants can be linked covalently to the substrates or via secondary valences, such as hydrogen bonds or hydrophobic interactions (adsorption); and
(m) in highly sensitive detection processes (see Z. Analyt. Chem. 1985, 320, 361), in particular as fluorescent colourants in scintillators.

The present invention is illustrated further by the following examples.

Examples

Example 1: A solution of 4.5 parts acetic acid (100%) and 13.3 parts hydrochloric acid (36%) in 60 parts water is added with rapid stirring to a solution of 23.4 parts 2,2-dimethyl-1,3-dioxane-4,6-dione dissolved in a solution of 14.5 parts sodium hydroxide (50%) in 270 parts water. The resultant slurry is adjusted to 750 parts by addition of water and pH 6.0 by addition of sodium hydroxide (15%). This slurry is then reacted with 19.5 parts of 3,3'-dichlorobenzidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner, with simultaneous addition of sodium hydroxide (15%) to maintain pH 4.8. The coupled pigment slurry is then heated to a temperature of 93°C and maintained at this temperature for 30 minutes before being cooled to 70°C by addition of water. The highly insoluble yellow product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 2: A solution of 40.8 parts 2,2-dimethyl-1,3-dioxane-4,6-dione and 24 parts of sodium hydroxide (50%) in 300 parts of water is added to a solution of 25 parts of sodium formate in 420 parts of water. To this solution is added acetic acid (100%) with rapid stirring until pH 6.0. The resultant slurry is adjusted to 1500 parts at a temperature of 15°C by addition of water and ice. This slurry is then reacted with 32.8 parts of o-dianisidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner. Ice is added during the reaction to prevent the temperature rising above 20°C. The coupled pigment slurry is then heated to a temperature of 90°C and maintained at this temperature for 60 minutes before being cooled to 70°C by addition of water. The highly insoluble red product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 3: A solution of 4.5 parts acetic acid (100%) and 13.3 parts hydrochloric acid (36%) in 60 parts water is added with rapid stirring to a solution of 22.7 parts 5,5-dimethyl-1,3-cyclohexanedione dissolved in a solution of 14.5 parts sodium hydroxide (50%) in 270 parts water. The resultant slurry is adjusted to 750 parts by addition of water and pH 6.0 by addition of sodium hydroxide (15%). This slurry is then reacted with 19.5 parts of 3,3'-dichlorobenzidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner, with simultaneous addition of sodium hydroxide (15%) to maintain pH 4.8. The coupled pigment slurry is then heated to a temperature of 93°C and maintained at this temperature for 30 minutes before being cooled to 70°C by addition of water. The highly insoluble yellow product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 4: A solution of 39.5 parts 5,5-dimethyl-1,3-cyclohexanedione and 24 parts of sodium hydroxide (50%) in 300 parts of water is added to a solution of 25 parts of sodium formate in 420 parts of water. To this solution is added acetic acid (100%) with rapid stirring until pH 6.0. The resultant slurry is adjusted to 1500 parts at a temperature of 15°C by addition of water and ice. This slurry is then reacted with 32.8 parts of o-dianisidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner. Ice is added during the reaction to prevent the temperature rising above 20°C. The coupled pigment slurry is then heated to a temperature of 90°C and maintained at this temperature for 60 minutes before being cooled to 70°C by addition of water. The highly insoluble red product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 5: A solution of 4.5 parts acetic acid (100%) and 13.3 parts hydrochloric acid (36%) in 60 parts water is added with rapid stirring to a solution of 18.2 parts 1,3-cyclohexanedione dissolved in a solution of 14.5 parts sodium hydroxide (50%) in 270 parts water. The resultant slurry is adjusted to 750 parts by addition of water and pH 6.0 by addition of sodium hydroxide (15%). This slurry is then reacted with 19.5 parts of 3,3'-dichlorobenzidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner, with simultaneous addition of sodium hydroxide (15%) to maintain pH 4.8. The coupled pigment slurry is then heated to a temperature of 93°C and maintained at this temperature for 30 minutes before being cooled to 70°C by addition of water. The highly

insoluble yellow product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 6: A solution of 31.6 parts 1,3-cyclohexanedione and 24 parts of sodium hydroxide (50%) in 300 parts of water is added to a solution of 25 parts of sodium formate in 420 parts of water. To this solution is added acetic acid (100%) with rapid stirring until pH 6.0. The resultant slurry is adjusted to 1500 parts at a temperature of 15°C by addition of water and ice. This slurry is then reacted with 32.8 parts of o-dianisidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner. Ice is added during the reaction to prevent the temperature rising above 20°C. The coupled pigment slurry is then heated to a temperature of 90°C and maintained at this temperature for 60 minutes before being cooled to 70°C by addition of water. The highly insoluble red product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 7: A solution of 4.5 parts acetic acid (100%) and 13.3 parts hydrochloric acid (36%) in 60 parts water is added with rapid stirring to a solution of 30.0 parts 5-phenyl-1,3-cyclohexanedione dissolved in a solution of 14.5 parts sodium hydroxide (50%) in 270 parts water. The resultant slurry is adjusted to 750 parts by addition of water and pH 6.0 by addition of sodium hydroxide (15%). This slurry is then reacted with 19.5 parts of 3,3'-dichlorobenzidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner, with simultaneous addition of sodium hydroxide (15%) to maintain pH 4.8. The coupled pigment slurry is then heated to a temperature of 93°C and maintained at this temperature for 30 minutes before being cooled to 70°C by addition of water. The highly insoluble yellow product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Example 8: A solution of 53.1 parts 5-phenyl-1,3-cyclohexanedione and 24 parts of sodium hydroxide (50%) in 300 parts of water is added to a solution of 25 parts of sodium formate in 420 parts of water. To this solution is added acetic acid (100%) with rapid stirring until pH 6.0. The resultant slurry is adjusted to 1500 parts at a temperature of 15°C by addition of water and ice. This slurry is then reacted with 32.8 parts of o-dianisidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner. Ice is added during the reaction to prevent the temperature rising above 20°C. The coupled pigment

slurry is then heated to a temperature of 90°C and maintained at this temperature for 60 minutes before being cooled to 70°C by addition of water. The highly insoluble red product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Comparative Example 1: A solution of 4.5 parts of acetic acid (100%) and 13.3 parts of hydrochloric acid (36%) in 50 parts of water is heated to 70°C and added with rapid stirring to a solution of 31.0 parts of acetoacet-o-toluidide dissolved in a solution of 14.5 parts of sodium hydroxide (50%) in 270 parts of water. The resultant slurry is adjusted to 850 parts by addition of water and pH 6.0 by addition of sodium hydroxide (15%). This slurry is then reacted with 19.5 parts of 3,3'-dichlorobenzidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner, with simultaneous addition of sodium hydroxide (15%) to maintain pH 4.8. The coupled pigment slurry is then heated to a temperature of 90°C and maintained at this temperature for 20 minutes before being cooled to 70°C by addition of water. The product is then filtered, washed with water to remove insoluble salts, dried and converted to a powder by grinding.

Comparative Example 2: A solution of 50 parts of acetoacetanilide and 24 parts of sodium hydroxide (50%) in 300 parts of water is added to a solution of 25 parts of sodium formate in 420 parts of water. To this solution is added 20.9 parts of acetic acid (100%) with rapid stirring. The resultant slurry is adjusted to 1500 parts at a temperature of 17°C by addition of water and ice. The slurry is then reacted with 32.8 parts of o-dianisidine, previously tetrazotised with sodium nitrite and hydrochloric acid in the usual manner. Ice is added during the reaction to prevent the temperature rising above 20°C. The coupled pigment slurry is then heated to a temperature of 90°C and maintained at this temperature for 60 minutes before being cooled to 70°C by addition of water. The product is then filtered, washed with water to remove soluble salts, dried and converted to a powder by grinding.

Examples 9-16, Comparative Examples 3-4: Inks are made from each of the pigments described in Examples 1 to 8 and comparative examples 1 and 2 and their fluorescence intensity is measured.

The inks are made by adding to a polyethylene container 200 g of 2.0 to 2.5 mm glass beads, 31 g of nitrocellulose varnish, 51 g of ethanol and 18 g of pigment. The mixture is shaken on a commercial disperser for 45 minutes. 18 g of the resulting mill-base are strained and reduced by adding a further 17 g of nitrocellulose varnish along with 9 g of ethanol and 2.5 g of ethyl acetate. The final ink is then drawn down on non-absorbing paper using a K-bar.

The fluorescence intensities are measured by mounting the drawdowns on to glass slides and running fluorescence spectra using a Perkin-Elmer LS-5B fluorimeter.


The results are given in the following table:

Table: Results of application examples

Ex.	9	10	11	12	13	14	15	16	Comp. Ex. 3	Comp. Ex. 4
Pigment from ex.	1	2	3	4	5	6	7	8	Comp. Ex. 1	Comp. Ex. 2
Fluorescence Intensity	145	35	45	15	13	10	19	10	8	4

Claims

1. Azo pigments of formula I

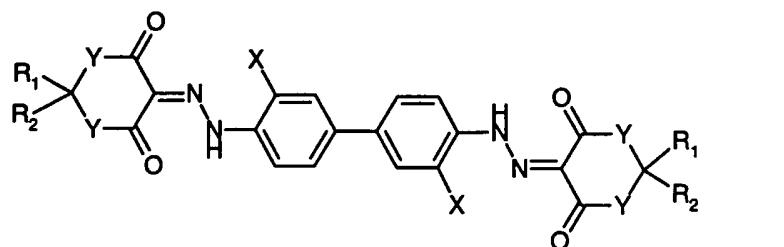


wherein X stands for halogen or C₁-C₄alkoxy, Y stands for -CH₂- or -O-, R₁ and R₂, independently from each other, stand for hydrogen, C₁-C₈alkyl, or C₆-C₁₄aryl, which may be substituted up to three times with C₁-C₈alkyl, C₁-C₄alkoxy or halogen, with the proviso that X is not methoxy if both R₁ and R₂ are methyl and Y is -O-.

2. The azo pigment according to claim 1 wherein X is chlorine or methoxy.


3. Process for the manufacture of azo pigments according to claim 1 by

a) tetrazotizing a benzidine derivative of formula (II)

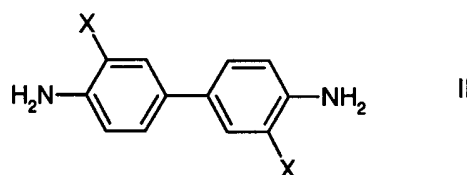

at a temperature in the range of from -10 to 10°C,

b) coupling the obtained tetrazo product with a diketone of formula (III)




at a temperature in the range of from -5 to 50°C,

c) then heating the reaction mixture for 0.1 to 2 hours to a temperature in the range of from 50 to 100°C,

d) separating the reaction product from the reaction mixture, optionally washing it with water, and drying it thereafter.

4. Method of using the azo pigments of formula (I)

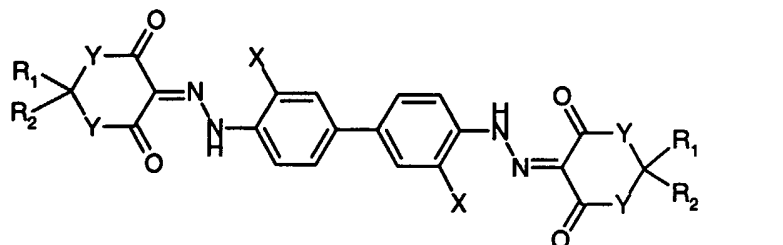

wherein X stands for halogen or C₁-C₄alkoxy, Y stands for -CH₂- or -O-, and R₁ and R₂, independently from each other, stand for hydrogen, C₁-C₈alkyl, or C₆-C₁₄aryl, which may be substituted up to three times with C₁-C₈alkyl, C₁-C₄alkoxy or halogen as fluorescent compounds.

5. Method according to claim 4 wherein the fluorescent compounds are used in marking applications.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 02/12958

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 C09B35/10 C09B35/18 C09K11/06 //C08K5/00,C09D11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 C09B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 CHEM ABS Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 982 373 A (SUN CHEMICAL CORP) 1 March 2000 (2000-03-01) claims & US 5 904 878 A 18 May 1999 (1999-05-18) cited in the application ---	1-5
A	EP 0 982 372 A (SUN CHEMICAL CORP) 1 March 2000 (2000-03-01) claims; examples & US 5 863 459 A 26 January 1999 (1999-01-26) cited in the application ---	1-5
	-/--	

Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
E earlier document but published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
O document referring to an oral disclosure, use, exhibition or other means	* & * document member of the same patent family
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 28 February 2003	Date of mailing of the international search report 12/03/2003
--	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Ginoux, C
--	--

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/12958

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FADDA A A ET AL: "SYNTHESIS OF AZODISPERSE DYES FROM MELDRUM'S ACID FOR DYEING ACETATE AND OTHER FIBRES" INDIAN JOURNAL OF TEXTILE RESEARCH, NEW DEHLI, IN, vol. 3, no. 9, 1984, pages 115-117, XP001068215 * Table 1, Dye 14 * -----	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/12958

Patent document cited in search report	A	Publication date	US	Patent family member(s)	Publication date
EP 0982373	A	01-03-2000	US	5904878 A	18-05-1999
			EP	0982373 A1	01-03-2000
EP 0982372	A	01-03-2000	US	5863459 A	26-01-1999
			EP	0982372 A1	01-03-2000
			DE	69810615 D1	13-02-2003