



(51) International Patent Classification:

B01J 29/00 (2006.01) *C07C 11/04* (2006.01)
B01J 35/10 (2006.01) *C07C 11/06* (2006.01)
C07C 1/20 (2006.01)

(21) International Application Number:

PCT/US2015/033705

(22) International Filing Date:

2 June 2015 (02.06.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/009,077 6 June 2014 (06.06.2014) US
 14/519,441 21 October 2014 (21.10.2014) US

(71) Applicant: **UOP LLC** [US/US]; 25 East Algonquin Road,
 P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US).

(72) Inventors: **SCHOENFELDT, Nick J.**; UOP LLC, 25 East
 Algonquin Road, P. O. Box 5017, Des Plaines, Illinois
 60017-5017 (US). **STICKLEY, David**; UOP LLC, 25
 East Algonquin Road, P. O. Box 5017, Des Plaines,
 Illinois 60017-5017 (US). **MOSCOSO, Jaime G.**; UOP
 LLC, 25 East Algonquin Road, P. O. Box 5017, Des
 Plaines, Illinois 60017-5017 (US). **JAN, Deng-Yang**;
 UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des
 Plaines, Illinois 60017-5017 (US). **YUHAS, Benjamin
 Daniel**; UOP LLC, 25 East Algonquin Road, P. O. Box
 5017, Des Plaines, Illinois 60017-5017 (US).

(74) Agent: **GOLDBERG, Mark**; UOP LLC, 25 East Algon-
 quin Road, P. O. Box 5017, Des Plaines, Illinois 60017-
 5017 (US).

(81) Designated States (unless otherwise indicated, for every
 kind of national protection available): AE, AG, AL, AM,
 AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
 BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
 DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
 HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
 KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
 MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
 PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
 SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
 TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
 kind of regional protection available): ARIPO (BW, GH,
 GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
 TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
 TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
 DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
 LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
 SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
 GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: ZEOLITIC MATERIALS WITH MODIFIED SURFACE COMPOSITION, CRYSTAL STRUCTURE, CRYSTAL SIZE, AND/OR POROSITY, METHODS FOR MAKING THE SAME, AND METHODS FOR CONVERTING OXYGENATES TO OLEFINS VIA REACTIONS CATALYZED BY THE SAME

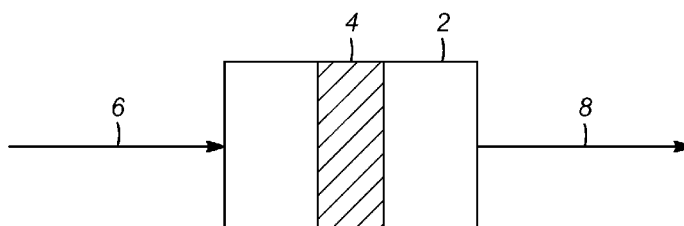


FIG. 1

(57) Abstract: Zeolitic materials with modified surface composition, crystal structure, crystal or particle size, and/or porosity, methods for making the same, and methods for converting oxygenates to olefins using the same are provided herein. In an exemplary embodiment, a method for reducing a surface silicon content of a silicon-containing zeolitic material is provided that includes providing a silicon-containing zeolitic material; and contacting the silicon-containing zeolitic material with a modifying solution comprising one or more of an amine, an alcoholamine, and an amino acid. In this embodiment, the contacting occurs under conditions suitable for the modifying solution to reduce a surface silicon content, increase the porosity, and/or decrease an average crystal or particle size of the silicon-containing zeolitic material.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

ZEOLITIC MATERIALS WITH MODIFIED SURFACE COMPOSITION, CRYSTAL
STRUCTURE, CRYSTAL SIZE, AND/OR POROSITY, METHODS FOR MAKING
THE SAME, AND METHODS FOR CONVERTING OXYGENATES TO OLEFINS
VIA REACTIONS CATALYZED BY THE SAME

5 STATEMENT OF PRIORITY

[0001] This application claims priority to U.S. Provisional Application No. 62/009,077 which was filed June 06, 2014, and U.S. Application No. 14/519,441 which was filed October 21, 2014, the contents of which are hereby incorporated by reference in its entirety.

10 TECHNICAL FIELD

[0002] The technical field generally relates to crystalline molecular sieve catalysts and catalyst supports, methods for making the same, and methods for converting oxygenates to hydrocarbons using the same. More particularly, the technical field relates to zeolitic materials with modified surface composition, crystal structure, crystal or particle size, and/or porosity, methods for making the same, and methods for converting oxygenates to hydrocarbons using the same.

BACKGROUND

[0003] Crystalline molecular sieves are among the most important materials in industrial catalysts today. These materials, including aluminosilicate zeolites, metal-substituted aluminosilicate zeolites, silicoaluminophosphates (SAPOs), metal-substituted silicoaluminumphosphates (MeAPSOs), aluminophosphates (ALPOs), and metal-substituted aluminum phosphates (MeAPOs) are typically microporous materials with a defined pore structure that can accommodate a number of different cations. Molecular sieves find use in a variety of applications. For instance, aluminosilicate zeolites (in particular, synthetic zeolites), SAPOs and ALPOs are widely used as catalysts or catalyst support materials in the petrochemical industry, where they serve as catalysts or catalyst support materials for fluid catalytic cracking and hydrocracking.

[0004] Acid site density of a zeolitic material is determined by the chemical composition at a surface of the material defining a pore (e.g., the relative proportions of Me (substituted metals) (if present), silicon (Si) (if present), aluminum (Al), and phosphorous (P) (if present)). It is also known that acid site density affects catalytic

performance. For example, it is known that light olefin selectivity during catalytic conversion of methanol to olefins with a SAPO catalyst can be improved by reduction of acid site density on a catalyst surface. Reduction of acid site density may be achieved in SAPO materials via reduction of the amount of silicon in the material. However, reduction of silicon in SAPOs prepared via conventional techniques is limited because as silicon content is reduced in the synthesis mixture, crystallization or formation of intergrowth of undesirable crystal structures (specifically, the crystal structure cotes denoted by AEI and/or AFI) into the otherwise chabazite (CHA) crystalline materials increases.

[0005] Additionally, catalytic behavior is affected by the pore size distribution of a zeolitic material. For instance, in a zeolitic material with a porous network comprising only micropores, catalytic activity is often limited by mass transfer, potentially limiting production rates and/or increasing the likelihood for undesirable secondary reactions.

[0006] Catalytic behavior is also affected by the crystal or particle size of a zeolitic material. For instance, catalytic activity is often limited by mass transfer in zeolitic materials with a porous network comprising relatively large particles or crystals, also potentially limiting production rates and/or increasing the likelihood for undesirable secondary reactions.

[0007] Accordingly, it is desirable to provide novel methods for making zeolitic materials with modified surface composition, crystal structure, crystal size, and/or porosity. Furthermore, other desirable features and characteristics will become apparent from the subsequent detailed description and the appended claims, taken in conjunction with the accompanying drawings and the foregoing technical field and background.

BRIEF SUMMARY

[0008] Silicon-containing zeolitic materials and methods for reducing a surface silicon content of a silicon-containing zeolitic material are provided herein. An exemplary method comprises the steps of: providing a zeolitic material comprising silicon at a surface of the zeolitic material; and contacting the surface of the zeolitic material with a modifying solution comprising one or more of an amine, an alcoholamine, or an amino acid. In this embodiment, contacting the surface of the zeolitic material with the modifying solution reduces an amount of silicon at the surface to generate a modified zeolitic material with reduced surface silicon content.

[0009] In other embodiments, compositions of matter are provided that comprise zeolitic materials having a pore structure comprising micropores. In one exemplary embodiment, a zeolitic material has a % porosity as measured by mercury porosimetry of 65% to 80%. In this exemplary embodiment, the zeolitic material comprises silicon at a first concentration within a depth of 2 nm from a surface and a second concentration at a depth of 40 nm or more from the surface, with the first concentration being 0.9 to 1.6 times the second concentration, such as 1.2 to 1.4 times the second concentration.

[0010] In another exemplary embodiment of a composition of matter, the zeolitic material has a % porosity as measured by mercury porosimetry of 65% to 80%; and comprises a crystalline material with an average crystal or particle size as measured by light scattering of 400 nm to 2500 nm size.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The attached Figure (FIG. 1) is an illustration of a process flow of an exemplary apparatus and method for converting methanol to olefins via reaction catalyzed by an exemplary crystalline porous SAPO material with hierarchical pore structure as described herein.

DETAILED DESCRIPTION

[0012] The following detailed description is merely exemplary in nature and is not intended to limit the methods or apparatuses described herein. Furthermore, there is no intention to be bound by any theory presented in the preceding background or the following detailed description.

[0013] Zeolitic materials with modified surface composition, crystal structure, crystal or particle size, and/or porosity, methods for making the same, and methods for converting oxygenates to hydrocarbons and/or olefins using the same are provided herein. As used herein, the term zeolitic material should be understood to include aluminosilicate zeolites, metal-substituted aluminosilicate zeolites, silicoaluminophosphates (SAPOs), metal-substituted silicoaluminumphosphates (MeAPSOs), aluminophosphates (ALPOs), and metal-substituted aluminum phosphates (MeAPOs), with a defined pore structure comprising micropores, such as those materials conventionally used as catalysts or catalyst support materials. Metal-substituted zeolites, MAPSOs and MeAPOs, may be substituted with any element in groups 2 through 13 of the Periodic Table, with specific examples of suitable metals being magnesium (Mg), calcium (Ca), scandium (Sc), titanium (Ti),

vanadium (V), chromium (Cr), manganese (Mn), iron (Fe), cobalt (Co), nickel (Ni), copper (Cu), zinc (Zn), and gallium (Ga). As used herein, “micropores” are pores with a maximum pore dimension, such as a pore diameter or length, of 2 nm or less.

[0014] As used herein, modifying a surface composition of a zeolitic material includes modifying a surface composition such that an amount of one or more of silicon, aluminum, and/or phosphorous increases or decreases relative to an amount of one or more additional constituents. In some embodiments, the one or more additional constituents can be silicon, aluminum, and/or phosphorous. That is, in some embodiments, modifying a surface composition of a zeolitic material means modifying the ratio of silicon:aluminum:phosphorous (or a ratio of silicon:(aluminum + phosphorous)) at a surface of the material.

[0015] Further, the term “surface” is used to describe the region of a material bound by an upper surface of the material to a depth of at most 25 nm, such as at most 20 nm, such as at most 10 nm, such as at most 5 nm. The upper surface bounding the “surface” region may be any surface of the material, including an external surface or an inner pore surface. Thus, in some embodiments zeolitic materials prepared via the methods described herein have a chemical composition within an upper 5 nm, 10 nm, 20 nm, or 25 nm region that differs, at least with respect to the relative amounts of silicon, aluminum, and/or phosphorous, from the chemical composition of the unmodified zeolitic material within the same depth range.

[0016] As used herein, modifying a crystal structure of a zeolitic material includes the selective decomposition of intermingled and/or intergrown AEI and/or AFI framework impurity from the crystal structure of a zeolitic material. As will be appreciated by those of skill in the art, in excess of 200 framework types are known for zeolitic materials, and each unique framework type is assigned a 3-letter code by the Structure Commission of the IZA that is recognized by the IUPAC. In some embodiments, it is preferable for zeolitic materials to have the CHA framework type. However, synthesis of certain zeolitic materials with this framework type is often difficult without intermingling and/or intergrowing the less desirable AEI and/or AFI framework as an impurity. In some embodiments, zeolitic materials having the CHA framework with intermingled and/or intergrown AEI and/or AFI framework impurity may be subjected to methods provided

herein to selectively decompose (that is selectively reduce or remove) the intermingled and/or intergrown AEI and/or AFI framework impurity.

[0017] As used herein, modifying a crystal or particle size of a zeolitic material includes modifying a physical dimension of the crystal. In some embodiments, modifying the crystal or particle size results in a visual change to the material morphology and shape, often resulting in smaller and thinner crystals with visible holes and surface etching or roughness on the external surface of the material. In some related embodiments, modifying the crystal or particle size results in reduced average crystal or particle size as measured by light scattering, or other methods known within the art.

[0018] As used herein, modifying a porosity of a zeolitic material includes modifying one or more characteristics of a zeolitic material that are related to pore distribution. In some embodiments, modifying the porosity of a zeolitic material results in a change in the total pore volume and/or the external pore volume. In some related embodiments, this change is an increase in the total pore volume and/or external pore volume. In some embodiments, modifying the porosity of a zeolitic material may result in a change in the external surface area of the material. In some embodiments, this change is brought by an increase in total pore volume. In some embodiments, modifying the porosity of a zeolitic material results in a change in the micropore area and/or micropore volume. In some embodiments, modifying the porosity of a zeolite material results in a change to the % porosity as measured by mercury porosimetry. In some embodiments, this change is a decrease in the micropore area and/or micropore volume. In some embodiments, certain characteristics related to pore distribution may remain relatively unchanged, including Brunauer, Emmett, and Teller ("BET") surface area.

[0019] In an exemplary embodiment, the methods provided herein comprise providing a pre-synthesized zeolitic starting material and contacting this material with a modifying solution under appropriate conditions to materially modify one or more of a surface composition, crystal structure, crystal or particle size and porosity of the zeolitic material. Various process factors (including ratio of zeolitic starting material to modifying solution, concentration of active constituent(s) in the modifying solution, contact time, and temperature) as well as different modifying solutions, described below, may be selected to accomplish one or more of the modifications described herein.

[0020] In some embodiments, a reaction mixture comprising the zeolitic starting material and the modifying solution may be prepared at a ratio of 1 g to 50 g zeolitic starting material: 100 ml modifying solution, such as at a ratio of 5 g to 25 g zeolitic starting material, such as at a ratio of 10 g to 20 g zeolitic starting material:100 ml modifying solution. In some specific embodiments, the reaction mixture is prepared at a ratio of 15 g zeolitic starting material: 100 ml modifying solution. Ratios of zeolite starting material to modifying solution should not be limited to those described above, as scale-up to any desired quantity should be expected to provide similar results.

[0021] The selection of ratio of zeolitic starting material to reaction solution combined with various additional process details (including concentration of active constituent(s) in the modifying solution, time of contact, and temperature) may impact the rate and/or extent of modification. Specifically, it has been observed that increasing the concentration of active constituents increases the rate of the modification. In some embodiments, the concentration of active constituents is at least 0.01 g/ml, such as at least 0.05 g/ml. In some embodiments, the concentration of active constituents is from 0.01 g/ml to 1 g/ml, such as from 0.05 g/ml to 0.5 g/ml, such as from 0.05 g/ml to 0.3 g/ml. It has additionally been observed that increasing the contact time increases the extent of modification. In some embodiments, the mixture is stirred or mixed for a period of 30 minutes to 10 days, such as from 6 hours to 10 days, such as from 12 hours to 10 days, such as from 1 day to 10 days. In some embodiments, the reaction is conducted at a temperature of room temperature $\pm$ 25°C, although other embodiments may utilize temperatures above or below this range. In some specific embodiments, the reaction is conducted at room temperature.

[0022] In some embodiments, the methods provided herein may be used to decrease the amount of silicon in a surface of a silicon-containing zeolitic material. As used herein to describe a zeolitic material, the term “silicon-containing” indicates that the zeolitic material comprises a measurable amount, i.e., measurable by an appropriate analytical technique such as ICP, of silicon in the bulk. In some instances, silicon-containing zeolitic materials comprise at least 0.01 wt.%, such as at least 0.05 wt.%, such as at least 0.10 wt.% silicon in the bulk. In some instances, silicon-containing zeolitic materials comprise 0.01 wt.%, such as at least 0.05 wt.%, such as at least 0.10 wt.% to at most 2.7 wt.%,

such as at most 1.2 wt.%, such as at most 0.8 wt.%, such as at most 0.6 wt.% silicon in the bulk.

[0023] In some embodiments, the modifying solution is a solution comprising an amine (e.g., methylamine, dimethylamine, trimethylamine, ethylamine, diethylamine, triethylamine, phenylamine, diphenyl amine, etc.). In some embodiments, the modifying solution is a solution comprising an alcoholamine. Exemplary alcoholamines include alcoholamines with varied numbers (e.g., 1, 2, or 3) of alcohol functionalities (e.g. ethanolamine, diethanolamine, triethanolamine, etc), alcoholamines with different chain lengths on the alcohol substituent (e.g. a C1-C4 chain length, e.g., methanolamine, ethanolamine, propanolamine, etc.), and different alkyl substituents on the alcohol amine (e.g. phenyldiethanolamine, N-butyldiethanolamine, 2-N-ethylanilino-ethanol, etc). In some embodiments, the modifying solution is a solution comprising an amino acid (e.g. serine, lysine, phenylalanine). In some embodiments, the modifying solution is an aqueous solution comprising one or more of the above listed components. In some embodiments, the modifying solution is an aqueous synthetic mother-liquor comprising one or more of the above listed components along with additional components typically present in zeolite synthesis mother-liquors following crystallization of the intended product.

[0024] In some embodiments, the silicon-containing zeolitic starting material is a SAPO material. In some related embodiments, the SAPO material is SAPO-34, SAPO-56 (AFX structure), SAPO-RHO (RHO-structure), SAPO-18 (AEI structure), SAPO-5 (AFI structure), or mixtures or intergrowth thereof. In some related embodiments, the SAPO starting material is contacted with a modifying solution comprising diethanolamine.

[0025] Zeolitic materials with reduced surface silicon content prepared according to the methods described herein have reduced surface silicon content relative to the silicon content of the unmodified zeolitic starting material. As a general statement, silicon-containing zeolitic materials do not have uniform distribution of silicon. Rather, silicon tends to be present at higher concentrations in the uppermost 20-30 nm of a surface than is typically present in the bulk material. Further, silicon concentration in such materials tends to be highest within the first few nanometers of the surface, with the concentration dropping to a plateau at 30 nm.

[0026] In this regard, the ratio of silicon to aluminum and phosphorous (i.e., S:(Al + P)) of a surface may be determined by any number of conventional methods, for example, surface atomic concentration by X-ray photoelectron spectroscopy (XPS). Zeolitic materials with reduced surface silicon content prepared as described herein have surface ratios of silicon to aluminum and phosphorous that are significantly less than unmodified zeolitic materials. For instance, in a specific exemplary embodiment, an unmodified SAPO-34 starting material having a surface silicon to aluminum and phosphorous ratio of 0.054 (as determined by XPS), may have a surface silicon to aluminum and phosphorous ratio of less than 0.040, such as less than 0.035, such as less than 0.030, such as less than 0.020 after treatment with a modifying solution comprising diethanolamine.

[0027] Further, in some silicon-containing zeolitic materials (including SAPO-34), the ratio of silicon to aluminum and phosphorous within the uppermost 2-3 nm of the surface is 1.5x to 2x higher than the same ratio for the bulk material (i.e., at a depth of 30 nm and beyond). In some embodiments, SAPO-34 materials modified to reduce the amount of surface silicon according to methods provided herein have less variation between the maximum silicon to aluminum and phosphorous ratio and the same ratio in the bulk material. Further, in some embodiments, the drop from maximum to bulk is more gradual, with the plateau for the bulk material occurring at a depth of at least 40-50 nm from the surface. Thus, in some embodiments, the maximum ratio of silicon to aluminum and phosphorous within the uppermost 2-3 nm of the surface in modified zeolitic materials described herein is 0.9 to 1.6 times, such as 1.2 to 1.4 times, that of the bulk concentration, with the ratio of silicon to aluminum and phosphorous for the bulk material observable at a depth of 40 to 50 nm or greater from the surface.

[0028] The extent of silicon reduction is also reflected in the wt.% silicon (e.g., as measured by ICP) of a silicon-containing zeolitic material before and after treatment. In one specific exemplary embodiment, an unmodified SAPO-34 starting material having 1.9 wt.% Si (as determined by ICP), may have 1.5 wt.% Si after treatment with a modifying solution for reducing silicon, such as a modifying solution comprising diethanolamine. Other unmodified SAPO-34 starting materials having more or less wt.% Si may be used to prepare modified SAPO-34 materials with reduced wt.% Si. For instance, in another specific embodiment, an unmodified SAPO-34 starting material having 0.6 wt.% Si may have 0.4 wt.% Si after treatment with a modifying solution for

reducing silicon, such as a modifying solution comprising diethanolamine. Thus, in some embodiments, the methods described herein may be used to prepare a SAPO-34 material with 0.4 wt.% to 2.7 wt.% Si, such as 0.4 wt.% to 1.2 wt.% Si, such as 0.4 wt.% to 0.8 wt.% Si, such as 0.4 wt.% to 0.6 wt.% Si, such as 0.4 wt.% Si. In another specific embodiment, an unmodified SAPO-18 starting material having 0.7 wt.% Si may have 0.4 wt.% Si or less, such as 0.3 wt.% or less after treatment with a modifying solution for reducing silicon, such as a modifying solution comprising diethanolamine. Thus, in some embodiments, the methods described herein may be used to prepare a SAPO-18 material with 0.3 wt.% to 2.7 wt.% Si, such as 0.3 wt.% to 1.2 wt.% Si, such as 0.3 wt.% to 0.8 wt.% Si, such as 0.3 wt.% to 0.6 wt.% Si.

[0029] As will be understood, there are a variety of techniques for measuring a crystal and/or particle size characteristic of material. It has been observed that magnified visual inspection (e.g. scanning electron microscopy (SEM)) and light scattering are particularly useful techniques for characterizing changes in crystal and/or particle size as well as crystal morphology or topology in a zeolitic material subjected to the methods provided herein. For instance, when the methods described above are used to reduce the crystal or particle size in silicon-containing zeolitic material, it has been observed that the crystal or particle size of the material (as measured by light scattering) decreases linearly with the extent of silicon reduction (as measured by reduction in bulk wt.% of Si of the product following treatment in the modifying solution). Thus, in some embodiments, a modified silicon-containing zeolitic material (such as a modified SAPO-34 or SAPO-18 material) may be obtained with an average crystal or particle size of 700 nm and a Si-content of 1.5 wt.% when starting with an un-modified zeolite material of average crystal or particle size of 1000 nm and a Si-content of 1.9 wt.%. In some related embodiments, visual changes in the material morphology and topology can be observed following treatment with a modifying solution.

[0030] As will be understood, there are a variety of techniques for measuring a porosity characteristic of material. It has been observed that mercury porosimetry is a particularly useful technique for characterizing changes in porosity or pore distribution in a zeolitic material subjected to the methods provided herein. For instance, when the methods described above are used to reduce the amount of silicon in silicon-containing zeolitic material, it has been observed that the % porosity of the material (as measured by

mercury porosimetry) increases with the extent of silicon reduction (as measured by reduction in bulk wt.% Si in the material following treatment with a modifying solution). Thus, in some embodiments, a modified silicon-containing zeolitic material (such as a modified SAPO-34 or SAPO-18 material) has a % porosity (as measured by mercury porosimetry) of greater than 65%, such as 65% to 80%, such as 70% to 80%, such as 75% to 80%.

[0031] Additionally, in some embodiments, zeolitic materials with reduced surface silicon content prepared according to the methods described herein have no apparent damage to the crystal structure, and minimal, if any, loss in crystallinity (i.e., less than 10% loss). In some embodiments, modified silicon-containing zeolitic materials prepared as described herein have an average crystal or particle size as measured by light scattering of 400 nm to 2500 nm, such as 500 nm to 1500 nm, such as 500 nm to 1000 nm.

[0032] As will be understood, in some embodiments, modified silicon-containing zeolitic materials prepared as provided herein may have two or more of the above described material characteristics (i.e., surface % silicon, surface ratio of silicon to aluminum and phosphorous, decreased silicon concentration gradient with depth, and greater depth at which bulk silicon to aluminum and phosphorous ratio is observed, wt.% silicon as measured by ICP, % porosity as measured by mercury porosimetry, and average crystal or particle size as measured by light scattering). For example, a silicon-containing zeolitic material (such as a SAPO-34 or SAPO-18 material) modified as described herein may have a modified surface silicon content, leading to the more gradual silicon concentration gradient from a surface to the bulk described above combined with a % porosity (as measured by mercury porosimetry) of 65% to 80%, such as 70% to 80%, such as 75% to 80%. In other exemplary embodiments, a silicon-containing zeolitic material (such as a SAPO-34 or SAPO-18 material) modified as described herein may have a % porosity (as measured by mercury porosimetry) of 65% to 80%, such as 70% to 80%, such as 75% to 80%, and an average crystal or particle size (as measured by light scattering) of 400 nm to 2500 nm, such as 500 nm to 1500 nm, such as 500 nm to 1000 nm.

[0033] In some embodiments, the methods provided herein may be used to decrease the amount of aluminum and/or phosphorous in a surface of a zeolitic material. In embodiments where decreasing the amount of aluminum and/or phosphorous in the

surface is desired, the modifying solution is a solution comprising a halogenated quaternary amine (e.g. tetramethyl ammonium fluoride, tetraethyl ammonium fluoride, tetrapropyl ammonium fluoride, tetramethyl ammonium chloride, tetraethyl ammonium chloride, tetrapropyl ammonium chloride, etc.). In some specific embodiments, the modifying solution is a solution comprising a fluoridated quaternary amine. In some embodiments, the modifying solution is a solution comprising a quaternary ammonium hydroxide and hydrogen fluoride (HF). In some embodiments, the modifying solution is an aqueous solution comprising one or more of the above listed components. In some embodiments, the modifying solution is an aqueous synthetic mother-liquor comprising one or more of the above listed components along with additional components typically present in zeolite synthesis mother-liquors following crystallization of the intended product.

[0034] As above with silicon reduction, zeolitic materials with reduced aluminum and/or phosphorous content in the surface prepared according to the methods described herein have reduced aluminum and/or phosphorous content in the surface relative to the aluminum and/or phosphorous content in the surface of the unmodified zeolitic starting material. Further, in some embodiments, the modified zeolitic materials additionally have increased silicon content relative to the unmodified zeolitic starting material. In some embodiments, zeolitic materials treated to reduce aluminum and/or phosphorous content may include SAPO materials (including SAPO-34 materials), MeAPSO materials, ALPO materials, MeAPO materials, aluminosilicate zeolites, and metal-substituted aluminosilicate zeolites.

[0035] In some embodiments, the modifying solution further comprises a silicon source. In some of these embodiments, treating a zeolitic material according to the methods provided herein reduces aluminum and/or phosphorous in the surface while increasing silicon.

[0036] In some embodiments, a SAPO-34 material may be treated to reduce aluminum and/or phosphorous (and/or increase silicon content) in the surface. The resulting modified SAPO-34 materials may be particularly suitable for use as catalysts where elevated acid site density or acid strength is desired (e.g., olefin oligomerization, methanol to aromatics conversion, etc.).

[0037] In some embodiments, an ALPO material may be treated to reduce aluminum and/or phosphorous (and introduce silicon content) in the surface. In such embodiments, the methods provide synthesis routes to SAPO structures by transformation of a previously synthesized ALPO to a SAPO.

- 5 [0038] Similarly, in some embodiments, a MeAPO material may be treated to reduce aluminum and/or phosphorous (and introduce silicon content) in the surface. In such embodiments, the methods provide synthesis routes to MeAPSO structures by transformation of a previously synthesized MeAPO to a MeAPSO.

- 10 [0039] In some embodiments, aluminosilicate zeolites (such as SSZ-13 (chabazite), pentasil family, etc.) may be treated to reduce aluminum (and/or increase silicon content). In such embodiments, the resulting modified aluminosilicate zeolites may have improved suitability for methanol-to-hydrocarbon catalysis, such as methanol-to-propylene catalysis and olefin methylation.

- 15 [0040] The extent of aluminum and/or phosphorous reduction in the surface is reflected in the wt.% (as measured by ICP) before and after treatment. In one specific exemplary embodiment, an unmodified SAPO-34 starting material with 1.7 wt.% Si, 22.3 wt.% Al, and 21.7 wt.% P (as determined by ICP), was treated with a modifying solution comprising a silicon source and tetraethyl ammonium fluoride (TEAF). The resulting SAPO-34 material had 7.3 wt.% Si, 20.8 wt.% Al, and 17.2 wt.% P. Thus, in some
20 embodiments, the methods described herein may be used to prepare a SAPO-34 material with 7.3 wt.% Si or more, 20.8 wt.% Al or less, and/or 17.2 wt.% P or less.

- [0041] In some embodiments, the methods provided herein may be used to decrease the amount of intermingled and/or intergrown AEI and/or AFI framework impurity present in a zeolitic material having the CHA framework. That is, it has surprisingly been found
25 that treatment with certain modification solutions results in selective decomposition of zeolitic materials with the AEI and/or AFI framework, particularly if the AEI and/or AFI framework material is an impurity intermingled and/or intergrown with a zeolitic material with the CHA framework. In embodiments where reduction of the amount of intermingled and/or intergrown AEI and/or AFI framework impurity present in a zeolitic
30 material having the CHA framework is desired, the modifying solution is a solution comprising a halogenated quaternary amine (e.g. tetramethyl ammonium fluoride, tetraethyl ammonium fluoride, tetrapropyl ammonium fluoride, tetramethyl ammonium

chloride, tetraethyl ammonium chloride, tetrapropyl ammonium chloride, etc.). In some specific embodiments, the modifying solution is a solution comprising a fluoridated quaternary amine. In some embodiments, the modifying solution is a solution comprising a quaternary ammonium hydroxide and hydrogen fluoride (HF). In some embodiments, the modifying solution is an aqueous solution comprising one or more of the above listed components. In some embodiments, the modifying solution is an aqueous synthetic mother-liquor comprising one or more of the above listed components along with additional components typically present in zeolite synthesis mother-liquors following crystallization of the intended product.

[0042] In one exemplary embodiment, the amount of intermingled and/or intergrown AEI framework impurity in a SAPO-34 material was reduced from 40% AEI to 33% AEI after treatment with a modifying solution comprising tetraethyl ammonium fluoride. In other embodiments, the amount of intermingled and/or intergrown AEI framework impurity in a treated SAPO-34 material may be less than or equal to 30%, such as less than or equal to 20%, such as less than or equal to 10%, based on the total weight of all components in the treated SAPO-34 material.

[0043] In some embodiments, the methods provided herein may be used to modify one or more characteristics of a zeolitic material related to crystal or particle size and crystal morphology or topology. It has been observed that magnified visual inspection (e.g. SEM) and light scattering are particularly useful techniques for characterizing changes in crystal and particle size as well as crystal morphology or topology in a zeolitic material subjected to the methods provided herein. For instance, when the methods described above are used to reduce the crystal or particle size in a zeolitic material, it has been observed that the crystal or particle size of the material (as measured by light scattering) decreases with the effectiveness of the treatment (as measured by total yield loss across the treatment step). Thus in some embodiments, a decrease in average crystal or particle size may be achieved. In some embodiments, alterations to the external crystal morphology and topology may be observed following treatment in the modifying solution.

[0044] In some embodiments, the methods provided herein may be used to modify one or more characteristics of a zeolitic material related to porosity and pore distribution. For instance, in some embodiments, a zeolitic material may be contacted with a modifying solution to increase the total pore volume and/or the external pore volume. In some

embodiments, the pore volume from pores with an average dimension of 10-18 nm and/or 30-100 nm is increased. In some embodiments, an increase in total pore volume and/or external pore volume is accompanied with an increase in the external surface area of the material. In some embodiments, the % porosity (as measured by mercury porosimetry) of a treated zeolitic material increases relative to the starting zeolitic material. In some embodiments, the BET surface area and micropore area and/or micropore volume of the treated zeolitic material is decreased. In some embodiments, one or more characteristics related to pore distribution, such as BET surface area, micropore area and/or volume, and % porosity (as measured by mercury porosimetry), may remain relatively unchanged.

[0045] Modifying solutions useful for modifying one or more characteristics of a zeolitic material related to porosity and pore distribution include solutions comprising one or more of the constituents listed above as useful for reducing surface silicon, reducing aluminum and/or phosphorous, and reducing the amount of intermingled and/or intergrown AEI and/or AFI framework impurity. Additionally, modifying solutions useful for modifying one or more characteristics of a zeolitic material related to porosity and pore distribution include solutions comprising a quaternary ammonium hydroxide, including mother-liquor solutions from zeolite synthesis following crystallization of the intended product. Exemplary quaternary ammonium hydroxides include tetramethyl ammonium hydroxide, tetraethyl ammonium hydroxide, tetrapropyl ammonium hydroxide, tetrabutyl ammonium hydroxide, etc.

[0046] Surprisingly, it has been found that the counter-ion in modifying solutions comprising a quaternary ammonium compound appears to impact the chemistry of the modifying solution. For instance, as described above, tetraethyl ammonium fluoride acts to selectively remove phosphorous from treated zeolitic materials. However, tetraethyl ammonium hydroxide does not share this selectivity, and instead results in unselective elemental decomposition of the treated zeolitic compound, which in some embodiments, results in modifications to one or more characteristics related to average crystal or particle size, or crystal morphology or porosity, without modification of the relative elemental composition of the material. This class of material modification may be particularly useful when material acid site density is desired to remain unchanged, while material porosity and/or crystal size and/or morphology is desired to be altered.

[0047] In some embodiments, treating a zeolitic material with a modifying solution comprising one or more amine, alcoholamine, or amino acid results in reduction of BET surface area, reduction in micropore volume, reduction in total pore volume, increase in external pore volume and external surface area, and increase in % porosity as measured by mercury porosimetry. In some embodiments, treating a zeolitic material with a modifying solution comprising one or more halogenated quaternary amine results in reduction of BET surface area, reduction in micropore volume, reduction in total pore volume, increase in external pore volume and external surface area, and increase in % porosity as measured by mercury porosimetry. In some embodiments, treating a zeolitic material with a modifying solution comprising one or more quaternary amine hydroxides results in little to no change in BET surface area and micropore volume, while increasing external pore volume and external surface area, and increase in % porosity as measured by mercury porosimetry. In an exemplary embodiment, a modified SAPO-34 zeolitic material has one or more of the following characteristics: a micropore surface area of at least 490 m²/g; an external surface area of at least 40 m²/g; a total pore volume of at least 0.490 cc/g; a micropore volume of at least 0.250 cc/g; and an exterior pore volume of at least 0.240 cc/g.

[0048] As will be appreciated, while certain exemplary embodiments described above illustrate the methods provided herein as applied to specific zeolitic materials, it is envisioned that these methods may be applied to any zeolitic material having any crystal framework type, without limit, to yield a zeolitic materials with modified surface composition, crystal properties, and/or porosity. Further, modifying solutions may be used which comprise any combination of the above described agents, without limit. In this way, it is possible for a modifying solution to be used to achieve a plurality of the above described effects. For instance, a modifying solution comprising diethanolamine and tetraethyl ammonium fluoride may be used reduce crystal size and surface silicon while simultaneously reducing an amount of intermingled and/or intergrown AEI framework impurity. Thus, in some embodiments, modified zeolitic materials may be prepared in which a plurality of the above described characteristics have been modified. In a particular exemplary embodiment, a modified SAPO-34 material may be prepared according to methods described herein that has low silicon content (e.g., 0.4-3.0 wt.%, such as 0.4-2 wt.%, such as 0.4-1.2 wt.%) and low AEI (e.g., less than 20 wt.%, such as

less than 10 wt.%). Such materials may additionally have beneficial modifications to their crystal or particle size (which improves mass transport properties and thus provide improvements to catalytic performance), crystal morphology or topology, pore structure, including increases in external surface area, external pore volume, and % porosity (which
5 improve mass transport properties of the material, and thus provide improvements to catalytic performance), without significantly adversely affecting micropore surface area or micropore volume.

[0049] As indicated above, it is intended that modified zeolitic materials prepared according to methods described herein may be used as catalytic materials. In some
10 particular embodiments, modified SAPO materials prepared as described above may be employed as catalysts to convert oxygenates to olefins. As will be appreciated, the term oxygenate is used to describe organic compounds with oxygen in their chemical structure. Exemplary oxygenates include alcohols, aldehydes and ethers. The term olefin is used to describe unsaturated hydrocarbons with at least one carbon-carbon double bond. In a
15 particular embodiment, modified SAPO materials prepared as described above may be employed as catalysts for the conversion of methanol to olefins (MTO).

[0050] Thus, in another aspect, methods of converting an oxygenate to an olefin via a SAPO catalyzed reaction are provided. In these methods, a feed stream comprising an oxygenate such as methanol, formaldehyde or dimethyl ether is contacted with a catalyst
20 comprising at least one modified SAPO material as described herein under conditions suitable for conversion of an oxygenate to an olefin. In some embodiments, the oxygenate is methanol and/or dimethyl ether, and the olefin is ethylene and/or propylene. Conditions employed to use the catalysts in an oxygenate-to-olefin conversion reaction can be readily identified by a person of ordinary skill in the art. In an exemplary embodiment, a
25 modified SAPO material may be a modified SAPO-34 material.

[0051] In an exemplary embodiment, a modified SAPO material as described herein may be sized by a 40/60 standard mesh, and a portion of the sized material placed in a fixed bed reactor. In one specific example, the reactor is heated to a temperature of 450°C and a methanol and/or dimethyl ether-comprising feed is introduced to the reactor at a
30 pressure of 72 psig ($P_{MeOH} \sim 40$ psig). A reactor effluent comprising light olefins including ethylene and propylene is generated via catalytic conversion.

[0052] When used to catalyze MTO conversion, modified SAPO-34 materials prepared as described herein to have reduced surface silicon content display increased light olefin (i.e., ethylene and propylene) production and decreased heavy olefin (i.e., olefins heavier than propylene) production relative to unmodified SAPO-34 catalysts.

5 Further, the modified SAPO-34 materials exhibit different ethylene and propylene selectivity profiles as compared to unmodified SAPO-34 catalysts. In particular, SAPO-34 catalysts with reduced surface silicon exhibit increased selectivity for both ethylene and propylene at early TOS as compared to selectivities observed for unmodified SAPO-34 materials. In some embodiments, after a length of time, the advantage in ethylene
10 selectivity of SAPO-34 catalysts with reduced surface silicon over untreated SAPO-34 catalysts is reduced, however, the propylene selectivity advantage continues until catalyst failure. In some embodiments, the modified SAPO-34 materials exhibit reduced selectivities for propane and reduced generation and accumulation of carbonaceous materials (i.e., coke) in and on the catalyst.

15 [0053] Also described herein are systems for using modified zeolitic materials prepared according to methods described herein as catalyst materials. In a particular embodiment, systems are described for converting an oxygenate to an olefin in a SAPO catalyzed reaction. The following exemplary systems are described with reference to the attached FIGURE. Exemplary systems include a reaction vessel 2 configured to contain
20 one or more catalytically active modified zeolitic materials 4 prepared according to methods described herein. In a particular embodiment, the reaction vessel 2 is configured to receive a oxygenate-containing feed stream 6, and contact the feed stream 6 with a catalytically active modified SAPO 4 under reaction conditions effective to convert an oxygenate to an olefin and produce an olefin-containing effluent 8. In some embodiments,
25 the feed stream 6 comprises one or more of methanol and dimethyl ether. In these embodiments, the olefin-containing effluent 8 comprises one or more of propylene and ethylene.

SPECIFIC EMBODIMENTS

[0054] While the following is described in conjunction with specific embodiments,
30 it will be understood that this description is intended to illustrate and not limit the scope of the preceding description and the appended claims.

[0055] A first embodiment of the invention is a method for reducing a surface silicon content of a silicon-containing zeolitic material, the method comprising the steps of providing a zeolitic material comprising silicon at a surface of the zeolitic material; and contacting the surface of the zeolitic material with a modifying solution comprising one or more of an amine, an alcoholamine, or an amino acid, wherein contacting the surface of the zeolitic material with the modifying solution reduces an amount of silicon at the surface to generate a modified zeolitic material with a reduced surface silicon content. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein providing a zeolitic material comprises providing an aluminosilicate zeolite, a metal-substituted aluminosilicate zeolite, a silicoaluminophosphate (SAPO), a metal-substituted silicoaluminumphosphate (MeAPSO), or a combination thereof. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein providing a zeolitic material comprises providing a metal-substituted silicoaluminumphosphate (MeAPSO) comprising one or more metals from groups 2 through 13 of the periodic table of elements. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein providing a zeolitic material comprises providing a metal-substituted silicoaluminumphosphate (MeAPSO) comprising magnesium (Mg), calcium (Ca), scandium (Sc), titanium (Ti), vanadium (V), chromium (Cr), manganese (Mn), iron (Fe), cobalt (Co), nickel (Ni), copper (Cu), zinc (Zn), gallium (Ga), or a combination thereof. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, contacting the surface of the zeolitic material with a modifying solution comprises contacting the surface of the zeolitic material with one or more of methylamine, dimethylamine, trimethylamine, ethylamine, diethylamine, triethylamine, phenylamine, and diphenyl amine. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein contacting the surface of the zeolitic material with a modifying solution comprises contacting the surface of the zeolitic material with an alcoholamine with one, two, or three alcohol functionalities, a C1 to C4 chain length on an alcohol substituent, or both. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein

contacting the surface of the zeolitic material with a modifying solution comprises contacting the surface of the zeolitic material with a diethanolamine, an amino acid, or a combination thereof. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein

5 contacting the surface of the zeolitic material with a modifying solution includes contacting the surface of the zeolitic material with synthetic mother-liquor solutions containing an alkyl amine, alcoholamine, amino acid, or combinations of thereof, and synthetic by-products left in the mother-liquor following crystallization of a zeolitic material. An embodiment of the invention is one, any or all of prior embodiments in this
10 paragraph up through the first embodiment in this paragraph, wherein providing a zeolitic material comprises providing a SAPO-34 material and wherein the method produces a modified SAPO-34 material with a bulk silicon content of 0.4 wt.% and 2.7 wt.% Si. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein the silicon-containing zeolitic
15 material is a SAPO-18 material and the method produces a modified SAPO-18 material with a bulk silicon content of 0.3 wt.% and 2.7 wt.% Si. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein reducing the surface silicon content of the zeolitic material comprises reducing the silicon(aluminum + phosphorous) ratio at the surface of the
20 silicon-containing zeolitic material. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph, wherein contacting the surface of the zeolitic material with the modifying solution additionally increases the % porosity, decreases the average crystal or particle size, or both, to generate a modified zeolitic material with a reduced surface silicon content and
25 elevated % porosity, decreased crystal size, or both.

[0056] A second embodiment of the invention is a composition of matter comprising a zeolitic material having a pore structure comprising micropores, wherein the zeolitic material has a % porosity as measured by mercury porosimetry of 65% to 80%; and wherein the zeolitic material comprises silicon at a first concentration within a depth
30 of 2 nm from a surface and a second concentration at a depth of 40 nm or more from the surface; the first concentration being 0.9 to 1.6 times the second concentration. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up

through the second embodiment in this paragraph, wherein the zeolitic material comprises a silico-alumino-phosphate (SAPO) or a metal-substituted silicoaluminumphosphate (MeAPSO). An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the second embodiment in this paragraph, wherein the zeolitic material comprises SAPO-34, metal-substituted SAPO-34, SAPO-18, metal-substituted SAPO-18, or mixtures or intergrowths thereof. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the second embodiment in this paragraph, wherein the zeolitic material comprises a bulk silicon content of 0.01 wt.% to 2.7 wt.% silicon.

[0057] A third embodiment of the invention is a composition of matter comprising a zeolitic material having a pore structure comprising micropores, wherein the zeolitic material has a % porosity as measured by mercury porosimetry of 65% to 80%; and wherein the zeolitic material comprises a crystalline material with an average crystal or particle size as measured by light scattering of 400 nm to 2500 nm. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the third embodiment in this paragraph, wherein the zeolitic material comprises a silico-alumino-phosphate (SAPO) or a metal-substituted silicoaluminumphosphate (MeAPSO). An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the third embodiment in this paragraph, wherein the zeolitic material comprises SAPO-34, metal-substituted SAPO-34, SAPO-18, metal-substituted SAPO-18, or mixtures or intergrowths thereof. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the third embodiment in this paragraph, wherein the zeolitic material comprises a bulk silicon content of 0.01 wt.% to 2.7 wt.% silicon.

[0058] While at least one exemplary embodiment has been presented in the foregoing detailed description of the invention, it should be appreciated that a vast number of variations exist. It should also be appreciated that the exemplary embodiment or exemplary embodiments are only examples, and are not intended to limit the scope, applicability, or configuration of the invention in any way. Rather, the foregoing detailed description will provide those skilled in the art with a convenient road map for implementing an exemplary embodiment of the invention. It being understood that various changes may be made in the function and arrangement of elements described in an

exemplary embodiment without departing from the scope of the invention as set forth in the appended claims.

CLAIMS

1. A method for reducing a surface silicon content of a silicon-containing zeolitic material, the method comprising the steps of:

5 providing a zeolitic material comprising silicon at a surface of the zeolitic material;
and

 contacting the surface of the zeolitic material with a modifying solution comprising one or more of an amine, an alcoholamine, or an amino acid,

 wherein contacting the surface of the zeolitic material with the modifying solution reduces an amount of silicon at the surface to generate a modified zeolitic material with a
10 reduced surface silicon content.

2. The method of claim 1, wherein providing a zeolitic material comprises providing an aluminosilicate zeolite, a metal-substituted aluminosilicate zeolite, a silicoaluminophosphate (SAPO), a metal-substituted silicoaluminumphosphate (MeAPSO), or a combination thereof.

15 3. The method of claims 1 or 2, wherein contacting the surface of the zeolitic material with a modifying solution comprises contacting the surface of the zeolitic material with one or more of methylamine, dimethylamine, trimethylamine, ethylamine, diethylamine, triethylamine, phenylamine, and diphenyl amine.

20 4. The method of claims 1 or 2, wherein contacting the surface of the zeolitic material with a modifying solution comprises contacting the surface of the zeolitic material with an alcoholamine with one, two, or three alcohol functionalities, a C1 to C4 chain length on an alcohol substituent, or both.

25 5. The method of claims 1 or 2, wherein contacting the surface of the zeolitic material with a modifying solution comprises contacting the surface of the zeolitic material with a diethanolamine, an amino acid, or a combination thereof.

6. The method of claims 1 or 2, wherein contacting the surface of the zeolitic material with a modifying solution includes contacting the surface of the zeolitic material with synthetic mother-liquor solutions containing an alkyl amine, alcoholamine, amino

acid, or combinations of thereof, and synthetic by-products left in the mother-liquor following crystallization of a zeolitic material.

5 7. The method of claims 1 or 2, wherein contacting the surface of the zeolitic material with the modifying solution additionally increases the % porosity, decreases the average crystal or particle size, or both, to generate a modified zeolitic material with a reduced surface silicon content and elevated % porosity, decreased crystal size, or both.

10 8. A composition of matter comprising a zeolitic material having a pore structure comprising micropores, wherein the zeolitic material has a % porosity as measured by mercury porosimetry of 65% to 80%; and wherein the zeolitic material comprises silicon at a first concentration within a depth of 2 nm from a surface and a second concentration at a depth of 40 nm or more from the surface; the first concentration being 0.9 to 1.6 times the second concentration.

15 9. The composition of matter of claim 8 wherein the zeolitic material comprises a crystalline material with an average crystal or particle size as measured by light scattering of 400 nm to 2500 nm.

10 10. The composition of claims 8 or 9, wherein the zeolitic material comprises SAPO-34, metal-substituted SAPO-34, SAPO-18, metal-substituted SAPO-18, or mixtures or intergrowths thereof.

1/1

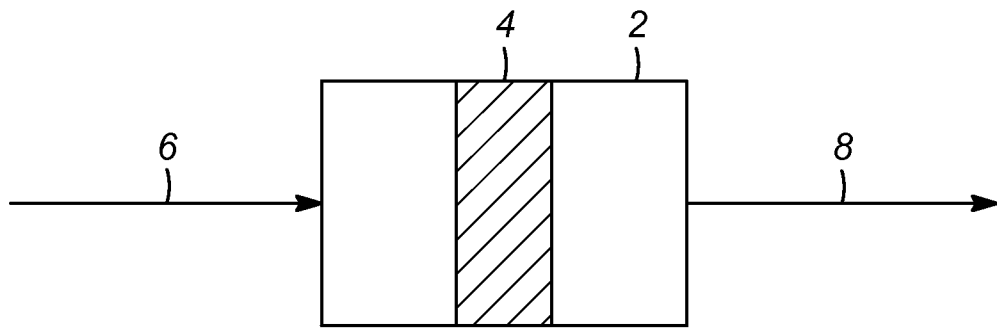


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2015/033705

A. CLASSIFICATION OF SUBJECT MATTER		
B01J 29/00 (2006.01) B01J 35/10 (2006.01) C07C 1/20 (2006.01) C07C 11/04 (2006.01) C07C 11/06 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
B01J 29/00, 35/10, C07C 1/20, 11/04, 11/06		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
E-library, Espacenet, Google, PAJ, PatSearch (RUPTO internal), Yandex		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5945364 A (PHILLIPS PETROLEUM COMPANY) 31.08.1999	1-10
A	US 6914030 B2 (EXXONMOBIL CHEMICAL PATENTS INC.) 05.07.2005	1-10
A	WILSON Stephen et al. The characteristics of SAPO-34 which influence the conversion of methanol to light olefins. Microporous and Mesoporous Materials, 1999, no. 29, pp. 117-126	1-10
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
19 August 2015 (19.08.2015)		08 October 2015 (08.10.2015)
Name and mailing address of the ISA/RU: Federal Institute of Industrial Property, Berezhkovskaya nab., 30-1, Moscow, G-59, GSP-3, Russia, 125993 Facsimile No: (8-495) 531-63-18, (8-499) 243-33-37		Authorized officer L. Grineva Telephone No. (499)240-33-55