


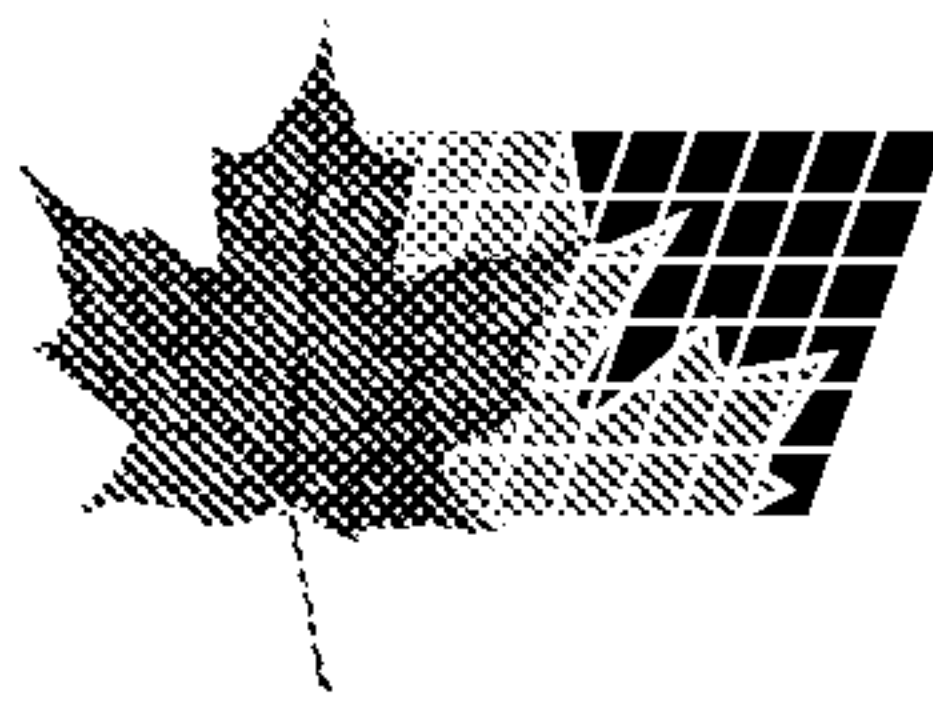

(11) (21) (C) **2,019,657**
(22) 1990/06/22
(43) 1990/12/24
(45) 2001/02/13

(72) Engels, Hans-Wilhelm, DE

(72) Eisele, Ulrich, DE

(72) Obrecht, Werner, DE

(72) Wendling, Peter, DE

(72) Stollfuss, Bernd, DE

(73) BAYER AKTIENGESELLSCHAFT, DE

(51) Int.Cl.⁵ C08L 7/00, C08L 15/02, C08L 11/00, C08L 9/00

(30) 1989/06/24 (P 39 20 745.5) DE

(54) **MELANGES DE CAOUTCHOUC RENFERMANT UN GEL DE
POLYCHLOROPRENE MODIFIE AU SOUFRE**

(54) **RUBBER MIXTURES CONTAINING SULFUR-MODIFIED
POLYCHLOROPRENE GEL**

(57) Rubber mixtures containing so-called "pre-crosslinked" polychloroprene give vulcanizates having an improved combination of low rolling resistance and low abrasion.



2019657

RUBBER MIXTURES CONTAINING SULFUR-MODIFIED POLYCHLOROPRENE
GEL

A B S T R A C T

Rubber mixtures containing so-called "pre-crosslinked" polychloroprene give vulcanizates having an improved combination of low rolling resistance and low abrasion.

Le A 26 354

2019657

RUBBER MIXTURES CONTAINING SULFUR-MODIFIED POLYCHLOROPRENE
GEL

This invention relates to a process for the production of mixtures of rubber containing C=C double bonds and sulfur-modified polychloroprene gel, to the mixtures themselves and to vulcanizates produced therefrom. The vulcanizates show reduced hysteresis losses.

In rubber technology, a hysteresis loss is understood to be the energy loss which is irreversibly converted into heat through dynamic stressing of the elastomer. Hysteresis losses are measured as the $\tan \delta$ which is defined as the ratio of loss modulus to storage modulus; cf. for example also DIN 53 513, DIN 53 535. Any reduction in the $\tan \delta$ in the applicationally important temperature/frequency or amplitude range results for example in reduced heat build-up in the elastomer. Tyre treads of rubber vulcanizate characterized by reduced hysteresis loss are distinguished by reduced rolling resistance and, hence, by lower fuel consumption of the vehicles fitted therewith.

Despite the large number of available rubbers, the attention of experts has been directed above all to natural rubber (NR), cis-polybutadiene (BR) and styrene/butadiene copolymers (SBR) for the production of vehicle tyres. These rubbers or their mixtures are used worldwide in tyre manufacture.

In order to reduce energy costs, the effect of the rubbers used for tyre treads on the rolling resistance of the tyre has been investigated; H.J. Barager, L.R. Mayo, "Compositions of Neoprene for Low Rolling Resistance Treads" in Rubber Division Symposia Vol. I, 122nd meeting of the Rubber Division Amer. Chem. Soc., Chicago/Illinois, 5th-7th October, 1982. According to this Article, tyre treads of vulcanized polychloroprene show lower rolling resistance than conventional tyre treads, but inadequate

abrasion resistance. Although abrasion resistance is improved by blending the pure polychloroprene mixtures with NR, SBR or BR, the level reached still does not correspond to present-day tyre treads. In addition, a considerable proportion of the
5 hysteresis gains obtainable by pure CR elastomers is lost in the blends.

Accordingly, the problem addressed by the present invention was to provide rubbers which could be processed to vulcanizates having an improved combination of

- 10 1. low rolling resistance - expressed as the lowest possible hysteresis loss ($\tan \delta$) - and
2. low abrasion.

It has now surprisingly been found that rubber mixtures containing so-called "pre-crosslinked" polychloroprene
15 satisfy these requirements.

Thus, one aspect of the invention provides mixtures of A) polychloroprene and B) rubber containing C=C double bonds, selected from the group consisting of ethylene/propylene/diene terpolymers, butyl rubber, nitrile
20 rubber, natural rubber, polyisoprene, polybutadiene and styrene/butadiene copolymers (SBR) or a mixture thereof, wherein the quantity of polychloroprene A, based on the sum of components A + B, is from 1 to 40% by weight, characterized in that, again based on the sum of components A + B, 1 to 30% by
25 weight of the polychloroprene is sulfur-modified and crosslinked.

A preferred quantity of polychloroprene A, based on the sum of components A and B, is from 3 to 30% by weight, more preferably 5 to 20% by weight.

Preferably the amount of polychloroprene that is sulfur modified and crosslinked is 3 to 15% by weight, more preferably 5 to 12% by weight, based on the sum of components A and B.

- 5 A further aspect of the invention provides a vulcanizate produced from the above mixture in the form of a tire tread.

 The discrepancy between the quantities of polychloroprene in the preamble and in the characterizing part
10 of the above definition takes into account the fact that the polychloroprene does not have to be entirely present as gel. In the present context, the term "gel" means the percentage of the insoluble component as determined by extraction with toluene: 150 mg polychloroprene are left standing in 20 ml
15 toluene for 16 hours and then shaken for 2 hours. The insoluble component is centrifuged off, dried at 70°C and

weighed.

The swelling index (Q_i) of the gel is between 5 and 90 and preferably between 10 and 60 and is calculated from the content of toluene (m_t) remaining in the gel (after centrifugation at 500,000 m/sec²) and the dry weight of the gel (m_{gel}):

$$Q_i = \frac{m_t}{m_{gel}}$$

Suitable polychloroprenes A are chloroprene polymers which, in addition to polymerized 2-chloroprene units, may contain up to 30% by weight and preferably up to 20% by weight, based on chloroprene polymer, of copolymerized units of other ethylenically unsaturated monomers, i.e. polychloroprenes of the type described, for example, in "Methoden der Organischen Chemie" (Houben-Weyl), Vol. E20/2, 842-859, Georg Thieme Verlag, Stuttgart - New York, 1987.

They generally have Mooney viscosities (according to DIN 53 523) in the range from 5 to 140 and preferably in the range from 10 to 120 (ML 1+4)/100°C and glass transition temperatures below 0°C and preferably below -25°C.

The quantity of elemental sulfur used for the production of sulfur-modified polychloroprene is from 0.05 to 2.5% by weight and preferably from 0.1 to 1% by weight, based on the monomers used.

Preferred ethylenically unsaturated "other monomers" copolymerizable with chloroprene include compounds containing 3 to 12 carbon atoms and 1 or 2 copolymerizable C=C double bonds per molecule. Examples of preferred "other monomers" are styrene, 2,3-dichlorobutadiene, 1-chlorobutadiene, butadiene, isoprene, acrylic acid, methacrylic acid, acrylonitrile and methacrylonitrile. The most important comonomers are 2,3-dichlorobutadiene and 1-chlorobutadiene.

Particularly preferred polychloroprenes A are free

from copolymerized units of "other" ethylenically unsaturated monomers.

The polychloroprenes A may be produced by methods known per se, for example by emulsion polymerization at 0 to 70°C and preferably at 5 to 50°C.

Crosslinked polychloroprenes may be produced by polymerization to high conversions or - in the case of the monomer inflow process - by polymerization at high internal conversions (DE-AS 1 248 91). The polychloroprenes may also be crosslinked by copolymerization of crosslinking multifunctional compounds having a crosslinking effect. Preferred crosslinking multifunctional comonomers are compounds containing at least 2 and preferably 2 or 3 copolymerizable C=C double bonds, such as for example diisopropenyl benzene, divinyl benzene, divinyl ether, divinyl sulfone, diallyl phthalate, triallyl cyanurate, triallyl isocyanurate, 1,2-polybutadiene, N,N'-m-phenylene dimaleic imide, triallyl trimellitate and also the acrylates and methacrylates of polyhydric, preferably dihydric to tetrahydric, C₂₋₁₀ alcohols, such as for example ethylene glycol, propane-1,2-diol, propane-1,3-diol, butane-1,4-diol, hexane-1,6-diol, polyethylene glycol containing 2 to 20 and preferably 2 to 4 oxyethylene units, trimethylol ethane and propane, tetramethylol methane. Preferred crosslinking acrylates and methacrylates include ethylene diacrylate and dimethacrylate, propylene diacrylate and dimethacrylate, isobutylene diacrylate and dimethacrylate, butylene diacrylate and dimethacrylate, hexanediol diacrylate and dimethacrylate, di-, tri- and tetraethylene glycol diacrylate and dimethacrylate, trimethylol ethane triacrylate and trimethacrylate, trimethylol propane triacrylate and trimethacrylate, tetramethylol methane tetraacrylate and tetramethacrylate.

Crosslinked polychloroprenes may also be produced simply by polymerization in the absence of regulators.

Crosslinked polychloroprenes are known, for example, from DE-AS 12 29 716, 12 47 666, 17 20 107, US-PS 3,147, 318, 3,714,296, 3,849,519 and EP-A 222 288.

5 According to the invention, the gel component of the polychloroprene A must be sulfur-modified whereas, for the toluene-soluble component of the polychloroprene A, this is permitted, but not necessary. Accordingly, the polychloroprene A may also consist of a mixture of sulfur-modified polychloroprene gel and of sulfur-free toluene-soluble
10 polychloroprene. Sulfur-modified polychloroprenes are known, for example, from DE-OS 1 911 439, 2 018 736, 2 755 074, 3 246 748, DE-PS 2 645 920, EP-A 21 212, 200 857, FR-PS 1 457 004 AND US-PS 2,264,713, 3,378,538, 3,397,173 and 3,507,825. Sulfur-modified polychloroprenes containing
15 xanthogenate and/or dithiocarbamate functions are preferred.

Preferred rubbers B contain C=C double bonds corresponding to iodine values of at least 2 and preferably from 5 to 470. The iodine values are generally determined by
20 addition of iodine chloride in glacial acetic acid in accordance with DIN 53 241, Part 1 (Wijs' method). The iodine value defines the amount of iodine in grams which is chemically bound by 100 g substance.

The rubbers B include inter alia EPDM, butyl rubber,
25 nitrile rubber, hydrogenated nitrile rubber, natural rubber, polyisoprene, polybutadiene and styrene/butadiene copolymers (SBR) and also mixtures thereof.

The rubbers B generally have Mooney viscosities (DIN 53 523) of from 10 to 150 and preferably from 25 to 80 (ML
30 1+4)/100°C.

The abbreviation EPDM stands for ethylene/propylene/diene terpolymers. EPDMs include rubbers in which the ratio by weight of ethylene to propylene groups is from 40:60 to 65:35 and which may contain 1 to 20 C=C double
35 bonds/1,000 carbon atoms. Suitable diene monomers in the

EPDM are, for example, conjugated dienes, for example isoprene and 1,3-butadiene, and unconjugated dienes containing 5 to 25 carbon atoms, for example 1,4-pentadiene, 1,4-hexadiene, 1,5-hexadiene, 2,5-dimethyl-1,5-hexadiene and 1,4-octadiene; cyclic dienes, for example cyclopentadiene, cyclohexadiene, cyclooctadiene and dicyclopentadiene; alkylidene and alkenyl norbornenes, for example 5-ethylidene-2-norbornene, 5-butyldiene-2-norbornene, 2-methallyl-5-norbornene, 2-isopropenyl-5-norbornene and tri-cyclodienes.

The unconjugated dienes 1,5-hexadiene, ethylidene norbornene and dicyclopentadiene are preferred. The diene content in the EPDM is preferably from 0.5 to 10% by weight, based on EPDM.

EPDM rubbers of the type in question are described, for example, in DE-OS 2 808 709.

The expression "butyl rubber" in the context of the invention encompasses isobutene copolymers of 95 to 99.5% by weight and preferably 97.5 to 99.5% by weight isobutene and 0.5 to 5% by weight and preferably 0.5 to 2.5% by weight copolymerizable diene, such as for example butadiene, dimethyl butadiene, 1,3-pentadiene, more especially isoprene. On an industrial scale, butyl rubber is produced almost exclusively as isobutene/isoprene copolymer by cationic solution polymerization at low temperatures; cf. for example Kirk-Othmer, Encyclopedia of Chemical Technology, 2nd Ed., Vol. 7, page 688, Interscience Publ., New York/London/Sydney 1965 and Winnacker-Küchler, Chemische Technologie, 4th Ed., Vol. 6, pages 550-555, Carl Hanser Verlag, München-Wien 1962.

The expression "nitrile rubber" stands for butadiene/acrylonitrile copolymers containing 5 to 60% by weight and preferably 10 to 50% by weight copolymerized acrylonitrile. "Hydrogenated" in this context means that 90 to 98.5% and preferably 95 to 98% of the hydrogenatable C=C double bonds

are hydrogenated whereas the C=N triple bonds of the nitrile groups are not hydrogenated. The hydrogenation of nitrile rubber is known; US-PS 3,700,637, DE-OS 25 39 132, 30 46 008, 30 46 251, 32 27 650, 33 29 974, EP-A 111 412, FR-PS 2 540 503.

Preferred styrene/butadiene copolymers are those containing 18 to 60% by weight and preferably 20 to 50% by weight copolymerized styrene. Solution and emulsion polymers are particularly preferred.

Fillers of any type may of course be added to the rubber mixtures according to the invention. Preferred fillers are carbon blacks. Preferred carbon blacks have surfaces of 35 to 200 m²/g (as determined by the CTAB method). Particularly preferred carbon blacks are SAF, HAF, FEF, ISAF and SRF carbon blacks and mixtures thereof. Mixtures of carbon blacks with silicas (with and without filler activators) and silicas which have particle sizes and surfaces comparable with the carbon blacks are also eminently suitable as fillers. The filler content may vary within wide limits, but is often between 30 and 80 parts by weight filler per 100 parts by weight rubber (A+B).

The mixtures according to the invention may be produced in various ways. Thus, it is of course possible to mix the solid individual components. Units suitable for this purpose are, for example, mixing rolls and internal mixers. Mixing is preferably carried out by combining latices of the individual rubbers. The mixtures according to the invention may be isolated in the usual way by concentration by evaporation, precipitation or low-temperature coagulation (cf. US-PS 2,187,146). The mixtures according to the invention may be directly obtained as rubber/filler formulations by incorporation of fillers in the latex mixtures and subsequent working up. Accordingly, the present invention also relates to a process for the production of the described mixtures by combining the components.

To obtain desired crude mixture or vulcanizate properties, the usual processing aids, plasticizers, antidegradants, factices and resins may be added to the mixtures according to the invention.

5 Suitable crosslinking systems are any of the systems known in rubber technology, such as sulfur crosslinking, peroxide crosslinking, urethane crosslinking, metal oxide crosslinking, resin crosslinking and combinations thereof. Preferred crosslinking systems are dependent on the rubbers
10 B used in the mixtures according to the invention, sulfur crosslinking systems being particularly preferred.

The present invention also relates to the vulcanizates produced from the described mixtures.

15 Examples

a) Production of the polychloroprene gels I to VI

Polymerization is carried out in a 250 liter stirred reactor in accordance with the following basic formulation (quantities in parts by weight):

20	Monomers	100
	Deionized water (total quantity)	125
	Na salt of disproportionated abietic acid	5.3
	Na salt of the condensation product of naphthalene sulfonic acid and formaldehyde	0.6
25	KOH	0.5
	K ₂ S ₂ O ₈	0.11
	Na salt of anthraquinone sulfonic acid	0.06
30	Sulfur	see Table 1
	Na dibutyl dithiocarbamate (DBDTC)	
	Tetraethyl thiuram disulfide (TETD)	

In a modification of the above formulation, 3.5 parts by weight of the Na salt of disproportionated abietic acid
35 were used for polychloroprene gel II.

The aqueous phase consisting of deionized water, the Na salt of disproportionated abietic acid, the Na salt of

methylene-bridged naphthalene sulfonic acid, the Na salt of anthraquinone sulfonic acid and KOH was introduced into the reactor and, after purging with nitrogen, heated to the temperature shown in Table 1.

5 The nitrogen-purged monomers were then added. The crosslinking agent, ethylene glycol dimethacrylate, was dissolved in the monomer. After the temperature shown in the Table had been adjusted, the sulfur was added in the form of a 50% by weight aqueous dispersion and the DBDTC in
10 the form of a 30% by weight aqueous solution. Polymerization was initiated with a small quantity of a nitrogen-purged, dilute aqueous $K_2S_2O_8$ solution and was maintained by addition of this aqueous nitrogen-purged persulfate solution.

15 The conversion was followed by gravimetry. After the desired conversion had been reached, the polymerization reaction was stopped with 0.03 part by weight, based on latex, of an aqueous 2.5% by weight solution of diethyl hydroxylamine and the quantity of tetraethyl thiuram disulfide (TETD) shown in the Tables subsequently was added to
20 the latex. The TETD was used in the form of a 25% by weight aqueous emulsion of a toluene solution.

The latex was degassed to approx. 500 ppm residual chloroprene (based on latex).

25

b) Production of polychloroprene gel VII

Polymerization was carried out in a 20 liter stirred reactor in accordance with the following basic formulation (quantities in parts by weight):

30	Chloroprene	97
	Ethylene glycol dimethacrylate	3.0
	Deionized water	150
	Na salt of disproportionated abiestic acid	3.85
35	Na salt of the condensation product of naphthalene sulfonic acid and formaldehyde	0.6

	NaOH	0.3
	Sodium pyrophosphate	0.5
	Triisopropanolamine	0.5
	Sulfur	0.5
5	K ₂ S ₂ O ₈	0.1
	Na salt of anthraquinone sulfonic acid	0.02
	Tetraethyl thiuram disulfide (TETD)	0.7
	Na dibutyl dithiocarbamate (DBDTC)	0.42

10 The aqueous phase consisting of deionized water, the Na salt of disproportionated abietic acid, the Na salt of the condensation product of naphthalene sulfonic acid and formaldehyde, sodium pyrophosphate and triisopropanolamine and the monomer phase consisting of chloroprene and ethylene glycol dimethacrylate and also sulfur (in the form of
15 a 50% aqueous dispersion) were introduced into the reactor and, after purging with nitrogen, heated with stirring to 50°C.

Polymerization was initiated by addition of a small
20 quantity of an activator solution consisting of 0.1 part by weight K₂S₂O₈ and 0.02 part by weight of the Na salt of anthraquinone sulfonic acid. During the polymerization reaction, the activator solution was added at such a rate that the desired temperature of 50°C was not exceeded. The conversion was followed by gravimetry. The polymerization
25 reaction was stopped at a conversion of 79% by addition of 0.1 part by weight phenothiazine and 0.7 part by weight TETD (dissolved in monomers) and the excess monomer was removed to a residual content of approximately 500 ppm (based on latex) by stripping with steam under reduced
30 pressure. 0.42 Part by weight DBDTC in the form of a 30% aqueous solution was added to the degassed latex, followed by peptization for 3 hours at 40°C.

Table 1: Production of polychloroprene gels (CR gels) I to VII

Used in Examples	CR gel	Sulfur [parts by weight]	EGDM [parts by weight]	DCB	Temp. [°C]	DBDTC [parts by weight]	TETD [weight]	Conver- sion [%]	Gel content [%] in toluene	Swelling index
1-9	I	0.5	5	0	30	1.0	3.0	83	85.6	10
10	II	0.5	6.5	6	30	1.0	3.0	80	86.1	11
11	III	0.5	1	0	30	1.0	3.0	82	24.7	60
12	IV	0.5	10	0	30	1.0	3.0	80	90.6	10
13	V	0.5	5	0	45	1.0	3.0	80	82.6	12
14	VI	0.3	5	0	30	2.0	3.5	78	89.2	11
15	VII	0.5	3	0	50	0.42	0.7	79	74.8	15

2019657

EGDM = ethylene glycol dimethacrylate; DCB = 2,3-dichlorobutadiene; DBDTC = Na dibutyl dithiocarbamate
TETD = tetraethyl thiuram disulfide

Polychloroprene gel VIII

is a sulfur-free polychloroprene produced by the process described in DE-OS 3 120 992 (conversion 80%).

5 Production of the rubber mixtures according to the invention

Components used:

- | | | |
|----|--|---|
| 10 | ① Buna SL 750,

① Buna EM 1712,

① Buna EM 1721,

① Buna EM 2116,

① Buna CB 22,

① Buna CB 30,

① Baypren 610,

SMR 5,* | a product of Hüls AG, Marl; solution SBR containing 18% by weight copolymerized styrene, oil-extended (37.5% by weight oil)

a product of Hüls AG, Marl; emulsion SBR containing 23.5% by weight copolymerized styrene, oil-extended (37.5% by weight oil)

a product of Hüls AG, Marl; emulsion SBR containing 40% by weight copolymerized styrene, oil-extended (37.5% by weight oil)

a product of Hüls AG, Marl; emulsion SBR containing 23.5% by weight copolymerized styrene, latex containing 24% by weight solids

a product of Bayer AG; neodymium polybutadiene having a cis-1,4-content of 98%

a product of Bayer AG; titanium polybutadiene having a cis-1,4-content of 93%, oil-extended (37.5% by weight oil)

a product of Bayer AG, gel-free polychloroprene, sulfur-modified

a product of Standard Malaysian Rubber Producers, natural rubber having a Defo value of 700 |
|----|--|---|

35

*Trade-mark

5	Carbon blacks	N 220 N 234 N 339 Corax 3	] products of Degussa, Hanau
	Ingralen 450,*		
	ZnO-RS,		
10	® Vulkanox 4010 NA,		
	® Vulkanox HS,		
15	® Vulkacit NZ,		
	® Antilux 111,		
20			

Abbreviations used and their meanings:

25	Abbreviation	Meaning	Method of determination
30	S	Tensile strength (MPa)	DIN 53 504
	EB	Elongation at break (%)	DIN 53 504
	M 100	Modulus at 100% elongation (MPa)	DIN 53 504
	M 300	Modulus at 300% elongation (MPa)	DIN 53 504
35	H 23	Shore A hardness at 23°C (%)	DIN 53 505
	H 70	Shore A hardness at 70°C (%)	DIN 53 505
	E 23	Elasticity at 23°C	DIN 53 512
	E 70	Elasticity at 70°C	DIN 53 512
40	tan δ (2%)	Tangent δ at room temperature, 2% amplitude	IMAS Energy Resolver

*Trade-mark

Abbreviations used and their meanings (continued):

	Abbreviation	Meaning	Method of determination
5			
	$\tan \delta$ (40)	Tangent δ at 40°C	Roelig
10	$\tan \delta$ (100)	Tangent δ at 100°C	DIN 53 513
	E' (25)	Storage modulus (25°C) 2% amplitude (MPa)	IMAS Energy
15	E'' (25)	Loss modulus (25°C) 2% amplitude (MPa)	Resolver
20	SE (60)	Storage modulus (60°C) (MPa)	Roelig
	VE (60)	Storage modulus (60°C) (MPa)	DIN 53 513
25	LC	Loss compliance	
	STR	Tear propagation resistance (N)	Internal method (4 mm ring)
	HBU 1	Heat build-up after 10 mins (°C)	Compression flexometer
30	HBU 2	Heat build-up after 25 mins (°C)	DIN 53 533 Part 3
	ABR 4	Abrasion on emery paper of 40 thickness	DIN 53 516
35	ABR 6	Abrasion on emery paper of 60 thickness	DIN 53 516

40

Example 1 (Mixing of the latices)

45

Polychloroprene gel I latex was mixed with Buna EM 2116 latex in a ratio by weight of 10:90 (based on rubber solids). 2% by weight aqueous CaCl_2 solution (5 g CaCl_2 per 100 g solids) were added for precipitation. The precipitated product was separated off and dried in vacuo at 60°C.

Example 2

As Example 1; ratio by weight CR/SBR 20:80 (based on rubber solids).

Examples 3 to 15

(Mixing of the solid rubbers)

The polychloroprene gel was precipitated from the corresponding latex by addition of 2% by weight aqueous CaCl_2 solution (5 g CaCl_2 per 100 g solids) and dried in vacuo at 60°C.

The gels obtained were blended with the diene rubber in a ratio by weight of 10:90 in an internal mixer and then compounded in accordance with the formulation shown below. The sulfur and the accelerator were each added on a roll.

The improvement in the hysteresis properties of the mixtures of Examples 1 and 2 according to the invention is reflected in the vulcanizates produced in accordance with the stated formulation. Reductions in the $\tan \delta$ of 23 to 46%, improvements in tensile strength and increases in moduli were obtained in relation to the comparison vulcanizate C-1, a vulcanizate of an E-SBR precipitated from [®]Buna EM 2116 latex by addition of 5% by weight aqueous CaCl_2 solution.

Example	1	2	C-1
Rubber	100	100	100
Carbon black Corax 3	60	60	60
Stearic acid	2	2	2
Antilux 111	1.5	1.5	1.5
Vulkanox 4010 NA	2.5	2.5	2.5
Vulkanox HS	1.0	1.0	1.0
ZnO-RS	5.0	5.0	5.0
Sulfur	1.8	1.8	1.8
Vulkacit NZ	1.2	1.2	1.2

Example		1	2	C-1
5	S	29.4	24.1	23.7
	EB	350	200	540
	M 100	4.7	8.2	2.7
	M 300	25.5	-	12.0
10	tan δ (40)	0.118	0.105	0.154
	tan δ (60)	0.108	0.092	0.150
	tan δ (100)	0.079	0.066	0.122
15	E' (25)	17.07	18.29	14.63
	E'' (25)	4.78	4.87	4.10

Examples 3 and 4 show the properties of vulcanizates of mixtures of solution SBR (in this case, particularly Buna SL 750) and CR gel I.

20 The improvements in elasticity, heat build-up, tan δ and loss compliance are obtained with improvements in tensile strength and constant abrasion behavior. By varying the quantity of sulfur or filling level, it was possible to obtain comparable storage moduli with the improved hysteresis properties intact. According to the correlation between tyre properties, for example skid and rolling resistance, and viscoelastic properties (E, HBU, tan δ , etc.) (for example Y. Saito, Kautschuk & Gummi, Kunstst. 1986, 39, 30), reduced rolling resistance will be obtained where the vulcanizates of Examples 3 and 4 are used as tread compound in tyres.

2019657

Example		3	4	C-2
5	Buna SL 750	123.8	123.8	137.5
	CR gel I	10	10	-
	Carbon black N 220	65	70	70
	Stearic acid	1.0	1.0	1.0
	ZnO-RS	3.0	3.0	3.0
	Vulkanox 4010 NA	1.0	1.0	1.0
	Vulkacit NZ	1.2	1.2	1.2
10	Sulfur	1.5	1.5	1.8
15	S	15.1	15.0	13.9
	EB	385	385	447
	M 100	2.3	2.4	1.8
	M 300	12.1	12.5	9.1
	H	64	66	62
	E 23	38	36	38
	E 70	54	51	48
20	HBU-2	27.4	30	37
	tan δ (60)	0.140	0.155	0.166
	SE 60	6.89	7.26	6.75
	VE 60	0.97	1.12	1.13
	LC	0.020	0.021	0.024
	ABR 4	110	105	110
25				

5 Example 5 shows the properties of the mixture of Buna SL 750 and CR gel I in a formulation containing the carbon black N 339. The stiffening effect of the CR gel may be compensated by plasticizer oil (in this case, 6 parts Ingralen 450) and reducing the quantity of sulfur, the advantages in regard to elasticity, heat build-up, $\tan \delta$ and loss compliance remaining unaffected.

Example	5	C-3
10		
Buna SL 750	123.8	137.5
CR gel I	10	-
Carbon black N 339	65	70
ZnO-RS	3.0	3.0
15 Vulkanox 4010 NA	1.0	1.0
Stearic acid	1.0	1.0
Ingralin 450*	6	-
Vulkacit NZ	1.2	1.2
Sulfur	1.5	1.8
20 S	16.3	16.8
EB	405	425
M 100	2.2	2.1
M 300	12.1	11.7
H 23	62	64
25 H 70	60	61
E 23	41	41
E 70	55	50
HBU-2	23.0	34.3
$\tan \delta$ (60)	0.136	0.157
30 SE 60	6.77	7.13
VE 60	0.92	1.12
LC	0.020	0.022

*Trade-mark

Example 6 shows that only sulfur-modified CR gels lead to an improvement in hysteresis. Although a stiffening effect is observed in Comparison Example C-4 by the addition of sulfur-free polychloroprene gel VIII, there is no reduction in $\tan \delta$.

Example		6	C-4	C-5
10	Buna SL 750	123.8	123.8	137.5
	CR gel I	10 0	-	-
	Carbon black N 220	70	70	70
	ZnO RS	3.0	3.0	3.0
	Vulkanox 4010 NA	1.0	1.0	1.0
15	Stearic acid	1.0	1.0	1.0
	CR gel VIII	-	10	-
	Vulkacit NZ	1.2	1.2	1.2
	Sulfur	1.8	1.8	1.8
	S	22.4	22.7	22.5
20	EB	365	475	580
	M 100	3.1	2.3	1.6
	M 300	18.1	12.4	9.0
	H 23	62	62	64
	$\tan \delta$ (30)	0.092	0.116	0.111
25	$\tan \delta$ (70)	0.080	0.108	0.107
	$\tan \delta$ (110)	0.067	0.088	0.086

Example 7 shows the properties of a vulcanizate of a mixture of emulsion SBR (in this case Buna EM 1721) and CR gel I. The improved hysteresis properties are reflected in the increased elasticity at 70°C and the reduced heat build-up.

Example		7	C-6
10	Buna EM 1721	123.8	137.5
	CR Gel I	10	-
	Stearic acid	1.0	1.0
	ZnO-RS	3.0	3.0
	Carbon black N 234	80	80
15	Ingralen 450 [*]	7.0	7.0
	Vulkanox 4010 NA	1.0	1.0
	Vulkacit NZ	1.5	1.5
	Sulfur	1.5	1.5
	S	16.7	19.5
20	EB	350	530
	M 100	3.3	2.0
	M 300	15.7	10.4
	H 70	64	56
	E 23	16	16
25	E 70	39	35
	STR	265	265
	HBU-2	33	36
	ABR 4	215	222

*Trade-mark

Example 8 shows the vulcanizate properties of a mixture of Buna EM 1712 and CR gel I. The CR-gel-free reference C-7 is used for comparison. In addition, commercially available, gel-free sulfur-modified polychloroprene was used in C-8. This mixture showed hardly any improvement in elasticity; its abrasion behavior was distinctly poorer than that of mixture 8 according to the invention.

Example	8	C-7	C-8
Buna EM 1721	123.8	137.5	123.8
CR	10 gel I	-	10 Bay-pren 610*
Stearic acid	1.0	1.0	1.0
ZnO-RS	3.0	3.0	3.0
N 220	70.0	70.0	70.0
Vulkanox 4010 NA	1.0	1.0	1.0
Vulkacit NZ	1.2	1.2	1.2
Sulfur	1.8	1.8	1.8
S	15.9	18.2	17.3
EB	310	510	410
M 100	2.9	1.8	2.3
M 300	-	9.4	12.7
H 23	67	62	66
H 70	64	57	60
E 23	30	31	30
E 70	52	45	47
ABR 4	109	126	136
tan δ	0.158	0.168	0.172
HBU-2	25	30	28

*Trade-mark

Example 8.1 shows the result of adding CR gel I to an NR/BR blend (Comparison Example C-8.1) A distinct improvement in the hysteresis properties is obtained for the same abrasion resistance.

5

Example		8.1	C-8.1
10	NR	80	80
	Buna CB 22	20	20
	CR gel I	10	-
	Stearic acid	2	2
	ZnO RS	3	3
	N 110	44	44
	Vulkanox 4010 NA	1.5	1.5
	Vulkanox HS	1.5	1.5
	Vulkacit MOZ	1.5	1.5
	Sulfur	1.2	1.2
20	S	22.5	23.5
	EB	465	520
	M 100	2.2	2.2
	M 300	12.5	11.6
	H 23	64	65
25	H 70	62	60
	E 23	55	47
	E 70	66	58
	ABR 4	106	110
	HBU 2	18	26
30	tan δ (60)	0.087	0.113
	SE 60	7.05	7.01
	VE 60	0.61	0.77
	LC 60	0.012	0.018

Example 9 shows the properties of a vulcanizate based on a mixture consisting of natural rubber, E-SBR, polybutadiene and CR gel I. Compared with the comparison mixture, reductions in the $\tan \delta$ and loss compliance are obtained for improved abrasion behavior.

Example		9	C-9
10	SMR-5*, Defo 700	25	25
	Buna EM 1721	68.8	68.8
	Buna CB 30	20.6	20.6
	CR gel I	10	-
15	Buna CB 22	-	10
	Stearic acid	1.0	1.0
	ZnO-RS	3.0	3.0
	Carbon black N 220	65	70
20	Vulkanox 4010 NA	1.0	1.0
	Vulkacit NZ	0.9	0.9
	Sulfur	1.2	1.3
	S	19.4	19.4
25	EB	470	725
	M 100	2.5	1.4
	M 300	12.2	6.0
	$\tan \delta$ (60)	0.192	0.207
25	SE (60)	7.52	5.43
	VE (60)	1.45	1.13
	LC (60)	0.031	0.037
	ABR-6	86	107

*Trade-mark

Examples 10 to 15 show that the CR gels can be widely varied (see Table 1) and that the advantageous vulcanizate properties in regard to elasticity, heat build-up, tan δ and loss compliance are confirmed.

Example	10	11	12	13	14	15	C-10
Buna SL 750	123.8	123.8	123.8	123.8	123.8	123.8	137.5
CR-gel II	10	-	-	-	-	-	-
CR-gel III	-	10	-	-	-	-	-
CR-gel IV	-	-	10	-	-	-	-
CR-gel V	-	-	-	10	-	-	-
CR-gel VI	-	-	-	-	10	-	-
CR-gel VII	-	-	-	-	-	10	-
Stearic acid	1.0	1.0	1.0	1.0	1.0	1.0	1.0
ZnO-RS	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Carbon black N 220	65	65	65	65	65	65	75
Vulkanox 4010 NA	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Vulkacit NZ	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Sulfur	1.5	1.5	1.5	1.5	1.5	1.5	1.8

2019657

Example	10	11	12	13	14	15	C-10
S	17.3	17.1	16.3	17.5	17.0	17.4	18.3
EB	415	385	390	410	420	400	481
M 100	2.3	2.3	2.3	2.2	2.3	2.3	2.0
M 300	12.7	13.4	12.9	12.5	12.7	13.0	10.7
H 23	65	65	65	64	65	64	64
H 70	62	62	62	61	62	62	60
E 23	40	38	40	40	39	40	36
E 70	52	52	54	54	53	54	48
HBU-2	25.7	25.4	25.5	25.9	25.8	25.4	43.2
tan 60	0.146	0.149	0.144	0.143	0.145	0.143	0.176
SE 60	7.13	7.23	7.02	7.06	7.20	7.06	7.13
VE 60	1.04	1.08	1.02	1.02	1.04	1.01	1.26
LC 60	0.020	0.020	0.020	0.020	0.020	0.020	0.024

CLAIMS:

1. Mixtures of

A) polychloroprene and

5 B) a rubber containing C=C double bonds, selected
from the group consisting of
ethylene/propylene/diene terpolymer, butyl rubber,
nitrile rubber, natural rubber, polyisoprene,
polybutadiene and styrene/butadiene copolymers
10 (SBR) or a mixture thereof, wherein the quantity
of polychloroprene A, based on the sum of
components A + B, is from 1 to 40% by weight,
characterized in that, again based on the sum of
components A + B, 1 to 30% by weight of the
15 polychloroprene is sulfur-modified and
crosslinked.

2. Mixtures as claimed in claim 1, in which the quantity
of polychloroprene A is from 3 to 30% by weight.

3. Mixtures as claimed in claim 1 or 2, in which the
quantity of polychloroprene A is from 5 to 20% by weight.

20 4. Mixtures as claimed in claim 1, 2 or 3, in which 3 to
15% by weight of the polychloroprene is sulfur-modified and
crosslinked.

5. Mixtures as claimed in any one of claims 1 to 4, in
which 5 to 12% by weight of the polychloroprene is sulfur-
25 modified and crosslinked.

6. Mixtures as claimed in any one of claims 1 to 5, in
which the rubber B is selected from the group consisting of
natural rubber, polyisoprene, polybutadiene, SBR.

7. A process for the production of the mixtures claimed in any one of claims 1 to 6 by combining the components in solid form.
8. A process for the production of the mixtures claimed in any one of claims 1 to 6 by combining the components in the form of their latices and working up the latices together.
9. A process according to claim 8 wherein the mixture is subject to vulcanization.
10. A vulcanizate produced from the mixtures claimed in any one of claims 1 to 6.
11. A vulcanizate according to claim 10 in the form of a tire tread.

FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS