



US011719085B1

(12) **United States Patent**
Yeung et al.

(10) **Patent No.:** **US 11,719,085 B1**
(45) **Date of Patent:** ***Aug. 8, 2023**

(54) **SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **BJ Energy Solutions, LLC**, Houston, TX (US)

1,716,049 A 6/1929 Greve
1,726,633 A 9/1929 Smith
(Continued)

(72) Inventors: **Tony Yeung**, Houston, TX (US);
Ricardo Rodriguez-Ramon, Houston, TX (US);
Joseph Foster, Houston, TX (US)

FOREIGN PATENT DOCUMENTS

AU 9609498 7/1999
AU 737970 9/2001
(Continued)

(73) Assignee: **BJ Energy Solutions, LLC**, The Woodlands, TX (US)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

US 11,555,493 B2, 01/2023, Chang et al. (withdrawn)
(Continued)

This patent is subject to a terminal disclaimer.

Primary Examiner — Christopher S Bobish
(74) *Attorney, Agent, or Firm* — Womble Bond Dickinson (US) LLP

(21) Appl. No.: **18/124,721**

(22) Filed: **Mar. 22, 2023**

(57) **ABSTRACT**

Related U.S. Application Data

(63) Continuation of application No. 18/087,181, filed on Dec. 22, 2022, now Pat. No. 11,661,832, which is a (Continued)


Systems and methods for operating hydraulic fracturing units, each including a hydraulic fracturing pump to pump fracturing fluid into a wellhead and an internal combustion engine to drive the hydraulic fracturing pump, may include receiving signals indicative of operational parameters. The systems and methods also may include determining an amount of required fracturing power sufficient to perform the hydraulic fracturing operation, determining an available power to perform the hydraulic fracturing operation and a difference between the available power and the required power, and controlling operation of the hydraulic fracturing units based at least in part on the power difference. When the power difference is indicative of excess power available, the system and methods may include causing at least one of the hydraulic fracturing units to idle, and when the power difference is indicative of a power deficit, increasing a power output of at least one of the hydraulic fracturing units.

(51) **Int. Cl.**
E21B 43/26 (2006.01)
F04B 23/04 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **E21B 43/2607** (2020.05); **F04B 17/05** (2013.01); **F04B 23/04** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC F04B 23/04; F04B 49/02; F04B 49/022;
F04B 2203/0604; F04B 17/05; F04B 2207/047; E21B 43/2607
See application file for complete search history.

26 Claims, 10 Drawing Sheets

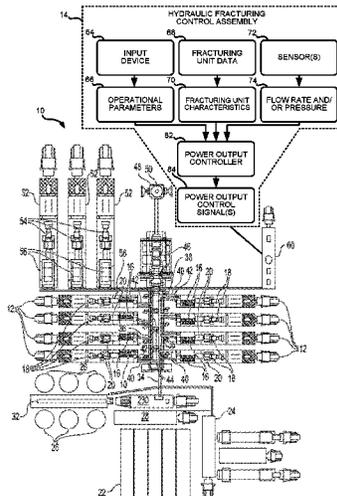

Related U.S. Application Data

continuation of application No. 17/942,382, filed on Sep. 12, 2022, now Pat. No. 11,566,505, which is a continuation of application No. 17/173,320, filed on Feb. 11, 2021, now Pat. No. 11,473,413.

			4,209,079 A	6/1980	Marchal et al.	
			4,209,979 A	7/1980	Woodhouse et al.	
			4,222,229 A	9/1980	Uram	
			4,269,569 A	5/1981	Hoover	
			4,311,395 A	1/1982	Douthitt et al.	
			4,330,237 A *	5/1982	Battah	F02B 63/06 417/42
			4,341,508 A	7/1982	Rambin, Jr.	
(60)	Provisional application No. 62/705,354, filed on Jun. 23, 2020.		4,357,027 A	11/1982	Zeitlow	
			4,383,478 A	5/1983	Jones	
			4,402,504 A	9/1983	Christian	
(51)	Int. Cl.		4,430,047 A	2/1984	Ilg	
	F04B 49/02 (2006.01)		4,442,665 A	4/1984	Fick	
	F04B 17/05 (2006.01)		4,457,325 A	7/1984	Green	
(52)	U.S. Cl.		4,470,771 A	9/1984	Hall et al.	
	CPC	F04B 49/02 (2013.01); F04B 49/022 (2013.01); F04B 2203/0604 (2013.01); F04B 2207/047 (2013.01)	4,483,684 A	11/1984	Black	
			4,505,650 A	3/1985	Hannett et al.	
			4,574,880 A	3/1986	Handke	
			4,584,654 A *	4/1986	Crane	G01L 3/242 702/44

References Cited

U.S. PATENT DOCUMENTS

(56)			4,620,330 A	11/1986	Izzi, Sr.	
			4,672,813 A	6/1987	David	
			4,754,607 A	7/1988	Mackay	
			4,782,244 A	11/1988	Wakimoto	
			4,796,777 A	1/1989	Keller	
			4,869,209 A	9/1989	Young	
			4,913,625 A	4/1990	Gerlowski	
			4,983,259 A	1/1991	Duncan	
			4,990,058 A	2/1991	Eslinger	
			5,032,065 A	7/1991	Yamamuro	
			5,135,361 A *	8/1992	Dion	F04D 15/0072 417/2
			5,167,493 A	12/1992	Kobari	
			5,245,970 A	9/1993	Iwaszkiewicz et al.	
			5,291,842 A	3/1994	Sallstrom et al.	
			5,326,231 A	7/1994	Pandeya	
			5,362,219 A	11/1994	Paul et al.	
			5,511,956 A	4/1996	Hasegawa	
			5,537,813 A	7/1996	Davis et al.	
			5,553,514 A	9/1996	Walkowc	
			5,560,195 A	10/1996	Anderson et al.	
			5,586,444 A *	12/1996	Fung	F25B 49/022 318/610
			5,622,245 A	4/1997	Reik	
			5,626,103 A	5/1997	Haws et al.	
			5,634,777 A	6/1997	Albertin	
			5,651,400 A	7/1997	Corts et al.	
			5,678,460 A	10/1997	Walkowc	
			5,717,172 A	2/1998	Griffin, Jr. et al.	
			5,720,598 A	2/1998	de Chizzelle	
			5,761,084 A	6/1998	Edwards	
			5,811,676 A	9/1998	Spalding et al.	
			5,839,888 A	11/1998	Harrison	
			5,846,062 A	12/1998	Yanagisawa et al.	
			5,875,744 A	3/1999	Vallejos	
			5,983,962 A	11/1999	Gerardot	
			5,992,944 A	11/1999	Hara	
			6,041,856 A	3/2000	Thrasher et al.	
			6,050,080 A	4/2000	Horner	
			6,067,962 A	5/2000	Bartley et al.	
			6,071,188 A	6/2000	O'Neill et al.	
			6,074,170 A *	6/2000	Bert	F04B 13/00 417/415
			6,123,751 A	9/2000	Nelson et al.	
			6,129,335 A	10/2000	Yokogi	
			6,145,318 A	11/2000	Kaplan et al.	
			6,230,481 B1	5/2001	Jahr	
			6,279,309 B1	8/2001	Lawlor, II et al.	
			6,321,860 B1	11/2001	Reddoch	
			6,334,746 B1	1/2002	Nguyen et al.	
			6,401,472 B2	6/2002	Pollrich	
			6,530,224 B1	3/2003	Conchieri	
			6,543,395 B2	4/2003	Green	
			6,655,922 B1	12/2003	Flek	
			6,669,453 B1	12/2003	Breeden	
			6,765,304 B2	7/2004	Baten et al.	
			6,786,051 B2	9/2004	Kristich et al.	
			6,832,900 B2	12/2004	Leu	
			6,851,514 B2	2/2005	Han et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

6,859,740 B2	2/2005	Stephenson et al.	9,011,111 B2	4/2015	Lesko
6,901,735 B2	6/2005	Lohn	9,016,383 B2	4/2015	Shampine et al.
6,962,057 B2	11/2005	Kurokawa et al.	9,032,620 B2	5/2015	Frassinelli et al.
7,007,966 B2	3/2006	Campion	9,057,247 B2	6/2015	Kumar et al.
7,047,747 B2	5/2006	Tanaka	9,097,249 B2	8/2015	Petersen
7,065,953 B1	6/2006	Kopko	9,103,193 B2	8/2015	Coli et al.
7,143,016 B1*	11/2006	Discenzo G05B 13/0265 703/3	9,121,257 B2	9/2015	Coli et al.
7,222,015 B2	5/2007	Davis et al.	9,140,110 B2	9/2015	Coli et al.
7,281,519 B2	10/2007	Schroeder	9,175,810 B2	11/2015	Hains
7,388,303 B2	6/2008	Seiver	9,187,982 B2	11/2015	Dehring et al.
7,404,294 B2	7/2008	Sundin	9,206,667 B2	12/2015	Khvoshchev et al.
7,442,239 B2	10/2008	Armstrong et al.	9,212,643 B2	12/2015	Deliyiski
7,524,173 B2	4/2009	Cummins	9,222,346 B1	12/2015	Walls
7,545,130 B2	6/2009	Latham	9,324,049 B2	4/2016	Thomeer et al.
7,552,903 B2	6/2009	Dunn et al.	9,341,055 B2	5/2016	Weightman et al.
7,563,076 B2	7/2009	Brunet et al.	9,346,662 B2	5/2016	Van Vliet et al.
7,563,413 B2	7/2009	Naets et al.	9,366,114 B2	6/2016	Coli et al.
7,574,325 B2	8/2009	Dykstra	9,376,786 B2	6/2016	Numasawa
7,581,379 B2	9/2009	Yoshida et al.	9,394,829 B2	7/2016	Cabeen et al.
7,594,424 B2	9/2009	Fazekas	9,395,049 B2	7/2016	Vicknair et al.
7,614,239 B2	11/2009	Herzog et al.	9,401,670 B2	7/2016	Minato et al.
7,627,416 B2	12/2009	Batenburg et al.	9,410,410 B2	8/2016	Broussard et al.
7,677,316 B2	3/2010	Butler et al.	9,410,546 B2	8/2016	Jaeger et al.
7,721,521 B2	5/2010	Kunkle et al.	9,429,078 B1	8/2016	Crowe et al.
7,730,711 B2	6/2010	Kunkle et al.	9,435,333 B2	9/2016	McCoy et al.
7,779,961 B2	8/2010	Matte	9,488,169 B2*	11/2016	Cochran F04B 35/002
7,789,452 B2	9/2010	Dempsey et al.	9,493,997 B2	11/2016	Liu et al.
7,836,949 B2	11/2010	Dykstra	9,512,783 B2	12/2016	Veilleux et al.
7,841,394 B2	11/2010	McNeel et al.	9,534,473 B2	1/2017	Morris et al.
7,845,413 B2	12/2010	Shampine et al.	9,546,652 B2	1/2017	Yin
7,861,679 B2	1/2011	Lemke et al.	9,550,501 B2	1/2017	Ledbetter
7,886,702 B2	2/2011	Jerrell et al.	9,556,721 B2	1/2017	Jang et al.
7,900,724 B2	3/2011	Promersberger et al.	9,562,420 B2	2/2017	Morris et al.
7,921,914 B2	4/2011	Bruins et al.	9,570,945 B2	2/2017	Fischer
7,938,151 B2	5/2011	Hockner	9,579,980 B2	2/2017	Cryer et al.
7,955,056 B2*	6/2011	Pettersson G05D 16/2073 700/282	9,587,649 B2	3/2017	Oehring
7,980,357 B2	7/2011	Edwards	9,593,710 B2	3/2017	Laimboeck et al.
8,056,635 B2	11/2011	Shampine et al.	9,611,728 B2	4/2017	Oehring
8,083,504 B2	12/2011	Williams et al.	9,617,808 B2	4/2017	Liu et al.
8,099,942 B2	1/2012	Alexander	9,638,101 B1	5/2017	Crowe et al.
8,186,334 B2	5/2012	Ooyama	9,638,194 B2	5/2017	Wiegman et al.
8,196,555 B2	6/2012	Ikeda et al.	9,650,871 B2	5/2017	Oehring et al.
8,202,354 B2	6/2012	Iijima	9,656,762 B2	5/2017	Kamath et al.
8,316,936 B2	11/2012	Roddy et al.	9,689,316 B1	6/2017	Crom
8,336,631 B2	12/2012	Shampine et al.	9,695,808 B2	7/2017	Giessbach et al.
8,388,317 B2	3/2013	Sung	9,739,130 B2	8/2017	Young
8,414,673 B2	4/2013	Raje et al.	9,764,266 B1	9/2017	Carter
8,469,826 B2	6/2013	Brosowske	9,777,748 B2	10/2017	Lu et al.
8,500,215 B2	8/2013	Gastauer	9,803,467 B2	10/2017	Tang et al.
8,506,267 B2	8/2013	Gambier et al.	9,803,793 B2	10/2017	Davi et al.
8,575,873 B2	11/2013	Peterson et al.	9,809,308 B2	11/2017	Aguilar et al.
8,616,005 B1	12/2013	Cousino, Sr. et al.	9,829,002 B2	11/2017	Crom
8,621,873 B2	1/2014	Robertson et al.	9,840,897 B2	12/2017	Larson
8,641,399 B2	2/2014	Mucibabic	9,840,901 B2	12/2017	Oering et al.
8,656,990 B2	2/2014	Kajaria et al.	9,845,730 B2	12/2017	Betti et al.
8,672,606 B2	3/2014	Glynn et al.	9,850,422 B2	12/2017	Lestz et al.
8,707,853 B1	4/2014	Dille et al.	9,856,131 B1	1/2018	Moffitt
8,708,667 B2	4/2014	Collingborn	9,863,279 B2	1/2018	Laing et al.
8,714,253 B2	5/2014	Sherwood et al.	9,869,305 B1	1/2018	Crowe et al.
8,757,918 B2	6/2014	Ramnarain et al.	9,871,406 B1	1/2018	Churnock et al.
8,763,583 B2	7/2014	Hofbauer et al.	9,879,609 B1	1/2018	Crowe et al.
8,770,329 B2	7/2014	Spitler	RE46,725 E	2/2018	Case et al.
8,784,081 B1	7/2014	Blume	9,893,500 B2	2/2018	Oehring et al.
8,789,601 B2	7/2014	Broussard et al.	9,893,660 B2	2/2018	Peterson et al.
8,794,307 B2	8/2014	Coquilleau et al.	9,897,003 B2	2/2018	Motakef et al.
8,801,394 B2	8/2014	Anderson	9,920,615 B2	3/2018	Zhang et al.
8,851,186 B2	10/2014	Shampine et al.	9,945,365 B2	4/2018	Hernandez et al.
8,851,441 B2	10/2014	Acuna et al.	9,964,052 B2	5/2018	Millican et al.
8,894,356 B2	11/2014	Lafontaine et al.	9,970,278 B2	5/2018	Broussard et al.
8,905,056 B2	12/2014	Kendrick	9,981,840 B2	5/2018	Shock
8,951,019 B2	2/2015	Hains et al.	9,995,102 B2	6/2018	Dillie et al.
8,973,560 B2	3/2015	Krug	9,995,218 B2	6/2018	Oehring et al.
8,997,904 B2	4/2015	Cryer et al.	10,008,880 B2	6/2018	Vicknair et al.
			10,008,912 B2	6/2018	Davey et al.
			10,018,096 B2	7/2018	Wallimann et al.
			10,020,711 B2	7/2018	Oehring et al.
			10,024,123 B2	7/2018	Steffenhagen et al.
			10,029,289 B2	7/2018	Wendorski et al.
			10,030,579 B2	7/2018	Austin et al.

(56)		References Cited					
		U.S. PATENT DOCUMENTS					
10,036,238	B2	7/2018	Oehring	10,907,459	B1	2/2021	Yeung et al.
10,040,541	B2 *	8/2018	Wilson B64C 25/26	10,927,774	B2 *	2/2021	Cai F02D 41/26
10,060,293	B2	8/2018	Del Bono	10,927,802	B2	2/2021	Oehring
10,060,349	B2	8/2018	Alvarez et al.	10,954,770	B1	3/2021	Yeung et al.
10,077,933	B2	9/2018	Nelson et al.	10,954,855	B1	3/2021	Ji et al.
10,082,137	B2	9/2018	Graham et al.	10,961,614	B1	3/2021	Yeung et al.
10,094,366	B2	10/2018	Marica	10,961,908	B1	3/2021	Yeung et al.
10,100,827	B2	10/2018	Devan et al.	10,961,912	B1	3/2021	Yeung et al.
10,107,084	B2	10/2018	Coli et al.	10,961,914	B1	3/2021	Yeung et al.
10,107,085	B2	10/2018	Coli et al.	10,961,993	B1	3/2021	Ji et al.
10,114,061	B2	10/2018	Frampton et al.	10,961,995	B2	3/2021	Mayorca
10,119,381	B2	11/2018	Oehring et al.	10,892,596	B2	4/2021	Yeung et al.
10,125,750	B2	11/2018	Pfaff	10,968,837	B1	4/2021	Yeung et al.
10,134,257	B2	11/2018	Zhang et al.	10,982,523	B1	4/2021	Hill et al.
10,138,098	B2	11/2018	Sorensen et al.	10,989,019	B2	4/2021	Cai et al.
10,151,244	B2	12/2018	Giancotti et al.	10,989,180	B2	4/2021	Yeung et al.
10,161,423	B2	12/2018	Rampen	10,995,564	B2	5/2021	Miller et al.
10,174,599	B2	1/2019	Shampine et al.	11,002,189	B2	5/2021	Yeung et al.
10,184,397	B2	1/2019	Austin et al.	11,008,950	B2	5/2021	Ethier et al.
10,196,258	B2	2/2019	Kalala et al.	11,015,423	B1	5/2021	Yeung et al.
10,221,856	B2	3/2019	Hernandez et al.	11,015,536	B2	5/2021	Yeung et al.
10,227,854	B2	3/2019	Glass	11,015,594	B2	5/2021	Yeung et al.
10,227,855	B2	3/2019	Coli et al.	11,022,526	B1	6/2021	Yeung et al.
10,246,984	B2	4/2019	Payne et al.	11,028,677	B1	6/2021	Yeung et al.
10,247,182	B2	4/2019	Zhang et al.	11,035,213	B2	6/2021	Dusterhoft et al.
10,254,732	B2	4/2019	Oehring et al.	11,035,214	B2	6/2021	Cui et al.
10,267,439	B2	4/2019	Pryce et al.	11,047,379	B1	6/2021	Li et al.
10,280,724	B2	5/2019	Hinderliter	10,895,202	B1	7/2021	Yeung et al.
10,287,943	B1	5/2019	Schiltz	11,053,853	B2	7/2021	Li et al.
10,288,519	B2	5/2019	De La Cruz	11,060,455	B1	7/2021	Yeung et al.
10,303,190	B2	5/2019	Shock	11,068,455	B2	7/2021	Shabi et al.
10,305,350	B2	5/2019	Johnson et al.	11,085,281	B1	8/2021	Yeung et al.
10,316,832	B2	6/2019	Byrne	11,085,282	B2	8/2021	Mazrooee et al.
10,317,875	B2	6/2019	Pandurangan	11,092,152	B2	8/2021	Yeung et al.
10,337,402	B2	7/2019	Austin et al.	11,098,651	B1	8/2021	Yeung et al.
10,358,035	B2	7/2019	Cryer	11,105,250	B1	8/2021	Zhang et al.
10,371,012	B2	8/2019	Davis et al.	11,105,266	B2	8/2021	Zhou et al.
10,374,485	B2	8/2019	Morris et al.	11,109,508	B1	8/2021	Yeung et al.
10,378,326	B2	8/2019	Morris et al.	11,111,768	B1	9/2021	Yeung et al.
10,393,108	B2	8/2019	Chong et al.	11,125,066	B1	9/2021	Yeung et al.
10,407,990	B2	9/2019	Oehring et al.	11,125,156	B2	9/2021	Zhang et al.
10,408,031	B2	9/2019	Oehring et al.	11,129,295	B1	9/2021	Yeung et al.
10,415,348	B2	9/2019	Zhang et al.	11,143,000	B2	10/2021	Li et al.
10,415,557	B1 *	9/2019	Crowe F04B 23/04	11,143,005	B2	10/2021	Dusterhoft et al.
10,415,562	B2	9/2019	Kajita et al.	11,143,006	B1	10/2021	Zhang et al.
RE47,695	E	11/2019	Case et al.	11,149,533	B1	10/2021	Yeung et al.
10,465,689	B2	11/2019	Crom	11,149,726	B1	10/2021	Yeung et al.
10,478,753	B1	11/2019	Elms et al.	11,156,159	B1	10/2021	Yeung et al.
10,526,882	B2	1/2020	Oehring et al.	11,168,681	B2	11/2021	Boguski
10,563,649	B2	2/2020	Zhang et al.	11,174,716	B1	11/2021	Yeung et al.
10,577,910	B2	3/2020	Stephenson	11,193,360	B1	12/2021	Yeung et al.
10,584,645	B2	3/2020	Nakagawa et al.	11,193,361	B1	12/2021	Yeung et al.
10,590,867	B2	3/2020	Thomassin et al.	11,205,880	B1	12/2021	Yeung et al.
10,598,258	B2	3/2020	Oehring et al.	11,205,881	B2	12/2021	Yeung et al.
10,610,842	B2	4/2020	Chong	11,208,879	B1	12/2021	Yeung et al.
10,662,749	B1	5/2020	Hill et al.	11,208,953	B1	12/2021	Yeung et al.
10,711,787	B1	7/2020	Darley	11,220,895	B1	1/2022	Yeung et al.
10,738,580	B1	8/2020	Fischer et al.	11,236,739	B2	2/2022	Yeung et al.
10,753,153	B1	8/2020	Fischer et al.	11,242,737	B2	2/2022	Zhang et al.
10,753,165	B1	8/2020	Fischer et al.	11,243,509	B2	2/2022	Cai et al.
10,760,556	B1	9/2020	Crom et al.	11,251,650	B1	2/2022	Liu et al.
10,794,165	B2	10/2020	Fischer et al.	11,261,717	B2	3/2022	Yeung et al.
10,794,166	B2	10/2020	Reckels et al.	11,268,346	B2	3/2022	Yeung et al.
10,801,311	B1	10/2020	Cui et al.	11,280,266	B2	3/2022	Yeung et al.
10,815,764	B1	10/2020	Yeung et al.	RE49,083	E	5/2022	Case et al.
10,815,978	B2	10/2020	Glass	11,339,638	B1	5/2022	Yeung et al.
10,830,032	B1	11/2020	Zhang et al.	11,346,200	B2	5/2022	Cai et al.
10,830,225	B2	11/2020	Repaci	11,373,058	B2	6/2022	Jaaskelainen et al.
10,859,203	B1	12/2020	Cui et al.	RE49,140	E	7/2022	Case et al.
10,864,487	B1	12/2020	Han et al.	11,377,943	B2	7/2022	Kriebel et al.
10,865,624	B1	12/2020	Cui et al.	RE49,155	E	8/2022	Case et al.
10,865,631	B1	12/2020	Zhang et al.	RE49,156	E	8/2022	Case et al.
10,870,093	B1	12/2020	Zhong et al.	11,401,927	B2	8/2022	Li et al.
10,871,045	B2	12/2020	Fischer et al.	11,428,165	B2	8/2022	Yeung et al.
10,900,475	B2	1/2021	Weightman et al.	11,441,483	B2	9/2022	Li et al.
				11,448,122	B2	9/2022	Feng et al.
				11,466,680	B2	10/2022	Yeung et al.
				11,480,040	B2	10/2022	Han et al.
				11,492,887	B2	11/2022	Cui et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

11,499,405 B2	11/2022	Zhang et al.	2010/0071899 A1	3/2010	Coquilleau et al.
11,506,039 B2	11/2022	Zhang et al.	2010/0218508 A1	9/2010	Brown et al.
11,512,570 B2	11/2022	Yeung	2010/0300683 A1	12/2010	Looper et al.
11,519,395 B2	12/2022	Zhang et al.	2010/0310384 A1	12/2010	Stephenson et al.
11,519,405 B2	12/2022	Deng et al.	2011/0041681 A1	2/2011	Duerr
11,530,602 B2	12/2022	Yeung et al.	2011/0052423 A1	3/2011	Gambier et al.
11,549,349 B2	1/2023	Wang et al.	2011/0054704 A1	3/2011	Karpman et al.
11,555,390 B2	1/2023	Cui et al.	2011/0085924 A1	4/2011	Shampine et al.
11,555,756 B2	1/2023	Yeung et al.	2011/0146244 A1	6/2011	Farman et al.
11,557,887 B2	1/2023	Ji et al.	2011/0146246 A1	6/2011	Farman et al.
11,560,779 B2	1/2023	Mao et al.	2011/0173991 A1	7/2011	Dean
11,560,845 B2	1/2023	Yeung et al.	2011/0197988 A1	8/2011	Van Vliet et al.
11,572,775 B2	2/2023	Mao et al.	2011/0241888 A1	10/2011	Lu et al.
11,575,249 B2	2/2023	Ji et al.	2011/0265443 A1	11/2011	Ansari
11,592,020 B2	2/2023	Chang et al.	2011/0272158 A1	11/2011	Neal
11,596,047 B2	2/2023	Liu et al.	2012/0023973 A1	2/2012	Mayorca
11,598,263 B2	3/2023	Yeung et al.	2012/0048242 A1	3/2012	Surnilla et al.
11,603,797 B2	3/2023	Zhang et al.	2012/0085541 A1	4/2012	Love et al.
11,607,982 B2	3/2023	Tian et al.	2012/0137699 A1	6/2012	Montagne et al.
11,608,726 B2	3/2023	Zhang et al.	2012/0179444 A1	7/2012	Ganguly et al.
11,624,326 B2	4/2023	Yeung et al.	2012/0192542 A1	8/2012	Chillar et al.
11,629,583 B2	4/2023	Yeung et al.	2012/0199001 A1	8/2012	Chillar et al.
11,629,589 B2	4/2023	Lin et al.	2012/0204627 A1	8/2012	Anderl et al.
2002/0126922 A1	9/2002	Cheng et al.	2012/0255734 A1	10/2012	Coli et al.
2002/0197176 A1	12/2002	Kondo	2012/0310509 A1	12/2012	Pardo et al.
2003/0031568 A1	2/2003	Stiefel	2012/0324903 A1	12/2012	Dewis et al.
2003/0061819 A1	4/2003	Kuroki et al.	2013/0068307 A1	3/2013	Hains et al.
2003/0161212 A1	8/2003	Neal et al.	2013/0087045 A1	4/2013	Sullivan et al.
2004/0016245 A1	1/2004	Pierson	2013/0087945 A1	4/2013	Kusters et al.
2004/0074238 A1	4/2004	Watanabe et al.	2013/0134702 A1	5/2013	Boraas et al.
2004/0076526 A1	4/2004	Fukano et al.	2013/0189915 A1	7/2013	Hazard
2004/0187950 A1	9/2004	Cohen et al.	2013/0205798 A1	8/2013	Kwok et al.
2004/0219040 A1	11/2004	Kugelev et al.	2013/0233165 A1	9/2013	Matzner et al.
2005/0051322 A1	3/2005	Speer	2013/0255953 A1	10/2013	Tudor
2005/0056081 A1	3/2005	Gocho	2013/0259707 A1	10/2013	Yin
2005/0139286 A1	6/2005	Poulter	2013/0284455 A1	10/2013	Kajaria et al.
2005/0196298 A1	9/2005	Manning	2013/0300341 A1	11/2013	Gillette
2005/0226754 A1	10/2005	Orr et al.	2013/0306322 A1	11/2013	Sanborn
2005/0274134 A1	12/2005	Ryu et al.	2014/0000668 A1	1/2014	Lessard
2006/0061091 A1	3/2006	Osterloh	2014/0010671 A1	1/2014	Cryer et al.
2006/0062914 A1	3/2006	Garg et al.	2014/0013768 A1	1/2014	Laing et al.
2006/0196251 A1	9/2006	Richey	2014/0032082 A1	1/2014	Gehrke et al.
2006/0211356 A1	9/2006	Grassman	2014/0044517 A1	2/2014	Saha et al.
2006/0228225 A1	10/2006	Rogers	2014/0048253 A1	2/2014	Andreychuk
2006/0260331 A1	11/2006	Andreychuk	2014/0090729 A1	4/2014	Coulter et al.
2006/0272333 A1	12/2006	Sundin	2014/0090742 A1	4/2014	Coskrey et al.
2007/0029090 A1	2/2007	Andreychuk et al.	2014/0094105 A1*	4/2014	Lundh G05D 7/0676 454/168
2007/0041848 A1	2/2007	Wood et al.	2014/0095114 A1	4/2014	Thomeer et al.
2007/0066406 A1	3/2007	Keller et al.	2014/0095554 A1	4/2014	Thomeer et al.
2007/0098580 A1	5/2007	Petersen	2014/0123621 A1	5/2014	Driessens et al.
2007/0107981 A1	5/2007	Sicotte	2014/0130422 A1	5/2014	Laing et al.
2007/0125544 A1	6/2007	Robinson et al.	2014/0138079 A1	5/2014	Broussard et al.
2007/0169543 A1	7/2007	Fazekas	2014/0144641 A1	5/2014	Chandler
2007/0181212 A1	8/2007	Fell	2014/0147291 A1	5/2014	Burnette
2007/0277982 A1	12/2007	Shampine et al.	2014/0158345 A1	6/2014	Jang et al.
2007/0295569 A1	12/2007	Manzoor et al.	2014/0174097 A1	6/2014	Hammer et al.
2008/0006089 A1	1/2008	Adnan et al.	2014/0196459 A1	7/2014	Futa et al.
2008/0098891 A1	5/2008	Feher	2014/0216736 A1	8/2014	Leugemors et al.
2008/0161974 A1	7/2008	Alston	2014/0219824 A1	8/2014	Burnette
2008/0212275 A1	9/2008	Waryck et al.	2014/0250845 A1	9/2014	Jackson et al.
2008/0229757 A1	9/2008	Alexander et al.	2014/0251623 A1	9/2014	Lestz et al.
2008/0264625 A1	10/2008	Ochoa	2014/0277772 A1	9/2014	Lopez et al.
2008/0264649 A1	10/2008	Crawford	2014/0290266 A1	10/2014	Veilleux, Jr. et al.
2008/0298982 A1	12/2008	Pabst	2014/0318638 A1	10/2014	Harwood et al.
2009/0064685 A1	3/2009	Busekros et al.	2014/0322050 A1	10/2014	Marette et al.
2009/0068031 A1	3/2009	Gambier et al.	2015/0027730 A1	1/2015	Hall et al.
2009/0092510 A1	4/2009	Williams et al.	2015/0078924 A1	3/2015	Zhang et al.
2009/0124191 A1	5/2009	Van Becelaere et al.	2015/0101344 A1	4/2015	Jarrier et al.
2009/0178412 A1	7/2009	Spytek	2015/0114652 A1	4/2015	Lestz et al.
2009/0212630 A1	8/2009	Flegel et al.	2015/0129210 A1	5/2015	Chong et al.
2009/0249794 A1*	10/2009	Wilkes H02P 9/04 60/773	2015/0135659 A1	5/2015	Jarrier et al.
2009/0252616 A1	10/2009	Brunet et al.	2015/0159553 A1	6/2015	Kippel et al.
2009/0308602 A1	12/2009	Bruins et al.	2015/0192117 A1	7/2015	Bridges
2010/0019626 A1	1/2010	Stout et al.	2015/0204148 A1	7/2015	Liu et al.
			2015/0204322 A1	7/2015	Iund et al.
			2015/0211512 A1*	7/2015	Wiegman F04B 23/06 417/2
			2015/0214816 A1	7/2015	Raad

(56)		References Cited					
		U.S. PATENT DOCUMENTS					
2015/0217672	A1	8/2015	Shampine et al.	2017/0356470	A1	12/2017	Jaffrey
2015/0226140	A1	8/2015	Zhang et al.	2017/0370199	A1	12/2017	Witkowski et al.
2015/0252661	A1	9/2015	Glass	2017/0370480	A1	12/2017	Witkowski et al.
2015/0275891	A1	10/2015	Chong et al.	2018/0034280	A1	2/2018	Pedersen
2015/0337730	A1	11/2015	Kupiszewski et al.	2018/0038328	A1	2/2018	Louven et al.
2015/0340864	A1	11/2015	Compton	2018/0041093	A1	2/2018	Miranda
2015/0345385	A1	12/2015	Santini	2018/0045202	A1	2/2018	Crom
2015/0369351	A1	12/2015	Hermann et al.	2018/0038216	A1	3/2018	Zhang et al.
2016/0032703	A1	2/2016	Broussard et al.	2018/0058171	A1	3/2018	Roesner et al.
2016/0032836	A1	2/2016	Hawkinson et al.	2018/0087499	A1	3/2018	Zhang et al.
2016/0076447	A1	3/2016	Merlo et al.	2018/0087996	A1	3/2018	De La Cruz
2016/0102581	A1	4/2016	Del Bono	2018/0156210	A1	6/2018	Oehring et al.
2016/0105022	A1	4/2016	Oehring et al.	2018/0172294	A1	6/2018	Owen
2016/0108713	A1	4/2016	Dunaeva et al.	2018/0183219	A1	6/2018	Oehring et al.
2016/0123185	A1	5/2016	Le Pache et al.	2018/0186442	A1	7/2018	Maier
2016/0168979	A1	6/2016	Zhang et al.	2018/0187662	A1	7/2018	Hill et al.
2016/0177675	A1	6/2016	Morris et al.	2018/0209415	A1	7/2018	Zhang et al.
2016/0177945	A1	6/2016	Byrne et al.	2018/0223640	A1	8/2018	Keihany et al.
2016/0186671	A1	6/2016	Austin et al.	2018/0224044	A1	8/2018	Penney
2016/0195082	A1	7/2016	Wiegman et al.	2018/0229998	A1	8/2018	Shock
2016/0215774	A1	7/2016	Oklejas et al.	2018/0258746	A1	9/2018	Broussard et al.
2016/0230525	A1	8/2016	Lestz et al.	2018/0266412	A1	9/2018	Stokkevag et al.
2016/0244314	A1	8/2016	Van Vliet et al.	2018/0278124	A1	9/2018	Oehring et al.
2016/0248230	A1	8/2016	Tawy et al.	2018/0283102	A1	10/2018	Cook
2016/0253634	A1	9/2016	Thomeer et al.	2018/0283618	A1	10/2018	Cook
2016/0258267	A1	9/2016	Payne et al.	2018/0284817	A1	10/2018	Cook et al.
2016/0273328	A1	9/2016	Oehring	2018/0290877	A1	10/2018	Shock
2016/0273346	A1	9/2016	Tang et al.	2018/0291781	A1	10/2018	Pedriani
2016/0290114	A1	10/2016	Oehring et al.	2018/0298731	A1*	10/2018	Bishop E21B 7/022
2016/0319650	A1	11/2016	Oehring et al.	2018/0298735	A1	10/2018	Conrad
2016/0326845	A1	11/2016	Djikpesse et al.	2018/0307255	A1*	10/2018	Bishop G05D 16/04
2016/0348479	A1	12/2016	Oehring et al.	2018/0313456	A1	11/2018	Bayyouk et al.
2016/0369609	A1	12/2016	Morris et al.	2018/0328157	A1	11/2018	Bishop
2017/0009905	A1	1/2017	Arnold	2018/0334893	A1	11/2018	Oehring
2017/0016433	A1	1/2017	Chong et al.	2018/0363435	A1	12/2018	Coli et al.
2017/0030177	A1	2/2017	Oehring et al.	2018/0363436	A1	12/2018	Coli et al.
2017/0038137	A1	2/2017	Turney	2018/0363437	A1	12/2018	Coli et al.
2017/0045055	A1	2/2017	Hoefel et al.	2018/0363438	A1	12/2018	Coli et al.
2017/0052087	A1	2/2017	Faqihi et al.	2019/0003272	A1	1/2019	Morris et al.
2017/0074074	A1	3/2017	Joseph et al.	2019/0003329	A1	1/2019	Morris et al.
2017/0074076	A1	3/2017	Joseph et al.	2019/0010793	A1	1/2019	Hinderliter
2017/0074089	A1	3/2017	Agarwal et al.	2019/0011051	A1	1/2019	Yeung
2017/0082110	A1	3/2017	Lammers	2019/0048993	A1	2/2019	Akiyama et al.
2017/0089189	A1	3/2017	Norris et al.	2019/0063263	A1	2/2019	Davis et al.
2017/0114613	A1	4/2017	Lecerf et al.	2019/0063341	A1	2/2019	Davis
2017/0114625	A1	4/2017	Norris et al.	2019/0067991	A1	2/2019	Davis et al.
2017/0122310	A1	5/2017	Ladron de Guevara	2019/0071992	A1	3/2019	Feng
2017/0131174	A1	5/2017	Enev et al.	2019/0072005	A1	3/2019	Fisher et al.
2017/0145918	A1	5/2017	Oehring et al.	2019/0078471	A1	3/2019	Braglia et al.
2017/0191350	A1	7/2017	Johns et al.	2019/0088845	A1	3/2019	Sugi et al.
2017/0218727	A1	8/2017	Oehring et al.	2019/0091619	A1	3/2019	Huang
2017/0226839	A1	8/2017	Broussard et al.	2019/0106316	A1	4/2019	Van Vliet et al.
2017/0226842	A1	8/2017	Omont et al.	2019/0106970	A1	4/2019	Oehring
2017/0226998	A1	8/2017	Zhang et al.	2019/0112908	A1	4/2019	Coli et al.
2017/0227002	A1	8/2017	Mikulski et al.	2019/0112910	A1	4/2019	Oehring et al.
2017/0233103	A1	8/2017	Teicholz et al.	2019/0119096	A1	4/2019	Haile et al.
2017/0234165	A1	8/2017	Kersey et al.	2019/0120024	A1	4/2019	Oehring et al.
2017/0234308	A1	8/2017	Buckley	2019/0120031	A1	4/2019	Gilje
2017/0241336	A1	8/2017	Jones et al.	2019/0120134	A1	4/2019	Goleczka et al.
2017/0241671	A1	8/2017	Ahmad	2019/0128247	A1	5/2019	Douglas, III
2017/0248034	A1	8/2017	Dzieciol et al.	2019/0128288	A1	5/2019	Konada et al.
2017/0248208	A1	8/2017	Tamura	2019/0131607	A1	5/2019	Gillette
2017/0248308	A1	8/2017	Makarychev-Mikhailov et al.	2019/0136677	A1*	5/2019	Shampine E21B 43/16
2017/0275149	A1	9/2017	Schmidt	2019/0153843	A1	5/2019	Headrick
2017/0288400	A1	10/2017	Williams	2019/0153938	A1	5/2019	Hammoud
2017/0292409	A1	10/2017	Aguilar et al.	2019/0154020	A1	5/2019	Glass
2017/0302135	A1	10/2017	Cory	2019/0155318	A1	5/2019	Meunier
2017/0305736	A1	10/2017	Haile et al.	2019/0264667	A1	5/2019	Byrne
2017/0306847	A1	10/2017	Suciu et al.	2019/0178234	A1	6/2019	Beisel
2017/0306936	A1	10/2017	Dole	2019/0178235	A1	6/2019	Coskrey et al.
2017/0322086	A1	11/2017	Luharuka	2019/0185312	A1	6/2019	Bush et al.
2017/0333086	A1	11/2017	Jackson	2019/0203572	A1	7/2019	Morris et al.
2017/0334448	A1	11/2017	Schwunk	2019/0204021	A1	7/2019	Morris et al.
2017/0335842	A1	11/2017	Robinson et al.	2019/0211661	A1	7/2019	Reckels et al.
2017/0350471	A1	12/2017	Steidl et al.	2019/0211814	A1	7/2019	Weightman et al.
				2019/0217258	A1	7/2019	Bishop
				2019/0226317	A1	7/2019	Payne et al.
				2019/0245348	A1	8/2019	Hinderliter et al.
				2019/0249652	A1	8/2019	Stephenson et al.

(56)		References Cited					
		U.S. PATENT DOCUMENTS					
2019/0249754	A1	8/2019	Oehring et al.	2020/0393088	A1	12/2020	Sizemore et al.
2019/0257297	A1	8/2019	Botting et al.	2020/0398238	A1	12/2020	Zhong et al.
2019/0277279	A1	9/2019	Byrne et al.	2020/0400000	A1	12/2020	Ghasripor et al.
2019/0277295	A1	9/2019	Clyburn et al.	2020/0400005	A1	12/2020	Han et al.
2019/0309585	A1	10/2019	Miller et al.	2020/0407625	A1	12/2020	Stephenson
2019/0316447	A1	10/2019	Oehring et al.	2020/0408071	A1	12/2020	Li et al.
2019/0316456	A1	10/2019	Beisel et al.	2020/0408144	A1	12/2020	Feng et al.
2019/0323337	A1	10/2019	Glass et al.	2020/0408147	A1	12/2020	Zhang et al.
2019/0330923	A1	10/2019	Gable et al.	2020/0408149	A1	12/2020	Li et al.
2019/0331117	A1	10/2019	Gable et al.	2021/0025324	A1	1/2021	Morris et al.
2019/0337392	A1	11/2019	Joshi et al.	2021/0025383	A1	1/2021	Bodishbaugh et al.
2019/0338762	A1	11/2019	Curry et al.	2021/0032961	A1	2/2021	Hinderliter et al.
2019/0345920	A1	11/2019	Surjaatmadja et al.	2021/0054727	A1	2/2021	Floyd
2019/0353103	A1	11/2019	Roberge	2021/0071503	A1	3/2021	Ogg et al.
2019/0356199	A1	11/2019	Morris et al.	2021/0071574	A1	3/2021	Feng et al.
2019/0376449	A1	12/2019	Carrell	2021/0071579	A1	3/2021	Li et al.
2019/0383123	A1	12/2019	Hinderliter	2021/0071654	A1	3/2021	Brunson
2020/0003205	A1	1/2020	Stokkevåg et al.	2021/0071752	A1	3/2021	Cui et al.
2020/0011165	A1	1/2020	George et al.	2021/0079758	A1	3/2021	Yeung et al.
2020/0040878	A1	2/2020	Morris	2021/0079851	A1	3/2021	Yeung et al.
2020/0049136	A1	2/2020	Stephenson	2021/0086851	A1	3/2021	Zhang et al.
2020/0049153	A1	2/2020	Headrick et al.	2021/0087883	A1	3/2021	Zhang et al.
2020/0071998	A1	3/2020	Oehring et al.	2021/0087916	A1	3/2021	Zhang et al.
2020/0072201	A1	3/2020	Marica	2021/0087925	A1	3/2021	Heidari et al.
2020/0088202	A1	3/2020	Sigmar et al.	2021/0087943	A1	3/2021	Cui et al.
2020/0095854	A1	3/2020	Hinderliter	2021/0088042	A1	3/2021	Zhang et al.
2020/0109610	A1	4/2020	Husoy et al.	2021/0123425	A1	4/2021	Cui et al.
2020/0109616	A1	4/2020	Oehring et al.	2021/0123434	A1	4/2021	Cui et al.
2020/0132058	A1	4/2020	Mollatt	2021/0123435	A1	4/2021	Cui et al.
2020/0141219	A1	5/2020	Oehring et al.	2021/0131409	A1	5/2021	Cui et al.
2020/0141326	A1	5/2020	Redford et al.	2021/0140416	A1	5/2021	Buckley
2020/0141907	A1	5/2020	Meck et al.	2021/0148208	A1	5/2021	Thomas et al.
2020/0166026	A1	5/2020	Marica	2021/0156240	A1	5/2021	Cicci et al.
2020/0206704	A1	7/2020	Chong	2021/0156241	A1	5/2021	Cook
2020/0208733	A1	7/2020	Kim	2021/0172282	A1	6/2021	Wang et al.
2020/0223648	A1	7/2020	Herman et al.	2021/0180517	A1	6/2021	Zhou et al.
2020/0224645	A1	7/2020	Buckley	2021/0190045	A1	6/2021	Zhang et al.
2020/0232454	A1	7/2020	Chretien et al.	2021/0199110	A1	7/2021	Albert et al.
2020/0256333	A1	8/2020	Surjaatmadja	2021/0222690	A1	7/2021	Beisel
2020/0263498	A1	8/2020	Fischer et al.	2021/0239112	A1	8/2021	Buckley
2020/0263525	A1	8/2020	Reid	2021/0246774	A1	8/2021	Cui et al.
2020/0263526	A1	8/2020	Fischer et al.	2021/0270261	A1	9/2021	Zhang et al.
2020/0263527	A1	8/2020	Fischer et al.	2021/0270264	A1	9/2021	Byrne
2020/0263528	A1	8/2020	Fischer et al.	2021/0285311	A1	9/2021	Ji et al.
2020/0267888	A1	8/2020	Putz	2021/0285432	A1	9/2021	Ji et al.
2020/0291731	A1	9/2020	Haiderer et al.	2021/0301807	A1	9/2021	Cui et al.
2020/0295574	A1	9/2020	Batsch-Smith	2021/0306720	A1	9/2021	Sandoval et al.
2020/0300050	A1	9/2020	Oehring et al.	2021/0308638	A1	10/2021	Zhong et al.
2020/0309027	A1	10/2020	Rytkonen	2021/0348475	A1	11/2021	Yeung et al.
2020/0309113	A1	10/2020	Hunter et al.	2021/0348476	A1	11/2021	Yeung et al.
2020/0325752	A1	10/2020	Clark et al.	2021/0348477	A1	11/2021	Yeung et al.
2020/0325760	A1	10/2020	Markham	2021/0355927	A1	11/2021	Jian et al.
2020/0325761	A1	10/2020	Williams	2021/0372394	A1*	12/2021	Bagulayan F04B 1/06
2020/0325791	A1	10/2020	Himmelman	2021/0372395	A1	12/2021	Li et al.
2020/0325893	A1	10/2020	Kraige et al.	2021/0376413	A1	12/2021	Asfha
2020/0332784	A1	10/2020	Zhang et al.	2021/0388760	A1	12/2021	Feng et al.
2020/0332788	A1	10/2020	Cui et al.	2022/0082007	A1	3/2022	Zhang et al.
2020/0340313	A1	10/2020	Fischer et al.	2022/0090476	A1	3/2022	Zhang et al.
2020/0340340	A1	10/2020	Oehring et al.	2022/0090477	A1	3/2022	Zhang et al.
2020/0340344	A1	10/2020	Reckels et al.	2022/0090478	A1	3/2022	Zhang et al.
2020/0340404	A1	10/2020	Stockstill	2022/0112892	A1	4/2022	Cui et al.
2020/0347725	A1	11/2020	Morris et al.	2022/0120262	A1	4/2022	Ji et al.
2020/0354928	A1	11/2020	Wehler et al.	2022/0145740	A1	5/2022	Yuan et al.
2020/0362760	A1	11/2020	Morenko et al.	2022/0154775	A1	5/2022	Liu et al.
2020/0362764	A1	11/2020	Saintignan et al.	2022/0155373	A1	5/2022	Liu et al.
2020/0370394	A1	11/2020	Cai et al.	2022/0162931	A1	5/2022	Zhong et al.
2020/0370408	A1	11/2020	Cai et al.	2022/0162991	A1	5/2022	Zhang et al.
2020/0370429	A1	11/2020	Cai et al.	2022/0181859	A1	6/2022	Ji et al.
2020/0371490	A1	11/2020	Cai et al.	2022/0186724	A1	6/2022	Chang et al.
2020/0340322	A1	12/2020	Sizemore et al.	2022/0213777	A1	7/2022	Cui et al.
2020/0386169	A1	12/2020	Hinderliter et al.	2022/0220836	A1	7/2022	Zhang et al.
2020/0386222	A1	12/2020	Pham et al.	2022/0224087	A1	7/2022	Ji et al.
2020/0388140	A1	12/2020	Gomez et al.	2022/0228468	A1	7/2022	Cui et al.
2020/0392826	A1	12/2020	Cui et al.	2022/0228469	A1	7/2022	Zhang et al.
2020/0392827	A1	12/2020	George et al.	2022/0235639	A1	7/2022	Zhang et al.
				2022/0235640	A1	7/2022	Mao et al.
				2022/0235641	A1	7/2022	Zhang et al.
				2022/0235642	A1	7/2022	Zhang et al.
				2022/0235802	A1	7/2022	Jiang et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2022/0242297	A1	8/2022	Tian et al.	2023/0120810	A1	4/2023	Fu et al.
2022/0243613	A1	8/2022	Ji et al.	2023/0121251	A1	4/2023	Cui et al.
2022/0243724	A1	8/2022	Li et al.	2023/0124444	A1	4/2023	Chang et al.
2022/0250000	A1	8/2022	Zhang et al.	2023/0138582	A1	5/2023	Li et al.
2022/0255319	A1	8/2022	Liu et al.	2023/0144116	A1	5/2023	Li et al.
2022/0258659	A1	8/2022	Cui et al.	2023/0145963	A1	5/2023	Zhang et al.
2022/0259947	A1	8/2022	Li et al.	2023/0151722	A1	5/2023	Cui et al.
2022/0259964	A1	8/2022	Zhang et al.	2023/0151723	A1	5/2023	Ji et al.
2022/0268201	A1	8/2022	Feng et al.	2023/0152793	A1	5/2023	Wang et al.
2022/0282606	A1	9/2022	Zhong et al.				
2022/0282726	A1	9/2022	Zhang et al.				
2022/0290549	A1	9/2022	Zhang et al.				
2022/0294194	A1	9/2022	Cao et al.				
2022/0298906	A1	9/2022	Zhong et al.				
2022/0307359	A1	9/2022	Liu et al.				
2022/0307424	A1	9/2022	Wang et al.				
2022/0314248	A1	10/2022	Ge et al.				
2022/0315347	A1	10/2022	Liu et al.				
2022/0316306	A1	10/2022	Liu et al.				
2022/0316362	A1	10/2022	Zhang et al.				
2022/0316461	A1	10/2022	Wang et al.				
2022/0325608	A1	10/2022	Zhang et al.				
2022/0330411	A1	10/2022	Liu et al.				
2022/0333471	A1	10/2022	Zhong et al.				
2022/0339646	A1	10/2022	Yu et al.				
2022/0341358	A1	10/2022	Ji et al.				
2022/0341362	A1	10/2022	Feng et al.				
2022/0341415	A1	10/2022	Deng et al.				
2022/0345007	A1	10/2022	Liu et al.				
2022/0349345	A1	11/2022	Zhang et al.				
2022/0353980	A1	11/2022	Liu et al.				
2022/0361309	A1	11/2022	Liu et al.				
2022/0364452	A1	11/2022	Wang et al.				
2022/0364453	A1	11/2022	Chang et al.				
2022/0372865	A1	11/2022	Lin et al.				
2022/0376280	A1	11/2022	Shao et al.				
2022/0381126	A1	12/2022	Cui et al.				
2022/0389799	A1	12/2022	Mao				
2022/0389803	A1	12/2022	Zhang et al.				
2022/0389804	A1	12/2022	Cui et al.				
2022/0389865	A1	12/2022	Feng et al.				
2022/0389867	A1	12/2022	Li et al.				
2022/0412196	A1	12/2022	Cui et al.				
2022/0412199	A1	12/2022	Mao et al.				
2022/0412200	A1	12/2022	Zhang et al.				
2022/0412258	A1	12/2022	Li et al.				
2022/0412379	A1	12/2022	Wang et al.				
2023/0001524	A1	1/2023	Jiang et al.				
2023/0003238	A1	1/2023	Du et al.				
2023/0015132	A1	1/2023	Feng et al.				
2023/0015529	A1	1/2023	Zhang et al.				
2023/0015581	A1	1/2023	Ji et al.				
2023/0017968	A1	1/2023	Deng et al.				
2023/0029574	A1	2/2023	Zhang et al.				
2023/0029671	A1	2/2023	Han et al.				
2023/0036118	A1	2/2023	Xing et al.				
2023/0040970	A1	2/2023	Liu et al.				
2023/0042379	A1	2/2023	Zhang et al.				
2023/0047033	A1	2/2023	Fu et al.				
2023/0048551	A1	2/2023	Feng et al.				
2023/0049462	A1	2/2023	Zhang et al.				
2023/0064964	A1	3/2023	Wang et al.				
2023/0074794	A1	3/2023	Liu et al.				
2023/0085124	A1	3/2023	Zhong et al.				
2023/0092506	A1	3/2023	Zhong et al.				
2023/0092705	A1	3/2023	Liu et al.				
2023/0106683	A1	4/2023	Zhang et al.				
2023/0107300	A1	4/2023	Huang et al.				
2023/0107791	A1	4/2023	Zhang et al.				
2023/0109018	A1	4/2023	Du et al.				
2023/0116458	A1	4/2023	Liu et al.				
2023/0117362	A1	4/2023	Zhang et al.				
2023/0119725	A1	4/2023	Wang et al.				
2023/0119876	A1	4/2023	Mao et al.				
2023/0119896	A1	4/2023	Zhang et al.				
				CA	2043184	8/1994	
				CA	2829762	9/2012	
				CA	2737321	9/2013	
				CA	2876687	A1 5/2014	
				CA	2693567	9/2014	
				CA	2964597	10/2017	
				CA	2876687	C 4/2019	
				CA	3138533	11/2020	
				CA	2919175	3/2021	
				CN	2622404	6/2004	
				CN	2779054	5/2006	
				CN	2890325	4/2007	
				CN	200964929	Y 10/2007	
				CN	101323151	A 12/2008	
				CN	201190660	Y 2/2009	
				CN	201190892	Y 2/2009	
				CN	201190893	Y 2/2009	
				CN	101414171	A 4/2009	
				CN	201215073	Y 4/2009	
				CN	201236650	Y 5/2009	
				CN	201275542	Y 7/2009	
				CN	201275801	Y 7/2009	
				CN	201333385	Y 10/2009	
				CN	201443300	U 4/2010	
				CN	201496415	U 6/2010	
				CN	201501365	U 6/2010	
				CN	201507271	U 6/2010	
				CN	101323151	B 7/2010	
				CN	201560210	U 8/2010	
				CN	201581862	U 9/2010	
				CN	201610728	U 10/2010	
				CN	201610751	U 10/2010	
				CN	201618530	U 11/2010	
				CN	201661255	U 12/2010	
				CN	101949382	1/2011	
				CN	201756927	U 3/2011	
				CN	101414171	B 5/2011	
				CN	102128011	A 7/2011	
				CN	102140898	A 8/2011	
				CN	102155172	A 8/2011	
				CN	102182904	9/2011	
				CN	202000930	U 10/2011	
				CN	202055781	U 11/2011	
				CN	202082265	U 12/2011	
				CN	202100216	U 1/2012	
				CN	202100217	U 1/2012	
				CN	202100815	U 1/2012	
				CN	202124340	U 1/2012	
				CN	202140051	U 2/2012	
				CN	202140080	U 2/2012	
				CN	202144789	U 2/2012	
				CN	202144943	U 2/2012	
				CN	202149354	U 2/2012	
				CN	102383748	A 3/2012	
				CN	202156297	U 3/2012	
				CN	202158355	U 3/2012	
				CN	202163504	U 3/2012	
				CN	202165236	U 3/2012	
				CN	202180866	U 4/2012	
				CN	202181875	U 4/2012	
				CN	202187744	U 4/2012	
				CN	202191854	U 4/2012	
				CN	202250008	U 5/2012	
				CN	101885307	7/2012	
				CN	102562020	A 7/2012	
				CN	202326156	U 7/2012	
				CN	202370773	U 8/2012	

FOREIGN PATENT DOCUMENTS

(56) References Cited					
	FOREIGN PATENT DOCUMENTS				
CN	202417397 U	9/2012	CN	102704870 B	5/2014
CN	202417461 U	9/2012	CN	203611843 U	5/2014
CN	102729335 A	10/2012	CN	203612531 U	5/2014
CN	202463955 U	10/2012	CN	203612843 U	5/2014
CN	202463957 U	10/2012	CN	203614062 U	5/2014
CN	202467739 U	10/2012	CN	203614388 U	5/2014
CN	202467801 U	10/2012	CN	203621045 U	6/2014
CN	202531016 U	11/2012	CN	203621046 U	6/2014
CN	202544794 U	11/2012	CN	203621051 U	6/2014
CN	102825039 A	12/2012	CN	203640993 U	6/2014
CN	202578592 U	12/2012	CN	203655221 U	6/2014
CN	202579164 U	12/2012	CN	103899280 A	7/2014
CN	202594808 U	12/2012	CN	103923670 A	7/2014
CN	202594928 U	12/2012	CN	203685052 U	7/2014
CN	202596615 U	12/2012	CN	203716936 U	7/2014
CN	202596616 U	12/2012	CN	103990410 A	8/2014
CN	102849880 A	1/2013	CN	103993869 A	8/2014
CN	102889191 A	1/2013	CN	203754009 U	8/2014
CN	202641535 U	1/2013	CN	203754025 U	8/2014
CN	202645475 U	1/2013	CN	203754341 U	8/2014
CN	202666716 U	1/2013	CN	203756614 U	8/2014
CN	202669645 U	1/2013	CN	203770264 U	8/2014
CN	202669944 U	1/2013	CN	203784519 U	8/2014
CN	202671336 U	1/2013	CN	203784520 U	8/2014
CN	202673269 U	1/2013	CN	104057864 A	9/2014
CN	202751982 U	2/2013	CN	203819819 U	9/2014
CN	102963629 A	3/2013	CN	203823431 U	9/2014
CN	202767964 U	3/2013	CN	203835337 U	9/2014
CN	202789791 U	3/2013	CN	104074500 A	10/2014
CN	202789792 U	3/2013	CN	203876633 U	10/2014
CN	202810717 U	3/2013	CN	203876636 U	10/2014
CN	202827276 U	3/2013	CN	203877364 U	10/2014
CN	202833093 U	3/2013	CN	203877365 U	10/2014
CN	202833370 U	3/2013	CN	203877375 U	10/2014
CN	102140898 B	4/2013	CN	203877424 U	10/2014
CN	202895467 U	4/2013	CN	203879476 U	10/2014
CN	202926404 U	5/2013	CN	203879479 U	10/2014
CN	202935216 U	5/2013	CN	203890292 U	10/2014
CN	202935798 U	5/2013	CN	203899476 U	10/2014
CN	202935816 U	5/2013	CN	203906206 U	10/2014
CN	202970631 U	6/2013	CN	104150728 A	11/2014
CN	103223315 A	7/2013	CN	104176522 A	12/2014
CN	203050598 U	7/2013	CN	104196464 A	12/2014
CN	103233714 A	8/2013	CN	104234651 A	12/2014
CN	103233715 A	8/2013	CN	203971841 U	12/2014
CN	103245523 A	8/2013	CN	203975450 U	12/2014
CN	103247220 A	8/2013	CN	204020788 U	12/2014
CN	103253839 A	8/2013	CN	204021980 U	12/2014
CN	103277290 A	9/2013	CN	204024625 U	12/2014
CN	103321782 A	9/2013	CN	204051401 U	12/2014
CN	203170270 U	9/2013	CN	204060661 U	12/2014
CN	203172509 U	9/2013	CN	104260672 A	1/2015
CN	203175778 U	9/2013	CN	104314512 A	1/2015
CN	203175787 U	9/2013	CN	204077478 U	1/2015
CN	102849880 B	10/2013	CN	204077526 U	1/2015
CN	203241231 U	10/2013	CN	204078307 U	1/2015
CN	203244941 U	10/2013	CN	204083051 U	1/2015
CN	203244942 U	10/2013	CN	204113168 U	1/2015
CN	203303798 U	11/2013	CN	104340682 A	2/2015
CN	102155172 B	12/2013	CN	104358536 A	2/2015
CN	102729335 B	12/2013	CN	104369687 A	2/2015
CN	103420532 A	12/2013	CN	104402178 A	3/2015
CN	203321792 U	12/2013	CN	104402185 A	3/2015
CN	203412658	1/2014	CN	104402186 A	3/2015
CN	203420697 U	2/2014	CN	204209819 U	3/2015
CN	203480755 U	3/2014	CN	204224560 U	3/2015
CN	103711437 A	4/2014	CN	204225813 U	3/2015
CN	203531815 U	4/2014	CN	204225839 U	3/2015
CN	203531871 U	4/2014	CN	104533392 A	4/2015
CN	203531883 U	4/2014	CN	104563938 A	4/2015
CN	203556164 U	4/2014	CN	104563994 A	4/2015
CN	203558809 U	4/2014	CN	104563995 A	4/2015
CN	203559861 U	4/2014	CN	104563998 A	4/2015
CN	203559893 U	4/2014	CN	104564033 A	4/2015
CN	203560189 U	4/2014	CN	204257122 U	4/2015
			CN	204283610 U	4/2015
			CN	204283782 U	4/2015
			CN	204297682 U	4/2015
			CN	204299810 U	4/2015

(56) References Cited					
	FOREIGN PATENT DOCUMENTS				
CN	103223315 B	5/2015	CN	104563994 B	3/2017
CN	104594857 A	5/2015	CN	206129196	4/2017
CN	104595493 A	5/2015	CN	104369687 B	5/2017
CN	104612647 A	5/2015	CN	106715165	5/2017
CN	104612928 A	5/2015	CN	106761561 A	5/2017
CN	104632126 A	5/2015	CN	105240064 B	6/2017
CN	204325094 U	5/2015	CN	206237147	6/2017
CN	204325098 U	5/2015	CN	206287832	6/2017
CN	204326983 U	5/2015	CN	206346711	7/2017
CN	204326985 U	5/2015	CN	104563995 B	9/2017
CN	204344040 U	5/2015	CN	107120822	9/2017
CN	204344095 U	5/2015	CN	107143298 A	9/2017
CN	104727797 A	6/2015	CN	107159046 A	9/2017
CN	204402414 U	6/2015	CN	107188018 A	9/2017
CN	204402423 U	6/2015	CN	206496016	9/2017
CN	204402450 U	6/2015	CN	104564033 B	10/2017
CN	103247220 B	7/2015	CN	107234358 A	10/2017
CN	104803568 A	7/2015	CN	107261975 A	10/2017
CN	204436360 U	7/2015	CN	206581929	10/2017
CN	204457524 U	7/2015	CN	104820372 B	12/2017
CN	204472485 U	7/2015	CN	105092401 B	12/2017
CN	204473625 U	7/2015	CN	107476769 A	12/2017
CN	204477303 U	7/2015	CN	107520526 A	12/2017
CN	204493095 U	7/2015	CN	206754664	12/2017
CN	204493309 U	7/2015	CN	107605427 A	1/2018
CN	103253839 B	8/2015	CN	106438310 B	2/2018
CN	104820372 A	8/2015	CN	107654196 A	2/2018
CN	104832093 A	8/2015	CN	107656499 A	2/2018
CN	104863523 A	8/2015	CN	107728657 A	2/2018
CN	204552723 U	8/2015	CN	206985503	2/2018
CN	204553866 U	8/2015	CN	207017968	2/2018
CN	204571831 U	8/2015	CN	107859053 A	3/2018
CN	204703814 U	10/2015	CN	207057867	3/2018
CN	204703833 U	10/2015	CN	207085817	3/2018
CN	204703834 U	10/2015	CN	105545207 B	4/2018
CN	105092401 A	11/2015	CN	107883091 A	4/2018
CN	103233715 B	12/2015	CN	107902427 A	4/2018
CN	103790927	12/2015	CN	107939290 A	4/2018
CN	105207097	12/2015	CN	107956708	4/2018
CN	204831952 U	12/2015	CN	207169595	4/2018
CN	204899777 U	12/2015	CN	207194873	4/2018
CN	102602323	1/2016	CN	207245674	4/2018
CN	105240064 A	1/2016	CN	108034466 A	5/2018
CN	204944834	1/2016	CN	108036071 A	5/2018
CN	205042127 U	2/2016	CN	108087050 A	5/2018
CN	205172478 U	4/2016	CN	207380566	5/2018
CN	103993869 B	5/2016	CN	108103483 A	6/2018
CN	105536299 A	5/2016	CN	108179046 A	6/2018
CN	105545207 A	5/2016	CN	108254276 A	7/2018
CN	205260249	5/2016	CN	108311535 A	7/2018
CN	103233714 B	6/2016	CN	207583576	7/2018
CN	104340682 B	6/2016	CN	207634064	7/2018
CN	205297518 U	6/2016	CN	207648054	7/2018
CN	205298447 U	6/2016	CN	207650621	7/2018
CN	205391821 U	7/2016	CN	108371894 A	8/2018
CN	205400701 U	7/2016	CN	207777153	8/2018
CN	103277290 B	8/2016	CN	108547601 A	9/2018
CN	104260672 B	8/2016	CN	108547766 A	9/2018
CN	205477370 U	8/2016	CN	108555826 A	9/2018
CN	205479153 U	8/2016	CN	108561098 A	9/2018
CN	205503058 U	8/2016	CN	108561750 A	9/2018
CN	205503068 U	8/2016	CN	108590617 A	9/2018
CN	205503089 U	8/2016	CN	207813495	9/2018
CN	105958098 A	9/2016	CN	207814698	9/2018
CN	205599180	9/2016	CN	207862275	9/2018
CN	205599180 U	9/2016	CN	108687954 A	10/2018
CN	106121577 A	11/2016	CN	207935270	10/2018
CN	205709587	11/2016	CN	207961582	10/2018
CN	104612928 B	12/2016	CN	207964530	10/2018
CN	106246120 A	12/2016	CN	108789848 A	11/2018
CN	205805471	12/2016	CN	108799473	11/2018
CN	106321045 A	1/2017	CN	108868675 A	11/2018
CN	205858306	1/2017	CN	208086829	11/2018
CN	106438310 A	2/2017	CN	208089263	11/2018
CN	205937833	2/2017	CN	208169068	11/2018
			CN	108979569 A	12/2018
			CN	109027662 A	12/2018
			CN	109058092 A	12/2018
			CN	208179454	12/2018

(56) References Cited					
	FOREIGN PATENT DOCUMENTS				
CN	208179502	12/2018	CN	209650738	11/2019
CN	208253147	12/2018	CN	209653968	11/2019
CN	208260574	12/2018	CN	209654004	11/2019
CN	109114418 A	1/2019	CN	209654022	11/2019
CN	109141990 A	1/2019	CN	209654128	11/2019
CN	208313120	1/2019	CN	209656622	11/2019
CN	208330319	1/2019	CN	107849130 B	12/2019
CN	208342730	1/2019	CN	108087050 B	12/2019
CN	208430982	1/2019	CN	110566173 A	12/2019
CN	208430986	1/2019	CN	110608030 A	12/2019
CN	109404274 A	3/2019	CN	110617187 A	12/2019
CN	109429610 A	3/2019	CN	110617188 A	12/2019
CN	109491318 A	3/2019	CN	110617318 A	12/2019
CN	109515177 A	3/2019	CN	209740823	12/2019
CN	109526523 A	3/2019	CN	209780827	12/2019
CN	109534737 A	3/2019	CN	209798631	12/2019
CN	208564504	3/2019	CN	209799942	12/2019
CN	208564516	3/2019	CN	209800178	12/2019
CN	208564525	3/2019	CN	209855723	12/2019
CN	208564918	3/2019	CN	209855742	12/2019
CN	208576026	3/2019	CN	209875063	12/2019
CN	208576042	3/2019	CN	110656919 A	1/2020
CN	208650818	3/2019	CN	107520526 B	2/2020
CN	208669244	3/2019	CN	110787667 A	2/2020
CN	109555484 A	4/2019	CN	110821464 A	2/2020
CN	109682881 A	4/2019	CN	110833665 A	2/2020
CN	208730959	4/2019	CN	110848028 A	2/2020
CN	208735264	4/2019	CN	210049880	2/2020
CN	208746733	4/2019	CN	210049882	2/2020
CN	208749529	4/2019	CN	210097596	2/2020
CN	208750405	4/2019	CN	210105817	2/2020
CN	208764658	4/2019	CN	210105818	2/2020
CN	109736740 A	5/2019	CN	210105993	2/2020
CN	109751007 A	5/2019	CN	110873093 A	3/2020
CN	208868428	5/2019	CN	210139911	3/2020
CN	208870761	5/2019	CN	110947681 A	4/2020
CN	109869294 A	6/2019	CN	111058810 A	4/2020
CN	109882144 A	6/2019	CN	111075391 A	4/2020
CN	109882372 A	6/2019	CN	210289931	4/2020
CN	209012047	6/2019	CN	210289932	4/2020
CN	209100025	7/2019	CN	210289933	4/2020
CN	110080707 A	8/2019	CN	210303516	4/2020
CN	110118127 A	8/2019	CN	211412945	4/2020
CN	110124574 A	8/2019	CN	111089003 A	5/2020
CN	110145277 A	8/2019	CN	111151186 A	5/2020
CN	110145399 A	8/2019	CN	111167769 A	5/2020
CN	110152552 A	8/2019	CN	111169833 A	5/2020
CN	110155193 A	8/2019	CN	111173476 A	5/2020
CN	110159225 A	8/2019	CN	111185460 A	5/2020
CN	110159432	8/2019	CN	111185461 A	5/2020
CN	110159432 A	8/2019	CN	111188763 A	5/2020
CN	110159433 A	8/2019	CN	111206901 A	5/2020
CN	110208100 A	9/2019	CN	111206992 A	5/2020
CN	110252191 A	9/2019	CN	111206994 A	5/2020
CN	110284854 A	9/2019	CN	210449044	5/2020
CN	110284972 A	9/2019	CN	210460875	5/2020
CN	209387358	9/2019	CN	210522432	5/2020
CN	110374745 A	10/2019	CN	210598943	5/2020
CN	209534736	10/2019	CN	210598945	5/2020
CN	110425105 A	11/2019	CN	210598946	5/2020
CN	110439779 A	11/2019	CN	210599194	5/2020
CN	110454285 A	11/2019	CN	210599303	5/2020
CN	110454352 A	11/2019	CN	210600110	5/2020
CN	110467298 A	11/2019	CN	111219326 A	6/2020
CN	110469312 A	11/2019	CN	111350595 A	6/2020
CN	110469314 A	11/2019	CN	210660319	6/2020
CN	110469405 A	11/2019	CN	210714569	6/2020
CN	110469654 A	11/2019	CN	210769168	6/2020
CN	110485982 A	11/2019	CN	210769169	6/2020
CN	110485983 A	11/2019	CN	210769170	6/2020
CN	110485984 A	11/2019	CN	210770133	6/2020
CN	110486249 A	11/2019	CN	210825844	6/2020
CN	110500255 A	11/2019	CN	210888904	6/2020
CN	110510771 A	11/2019	CN	210888905	6/2020
CN	110513097 A	11/2019	CN	210889242	6/2020
			CN	111397474 A	7/2020
			CN	111412064 A	7/2020
			CN	111441923 A	7/2020
			CN	111441925 A	7/2020

(56)

References Cited

FOREIGN PATENT DOCUMENTS

CN	111503517	A	8/2020	WO	2019060922	3/2019
CN	111515898	A	8/2020	WO	2019117862	6/2019
CN	111594059	A	8/2020	WO	2019126742	6/2019
CN	111594062	A	8/2020	WO	2019147601	8/2019
CN	111594144	A	8/2020	WO	2019169366	9/2019
CN	211201919		8/2020	WO	2019195651	10/2019
CN	211201920		8/2020	WO	2019200510	10/2019
CN	211202218		8/2020	WO	2019210417	11/2019
CN	111608965	A	9/2020	WO	2020018068	1/2020
CN	111664087	A	9/2020	WO	2020046866	3/2020
CN	111677476	A	9/2020	WO	2020072076	4/2020
CN	111677647	A	9/2020	WO	2020076569	4/2020
CN	111692064	A	9/2020	WO	2020097060	5/2020
CN	111692065	A	9/2020	WO	2020104088	5/2020
CN	211384571		9/2020	WO	2020131085	6/2020
CN	211397553		9/2020	WO	2020211083	10/2020
CN	211397677		9/2020	WO	2020211086	10/2020
CN	211500955		9/2020	WO	2021/038604	3/2021
CN	211524765		9/2020	WO	2021038604	3/2021
DE	4004854		8/1991	WO	2021041783	3/2021
DE	4241614		6/1994			
DE	102009022859		12/2010			
DE	102012018825		3/2014			
DE	102013111655		12/2014			
DE	102015103872		10/2015			
DE	102013114335		12/2020			
EP	0835983		4/1998			
EP	1378683		1/2004			
EP	2143916		1/2010			
EP	2613023		7/2013			
EP	3095989		11/2016			
EP	3211766		8/2017			
EP	3049642		4/2018			
EP	3354866		8/2018			
EP	3075946		5/2019			
FR	2795774		6/1999			
GB	474072		10/1937			
GB	1438172		6/1976			
JP	S57135212		2/1984			
KR	20020026398		4/2002			
RU	13562		4/2000			
WO	1993020328		10/1993			
WO	2006025886		3/2006			
WO	2009023042		2/2009			
WO	20110133821		10/2011			
WO	2012139380		10/2012			
WO	2013158822		10/2013			
WO	PCT/CN2012/074945		11/2013			
WO	2013185399		12/2013			
WO	2015158020		10/2015			
WO	2016014476		1/2016			
WO	2016033983		3/2016			
WO	2016078181		5/2016			
WO	2016101374		6/2016			
WO	2016112590		7/2016			
WO	2017123656	A	7/2017			
WO	2017146279		8/2017			
WO	2017213848		12/2017			
WO	2018031029		2/2018			
WO	2018038710		3/2018			
WO	2018044293		3/2018			
WO	2018044307		3/2018			
WO	2018071738		4/2018			
WO	2018101909		6/2018			
WO	2018101912		6/2018			
WO	2018106210		6/2018			
WO	2018106225		6/2018			
WO	2018106252		6/2018			
WO	2018/132106		7/2018			
WO	2018156131		8/2018			
WO	2018075034		10/2018			
WO	2018187346		10/2018			
WO	2018031031		2/2019			
WO	2019045691		3/2019			
WO	2019046680		3/2019			

OTHER PUBLICATIONS

Europump and Hydraulic Institute, Variable Speed Pumping: A Guide to Successful Applications, Elsevier Ltd, 2004.

Capstone Turbine Corporation, Capstone Receives Three Megawatt Order from Large Independent Oil & Gas Company in Eagle Ford Shale Play, Dec. 7, 2010.

Wikipedia, Westinghouse Combustion Turbine Systems Division, https://en.wikipedia.org/wiki/Westinghouse_Combustion_Turbine_Systems_Division, circa 1960.

Wikipedia, Union Pacific GTEs, https://en.wikipedia.org/wiki/Union_Pacific_GIHs, circa 1950.

HCI Jet Frac, Screenshots from YouTube, Dec. 11, 2010. <https://www.youtube.com/watch?v=6HjXkdbFaFQ>.

AFD Petroleum Ltd., Automated Hot Zone, Frac Refueling System, Dec. 2018.

Eygun, Christiane, et al., URTeC: 2687987, Mitigating Shale Gas Developments Carbon Footprint: Evaluating and Implementing Solutions in Argentina, Copyright 2017, Unconventional Resources Technology Conference.

Walzel, Brian, Hart Energy, Oil, Gas Industry Discovers Innovative Solutions to Environmental Concerns, Dec. 10, 2018.

Frac Shack, Bi-Fuel FracFueller brochure, 2011.

Pettigrew, Dana, et al., High Pressure Multi-Stage Centrifugal Pump for 10,000 psi Frac Pump—HPPHS Frac Pump, Copyright 2013, Society of Petroleum Engineers, SPE 166191.

Elle Seybold, et al., Evolution of Dual Fuel Pressure Pumping for Fracturing: Methods, Economics, Field Trial Results and Improvements in Availability of Fuel, Copyright 2013, Society of Petroleum Engineers, SPE 166443.

Wallace, E.M., Associated Shale Gas: From Flares to Rig Power, Copyright 2015, Society of Petroleum Engineers, SPE-173491-MS.

Williams, C.W. (Gulf Oil Corp. Odessa Texas), The Use of Gas-turbine Engines in an Automated High-Pressure Water-injection Stations; American Petroleum Institute; API-63-144 (Jan. 1, 1963).

Neal, J.C. (Gulf Oil Corp. Odessa Texas), Gas Turbine Driven Centrifugal Pumps for High Pressure Water Injection; American Institute of Mining, Metallurgical and Petroleum Engineers, Inc.; SPE-1888 (1967).

Porter, John A. (Solar Division International Harvester Co.), Modern Industrial Gas Turbines for the Oil Field American Petroleum Institute; Drilling and Production Practice; API-67-243 (Jan. 1, 1967).

Cooper et al., Jet Frac Porta-Skid—A New Concept in Oil Field Service Pump Equipments[sic]; Halliburton Services; SPE-2706 (1969).

Ibragimov, É.S., Use of gas-turbine engines in oil field pumping units; Chem Petrol Eng; (1994) 30: 530. <https://doi.org/10.1007/BF01154919>. (Translated from Khimicheskaya i Neftyanoe Mashinostroenie, No. 11, pp. 24-26, Nov. 1994.)

Kas'yanov et al., Application of gas-turbine engines in pumping units complexes of hydraulic fracturing of oil and gas reservoirs; Exposition Oil & Gas; (Oct. 2012) (published in Russian).

(56)

References Cited

OTHER PUBLICATIONS

American Petroleum Institute. API 674: Positive Displacement Pumps—Reciprocating. 3rd ed. Washington, DC: API Publishing Services, 2010.

American Petroleum Institute. API 616: Gas Turbines for the Petroleum, Chemical, and Gas Industry Services. 5th ed. Washington, DC: API Publishing Services, 2011.

Karassik, Igor, Joseph Messina, Paul Cooper, and Charles Heald. Pump Handbook. 4th ed. New York: McGraw-Hill Education, 2008.

Weir SPM. Weir SPM General Catalog: Well Service Pumps, Flow Control Products, Manifold Trailers, Safety Products, Post Sale Services. Ft. Worth, TX: Weir Oil & Gas. May 28, 2016. <https://www.pumpfundamentals.com/pumpdatabase2/weir-spm-general.pdf>.

The Weir Group, Inc. Weir SPM Pump Product Catalog. Ft. Worth, TX: S.P.M. Flow Control, Inc. Oct. 30, 2017. https://manage.global.weir/assets/files/product%20brochures/SPM_2P140706_Pump_Product_Catalogue_View.pdf.

Shandong Saigao Group Corporation. Q4 (5W115) Quintuplex Plunger Pump. Jinan City, Shandong Province, China: Saigao. Oct. 20, 2014. <https://www.saigaogroup.com/product/q400-5w115-quintuplex-plunger-pump.html>.

Marine Turbine. Turbine Powered Frac Units. Franklin, Louisiana: Marine Turbine Technologies, 2020.

Rotating Right. Quintuplex Power Pump Model Q700. Edmonton, Alberta, Canada: Weatherford International Ltd. <https://www.rotatingright.com/pdf/weatherford/RR%2026-Weatherford%20Model%20Q700.pdf>, 2021.

CanDyne Pump Services, Inc. Weatherford Q700 Pump. Calgary, Alberta, Canada: CanDyne Pump Services. Aug. 15, 2015. <http://candyne.com/wp-content/uploads/2014/10/181905-94921.q700-quintuplex-pump.pdf>.

Arop, Julius Bankong. Geomechanical review of hydraulic fracturing technology. Thesis (M. Eng.). Cambridge, MA: Massachusetts Institute of Technology, Dept. of Civil and Environmental Engineering. Oct. 29, 2013. <https://dspace.mit.edu/handle/1721.1/82176>.

De Gevigney et al., “Analysis of no-load dependent power losses in a planetary gear train by using thermal network method”, International Gear Conference 2014: Aug. 26-28, 2014, Lyon, pp. 615-624. Special-Purpose Couplings for Petroleum, Chemical, and Gas Industry Services, API Standard 671 (4th Edition) (2010).

The Application of Flexible Couplings for Turbomachinery, Jon R. Mancuso et al., Proceedings of the Eighteenth Turbomachinery Symposium (1989).

Pump Control With Variable Frequency Drives, Kevin Tory, Pumps & Systems: Advances in Motors and Drives, Reprint from Jun. 2008.

Fracture Design and Stimulation, Mike Eberhard, P.E., Well Construction & Operations Technical Workshop In support of the EPA Hydraulic Fracturing Study, Mar. 10-11, 2011.

General Purpose vs. Special Purpose Couplings, Jon Mancuso, Proceedings of the Twenty-Third Turbomachinery Symposium (1994). Overview of Industry Guidance/Best Practices on Hydraulic Fracturing (HF), American Petroleum Institute, © 2012.

API Member Companies, American Petroleum Institute, WaybackMachine Capture, <https://web.archive.org/web/20130424080625/http://api.org/globalitems/globalheaderpages/membership/api-member-companies>, accessed Jan. 4, 2021.

API's Global Industry Services, American Petroleum Institute, © Aug. 2020.

About API, American Petroleum Institute, <https://www.api.org/about>, accessed Dec. 30, 2021.

About API, American Petroleum Institute, WaybackMachine Capture, <https://web.archive.org/web/20110422104346/http://api.org/aboutapi/>, captured Apr. 22, 2011.

Publications, American Petroleum Institute, WaybackMachine Capture, <https://web.archive.org/web/20110427043936/http://www.api.org/80/Publications/>, captured Apr. 27, 2011.

Procedures for Standards Development, American Petroleum Institute, Third Edition (2006).

WorldCat Library Collections Database Records for API Standard 671 and API Standard 674, https://www.worldcat.org/title/positive-displacement-pumps-reciprocating/oclc/858692269&referer=brief_results, accessed Dec. 30, 2021; and https://www.worldcat.org/title/special-purpose-couplings-for-petroleum-chemical-and-gas-industry-services/oclc/871254217&referer=brief_results, accessed Dec. 22, 2021.

2011 Publications and Services, American Petroleum Institute (2011). Standards, American Petroleum Institute, WaybackMachine Capture, <https://web.archive.org/web/20110207195046/http://www.api.org/Standards/>, captured Feb. 7, 2011; and <https://web.archive.org/web/20110204112554/http://global.ihs.com/?RID=API1>, captured Feb. 4, 2011.

IHS Markit Standards Store, https://global.ihs.com/doc_detail.cfm?document_name=API%20STD%20674&item_s_key=00010672#doc-detail-history-anchor, accessed Dec. 30, 2021; and https://global.ihs.com/doc_detail.cfm?&input_doc_number=671&input_doc_title=&document_name=API%20STD%20671&item_s_key=00010669&item_key_date=890331&origin=DSSC, accessed Dec. 30, 2021. Dziubak, Tadeusz, “Experimental Studies of Dust Suction Irregularity from Multi-Cyclone Dust Collector of Two-Stage Air Filter”, Energies 2021, 14, 3577, 28 pages.

Rigmaster Machinery Ltd., Model: 2000 RMP-6-PLEX, brochure, downloaded at https://www.rigmastermachinery.com/_files/ugd/431e62_eaec77e9fe54af8b13d08396072da67.pdf.

Final written decision of PGR2021-00102 dated Feb. 6, 2023.

Final written decision of PGR2021-00103 dated Feb. 6, 2023.

AFGlobal Corporation, Durastim Hydraulic Fracturing Pump, A Revolutionary Design for Continuous Duty Hydraulic Fracturing, 2018.

SPM® QEM 5000 E-Frac Pump Specification Sheet, Weir Group (2019) (“Weir 5000”).

Green Field Energy Services Natural Gas Driven Turbine Frac Pumps HHP Summit Presentation, Yumpu (Sep. 2012), <https://www.yumpu.com/en/document/read/49685291/turbine-frac-pump-assembly-hhp> (“Green Field”).

Jereh Debut's Super-power Turbine Fracturing Pump, Leading the Industrial Revolution, Jereh Oilfield Services Group (Mar. 19, 2014), <https://www.prnewswire.com/news-releases/jereh-debuts-super-power-turbine-fracturing-pump-leading-the-industrial-revolution-250992111.html>.

Jereh Apollo 4500 Turbine Frac Pumper Finishes Successful Field Operation in China, Jereh Group (Feb. 13, 2015), as available on Apr. 20, 2015, <https://web.archive.org/web/20150420220625/https://www.prnewswire.com/news-releases/jereh-apollo-4500-turbine-frac-pumper-finishes-successful-field-operation-in-china-300035829.html>.

35% Economy Increase, Dual-fuel System Highlighting Jereh Apollo Frac Pumper, Jereh Group (Apr. 13, 2015), <https://www.jereh.com/en/news/press-release/news-detail-7345.htm>.

Hydraulic Fracturing: Gas turbine proves successful in shale gasfield operations, Vericor (2017), <https://www.vericor.com/wp-content/uploads/2020/02/7.-Fracing-4500hp-Pump-China-En.pdf> (“Vericor Case Study”).

Jereh Apollo Turbine Fracturing Pumper Featured on China Central Television, Jereh Group (Mar. 9, 2018), <https://www.jereh.com/en/news/press-release/news-detail-7267.htm>.

Jereh Unveiled New Electric Fracturing Solution at OTC 2019, Jereh Group (May 7, 2019), as available on May 28, 2019, <https://web.archive.org/web/20190528183906/https://www.prnewswire.com/news-releases/jereh-unveiled-new-electric-fracturing-solution-at-otc-2019-300845028.html>.

Jereh Group, Jereh Fracturing Unit, Fracturing Spread, YouTube (Mar. 30, 2015), <https://www.youtube.com/watch?v=PIkDbU5dE0o>. Transcript of Jereh Group, Jereh Fracturing Unit, Fracturing Spread, YouTube (Mar. 30, 2015).

Jereh Group, Jereh Fracturing Equipment, YouTube (Jun. 8, 2015), <https://www.youtube.com/watch?v=m0vMiq84P4Q>.

Transcript of Jereh Group, Jereh Fracturing Equipment, YouTube (Jun. 8, 2015), <https://www.youtube.com/watch?v=m0vMiq84P4Q>.

Ferdinand P. Beer et al., Mechanics of Materials (6th ed. 2012).

(56) **References Cited**

OTHER PUBLICATIONS

- Weir Oil & Gas Introduces Industry's First Continuous Duty 5000-Horsepower Pump, Weir Group (Jul. 25, 2019), <https://www.global.weir/newsroom/news-articles/weir-oil-and-gas-introduces-industrys-first-continuous-duty-5000-horsepower-pump/>.
- 2012 High Horsepower Summit Agenda, Natural Gas for High Horsepower Applications (Sep. 5, 2012).
- Review of HHP Summit 2012, Gladstein, Neandross & Associates <https://www.gladstein.org/gna-conferences/high-horsepower-summit-2012/>.
- Green Field Energy Services Deploys Third New Hydraulic Fracturing System, Green Field Energy Services, Inc. (Jul. 11, 2012), <https://www.prnewswire.com/news-releases/green-field-energy-services-deploys-third-new-hydraulic-fracturing-spread-162113425>.
- Karen Boman, Turbine Technology Powers Green Field Multi-Fuel Frack Pump, Rigzone (Mar. 7, 2015), as available on Mar. 14, 2015, https://web.archive.org/web/20150314203227/https://www.rigzone.com/news/oil-gas/a/124883/Turbine_Technology_Powers_Green_Field_MultiFuel_Frack_Pump.
- "Turbine Frac Units," WMD Squared (2012), <https://wmdsquared.com/work/gfes-turbine-frac-units/>.
- Leslie Turj, Green Field asset sale called 'largest disposition industry has seen,' The INDSider Media (Mar. 19, 2014), <http://theind.com/article-16497-green-field-asset-sale-called-%E2%80%98largest-disposition-industry-has-seen%60.html>.
- "Honghua developing new-generation shale-drilling rig, plans testing of frac pump"; Katherine Scott; Drilling Contractor; May 23, 2013; accessed at <https://www.drillingcontractor.org/honghua-developing-new-generation-shale-drilling-rig-plans-testing-of-frac-pump-23278>.
- ResearchGate, Answer by Byron Woolridge, found at https://www.researchgate.net/post/How_can_we_improve_the_efficiency_of_the_gas_turbine_cycles, Jan. 1, 2013.
- Filipović, Ivan, Preliminary Selection of Basic Parameters of Different Torsional Vibration Dampers Intended for use in Medium-Speed Diesel Engines, Transactions of Famera XXXVI-3 (2012).
- Marine Turbine Technologies, 1 MW Power Generation Package, <http://marineturbine.com/power-generation>, 2017.
- Business Week: Fiber-optic cables help fracking, [cablinginstall.com](http://cablinginstall.com/cable/article/16474208/businessweek-fiber-optic-cables-help-fracking). Jul. 12, 2013. <https://www.cablinginstall.com/cable/article/16474208/businessweek-fiber-optic-cables-help-fracking>.
- Fracking companies switch to electric motors to power pumps, iadd-intl.org. Jun. 27, 2019. <https://www.iadd-intl.org/articles/fracking-companies-switch-to-electric-motors-to-power-pumps/>.
- The Leader in Frac Fueling, suncoastresources.com. Jun. 29, 2015. <https://web.archive.org/web/20150629220609/https://www.suncoastresources.com/oilfield/fueling-services/>.
- Mobile Fuel Delivery, atlasoil.com. Mar. 6, 2019. <https://www.atlasoil.com/nationwide-fueling/onsite-and-mobile-fueling>.
- Frac Tank Hose (FRAC), 4starhose.com. Accessed: Nov. 10, 2019. http://www.4starhose.com/producl/frac_tank_hose_frac.aspx.
- PLOS ONE, Dynamic Behavior of Reciprocating Plunger Pump Discharge Valve Based on Fluid Structure Interaction and Experimental Analysis. Oct. 21, 2015.
- FMC Technologies, Operation and Maintenance Manual, L06 Through L16 Triplex Pumps Doc No. OMM50000903 Rev: E p. 1 of 66. Aug. 27, 2009.
- Lekontsev, Yu M., et al. "Two-side sealer operation." Journal of Mining Science 49.5 (2013): 757-762.
- FTS International's Dual Fuel Hydraulic Fracturing Equipment Increases Operational Efficiencies, Provides Cost Benefits, Jan. 3, 2018.
- CNG Delivery, Fracturing with natural gas, dual-fuel drilling with CNG, Aug. 22, 2019.
- Pbng, Natural Gas Fuel for Drilling and Hydraulic Fracturing, Diesel Displacement / Dual Fuel & Bi-Fuel, May 2014.
- Integrated Flow, Skid-mounted Modular Process Systems, Jul. 15, 2017, <https://ifsolutions.com/why-modular/>.
- Cameron, A Schlumberger Company, Frac Manifold Systems, 2016.
- ZSi-Foster, Energy | Solar | Fracking | Oil and Gas, Aug. 2020, <https://www.zsi-foster.com/energy-solar-fracking-oil-and-gas.html>.
- JBG Enterprises, Inc., WS-Series Blowout Prevention Safety Coupling—Quick Release Couplings, Sep. 11, 2015, <http://www.jgbhose.com/products/WS-Series-Blowout-Prevention-Safety-Coupling.asp>.
- Halliburton, Vessel-based Modular Solution (VMS), 2015.
- Chun, M. K., H. K. Song, and R. Lallemand. "Heavy duty gas turbines in petrochemical plants: Samsung's Daesan plant (Korea) beats fuel flexibility records with over 95% hydrogen in process gas." Proceedings of PowerGen Asia Conference, Singapore. 1999.
- Wolf, Jürgen J., and Marko A. Perkavec. "Safety Aspects and Environmental Considerations for a 10 MW Cogeneration Heavy Duty Gas Turbine Burning Coke Oven Gas with 60% Hydrogen Content." ASME 1992 International Gas Turbine and Aeroengine Congress and Exposition. American Society of Mechanical Engineers Digital Collection, 1992.
- Ginter, Timothy, and Thomas Bouvay. "Uprate options for the MS7001 heavy duty gas turbine." GE paper GER-3808C, GE Energy 12 (2006).
- Chaichan, Miqdam Tariq. "The impact of equivalence ratio on performance and emissions of a hydrogen-diesel dual fuel engine with cooled exhaust gas recirculation." International Journal of Scientific & Engineering Research 6.6 (2015): 938-941.
- Ecob, David J., et al. "Design and Development of a Landfill Gas Combustion System for the Typhoon Gas Turbine." ASME 1996 International Gas Turbine and Aeroengine Congress and Exhibition. American Society of Mechanical Engineers Digital Collection, 1996.
- II-VI Marlow Industries, Thermoelectric Technologies in Oil, Gas, and Mining Industries, blog.marlow.com (Jul. 24, 2019).
- B.M. Mahlalela, et al., Electric Power Generation Potential Based on Waste Heat and Geothermal Resources in South Africa, pangea.stanford.edu (Feb. 11, 2019).
- Department of Energy, United States of America, The Water-Energy Nexus: Challenges and Opportunities ourenergypolicy.org (Jun. 2014).
- Ankit Tiwari, Design of a Cooling System for a Hydraulic Fracturing Equipment, The Pennsylvania State University, The Graduate School, College of Engineering, 2015.
- Jp Yadav et al., Power Enhancement of Gas Turbine Plant by Intake Air Fog Cooling, Jun. 2015.
- Mee Industries: Inlet Air Fogging Systems for Oil, Gas and Petrochemical Processing, Verdict Media Limited Copyright 2020.
- M. Ahmadzadehtalatapeh et al. Performance enhancement of gas turbine units by retrofitting with inlet air cooling technologies (IACs): an hour-by-hour simulation study, Journal of the Brazilian Society of Mechanical Sciences and Engineering, Mar. 2020.
- Advances in Popular Torque-Link Solution Offer OEMs Greater Benefit, Jun. 21, 2018.
- Fmmanuel Akita et al., Mewbourne College of Earth & Energy, Society of Petroleum Engineers; Drilling Systems Automation Technical Section (DSATS); 2019.
- PowerShelter Kit II, nooutage.com, Sep. 6, 2019.
- EMPengineering.com, HEMP Resistant Electrical Generators / Hardened Structures HEMP/GMD Shielded Generators, Virginia, Nov. 3, 2012.
- Blago Minovski, Coupled Simulations of Cooling and Engine Systems for Unsteady Analysis of the Benefits of Thermal Engine Encapsulation, Department of Applied Mechanics, Chalmers University of Technology Göteborg, Sweden 2015.
- J. Porteiro et al., Feasibility of a new domestic CHP trigeneration with heat pump: II. Availability analysis. Design and development, Applied Thermal Engineering 24 (2004) 1421-1429.
- ISM, What is Cracking Pressure, 2019.
- Swagelok, The right valve for controlling flow direction? Check, 2016.
- Technology.org, Check valves how do they work and what are the main type, 2018.

* cited by examiner

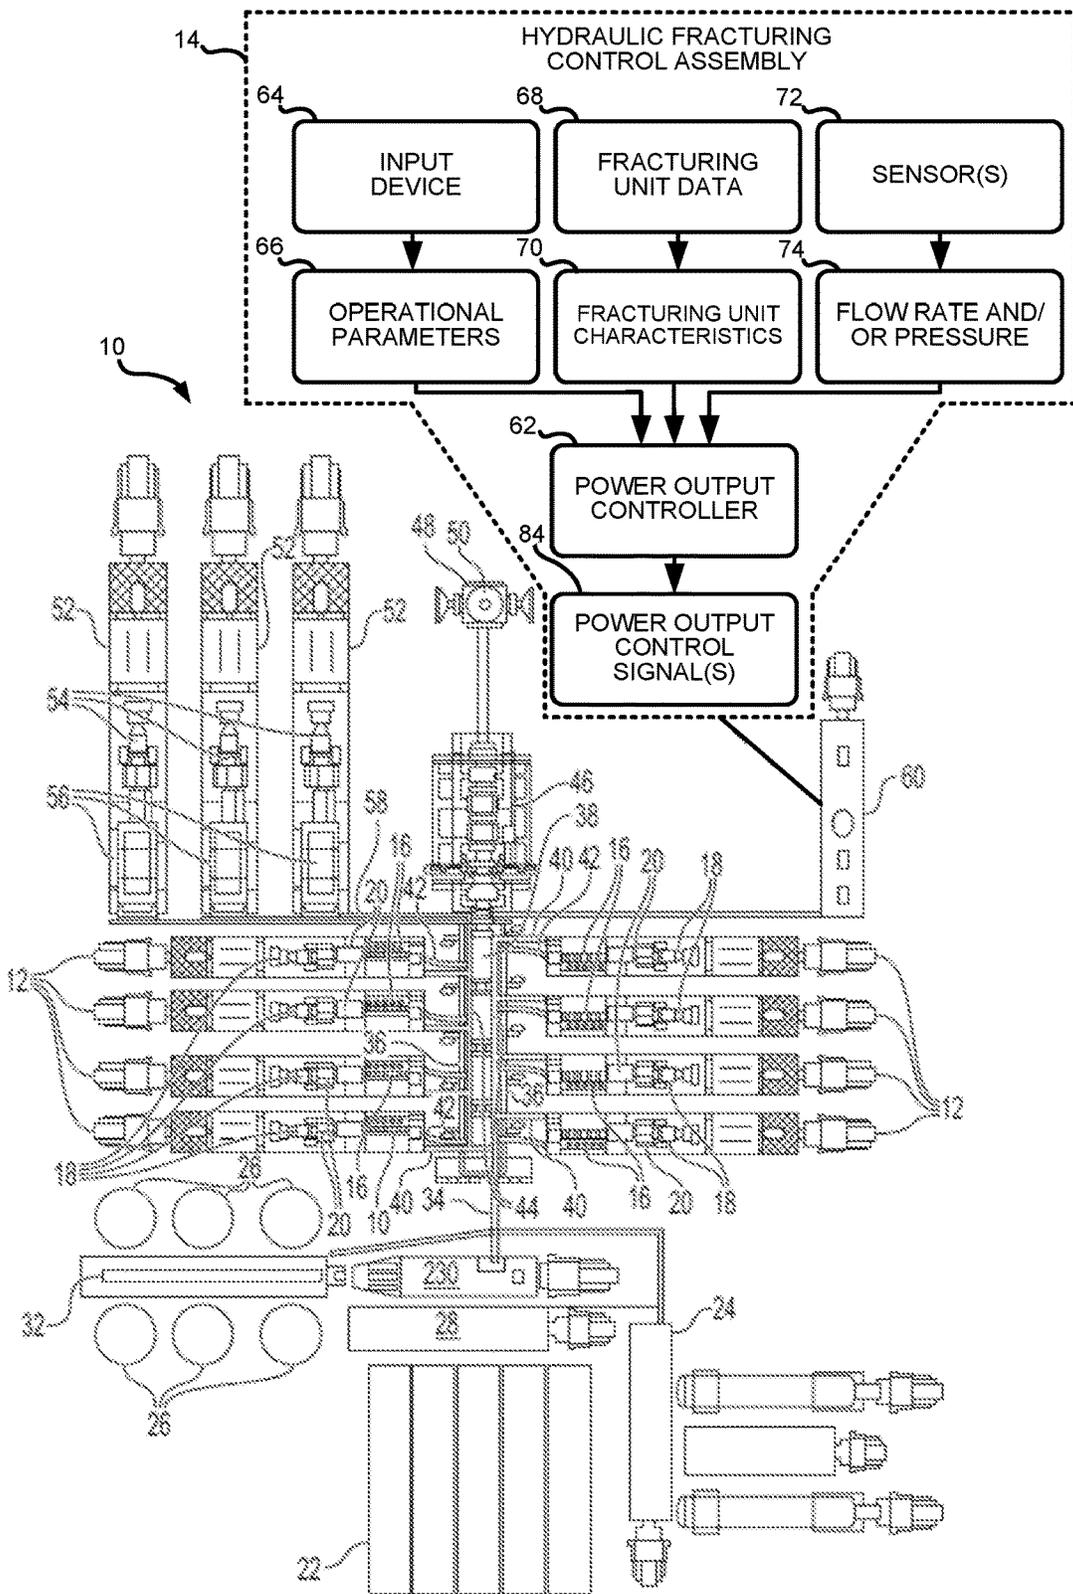


FIG. 1

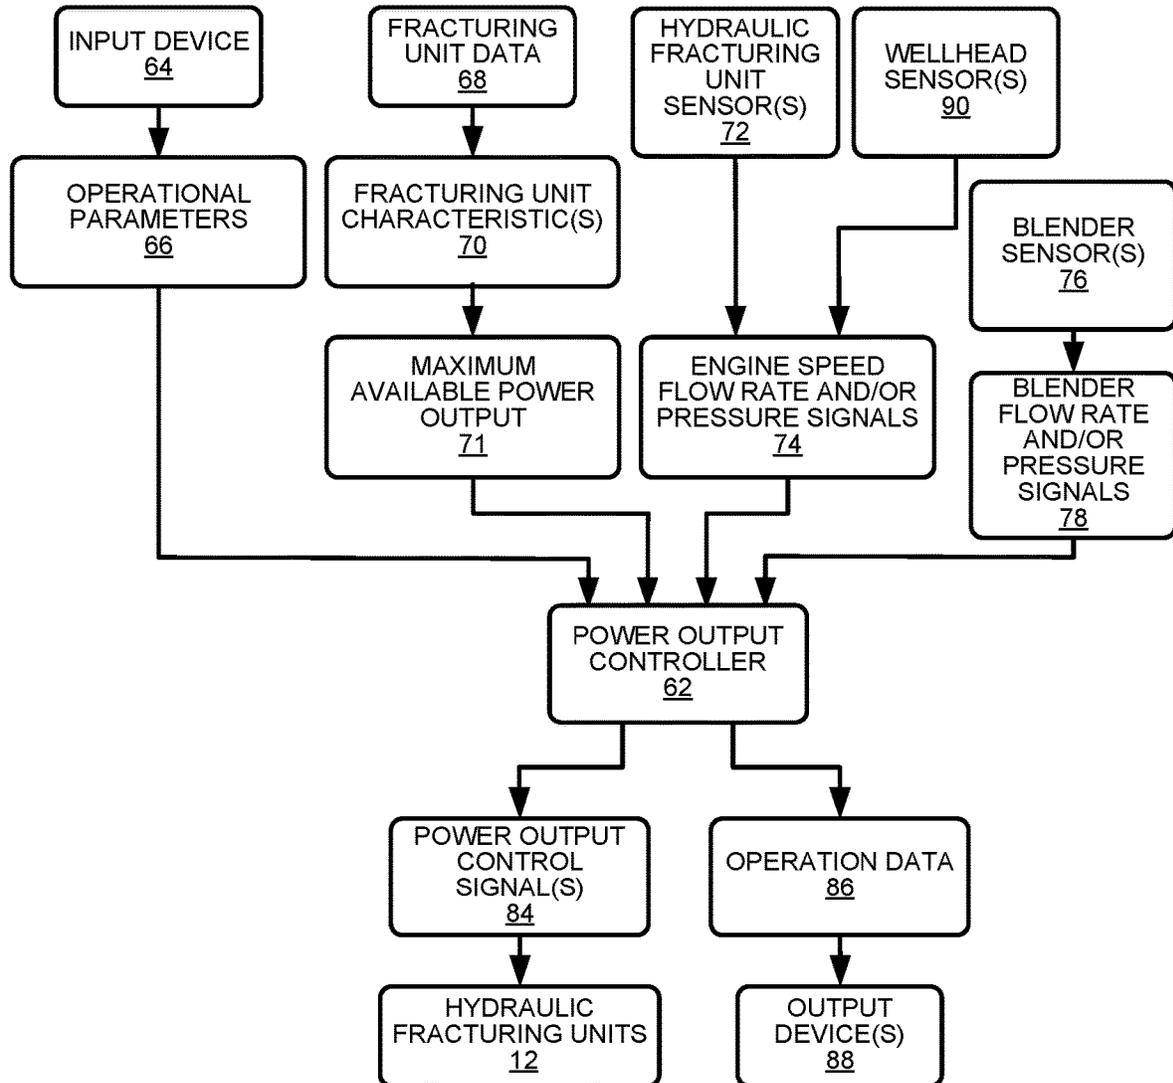


FIG. 2

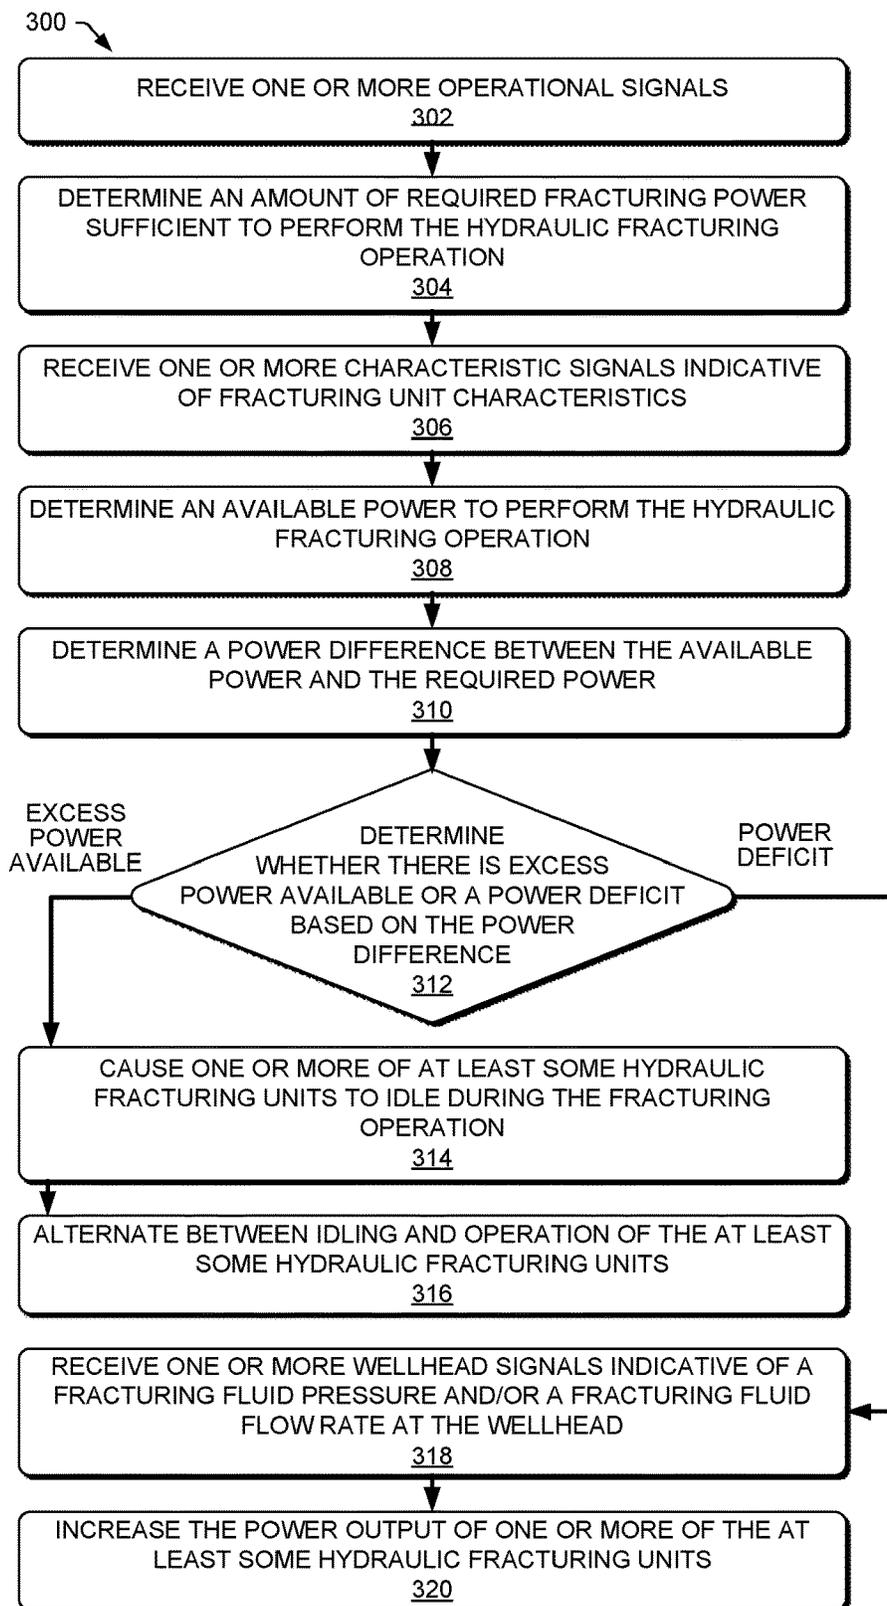


FIG. 3

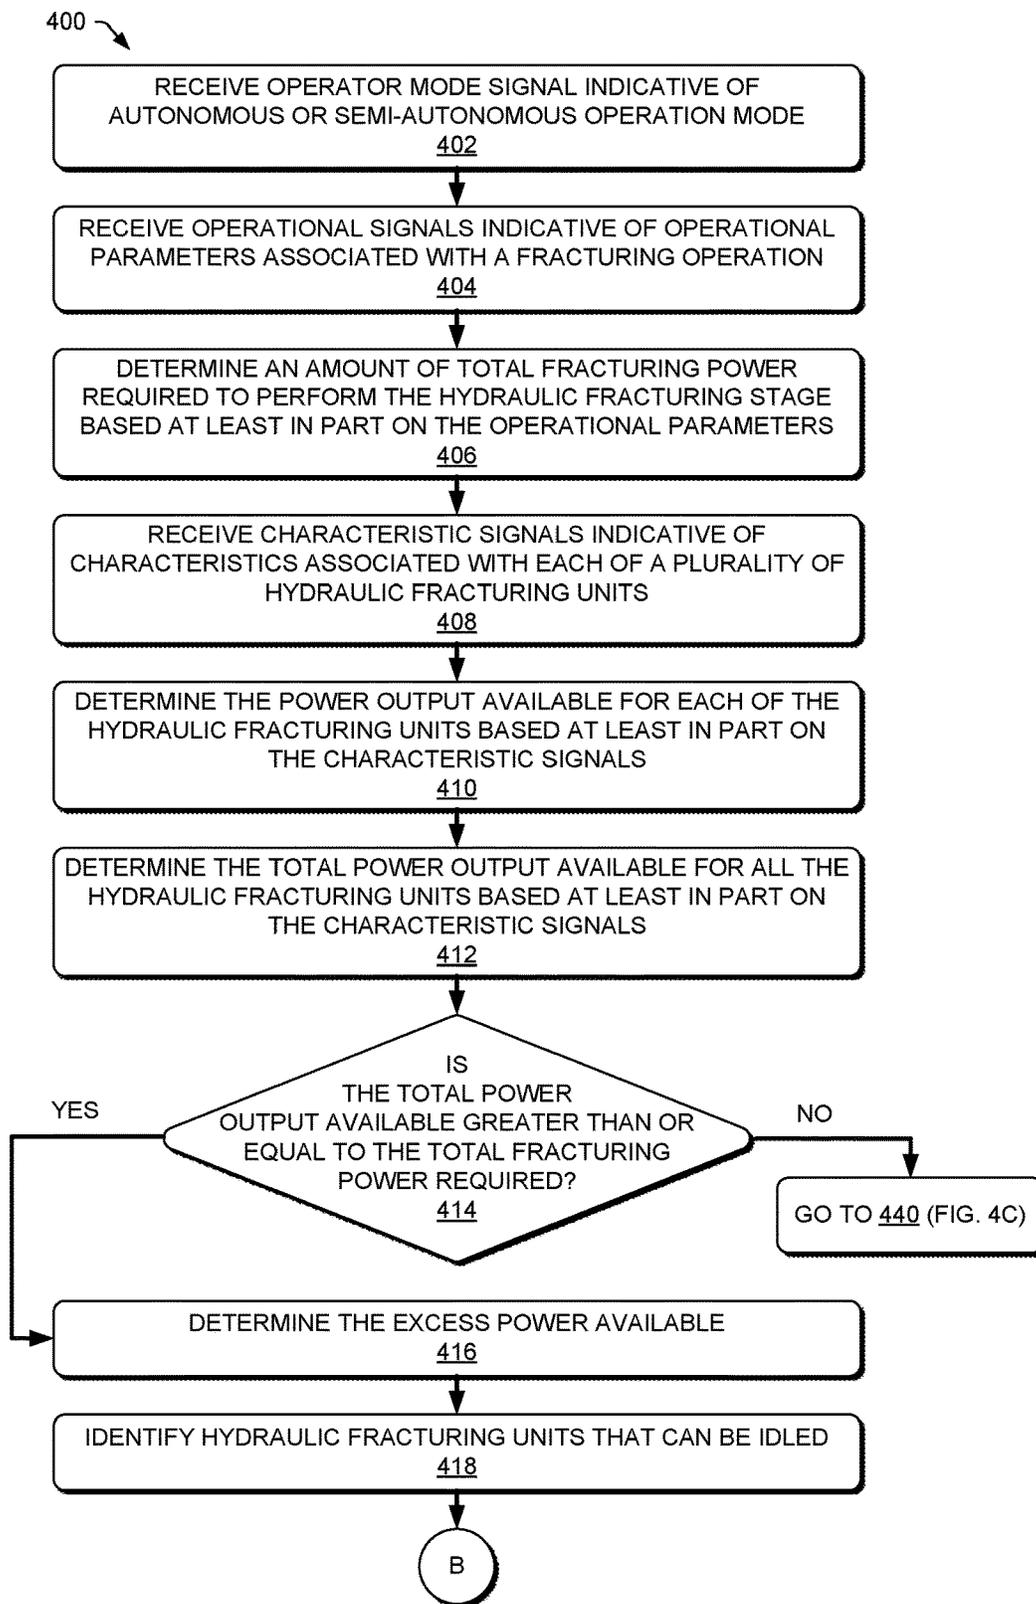


FIG. 4A

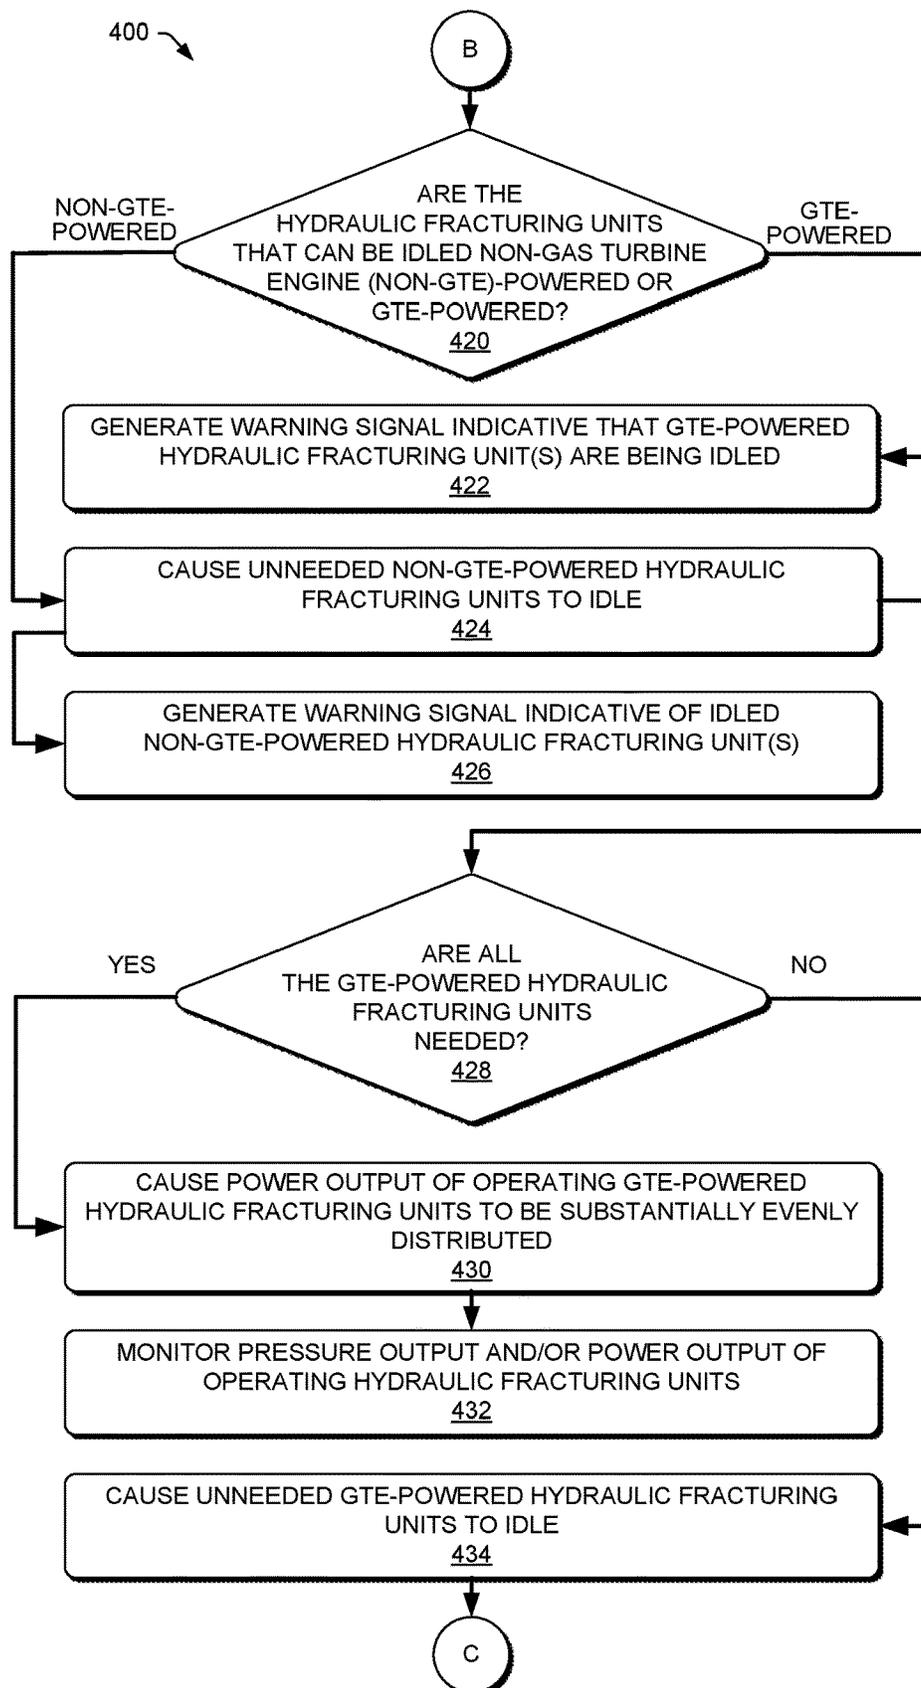


FIG. 4B

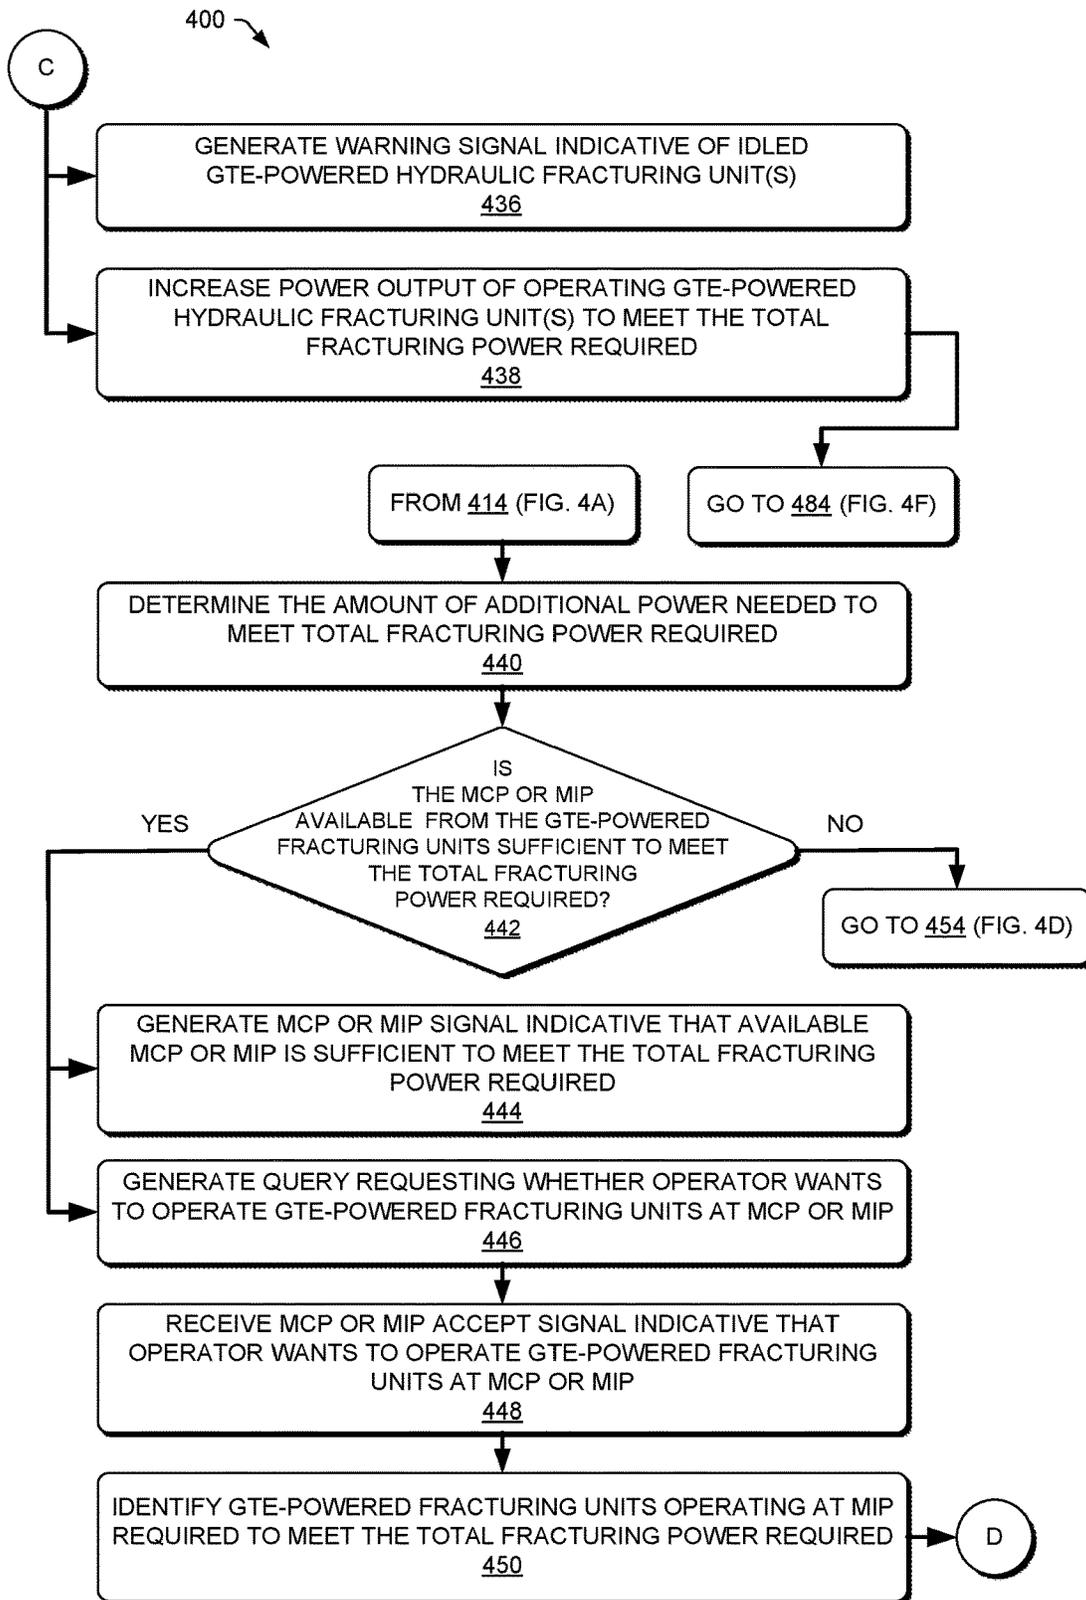


FIG. 4C

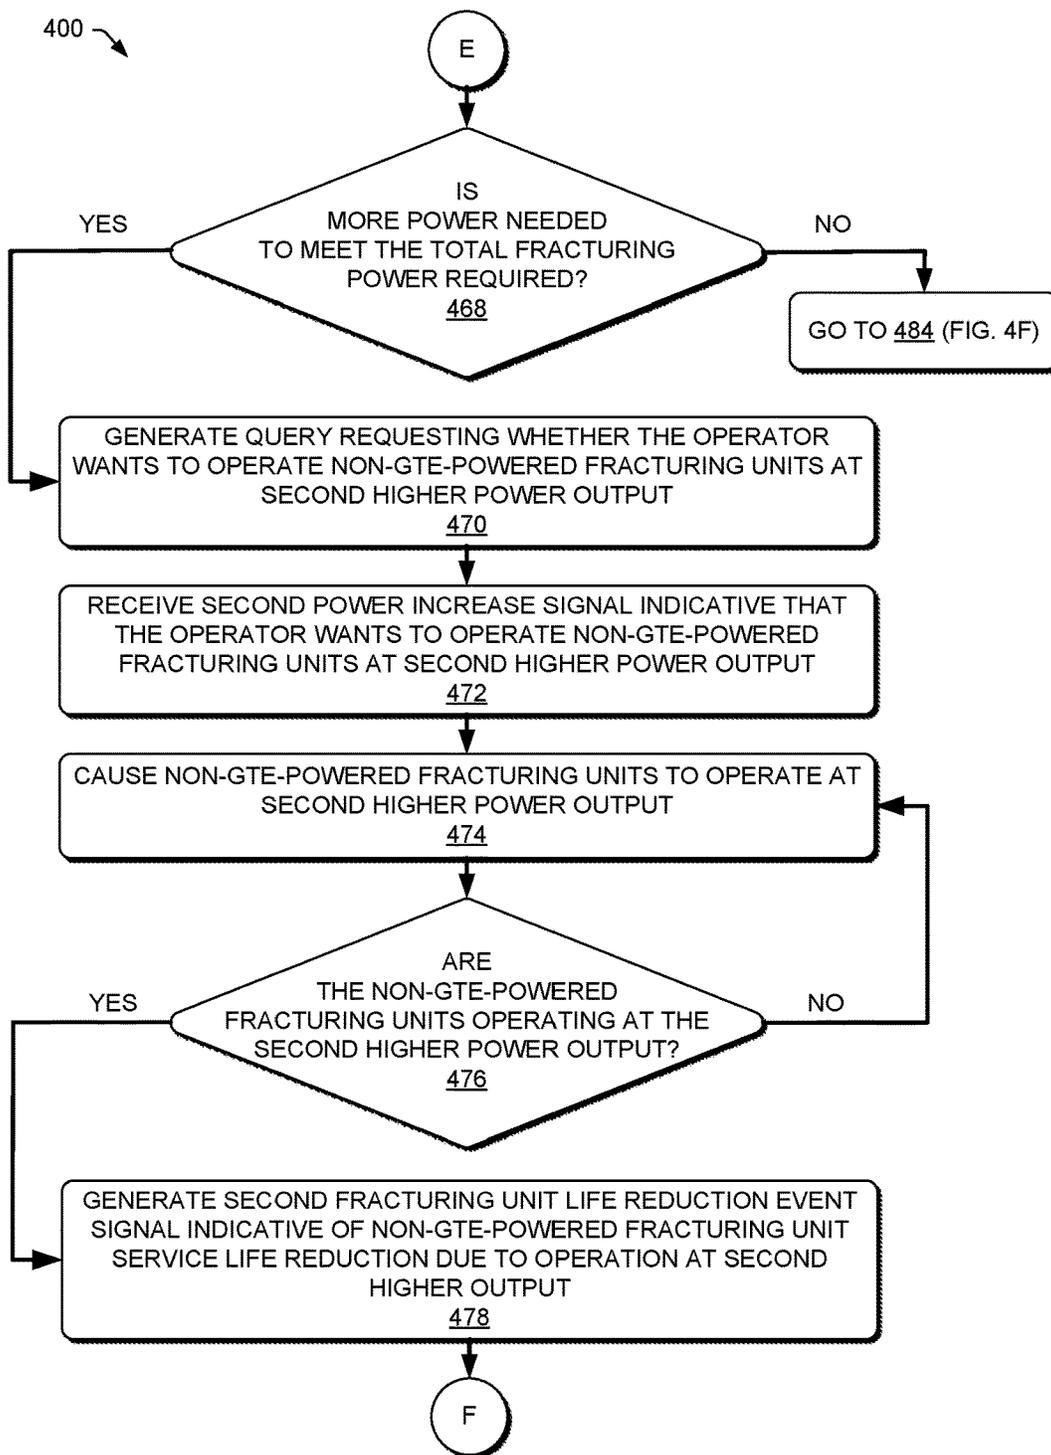


FIG. 4E

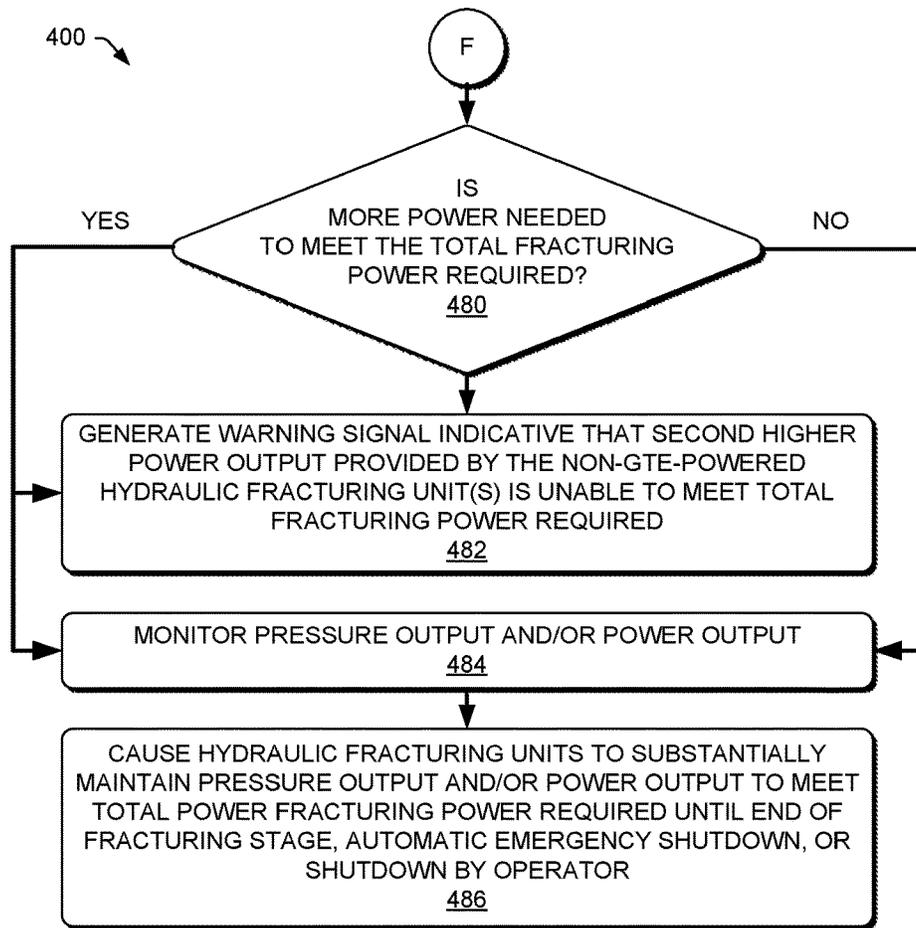


FIG. 4F

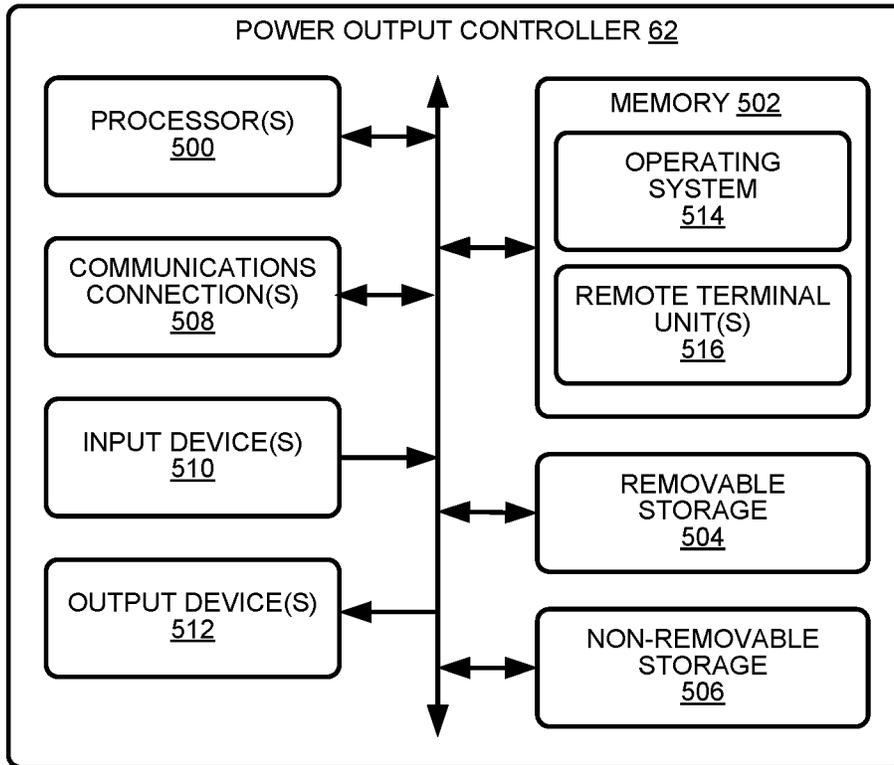


FIG. 5

**SYSTEMS AND METHODS TO
AUTONOMOUSLY OPERATE HYDRAULIC
FRACTURING UNITS**

PRIORITY CLAIM

This is a continuation of U.S. Non-Provisional application Ser. No. 18/087,181, filed Dec. 22, 2022, titled "SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS," which is a continuation of U.S. Non-Provisional application Ser. No. 17/942,382, filed Sep. 12, 2022, titled "SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS," now U.S. Pat. No. 11,566,505, issued Jan. 31, 2023, which is a continuation of U.S. Non-Provisional application Ser. No. 17/173,320, filed Feb. 11, 2021, titled "SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS," now U.S. Pat. No. 11,473,413, issued Oct. 18, 2022, which claims priority to and the benefit of U.S. Provisional Application No. 62/705,354, filed Jun. 23, 2020, titled "SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS," the disclosures of which are incorporated herein by reference in their entireties.

TECHNICAL FIELD

The present disclosure relates to systems and methods for operating hydraulic fracturing units and, more particularly, to systems and methods for autonomously operating hydraulic fracturing units to pump fracturing fluid into a wellhead.

BACKGROUND

Hydraulic fracturing is an oilfield operation that stimulates the production of hydrocarbons, such that the hydrocarbons may more easily or readily flow from a subsurface formation to a well. For example, a hydraulic fracturing system may be configured to fracture a formation by pumping a fracturing fluid into a well at high pressure and high flow rates. Some fracturing fluids may take the form of a slurry including water, proppants, and/or other additives, such as thickening agents and/or gels. The slurry may be forced via one or more pumps into the formation at rates faster than can be accepted by the existing pores, fractures, faults, or other spaces within the formation. As a result, pressure may build rapidly to the point where the formation may fail and may begin to fracture. By continuing to pump the fracturing fluid into the formation, existing fractures in the formation are caused to expand and extend in directions away from a well bore, thereby creating additional flow paths to the well bore. The proppants may serve to prevent the expanded fractures from closing or may reduce the extent to which the expanded fractures contract when pumping of the fracturing fluid is ceased. Once the formation is fractured, large quantities of the injected fracturing fluid may be allowed to flow out of the well, and the production stream of hydrocarbons may be obtained from the formation.

Prime movers may be used to supply power to hydraulic fracturing pumps for pumping the fracturing fluid into the formation. For example, a plurality of gas turbine engines and/or reciprocating-piston engines may each be mechanically connected to a corresponding hydraulic fracturing pump via a transmission and operated to drive the hydraulic fracturing pump. The prime mover, hydraulic fracturing

pump, transmission, and auxiliary components associated with the prime mover, hydraulic fracturing pump, and transmission may be connected to a common platform or trailer for transportation and set-up as a hydraulic fracturing unit at the site of a fracturing operation, which may include up to a dozen or more of such hydraulic fracturing units operating together to perform the fracturing operation.

Partly due to the large number of components of a hydraulic fracturing system, it may be difficult to efficiently and effectively control the output of the numerous hydraulic fracturing units and related components. For example, at times during a fracturing operation, there may be an excess or deficit of power available to perform the fracturing operation. Thus, when excess power exists, efficiency may be reduced by operating more of the hydraulic fracturing units than necessary to perform the fracturing operation. Alternatively, an operator of the hydraulic fracturing system may idle one or more of the hydraulic fracturing units to save energy. However, operating the prime movers at idle for an extended period of time may result in premature wear of the prime mover requiring more frequent maintenance. If, alternatively, a deficit of available power exists, an operator may cause the prime movers to operate at maximum power (or close to maximum power), which may lead to premature wear or failure of the prime mover, resulting in maintenance or replacement, as well as undesirable down time for the fracturing operation. In addition, because the conditions associated with a fracturing operation may often change during the fracturing operation, the power necessary to continue the fracturing operation may change over time, resulting in changes in the required power output to perform the fracturing operation. In such situations, it may be difficult for an operator to continuously monitor and change the outputs of the prime movers according to the changing conditions.

Accordingly, Applicant has recognized a need for systems and methods that provide improved operation of hydraulic fracturing units during hydraulic fracturing operations. The present disclosure may address one or more of the above-referenced drawbacks, as well as other possible drawbacks.

SUMMARY

As referenced above, due to the complexity of a hydraulic fracturing operation and the high number of machines involved, it may be difficult to efficiently and effectively control the power output of the prime movers and related components to perform the hydraulic fracturing operation, particularly during changing conditions. In addition, manual control of the hydraulic fracturing units by an operator may result in delayed or ineffective responses to instances of excesses and deficits of available power of the prime movers occurring during the hydraulic fracturing operation. Insufficiently prompt responses to such events may lead to inefficiencies or premature equipment wear or damage, which may reduce efficiency and lead to delays in completion of a hydraulic fracturing operation.

The present disclosure generally is directed to systems and methods for semi- or fully-autonomously operating hydraulic fracturing units to pump fracturing fluid into a wellhead. For example, in some embodiments, the systems and methods may provide semi- or fully-autonomous operation of a plurality of hydraulic fracturing units, for example, including controlling the power output of prime movers of the hydraulic fracturing units during operation of the plurality of hydraulic fracturing units for completion of a hydraulic fracturing operation.

According to some embodiments, a method of operating a plurality of hydraulic fracturing units, each of the hydraulic fracturing units including a hydraulic fracturing pump to pump fracturing fluid into a wellhead and an internal combustion engine to drive the hydraulic fracturing pump, may include receiving, at a power output controller, one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation. The method also may include determining, via the power output controller based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation. The method further may include receiving, at the power output controller, one or more characteristic signals indicative of fracturing unit characteristics associated with at least some of the plurality of hydraulic fracturing units. The method still further may include determining, via the power output controller based at least in part on the one or more characteristic signals, an available power to perform the hydraulic fracturing operation. The method also may include determining, via the power output controller, a power difference between the available power and the required power, and controlling operation of the at least some of the plurality of hydraulic fracturing units based at least in part on the power difference.

According to some embodiments, a hydraulic fracturing control assembly to operate a plurality of hydraulic fracturing units, each of the hydraulic fracturing units including a hydraulic fracturing pump to pump fracturing fluid into a wellhead and an internal combustion engine to drive the hydraulic fracturing pump, may include an input device configured to facilitate communication of one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation. The hydraulic fracturing control assembly also may include one or more sensors configured to generate one or more sensor signals indicative of one or more of a flow rate of fracturing fluid or a pressure associated with fracturing fluid. The hydraulic fracturing control assembly further may include a power output controller in communication with one or more of the plurality of hydraulic fracturing units, the input device, or the one or more sensors. The power output controller may be configured to receive the one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation. The power output controller also may be configured to determine, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation. The power output controller further may be configured to receive one or more characteristic signals indicative of fracturing unit characteristics associated with at least some of the plurality of hydraulic fracturing units. The power output controller still further may be configured to determine, based at least in part on the one or more characteristic signals, an available power to perform the hydraulic fracturing operation, and determine a power difference between the available power and the required power. The power output controller also may be configured to control operation of the at least some of the plurality of hydraulic fracturing units based at least in part on the power difference.

According to some embodiments, a hydraulic fracturing system may include a plurality of hydraulic fracturing units. Each of the hydraulic fracturing units may include a hydraulic

fracturing pump to pump fracturing fluid into a wellhead and an internal combustion engine to drive the hydraulic fracturing pump. The hydraulic fracturing system also may include an input device configured to facilitate communication of one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation, and one or more sensors configured to generate one or more sensor signals indicative of one or more of a flow rate of fracturing fluid or a pressure associated with fracturing fluid. The hydraulic fracturing system also may include a power output controller in communication with one or more of the plurality of hydraulic fracturing units, the input device, or the one or more sensors. The power output controller may be configured to receive the one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation. The power output controller also may be configured to determine, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation. The power output controller further may be configured to receive one or more characteristic signals indicative of fracturing unit characteristics associated with at least some of the plurality of hydraulic fracturing units. The power output controller still further may be configured to determine, based at least in part on the one or more characteristic signals, an available power to perform the hydraulic fracturing operation. The power output controller also may be configured to determine a power difference between the available power and the required power, and control operation of the at least some of the plurality of hydraulic fracturing units based at least in part on the power difference.

Still other aspects and advantages of these exemplary embodiments and other embodiments, are discussed in detail herein. Moreover, it is to be understood that both the foregoing information and the following detailed description provide merely illustrative examples of various aspects and embodiments, and are intended to provide an overview or framework for understanding the nature and character of the claimed aspects and embodiments. Accordingly, these and other objects, along with advantages and features of the present invention herein disclosed, will become apparent through reference to the following description and the accompanying drawings. Furthermore, it is to be understood that the features of the various embodiments described herein are not mutually exclusive and may exist in various combinations and permutations.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the embodiments of the present disclosure, are incorporated in and constitute a part of this specification, illustrate embodiments of the present disclosure, and together with the detailed description, serve to explain principles of the embodiments discussed herein. No attempt is made to show structural details of this disclosure in more detail than can be necessary for a fundamental understanding of the embodiments discussed herein and the various ways in which they can be practiced. According to common practice, the various features of the drawings discussed below are not necessarily drawn to scale. Dimensions of various features and elements in the drawings can be expanded or reduced to more clearly illustrate embodiments of the disclosure.

5

FIG. 1 schematically illustrates an example hydraulic fracturing system including a plurality of hydraulic fracturing units, and including a block diagram of a hydraulic fracturing control assembly according to embodiments of the disclosure.

FIG. 2 is a block diagram of an example hydraulic fracturing control assembly according to an embodiment of the disclosure.

FIG. 3 is a block diagram of an example method of operating a plurality of hydraulic fracturing units according to embodiments of the disclosure.

FIG. 4A is a block diagram of an example method of operating a plurality of hydraulic fracturing units according to embodiments of the disclosure.

FIG. 4B is a continuation of the block diagram of the example method of operating a plurality of hydraulic fracturing units shown in FIG. 4A, according to embodiments of the disclosure.

FIG. 4C is a continuation of the block diagram of the example method of operating a plurality of hydraulic fracturing units shown in FIGS. 4A and 4B, according to embodiments of the disclosure.

FIG. 4D is a continuation of the block diagram of the example method of operating a plurality of hydraulic fracturing units shown in FIGS. 4A, 4B, and 4C, according to embodiments of the disclosure.

FIG. 4E is a continuation of the block diagram of the example method of operating a plurality of hydraulic fracturing units shown in FIGS. 4A, 4B, 4C, and 4D, according to embodiments of the disclosure.

FIG. 4F is a continuation of the block diagram of the example method of operating a plurality of hydraulic fracturing units shown in FIGS. 4A, 4B, 4C, 4D, and 4E, according to embodiments of the disclosure.

FIG. 5 is a schematic diagram of an example power output controller configured to operate a plurality of hydraulic fracturing units according to embodiments of the disclosure.

DETAILED DESCRIPTION

The drawings include like numerals to indicate like parts throughout the several views, the following description is provided as an enabling teaching of exemplary embodiments, and those skilled in the relevant art will recognize that many changes may be made to the embodiments described. It also will be apparent that some of the desired benefits of the embodiments described can be obtained by selecting some of the features of the embodiments without utilizing other features. Accordingly, those skilled in the art will recognize that many modifications and adaptations to the embodiments described are possible and may even be desirable in certain circumstances. Thus, the following description is provided as illustrative of the principles of the embodiments and not in limitation thereof.

The phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. As used herein, the term “plurality” refers to two or more items or components. The terms “comprising,” “including,” “carrying,” “having,” “containing,” and “involving,” whether in the written description or the claims and the like, are open-ended terms, i.e., to mean “including but not limited to,” unless otherwise stated. Thus, the use of such terms is meant to encompass the items listed thereafter, and equivalents thereof, as well as additional items. The transitional phrases “consisting of” and “consisting essentially of,” are closed or semi-closed transitional phrases, respectively, with respect to any claims. Use of ordinal terms

6

such as “first,” “second,” “third,” and the like in the claims to modify a claim element does not by itself connote any priority, precedence, or order of one claim element over another or the temporal order in which acts of a method are performed, but are used merely as labels to distinguish one claim element having a certain name from another element having a same name (but for use of the ordinal term) to distinguish claim elements.

FIG. 1 schematically illustrates a top view of an example hydraulic fracturing system 10 including a plurality of hydraulic fracturing units 12, and including a block diagram of a hydraulic fracturing control assembly 14 according to embodiments of the disclosure. In some embodiments, one or more of the hydraulic fracturing units 12 may include a hydraulic fracturing pump 16 driven by an internal combustion engine 18, such as a gas turbine engine or a reciprocating-piston engine and/or a non-gas turbine engine, such as a reciprocating-piston diesel engine. For example, in some embodiments, each of the hydraulic fracturing units 12 may include a directly-driven turbine (DDT) hydraulic fracturing pump 16, in which the hydraulic fracturing pump 16 is connected to one or more GTEs that supply power to the respective hydraulic fracturing pump 16 for supplying fracturing fluid at high pressure and high flow rates to a formation. For example, the GTE may be connected to a respective hydraulic fracturing pump 16 via a transmission 20 (e.g., a reduction transmission) connected to a drive shaft, which, in turn, is connected to a driveshaft or input flange of a respective hydraulic fracturing pump 16, which may be a reciprocating hydraulic fracturing pump. Other types of engine-to-pump coupling arrangements are contemplated.

In some embodiments, one or more of the GTEs may be a dual-fuel or bi-fuel GTE, for example, capable of being operated using of two or more different types of fuel, such as natural gas and diesel fuel, although other types of fuel are contemplated. For example, a dual-fuel or bi-fuel GTE may be capable of being operated using a first type of fuel, a second type of fuel, and/or a combination of the first type of fuel and the second type of fuel. For example, the fuel may include gaseous fuels, such as, for example, compressed natural gas (CNG), natural gas, field gas, pipeline gas, methane, propane, butane, and/or liquid fuels, such as, for example, diesel fuel (e.g., #2 diesel), bio-diesel fuel, bio-fuel, alcohol, gasoline, gasohol, aviation fuel, and other fuels as will be understood by those skilled in the art. Gaseous fuels may be supplied by CNG bulk vessels, a gas compressor, a liquid natural gas vaporizer, line gas, and/or well-gas produced natural gas. Other types and associated fuel supply sources are contemplated. The one or more internal combustion engines 18 may be operated to provide horsepower to drive the transmission 20 connected to one or more of the hydraulic fracturing pumps 16 to safely and successfully fracture a formation during a well stimulation project or fracturing operation.

In some embodiments, the fracturing fluid may include, for example, water, proppants, and/or other additives, such as thickening agents and/or gels. For example, proppants may include grains of sand, ceramic beads or spheres, shells, and/or other particulates, and may be added to the fracturing fluid, along with gelling agents to create a slurry as will be understood by those skilled in the art. The slurry may be forced via the hydraulic fracturing pumps 16 into the formation at rates faster than can be accepted by the existing pores, fractures, faults, or other spaces within the formation. As a result, pressure may build rapidly to the point where the formation fails and begins to fracture. By continuing to pump the fracturing fluid into the formation, existing frac-

tures in the formation may be caused to expand and extend in directions away from a well bore, thereby creating additional flow paths to the well. The proppants may serve to prevent the expanded fractures from closing or may reduce the extent to which the expanded fractures contract when pumping of the fracturing fluid is ceased. Once the well is fractured, large quantities of the injected fracturing fluid may be allowed to flow out of the well, and the water and any proppants not remaining in the expanded fractures may be separated from hydrocarbons produced by the well to protect downstream equipment from damage and corrosion. In some instances, the production stream may be processed to neutralize corrosive agents in the production stream resulting from the fracturing process.

In the example shown in FIG. 1, the hydraulic fracturing system 10 may include one or more water tanks 22 for supplying water for fracturing fluid, one or more chemical additive units 24 for supplying gels or agents for adding to the fracturing fluid, and one or more proppant tanks 26 (e.g., sand tanks) for supplying proppants for the fracturing fluid. The example fracturing system 10 shown also includes a hydration unit 28 for mixing water from the water tanks 22 and gels and/or agents from the chemical additive units 24 to form a mixture, for example, gelled water. The example shown also includes a blender 30, which receives the mixture from the hydration unit 28 and proppants via conveyers 32 from the proppant tanks 26. The blender 30 may mix the mixture and the proppants into a slurry to serve as fracturing fluid for the hydraulic fracturing system 10. Once combined, the slurry may be discharged through low-pressure hoses 34, which convey the slurry into two or more low-pressure lines 36 in a frac manifold 38. In the example shown, the low-pressure lines 36 in the frac manifold 38 feed the slurry to the hydraulic fracturing pumps 16 through low-pressure suction hoses 40.

The hydraulic fracturing pumps 16, driven by the respective internal combustion engines 18, discharge the slurry (e.g., the fracturing fluid including the water, agents, gels, and/or proppants) at high flow rates and/or high pressures through individual high-pressure discharge lines 42 into two or more high-pressure flow lines 44, sometimes referred to as "missiles," on the fracturing manifold 38. The flow from the high-pressure flow lines 44 is combined at the fracturing manifold 38, and one or more of the high-pressure flow lines 44 provide fluid flow to a manifold assembly 46, sometimes referred to as a "goat head." The manifold assembly 46 delivers the slurry into a wellhead manifold 48. The wellhead manifold 48 may be configured to selectively divert the slurry to, for example, one or more wellheads 50 via operation of one or more valves. Once the fracturing process is ceased or completed, flow returning from the fractured formation discharges into a flowback manifold, and the returned flow may be collected in one or more flowback tanks as will be understood by those skilled in the art.

As schematically depicted in FIG. 1, one or more of the components of the fracturing system 10 may be configured to be portable, so that the hydraulic fracturing system 10 may be transported to a well site, quickly assembled, operated for a relatively short period of time until completion of a fracturing operation, at least partially disassembled, and transported to another location of another well site for use. For example, the components may be carried by trailers and/or incorporated into trucks, so that they may be easily transported between well sites.

As shown in FIG. 1, some embodiments of the hydraulic fracturing system 10 may include one or more electrical power sources 52 configured to supply electrical power for

operation of electrically powered components of the hydraulic fracturing system 10. For example, one or more of the electrical power sources 52 may include an internal combustion engine 54 (e.g., a GTE or a non-GTE engine, such as a reciprocating-piston engine) provided with a source of fuel (e.g., gaseous fuel and/or liquid fuel) and configured to drive a respective electrical power generation device 56 to supply electrical power to the hydraulic fracturing system 10. In some embodiments, one or more of the hydraulic fracturing units 12 may include electrical power generation capability, such as an auxiliary internal combustion engine and an auxiliary electrical power generation device driven by the auxiliary internal combustion engine. As shown in FIG. 1, some embodiments of the hydraulic fracturing system 10 may include electrical power lines 56 for supplying electrical power from the one or more electrical power sources 52 to one or more of the hydraulic fracturing units 12.

Some embodiments also may include a data center 60 configured to facilitate receipt and transmission of data communications related to operation of one or more of the components of the hydraulic fracturing system 10. Such data communications may be received and/or transmitted via hard-wired communications cables and/or wireless communications, for example, according to known communications protocols as will be understood by those skilled in the art. For example, the data center 60 may contain at least some components of the hydraulic fracturing control assembly 14, such as a power output controller 62 configured to receive signals from components of the hydraulic fracturing system 10 and/or communicate control signals to components of the hydraulic fracturing system 10, for example, to at least partially control operation of one or more components of the hydraulic fracturing system 10, such as, for example, the internal combustion engines 18, the transmissions 20, and/or the hydraulic fracturing pumps 16 of the hydraulic fracturing units 12, the chemical additive units 24, the hydration units 28, the blender 30, the conveyers 32, the fracturing manifold 38, the manifold assembly 46, the wellhead manifold 48, and/or any associated valves, pumps, and/or other components of the hydraulic fracturing system 10.

FIGS. 1 and 2 also include block diagrams of example hydraulic fracturing control assemblies 14 according to embodiments of the disclosure. Although FIGS. 1 and 2 depict certain components as being part of the example hydraulic fracturing control assemblies 14, one or more of such components may be separate from the hydraulic fracturing control assemblies 14. In some embodiments, the hydraulic fracturing control assembly 14 may be configured to semi- or fully-autonomously monitor and/or control operation of one or more of the hydraulic fracturing units 12 and/or other components of the hydraulic fracturing system 10, for example, as described herein. For example, the hydraulic fracturing control assembly 14 may be configured to operate a plurality of the hydraulic fracturing units 12, each of which may include a hydraulic fracturing pump 16 to pump fracturing fluid into a wellhead 50 and an internal combustion engine 18 to drive the hydraulic fracturing pump 16 via the transmission 20.

As shown in FIGS. 1 and 2, some embodiments of the hydraulic fracturing control assembly 14 may include an input device 64 configured to facilitate communication of operational parameters 66 to the power output controller 62. In some embodiments, the input device 64 may include a computer configured to provide one or more operational parameters 66 to the power output controller 62, for example, from a location remote from the hydraulic frac-

turing system **10** and/or a user input device, such as a keyboard linked to a display associated with a computing device, a touchscreen of a smartphone, a tablet, a laptop, a handheld computing device, and/or other types of input devices. In some embodiments, the operational parameters **66** may include, but are not limited to, a target flow rate, a target pressure, a maximum flow rate, a maximum available power output, and/or a minimum flow rate associated with fracturing fluid supplied to the wellhead **50**. In some examples, one or more operators associated with a hydraulic fracturing operation performed by the hydraulic fracturing system **10** may provide one more of the operational parameters **66** to the power output controller **62**, and/or one or more of the operational parameters **66** may be stored in computer memory and provided to the power output controller **62** upon initiation of at least a portion of the hydraulic fracturing operation.

For example, an equipment profiler (e.g., a fracturing unit profiler) may calculate, record, store, and/or access data related each of the hydraulic fracturing units **12** including fracturing unit characteristics **70**, which may include, but not limited to, fracturing unit data including, maintenance data associated with the hydraulic fracturing units **12** (e.g., maintenance schedules and/or histories associated with the hydraulic fracturing pump **16**, the internal combustion engine **18**, and/or the transmission **20**), operation data associated with the hydraulic fracturing units **12** (e.g., historical data associated with horsepower (e.g., hydraulic horsepower), fluid pressures, fluid flow rates, etc. associated with operation of the hydraulic fracturing units **12**), data related to the transmissions **20** (e.g., hours of operation, efficiency, and/or installation age), data related to the internal combustion engines **18** (e.g., hours of operation, maximum rated available power output (e.g., hydraulic horsepower), and/or installation age), information related to the hydraulic fracturing pumps **16** (e.g., hours of operation, plunger and/or stroke size, maximum speed, efficiency, health, and/or installation age), equipment health ratings (e.g., pump, engine, and/or transmission condition), and/or equipment alarm history (e.g., life reduction events, pump cavitation events, pump pulsation events, and/or emergency shutdown events). In some embodiments, the fracturing unit characteristics **70** may include, but are not limited to minimum flow rate, maximum flow rate, harmonization rate, pump condition, and/or the maximum available power output **71** (e.g., the maximum rated available power output (e.g., hydraulic horsepower) of the internal combustion engines **18**).

In the embodiments shown in FIGS. **1** and **2**, the hydraulic fracturing control assembly **14** may also include one or more sensors **72** configured to generate one or more sensor signals **74** indicative of a flow rate of fracturing fluid supplied by a respective one of the hydraulic fracturing pump **16** of a hydraulic fracturing unit **12** and/or supplied to the wellhead **50**, a pressure associated with fracturing fluid provided by a respective hydraulic fracturing pump **16** of a hydraulic fracturing unit **12** and/or supplied to the wellhead **50**, and/or an engine speed associated with operation of a respective internal combustion engine **18** of a hydraulic fracturing unit **12**. For example, one or more sensors **72** may be connected to one or more of the hydraulic fracturing units **12** and may be configured to generate signals indicative of a fluid pressure supplied by an individual hydraulic fracturing pump **16** of a hydraulic fracturing unit **12**, a flow rate associated with fracturing fluid supplied by a hydraulic fracturing pump **16** of a hydraulic fracturing unit **12**, and/or an engine speed of an internal combustion engine **18** of a

hydraulic fracturing unit **12**. In some examples, one or more of the sensors **72** may be connected to the wellhead **50** and may be configured to generate signals indicative of fluid pressure of hydraulic fracturing fluid at the wellhead **50** and/or a flow rate associated with the fracturing fluid at the wellhead **50**. Other sensors (e.g., other sensor types for providing similar or different information) at the same or other locations of the hydraulic fracturing system **10** are contemplated.

As shown in FIG. **2**, in some embodiments, the hydraulic fracturing control assembly **14** also may include one or more blender sensors **76** associated with the blender **30** and configured to generate blender signals **78** indicative of an output of the blender **30**, such as, for example, a flow rate and/or a pressure associated with fracturing fluid supplied to the hydraulic fracturing units **12** by the blender **30**. Operation of one or more of the hydraulic fracturing units **12** may be controlled, for example, to prevent the hydraulic fracturing units **12** from supplying a greater flow rate of fracturing fluid to the wellhead **50** than the flow rate of fracturing fluid supplied by the blender **30**, which may disrupt the fracturing operation and/or damage components of the hydraulic fracturing units **12** (e.g., the hydraulic fracturing pumps **16**).

As shown in FIGS. **1** and **2**, some embodiments of the hydraulic fracturing control assembly **14** may include the power output controller **62**, which may be in communication with the plurality of hydraulic fracturing units **12**, the input device **64**, and/or one or more of the sensors **72** and/or **76**. For example, communications may be received and/or transmitted between the power output controller **62**, the hydraulic fracturing units **12**, and/or the sensors **72** and/or **76**, via hard-wired communications cables and/or wireless communications, for example, according to known communications protocols, as will be understood by those skilled in the art.

In some embodiments, the power output controller **62** may be configured to receive one or more operational parameters **66** associated with pumping fracturing fluid into the one or more wellheads **50**. For example, the operational parameters **66** may include a target flow rate, a target pressure, a maximum pressure, a maximum flow rate, a duration of fracturing operation, a volume of fracturing fluid to supply to the wellhead **50**, and/or a total work performed during the fracturing operation, etc. The power output controller **62** also may be configured to receive one or more fracturing unit characteristics **70**, for example, associated with each of the hydraulic fracturing pumps **16** and/or the internal combustion engines **18** of the respective hydraulic fracturing units **12**. As described previously herein, in some embodiments, the fracturing unit characteristics **70** may include a minimum flow rate, a maximum flow rate, a harmonization rate, a pump condition **82** (individually or collectively), an internal combustion engine condition, a maximum power output of the internal combustion engines **18** (e.g., the maximum rated power output) provided by the corresponding hydraulic fracturing pump **16** and/or internal combustion engine **18** of a respective hydraulic fracturing unit **12**. The fracturing unit characteristics **70** may be provided by an operator, for example, via the input device **64** and/or via a fracturing unit profiler, as described previously herein.

In some embodiments, the power output controller **62** may be configured to determine whether the hydraulic fracturing units **12** have a capacity sufficient to achieve the operational parameters **66**. For example, the power output controller **62** may be configured to make such determinations based at least in part on one or more of the fracturing unit characteristics **70**, which the power output controller **62**

may use to calculate (e.g., via summation) the collective capacity of the hydraulic fracturing units **12** to supply a sufficient flow rate and/or a sufficient pressure to achieve the operational parameters **66** at the wellhead **50**. For example, the power output controller **62** may be configured to determine an available power to perform the hydraulic fracturing operation (e.g., hydraulic horsepower) and/or a total pump flow rate by combining at least one of the fracturing unit characteristics **70** for each of the plurality of hydraulic fracturing pumps **16** and/or internal combustion engines **18**, and comparing the available power to a required fracturing power sufficient to perform the hydraulic fracturing operation. In some embodiments, determining the available power may include adding the maximum available power output of each of the internal combustion engines **18**.

In some embodiments, the power output controller **62** may be configured to receive one or more operational signals indicative of operational parameters **66** associated with pumping fracturing fluid into a wellhead **50** according to performance of a hydraulic fracturing operation. The power output controller **62** also may be configured to determine, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation. The power output controller **62** further may be configured to receive one or more characteristic signals indicative of the fracturing unit characteristics **70** associated with at least some of the plurality of hydraulic fracturing units **12**. The power output controller **62** still further may be configured to determine, based at least in part on the one or more characteristic signals, an available power to perform the hydraulic fracturing operation. The power output controller **62** also may be configured to determine a power difference between the available power and the required power, and control operation of the at least some of the hydraulic fracturing units **12** (e.g., including the internal combustion engines **18**) based at least in part on the power difference.

In some embodiments, the power output controller **62** may be configured to cause one or more of the at least some hydraulic fracturing units **12** to idle during the fracturing operation, for example, when the power difference is indicative of excess power available to perform the hydraulic fracturing operation. For example, the power output controller **62** may be configured to generate one or more power output control signals **84** to control operation of the hydraulic fracturing units **12**, including the internal combustion engines **18**. In some embodiments, the power output controller **62** may be configured to idle at least a first one of the hydraulic fracturing units **12** (e.g., the associated internal combustion engine **18**) while operating at least a second one of the hydraulic fracturing units **12**, wait a period of time, and idle at least a second one of the hydraulic fracturing units while operating the first one of the hydraulic fracturing units **12**. For example, the power output controller **62** may be configured to cause alternating between idling and operation of the hydraulic fracturing units **12** to reduce idling time for any one of the hydraulic fracturing units. This may reduce or prevent wear and/or damage to the internal combustion engines **18** of the associated hydraulic fracturing units **12** due to extended idling periods.

In some embodiments, the power output controller **62** may be configured to receive one or more wellhead signals **74** indicative of a fracturing fluid pressure at the wellhead **50** and/or a fracturing fluid flow rate at the wellhead **50**, and control idling and operation of the at least some hydraulic fracturing units based at least in part on the one or more wellhead signals **74**. In this example manner, the power

output controller **62** may be able to dynamically adjust (e.g., semi- or fully-autonomously) the power outputs of the respective hydraulic fracturing units **12** in response to changing conditions associated with pumping fracturing fluid into the wellhead **50**. This may result in relatively more responsive and/or more efficient operation of the hydraulic fracturing system **10** as compared to manual operation by one or more operators, which in turn, may reduce machine wear and/or machine damage.

In some embodiments, when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, the power output controller **62** may be configured to increase a power output of one or more of the hydraulic fracturing units **12**, which in some embodiments may include respective gas turbine engines (e.g., the associated internal combustion engine **18**) to supply power to a respective hydraulic fracturing pump **14** of a respective hydraulic fracturing unit **12**. For example, the power output controller **62** may be configured to increase the power output of the hydraulic fracturing units **12** including a gas turbine engine by increasing the power output from a first power output ranging from about 80% to about 95% of maximum rated power output (e.g., about 90% of the maximum rated power output) to a second power output ranging from about 90% to about 110% of the maximum rated power output (e.g., about 105% or 108% of the maximum rated power output).

For example, in some embodiments, the power output controller **62** may be configured to increase the power output of the hydraulic fracturing units **12** including a gas turbine engine **18** by increasing the power output from a first power output ranging from about 80% to about 95% of maximum rated power output to a maximum continuous power (MCP) or a maximum intermittent power (MIP) available from the GTE-powered fracturing units **12**. In some embodiments, the MCP may range from about 95% to about 105% (e.g., about 100%) of the maximum rated power for a respective GTE-powered hydraulic fracturing unit **12**, and the MIP may range from about 100% to about 110% (e.g., about 105% or 108%) of the maximum rated power for a respective GTE-powered hydraulic fracturing unit **12**.

In some embodiments, for hydraulic fracturing units **12** including a non-GTE, such as a reciprocating-piston diesel engine, when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, the power output controller **62** may be configured to increase a power output of one or more of the hydraulic fracturing units **12** (e.g., the associated diesel engine) to supply power to a respective hydraulic fracturing pump **14** of a respective hydraulic fracturing unit **12**. For example, the power output controller **62** may be configured to increase the power output of the hydraulic fracturing units **12** including a diesel engine by increasing the power output from a first power output ranging from about 60% to about 90% of maximum rated power output (e.g., about 80% of the maximum rated power output) to a second power output ranging from about 70% to about 100% of the maximum rated power output (e.g., about 90% of the maximum rated power output).

In some embodiments, when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, the power output controller **62** may be configured to store operation data **86** associated with operation of hydraulic fracturing units **12** operated at an increased power output. Such operation data **86** may be communicated to one or more output devices **88**, for example, as previously described herein. In some examples, the operation data **86** may be communicated to a fracturing unit profiler for

storage. The fracturing unit profiler, in some examples, may use at least a portion of the operation data **86** to update a fracturing unit profile for one or more of the hydraulic fracturing units **12**, which may be used as fracturing unit characteristics **70** for the purpose of future fracturing operations.

In some examples, the power output controller **62** may calculate the required hydraulic power required to complete the fracturing operation (e.g., one or more fracturing stage) and may receive fracturing unit data **68** from a fracturing unit profiler for each hydraulic fracturing unit **12**, for example, to determine the available power output. The fracturing unit profiler associated with each fracturing unit **12** may be configured to take into account any detrimental conditions the hydraulic fracturing unit **12** has experienced, such as cavitation or high pulsation events, and reduce the available power output of that hydraulic fracturing unit **12**. The reduced available power output may be used by the power output controller **62** when determining a total power output available from all the hydraulic fracturing units **12** of the hydraulic fracturing system **10**. The power output controller **62** may be configured to cause utilization of hydraulic fracturing units **12** including non-GTE-engines (e.g., reciprocating piston-diesel engines) at 80% of maximum power output (e.g., maximum rated power output), and hydraulic fracturing units including a GTE at 90% of maximum power output (e.g., maximum rated power output). The power output controller **62** may be configured to subtracts the total available power output by the required power output, and determine if there is a power deficit or excess available power. If an excess of power is available, the power output controller **62** may be configured to cause some hydraulic fracturing units **12** to go to idle and only utilize hydraulic fracturing units **12** sufficient to achieve the previously mentioned power output percentages. Because, in some examples, operating the internal combustion engines **18** at idle for a prolonged period of time may not be advisable and may be detrimental to the health of the internal combustion engines **18**, the power output controller **62** may be configured to cause the internal combustion engines **18** to be idled for an operator-configurable time period before completely shutting down.

If there is a deficit of available power, the power output controller **62** may be configured to facilitate the provision of choices for selection by an operator for addressing the power output deficit, for example, via the input device **64**. For example, for hydraulic fracturing units **12** including a GTE, the GTE may be operated at maximum continuous power (e.g., 100% of the total power maximum power output) or at maximum intermittent power (MIP, e.g., ranging from about 105% to about 110% of the total maximum power output). If the increase the available power output is insufficient and other non-GTE-powered (e.g., diesel engine-powered) hydraulic fracturing units **12** are operating in combination with the GTE-powered hydraulic fracturing units **12**, the power output controller **62** may be configured to utilize additional non-GTE-powered hydraulic fracturing units **12** to achieve the required power output.

Because, in some examples, operating the hydraulic fracturing units **12** (e.g., the internal combustion engines **18**) at elevated power output levels may increase maintenance cycles, which may be recorded in the associated hydraulic fracturing unit profiler and/or the power output controller **62**, during the hydraulic fracturing operation, the power output controller **62** may be configured to substantially continuously (or intermittently) provide a preferred power output utilization of the internal combustion engines **18** and

may be configured to initiate operation of hydraulic fracturing units **12**, for example, to (1) reduce the power loading on the internal combustion engines **18** if an increase in fracturing fluid flow rate is required and/or (2) idle at least some of the internal combustion engines **18** if a reduction in fracturing fluid flow rate is experienced. In some examples, this operational strategy may increase the likelihood that the hydraulic fracturing units **12** are operated at a shared load and/or that a particular one or more of the hydraulic fracturing units **12** is not being over-utilized, which may result in premature maintenance and/or wear. It may not be desirable for operation hours for each of the hydraulic fracturing units **12** to be the same as one another, which might result in a substantially-simultaneous or concurrent fleet-wide maintenance being advisable, which would necessitate shut-down of the entire fleet for maintenance. In some embodiments, the power output controller **62** may be configured to stagger idling cycles associated with the hydraulic fracturing units **12** to reduce the likelihood or prevent maintenance being required substantially simultaneously.

FIGS. 3, 4A, 4B, 4C, 4D, 4E, and 4F are block diagrams of example methods **300** and **400** of operating a plurality of hydraulic fracturing units according to embodiments of the disclosure, illustrated as a collection of blocks in a logical flow graph, which represent a sequence of operations. In the context of software, the blocks represent computer-executable instructions stored on one or more computer-readable storage media that, when executed by one or more processors, perform the recited operations. Generally, computer-executable instructions include routines, programs, objects, components, data structures, and the like that perform particular functions or implement particular data types. The order in which the operations are described is not intended to be construed as a limitation, and any number of the described blocks can be combined in any order and/or in parallel to implement the methods.

FIG. 3 depicts a flow diagram of an embodiment of a method **300** of operating a plurality of hydraulic fracturing units, according to an embodiment of the disclosure. For example, the example method **300** may be configured to control operation of one or more hydraulic fracturing units depending, for example, on an amount of available power from operation of the hydraulic fracturing units and an amount of required fracturing power sufficient to perform a hydraulic fracturing operation, for example, as previously described herein.

The example method **300**, at **302**, may include receiving one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation. For example, an operator of the hydraulic fracturing system may use an input device to provide operational parameters associated with the fracturing operation. A power output controller may receive the operational parameters as a basis for controlling operation of the hydraulic fracturing units.

At **304**, the example method **300** further may include determining, via the power output controller based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation. For example, the power output controller may be configured to calculate the total power output available based at least in part on fracturing unit characteristics received from a fracturing unit profiler, for example, as previously described herein.

At **306**, the example method **300** also may include receiving, at the power output controller, one or more character-

istic signals indicative of fracturing unit characteristics associated with at least some of the plurality of hydraulic fracturing units, for example, as discussed herein.

At **308**, the example method **300** may also include determining, for example, via the power output controller, based at least in part on the one or more characteristic signals, an available power to perform the hydraulic fracturing operation, for example, as described previously herein.

The example method **300**, at **310**, also may include determining, for example, via the power output controller, a power difference between the available power and the required power, for example, as previously described herein.

At **312**, the example method **300** also may include determining, for example, via the power output controller, whether there is excess power available or a power deficit based on the power difference, for example, as described herein.

If, at **312**, it is determined that excess power is available, the example method **300**, at **314** may include causing one or more of the hydraulic fracturing units to idle during the fracturing operation, for example, as described herein.

At **316**, the example, method **300** may include alternating between idling and operation of the hydraulic fracturing units to reduce idling time for any one of the hydraulic fracturing units, for example, as previously described herein. Depending on, for example, changing conditions associated with the fracturing operation, this may be continued substantially until completion of the fracturing operation. For example, this may include receiving, for example, at the power output controller, one or more wellhead signals indicative of a fracturing fluid pressure at the wellhead and/or a fracturing fluid flow rate at the wellhead, and controlling idling and operation of the hydraulic fracturing units based at least in part on the one or more wellhead signals.

If at **312**, it is determined that a power deficit exists, the example method **300**, at **318**, may include receiving, for example, at the power output controller, one or more wellhead signals indicative of a fracturing fluid pressure at the wellhead and/or a fracturing fluid flow rate at the wellhead.

At **320**, the example method **300** may include increasing a power output of one or more of the hydraulic fracturing units, for example, as described previously herein.

FIGS. **4A**, **4B**, **4C**, **4D**, **4E**, and **4F** depict a flow diagram of an embodiment of a method **400** of operating a plurality of hydraulic fracturing units, according to an embodiment of the disclosure. For example, the example method **400** may be configured to control operation of one or more hydraulic fracturing units depending, for example, on an amount of available power from operation of the hydraulic fracturing units and an amount of required fracturing power sufficient to perform a hydraulic fracturing operation, for example, as previously described herein.

The example method **400**, at **402**, may include receiving one or more operator mode signals indicative of an autonomous or a semi-autonomous operation mode associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation. For example, an operator of the hydraulic fracturing system may use an input device to provide operator mode signals identifying the mode of operation of the hydraulic fracturing system as being either autonomous or semi-autonomous, for example, so that an operator of the hydraulic fracturing system does not need to manually adjust power outputs and/or fluid outputs of the hydraulic fracturing system on a regular basis during the fracturing operation. In some embodiments of the method **400**, a power output controller may receive the

operator mode signals and, based at least in part on the operator mode signals, cause one or more of the hydraulic fracturing units to autonomously or semi-autonomously control the power output (e.g., the hydraulic horsepower output) and/or fluid output associated with one or more of the hydraulic fracturing units, for example, in response to the conditions of the fracturing operation dynamically changing, for example, as described herein.

At **404**, the example method **400** may include receiving one or more operational signals indicative of operational parameters associated with the fracturing operation. For example, an operator of the hydraulic fracturing system may use an input device to provide operational parameters associated with the fracturing operation. The power output controller may receive the operational parameters and use one or more of the operational parameters as a basis for controlling operation of the hydraulic fracturing units, for example, as previously described herein. In some embodiments, the operational signals may include the one or more operator mode signals mentioned above.

The example method **400**, at **406**, may include determining an amount of total fracturing power required (e.g., the total hydraulic horsepower required) to perform the hydraulic fracturing stage based at least in part on the operational parameters. For example, the power output controller may receive the operational parameters and calculate a total power required to complete the fracturing operation, for example, as described previously herein.

At **408**, the example method **400** may include receiving characteristic signals indicative of characteristics associated with one or more (e.g., each) of a plurality of hydraulic fracturing units. For example, one or more equipment profilers (e.g., pump profilers) associated with one or more of the hydraulic fracturing units may communicate information relating to performance capabilities and/or limitations of the one or more hydraulic fracturing units. For example, an equipment profiler (e.g., a pump profiler) associated with each of the hydraulic fracturing units may communicate information to the power output controller indicative of the power output and/or pumping capabilities of the respective hydraulic fracturing unit, for example, as described previously herein.

At **410**, the example method **400** may include determining the power output (e.g., the hydraulic horsepower) available for each of the hydraulic fracturing units based at least in part on the characteristic signals. For example, the power output controller, based at least in part on information included in the characteristic signals (e.g., the characteristics associated with the respective hydraulic fracturing unit), may be configured to calculate the power output and/or pumping capability of the respective hydraulic fracturing unit, for example, as described previously herein.

The example method **400**, at **412**, may include determining the total power output (e.g., the hydraulic horsepower output) available for all the hydraulic fracturing units based at least in part on the characteristic signals. For example, the power output controller may be configured to calculate the total power output available for all the operational hydraulic fracturing units by adding or summing the respective power output capabilities of each of the operational hydraulic fracturing units of the hydraulic fracturing system, for example, as previously described herein. In some embodiments, the total power output available may be determined based at least in part on the pump pressure provided during a previous job (e.g., an immediately previous job) multiplied by the maximum rate provided during the previous job. In some embodiments, the power output controller may be

configured to calculate the total power output available by multiplying each of the respective rated maximum power outputs of each of the non-GTE-powered hydraulic fracturing units (e.g., the diesel-powered hydraulic fracturing units) by a non-GTE power factor (e.g., ranging from about 70% to about 90% (e.g., about 80%)) and summing each of the non-GTE power outputs to determine a total non-GTE-powered fracturing unit power output, and multiplying each of the respective rated maximum power outputs of each of the GTE-powered hydraulic fracturing units by a GTE power factor (e.g., ranging from about 85% to about 95% (e.g., about 90%)) and summing each of the GTE power outputs to determine a total GTE-powered fracturing unit power output. Thereafter, the power output controller may be configured to determine the total power output available for the hydraulic fracturing system by adding the total non-GTE power output to the total GTE power output.

At **414**, the example method **400** may include determining whether the total power output available is greater than or equal to the total fracturing power required. For example, the power output controller may be configured to subtract the total fracturing power required from the total power output available and determine whether the result is greater than or equal to zero. If not, example method may go to **440** (see FIG. 4C).

If at **414**, it is determined that the total power output available is greater than or equal to the total fracturing power required, at **416**, the example method **400** may include determining the excess power available (if any).

At **418**, the example method **400** may include identifying hydraulic fracturing units that may be idled, for example, while the remaining operational hydraulic fracturing units have the capacity to provide the total fracturing power required. For example, if at **416**, it is determined that excess power is available, based at least in part on the characteristic signals received from the equipment profilers, the power output controller may be configured to identify the hydraulic fracturing units that may be idled while still having a sufficient amount of fracturing power available from the remaining (non-idled) hydraulic fracturing units to provide the total fracturing power required to successfully complete the fracturing operation (e.g., a fracturing stage).

At **420** (FIG. 4B), the example method **400** may include determining whether the hydraulic fracturing units that can be idled are non-gas turbine engine (non-GTE)-powered (e.g., reciprocating-piston diesel-powered) or GTE-powered hydraulic fracturing units. For example, the power output controller may be configured to determine whether the total fracturing power required can be provided solely by GTE-powered hydraulic fracturing units. In some embodiments, using only GTE-powered hydraulic fracturing may result in more efficient completion of the fracturing stage relative to the use of non-GTE-powered fracturing units, such as diesel-powered fracturing units.

If, at **420**, it is determined that GTE-powered fracturing units will be idled, at **422**, the example method **400** may include generating warning signal indicative that one or more GTE-powered hydraulic fracturing unit(s) are being idled. For example, the power output controller may be configured to generate such a warning signal, which may be communicated to an operator, for example, via a communication device, such as a visual display configured to communicate the warning to the operator. The warning may be visual, audible, vibrational, haptic, or a combination thereof.

If, at **420**, it is determined that only non-GTE-powered hydraulic fracturing units will be idled, at **424**, the example method may include causing unneeded non-GTE-powered

hydraulic fracturing units to idle. In some embodiments, for non-GTE-powered fracturing units being idled, the method may also include idling one or more of the fracturing units for a period of time and thereafter shutting down the non-GTE engines of those one or more idled fracturing units.

At **426**, the method may further include generating a warning signal indicative of the idling of the one or more non-GTE-powered hydraulic fracturing units being idled. For example, the power output controller may be configured to communicate such a warning signal to a communication device, for example, as described above.

At **428**, the example method **400** may include determining whether all the GTE-powered hydraulic fracturing units are needed to meet the total power required for successfully completing the hydraulic fracturing operation (e.g., the fracturing stage). For example, the power output controller may be configured to determine the total power output available from all the GTE-powered fracturing units not idled and determining whether that is greater than or equal to the total power required.

If, at **428**, it is determined that all the GTE-powered hydraulic fracturing units are needed to meet the total power required, at **430**, the example method **400** may include causing the power output of the operating GTE-powered hydraulic fracturing units to be substantially evenly distributed to meet the total power required. For example, the power output controller may be configured to communicate control signals to the GTE-powered hydraulic fracturing units to cause the appropriate power output (e.g., hydraulic horsepower output) by the respective GTE-powered hydraulic fracturing units.

At **432**, the example method **400** may include monitoring pressure output and/or power output of operating GTE-powered hydraulic fracturing units during the hydraulic fracturing operation and, in some examples, dynamically adjusting the power output of the GTE-powered hydraulic fracturing units autonomously or semi-autonomously as fracturing conditions change.

At **434**, the example method **400** may include causing unneeded GTE-powered hydraulic fracturing units to idle. For example, the power output controller may be configured to communicate control signals to the GTE-powered hydraulic fracturing units to cause the appropriate respective GTE-powered hydraulic fracturing units to idle. Also, if, at **428**, it is determined that not all the GTE-powered hydraulic fracturing units are needed to meet the total power required, the example method **400** may advance to **434**, and the example method **400** may include causing unneeded GTE-powered hydraulic fracturing units to idle. In some embodiments, the power output controller may be configured to cause one or more of the idled hydraulic fracturing units to shut down, for example, after a period of time. In some embodiments, the power output controller may be configured to alternate between operation and idling, for example, while continuing to perform the fracturing operation.

At **436** (FIG. 4C), the example method **400** may include generating a warning signal indicative of idled GTE-powered hydraulic fracturing units being idled. For example, the power output controller may be configured to communicate such a warning signal to a communication device, for example, as described above.

At **438**, the example method **400** may include increasing the power output of one or more of the operating (un-idled) GTE-powered hydraulic fracturing units to meet the total fracturing power required. For example, the power output

controller may be configured to communicate control signals to the un-idled GTE-powered hydraulic fracturing units to cause one or more of the GTE-powered hydraulic fracturing units to increase, if necessary, to collectively provide sufficient power to meet the total fracturing power required. Thereafter, the example method **400**, in some embodiments, may advance to **484** (see FIG. 4F) and may include monitoring the pressure output and/or the power output of the operating hydraulic fracturing units, and, at **486**, causing the operating hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by an operator occurs.

If, at **414** (see FIG. 4A), it is determined that the total power output available is less than the total fracturing power required, at **440**, the example method **400** may include determining the amount of additional power needed to meet the total fracturing power required. For example, the power output controller may be configured to calculate the difference between the total power output available and the total fracturing power required to arrive at the additional power needed to meet the total fracturing power required.

At **442**, the example method **400** may include determining whether the maximum continuous power (MCP) or the maximum intermittent power (MIP) available from the GTE-powered fracturing units is sufficient to meet the total fracturing power required. In some embodiments, the MCP may range from about 95% to about 105% (e.g., about 100%) of the maximum rated power for a respective GTE-powered hydraulic fracturing unit, and the MIP may range from about 100% to about 110% (e.g., about 105% or 108%) of the maximum rated power for a respective GTE-powered hydraulic fracturing unit. In some embodiments, the power output controller may be configured to determine the MCP and/or the MIP for each of the respective GTE-powered hydraulic fracturing units, for example, based at least in part in the characteristic signals for each of the respective hydraulic fracturing units, and calculate the total MCP output and/or the total MIP output available for all the GTE-powered hydraulic fracturing units and determine whether the total available MCP and/or MIP is greater than or equal to the total fracturing power required.

If, at **442**, it is determined that the MCP or MIP available from the GTE-powered fracturing units is not sufficient to meet the total fracturing power required, the example method **400** may include advancing to **454** (FIG. 4D), and may include determining whether more power is needed to meet the total fracturing power required. If not, the example method may further include advancing to **484** (see FIG. 4F) and monitoring the pressure output and/or the power output of the operating hydraulic fracturing units. Thereafter, at **486**, the example method **400** may further include causing the operating hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by an operator occurs.

If, at **442**, it is determined that the MCP or MIP available from the GTE-powered fracturing units is sufficient to meet the total fracturing power required, the example method **400**, at **444**, may include generating one or more MCP or MIP signals indicative that available MCP or MIP of the GTE-powered hydraulic fracturing units is sufficient to meet the total fracturing power required. For example, the power output controller may be configured to communicate an MCP or MIP signal to a communication device, for example,

as described above, for advising an operator that the MCP or MIP available from the GTE-powered fracturing units is sufficient to meet the total fracturing power required.

At **446**, the example method **400** may include generating a query requesting whether an operator wants to operate the GTE-powered fracturing units at MCP or MIP. For example, the power output controller may be configured to communicate a prompt or query to a communication device, for example, as described above, for requesting whether an operator wants to operate the GTE-powered fracturing units at MCP or MIP to meet the total fracturing power required.

The example method, at **448**, may include receiving an MCP or MIP accept signal indicative that operator wants to operate GTE-powered fracturing units at MCP or MIP, for example, to meet the total fracturing power required. For example, the power output controller may be configured to receive a response to the query at **446** from an operator via a communications link.

At **450**, if the MCP or MIP accept signal is received, the example method **400** may include identifying the GTE-powered fracturing units operating at MCP or MIP required to meet the total fracturing power required. For example, the power output controller may be configured to determine the GTE-powered hydraulic fracturing units required to be operated at MCP or MIP to meet the total fracturing power required. In some embodiments, all the operating GTE-powered fracturing units may be operated at MCP, some of the operating GTE-powered fracturing units may be operated at MCP, all the operating GTE-powered fracturing units may be operated at MIP, some of the operating GTE-powered fracturing units may be operated at MIP, or some of the operating GTE-powered fracturing units may be operated at MCP while the other operating GTE-powered fracturing units may be operated at MIP.

At **452**, the example method may include causing the GTE-powered hydraulic fracturing units identified at **450** to operate at MCP and/or MIP. For example, the power output controller may be configured to communicate control signals to the identified GTE-powered hydraulic fracturing units such that they operate at MCP and/or MIP. Thereafter, the example method **400** may include advancing to **484** (FIG. 4F), and the pressure output and/or the power output of the GTE-powered hydraulic fracturing units may be monitored, including those operating at MCP and/or MIP. Thereafter, at **486**, the example method **400** may further include causing the operating hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, automatic emergency shutdown, or shut down by operator.

At **454**, the example method **400** may include determining whether more power is needed (e.g., beyond the GTE-powered hydraulic fracturing units operating at MCP and/or MIP and the non-GTE-powered operating at the rated maximum power discounted by the first non-GTE power factor (e.g., at about 80% of maximum rated power)) to meet the total fracturing power required. For example, if all the GTE-powered hydraulic fracturing units are operating at MCP or MIP and all the non-GTE-powered hydraulic fracturing units are operating at rated maximum power discounted by the first non-GTE power factor, and this is still insufficient to meet the total fracturing power required, the method **400**, at **454**, may include determining whether more power is needed to meet the total fracturing power required.

If, at **454**, it is determined that no additional power is needed to meet the total fracturing power required, the example method **400** may advance to **484** (FIG. 4F), and the pressure

output and/or the power output of the GTE-powered hydraulic fracturing units operating at MCP and/or MIP may be monitored. Thereafter, at **486**, the example method **400** may further include causing the operating hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by an operator occurs.

If, at **454**, or at **442**, it is determined that the MCP and/or MIP available from the GTE-powered fracturing units is not sufficient to meet the total fracturing power required, the example method **400** may advance to **456**, and may include generating a warning signal indicative that non-GTE-powered fracturing units are required to operate at a higher power output (e.g., higher than maximum rated output discounted by the first non-GTE power factor) to meet the total fracturing power required. Since the GTE-powered hydraulic fracturing units operating at MCP and/or MIP, combined with the non-GTE-powered hydraulic fracturing units operating at maximum rated power discounted by the first non-GTE power factor, are not able to meet the total fracturing power required, the power output controller may determine that additional power is required to meet the total fracturing power required, and thus, an option may be operating the non-GTE-powered hydraulic fracturing units a power output higher than the maximum rated power discounted by the first non-GTE power factor. Thus, the power output controller, in some embodiments, may be configured to communicate a warning signal to a communication device, for example, as described above, indicative that non-GTE-powered fracturing units are required to operate at a higher power output to meet the total fracturing power required.

At **458**, the example method **400** may include generating a query requesting whether an operator wants to operate non-GTE-powered fracturing units at a first higher power output, such as, for example, a power output ranging from about 80% to about 90% of the maximum rated power output. For example, the power output controller may be configured to communicate a prompt or query to a communication device, for example, as described above, for requesting whether an operator wants to operate the non-GTE-powered hydraulic fracturing units at the first higher power output to meet the total fracturing power required.

The example method, at **460**, may include receiving a first power increase signal indicative that the operator wants to operate non-GTE-powered hydraulic fracturing units at the first higher power output. For example, the power output controller may be configured to receive a response to the query at **456** from an operator via a communications link. If no first power increase signal is received, the example method **400** may include advancing to **484** (FIG. 4F), and the pressure output and/or the power output of the GTE-powered and non-GTE-powered hydraulic fracturing units may be monitored. Thereafter, at **486**, the example method **400** may further include causing the operating hydraulic fracturing units to substantially maintain the available pressure output and/or power output until the end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by an operator occurs.

At **462**, if at **460** the first power increase signal is received, the example method **400** may include causing the non-GTE-powered fracturing units to operate at the first higher power output. For example, the power output controller may be configured to communicate control signals to the non-GTE-powered hydraulic fracturing units to cause

one or more of the non-GTE-powered hydraulic fracturing units to increase power output to the first increased power output level.

The example method **400**, at **464**, may include determining whether the non-GTE-powered fracturing units are operating at the first higher power output. If not, the example method **400** may return to **462** to cause the non-GTE-powered hydraulic fracturing units to operate at the first higher power output and/or or communicate a signal to the operator indicative of the failure of the non-GTE-powered hydraulic fracturing units to operate at the first higher output.

If, at **464**, it is determined that the non-GTE-powered fracturing units are operating at the first higher power output, at **466**, the example method **400** may include generating a first fracturing unit life reduction event signal indicative of a reduction of the service life of the non-GTE-powered fracturing units operating at the first higher output. Because operating the non-GTE-powered hydraulic fracturing units at the first higher output may increase the wear rate of the affected hydraulic fracturing units, the power output controller may generate one or more first fracturing unit life reduction event signals, which may be communicated and/or stored in the equipment profiler(s) associated with each of the affected hydraulic fracturing units. This may be taken into account in the future when determining unit health metrics and/or service intervals for one or more components of the affected units.

At **468** (FIG. 4E), the example method **400** may include determining whether more power is needed to meet the total fracturing power required. If it is determined that no additional power is needed to meet the total fracturing power required, the example method **400** may advance to **484** (FIG. 4F), and the pressure output and/or the power output of the GTE-powered hydraulic fracturing units operating at MCP and/or MIP and the non-GTE-powered hydraulic fracturing units operating at the first higher output may be monitored. Thereafter, at **486**, the example method **400** may further include causing the operating hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by an operator occurs.

If at **468**, it is determined that additional power is needed to meet the total fracturing power required, the example method **400**, at **470**, may include generating a query requesting whether an operator wants to operate non-GTE-powered fracturing units at a second higher power output, such as, for example, ranging from about 85% to about 95% (e.g., at about 90%) of the maximum rated power output. For example, the power output controller may be configured to communicate a prompt or query to a communication device, for example, as described above, for requesting whether an operator wants to operate the non-GTE-powered hydraulic fracturing units at the second higher power output to meet the total fracturing power required.

The example method, at **472**, may include receiving a second power increase signal indicative that the operator wants to operate non-GTE-powered hydraulic fracturing units at the second higher power output. For example, the power output controller may be configured to receive a response to the query at **470** from an operator via a communications link. If no second power level signal is received, the example method **400** may include advancing to **484** (FIG. 4F), and the pressure output and/or the power output of the GTE-powered and non-GTE-powered hydraulic fracturing units may be monitored. Thereafter, at **486**, the

example method **400** may further include causing the operating hydraulic fracturing units to substantially maintain the available pressure output and/or power output until end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by the operator occurs.

At **474**, if at **472** the second power increase signal is received, the example method **400** may include causing the non-GTE-powered fracturing units to operate at the second higher power output. For example, the power output controller may be configured to communicate control signals to the non-GTE-powered hydraulic fracturing units to cause one or more of the non-GTE-powered hydraulic fracturing units to increase power output to the second increased power output level.

The example method **400**, at **476**, may include determining whether the non-GTE-powered fracturing units are operating at the second higher power output. If not, the example method **400** may return to **474** to cause the non-GTE-powered hydraulic fracturing units to operate at the second higher power output and/or or communicate a signal to the operator indicative of the failure of the non-GTE-powered hydraulic fracturing units to operate at the second higher output.

If, at **476**, it is determined that the non-GTE-powered fracturing units are operating at the second higher power output, at **478**, the example method **400** may include generating a second fracturing unit life reduction event signal indicative of a reduction of the service life of the non-GTE-powered fracturing units operating at the second higher output. Because operating the non-GTE-powered hydraulic fracturing units at the second higher output may increase the wear rate of the affected hydraulic fracturing units, the power output controller may generate one or more second fracturing unit life reduction event signals, which may be communicated and/or stored in the equipment profiler(s) associated with each of the affected hydraulic fracturing units. This may be taken into account in the future when determining unit health metrics and/or service intervals for one or more components of the affected units.

At **480** (FIG. 4F), the example method **400** may include determining whether more power is needed to meet the total fracturing power required. For example, the power output controller may be configured to determine whether, with the GTE-powered hydraulic fracturing units operating at MCP and/or MIP and the non-GTE-powered hydraulic fracturing units operating at the second higher output, the hydraulic fracturing units are still providing insufficient power output.

If so, at **482**, the example method **400** may include generating a warning signal indicative that a second higher power output provided by the non-GTE-powered hydraulic fracturing units is unable to meet the total fracturing power required, and at **484**, the example method **400** may include monitoring the pressure output and/or power output of the hydraulic fracturing units. If, at **480**, it is determined that no additional power is needed to meet the total fracturing power required, the example method **400** may advance to **484** (e.g., without generating the warning signal of **482**), and the example method **400** may include monitoring the pressure output and/or power output of the hydraulic fracturing units.

At **486**, the example method **400** may include causing the hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, an automatic emergency shutdown occurs, or shut down by an operator occurs. For example, the power output controller may be configured to communicate control signals to the non-GTE-powered and GTE-powered hydraulic fracturing

units to cause the hydraulic fracturing units to substantially maintain pressure output and/or power output to meet the total power fracturing power required until the end of the fracturing stage, automatic emergency shutdown occurs, or shut down by operator occurs.

It should be appreciated that subject matter presented herein may be implemented as a computer process, a computer-controlled apparatus, a computing system, or an article of manufacture, such as a computer-readable storage medium. While the subject matter described herein is presented in the general context of program modules that execute on one or more computing devices, those skilled in the art will recognize that other implementations may be performed in combination with other types of program modules. Generally, program modules include routines, programs, components, data structures, and other types of structures that perform particular tasks or implement particular abstract data types.

Those skilled in the art will also appreciate that aspects of the subject matter described herein may be practiced on or in conjunction with other computer system configurations beyond those described herein, including multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, mainframe computers, handheld computers, mobile telephone devices, tablet computing devices, special-purposed hardware devices, network appliances, and the like.

FIG. 5 illustrates an example power output controller **62** configured for implementing certain systems and methods for controlling operation of a plurality of hydraulic fracturing units that may each include a non-GTE-engine or a GTE (e.g., a dual- or bi-fuel GTE configured to operate using two different types of fuel) according to embodiments of the disclosure, for example, as described herein. The power output controller **62** may include one or more processor(s) **500** configured to execute certain operational aspects associated with implementing certain systems and methods described herein. The processor(s) **500** may communicate with a memory **502**. The processor(s) **500** may be implemented and operated using appropriate hardware, software, firmware, or combinations thereof. Software or firmware implementations may include computer-executable or machine-executable instructions written in any suitable programming language to perform the various functions described. In some examples, instructions associated with a function block language may be stored in the memory **502** and executed by the processor(s) **500**.

The memory **502** may be used to store program instructions that are loadable and executable by the processor(s) **500**, as well as to store data generated during the execution of these programs. Depending on the configuration and type of the power output controller **62**, the memory **502** may be volatile (such as random access memory (RAM)) and/or non-volatile (such as read-only memory (ROM), flash memory, etc.). In some examples, the memory devices may include additional removable storage **504** and/or non-removable storage **506** including, but not limited to, magnetic storage, optical disks, and/or tape storage. The disk drives and their associated computer-readable media may provide non-volatile storage of computer-readable instructions, data structures, program modules, and other data for the devices. In some implementations, the memory **502** may include multiple different types of memory, such as static random access memory (SRAM), dynamic random access memory (DRAM), or ROM.

The memory **502**, the removable storage **504**, and the non-removable storage **506** are all examples of computer-

25

readable storage media. For example, computer-readable storage media may include volatile and non-volatile, removable and non-removable media implemented in any method or technology for storage of information such as computer-readable instructions, data structures, program modules or other data. Additional types of computer storage media that may be present may include, but are not limited to, programmable random access memory (PRAM), SRAM, DRAM, RAM, ROM, electrically erasable programmable read-only memory (EEPROM), flash memory or other memory technology, compact disc read-only memory (CD-ROM), digital versatile discs (DVD) or other optical storage, magnetic cassettes, magnetic tapes, magnetic disk storage or other magnetic storage devices, or any other medium which may be used to store the desired information and which may be accessed by the devices. Combinations of any of the above should also be included within the scope of computer-readable media.

The power output controller **62** may also include one or more communication connection(s) **508** that may facilitate a control device (not shown) to communicate with devices or equipment capable of communicating with the power output controller **62**. The power output controller **62** may also include a computer system (not shown). Connections may also be established via various data communication channels or ports, such as USB or COM ports to receive cables connecting the power output controller **62** to various other devices on a network. In some examples, the power output controller **62** may include Ethernet drivers that enable the power output controller **62** to communicate with other devices on the network. According to various examples, communication connections **508** may be established via a wired and/or wireless connection on the network.

The power output controller **62** may also include one or more input devices **510**, such as a keyboard, mouse, pen, voice input device, gesture input device, and/or touch input device. The one or more input device(s) **510** may correspond to the one or more input devices **64** described herein with respect to FIGS. **1** and **2**. It may further include one or more output devices **512**, such as a display, printer, and/or speakers. In some examples, computer-readable communication media may include computer-readable instructions, program modules, or other data transmitted within a data signal, such as a carrier wave or other transmission. As used herein, however, computer-readable storage media may not include computer-readable communication media.

Turning to the contents of the memory **502**, the memory **502** may include, but is not limited to, an operating system (OS) **514** and one or more application programs or services for implementing the features and embodiments disclosed herein. Such applications or services may include remote terminal units **516** for executing certain systems and methods for controlling operation of the hydraulic fracturing units **12** (e.g., semi- or full-autonomously controlling operation of the hydraulic fracturing units **12**), for example, upon receipt of one or more control signals generated by the power output controller **62**. In some embodiments, each of the hydraulic fracturing units **12** may include a remote terminal unit **516**. The remote terminal units **516** may reside in the memory **502** or may be independent of the power output controller **62**. In some examples, the remote terminal unit **516** may be implemented by software that may be provided in configurable control block language and may be stored in non-volatile memory. When executed by the processor(s) **500**, the remote terminal unit **516** may implement the various functionalities and features associated with the power output controller **62** described herein.

26

As desired, embodiments of the disclosure may include a power output controller **62** with more or fewer components than are illustrated in FIG. **5**. Additionally, certain components of the example power output controller **62** shown in FIG. **5** may be combined in various embodiments of the disclosure. The power output controller **62** of FIG. **5** is provided by way of example only.

References are made to block diagrams of systems, methods, apparatuses, and computer program products according to example embodiments. It will be understood that at least some of the blocks of the block diagrams, and combinations of blocks in the block diagrams, may be implemented at least partially by computer program instructions. These computer program instructions may be loaded onto a general purpose computer, special purpose computer, special purpose hardware-based computer, or other programmable data processing apparatus to produce a machine, such that the instructions which execute on the computer or other programmable data processing apparatus create means for implementing the functionality of at least some of the blocks of the block diagrams, or combinations of blocks in the block diagrams discussed.

These computer program instructions may also be stored in a non-transitory computer-readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means that implement the function specified in the block or blocks. The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process such that the instructions that execute on the computer or other programmable apparatus provide task, acts, actions, or operations for implementing the functions specified in the block or blocks.

One or more components of the systems and one or more elements of the methods described herein may be implemented through an application program running on an operating system of a computer. They may also be practiced with other computer system configurations, including handheld devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, mini-computers, mainframe computers, and the like.

Application programs that are components of the systems and methods described herein may include routines, programs, components, data structures, etc. that may implement certain abstract data types and perform certain tasks or actions. In a distributed computing environment, the application program (in whole or in part) may be located in local memory or in other storage. In addition, or alternatively, the application program (in whole or in part) may be located in remote memory or in storage to allow for circumstances where tasks can be performed by remote processing devices linked through a communications network.

This is a continuation of U.S. Non-Provisional application Ser. No. 18/087,181, filed Dec. 22, 2022, titled "SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS," which is a continuation of U.S. Non-Provisional application Ser. No. 17/942,382, filed Sep. 12, 2022, titled "SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS," now U.S. Pat. No. 11,566,505, issued Jan. 31, 2023, which is a continuation of U.S. Non-Provisional application Ser. No. 17/173,320, filed Feb. 11, 2021, titled "SYSTEMS AND METHODS TO

AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS,” now U.S. Pat. No. 11,473,413, issued Oct. 18, 2022, which claims priority to and the benefit of U.S. Provisional Application No. 62/705,354, filed Jun. 23, 2020, titled “SYSTEMS AND METHODS TO AUTONOMOUSLY OPERATE HYDRAULIC FRACTURING UNITS,” the disclosures of which are incorporated herein by reference in their entireties.

Although only a few exemplary embodiments have been described in detail herein, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of the embodiments of the present disclosure. Accordingly, all such modifications are intended to be included within the scope of the embodiments of the present disclosure as defined in the following claims.

What is claimed is:

1. A method of operating a plurality of hydraulic fracturing pumps to pump fracturing fluid, the method comprising: receiving, at a controller, one or more operational signals indicative of operational parameters associated with pumping fracturing fluid; determining, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation; receiving, at the controller, one or more characteristic signals indicative of fracturing pump characteristics associated with at least one of the plurality of hydraulic fracturing pumps, at least one of the one or more characteristic signals indicative of a detrimental condition of any one of the plurality of hydraulic fracturing pumps; determining, based at least in part on the one or more characteristic signals, an available power from one or more engines to perform the hydraulic fracturing operation; determining a power difference between the available power and the required power; and when the power difference occurs to perform the hydraulic fracturing operation, increasing power output of the one or more of the engines associated with the at least one of the plurality of hydraulic fracturing pumps, thereby to supply power to a respective hydraulic fracturing pump of the plurality of hydraulic fracturing pumps, the increasing power output of the one or more engines including increasing a first power output ranging from about 75% to about 95% of maximum rated power output to a second power output ranging from about 90% to about 110% of the maximum rated power output.

2. The method of claim 1, further comprising when the power difference is indicative of excess power available to perform the hydraulic fracturing operation, causing one or more of the plurality of hydraulic fracturing pumps to idle during the fracturing operation.

3. The method of claim 1, when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, the method further comprising one or more of:

increasing power output of the one or more of the engines for driving at least one additional hydraulic fracturing pump of the plurality of hydraulic fracturing pumps, thereby to supply power to a respective hydraulic fracturing pump, or

storing operation data associated with operation of the one or more hydraulic fracturing pumps operated at an increased power output.

4. The method of claim 2, wherein causing one or more of the plurality of hydraulic fracturing pumps to idle during the fracturing operation comprises:

idling at least a first one of the plurality of hydraulic fracturing pumps while operating at least a second one of the plurality of hydraulic fracturing pumps,

waiting a selected period of time, and

idling the at least a second one of the plurality of hydraulic fracturing pumps while operating the at least a first one of the plurality of hydraulic fracturing pumps.

5. The method of claim 4, further comprising alternating between idling and operation of the at least first one of the plurality of hydraulic fracturing pumps to reduce idling time for any one of the plurality of hydraulic fracturing pumps.

6. The method of claim 1, further comprising:

receiving, at the controller, one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead; and

controlling idling and operation of the at least one of the plurality of hydraulic fracturing pumps based at least in part on the one or more wellhead signals.

7. The method of claim 1, further comprising:

receiving, at the controller, one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead; and

increasing the power output of the one or more engines based at least in part on the one or more wellhead signals.

8. A method of operating one or more hydraulic fracturing pumps to pump fracturing fluid, the method comprising:

receiving one or more operational signals indicative of operational parameters associated with pumping fracturing fluid;

determining, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation;

receiving one or more characteristic signals indicative of fracturing pump characteristics associated with at least one of the one or more hydraulic fracturing pumps, at least one of the one or more characteristic signals indicative of a detrimental condition of any of the one or more hydraulic fracturing pumps;

determining, based at least in part on the one or more characteristic signals, an available power from one or more engines to perform the hydraulic fracturing operation;

determining a power difference between the available power and the required power; and

when the power difference occurs to perform the hydraulic fracturing operation, increasing power output of the one or more of the engines associated with the at least one of the one or more hydraulic fracturing pumps, thereby to supply power to a respective hydraulic fracturing pump of the one or more hydraulic fracturing pumps, the increasing power output of the one or more engines including increasing a first power output ranging from about 75% to about 95% of maximum rated power output to a second power output ranging from about 90% to about 110% of the maximum rated power output.

29

9. The method of claim 8, further comprising when the power difference is indicative of excess power available to perform the hydraulic fracturing operation, causing one or more of the one or more hydraulic fracturing pumps to idle during the fracturing operation.

10. The method of claim 8, when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, the method further comprising one or more of:

increasing power output of the one or more of the engines for driving at least one additional hydraulic fracturing pump of the one or more hydraulic fracturing pumps, thereby to supply power to a respective hydraulic fracturing pump, or

storing operation data associated with operation of the one or more hydraulic fracturing pumps operated at an increased power output.

11. The method of claim 9, wherein the one or more hydraulic fracturing pumps comprises at least two hydraulic fracturing pumps, and wherein causing one or more of the at least one of the one or more hydraulic fracturing pumps to idle during the fracturing operation comprises:

idling at least a first one of the one or more hydraulic fracturing pumps while operating at least a second one of the one or more hydraulic fracturing pumps,

waiting a selected period of time, and

idling the at least a second one of the one or more hydraulic fracturing pumps while operating the at least a first one of the one or more hydraulic fracturing pumps.

12. The method of claim 11, further comprising alternating between idling and operation of the at least first one of the one or more hydraulic fracturing pumps to reduce idling time for any one of the at least one of the one or more hydraulic fracturing pumps.

13. The method of claim 8, further comprising:

receiving, at a controller, one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead; and

controlling idling and operation of the at least one of the one or more hydraulic fracturing pumps based at least in part on the one or more wellhead signals.

14. The method of claim 8, further comprising:

receiving, at a controller, one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead; and

increasing the power output of the one or more engines based at least in part on the one or more wellhead signals.

15. A hydraulic fracturing control assembly to operate a plurality of hydraulic fracturing pumps, each of the plurality of hydraulic fracturing pumps positioned to be driven by one or more engines, thereby to pump fracturing fluid, the hydraulic fracturing control assembly comprising:

an input device configured to facilitate communication of one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation;

one or more sensors configured to generate one or more sensor signals indicative of one or more of a flow rate of fracturing fluid or a pressure associated with fracturing fluid; and

30

a controller in communication with one or more of the plurality of hydraulic fracturing pumps, the input device, or the one or more sensors, the controller configured to:

receive the one or more operational signals indicative of operational parameters associated with pumping fracturing fluid,

determine, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform a hydraulic fracturing operation,

receive one or more characteristic signals indicative of fracturing pump characteristics associated with at least one of the plurality of hydraulic fracturing pumps, at least one of the one or more characteristic signals indicating a detrimental condition of which any of the plurality of hydraulic fracturing pumps has experienced,

determine, based at least in part on the one or more characteristic signals, an available power from the one or more engines to perform the hydraulic fracturing operation,

determine a power difference between the available power and the required power, and

control operation of the at least one of the plurality of hydraulic fracturing pumps based at least in part on the power difference, and when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, increase a power output of the one or more engines, thereby to supply power to a respective hydraulic fracturing pump of the plurality of hydraulic fracturing pumps, the increase of the power output of the one or more engines including increasing power output from a first power output ranging from about 75% to about 95% of maximum rated power output to a second power output ranging from about 90% to about 110% of the maximum rated power output.

16. The hydraulic fracturing control assembly of claim 15, wherein the controller further is configured to one or more of:

(a) cause one or more of the plurality of hydraulic fracturing pumps to idle during the fracturing operation when the power difference is indicative of excess power available to perform the hydraulic fracturing operation, or

(b) when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, one or more of:

(i) increase a power output of the one or more of the engines, thereby to supply power and drive at least one additional hydraulic fracturing pump of the plurality of hydraulic fracturing pumps, or

(ii) store operation data associated with operation of hydraulic fracturing pumps operated at an increased power output.

17. The hydraulic fracturing control assembly of claim 15, wherein the controller further is configured to cause:

idling of at least a first one of the plurality of hydraulic fracturing pumps while operating at least a second one of the plurality of hydraulic fracturing pumps,

waiting a selected period of time, and
idling of the at least a second one of the plurality of hydraulic fracturing pumps while operating the at least a first one of the plurality of hydraulic fracturing pumps.

18. The hydraulic fracturing control assembly of claim 17, wherein the controller further is configured to cause alternating between idling and operation of one or more of the plurality of hydraulic fracturing pumps, thereby to reduce idling time for any one of the one or more of the plurality of hydraulic fracturing pumps.

19. The hydraulic fracturing control assembly of claim 15, wherein the controller further is configured to:
 receive one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead, and control idling and operation of at least some of the plurality of hydraulic fracturing pumps based at least in part on the one or more wellhead signals.

20. The hydraulic fracturing control assembly of claim 15, wherein the controller further is configured to:
 receive one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead, and increase the power output of the one or more engines based at least in part on the one or more wellhead signals.

21. A hydraulic fracturing system comprising:

a plurality of hydraulic fracturing pumps, each of the plurality of hydraulic fracturing pumps being positioned to be driven by one or more engines, thereby to pump fracturing fluid into a wellhead;

an input device configured to facilitate communication of one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation;

one or more sensors configured to generate one or more sensor signals indicative of one or more of a flow rate of fracturing fluid or a pressure associated with fracturing fluid; and

a controller in communication with one or more of the plurality of hydraulic fracturing pumps, the input device, or the one or more sensors, the controller configured to:

receive the one or more operational signals indicative of operational parameters associated with pumping fracturing fluid into a wellhead according to performance of a hydraulic fracturing operation,

determine, based at least in part on the one or more operational signals, an amount of required fracturing power sufficient to perform the hydraulic fracturing operation,

receive one or more characteristic signals indicative of fracturing pump characteristics associated with at least one of the plurality of hydraulic fracturing pumps, at least one of the one or more characteristic signals indicating a detrimental condition of which any of the plurality of hydraulic fracturing pumps has experienced,

determine, based at least in part on the one or more characteristic signals, an available power from the engines to perform the hydraulic fracturing operation,

determine a power difference between the available power and the required power, and

control operation of at least some of the plurality of hydraulic fracturing pumps based at least in part on

the power difference, and when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, increase a power output of at least one of the one or more engines, thereby to supply power to a respective hydraulic fracturing pump of the plurality of hydraulic fracturing pumps, the increase of the power output of the at least one of the one or more engines comprising increasing a power output from a first power output ranging from about 75% to about 95% of maximum rated power output to a second power output ranging from about 90% to about 110% of the maximum rated power output.

22. The hydraulic fracturing system of claim 21, wherein the controller further is configured to one or more of:

(a) cause one or more of the at least one of the plurality of hydraulic fracturing pumps to idle during the fracturing operation when the power difference is indicative of excess power available to perform the hydraulic fracturing operation, or

(b) when the power difference is indicative of a power deficit to perform the hydraulic fracturing operation, one or more of:

(i) increase a power output of the one or more engines associated with at least one additional hydraulic fracturing pump of the plurality of hydraulic fracturing pumps to supply power to a respective hydraulic fracturing pump, or

(ii) store operation data associated with operation of one or more of the plurality of hydraulic fracturing pumps operated at an increased power output.

23. The hydraulic fracturing system of claim 21, wherein controller further is configured to cause:

idling of at least a first one of the plurality of hydraulic fracturing pumps while operating at least a second one of the plurality of hydraulic fracturing pumps, waiting a selected period of time, and

idling of the at least a second one of the plurality of hydraulic fracturing pumps while operating the at least a first one of the plurality of hydraulic fracturing pumps.

24. The hydraulic fracturing system of claim 23, wherein the controller further is configured to cause alternating between idling and operation of the at least first one of the plurality of hydraulic fracturing pumps, thereby to reduce idling time for any one of the plurality of hydraulic fracturing pumps.

25. The hydraulic fracturing system of claim 21, wherein the controller further is configured to:

receive one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead, and control idling and operation of one or more of the plurality of hydraulic fracturing pumps based at least in part on the one or more wellhead signals.

26. The hydraulic fracturing system of claim 21, wherein the controller further is configured to:

receive one or more wellhead signals indicative of one or more of a fracturing fluid pressure at the wellhead or a fracturing fluid flow rate at the wellhead, and increase the power output based at least in part on the one or more wellhead signals.