

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 February 2008 (14.02.2008)

PCT

(10) International Publication Number
WO 2008/018993 A1


- (51) International Patent Classification:
H04L 12/56 (2006.01)
- (21) International Application Number:
PCT/US2007/016791
- (22) International Filing Date: 25 July 2007 (25.07.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11/498,554 3 August 2006 (03.08.2006) US
- (71) Applicant (for all designated States except US): **LU-
CENT TECHNOLOGIES INC.** [US/US]; 600 Mountain
Avenue, Murray Hill, NJ 07974-0636 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WANG, Yalou**
[CN/GB]; 5 Sharp Close Shaw, Swindon, Wiltshire SN5
7DJ (GB).
- (74) Agent: **FINSTON, Martin, I.**; Lucent Technologies, Inc.,
600 Mountain Avenue, Murray Hill, NJ 07974 (US).

- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: DETERMINING PRIORITY OF BEARER CHANNELS IN A WIRELESS TELECOMMUNICATIONS NETWORK

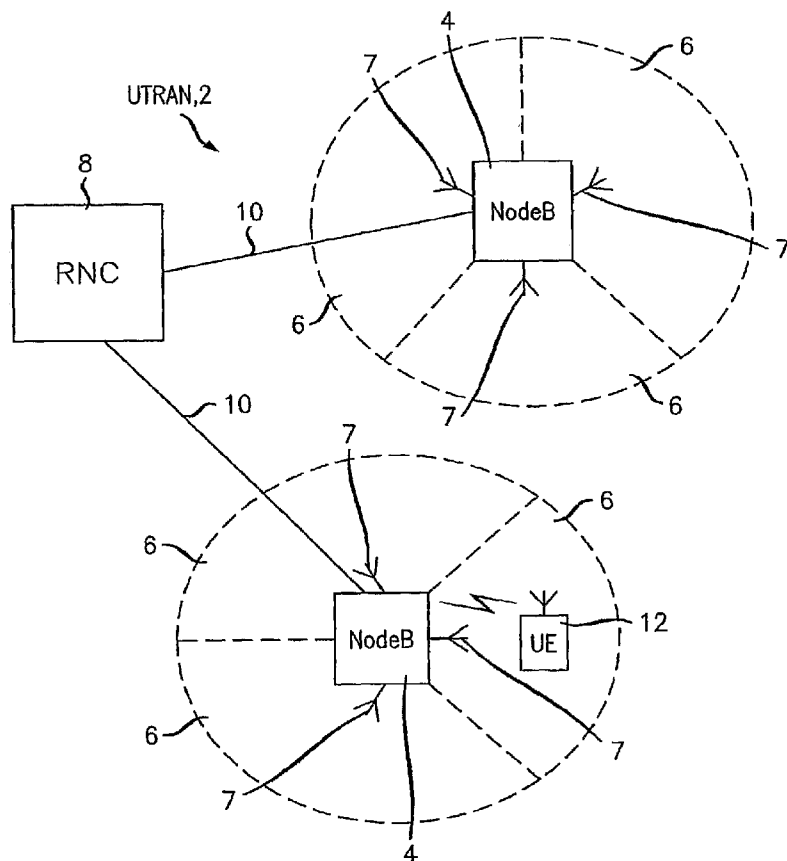

(57) Abstract: A method is provided of determining priorities of radio bearer channels in a wireless telecommunications network that offers various predetermined levels of quality of service. The method involves determining a numerical value representing a priority rating to be applied to a radio bearer channel. This is done by assigning each of at least two quality of service attributes of the bearer channel with a respective numerical value, then processing the values to provide the priority rating for the bearer channel.

WO 2008/018993 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Wang 2

- 1 -

DETERMINING PRIORITY OF BEARER CHANNELS IN A WIRELESS TELECOMMUNICATIONS NETWORK

Field of the Invention

The present invention relates to telecommunications, in particular to wireless telecommunications.

Description of the Related Art

Third generation or higher networks include those broadly in accordance with Third Generation Partnership Project, 3GPP, standards, for example Universal Mobile Telecommunications System (UMTS) networks. In networks for wireless communications that are third generation or higher, many different types of service are possible, such as multimedia services. These services include applications that require real time transmission, such as voice and video streams. These services also include applications for which timing is less critical, such as web browsing, file downloading, and other data services.

In 3GPP or UMTS wireless networks, a call connection involves communication data flows, i.e. traffic, over one or more channels known as bearers or bearer channels. To successfully provide to users the various services outlined above, much effort has gone into how to ensure acceptable Quality of Service, QoS, for the various types of traffic. Basically, the bearers are handled with different priorities dependent on the type of traffic they are carrying. Therefore, it is important to decide with what QoS a bearer should be treated.

As detailed in Third Generation Partnership Project, 3GPP, Technical Specification TS23.107, many QoS attributes that are used to describe how a bearer should be treated have been defined by 3GPP standards. This is both for end-to-end UMTS bearers, and also for radio access bearers within them. End-to end UMTS bearers are those between mobile user terminal and a core network gateway. Radio access network bearers, often known as RAB bearers, relate to the portion of the data flow path from the mobile user terminal only as far as a core network edge node (which is reached before the core network gateway).

Wang 2

- 2 -

The more important of these QoS attributes include Allocation/Retention priority, and the usual four QoS traffic classes, namely Background, Interactive, Streaming and Conversational. For Interactive traffic, Traffic Handling Priority, THP, is also important. Other important QoS attributes relate to bit rates, for example, assigned bit rate, guaranteed bit rate or maximum bit rate.

In prioritising bearers, the usual known approach is to prioritise bearers dependent on traffic class, with a Conversational class bearer given the highest priority and a Background class bearer given the lowest. Taking into account that there are three traffic handling priority, THP, levels within Interactive class, this gives a six level priority scheme. In consequence, Allocation/Retention priority and bit rate are not considered.

Another known approach is to consider various QoS attributes in a series of hierarchical steps (often referred to as a decision tree) so as to order the bearers in terms of priority. Bearers are sorted in groups according to a first QoS attribute, then further sorted within those groups using a second QoS attribute, and so on. This involves substantial processing in the base station or base station controller. Also, in networks such as UMTS networks, this reordering of bearers for QoS, albeit in order to improve traffic handling performance, is undertaken frequently which has a detrimental effect on the amount of control signalling required and on traffic handling performance.

Summary of the Invention

The inventor realised that it would be possible to evaluate priority to be afforded to a bearer by considering multiple QoS attributes at a time.

An example of the present invention is a method of determining priorities of radio bearer channels in a wireless telecommunications network that offers various predetermined levels of quality of service. The method involves determining a numerical value representing a priority rating to be applied to a radio bearer channel. This is done by assigning at least two quality of service, QoS, attributes of the bearer channel with a corresponding numerical values, then processing the values to provide the priority rating for the bearer channel.

Wang 2

- 3 -

The bearer priority rating is a single numerical value, making it easy to process in controlling traffic, yet being comprehensive in taking into account multiple QoS attributes appropriately weighted.

5 The present invention can allow bit rate of a bearer, e.g. guaranteed bit rate, to into account in determining bearer priority. Bit rate can significant impactly how much resources, for example power and network bandwidth, a bearer uses. According, it can be useful to take bit rate into account in prioritising bearers.

Brief Description of the Drawings

10 An embodiment of the present invention will now be described by way of example and with reference to the drawings, in which:

Figure 1 is a diagram illustrating a network for mobile telecommunications according to a first embodiment of the invention,

Figure 2 is a diagram illustrating a radio network controller shown in Figure 1,

15 Figure 3 is a diagram illustrating in more detail an example of the radio network controller shown in Figure 2.

Detailed Description

When considering a known system, the inventor realised that considering each attribute separately and in sequence had disadvantages.

20 The inventor realised that it would be possible to evaluate priority to be afforded to a bearer by considering multiple QoS attributes at a time.

Example network

25 An example network is a Universal Mobile Telecommunications System (UMTS) terrestrial access network (UTRAN), which is a type of wideband code division multiple access (CDMA) network for mobile telecommunications. The UTRAN network is basically as shown in Figure 1. Only one radio network controller and two base stations of the UTRAN network 2 are shown for simplicity. As shown in this Figure, the UTRAN network 2 includes base stations 4. In the Figure, each of the base stations 4 is also designated "Node B" in accordance with UMTS terminology. A

Wang 2

- 4 -

cell, also referred to as a sector, is the radio-coverage area served by a corresponding antenna of a base station. Each base station typically has three cells 6, each covered by one of three directional antennas 7 angled at 120 degrees to each other in azimuth. Each radio network controller (RNC) 8 typically controls several base stations 4 and hence a number of cells 6. A base station 4 is connected to its controlling radio network controller (RNC) 8 via a respective interface 10 known as an IuB interface. In use, a mobile user terminal 12 (often referred to as User Equipment (UE) in UMTS terminology) communicates with a serving radio network controller (RNC) 8 via at least one cell 6 of at least one base station 4. In that way, the mobile user terminal communicates with the UTRAN network 2.

QoS Attributes

Communication flows, known as bearers or bearer channels, of call-connections are handled with different priorities in terms of resource allocation dependent on the type of traffic they are carrying.

As mentioned previously, as detailed in Third Generation Partnership Project, 3GPP, Technical Specification TS23.107, in UMTS networks, many QoS attributes that are used to describe how a bearer should be treated have been defined. This is both for end-to-end UMTS bearers, and also for radio access bearers within them. End-to end UMTS bearers are those between mobile user terminal and a core network gateway. Radio access network bearers, often known as RAB bearers, relate to the portion of the data flow path from the mobile user terminal only as far as a core network edge node (that is reached before the core network gateway).

QoS attributes include Allocation/Retention priority (ARP), the four QoS traffic classes, namely Background, Interactive, Streaming and Conversational. For Interactive traffic, Traffic Handling Priority, THP is also important. Other QoS attributes are assigned bit rate, guaranteed bit rate and maximum bit rate.

Prioritising Bearers according to QoS Attributes

Wang 2

- 5 -

Basically to generate a priority rating for a bearer, multiple QoS attributes are taken into account at the same time in order to generate a single number representative of the priority.

Bearers are prioritised, also often referred to as ranked, in the radio network controller, RNC, 8. As shown in Figure 2, the RNC 8 that controls the base stations (not shown in Figure 2) includes a bearer prioritiser 14. The RNC 8 also includes a converter 15 connected as input to the bearer prioritiser 14. The bearer prioritiser 14 includes a processor 16 consisting of an application-of-weights stage 18 for preselected weights and a summer 20. The summer 20 has an output 22.

A bearer priority value is determined by the bearer prioritiser 14.

For any particular bearer, the bearer prioritiser 14 receives associated QoS attributes, denoted A_1, A_2, \dots, A_N , in Figure 2. These attributes, if not already in numerical form, are converted by the converter 15 into numerical form according to predetermined rules. Attributes that are already in number form, such as, for example Allocation/Retention Priority (ARP), bit rate, delay, and/or error rate are used directly.

The attributes in numerical form are passed to the bearer prioritiser 14 and processed in its processor 16 by being appropriately weighted in the application-of-weights stage 18 of the processor 16. An appropriate weight is applied to each of the attribute values. The weight values to be applied are predetermined. The weights are stored for use in the application-of-weights stage 18. The weights are denoted W_1, W_2, \dots, W_N , in Figure 2. The weights were chosen so as to take into account the relative importance of each attribute.

The weighted attributes are then summed by the summer 20 to provide the bearer priority value at an output 22.

25

This approach can be written as the following formula (formula 1):

$$\text{Bearer priority value} = A_1 * W_1 + A_2 * W_2 + \dots \dots + A_n * W_n$$

where A_i represents the i th QoS attribute of the bearer, and W_i represents the weight for this attribute, i being an integer value of 2 or more.

30

Wang 2

- 6 -

The above formula gives a single value for a bearer priority rating so a direct priority comparison amongst bearers is readily undertaken in subsequent allocation of resources to the bearers by the bearer prioritiser 14. The resources are radio resources or other network resources.

The bearer priority value calculation is performed again for a bearer whenever a QoS attribute of the bearer changes.

Particular Example of Weights and QoS Attributes

A particular example of the more general case described above is given by the following formula (formula 2):

$$\text{Bearer priority value} = \text{ARP} * 10 + \text{traffic class} + \text{guaranteed bit rate} / 1000$$

In this specific example, the bearer is a Radio Access Bearer (RAB), Also, Allocation/Retention Priority (ARP) is an integer value. Possible values are ARP = 1, 2, 3 for the network which is compliant with any of UMTS standards Release 1 to Release 5. 1 represents a higher allocation/retention priority than 3 does. (In some alternative embodiments (not shown) in accordance with release 6 UMTS standards, ARP can take a value 1, 2, 3, ... up to 15.)

Also, traffic class is converted to be an integer value using the following fixed relations:

Conversational = 1

Streaming = 2

Interactive (THP = 1) = 3

Interactive (THP = 2) = 4

Interactive (THP = 3) = 5

Background = 6

Furthermore, bit rate is the current assigned radio bearer bit rate. This bit rate complies with 3GPP's permitted bearer rate combinations, and ranges from 8 kilobits

Wang 2

- 7 -

per second (kbps) to 384kbps, using three digits. For example, for formula 2 above, 128kbps is taken as 128, 64kbps is taken as 064 (so divided by 1000 will give 0.064) and so on.

As shown in Figure 3, the bearer priority value is determined by a bearer
5 prioritiser 14 in the radio network controller, RNC 8' that controls the base stations
(not shown in Figure 3). The RNC 8 also includes a converter 15 operative to convert
QoS attributes associated with a bearer into numerical values according to the
predetermined rules explained above. . The bearer prioritiser 14' includes a processor
16' consisting of an application-of-weights stage 18' for preselected weights and a
10 summer 20'. The three attributes in numerical form, ARP, traffic class and bit rate, are
processed in the processor 16 by being appropriately weighted in the application-of-
weights stage 18' of the processor 16' and then summed by the summer 20' to provide
the bearer priority value at an output 22'.

The above formula (formula 2) gives a single value for a bearer priority rating
15 so a direct priority comparison amongst bearers is readily undertaken in subsequent
allocation of network or radio resources to the bearers by the bearer prioritiser 14.

The smaller the value, the higher the bearer priority.

For example, a bearer for which $ARP = 2$, $THP = 2$, and bit rate is 128k, is
calculated as having a priority value of 24.128. Accordingly, this bearer has lower
20 priority than one for which $ARP = 1$, $THP = 3$, bit rate is 128k, giving a priority value
of 13.128.

Incidentally, the above mentioned bearer of priority value 24.128 also has a
lower priority than a 64k bit rate bearer of equal ARP and THP (giving a priority
value 24.064).

25

Use of priority values

The bearer priority values, once determined, are used by the radio network
controller for bearer QoS control. This is important as network and radio resources,
such as capacity and transmission power, are limited so dynamic QoS control is

Wang 2

- 8 -

needed to best handle traffic. Essentially this means that the calculated bearer priorities are used to decide which bearer gets which resources and when.

As an example, two bearers have equal Allocation/Retention Priority (ARP), and THP, but the first has an assigned bit rate of 384 kbps and the second has an assigned bit rate of 128 kbps. Accordingly, the first bearer has a higher calculated priority value than the second bearer so gets a lower priority in terms of resources. If resources become scarce, the first bearer is downgraded to a reduced assigned bit rate of, say, 64kbps. Its bearer priority value is then recalculated and is found to have reduced. Accordingly, from then it is accorded a higher priority than the second (128kbps) bearer channel, so the next downgrade in assigned rate, if necessary, will be to the second channel. This is a dynamic and fair approach as it avoids a user having a lower assigned rate being excessively penalised in terms of resource allocation as compared to an, otherwise similar, user currently with a higher assigned bit rate.

15 General

The approach is flexible, for example, additional, or alternative, QoS attributes can readily be considered.

In some embodiments, rather than performing the above bearer priority calculation again whenever a QoS attribute for a bearer changes, the bearer priority calculation is performed only once, specifically upon bearer setup and is assumed correct for the duration of the call connection.

In some embodiments, weights are selected such that the weights are integer numbers. In some embodiments, weights are selected such that the weighted attributes are also integer numbers. This is for increased ease of processing.

Some embodiments relate to UMTS networks but the inventive approach can also be used in other networks that prioritise bearer channels based on quality of service obligations. Any of the QoS attributes of traffic channels might be used, for example Differentiated Service (DiffServ) code points (DSCP).

The present invention may be embodied in other specific forms without departing from its essential characteristics. The described embodiments are to be

Wang 2

- 9 -

considered in all respects only as illustrative and not restrictive. In particular other QoS attributes and/or combinations of QoS attributes could be used, and/or different weights, weight values and/or combinations of weights. For example, weights can be selected such that a lower bearer priority value indicates a lower rather than a higher
5 priority.

The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Wang 2

- 10 -

Claims:

1. A method of determining priorities of radio bearer channels in a wireless
5 telecommunications network that offers various predetermined levels of quality of service, by
determining a numerical value representing a priority rating to be applied to a radio bearer channel by:
assigning each of at least two quality of service attributes of the bearer
10 channel with a corresponding numerical value,
processing the values to provide the priority rating for the bearer channel.
2. A method according to claim 1, in which the values are processed by being weighted and summed.
3. A method according to claim 2, in which the weights are selected such that the
15 weights are integer numbers.
4. A method according to claim 3, in which the weights are selected such that the weighted attributes are integer numbers.
5. A method according to claim 1, in which the attributes comprise two or more of the set comprising allocation/retention priority, traffic class, guaranteed bit rate,
20 maximum bit rate.
6. A method according to claim 1, in which the attributes are allocation/retention priority, traffic class, and assigned bit rate.
7. A method according to claim 6, in which the allocation /retention priority is assigned a value between 1 and 15 and is weighted by a factor of 10, traffic class is
25 assigned a value between 1 and 6 and is weight by a factor of 1, and assigned bit rate takes a value representative of kilobits per second and is weighted by a factor of 10^{-3} .

Wang 2

- 11 -

8. A method according to claim 1, in which the network is a Universal Mobile Telecommunications System (UMTS) network and one of the attributes is traffic class,

5 the traffic class being selectable from Conversational, Streaming, Interactive (traffic handling priority=1), Interactive (traffic handling priority=2), Interactive (traffic handling priority=3), and Background traffic class,

the Conversational traffic class being assigned a value of 1,

the Streaming traffic class being assigned a value of 2,

10 the Interactive (traffic handling priority=1) traffic class being assigned a value of 3,

the Interactive (traffic handling priority=2) traffic class being assigned a value of 4,

the Interactive (traffic handling priority=3) traffic class being assigned a value of 5, and

15 the Background traffic class being assigned a value of 6.

9. A method of adapting resource allocations to radio bearer channels in a wireless telecommunications network by applying the method of determining priorities according to claim 1, and

20 adapting resource allocations to radio bearer channels dependent on the priority ratings.

10. A wireless telecommunications network configured to offer various predetermined levels of quality of service,

the network comprising a network node operative to determining a numerical value representing a priority rating to be applied to a radio bearer channel,

25 the network node comprising a converter and a processor,

the converter being configured to assign each of at least two quality of service attributes of the bearer channel with a corresponding numerical value,

the processor being configured to process the values to provide the priority rating for the bearer channel.

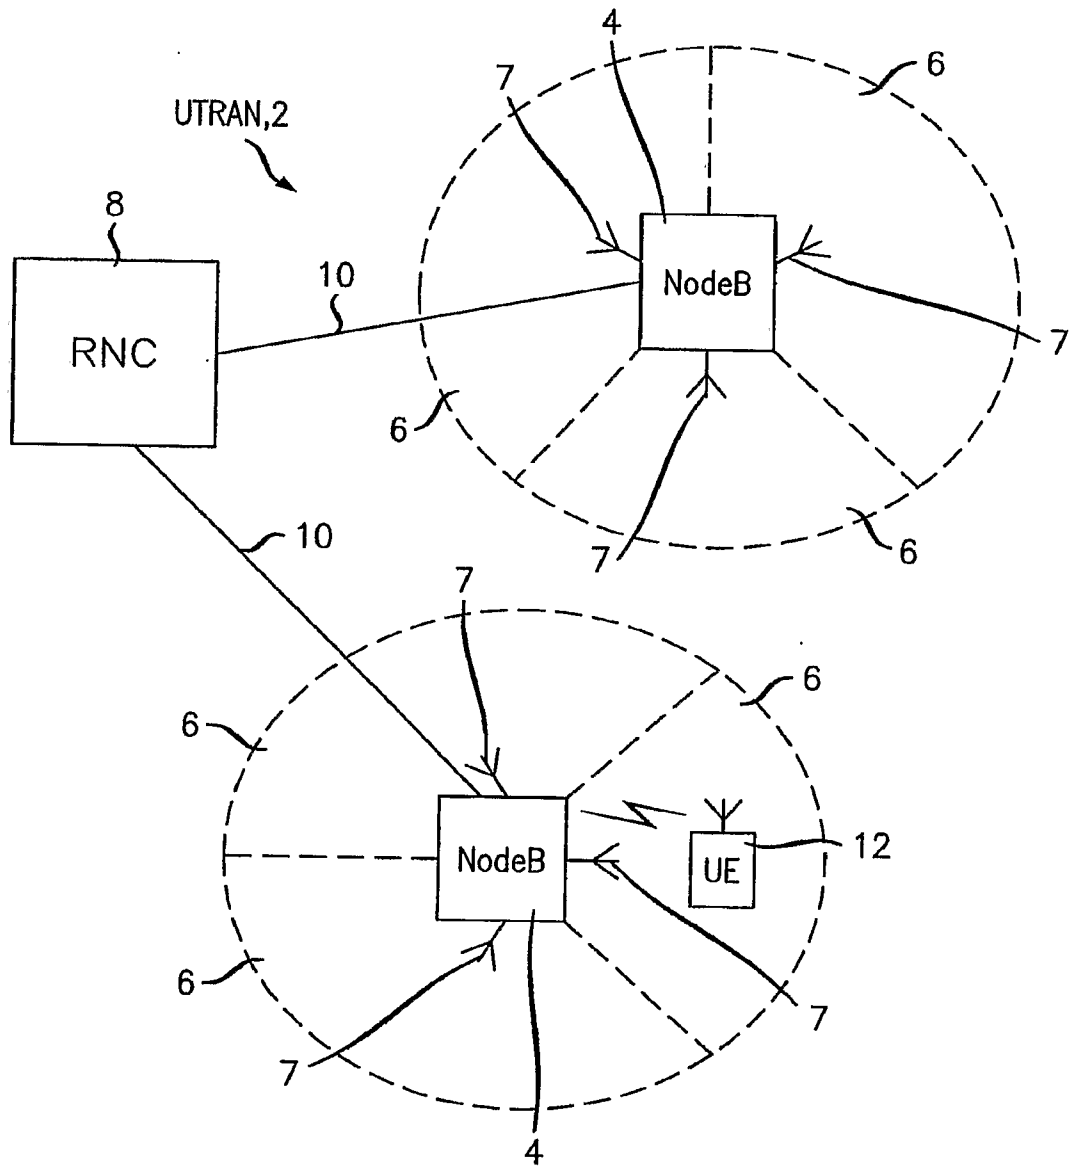


FIG. 1

2/2

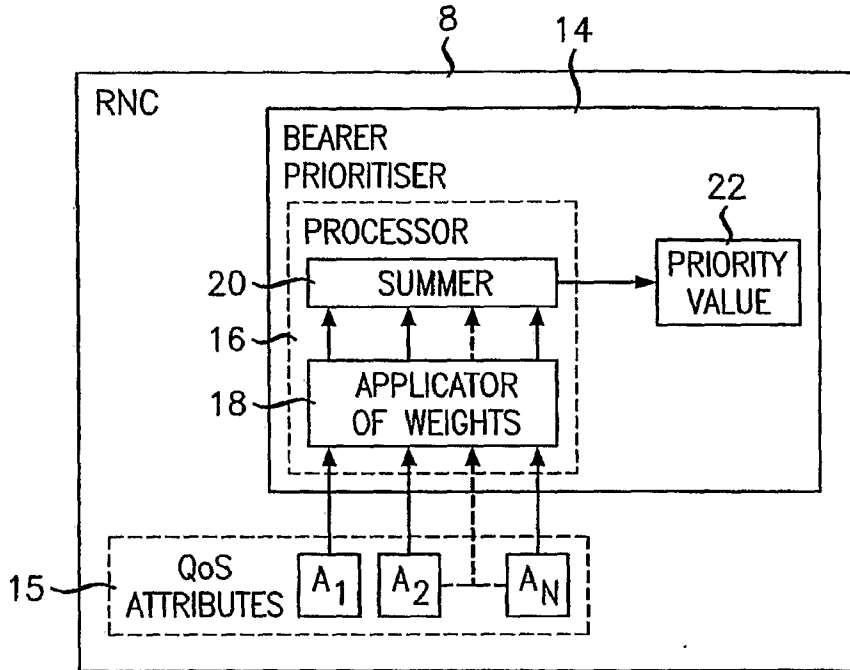


FIG. 2

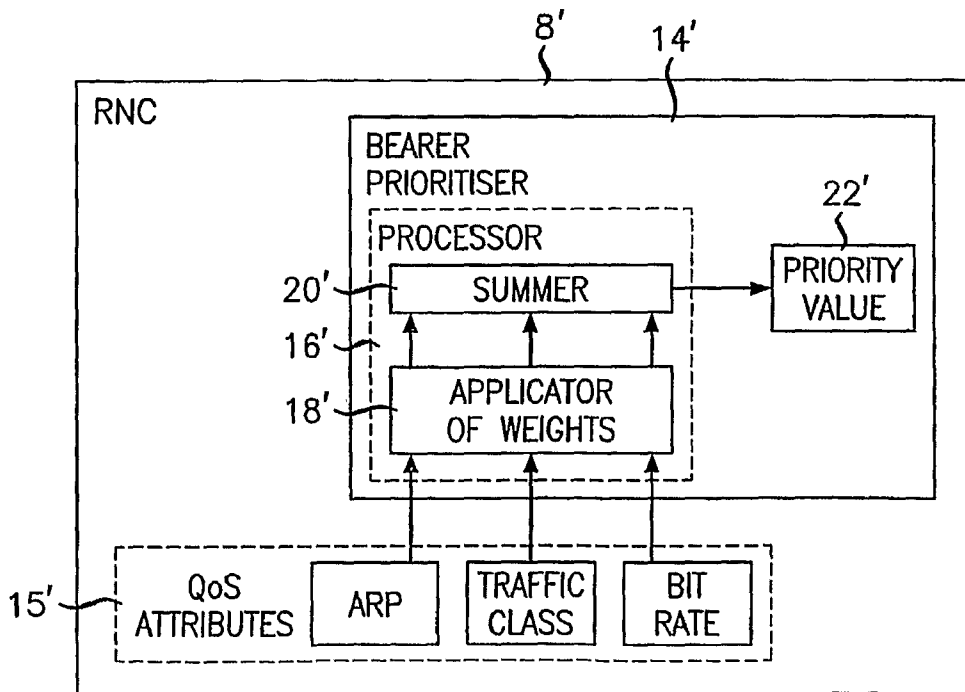


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/016791A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2001/030998 A1 (YONG MEI [US]) 18 October 2001 (2001-10-18) figures 6,7 page 1, paragraph 3 page 2, paragraph 16 page 4, paragraph 46 page 5, paragraph 63	1-10
Y	EP 1 608 194 A (MATSUSHITA ELECTRIC IND CO LTD [JP]) 21 December 2005 (2005-12-21) figures 1-3,13,14 page 2, paragraph 10 page 3, paragraphs 13,14 page 4, paragraph 21 page 13, paragraph 123	1-10
	----- -/-- -----	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

21 January 2008

Date of mailing of the international search report

25/01/2008

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mircescu, Alexander

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/016791

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98/43462 A (ROLM SYSTEMS [US]) 1 October 1998 (1998-10-01) figure 4 page 3, lines 26-33 page 7, lines 2-22 page 8, lines 8-25 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2007/016791

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001030998	A1	18-10-2001	NONE
EP 1608194	A	21-12-2005	AT 383048 T 15-01-2008
			CA 2569627 A1 29-12-2005
			CN 101069449 A 07-11-2007
			WO 2005125252 A1 29-12-2005
			JP 2007318771 A 06-12-2007
			JP 4002591 B1 07-11-2007
			JP 2007533276 T 15-11-2007
			KR 20070029806 A 14-03-2007
			US 2007275728 A1 29-11-2007
WO 9843462	A	01-10-1998	CN 1251250 A 19-04-2000
			DE 69801651 D1 18-10-2001
			DE 69801651 T2 04-07-2002
			EP 0968622 A1 05-01-2000
			US 5991387 A 23-11-1999