

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
2 March 2006 (02.03.2006)

PCT

(10) International Publication Number  
**WO 2006/022899 A2**

(51) International Patent Classification:  
C08K 5/34 (2006.01)

(21) International Application Number:  
PCT/US2005/014064

(22) International Filing Date: 25 April 2005 (25.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/601,085 12 August 2004 (12.08.2004) US

(71) Applicant (for all designated States except US): **KING INDUSTRIES, INC.**, [US/US]; PO Box 588 Science Road, Norwalk, CT 06842 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HSIEH, Bing, T.** [US/US]; 25 Abbott Avenue, Suite 2, Ridgefield, CT 06877 (US). **RAVICHANDRAN, Ramanathan** [US/US]; 1 Caddy Lane, Suffern, NY 10901 (US). **ABI-KARAM, Farouk** [US/US]; 25 Crofoot Road, Wilton, CT 06897 (US).

(74) Agent: **FOILES, Peter**; Morgan & Finnegan Llp, 3 World Financial Center, New York, NY 10281-2101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ORGANOMETALLIC COMPOSITIONS AND COATING COMPOSITIONS

(57) Abstract: The present invention is directed to novel organometallic complexes as catalysts for the reaction of compounds with isocyanate and hydroxyl functional groups to form urethane and/or polyurethane and the process employing such catalysts. More particularly, the present invention is directed to novel complexes of zinc(II) with substituted amidines. These novel catalysts are useful for the production of urethanes and polyurethanes which are important in many industrial applications.

WO 2006/022899 A2

**ORGANOMETALLIC COMPOSITIONS AND COATING COMPOSITIONS**  
**FIELD OF THE INVENTION**

**[0001]** The present invention is directed to novel organometallic complexes as catalysts for the reaction of compounds with isocyanate and hydroxy functional groups to form urethane and/or polyurethane and the process employing such catalysts. More particularly, the present invention is directed to novel complexes zinc(II) with substituted amidines. These novel catalysts are useful for the production of urethanes and polyurethanes which are important in many industrial applications, such as: coatings, foams, adhesives, sealants, and reaction injection molding (RIM) plastics.

**[0002]** The present invention is also directed to a method of catalyzing the process for de-blocking blocked isocyanates, like ketoxime, pyrazole or phenol blocked products to form crosslinked coatings. More particularly, the present invention relates to the use of certain novel complexes zinc(II) with substituted amidines that are effective in catalyzing both a solvent borne and a waterborne process to form such crosslinked coatings.

**[0003]** The present invention also relates to polyurethane powder coating compositions which are curable at low stoving temperatures and to their use for coating heat-resistant substrates.

**[0004]** The present invention is also directed to a catalyst for the epoxy reaction with carboxyl and or anhydride functional compounds for use in coating, sealant, adhesive and casting applications.

**BACKGROUND OF THE INVENTION**

**[0005]** The reaction of isocyanate and hydroxy compounds to form urethanes is the basis for the production of polyurethanes. Metal compounds (e.g., tin, zinc and bismuth compounds) and tertiary amines have been known to catalyze the reaction of isocyanate and hydroxyl groups to form urethane. See, Proceedings of Water Borne and High Solids Coatings Symposium, Feb. 25-27, 1987, New Orleans, at Page 460. Compounds useful for the isocyanate-hydroxy reaction are also referred to as urethane catalysts. At present, the commercially available catalysts used in this reaction are organotin compounds (e.g., dibutyltin dilaurate and dibutyltin diacetate),

zinc carboxylates, bismuth carboxylates, organomercury compounds and tertiary amines.

**[0006]** There are several problems with these commercially available catalysts. When they are used in the process for polyurethane coatings, the cure of the coatings under high humidity or at low temperature conditions is not satisfactory. They catalyze the undesirable side reaction of isocyanate with water to form amines and carbon dioxide. The carbon dioxide may cause blisters in the coating and the amines react with isocyanates resulting in low gloss coatings. Moreover, the cure rate at low temperatures is too slow. The commercially available catalysts also catalyze the degradation of the resulting polymer product. Furthermore, several of the commercially available urethane catalysts, particularly those containing heavy metals and tertiary amines, are highly toxic and are environmentally objectionable.

**[0007]** The testing of zirconium acetylacetonate and zirconium tetra-3-cyanopentanedionate, as catalysts for the isocyanate-hydroxy reaction have been described in GB Patents 908949, 890280 and 869988. Subsequent testing by others, however, has shown that zirconium acetylacetonate is a poor catalyst for the urethane reaction. B. D. Nahlovsky and G. A. Zimmerman, Int. Jahrestag. Fraunhofer--Inst. Treib-Explosivst., 18th (Technol. Energ. Mater.), 39:1-12, reported that the catalytic efficiency of zirconium acetylacetonate for the isocyanate-hydroxyl reaction to form urethane is low. The solubility of zirconium acetylacetonate and zirconium tetra-3-cyanopentanedionate in solvents commonly used in the production of coatings is poor. Examples of such solvents include esters ketones, glycolesters and aromatic hydrocarbons, such as: butyl acetate, methyl iso-amyl ketone, 2-methoxy propylacetate, xylene and toluene. Because of the low catalytic efficiency and the poor solvent solubility, the use of these compounds as catalysts in processes involving urethane or polyurethanes have been limited.

**[0008]** Further testing using zirconium acetylacetonate in our laboratory has shown that zirconium compounds disclosed in the prior art, will only catalyze the isocyanate-hydroxy reaction when carried out in a closed system, i.e., in a closed pot. This is impractical for many of the polyurethane applications. The zirconium diketonates of the prior art failed as catalysts when the reaction is carried out in the

open atmosphere, unless there is present a large excess of the corresponding diketone. For zirconium acetylacetonate, the presence of over 1000 to 1 mole ratio of 2,4-pentanedione to zirconium acetylacetonate is required. However, 2,4-pentanedione and other similar diketones are volatile solvents which, when used in an open vessel, pollute the air, and pose both an environmental and a fire hazard. In addition, the presence of the free diketone causes discoloration of the catalyst, resulting in an undesirable, discolored product.

**[0009]** Blocked isocyanates have been used in many coating applications, such as powder coatings, electrocoatings, coil coatings, wire coatings, automotive clear top coatings, stone chip resistant primers, and textile finishes. Traditionally, these coating processes employ organic solvents, which may be toxic and/or obnoxious and cause air pollution. In recent years, the legal requirements for low or no pollution of the environment have led to an increase in the interest in waterborne and high solids coatings.

**[0010]** In processes wherein blocked isocyanates are used, heating to an elevated temperature is necessary to remove the blocking group from the blocked isocyanate to form free isocyanates. The free isocyanates then react with polyols (polymers containing hydroxy functional groups) to form a crosslinked network as a thin film coating. An obstacle to the use of this process is the high temperature required to remove the blocking group. The process is extremely slow without a catalyst. It is known that metal compounds such dialkyltin and certain bismuth and zinc salts are excellent catalysts in these solvent borne coating processes.

"Crosslinking with Polyurethanes." W. J. Blank, ACS Proceedings of Polymeric Materials Science and Engineering (1990) 63:931-935.

**[0011]** Bismuth organo-compounds have been used in a variety of processes wherein polyisocyanates or blocked isocyanates is an ingredient. For example, EP 95-109602 describes an epoxide amine adduct with a bismuth compound as being useful in a conventional cationic coating process. U.S. Pat. No. 5,702,581 describes the use of organic bismuth complexes in phosphate dip coating compositions to provide corrosion resistance. The bismuth organic complexes include bismuth carboxylates, such as bismuth lactate. WO 95/29007 disclosed the use of bismuth

compounds/mercapto complexes for curing polyisocyanate organic solvent compositions. The bismuth compounds disclosed include bismuth carboxylates, nitrates and halides. WO 96/20967 also described bismuth/zinc mixture with a mercapto complex as a catalyst for producing polyurethane. See also Frisch et al., "Novel Delayed-Action Catalyst/Co-catalyst system for C.A.S.E. Applications", 60 Years Polyurethanes, Kresta et al. ed., Technomic: Lancaster, Pa. 1998, pp. 287-303. Further, WO 95/08579 described bismuth/mercapto complexes as latent catalysts in a polyol-polyisocyanate adhesive system. The catalyst is described as useful in promoting the rapid cure of the system. The bismuth carboxylates described in these references are those wherein the carboxylate has ten carbons or less in the hydrocarbon structure. These conventional bismuth carboxylates do not provide improved resin performance nor are they effective in water-borne formulations.

**[0012]** WO 95/07377 described the use of bismuth lactate in cationic lacquer compositions, which employ urethane reactions. A mixture of bismuth and an amino acid or amino acid precursor was disclosed for catalyzing a cationic electrodeposition of a resin film on a metal substrate. The bismuth may be present in the form of nitrates, oxides, trioxides, or hydroxide. DE 19,532,294A1 also disclosed bismuth carboxylates as catalysts for single component polyurethane lacquer coatings in a solvent borne formulation.

**[0013]** Unfortunately, when the known bismuth catalysts are employed in waterborne coatings formulations, it was found that they were not effective. It is suspected that the loss of activity is related to the hydrolysis of the bismuth salt in water. Moreover, even if these compounds function as catalysts in waterborne processes, it has been our experience that a very high level is necessary, usually 10 to 100 times higher than in solvent borne processes. This is undesirable because it would cause environmental pollution if a large amount is released into the environment.

**[0014]** Bismuth carboxylates have been used as catalysts in processes that do not involve de-blocking of blocked isocyanates. Bismuth dimethylol propionate has been disclosed in DE 93-43,300,002 as being useful in an electrocoating

process for coating phosphate dipped metals to provide anti-corrosion and weather resistance. Bismuth carboxylates are also described in DE 96-19,618,825 for use in an adhesive gel formulation that is safe for contact with human skin. The formulation contains polyether polyols with hydroxy groups, antioxidants, Bismuth(III) C<sub>2</sub>-C<sub>18</sub> carboxylates soluble in the polyether polyols and OCN(CH<sub>2</sub>)<sub>6</sub>NCO. JP 95-351,412 describes the use of bismuth neodecanoate as a catalyst for two part adhesive formulations containing polyisocyanates, polyols with an ethylenediamine. These formulations do not involve the de-blocking of blocked isocyanates.

**[0015]** For waterborne processes, the catalysts known to be useful are organo-tin and lead compounds. See WO 95/04093, which describes the use of organo-tin alone or in a mixture with other compounds including bismuth oxide in a low temperature curing process employing blocked isocyanates. There is no disclosure of bismuth carboxylates alone as a catalyst for de-blocking isocyanates. Organo-tin compounds have also been used in coatings, e.g. in paints for anti-fouling applications. Organo-tin compounds in mixtures with bismuth hydroxy carboxylic acid salt was described in DE19,613,685. The use of bismuth lower carboxylates was described as being useful in a phosphate dip process to provide corrosion resistance to lacquer coatings. The bismuth carboxylates described therein as being useful are lower carboxylate of bismuth wherein the carboxylic acid has up to ten carbons. The substrate is then coated with an epoxy resin in the presence of a blocked isocyanate as the crosslinking agent using a zinc organo compound and/or lead compound as the catalyst. EP0,509,437 disclosed a mixture of a dibutyltin aromatic carboxylate with a bismuth and a zirconium compound as the dissociation catalyst for electrocoating wherein a blocked isocyanate is used. Polystannoxane catalysts are also described in EPO,810,245 A1 as an low temperature catalyst for curing compositions comprising a blocked isocyanate. Bismuth compounds, including carboxylates were described as being useful as a co-catalyst. However, the process is one in which the reaction temperature was in the range of 100° C, quite a bit below the normal temperature of 120° C to 150° C for de-blocking blocked polyisocyanates. JP 94-194950 described a formulation for coating materials which are rapidly curable in contact with an amine catalyst vapor or mist. The coating formulation included polyols, polyisocyanates, antimony or bismuth catalysts with mercaptans in an

organic solvent. The toxicity of both lead and tin compounds presents serious environmental hazards. The use of solvents in solvent borne processes further result in the undesirable release of toxic and obnoxious chemicals into the environment. For these reasons, the use of organo tin and lead compounds and solvents has been banned in many applications and is highly restricted in electrocoating.

**[0016]** It is, therefore, important to develop other catalysts or catalysts systems for waterborne processes.

**[0017]** As environmental legislation has become ever stricter, the development of powder coatings, together with high solids lacquers and aqueous coating systems has become increasingly significant in recent years. Powder coatings release no harmful solvents during application, may be applied highly efficiently with little waste and, thus, are considered particularly environmentally friendly and economic.

**[0018]** Particularly high quality light and weather resistant coatings may be obtained using heat curable, polyurethane (PUR) powder coatings. The PUR powder coatings currently commercially available generally contain solid polyester polyols, which are cured with solid blocked aliphatic or, usually, cycloaliphatic polyisocyanates. However, these systems exhibit the disadvantage that the compounds used as blocking agents are released during thermal crosslinking. As a consequence, particular precautions must be taken during application both for equipment-related reasons and for environmental and occupational hygiene reasons to purify the exhaust air and/or to recover the blocking agent.

**[0019]** One approach to avoiding the emission of blocking agents is to use known PUR powder coating crosslinking agents containing uretdione groups as described, e.g., in DE-A 2,312,391, DE-A 2,420,475, EP-A 45,994, EP-A 45,996, EP-A 45,998, EP-A 639,598 and EP-A 669,353. These products crosslink by the thermal dissociation of uretdione groups into free isocyanate groups and the subsequent reaction of these groups with the hydroxy-functional binder. In practice, however, uretdione powder coating crosslinking agents have only been used on an infrequent basis. The reason for this resides in the relatively low reactivity of the

internally blocked isocyanate groups, which generally require stoving temperatures of at least 160° C.

**[0020]** Although it is known that the uretdione cleavage reaction is noticeable at temperatures as low as 100° C, especially in the presence of reactants containing hydroxyl groups, the reaction proceeds so slowly at this temperature that complete curing of coatings would take several hours, an unrealistically long period for practical use. DE-A 2,420,475, DE-A 2,502,934 or EP-A 639,598 mention temperatures as low as 110° C, or even as low as 90° C (DE 2,312,391), as possible stoving conditions for powder coating systems containing uretdione groups. However, the examples demonstrate that even with the powder coatings described in these publications, adequately crosslinked coatings are only obtainable at temperatures of 150° to 160° C within practical stoving times of at most 30 minutes.

**[0021]** There has been no lack of attempts to accelerate the curing of uretdione-crosslinking PUR powder coatings by using suitable catalysts. Various compounds have already been proposed for this purpose, for example, the organometallic compounds known from polyurethane chemistry, such as tin(II) acetate, tin(II) octoate, tin(II) ethylcaproate, tin(II) laurate, dibutyltin diacetate, dibutyltin dilaurate, dibutyltin maleate (for example EP-A 45,994, EP-A 45,998, EP-A 601,079, WO 91/07452 or DE-A 2,420,475), iron(III) chloride, zinc chloride, zinc 2-ethylcaproate and molybdenum glycolate or tertiary amines such as triethylamine, pyridine, methylpyridine, benzyldimethylamine, N,N-endoethylenepiperazine, N-methylpiperidine, pentamethyldiethylenetriamine, N,N-dimethylaminocyclohexane and N,N'-dimethylpiperazine (for example EP-A 639 598), N,N,N'- trisubstituted amidines( US 5,847,044).

**[0022]** In practice, organotin compounds are generally used. They allow the formulation of uretdione powder coatings, releasing no blocking agent, which reliably and reproducibly completely react to yield coatings having good solvent resistance and elasticity within 30 minutes at a temperature of 150° C or, if shorter cycle times are desired, within 15 minutes at 180° C.

**[0023]** While EP-A 652,263, which describes the use of powder coating curing agents containing uretdione groups as an additive for powder coating compositions

based on epoxy-functional copolymers and carboxyl derivatives as the crosslinking agent, do make a general reference to the two amidine bases DBN and 1,8-diazabicyclo(5.4.0) undec-7-ene (DBU) in a lengthy list of curing catalysts, the person skilled in the art could not gain any concrete indication from this disclosure that precisely these two compounds are highly effective catalysts for the dissociation of uretdione rings. This is because the working examples do not use these two catalysts, but instead an organometallic catalyst as is conventional in known PUR powder coating compositions containing uretdione groups. This reference does not recognize that the catalysts according to the present invention are particularly effective for uretdione dissociation. The low stoving temperatures for the powder systems described in EP-A 652,263 are not attributable to uretdione cleavage accelerated by catalysis with amidine bases, but are in fact within the usual range for epoxy/dicarboxylic acid systems.

**[0024]** While US 5,847,044 describes a polyurethane powder coating composition, containing uretdione groups, and describes the use of N,N,N'-trisubstituted amidine catalysts, this reference does not recognize that the catalysts of the present invention are effective. It is also noteworthy that the compositions of the present invention lead to coatings with no yellowing unlike the compositions when amidine bases are used as the catalyst.

**[0025]** It has been long recognized that epoxy compounds react with carboxylic acids or with anhydrides. It is also known that this reaction can be catalyzed. Antoon and Koenig (J. Polym. Sci., Polym. Chem. Ed. (1981) 19(2):549-70) studied the mechanism of catalysis by tertiary amines of the reaction of anhydrides with epoxy resins, typically a glycidyl ether of bisphenol. They pointed out that it is the quaternary ammonium salt zwitterion that initiated the polymerization reaction. Matejka and Dusek studied the reaction of phenylglycidyl ether model compounds with caproic acid in the presence of a tertiary amine as the catalyst (Polym. Bull. (1986) 15(3):215-21). Based on their experimental data, they suggested that this is an addition esterification process.

**[0026]** Metal salts and amines have been used as catalysts for the epoxy-carboxyl/anhydride reaction. For example, 1,8-Diazabicyclo[5.4.0]undec-7-ene

(DBU), a strong basic amine and its salts are being promoted as catalysts for epoxy-carboxyl/anhydride polymer systems. It is known that the salts of amines usually improved the pot life of such polymer systems. Whitemore et. al. (U.S. Pat. No. 3,639,345) disclosed thermosetting resins using an epoxy functional bisphenol A and a trimellitic anhydride ester with an amine, an imidazole or an aminoalkyl phenol, as the catalyst.

**[0027]** Metal salts or Lewis acid catalysts are also promoted for epoxy resins. The metal salts has found applications as catalysts for epoxycarboxyl/anhydride coatings. The catalytic effect of metal salts was recognized by Connelly et. al. (ZA 6,907,152) who described the use of zinc acetate, chromium acetate, iron octoate, zinc naphthenate, cobalt naphthenate and manganese naphthenate as catalysts. Metal salts of Mg, Ca, Sr, Ba, Zn, Al, Sn and Sb have been disclosed by Lauterbach (U.S. Pat. No. 4,614,674) as catalysts in combination with waxes as matting agents for powder coatings. Wright et. al. disclose (U.S. Pat. No. 4,558,076) a fast curing coating formulation comprising a carboxyl functional polymer, a tertiary amine, a polyepoxide and an Al, Ti, or Zn alkoxide or complex as the catalyst.

**[0028]** A major problem with the known catalysts is the poor stability of the combination of the epoxy and carboxyl/anhydride reactants at ambient room temperature. The increase in viscosity requires the epoxy and the carboxyl/anhydride compounds to be formulated into two separate packages. A further problem is the yellowing tendency of amines during the bake or heating cycle. In addition, it is known that the use of amines result in films that are sensitive to humidity leading to blistering of the film. It would be desirable to have a catalyst that does not require the separate packaging of epoxy and carboxyl/anhydride reactants and does not cause yellowing or sensitivity to humidity leading to blistering.

**[0029]** Metal salts such as zinc carboxylates have been shown to be effective catalysts in the above referenced patents. However, the problem with di and polyvalent metal salts is salt formation with the carboxyl groups of the reactant through ionic crosslinking leading to an instant increase in viscosity or gelation. Although covalent bonds are not formed in this process, this reaction can lead to

very highly viscous formulations with poor flow quality resulting in poor film properties.

**[0030]** Zinc and cadmium complexes with N-substituted imidazoles have been described by Pettinari et al. (Polyhedron, (1998), 17(10):1677-91). The complexes described are in the hydrate form and there is no discussion or suggestion of their use as catalysts in the production of polyurethane or epoxy based polymer coatings.

### SUMMARY OF THE INVENTION

**[0031]** A class of zinc(II) amidine complexes and compositions which effectively catalyze the reaction of epoxy-carboxyl/anhydride have been developed. The use of these catalysts in the coating process not only reduces yellowing, but also provided excellent room temperature stability and excellent humidity resistance. The improved stability with the use of the catalysts of this invention provides for the formulation of a single packaged product.


**[0032]** The present invention is directed to novel organometallic complexes and compositions as catalysts for the reaction of compounds with isocyanate and hydroxy functional groups to form urethane and/or polyurethane and the process employing such catalysts. More particularly, the present invention is directed to novel complexes of zinc (II) with substituted amidines. These novel catalysts are useful for the production of urethanes and polyurethanes which are important in many industrial applications, such as: coatings, foams, adhesives, sealants, and reaction injection molding (RIM) plastics.

**[0033]** An objective of the present invention is an organometallic composition comprising:


**[0034]** (a) a metal selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten, cesium,

**[0035]** (b) an amidine compound of formula I, II or III


(I)



(II)



(III)

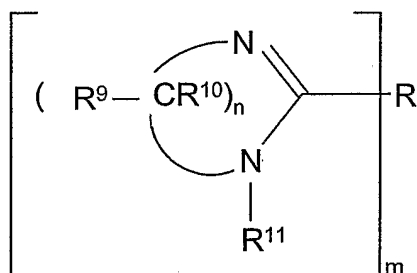

**[0036]** wherein  $\text{R}^1$  is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

**[0037]**  $\text{R}^2$  and  $\text{R}^3$  are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an  $\text{N}=\text{C}-\text{N}$  linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

**[0038]**  $\text{R}^4$  is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

**[0039]**  $R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

**[0040]**  $R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

**[0041]**  $m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

**[0042]** (c) an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465; and

**[0043]** (d) a fumed silica.

**[0044]** The present invention is also directed to a method of catalyzing the process for de-blocking blocked isocyanates to form crosslinked coatings. More particularly, the present invention relates to the use of certain novel complexes and compositions of zinc (II) with substituted amidines that are effective in catalyzing a solventless, a solvent borne and a waterborne process to form such cross linked coatings.

**[0045]** The present invention also relates to powder coatings, and liquid coatings such as coil coating, can coating, wire coating, plastic coatings. More

specifically the present invention relates to a polyurethane powder coating composition containing A) a binder component which is solid below 40° C and liquid above 130° C and has an OH number of about 25 to about 200 and a number average molecular weight of about 400 to about 10,000, B) a polyaddition compound which is solid below 40° C and liquid above 125° C, contains uretdione groups and optionally free isocyanate groups and is prepared from aliphatic and/or cycloaliphatic diisocyanates, and aromatic isocyanates and C) one or more catalysts containing, an organo metallic complex of zinc(II), and substituted amidines provided that components A) and B) are present in amounts such that component B) has about 0.6 to about 1.4 isocyanate groups for each hydroxyl group present in component A) and the amount of component C) is about 0.05 to about 10 wt.%, based on the total weight of the coating composition. The present invention also relates to the use of this powder coating composition for coating heat resistant substrates.

**[0046]** The present invention is also directed to a catalyst for the epoxy reaction with carboxyl and or anhydride functional compounds for use in coating, sealant, adhesive and casting applications. More particularly, the present invention is directed to the use of novel complexes and compositions of zinc(II) with substituted amidines. The use of such a Zn catalyst in the epoxy-carboxyl anhydride reaction improves the stability of the reactants at room temperature and avoids yellowing or blistering in the coating produced. Furthermore, the improved stability of the reactants in the presence of the catalyst enables a single packaged product for the epoxy-carboxyl/anhydride mixture.

**[0047]** The objective of this invention is to develop catalysts with high catalytic efficiency for the isocyanate-hydroxy reaction to form urethane and/or polyurethane.

**[0048]** A second objective of the present invention is to develop catalysts which provide improved cure at a lower temperature and is less sensitive to the presence of water.

**[0049]** Another objective of the present invention is to provide catalysts for the isocyanate-hydroxy reaction which would not catalyze the undesired side reaction of water with isocyanates or the undesired degradation of the polyurethane.


**[0050]** An object of the present invention is to provide novel PUR powder coating compositions which do not release reaction products, have increased reactivity and yield completely crosslinked coatings at distinctly lower stoving temperatures or at correspondingly shorter stoving times than previously known prior art powder coating compositions containing uretdione curing agents, without yellowing of the formulation.

**[0051]** This object may be achieved with the polyurethane powder coating compositions according to the present invention which are described below in greater detail. The powder coatings according to the invention are based on the surprising observation that compounds containing certain novel complexes of zinc (II) with substituted amidines, such as heterocycles containing N,N-disubstituted, N,N'-disubstituted, or N,N,N'-trisubstituted amidine structural moieties, such as 1,5-diazabicyclo (4.3.0)non-5-ene (DBN), so strongly accelerate the dissociation of uretdione groups that PUR powder coating compositions may be formulated with them using known uretdione curing agents such that the powder coating compositions crosslink to yield high quality coatings at relatively low stoving temperatures and within a short time, with no yellowing.

#### **DETAILED DESCRIPTION OF THE INVENTION**

**[0052]** In accordance with the present invention, a series of zinc catalysts used in polyurethane and epoxy coatings have been developed. The zinc catalysts are zinc complexes containing amidine and carboxylate ligands  $[Zn(\text{Amidine})_2(\text{Carboxylate})_2]$ . Alternatively zinc complexes containing diketone or alkylacetoacetate ligands in place of carboxylates are also effective catalysts. Further, catalysts where zinc is substituted with lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten, cesium are also envisioned. The hardeners used in polyurethane and epoxy coatings include uretdione, free isocyanate, blocked isocyanate, or epoxy groups. The catalysts are suitable for powder, solventborne, solventless and waterborne coatings.

**[0053]** The component or compound containing an amidine group can for example have the formula



**[0054]** in which  $R^1$  represents hydrogen, an organic group attached through a carbon atom, an amine group which can be substituted, for example by an optionally substituted hydrocarbyl group, or a hydroxy group which can be etherified, for example with an optionally substituted hydrocarbyl group having up to 8 carbon atoms;  $R^2$  and  $R^3$  each independently represent hydrogen or an organic group attached through a carbon atom or are joined to one another to form (with the linking  $--N=C--N--$ ) a heterocyclic ring, with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms, and  $R^4$  represents hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be etherified, for example with an optionally substituted hydrocarbyl group having up to 8 carbon atoms. When  $R^1$  or  $R^4$  is an organic group it can for example contain 1 to 40 carbon atoms or can be a polymeric group, for example having a molecular weight of 500 to 50,000. The groups  $R^1$ ,  $R^2$ ,  $R^3$ ,  $R^4$  could contain as substituents a total of at least two or more alcoholic hydroxy groups.


**[0055]** Other representative amidines useful in this invention include N'-cyclohexyl-N,N-dimethylformamide, N'-methyl-N,N-di-n-butylacetamide, N'-octadecyl-N,N-dimethylformamide, N'-cyclohexyl-N,N-dimethylvaleramide, 1-methyl-2-cyclohexyliminopyrrolidine, 3-butyl-3,4,5,6-tetrahydropyrimidine, N-(hexyliminomethyl)morpholine, N-( $\alpha$ -(decylimino ethyl)ethyl) pyrrolidine, N'-decyl-N,N-dimethylformamide, N'-dodecyl-N,N-dimethylformamide, N'-cyclohexyl-N,N-acetamide.

**[0056]** A class of amidines for use in the current invention is that in which one of the pairs  $R^2-R^3$  or  $R^2-R^4$  forms a 5 to 7 membered ring consisting of the two amidine nitrogen atoms and one of the pairs  $R^1-R^3$  or  $R^1-R^4$  forms a 5 to 9 membered ring consisting of one amidine nitrogen atom and carbon atoms. Within

this class the compounds are 1,5-diazabicyclo(4.3.0) none-5-ene, 1,8-diazabicyclo(5.4.0) undec-7-ene, 1,4-diazabicyclo(3.3.0) oct-4-ene, 2-methyl-1,5-diazabicyclo(4.3.0) none-5-ene, 2,7,8-trimethyl-1,5-diazabicyclo(4.3.0) none-5-ene, 2-butyl-1,5-diazabicyclo(4.3.0) none-5-ene and 1,9-diazabicyclo(6.5.0) tridec-8-ene.

**[0057]** Particular catalytic amidine groups are those in which the groups  $R^2$  and  $R^3$  are joined to form (with the linking  $-N=C--N-$ ) a heterocyclic ring, for example an imidazoline, imidazole, tetrahydropyrimidine, dihydropyrimidine or pyrimidine ring. Acyclic amidines and guanidines can alternatively be used.

**[0058]** Imidazole derivatives of the general formula




**[0059]** where  $R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently represent hydrogen, alkyl, or substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups, alkyl substituted with the various functional groups described above.

**[0060]** Imidazole structures useful in this invention include, N-(2-Hydroxyethyl)imidazole, N-(3-Aminopropyl)imidazole, 4-(hydroxymethyl) Imidazole, 1-(tert-butoxycarbonyl)imidazole, Imidazole-4-propionic acid, 4-carboxyimidazole, 1-butylimidazole, 2-methyl-4-imidazolecarboxylic acid, 4-formyl imidazole, 1-(ethoxycarbonyl)imidazole, reaction product of propylene oxide with imidazole and 2-methyl imidazole, 1-trimethylsilyl imidazole, 4-(hydroxymethyl) Imidazole hydrochloride, copolymer of 1-chloro-2,3-epoxypropane and imidazole, 1-(p-toluenesulfonyl)imidazole, 1,1'-carbonylbisimidazole, 1-(2-cyanoethyl)-2-ethyl-4-methylimidazole, 2-phenyl-2-imidazoline pyromellitate, 4-(hydroxymethyl) Imidazole picrate, reaction product of 2-propenoic acid with 4,5-dihydro-2-nonyl-1H-imidazole-1-ethanol and 2-heptyl-4,5-dihydro-1H-imidazole-1-ethanol, disodium salts, 1-(

cyanoethyl)-2-undecylimidazole trimellitate, 1-(2-hydroxypropyl)imidazole formate, sodium imidazolate, silver imidazolate.

**[0061]** Cyclic amidines imidazoline or tetrahydropyrimidine derivatives of the general formula

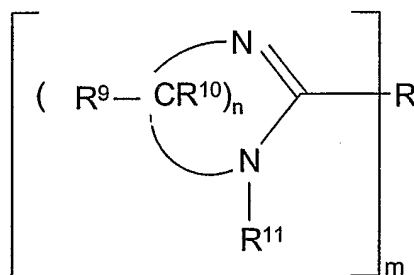

**[0062]** in which  $n = 2$  or  $3$ ,  $m = 1$  or  $2$ ,  $R^9$ ,  $R^{10}$  and  $R^{11}$  are identical or different, and represent hydrogen, alkyl, or substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups, alkyl substituted with the various functional groups described above, and R represents alkyl, alkylene, an aryl, aralkyl, cycloalkyl or heterocyclic radical, substituted if desired with halogen, nitro groups, alkyl groups, alkoxy groups or amino groups, and, when  $m = 1$ , represents also hydrogen, a plurality of radicals being able to be joined, also by hetero atoms such as O, N or S, if desired. Salts of the above structures include carboxylic (aliphatic, aromatic and poly carboxylic), carbonic, sulfonic and phosphoric acid salts.

**[0063]**  $R^9$ ,  $R^{10}$ ,  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons or alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl or hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, said aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms.

**[0064]** When  $m=2$  R is alkylene of 1 to 12 carbons or arylene of 6 to 10 carbons, or a plurality of radicals being able to be joined, containing hetero atoms also by hetero atoms such as O, N or S, if desired.

**[0065]** In some embodiments imidazoline structures are where R is a long chain alkyl up to 18 carbon atoms,  $m=1$  and  $R^{11}$  is one of 2-hydroxyethyl, or 2-aminoethyl or 2-amido ethyl substituents.

**[0066]** Other imidazoline structures useful in this invention include, 1H-Imidazole-1-ethanol, 2-(8Z)-8-heptadecenyl-4,5-dihydro, 1H-Imidazole-1-ethanol, 2-(8Z)-8-heptadecenyl-4,5-dihydro, monoacetate salt, 1H-Imidazole-1-ethanol, -4,5-dihydro, -2-(9Z)-9-octadecenyl, 1H-Imidazole, 4,5-dihydro, -2-(9Z)-9-octadecenyl, oleyl hydroxyethyl imidazoline, 1H-Imidazole-1-ethanol, 4,5-dihydro-2-undecyl-, 1H-Imidazole-1-ethanol, 2-(8-heptadecenyl)-4,5-dihydro, 1-(2-hydroxyethyl)-2-tall oil alkyl-2-imidazoline, azelaic acid salt, 1H-Imidazole-1-ethanol, 2-heptadecyl-4,5-dihydro, 1H-Imidazole-1-ethanol, 2-nonyl-4,5-dihydro, 1H-Imidazole-1-ethanol, 4,5-dihydro-2-C<sub>15-17</sub>-unsaturated alkyl derivatives, 1H-Imidazole-1-ethanol, 4,5-dihydro-2-norcoco alkyl derivatives, 1H-Imidazole-1-ethanol, 4,5-dihydro-2-nortall-oil alkyl derivatives, reaction product of 4,5-dihydro -2-nonyl 1H-Imidazole-1-ethanol, and 4,5-dihydro -2-heptyl 1H-Imidazole-1-ethanol with 2-propenoic acid, 1-propane sulfonic acid, 3-chloro-2-hydroxy- mono sodium salt reaction products with 2-(8Z)-8-heptadecenyl-4,5-dihydro 1H-Imidazole-1-ethanol, chloroacetic acid sodium salt reaction products with 1H-Imidazole-1-ethanol, 4,5-dihydro-2-norcoco alkyl derivatives, and sodium hydroxide, 2-(8-heptadecenyl)-4,5-dihydro 1H-Imidazole-1-ethanamine, 9-octadecenoic acid compound with 2-(8-heptadecenyl)-4,5-dihydro 1H-Imidazole-1-ethanamine.

**[0067]** As used in the present invention the term "organometallic composition" refers both to preformed organometallic complexes and to mixtures comprising metal carboxylates and amidines.

**[0068]** In embodiments of the present invention where the organometallic compositions are preformed metal complexes, the complexes are prepared by heating 1 mole of metal carboxylate with 2 moles of amidine in methanol. The mixture is held at about 50° C for about 2 hours or until it becomes a clear solution. The clear solution is filtered and dried. In some embodiments the dried catalyst is then blended with a fumed silica. A suitable fumed silica is Sipernat 50S from Degussa Corporation.

**[0069]** The present invention relates to a polyurethane powder coating composition containing:

**[0070]** Component A) a binder component which is solid below 40° C and liquid above 130° C and has an OH number of 25 to 200 and a number average molecular weight of 400 to 10,000;

**[0071]** Component B) a hardener which is solid below 40° C and liquid above 125° C, contains uretdione groups and optionally free isocyanate groups and is prepared from aliphatic and/or cycloaliphatic diisocyanates; and

**[0072]** Component C) one or more zinc catalysts of the present invention, provided that components A and B are present in amounts such that component B has about 0.6 to about 1.4 isocyanate groups for each hydroxyl group present in component A and the amount of component C is about 0.05 to about 10 wt. %, based on the total weight of the coating composition.

**[0073]** The present invention also relates to the use of this powder coating composition for coating heat resistant substrates.

**[0074]** Component A is selected from the compounds containing hydroxyl groups known from powder coating technology. Examples of these binders include polyesters, polyacrylates or polyurethanes containing hydroxyl groups. Mixtures of such resins are also suitable.

**[0075]** Component B is a hardener containing uretdione groups and optionally free isocyanate groups. In principle, a broad range of isocyanates are suitable for preparing uretdione-functional polyisocyanates. For example, isophorone diisocyanate (IPDI), hexamethylene diisocyanate (HDI), 2-methylpentane diisocyanate (MPDI), 2,2,4-trimethylhexamethylene diisocyanate/2,4,4-trimethylhexamethylene diisocyanate (TMDI), norbornane diisocyanate (NBDI), methylenediphenyl diisocyanate (MDI) and tetramethylxylylene diisocyanate (TMXDI), 4,4'-diisocyanatodicyclohexylmethane, 1,3-diisocyanato-2(4)-methylcyclohexane and mixtures of these diisocyanates. HDI and IPDI are preferred.

**[0076]** In order to accelerate curing, the powder coatings according to the invention contain catalysts C  $[Zn(\text{Amidine})_2(\text{Carboxylate})_2]$ . Suitable amidine ligands

in catalyst C include any substituted amidine bases bearing alkyl, aralkyl or aryl residues, in which CN double bond of the amidine structure may be arranged both as part of an open-chain molecule (such as 1,1,3,3-tetramethylguanidine, N,N-dimethyl-N'-phenylformamidine or N,N,N'-trimethylformamidine) and as a constituent of a cyclic (such as 1-methylimidazole, 1,2-dimethylimidazole, 4,4-dimethyl-2-imidazoline, or 2-methyltetrahydropyrimidines) or bicyclic system (such as 1,5-diazabicyclo[4.3.0]non-5-ene (DBN), or 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU)) or also exocyclically on a ring system (such as 2-methylimino-1-methylpyrrolidone). Mixtures of amidines may also be used.

**[0077]** In some embodiments component C contains N,N-disubstituted, N,N'-disubstituted, or N,N,N'-trisubstituted amidine structures. For the powder coating compositions according to the invention, 1,5-diazabicyclo[4.3.0]non-5-ene (DBN, N,N,N'-trisubstituted), 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU, N,N,N'-trisubstituted), 1-methylimidazole (N,N,N'-trisubstituted), 1,2-dimethylimidazole (N,N,N'-trisubstituted), 1,1,3,3-tetramethylguanidine (N,N-disubstituted), 4,4-dimethyl-2-imidazoline (N,N'-disubstituted) in catalysts C can be used.

**[0078]** Carboxylate ligands in catalysts C may be aliphatic or aromatic with an equivalent weight in the range of about 45 to about 465. Also the carboxylate ligand could be polymeric such as an acrylic copolymer or an acid functional polyester. Catalysts C containing acetate or formate ligands are may be used for the powder coating compositions according to the invention.

**[0079]** Diketone or the alkylacetoacetate ligands having the following structures:

**[0080]**  $R^{12}COCH_2COR^{13}$  and  $R^{12}OCOCH_2COR^{13}$

**[0081]** Wherein each of  $R^{12}$  and  $R^{13}$  is a branched or linear  $C_1 - C_{20}$  hydrocarbon. Typical ligands or chelating agents include: 6-methyl-2,4-heptanedione (wherein  $R^{12} = C_1$  and  $R^{13} = C_4$ ), 2,2,6,6-tetramethyl-3,5-heptanedione (wherein  $R^{12} = C_4$  and  $R^{13} = C_4$ ), n-valerylacetone (wherein  $R^{12} = C_1$  and  $R^{13} = C_4$ ), n-hexanoylacetone (wherein  $R^{12} = C_1$  and  $R^{13} = C_5$ ), n-octanoylacetone (wherein  $R^{12} = C_1$  and  $R^{13} = C_7$ ), n-nonanoylacetone ( $R^{12} = C_1$ ,  $R^{13} = C_8$ ), n-decanoylacetone (wherein  $R^{12} = C_1$  and  $R^{13} = C_{11}$ ) and the like.

**[0082]** The powder coating compositions according to the invention may optionally also contain additives D which are known from powder coating technology. Examples include leveling agents, such as polyvinyl, polybutyl acrylate, or those based on polysilicones; light stabilizers such as sterically hindered amines; UV absorbers such as benzotriazoles or benzophenones; pigments such as titanium dioxide; and also color stabilizers to counter yellowing due to overbake, e.g., trialkyl and/or triaryl phosphites optionally containing inert substituents, such as triethyl phosphite, triphenyl phosphite and trisnonylphenyl phosphite.

**[0083]** The finished powder coating composition is produced by intimately mixing components A, B, C, and optionally D in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 130° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100 µm. The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels which are then baked in a circulating air drying cabinet at temperatures between 150° and 200° C for 20 minutes. Good solvent and chemical resistance are obtained at considerably lower baking temperatures or shorter baking times than with comparable uretdione powder coating compositions formulated without the zinc catalysts of the present invention. In addition, the cured films are non-yellowing.

**[0084]** The epoxy compounds useful in our invention are the polyglycidyl ether of bisphenol A or F or NOVOLAK™, phenol formaldehyde resins with a molecular weight of between about 350 to 10000, preferably between 380 and 4000. These resins may be used as solids or viscous liquids. The diglycidyl esters of di and polycarboxylic acids are also useful for the present invention. Other glycidyl functional polymers that are useful include the polymers of the glycidyl ester of methacrylic acid, epoxidized oil, cycloaliphatic epoxies and triglycidyl isocyanurate. Cycloaliphatic epoxy compounds useful for the invention include: 3,4-epoxycyclohexylmethyl 3,4-epoxycyclohexanecarboxylate, spiro[1,3-dioxane-5,3'-[7]oxabicyclo[4.1.0]heptane], 2-(7-oxabicyclo[4.1.0]hept-3-yl), 3,4-epoxycyclohexyl methyl 3,4-epoxycyclohexylcarboxylate, 1,2-epoxy-4-(epoxyethyl)cyclohexane, 7-Oxabicyclo[4.1.0]heptane-3,4-dicarboxylic acid, bis(oxiranylmethyl) ester, 1,3,5-triglycidyl isocyanurate (TGIC), epoxidized soybean oil, epoxidized linseed oil.

**[0085]** Compounds with carboxyl or anhydride functional groups suitable in the present invention are the mono- di- or poly-carboxylic acids or anhydrides. Examples of acids and anhydrides suitable for the present invention are: adipic acid; glutaric acid; glutaric anhydride; sebacic acid; 1,10 decanedioic acid; fumaric acid; maleic acid and maleic anhydride; succinic acid; phthalic acid and phthalic anhydride; 8,9,10-trinorborn-5-ene-2,3-dicarboxylic acid and 8,9,10-trinorborn-5-ene-2,3-dicarboxylic anhydride; cyclohexene-1,2-dicarboxylic acid; diphenyl-2,2'-dicarboxylic acid; methylbornene-2,3-dicarboxylic anhydride; cyclohexene-1,2-dicarboxylic acid; tetrahydrophthalic anhydride; 5-methyltetrahydrophthalic anhydride; octahydro-4,7-methano-1H-indene-5,-dicarboxylic acid; 1,2-cyclohexanedicarboxylic acid; dimeric fatty acids; alkenyl succinic acids and anhydrides; dicarboxylic acid anhydrides such as: succinic or glutaric anhydride, alkenylsuccinates with an alkenyl group from C<sub>6</sub> to C<sub>18</sub> ; aromatic anhydrides such as: o-phthalic anhydride, trimellitic acid anhydride or linear anhydrides of diacids.

**[0086]** Also suitable in this invention are carboxyl containing acrylic resins obtained by polymerizing a carboxyl functional monomer such as acrylic, methacrylic, maleic, fumaric, itaconic or the half ester of maleic or fumaric with acrylic or styrene or acrylonitrile monomer. Additionally acrylic polymers with anhydride groups such as the copolymers of acrylic monomers with maleic or itaconic anhydride. Examples for tri carboxylic acids/anhydrides are 1-propene-1,2,3-tricarboxylic acid; 1,2,4-benzenetricarboxylic acid; an adduct of abietic acid with fumaric acid or maleic anhydride; trimellitic anhydride; and citric acid. Examples for monoacids are the C<sub>12</sub> to C<sub>18</sub> fatty acids saturated and unsaturated.

**[0087]** Other compounds suitable for the invention as crosslinkers include mono, di or poly glycidyl esters, the reaction products of mono, di and polycarboxylic acids with epichlorohydrine; glycidyl ethers of aliphatic ethers of diols, triols and polyols, such as 1,2,3-propanetriol glycidyl ether; alkyl (C<sub>10</sub> –C<sub>16</sub>) glycidyl ether; lauryl glycidyl ether; glycerin 1,3-diglycidyl ether; ethylene diglycidyl ether; polyethylene glycol bis(glycidyl ether); 1,4-butanediol diglycidyl ether; 1,6-hexanediglycidyl ether; bis(2,3-epoxypropyl) ether; homo and copolymers of allyl glycidyl ether; ethoxylated alcohol(C<sub>12</sub> –C<sub>14</sub>) glycidyl ether.

**[0088]** Other than the glycidyl ether of bisphenol A and F and of phenol formaldehyde polymers, phenyl glycidyl ether, p-t-butylphenol glycidyl ether, hydroquinone diglycidyl ether, glycidyl p-glycidyoxybenzoate, p-nonylphenol glycidyl ether, glycidyl ether reaction product of 2-methyl phenol and formaldehyde polymer are also useful in the present invention.

**[0089]** It has to be understood that the use of monofunctional compounds and diluents can reduce the crosslinking density and therefore adversely affect the film properties. Therefore the use of monofunctional compounds has to be balanced with the use of higher functional crosslinkers.

**[0090]** The ratio of the epoxy compound to the carboxyl or anhydride in the formulation can be 0.5 to 1 to 5 to 1 depending on the crosslinking density desired. Normally the optimum crosslinking density is achieved when the ratio of functional epoxy groups and carboxyl groups is one to one under ideal conditions. However, with most epoxy formulations some self-condensation of the epoxy groups takes place. For example, it is necessary to use an excess of epoxy groups to react all the carboxyl or anhydride groups so that a film with no free carboxyl groups are present, if excellent detergent or alkali resistance in a film is desired. However, if better adhesion and flexibility is desired, then the ratio can be adjusted so that some of the unreacted carboxyl groups remain.

**[0091]** The ratio of epoxy to carboxy functional groups is important for primer applications where corrosion resistance is an important requirement. In such a formulation the level of epoxy resin can be reduced. The ratio of epoxy to carboxyl groups is also dependent on the functional groups in the reactant system. For example, if one reacts a carboxyl functional acrylic resin with a difunctional epoxy resin, it might be desirable to use an access of carboxy groups. If an acrylic resin which has a high molecular weight is used, it usually contains many carboxyl groups, a typical acrylic resin might have an acid number of 56 and a molecular weight of 20,000. In such a resin the average chain contains 20 carboxyl groups. To achieve crosslinking in such a system, theoretically three carboxy groups have to be reacted to form an effective network. The epoxy in such a formulation might be a diglycidyl ether of bisphenol A, a difunctional crosslinker. A person with skill in the coating art

would therefore use an excess of carboxyl groups and a deficiency of epoxy groups to achieve a good network. Most crosslinking reactions do not go to completion. If the crosslinkers have reacted to an average to 75%, it indicates that some molecules of the crosslinking agents have completely reacted, with some molecules having reacted only at one end and some molecules having not reacted at all. By having an excess of carboxy groups on the acrylic, one could assure a higher conversion of all the epoxy groups. This problem is typical in can coatings, where it is important to eliminate any unreacted epoxy resin to prevent any leaching of epoxy resin into the food.

**[0092]** Typical cure temperatures for the formulations of the present invention are between about 100 to about 300° C for a time period from several seconds to hours. In some embodiments cure temperatures are from about 120 to about 250° C for 30 seconds to 30 minutes.

**[0093]** The formulation of the present invention is useful for producing coatings, adhesive films, or in casting or molding. Typical applications include use as corrosion resistant primers for automotive applications, or can or coil coatings, or automotive clear coats. The coatings can be applied as a high solids or a powder coating.

**[0094]** Cationic water-borne resins or cationic electrocoating resins useful in this invention can be typically prepared by reacting a bisphenol A type epoxy resin with an epoxy equivalent weight of between about 200 to about 2000, preferably between about 400 to about 1000 with an amine. The amine can be ammonia, a secondary, primary or a tertiary amine. If ammonia is used in the preparation of the cationic resin, the reaction of the epoxy resin with ammonia has to be conducted in the presence of large excess of free ammonia to suppress gelation of the resin. In this reaction a combination of primary, secondary and tertiary amine functional resin is formed. With primary amines, depending on the ratio of amine to epoxy secondary, and tertiary amine functional resins are formed. With secondary amines tertiary amine functional resins are produced. If an excess of epoxy is used and if the reaction is conducted in the presence of some water and neutralizing acid, there is also the potential for the formation of quaternary ammonium group containing resins.

**[0095]** Another way to prepare cationic resins is by co-polymerization of cationic monomers such as dimethyl-amino-propyl-methacrylate, dimethyl-amino-ethyl-methacrylate, dimethyl-amino-propyl-acrylamide or t-butyl-amino-ethyl-acrylate with an acrylic or methacrylic ester monomer or optionally with styrene or acrylonitrile. Other methods are the reaction of anhydride functional polymers with amines with primary or secondary and t-amine groups and a mono epoxide compound as shown in U.S. Pat. No. 3,984,382.

**[0096]** If a waterborne formulation is desired, an alcohol or a polyol can be solubilized or dispersed in water in the presence of nonionic groups or a nonionic surfactant. The alcohol or polyol may be incorporated in the bisphenol epoxy resin itself. For example, a bisphenol epoxy resin can be reacted with a methoxy-polyethylene glycol or a methoxy-polyethylene-ether-amine with a MW of between about 500 to about 2000.

**[0097]** Waterborne resin formulations suitable for this invention may also include resins dispersed in water in the presence of a nonionic surfactant. An epoxy or an acrylic or polyester resin may be dispersed in water. The nonionic groups can be a part of the resin structure or a part of an external surfactant. Commercial products, which are suitable, include a dispersion in water of solid bisphenol A glycidyl resins with a molecular weight of between about 900 to about 4000.

**[0098]** The blocked isocyanate crosslinker useful in this invention are aromatic or aliphatic isocyanates with a blocking group, which can be removed. Often the de-blocking to the isocyanate is a displacement reaction, wherein the blocking group is displaced with another group. Typical blocking groups for the isocyanate are selected from the group consisting of malonates, triazoles,  $\epsilon$ -caprolactam, phenols, ketoxime, pyrazoles, alcohols, glycols, glycol ethers and uretdiones.

**[0099]** Some typical di or polyisocyanates suitable for the invention are: hexamethylene diisocyanate, isocyanurate trimer, biuret, isophorone diisocyanate, tetramethylxylidine diisocyanate and methylene bis(phenyl isocyanate). Typical examples of blocking groups are methyl ethyl ketoxime,  $\epsilon$ -caprolactam, 1,2,4-triazole, 3,5-dimethylpyrazole, phenol, 1,2-ethylene glycol, 1,2-propylene glycol, 2-ethylhexanol, 2-butoxyethanol, 2-methoxy (2-ethoxy ethanol).

**[0100]** The cationic resins suitable for the invention may also be typically dispersed in water in the presence of a suitable water soluble organic acid such as formic, acetic, glycolic or lactic acid or an inorganic acid such as sulfamic acid.

**[0101]** A coating formulation is normally prepared by blending and dispersing the blocked isocyanate crosslinker, the cationic resin and the catalyst of this invention in water. If pigments are added they can be dispersed separately in the resin. If neutralization of the cationic resin with an organic acid is required, the acid can be added to the resin or to the water phase. Usually high shear dispersers are used to emulsify or disperse the resin.

**[0102]** The catalyst of this invention is also advantageous for use in solvent borne coating formulations. Most pigmented formulations have shown a decrease of catalytic activity on aging. This reduction in catalyst activity is attributable to the presence of water on the surface of the pigment. Based on experience, it is known that catalyst deactivation takes place if the coating formulations are cured at high humidity.

**[0103]** The present invention is further directed to a cationic electrocoating formulation comprising a water-dispersible cationic polyol, a blocked isocyanate and a catalyst of the present invention.

**[0104]** The water-dispersible cationic polyol is at least di-functional, preferably tri functional or higher. The blocked isocyanate is present at a molar ratio sufficient to facilitate crosslinking. The catalyst is used at a concentration of between about 0.01 to about 5 weight percent (wt %), preferably between about 0.1 to about 1.0 wt %, of metal based on the total resin solids in the formulation.

**[0105]** The isocyanates useful in this invention are aliphatic, aromatic isocyanates or polyisocyanates or resins with terminal isocyanate groups. The resins may be monomeric or polymeric isocyanates. Typical monomeric isocyanates include: toluene diisocyanate (TDI), diphenylmethane diisocyanate (MDI), 1,6-hexamethylene diisocyanate (HDI), phenyl isocyanate, 4,4'-dicyclohexylmethane diisocyanate, isophorone diisocyanate (IPDI), meta-tetramethylxylene diisocyanate (TMXDI), nonanetriisocyanate (TTI) or vinyl isocyanate, or the like. The above monomeric isocyanates are those which are more commonly used and are not

meant to be exclusive. The polymeric polyisocyanates useful in the invention are isocyanurate, allophanate, or biuret compounds and polyurethane products derived from the monomeric diisocyanates as listed hereinabove. Also useful are addition products of monomeric isocyanates with polyester and polyether polyols containing terminal isocyanate groups.

**[0106]** The polyols or resins with hydroxy functional groups useful in this invention comprise monomeric compounds or polymeric compositions containing at least two hydroxy groups per molecule. The molecular weight of the hydroxy containing compounds useful in this invention ranges from about 62 to about 1,000,000; the in some embodiments the range for polyols being between about 300 to about 2000 when used in solvent borne high solids coatings. Typically, the hydroxyl number of the hydroxy containing resin can be from about 10 to about 1000. Optionally, the polyol may contain other functional groups such as carboxyl, amino, urea, carbamate, amide and epoxy groups. The polyol, a blend of polyols or a combination of polymeric polyols and monomeric diols may be employed in a solvent free system, or as a solution in an organic solvent, or as a dispersion/emulsion in water. Typical examples include: polyether polyol, polyester polyol, acrylic polyol, alkyd resin, polyurethane polyol, and the like.

**[0107]** The polyether polyols are the reaction products of ethylene or propylene oxide or tetrahydrofuran with diols or polyols. Polyethers derived from natural products such as cellulose and synthetic epoxy resins may also be used in this invention. Typical polyester polyols are prepared by the reaction of diols, triols or other polyols with di- or polybasic acids. Alkyds with hydroxy functional groups are prepared in a similar process except that mono functional fatty acids may be included. Acrylic polyols are the polymerization products of an ester of acrylic or methacrylic acid with hydroxy containing monomers such as hydroxyethyl, hydroxypropyl or hydroxybutyl ester of acrylic or methacrylic acid. These acrylic polymers can also contain other vinyl monomers such as styrene, acrylonitrile vinyl chloride and others. In addition, polyurethane polyols are also useful in this invention. These are the reaction products of polyether or polyester polyols with diisocyanates.

**[0108]** The polyols listed above are illustrative and are not meant to limit the scope of the invention.

**[0109]** Typically the polyols are either synthesized in bulk in the absence of a solvent or are prepared in the presence of a diluent or by emulsion polymerization in water. Alternatively, they may be prepared in bulk or in a solvent and then dispersed in water. For a description of the methods of preparing polyols see Organic Coatings Science Technology, vol. 1, Wiley-Interscience Co., 1992.

**[0110]** The concentration of the catalysts used is generally from about 0.001 wt % to about 5 wt % on total resin solids. Typically, the concentration of catalysts used is between about 0.001 to about 1.0 wt % based on the total amount of polyol and polyisocyanate, also known as binders. The catalyst concentration used is generally a compromise between pot-life of the formulation and the required cure rate.

**[0111]** The catalyst of the present invention is particularly suitable for applications where exceptionally fast cure is required. For example, the catalysts of the present invention is particularly useful in plural component spray gun applications wherein the catalyst is added to one of the components and the polyol and the isocyanate is mixed in situ in the spray gun. These are important in applications for roof or floor coatings, where the person applying the coating would be able to walk on the freshly applied coating a few minutes after the coating has been applied. Good cure rate is also required for coatings applied at a low temperature or in the presence of moisture, conditions where the catalyst of this invention excels.

**[0112]** Reactive injection molding (RIM) is another area where fast cure is essential. The reactants and catalyst are injected concurrently into a mold, and mixing is achieved during injection. In this application, fast reaction is essential to permit a short cycle time.

**[0113]** The ratio of NCO/OH in the formulation is in the range of about 0.1 to about 10.0 to 1, in some embodiments about 0.5 to about 2.0 to 1 depending upon the end use. For a typical high solids application, the isocyanate to hydroxy ratio is usually about 1.0:1 to about 1.1:1. For many water-borne applications, an excess of

isocyanate is required. Typically the ratio for such applications is about 1.5:1 to about 2.0:1.

**[0114]** The catalyst formulation can be solvent borne, high solids, 100% solids or dispersable in water. Other additives which may be utilized in the formulation to impart desired properties for specific end uses.

**[0115]** For most isocyanate crosslinked coatings, solvents which are free of hydroxy groups and water are used. Typical solvents are esters, ketones, ethers and aliphatic or aromatic hydrocarbons.

**[0116]** The catalytic efficiency of the metal complexes of this invention is determined by measuring the drying time of the coated film or by a gel test. For drying time measurement, the liquid formulation containing polyisocyanate, polyol and catalyst was cast on a metal panel and the surface dry time and the through dry time were recorded with a circular Gardner Drying Time Recorder. For the gel test, liquid polyisocyanate, liquid polyol solution and catalyst were mixed thoroughly at room temperature. The time needed from mixing the liquid components to forming a gel (the time interval when the liquid formulation becomes non-flowable) was recorded as gel time.

**[0117]** The catalysts of this invention exhibit excellent catalytic efficiency, measured as drying time of the coated film and/or gel time, for the isocyanate-hydroxy reaction compared to zirconium diketonates reported in prior art and commercially available organotin catalysts, especially at low temperatures.

**[0118]** The catalysts of this invention also preferentially catalyze the isocyanate-hydroxy reaction over the isocyanate-water reaction. Organo tin does not exhibit this preferential catalysis, and also catalyze the isocyanate-water reaction, which leads to the formation of carbon dioxide and gassing. For example, to prepare a polyurethane coating with exclusive carbamate linkages, a coating formulation containing HDI based aliphatic isocyanate and a polyurethane diol with beta-carbamate was formulated. When the metal complex of the present invention was used as the catalysts, a hard glossy film was obtained. Whereas, with dibutyltin dilaurate as the catalyst, a hazy film was obtained. This is due to the competing reaction of isocyanate with moisture in the air.

**[0119]** Furthermore, it is known that commercial organotin urethane catalysts will affect the durability of the final product. This is due to the catalytic effect of organotin catalysts on the degradation of the polymer product. The metal complexes of the present invention show less of a catalytic effect on the degradation of the polymer than the tin urethane catalysts.

**[0120]** To avoid pigment adsorption or interference from other components which may deactivate the catalyst, it would be an advantage if the catalysts can be pre-blended with the isocyanate component in a two component system. However, a number of urethane catalysts also catalyze the dimerization or trimerization reactions of isocyanate and cannot be pre-blended with the isocyanate component. A solution of a polyisocyanate with the catalysts of this invention showed good compatibility and stability.

**[0121]** The following examples illustrate the invention and are not to be used to limit the scope of the invention.

### EXAMPLES

TABLE 1

Materials Used	Product Description, Manufacturer
ALBESTER 3870 (Component A)	OH Polyester, OH Number: 40, Resolution, Specialty Materials
VESTAGON BF 1540 (Component B)	Polyisocyanate Uretdione Coating, Hardener, % NCO: 15.2%, Degussa Corporation
Sipernat 50s	Fumed Silica, Degussa Corporation
Disparlon PL-540	Leveling Agent, King Industries, Inc.
Ti-Pure-TiO <sub>2</sub> R-900	Titanium Dioxide, E.I. DuPont
VESTAGON B 1400	Caprolactam Blocked Polyisocyanate Hardener, Degussa Corporation, % NCO:12.5%
BUTAFLOW BT-71	70% DBTDL on Powder Carrier, Estron Chemical Inc.
Alcure 4470	Triazole Blocked Polyisocyanate, NCO E.W. : 212, Resolution Specialty Materials
Acrylamac HS 232-2980	Acrylic Polyol, 80% N.V., OH E.W.:793.8

	based on solution, Eastman Chemical Company
Trixene BI 7984	HDI Trimer Blocked with MEKO, 75% N.V., NCO E.W.: 497.3 based on solution, Baxenden, UK
K-KAT XC-B221	Bismuth Carboxylate, 20% Bi, King Industries, Inc.
Trixene BI 7982	HDI Trimer Blocked with 3,5-Dimethylpyrazole, 70% N.V., NCO E.W.: 585.7 based on solution, Baxenden, UK
Mondur MR	Polymeric MDI, NCO E.W.: 134.5, Bayer Corporation
Bayhydrol VP LS 2235	Waterborne Polyol, 45% N.V., % OH: 3.3, Bayer Corporation
Bayhydrur VP LS 2319	Polyisocyanate, % NCO: 18.0, Bayer Corporation
Poly-G 76-120	Polyol, OH E.W.: 480, Arch
Desmodur E743	Polyisocyanate, NCO E.W.: 525, Bayer Corporation
Cocure 55	20% Hg, Caschem
ALBESTER 5040	Carboxyl Polyester, Acid Number: 32, Resolution Specialty Materials
Araldite PT-810	TGIC, Ciba Polymers
Benzoin	Leveling Agent, Aldrich
EPON 2002	Epoxy Resin, Shell
AMICURE CG-1200	DICY, Air Products

**[0122]** Metal Amidine Complex Preparation.

**[0123]** [Metal(Amidine)<sub>2</sub>(Carboxylate)<sub>x</sub>] of this invention (Component C): To a mixture of amidine (2.0 moles) and metal carboxylate (1 mole) was added methanol to make a 50% solution. The mixture was held at 50° C for 2 hours or until it became a clear solution. The solution was filtered and dried. The example catalysts of Metal(Amidine)<sub>2</sub>(Carboxylate)<sub>x</sub> are listed in TABLE 2. x is the oxidation state of the metal.

TABLE 2

Example	Catalyst	Physical Form
1	Zn(DBN <sup>*</sup> ) <sub>2</sub> (acetate) <sub>2</sub>	white powder
2	Zn(DBN <sup>*</sup> ) <sub>2</sub> (formate) <sub>2</sub>	white powder
3	Zn(DBN <sup>*</sup> ) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
4	Zn(DBU <sup>*</sup> ) <sub>2</sub> (acetate) <sub>2</sub>	white powder
5	Zn(DBU <sup>*</sup> ) <sub>2</sub> (formate) <sub>2</sub>	white powder
6	Zn(DBU <sup>*</sup> ) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
7	Zn(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	white powder
8	Zn(1-methylimidazole) <sub>2</sub> (formate) <sub>2</sub>	white powder
9	Zn(1-methylimidazole) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
10	Zn(1,2-dimethylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	white powder
11	Zn(1,2-dimethylimidazole) <sub>2</sub> (formate) <sub>2</sub>	white powder
12	Zn(1,2-dimethylimidazole) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
13	Zn(1-butylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	white powder
14	Zn(1-butylimidazole) <sub>2</sub> (formate) <sub>2</sub>	white powder
15	Zn(1-butylimidazole) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
16	Zn(imidazole) <sub>2</sub> (acetate) <sub>2</sub>	white powder
17	Zn(imidazole) <sub>2</sub> (formate) <sub>2</sub>	white powder
18	Zn(imidazole) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
19	Zn(tetramethylguanidine) <sub>2</sub> (acetate) <sub>2</sub>	white powder
20	Zn(tetramethylguanidine) <sub>2</sub> (formate) <sub>2</sub>	white powder
21	Zn(tetramethylguanidine) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
22	Zn(1,3-diphenylguanidine) <sub>2</sub> (acetate) <sub>2</sub>	white powder
23	Zn(1,3-diphenylguanidine) <sub>2</sub> (formate) <sub>2</sub>	white powder
24	Zn(1,3-diphenylguanidine) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
25	Zn(4,4-dimethyl-2-imidazoline) <sub>2</sub> (acetate) <sub>2</sub>	white powder
26	Zn(4,4-dimethyl-2-imidazoline) <sub>2</sub> (formate) <sub>2</sub>	white powder
27	Zn(4,4-dimethyl-2-imidazoline) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	clear liquid
28	Zn(MACKAZOLINE T <sup>*</sup> ) <sub>2</sub> (acetate) <sub>2</sub>	brown liquid
29	Zn(MACKAZOLINE T <sup>*</sup> ) <sub>2</sub> (formate) <sub>2</sub>	brown liquid

30	Zn(MACKAZOLINE T <sup>*</sup> ) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	brown liquid
31	Zn(Lindax-1 <sup>*</sup> ) <sub>2</sub> (acetate) <sub>2</sub>	brown liquid
32	Zn(Lindax-1 <sup>*</sup> ) <sub>2</sub> (formate) <sub>2</sub>	brown liquid
33	Zn(Lindax-1 <sup>*</sup> ) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	brown liquid
34	Zn(1-methylimidazole) <sub>2</sub> (acac) <sub>2</sub>	white powder
35	Bi(1-methylimidazole) <sub>2</sub> (acetate) <sub>3</sub>	white powder
36	Ca(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	white powder
37	Cd(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	white powder
38	La(1-methylimidazole) <sub>2</sub> (acetate) <sub>3</sub>	white powder
39	Zr(1-methylimidazole) <sub>2</sub> (acetate) <sub>x</sub> (hydroxide) <sub>y</sub> x+y=4	white powder
40	Sn(1-methylimidazole) <sub>2</sub> (2-ethylhexanoate) <sub>2</sub>	brown liquid
41	Hf(1-methylimidazole) <sub>2</sub> (acac) <sub>4</sub>	yellow liquid
*	<p>DBN: 1,5-Diazabicyclo[4.3.0]non-5-ene</p> <p>DBU: 1,8-Diazabicyclo[5.4.0]undec-7-ene</p> <p>Amidines, Zinc Acetate Anhydrous, and Zinc Acetylacetonate [Zn(acac)<sub>2</sub>] supplied by Aldrich.</p> <p>Zinc Formate Anhydrous and Zinc 2-Ethylhexanoate supplied by Alfa Aesar.</p> <p>MACKAZOLINE T supplied by McIntyre Group is tall oil hydroxyethyl imidazoline.</p> <p>Lindax-1 supplied by Lindau Chemicals Inc. is 1-(2-hydroxypropyl)imidazole</p>	

**[0124]** Examples 1-4

**[0125]** Clear Non-Pigmented Powder Coatings Preparation.

**[0126]** Clear Non-Pigmented Powder Coatings: ALBESTER 3870 (component A), VESTAGON BF 1540 (component B), [Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub>] /Sipernat 50S (component C), and Disparlon PL-540 leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 130° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100 μm. The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60 μm, which

were then baked in a circulating air drying cabinet at temperatures between 150° and 200° C.

Powder coating compositions for Examples 1-4 (amounts in % by weight):

TABLE 3

Examples	1	2	3	4
ALBESTER 3870	80.72	80.72	80.72	80.72
VESTAGON BF 1540	17.28	17.28	17.28	17.28
Disparlon PL-540	2.00	2.00	2.00	2.00
Zn(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	0	1.00	3.00	4.00
Sipernat 50S	0	0.25	0.75	1.00

TABLE 4

Examples	MEK Double Rubs				
	150°Cx20'	150°Cx30'	160°Cx20'	170°Cx20'	200°Cx20'
1	-	-	8	100+	
2	-	-	38	100+	-
3	43	72	100+	-	-
4	90	100+	100+	-	-

TABLE 5

Examples	Bake Schedule	20° Gloss	60° Gloss
1	200°Cx20'	68	90
2	170°Cx20'	97	100
3	160°Cx20'	63	96
4	150°Cx30'	80	100

TABLE 6

Examples	Bake Schedule	b*	White Index	Yellow Index
1	200°Cx20'	-1.92	88	-4.88
2	170°Cx20'	-2.61	94	-6.22

TABLE 7

Examples	Bake Schedule	Salt Spray (1700 Hr)	Humidity (1700 Hr)
1	200°Cx20'	4 mm Creepage	No Blistering
2	150°Cx30'	5 mm Creepage	No Blistering

[0127] Examples 1-4 demonstrate that even at distinctly lower baking temperatures, completely crosslinked, high gloss, and non-yellowing clear non-

pigmented coatings were obtained with the powder coating composition according to the invention.

**[0128]** Examples 5-8

**[0129]** White Pigmented Powder Coatings Preparation.

**[0130]** White Pigmented Powder Coatings: ALBESTER 3870 (component A), VESTAGON BF 1540 (component B),  $[\text{Zn}(1\text{-Methylimidazole})_2(\text{Acetate})_2]$  /Sipernat 50S (component C), Ti-Pure-TiO<sub>2</sub> R-900, and Disparlon PL-540 leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 130° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100 μm. The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60 μm, which were then baked in a circulating air drying cabinet at temperatures between 150° and 200° C.

Powder coating compositions for Examples 5-8 (amounts in % by weight):

TABLE 8

Examples	5	6	7	8
ALBESTER 3870	54.19	54.19	54.19	54.19
VESTAGON BF 1540	11.60	11.60	11.60	11.60
Ti-Pure-TiO <sub>2</sub> R-900	32.89	32.89	32.89	32.89
Disparlon PL-540	1.32	1.32	1.32	1.32
Zn(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	0	0.67	2.02	2.69
Sipernat 50S	0	0.17	0.50	0.67

TABLE 9

Examples	Bake Schedule	MEK Double Rubs	20° Gloss	60° Gloss
5	200°Cx20'	100+	82	93
6	170°Cx20'	100+	87	96
7	160°Cx20'	100+	52	91
8	150°Cx30'	100+	81	96

TABLE 10

Examples	Bake Schedule	b*	White Index	Yellow Index
5	200°Cx20'	0.12	89	-0.79
	200°Cx20'(1 <sup>st</sup> Overbake)	2.52	79	3.72
	200°Cx20'(2 <sup>nd</sup> Overbake)	3.33	74	5.20
6	170°Cx20'	-0.20	91	-1.72
	170°Cx20'(1 <sup>st</sup> Overbake)	-0.05	90	-1.12
	200°Cx20'(2 <sup>nd</sup> Overbake)	0.09	89	-0.89
7	160°Cx20'	0.24	91	-0.40
	160°Cx20'(1 <sup>st</sup> Overbake)	0.30	90	-0.32
	200°Cx20'(2 <sup>nd</sup> Overbake)	1.87	82	2.55
8	150°Cx30'	0.43	91	-0.03
	150°Cx30'(1 <sup>st</sup> Overbake)	0.52	90	0.16
	200°Cx30'(2 <sup>nd</sup> Overbake)	3.23	77	5.23

TABLE 11

Examples	Bake Schedule	Salt Spray (1700 Hr)	Humidity (1700 Hr)
5	200°Cx20'	4 mm Creepage	No Blistering
6	170°Cx20'	4 mm Creepage	No Blistering
7	160°Cx20'	4 mm Creepage	No Blistering
8	150°Cx30'	4 mm Creepage	No Blistering

**[0131]** Examples 5-8 demonstrate that even at distinctly lower baking temperatures, completely crosslinked, high gloss, and non-yellowing white pigmented coatings were obtained with the powder coating composition according to the invention.

**[0132]** Example 9

**[0133]** Zinc Acetate/1-Methylimidazole Mixture Preparation.

**[0134]** Zinc Acetate/1-Methylimidazole Mixture of this invention (Component C): To prepare a silica supported amidine, two moles of 1-methylimidazole (164.22 grams) were added drop wise to 86.92 grams of Sipernat 50S under high agitation, which produced a white powder material. The metal carboxylate zinc acetate (one Mole, 183.46 grams) was then homogeneously mixed into 1-methylimidazole carried on fumed silica mentioned above.

**[0135]** Clear Non-Pigmented Powder Coatings Preparation.

**[0136]** Clear Non-Pigmented Powder Coatings: ALBESTER 3870 (component A), VESTAGON BF 1540 (component B), Zinc Acetate/1-Methylimidazole Mixture (component C), and Disparlon PL-540 leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 130° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100 µm. The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60 µm, which were then baked in a circulating air drying cabinet at temperatures between 150° and 200° C.

Powder coating compositions for Example 9 (amounts in % by weight):

TABLE 12

Examples	1	9
ALBESTER 3870	80.72	80.72
VESTAGON BF 1540	17.28	17.28
Disparlon PL-540	2.00	2.00
Zinc Acetate/1-Methylimidazole Mixture	0	1.25

TABLE 13

Examples	Bake Schedule	MEK Double Rubs	20° Gloss	60° Gloss
1	200°Cx20'	100+	68	90
	170°Cx20'	8	-	-
9	170°Cx20'	100+	91	100

TABLE 14

Examples	Bake Schedule	b*	White Index	Yellow Index
1	200°Cx20'	-1.92	88	-4.88
9	170°Cx20'	-2.52	92	-6.02

**[0137]** Examples 1 and 9 demonstrate that even at distinctly lower baking temperatures, completely crosslinked, high gloss, and non-yellowing clear non-pigmented coatings were obtained with the powder coating composition using zinc acetate/1-methylimidazole mixture as a catalyst according to the invention.

**[0138]** Examples 10-12

**[0139]** Clear Non-Pigmented Powder Coatings Preparation.

**[0140]** Clear Non-Pigmented Powder Coatings: ALBESTER 3870 (component A), VESTAGON B 1400 (component B),  $[\text{Zn}(\text{1-Methylimidazole})_2(\text{Acetate})_2]$  /Sipernat 50S or BUTAFLOW BT-71 (70% DBTDL on powder carrier) (component C), and Disparlon PL-540 leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 130° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100 μm. The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60 μm, which were then baked in a circulating air drying cabinet at 170° C.

Powder coating compositions for Examples 10-12 (amounts in % by weight):

TABLE 15

Examples	10	11	12
ALBESTER 3870	78.43	78.43	78.43
VESTAGON B 1400	19.61	19.61	19.61
Disparlon PL-540	1.96	1.96	1.96
$\text{Zn}(\text{1-methylimidazole})_2(\text{acetate})_2$	0	1.00	0
Sipernat 50S	0	0.25	0
DBTDL, 70% on Powder Carrier	0	0	1.43

TABLE 16

Examples	Bake Schedule	MEK Double Runs	20° Gloss	60° Gloss
10	170°Cx15'	86	93	100
11	170°Cx15'	179	82	100
12	170°Cx15'	102	81	100

**[0141]** Examples 10-12 demonstrate that  $\text{Zn}(\text{1-Methylimidazole})_2(\text{Acetate})_2$  is an effective catalyst for caprolactam blocked polyisocyanate powder coatings. Even at distinctly lower baking temperatures, completely crosslinked, and high gloss clear non-pigmented coatings were obtained with the powder coating composition according to the invention.

**[0142]** Example 13

**[0143]** Clear Non-Pigmented Powder Coatings Preparation.

**[0144]** Clear Non-Pigmented Powder Coatings: ALBESTER 3870 (component A), Alcure 4470 (component B; triazole blocked polyisocyanate),  $[\text{Zn}(1\text{-Methylimidazole})_2(\text{Acetate})_2]$  /Sipernat 50S, and Disparlon PL-540 leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 130° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100  $\mu\text{m}$ . The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60  $\mu\text{m}$ , which were then baked in a circulating air drying cabinet at 160° C.

Powder coating compositions for Example 13 (amounts in % by weight):

TABLE 17

Example	13
ALBESTER 3870	86.00
Alcure 4470 (Triazole Blocked)	14.00
Disparlon PL-540	2.00
$\text{Zn}(1\text{-methylimidazole})_2(\text{acetate})_2$	1.00
Sipernat 50S	0.25

TABLE 18

Example	Bake Schedule	MEK Double Runs
13	160°Cx20'	100+

**[0145]** Example 13 demonstrates that  $\text{Zn}(1\text{-Methylimidazole})_2(\text{Acetate})_2$  is an effective catalyst for triazole blocked polyisocyanate powder coatings. Even at distinctly lower baking temperatures, completely crosslinked clear non-pigmented coatings were obtained with the powder coating composition according to the invention.

**[0146]** Examples 14-15

**[0147]** Coating Preparation: Acrylamax HS 232-2980 acrylic polyol and Trixene BI 7984 MEKO blocked HDI polyisocyanate were homogeneously mixed. The resin mixtures were catalyzed with metal catalysts listed in TABLE 19 at a

concentration of 0.11% of metal based on the total resin used. Films were cast on pretreated steel panels at a dry film thickness of approximately 25  $\mu\text{m}$  and baked for 20 minutes at temperatures between 130° and 150° C.

Liquid coating compositions for Examples 14-15 (amounts in % by weight):

TABLE 19

Examples	14	15
Acrylamax HS 232-2980 (Acrylic Polyol, OH E.W. = 793.8)	61.48	61.48
Trixene BI 7984 (HDI Trimer Blocked with MEKO, NCO E.W. = 497.3)	38.52	38.52
K-KAT XC B-221 (20% Bi)	0.55	0
Zn(1-Methylimidazole) <sub>2</sub> (2-Ethylhexanoate) <sub>2</sub> (12.2% Zn)	0	0.90

TABLE 20

Examples	MEK Double Rubs		
	130°Cx20'	140°Cx30'	150°Cx20'
14	14	100+	100+
15	33	100+	100+

**[0148]** Examples 14-15 demonstrate that Zn(1-Methylimidazole)<sub>2</sub>(2-Ethylhexanoate)<sub>2</sub> is an effective catalyst for MEKO blocked HDI polyisocyanate liquid coatings. Even at distinctly lower baking temperatures, completely crosslinked coatings were obtained with the liquid coating composition according to the invention.

**[0149]** Examples 16-17

**[0150]** Coating Preparation: Acrylamax HS 232-2980 acrylic polyol and Trixene BI 7982 3,5-dimethylpyrazole blocked HDI polyisocyanate were homogeneously mixed. The resin mixtures were catalyzed with metal catalysts listed in TABLE 21 at a concentration of 0.20% of metal based on the total resin used. Films were cast on pretreated steel panels at a dry film thickness of approximately 25  $\mu\text{m}$  and baked for 20 minutes at 130° C.

Liquid coating compositions for Examples 16-17 (amounts in % by weight):

TABLE 21

Examples	16	17
Acrylamax HS 232-2980 (Acrylic Polyol, OH E.W. = 793.8)	56.35	56.35
Trixene BI 7982 (HDI Trimer Blocked with 3,5-dimethylpyrazole, NCO E.W. = 585.7)	43.65	43.65
K-KAT XC B-221 (20% Bi)	1.00	0
Zn(1,1,3,3-Tetramethylguanidine) <sub>2</sub> (2-Ethylhexanoate) <sub>2</sub> (11.3% Zn)	0	1.77

TABLE 22

Examples	Bake Schedule	MEK Double Runs
16	130°Cx20'	100+
17	130°Cx20'	100+

**[0151]** Examples 16-17 demonstrate that Zn(1,1,3,3-Tetramethylguanidine)<sub>2</sub>(2-Ethylhexanoate)<sub>2</sub> is an effective catalyst for 3,5-dimethylpyrazole blocked HDI polyisocyanate liquid coatings. Even at distinctly lower baking temperatures, completely crosslinked coatings were obtained with the liquid coating composition according to the invention.

**[0152]** Examples 18-19

**[0153]** Alcohol Blocked Isocyanate Hardener Preparation: 55.9 parts by weight of a Mondur MR (polymeric MDI, NCO E.W. = 134.5) was reacted with 44.1 parts by weight of ethylene glycol monopropyl ether (104.2 g/mole) until FT-IR showed a complete disappearance of the NCO groups. The NCO equivalent of the Hardener is 240.8.

**[0154]** Coating Preparation: Acrylamax HS 232-2980 acrylic polyol and alcohol blocked isocyanate hardner mentioned above were homogeneously mixed. The resin mixtures were catalyzed with metal catalysts listed in TABLE 23 at a concentration of 0.20% of metal based on the total resin used. Films were cast on pretreated steel panels at a dry film thickness of approximately 25 μm and baked for 20 minutes at 175° C.

Liquid coating compositions for Examples 18-19 (amounts in % by weight):

TABLE 23

<b>Examples</b>	<b>18</b>	<b>19</b>
Acrylamax HS 232-2980 (Acrylic Polyol, OH E.W. = 793.8)	76.73	76.73
Alcohol Blocked Isocyanate Hardner (Mondur MR Blocked with Alcohol, NCO E.W. =240.8)	23.27	23.27
K-KAT XC B-221 (20% Bi)	1.00	0
Zn(1-Methylimidazole) <sub>2</sub> (Acetate) <sub>2</sub> (18.8% Zn)	0	1.06

TABLE 24

Examples	Bake Schedule	MEK Double Runs
18	175°Cx20'	100+
19	175°Cx20'	100+

**[0155]** Examples 18-19 demonstrate that Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub> is an effective catalyst for alcohol blocked MDI polyisocyanate liquid coatings. Completely crosslinked coatings were obtained with the liquid coating composition according to the invention.

**[0156]** Example 20

**[0157]** Coating Preparation: Bayhydrol VP LS 2235 waterborne polyol and Bayhydrur VP LS 2319 polyisocyanate were homogeneously mixed. The resin mixtures were catalyzed with Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub> listed in TABLE 25. Films were cast on pretreated steel panels at a dry film thickness of approximately 60 μm and baked for 20 minutes at 60° C and stored at room temperature for 2 hours.

Liquid coating compositions for Example 20 (amounts in % by weight):

TABLE 25

Example 20	
Bayhydrol VP LS 2235 (Waterborne Polyol, 45% N.V., % OH = 3.3)	76.59
Bayhydrur VP LS 2319 (Waterborne Polyisocyanate, % NCO = 18.0) (NCO E.W. = 585.7)	23.41
Zn(1-Methylimidazole) <sub>2</sub> (Acetate) <sub>2</sub>	1.00

TABLE 26

Example	Bake Schedule	Mek Double Rubs
20	60°Cx30' + 2 hours @ RT	100+

**[0158]** Example 20 demonstrates that Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub> is an effective catalyst for aqueous two-component polyurethane coatings. Even at

distinctly lower baking temperatures, completely crosslinked coatings were obtained with the liquid coating composition according to the invention.

**[0159]** Examples 21-22

**[0160]** Coating Preparation: Poly-G 76-120 polyol and Desmodur E743 polyisocyanate were homogeneously mixed. The resin mixtures were catalyzed with  $\text{Zn}(\text{1-Methylimidazole})_2(2\text{-Ethylhexanoate})_2$  listed in TABLE 27. The gel time was measured by a Carri-Med rheometer.

Liquid coating compositions for Examples 21-22 (amounts in % by weight):

TABLE 27

Examples	21	22
Poly-G 76-120 (Polyol, OH E.W. = 480)	47.00	47.00
Desmodur E743 (Polyisocyanate, NCO E.W. = 525)	53.00	53.00
Cocure 55 (20% Hg)	1.00	0
$\text{Zn}(\text{1-Methylimidazole})_2(2\text{-Ethylhexanoate})_2$ (18.8% Zn)	0	1.00

TABLE 28

Example	Gel Time (minutes)
21	35.4
22	29.2

**[0161]** Examples 21-22 demonstrate that  $\text{Zn}(\text{1-Methylimidazole})_2(2\text{-Ethylhexanoate})_2$  is an effective catalyst for two-component elastomers according to the invention.

**[0162]** Examples 23-24

**[0163]** White Pigmented Powder Coatings Preparation.

**[0164]** White Pigmented Powder Coatings: ALBESTER 5040 (component A), Araldite PT-810 TGIC (component B),  $[\text{Zn}(\text{1-Methylimidazole})_2(\text{Acetate})_2]$  /Sipernat 50S (component C), Ti-Pure-TiO<sub>2</sub> R-900, Disparlon PL-540 leveling agent, and Benzoin leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 110° C.

After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of <100  $\mu\text{m}$ . The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60  $\mu\text{m}$ , which were then baked in a circulating air drying cabinet at 140° C.

Powder coating compositions for Examples 23-24 (amounts in % by weight):

TABLE 29

Example	23	24
ALBESTER 5040	60.29	60.29
Araldite PT-810 TGIC	4.54	4.54
Ti-Pure-TiO <sub>2</sub> R-900	32.45	32.45
Disparlon PL-540	2.32	2.32
Benzoin	0.40	0.40
Zn(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	0	1.00
Sipernat 50S	0	0.25

TABLE 30

Example	Bake Schedule	MEK Double Rubs
23	140°Cx20'	12
24	140°Cx20'	100 <sup>+</sup>

**[0165]** Examples 23-24 demonstrate that Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub> is an effective catalyst for epoxy/acid powder coatings. Even at distinctly lower baking temperatures, completely crosslinked white pigmented coatings were obtained with the powder coating composition according to the invention.

**[0166]** Example 25

**[0167]** Clear Non-Pigmented Powder Coatings Preparation.

**[0168]** Clear Non-Pigmented Powder Coatings: EPON 2002 epoxy resin (component A), AMICURE CG-1200 DICY (component B), [Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub>] /Sipernat 50S (component C), and Disparlon PL-540 leveling agent were intimately mixed in an edge runner mill and the mixture was then homogenized in an extruder at temperatures up to a maximum of 110° C. After cooling, the extrudate was fractionated and ground with a pin mill to a particle size of

<100  $\mu\text{m}$ . The powder prepared in this way was applied with an electrostatic powder spraying unit at 60 kV to degreased iron panels to establish film thicknesses of approximately 60  $\mu\text{m}$ , which were then baked in a circulating air drying cabinet at 160° C.

Powder coating compositions for Example 25 (amounts in % by weight):

TABLE 31

<b>Example 25</b>	
EPON 2002 Epoxy Resin	94.00
AMICURE CG-1200 DICY	4.00
Disparlon PL-540	2.00
Zn(1-methylimidazole) <sub>2</sub> (acetate) <sub>2</sub>	1.00
Sipernat 50S	0.25

TABLE 32

<b>Example</b>	<b>Bake Schedule</b>	<b>MEK Double Rubs</b>
25	160°Cx30'	100 <sup>+</sup>

**[0169]** Example 25 demonstrates that Zn(1-Methylimidazole)<sub>2</sub>(Acetate)<sub>2</sub> is an effective catalyst for epoxy/dicy powder coatings. Even at distinctly lower baking temperatures, completely crosslinked clear non-pigmented coatings were obtained with the powder coating composition according to the invention.


What is Claimed is:

1. An organometallic composition comprising:


(a) a metal selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium,

(b) an amidine compound of formula I, II or III


(I)



(II)



(III)

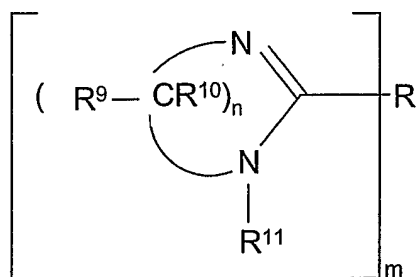

wherein R<sup>1</sup> is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbonyl group having up to 8 carbon atoms;

R<sup>2</sup> and R<sup>3</sup> are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

R<sup>4</sup> is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbonyl group having up to 8 carbon atoms;

R<sup>5</sup>, R<sup>6</sup>, R<sup>7</sup>, and R<sup>8</sup> are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups or ester groups;

R<sup>9</sup>, R<sup>10</sup> and R<sup>11</sup> are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether,

halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

(c) an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465; and

(d) a fumed silica.

2. The composition of claim 1 wherein the amidine is a compound of formula I.

3. The composition of claim 2 wherein the metal is zinc.

4. The composition of claim 3 wherein the carboxylate is an aromatic compound.

5. The composition of claim 3 wherein the carboxylate is an aliphatic compound.

6. The composition of claim 5 wherein  $R_2$  is hydrogen.

7. The composition of claim 6 wherein  $R_1$  is an amine and  $R_3$  and  $R_4$  are methyl.

8. The composition of claim 7 wherein the amidine is 1,1,3,3-tetramethylguanidine and the carboxylate is 2-ethylhexanoate.

9. The composition of claim 2 wherein one of  $R^2-R^3$  or  $R^2-R^4$  forms a 5 to 7 membered ring comprising the two amidine nitrogen atoms and one of the pairs  $R^1-R^3$  or  $R^1-R^4$  forms a 5 to 9 membered ring comprising one amidine nitrogen.

10. The composition of claim 9 wherein the amidine is selected from the group consisting of 1,5-diazabicyclo(4.3.0) non-5-ene, 1,8-diazabicyclo(5.4.0) undec-7-ene, 1,4-diazabicyclo(3.3.0) oct-4-ene, 2-methyl-1,5-diazabicyclo(4.3.0) non-5-ene, 2,7,8-trimethyl-1,5-diazabicyclo(4.3.0) non-5-ene, 2-butyl-1,5-diazabicyclo(4.3.0) non-5-ene and 1,9-diazabicyclo(6.5.0) tridec-8-ene.

11. The composition of claim 2 wherein R<sup>2</sup> and R<sup>3</sup> join to form a 5 to 7 membered heterocyclic ring.

12. The composition of claim 11 wherein the amidine is selected from the group consisting of imidazoline, imidazole, tetrahydropyrimidine, dihydropyrimidine and pyrimidine.

13. The composition of claim 1 wherein the amidine is a compound of formula II.

14. The composition of claim 13 wherein the amidine is selected from the group consisting of N-(2-Hydroxyethyl)imidazole, N-(3-Aminopropyl)imidazole, 4-(hydroxymethyl) Imidazole, 1-(tert-butoxycarbonyl)imidazole, Imidazole-4-propionic acid, 4-carboximidazole, 1-butylimidazole, 2-methyl-4-imidazolecarboxylic acid, 4-formyl imidazole, 1-(ethoxycarbonyl)imidazole, 1-trimethylsilyl imidazole, 4-(hydroxymethyl) Imidazole hydrochloride, copolymer of 1-chloro-2,3-epoxypropane and imidazole, 1(p-toluenesulfonyl)imidazole, 1,1'-carbonylbisimidazole, 1-(2-cyanoethyl)-2-ethyl-4-methylimidazole, 2-phenyl-2-imidazoline pyromellitate, 4-(hydroxymethyl) Imidazole picrate, 1-(cyanoethyl)-2-undecylimidazole trimellitate, 1-(2-hydroxypropyl)imidazole formate, sodium imidazolate and silver imidazolate.

15. The composition of claim 13 wherein the metal is zinc.

16. The composition of claim 15 wherein the carboxylate is an aromatic compound.
17. The composition of claim 15 wherein the carboxylate is an aliphatic compound.
18. The composition of claim 17 wherein R<sup>5</sup> is methyl.
19. The composition of claim 18 wherein the amidine is 1-methylimidazole and the carboxylate is acetate.
20. The composition of claim 1 wherein the amidine is a compound of formula III.
21. The composition of claim 20 wherein:
- R is C<sub>1</sub>-C<sub>18</sub> alkyl;
- m = 1; and
- R<sup>11</sup> is selected from the group consisting of 2-hydroxyethyl, 2-aminoethyl and 2-amidoethyl.
22. The composition of claim 20 wherein the amidine is selected from the group consisting of 1H-Imidazole-1-ethanol, 2-(8Z)-8-heptadecenyl-4,5-dihydro-1H-Imidazole-1-ethanol, 2-(8Z)-8-heptadecenyl-4,5-dihydromonoacetate salt, 1H-Imidazole-1-ethanol-4,5-dihydro-2-(9Z)-9-octadecenyl-1H-Imidazole, 4,5-dihydro-2-(9Z)-9-octadecenyl-oleyl hydroxyethyl imidazoline, 1H-Imidazole-1-ethanol-4,5-dihydro-2-undecyl-1H-Imidazole-1-ethanol-2-(8-heptadecenyl)-4,5-dihydro-1-(2-hydroxyethyl)-2-tall oil alkyl-2-imidazoline azelaic acid salt, 1H-Imidazole-1-ethanol-2-heptadecyl-4,5-dihydro-1H-Imidazole-1-ethanol, 2-nonyl-4,5-dihydro-1H-Imidazole-1-ethanol-4,5-dihydro-2-C<sub>15-17</sub>-unsaturated alkyl derivatives, 1H-Imidazole-1-

ethanol-4,5-dihydro-2-norcoco alkyl derivatives and 1H-Imidazole-1-ethanol-4,5-dihydro-2-nortall-oil alkyl derivatives.

23. The composition of claim 1 wherein the carboxylate is replaced by alkylacetoacetate or alkylacetoacetate ligand compounds of formula IV or V

(IV)



(V)



wherein  $R^{12}$  and  $R^{13}$  are independently a branched or linear  $C_1$ - $C_{20}$  hydrocarbon.

24. The composition of claim 1 wherein the amorphous silica comprises from about 0.1% to about 2.0% by weight of the composition.

25. A coating composition comprising:

(a) a binder which is a solid below about 40°C and a liquid above about 130°C and has an OH number of 25 to 200 and a number average molecular weight from about 400 to about 10,000;

(b) a hardener which is solid below about 40°C and liquid above about 125°C, contains uretdione groups and optionally isocyanate groups;

(c) an organometallic composition of claim 1; and

(d) optionally one or more additives;

wherein the binder and the hardener are present in amounts such that the hardner has about 0.6 to about 1.4 isocyanate groups for each hydroxyl group present in the binder; and

wherein the amount of the organometallic composition is from about 0.05% to about 10% by weight of the coating composition.


26. A coating composition comprising:

(a) a binder which is a solid below about 40°C and a liquid above about 130°C and has an OH number of 25 to 200 and a number average molecular weight from about 400 to about 10,000;


(b) a hardener which is solid below about 40°C and liquid above about 125°C, contains uretdione groups and optionally isocyanate groups;

(c) a silica supported amidine wherein the amidine is a compound of formula I, II or III


(I)



(II)



(III)

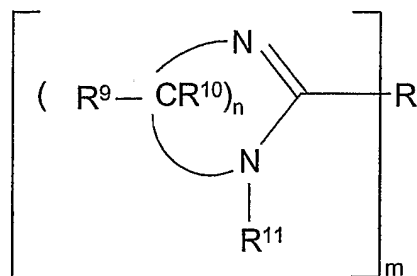

wherein  $R^1$  is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^2$  and  $R^3$  are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

$R^4$  is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

$R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

the silica is a fumed silica;

(d) a metal carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium and the carboxylate is an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465; and

(e) optionally one or more additives;

wherein the binder and the hardner are present in amounts such that the hardner has about 0.6 to about 1.4 isocyanate groups for each hydroxyl group present in the binder; and

wherein the combined amount of the silica supported amidine and metal carboxylate is from about 0.05% to about 10% by weight of the coating composition.

27. The composition of claim 26 wherein:

the amidine is 1-methylimidazole,

the metal is zinc, and

the carboxylate is selected from the group consisting of acetate, formate and 2-ethylhexanoate.

28. The composition of claim 25 wherein the binder is selected from the group consisting of polyesters, polyacrylates and polyurethanes containing hydroxyl groups or mixtures thereof.

29. The composition of claim 25 wherein the hardener is selected from the group consisting of isophorone diisocyanate, hexamethylene diisocyanate, 2-methylpentane diisocyanate, 2,2,4-trimethylhexamethylene diisocyanate/2,4,4-trimethylhexamethylene diisocyanate, norbornane diisocyanate, methylenediphenyl diisocyanate, tetramethylxylylene diisocyanate, 4,4'-diisocyanatodicyclohexylmethane and 1,3-diisocyanato-2(4)-methylcyclohexane.

30. The composition of claim 25 wherein the hardener is an aromatic or aliphatic isocyanate and wherein the isocyanate contains a removable blocking group.

31. The composition of claim 29 wherein the removable blocking group is selected from from the group consisting of malonates, triazoles,  $\epsilon$ -caprolactam, phenols, ketoxime, pyrazoles, alcohols, glycols and glycol ethers.

32. The composition of claim 25 or 30 wherein the organometallic composition comprises  $\text{Zn}(\text{1-methylimidazole})_2(\text{acetate})_2$ .

33. The composition of claim 25 or 30 wherein the organometallic composition comprises  $\text{Zn}(\text{1,1,3,3-tetramethylguanidine})_2(\text{2-ethylhexanoate})_2$ .

34. The composition of claim 25 or 30 wherein the composition is a two component coating composition further comprising an organic solvent.

35. The composition of claim 34 wherein the organic solvent is selected from the group consisting of esters, ketones, ethers, aliphatic hydrocarbons and aromatic hydrocarbons.

36. The composition of claim 25 or claim 30 wherein the composition is a two component coating composition further comprising water.

37. A method of coating a substrate comprising:

mixing;

(a) a binder which is a solid below about 40°C and a liquid above about 130°C and has an OH number of 25 to 200 and a number average molecular weight from about 400 to about 10,000;

(b) a hardener which is solid below about 40°C and liquid above about 125°C, contains uretdione groups and optionally isocyanate groups;

(c) an organometallic composition of claim 1; and

(d) optionally one or more additives;

wherein the binder and the hardner are present in amounts such that the hardner has about 0.6 to about 1.4 isocyanate groups for each hydroxyl group present in the binder; and

wherein the amount of the organometallic composition is from about 0.05% to about 10% by weight of the total crosslinkable polyurethane powder composition;  
homogenizing the mixture at a temperature of less than about 130°C;  
cooling the mixture to ambient temperature;  
grinding the mixture to a particle size of less than about 100µm;  
applying the mixture to the substrate; and  
baking the substrate at a temperature of from about 150° C to about 200° C for less than about 20 minutes.

38. A method of coating a substrate comprising:


mixing;

(a) a binder which is a solid below about 40°C and a liquid above about 130° C and has an OH number of 25 to 200 and a number average molecular weight from about 400 to about 10,000;


(b) a hardener which is solid below about 40°C and liquid above about 125°C, contains uretdione groups and optionally isocyanate groups;

(c) a silica supported amidine wherein the amidine is a compound of formula I, II or III


(I)



(II)



(III)

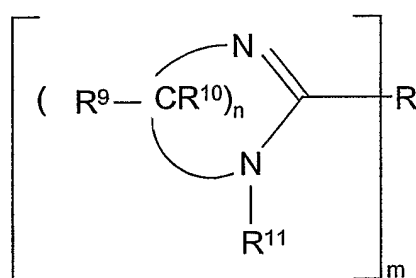

wherein R<sup>1</sup> is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

R<sup>2</sup> and R<sup>3</sup> are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

R<sup>4</sup> is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

R<sup>5</sup>, R<sup>6</sup>, R<sup>7</sup>, and R<sup>8</sup> are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide

groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

$R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

the silica is a fumed silica;

(d) a metal carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium and the carboxylate is an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465; and

(e) optionally one or more additives;

wherein the binder and the hardner are present in amounts such that the hardner has about 0.6 to about 1.4 isocyanate groups for each hydroxyl group present in the binder; and

wherein the combined amount of the silica supported amidine and metal carboxylate is from about 0.05% to about 10% by weight of the coating composition;  
homogenizing the mixture at a temperature of less than about 130°C;  
cooling the mixture to ambient temperature;  
grinding the mixture to a particle size of less than about 100µm;  
applying the mixture to the substrate; and  
baking the substrate at a temperature of from about 150° C to about 200° C for less than about 20 minutes.

39. The method of claim 37 wherein the binders are selected from the group consisting of polyesters, polyacrylates and polyurethanes containing hydroxyl groups.

40. The method of claim 37 wherein the hardners are selected from the group consisting of isophorone diisocyanate, hexamethylene diisocyanate, 2-methylpentane diisocyanate, 2,2,4-trimethylhexamethylene diisocyanate/2,4,4-trimethylhexamethylene diisocyanate, norbornane diisocyanate, methylenediphenyl diisocyanate, tetramethylxylylene diisocyanate, 4,4'-diisocyanatodicyclohexylmethane and 1,3-diisocyanato-2(4)-methylcyclohexane.

41. The method of claim 37 wherein the organometallic composition further comprises an amidine selected from the group consisting of 1,5-diazabicyclo[4.3.0]non-5-ene, 1,8-diazabicyclo[5.4.0]undec-7-ene, 1-

methylimidazole, 1,2-dimethylimidazole, 1,1,3,3-tetramethylguanidine and 4,4-dimethyl-2-imidazoline.

42. The method of claim 37 wherein the organometallic composition comprises  $\text{Zn}(\text{1-methylimidazole})_2(\text{acetate})_2$ .

43. The method of claim 37 wherein the organometallic composition comprises  $\text{Zn}(\text{1,1,3,3-tetramethylguanidine})_2(\text{2-ethylhexanoate})_2$ .

44. A coating composition comprising:

- (a) an epoxy compound;
- (b) a carboxyl or anhydride compound; and
- (c) an organometallic composition of claim 1;


wherein the epoxy to carboxyl or anhydride ratio is from about 0.5 to 1 to about 5 to 1.

45. A coating composition comprising:


- (a) an epoxy compound;
- (b) a carboxyl or anhydride compound;
- (c) a silica supported amidine wherein the amidine is a compound of formula I,

II or III


(I)



(II)



(III)

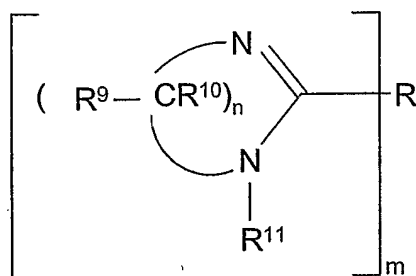

wherein R<sup>1</sup> is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

R<sup>2</sup> and R<sup>3</sup> are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

R<sup>4</sup> is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

R<sup>5</sup>, R<sup>6</sup>, R<sup>7</sup>, and R<sup>8</sup> are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl,

aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups or ester groups;

R<sup>9</sup>, R<sup>10</sup> and R<sup>11</sup> are independently hydrogen; alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen, -N(R)<sub>2</sub>, polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when m = 1, R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

m = 1 or 2; n = 2 or 3;

the silica is a fumed silica; and

(d) a metal carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium and the carboxylate is an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465;

wherein the epoxy to carboxyl or anhydride ratio is from about 0.5 to 1 to about 5 to 1.

46. The composition of claim 45 wherein:

the silica supported amidine is 1-methylimidazole,

the metal is zinc, and

the carboxylate is selected from the group consisting of acetate, formate and 2-ethylhexanoate.

47. The composition of claim 44 wherein the epoxy compound is

selected from the group consisting of a polyglycidyl ether of bisphenol A, a

polyglycidyl ether of bisphenol F, a NOVOLAK™ resin, a phenol formaldehyde resin with a molecular weight from about 350 to about 10,000, diglycidyl esters of di and

polycarboxylic acids, polymers of the glycidyl ester of methacrylic acid, epoxidized

oil, cycloaliphatic epoxies, triglycidyl isocyanurate, 3,4-epoxycyclohexylmethyl 3,4-

epoxycyclohexanecarboxylate, spiro[1,3-dioxane-5,3'-[7]oxabicyclo[4.1.0]heptane],

2-(7-oxabicyclo[4.1.0]hept-3-yl), 3,4-epoxycyclohexyl) methyl 3,4-

epoxycyclohexylcarboxylate, 1,2-epoxy-4-(epoxyethyl)cyclohexane, 7-

Oxabicyclo[4.1.0]heptane-3,4-dicarboxylic acid, bis(oxiranylmethyl) ester, 1,3,5-

triglycidyl isocyanurate, epoxidized soybean oil and epoxidized linseed oil.

48. The composition of claim 47 wherein the phenol formaldehyde

resin has a molecular weight of 380 to 4,000.

49. The composition of claim 44 wherein the carboxyl or anhydride

compounds are selected from the group consisting of mono-carboxylic acids, di-

carboxylic acids, poly-carboxylic acids, carboxylic anhydrides, adipic acid, glutaric

acid, glutaric anhydride, sebacic acid, 1,10 decanedioic acid, fumaric acid, maleic

acid and maleic anhydride, succinic acid, phthalic acid and phthalic anhydride,

8,9,10-trinorborn-5-ene-2,3-dicarboxylic acid, 8,9,10-trinorborn-5-ene-2,3-

dicarboxylic anhydride, cyclohexene-1,2-dicarboxylic acid, diphenyl-2,2'-dicarboxylic acid, methylnorbornene-2,3-dicarboxylic anhydride, cyclohexene-1,2-dicarboxylic acid, tetrahydrophthalic anhydride, 5-methyltetrahydrophthalic anhydride, octahydro-4,7-methano-1H-indene-5,-dicarboxylic acid, 1,2-cyclohexanedicarboxylic acid, dimeric fatty acids, alkenyl succinic acids and anhydrides, dicarboxylic acid anhydrides, alkenylsuccinates with an alkenyl group from C<sub>6</sub> to C<sub>18</sub> and aromatic anhydrides.

50. The composition of claim 44 wherein the composition is a two component coating composition further comprising an organic solvent.

51. The composition of claim 50 wherein the organic solvent is selected from the group consisting of esters, ketones, ethers, aliphatic hydrocarbons and aromatic hydrocarbons.

52. The composition of claim 44 wherein the composition is a two coating composition further comprising water.

53. A method of coating a substrate comprising:

mixing;

(a) an epoxy compound,

(b) a carboxyl or anhydride compound, and

(c) an organometallic composition of claim 1,

wherein the epoxy to carboxyl or anhydride ratio is from about 0.5 to 1 to about 5 to 1;

homogenizing the mixture at a temperature of less than about 110°C;

cooling the mixture to ambient temperature;

grinding the mixture to a particle size of less than about 100µm;

applying the mixture to the substrate; and  
 baking the substrate at a temperature of from about 100°C to about 150°C for less than about 20 minutes.

54. A method of coating a substrate comprising:

mixing;


(a) an epoxy compound,

(b) a carboxyl or anhydride compound,


(c) a silica supported amidine wherein the amidine is a compound of formula I,

II or III


(I)



(II)



(III)

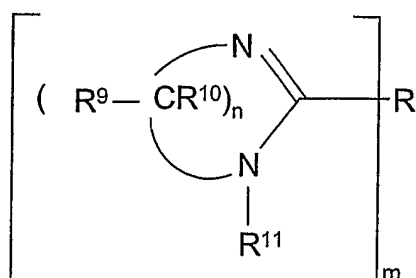

wherein  $R^1$  is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^2$  and  $R^3$  are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

$R^4$  is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

$R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl,

substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

the silica is a fumed silica; and

(d) a metal carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium and the carboxylate is an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465;

wherein the epoxy to carboxyl or anhydride ratio is from about 0.5 to 1 to about 5 to 1;

homogenizing the mixture at a temperature of less than about  $110^{\circ}\text{C}$ ;

cooling the mixture to ambient temperature;

grinding the mixture to a particle size of less than about  $100\mu\text{m}$ ;

applying the mixture to the substrate; and

baking the substrate at a temperature of from about  $100^{\circ}\text{C}$  to about  $150^{\circ}\text{C}$  for less than about 20 minutes.

55. A coating composition comprising:

(a) a bisphenol A epoxy/amino resin with an equivalent weight of from about 200 to about 2000;

(b) an aromatic or aliphatic isocyanate with a blocking group that can be removed; and

(c) an organometallic composition of claim 1.


56. A coating composition comprising:

(a) a bisphenol A epoxy/amino resin with an equivalent weight of from about 200 to about 2000;


(b) an aromatic or aliphatic isocyanate with a blocking group that can be removed;

(c) a silica supported amidine wherein the amidine is a compound of formula I, II or III


(I)



(II)



(III)

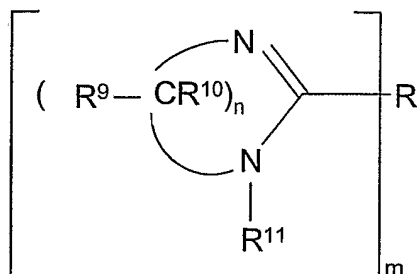

wherein  $R^1$  is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^2$  and  $R^3$  are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

$R^4$  is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

$R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

the silica is a fumed silica; and

(d) a metal carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium and the carboxylate is an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465.

57. The composition of claim 56 wherein:

the silica supported amidine is 1-methylimidazole,

the metal is zinc, and

the carboxylate is selected from the group consisting of acetate, formate and 2-ethylhexanoate.

58. The composition of claim 56 wherein the composition is a two component coating composition further comprising an organic solvent and one or more of an alcohol, polyol or water soluble organic acid.

59. The composition of claim 58 wherein the organic solvent is selected from the group consisting of esters, ketones, ethers, aliphatic hydrocarbons and aromatic hydrocarbons.

60. The composition of claim 56 wherein the composition is a two component coating composition further comprising water and one or more of an alcohol, polyol or water soluble organic acid.

61. A method of coating a substrate comprising:  
mixing;  
a bisphenol A epoxy/amino resin,  
an aromatic or aliphatic isocyanate with a blocking group that can be removed,  
an organometallic composition of claim 1;  
applying the mixture to the substrate;  
heating the substrate at from about 100° C to about 300° C for from about 5 seconds to about 3 hours thereby coating the substrate.


62. The method of claim 61 wherein the heating of the substrate is from about 120°C to about 250°C for from about 30 seconds to about 30 minutes.

63. A method of coating a substrate comprising:  
mixing;


a bisphenol A epoxy/amino resin,  
 an aromatic or aliphatic isocyanate with a blocking group that can be  
 removed,

A silica supported amidine wherein the amidine is a compound of formula I, II  
 or III


(I)



(II)



(III)

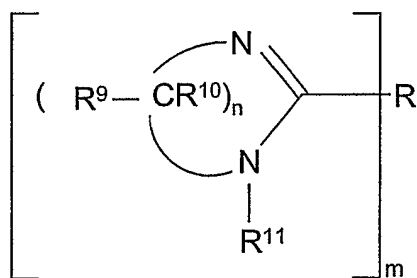

wherein R<sup>1</sup> is hydrogen, an organic group attached through a carbon atom,  
 an amine group which is optionally substituted, or a hydroxy group which is  
 optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^2$  and  $R^3$  are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

$R^4$  is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

$R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms, cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical,

optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ;

the silica is a fumed silica; and

a metal carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium and the carboxylate is an aliphatic, aromatic or polymeric carboxylate with an equivalent weight of about 45 to about 465;


applying the mixture to the substrate;

heating the substrate at from about  $100^{\circ}\text{C}$  to about  $300^{\circ}\text{C}$  for from about 5 seconds to about 3 hours thereby coating the substrate.


64. A method of preparing an organometallic composition comprising:

mixing two molar equivalents of an amidine of formula I, II or III


(I)



(II)



(III)

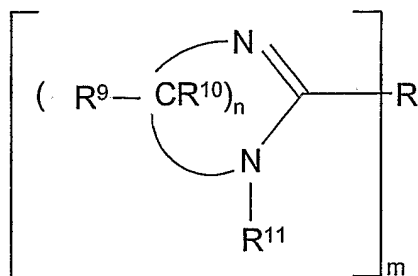

wherein  $R^1$  is hydrogen, an organic group attached through a carbon atom, an amine group which is optionally substituted, or a hydroxy group which is optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^2$  and  $R^3$  are each independently hydrogen or an organic group attached through a carbon atom or are joined to one another by an N=C-N linkage to form a heterocyclic ring with one or more hetero atoms or a fused bicyclic ring with one or more heteroatoms;

$R^4$  is hydrogen, an organic group attached through a carbon atom or a hydroxy group which can be optionally etherified with a hydrocarbyl group having up to 8 carbon atoms;

$R^5$ ,  $R^6$ ,  $R^7$ , and  $R^8$  are independently hydrogen, alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocycles, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups;

$R^9$ ,  $R^{10}$  and  $R^{11}$  are independently hydrogen, alkyl, alkenyl or alkoxy of 1 to 36 carbons, cycloalkyl of 6 to 32 carbons, alkylamino of 1 to 36 carbon atoms,

cycloalkyl of 5 to 12 carbon atoms, phenyl, hydroxyalkyl, hydroxycycloalkyl of 1 to 20 carbon atoms, methoxyalkyl of 1 to 20 carbon atoms, aralkyl of 7 to 9 carbon atoms, the aralkyl wherein the aryl group is further substituted by alkyl of 1 to 36 carbon atoms, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups, ester groups, or carbonamide groups optionally alkyl substituted with alkyl, substituted alkyl, hydroxyalkyl, aryl, aralkyl, cycloalkyl, heterocyclics, ether, thioether, halogen,  $-N(R)_2$ , polyethylene polyamines, nitro groups, keto groups or ester groups; and R represents alkyl, alkylene, aryl, aralkyl, cycloalkyl or heterocyclic radical, optionally substituted with halogen, nitro, alkyl, alkoxy or amino, and, when  $m = 1$ , R is hydrogen or a plurality of radicals optionally joined by hetero atoms O, N or S;

$m = 1$  or  $2$ ;  $n = 2$  or  $3$ ,

with one molar equivalent of a metal aliphatic, aromatic or polymeric carboxylate wherein the metal is selected from the group consisting of zinc, lithium, sodium, magnesium, barium, potassium, calcium, bismuth, cadmium, aluminum, zirconium, tin, or hafnium, titanium, lanthanum, vanadium, niobium, tantalum, tellurium, molybdenum, tungsten and cesium;

heating the mixture at about  $50^{\circ}\text{C}$  for about 2 hours;

drying the mixture; and

blending the dried mixture with a fumed silica.


65. The method of claim 64 wherein the carboxylate is aliphatic.

66. The method of claim 65 wherein the metal is zinc.

67. The method of claim 66 wherein the amidine is 1-methylimidazole.


68. An anhydrous compound of formula VI

(VI)




wherein X is an amidine of formula VII or VIII:

(VII)

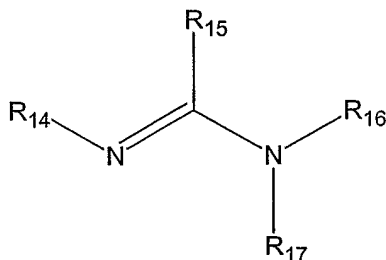

(VIII)



wherein  $R_{14}$  is hydrogen or  $C_1$ - $C_6$  alkyl,

$R_{15}$  is  $C_1$ - $C_6$  alkyl or an amine optionally substituted with  $C_1$ - $C_6$  alkyl or phenyl,

$R_{16}$  and  $R_{17}$  are hydrogen,  $C_1$ - $C_6$  alkyl or phenyl,

$R_{18}$ ,  $R_{19}$ ,  $R_{20}$  and  $R_{21}$  are independently hydrogen or  $C_1$ - $C_6$  alkyl; and

Y is an aliphatic carboxylate with an equivalent weight of about 45 to about 465.

69. A compound according to claim 68 that is selected from the group consisting of  $\text{Zn}(\text{tetramethylguanidine})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{tetramethylguanidine})_2(\text{formate})_2$ ,  $\text{Zn}(\text{tetramethylguanidine})_2(2\text{-ethylhexanoate})_2$ ,  $\text{Zn}(1,3\text{-diphenylguanidine})_2(\text{acetate})_2$ ,  $\text{Zn}(1,3\text{-diphenylguanidine})_2(\text{formate})_2$  and  $\text{Zn}(1,3\text{-diphenylguanidine})_2(2\text{-ethylhexanoate})_2$ .

70. A compound according to claim 68 that is selected from the group consisting of  $\text{Zn}(\text{1-methylimidazole})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{1-methylimidazole})_2(\text{formate})_2$ ,  $\text{Zn}(\text{1-methylimidazole})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{1,2-dimethylimidazole})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{1,2-dimethylimidazole})_2(\text{formate})_2$ ,  $\text{Zn}(\text{1,2-dimethylimidazole})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{1-butylimidazole})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{1-butylimidazole})_2(\text{formate})_2$ ,  $\text{Zn}(\text{1-butylimidazole})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{imidazole})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{imidazole})_2(\text{formate})_2$ ,  $\text{Zn}(\text{imidazole})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{1-(2-hydroxypropyl)imidazole})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{1-(2-hydroxypropyl)imidazole})_2(\text{formate})_2$ ,  $\text{Zn}(\text{1-(2-hydroxypropyl)imidazole})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{4,4-dimethyl-2-imidazoline})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{4,4-dimethyl-2-imidazoline})_2(\text{formate})_2$ ,  $\text{Zn}(\text{4,4-dimethyl-2-imidazoline})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{tall oil hydroxyethyl imidazoline})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{tall oil hydroxyethyl imidazoline})_2(\text{formate})_2$ , and  $\text{Zn}(\text{tall oil hydroxyethyl imidazoline})_2(\text{2-ethylhexanoate})_2$ .

71. A compound according to claim 68 that is selected from the group consisting of  $\text{Zn}(\text{1,5-Diazabicyclo[4.3.0]non-5-ene})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{1,5-Diazabicyclo[4.3.0]non-5-ene})_2(\text{formate})_2$ ,  $\text{Zn}(\text{1,5-Diazabicyclo[4.3.0]non-5-ene})_2(\text{2-ethylhexanoate})_2$ ,  $\text{Zn}(\text{1,8-Diazabicyclo[5.4.0]undec-7-ene})_2(\text{acetate})_2$ ,  $\text{Zn}(\text{1,8-Diazabicyclo[5.4.0]undec-7-ene})_2(\text{formate})_2$  and  $\text{Zn}(\text{1,8-Diazabicyclo[5.4.0]undec-7-ene})_2(\text{2-ethylhexanoate})_2$ .