



- (51) International Patent Classification:
B65D 43/02 (2006.01) *A47B 47/00* (2006.01)
B65D 1/34 (2006.01)
- (21) International Application Number:
PCT/EP2015/060429
- (22) International Filing Date:
12 May 2015 (12.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14168245.0 14 May 2014 (14.05.2014) EP
- (71) Applicant: ELFA INTERNATIONAL AB [SE/SE]; Elf-
agatan 5, S-593 87 Västervik (SE).
- (72) Inventors: NILSSON, Peter; Första Västralundsgatan
27C, S-593 37 Västervik (SE). RYDÉN, Lars;
Hantverkaregatan 4B, S-593 36 Västervik (SE).
- (74) Agent: AWAPATENT AB; Magnus Hjalmarsson, Box
99, 351 04 Växjö (SE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: CONTAINER AND STORAGE SYSTEM

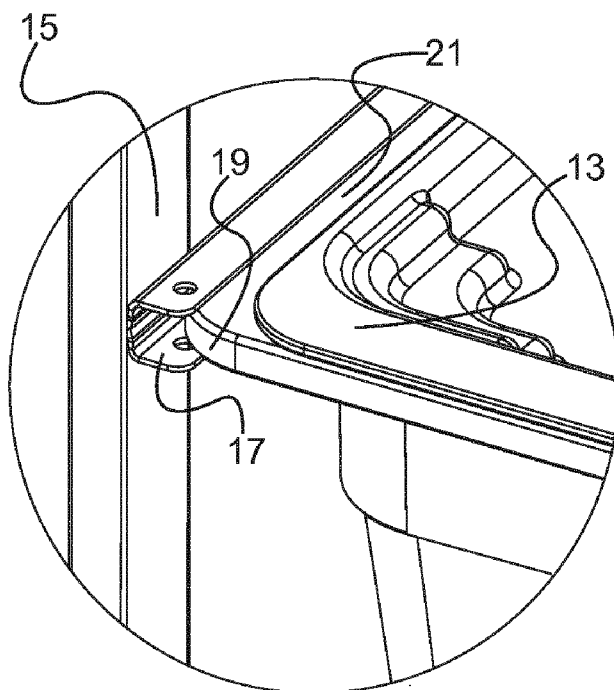


Fig 4

(57) Abstract: The present disclosure relates to a plastic container comprising a box (1) and a lid (13). The box has a bottom portion (3) and first (5, 7) and second (9, 11) pairs of opposing walls rising from the bottom portion to define an internal space of the container, and the upper edges of the walls are adapted to support the lid and comprise flanges (19) that extend outwards from the inner space. The lid is adapted to leave an outer portion (21) of said flanges free along the entire length of the walls of the first pair when the lid is applied to the box. This means that the lid can optionally be removed, even if the box is inserted in a rack where the flanges are supported by a guide.

WO 2015/173216 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

CONTAINER AND STORAGE SYSTEM

Technical field

The present disclosure relates to a container comprising a box and a lid, where the box has a bottom portion and first and second pairs of opposing walls rising from the bottom portion to define an internal space of the container. The upper edges of the walls are adapted to support the lid and at least each of the upper edges of the first pair of walls comprise a respective flange that extends outwards in a direction substantially parallel with a plane in which the bottom portion extends. The disclosure further relates to a storage system including such a container.

Background

Such containers are available in many different formats and may be used for storing various objects. One problem associated with such containers is how to make them suitable for storing in racks of the kind used to support e.g. a number of baskets made of metal wire and mesh materials.

Summary

One object of the present disclosure is therefore to provide a container of the initially mentioned kind that is more useful in a rack system. This object is achieved by a container as defined in claim 1. More specifically, a container of the initially mentioned kind then comprises a lid that is adapted to leave an outer portion of the box's flanges free along the entire length of the walls of the first pair when the lid is applied to the box.

This means that the lid can be taken off if desired, even if the flanges are inserted in e.g. U-shaped guides of a rack system. Further, as the flanges can take up the entire height of such a guide, not having to leave room for a lid, flanges can be made more robust, which allows the container to be more heavily loaded without being substantially deformed.

The flanges may extend around corners of the box and along at least a portion of the respective upper edges of the second pair of walls that adjoin

the edges of the first pair of walls. This may in many cases be enough to obtain a sufficiently stiff flange construction. Alternatively, the flanges may extend around the entire periphery of the box, thereby forming a single flange.

The lid may reach out over the width of the flange at the edge of the walls in the second pair, at least along a part of the length thereof. This provides additional support for the lid, and does not disturb the interaction between guides and the flanges at the first pair of walls.

The flanges may comprise at least one reinforcing subflange, extending from the flange along at least a part thereof and being directed towards a plane in which the bottom portion extends. This provides a stiffer flange which may nevertheless be injection moulded with a relatively thin goods structure. Two parallel subflanges may be provided together with a plurality of lateral reinforcement flanges running perpendicularly to the reinforcement flanges and connecting the reinforcement flanges to each other and to the walls of the box.

An outer subflange may be located at the end of a flange as seen from the interior of the container, and an inner subflanges may be located at a distance **a** from a wall of the container and at a distance **b** from the outer flange. The ratio $(a+b)/a$, between the sum of the c-c distance **a** between the wall and the inner flange and the c-c distance **b** between the inner reinforcement flange and the outer reinforcement flange to the c-c distance **a** between the wall and the inner flange, may be in the range between 1.5 and 1.9. This has shown to provide a very stiff box for a given goods thickness.

The lid may be adapted to, when attached to the box, reach out past the periphery of the walls in the second set along a portion thereof to provide a snap lock function.

The outer portion of the flanges left free may be at least 7 mm.

A storage system including a combination of a container and a drawer frame is also considered.

Brief description of the drawings

Fig 1 shows a perspective view of an open container in the form of a box.

Fig 2 shows the box with an applied lid.

5 Fig 3 illustrates a number of containers arranged in a drawer frame.

Fig 4 shows an enlarged portion of fig 3.

Figs 5 and 6 illustrates two possible configurations of containers for insertion into a drawer frame.

Fig 7 shows a suspended box with a heavy load.

10 Fig 8 illustrates a version of the container with flanges extending over a part of the periphery.

Fig 9 shows a perspective view of the bottom of a container.

Figs 10 and 11 show enlarged portions of the container in fig 9.

15 Fig 12 shows a cross section through a container, and Fig 13 shows an enlarged portion thereof.

Detailed description

The present disclosure is related to modular storage systems including drawer frames and containers. Such systems have the benefit, e.g. as compared with a traditional chests of drawers, of being configurable in various ways to address the needs of an end user. Drawer frames with metal wire and mesh baskets have been widely appreciated by users that have been able to select wire and mesh baskets with different sizes according to their needs.

25 From a producer point of view, the components involved have allowed for efficient distribution as empty containers can be nested inside other empty containers and since drawer frames can easily be assembled by the end user. This of course reduces the cost of the final system.

30 It is suggested to include plastic containers with lids in storage systems of this kind as a complement to wire and mesh containers. This would make storage systems of this kind even more versatile.

Plastic containers are relatively inexpensive to produce in large series by injection moulding. Unlike a mesh or wire container, a plastic container may be made diffusion tight, and when lids are attached to the containers, the they become stackable, such that a number of containers, with items stored
5 inside, can be stored on a small floor surface. If the storage system is used for instance in a closet, this allows the user e.g. to switch the contents of the closet from season to season.

For instance, during off-season, winter clothes may be stored at another location and, thanks to the more or less diffusion tight properties of
10 the containers, are protected from moisture, etc. When the clothes are needed again, these containers may replace others in the drawer frame. Such a procedure is much more efficient than moving clothes from a drawer to another box, back and forth. The present disclosure provides solutions that make a plastic container more suitable for a storage system of this kind,
15 thereby contributing to accomplishing the goal of obtaining a more efficient and versatile storage system.

The present disclosure relates to a plastic container and further to a combination of a plastic container and a drawer frame. An open plastic container 1 in the form of a box is shown in fig 1. The box has a bottom portion 3
20 and first 5, 7 and second 9, 11 pairs of opposing walls rising from the bottom, thereby defining an internal space of the box.

In fig 2 the box 1 with an applied lid 13 is shown, the lid and box together forming a closed container. The upper edges of the box walls 5, 7, 9, 11 support the lid 13.

25 The box further has suspension flanges, as will be shown, at the upper edges of at least one pair of walls. The flanges extend outwards from the interior of the box in a direction substantially parallel or close to parallel with the plane in which the bottom portion 3 extends. This allows the box to be inserted in a drawer frame.

30 Such a drawer frame 15 is shown in fig 3, where five boxes 1 with applied lids 13 are inserted in the frame. Fig 4 shows a U shaped guide 17 in the frame, which is adapted to accommodate the flange 19 of the box, in

order to support the box in the frame. Such frames with guides are well known per se to support containers made of metal wire, metal mesh materials etc.

As illustrated in fig 4, the lid 13 of the box is designed to leave an outer portion 21 of the flange 19 free when the lid is applied to the box. This is done along the length flange that engages with the guide 17 in the drawer frame 15. Thus, for instance in the box shown in fig 2, a portion of the flange is left free along the longer sides of the box, although other variations exist as will be discussed. The outer portion 21 of the flanges left free may be at least 7 mm, and about 12 mm is considered suitable for many applications.

As the outer portion 21 of the flange 19 is left free, the flange is allowed to take up almost the entire height of the guide 17, which means that a stiffer flange can be provided for a given guide dimension. A stiff flange is advantageous as it allows the box to be more heavily loaded without bulging, as will be discussed later.

Additionally, the lid can in many cases be removed without taking the box 1 out of the drawer frame 15. For instance, if no box is inserted in the middle compartment of the drawer frame in fig 3, the lid of the box below the middle compartment can easily be removed.

Figs 5 and 6 illustrates two possible configurations of containers for insertion into a rack. In fig 5, the box takes up the full space between two guides and the flanges, indicated with the dashed boxes, of the long edges should be left at least partially free as mentioned above.

In fig 6, two smaller boxes are inserted between similar guides instead. In this case, the short edges should be left at least partially free. In general thus, the lid should leave an outer portion of the flanges free along the entire length of the walls of one pair of opposing walls, specifically the flanges intended to engage with guides of a drawer frame.

The stiffness of the flanges is one important determining factor for the load that can be applied in the box without the box deforming in such a way that it for instance may become stuck in a drawer frame. Such a situation is illustrated in fig 7, where a too heavy load (indicated dashed) makes the box

bulge when suspended between the flanges of the long sides. As described above the lid design allows the flange to take up most of the inner space of the guide, which provides a stiffer flange. This may be used in combination with the reinforcing flange design to be described later, although this is not
5 necessary.

Fig 8 illustrates a version of the box with flanges extending only over a part of the periphery. In the illustrated case, the box is intended to be suspended from flanges on its long sides. Even if in most other shown embodiments the flange extend along all four sides of the box, it may be sufficient, as
10 illustrated that the flange extends around the corners 23 of the box, and some distance into the adjacent (in this case short) side.

Fig 9 shows a perspective view of the bottom of a container. As is further shown in enlarged portions in figs 10 and 11 the flanges may comprise at least one reinforcing subflange 25, that extends from the flange along at
15 least a part thereof, and is directed downwards, i.e. substantially perpendicularly towards the plane in which the bottom portion 3 extends. In the illustrated case, there are two parallel subflanges, one outer 25 and one inner 27 flange. In a typical case, the subflanges may extend about 4.2 mm from the lower surface of the main flange 19. Further, there are provided lateral re-
20 inforcement flanges 29 running perpendicularly to the reinforcement flanges, and connecting the reinforcement flanges 25, 27 to each other and to the adjacent wall of the box. Such lateral flanges may be provided at regular intervals over the sides of the box, and also at the corners of the box as shown in fig 11.

25 This configuration per se provides a substantially improved strength, and will be further discussed with reference to the cross sections in fig 12 and fig 13 which show a cross section through the long sides of a box without a lid. In fig 12 there is shown a cross section transverse through the long side of the box, and fig 13 shows an enlarged portion, where the flange 19 meets the
30 side wall 7 of the box. Fig 13 illustrates how a strong flange may be achieved without providing a thick portions in the box. Thick goods would require substantial periods of time to become fully solid during injection moulding and

would therefore imply long cycle times during production. The disclosed flange configuration however, becomes very strong without using goods thicknesses exceeding 3.5 mm, even 2.0 mm could be sufficient in many applications.

5 The c-c (centre-centre) distance **a+b**, in the illustrated case, between the box wall 7 and the outer reinforcement flange 25 is about 13 mm. The distance **a** between the box wall 7 and the inner reinforcement flange 27 is about 8 mm. Thus, the inner reinforcement flange 27 is placed closer to the outer reinforcement flange 25 than to the box wall 7. This has proven to avoid
10 the condition illustrated in fig 7 to a great extent by providing a stiffer flange. Expressed differently, the ratio **(a+b)/a** between the sum of the c-c distance **a** between the wall 7 and the inner flange 27 and the c-c distance **b** between the inner reinforcement flange 27 and the outer reinforcement flange 25 to the distance **a** is in the range between 1.5 and 1.9. In this illustrated case, the
15 ratio is about 1.6 to 1.7, and this is considered suitable for many applications. As further shown in fig 13, ledges 31, 33 may be provided in the wall 7, which make the container even stiffer and facilitates nesting of empty containers.

It should be noted that the above outlined configuration with one or more subflanges provides as such improved structural strength to a plastic
20 container, making it more suitable for being suspended in a drawer frame. This advantage is obtained whether or not a lid of the type described earlier is used, or whether or not any lid is used at all.

The present disclosure thus considers a plastic box with a bottom portion and first and second pairs of opposing walls rising from the bottom portion where at least each of the upper edges of the first pair of walls comprise
25 a respective flange that extend outwards in a direction substantially parallel with a plane in which the bottom portion extends, and wherein each flange comprises at least one reinforcing subflange, extending from the flange along at least a part thereof, and being directed towards a plane in which the bottom
30 portion extends.

Typically, each main flange comprises two parallel subflanges and a plurality of lateral reinforcement flanges running perpendicularly to the sub-

flanges and connecting the subflanges to each other and to the walls of the box, and as mentioned above, the aforementioned ratio $(a+b)/a$ may be in the range between 1.5 and 1.9.

The present disclosure is not limited to the examples described above,
5 and may be varied and altered in different ways within the scope of the appended claims.

CLAIMS

1. A plastic container for a storage system, the container comprising a
5 box (1) and a lid (13), the box having a bottom portion (3) and first (5, 7) and
second (9, 11) pairs of opposing walls rising from the bottom portion to define
an internal space of the container, wherein upper edges of the walls are
adapted to support the lid and wherein at least each of the upper edges of the
first pair (5, 7) of walls comprise a respective flange (19) that extend outwards
10 in a direction substantially parallel with a plane in which the bottom portion
extends **characterized in** that the lid is adapted to, when applied to the box,
leave an outer portion (21) of said flanges free along the entire length of the
walls of the first pair.
- 15 2. A plastic container according to claim 1, wherein the flanges extend
around corners of the box and along at least a portion of the respective upper
edges of the second pair of walls that adjoin the edges of the first pair of
walls.
- 20 3. A plastic container according to claim 2, wherein the flanges extend
around the entire periphery of the box, thereby forming a single flange.
4. A plastic container according to claim 2 or 3, wherein the lid reaches
out over the width of the flange at the edge of the walls in the second pair, at
25 least along a part of the length thereof.
5. A plastic container according to any of the preceding claims, wherein
the flanges (19) comprise at least one reinforcing subflange (25, 27), ex-
tending from the flange along at least a part thereof, directed towards a plane
30 in which the bottom portion extends.

6. A plastic container according to claim 5, wherein each flange (19) comprises two parallel subflanges (25, 27) and a plurality of lateral reinforcement flanges (29) running perpendicularly to the reinforcement flanges and connecting the reinforcement flanges to each other and to the walls of the box.

7. A plastic container according to claim 6, wherein an outer (25) sub-flange is located at the end of a flange (19) as seen from the interior of the container, an inner subflange (27) is located at a distance **a** from a wall (7) of the container and at a distance **b** from the first flange (25), and wherein a ratio $(a+b)/a$, between the sum of the c-c distance **a** between the wall (7) and the inner subflange (27) and the c-c distance **b** between the inner subflange (27) on the one hand and the distance c-c distance **a** between the wall (7) and the inner subflange (27) on the other, is in the range between 1.5 and 1.9.

8. A plastic container according to any of the preceding claims, wherein the lid is adapted to, when attached to the box, reach out past the periphery of the walls in the second set along a portion thereof to provide a snap lock function.

9. A plastic container according to any of the preceding claims, wherein the outer portion (21) of said flanges left free is at least 7 mm.

10. A storage system including a combination a drawer frame and a plastic container, according to any of the preceding claims.

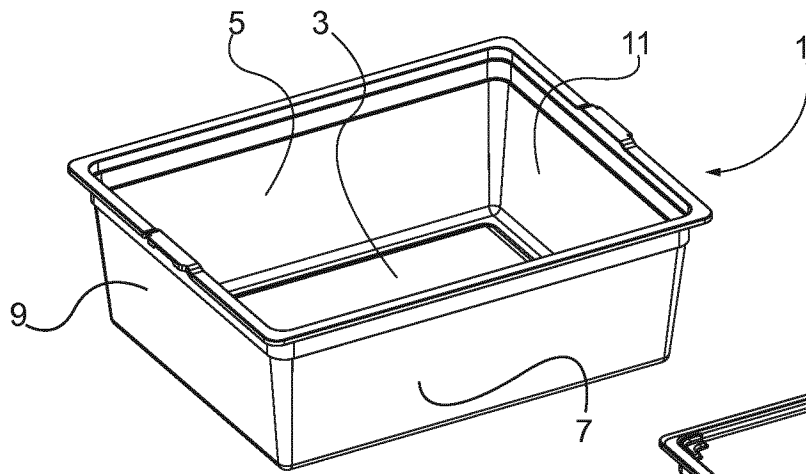


Fig 1

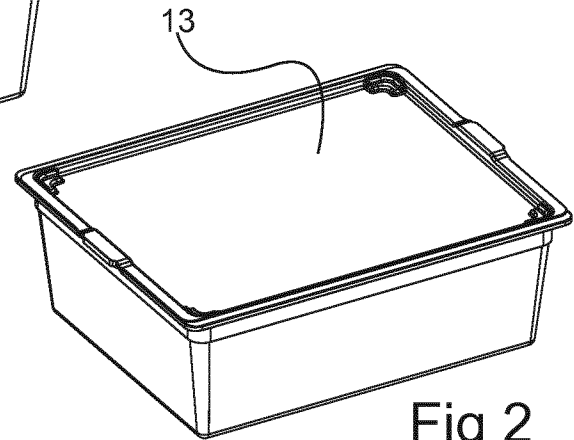


Fig 2

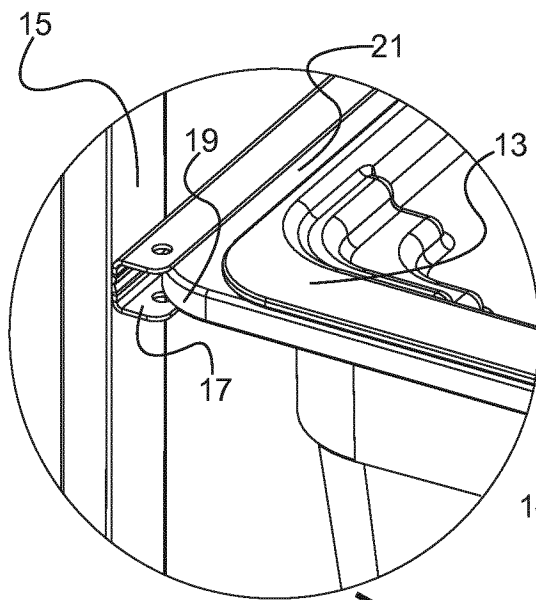


Fig 4

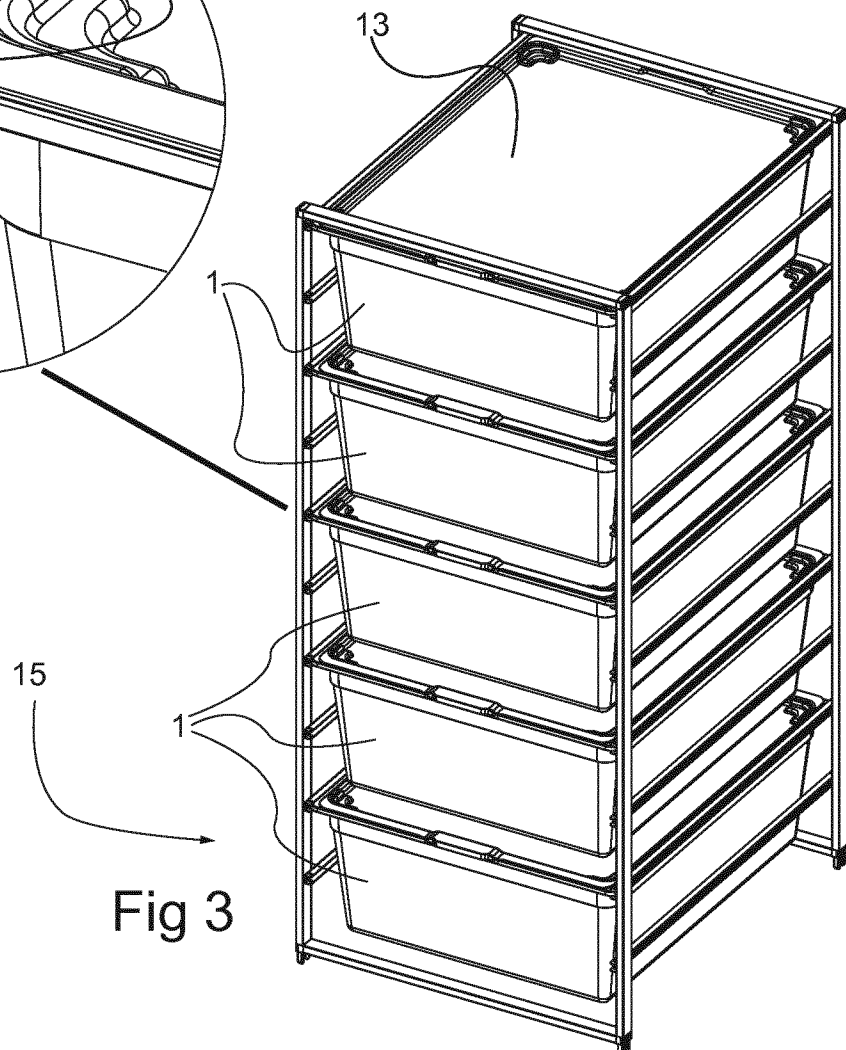


Fig 3

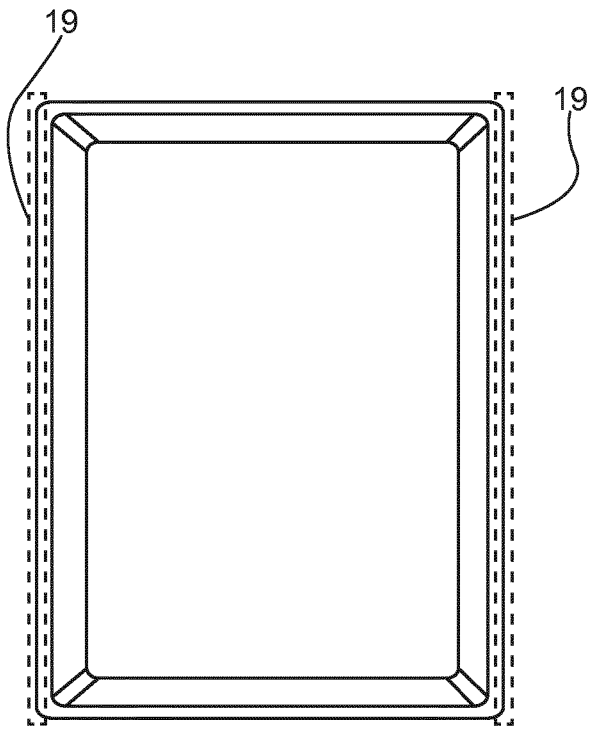


Fig 5

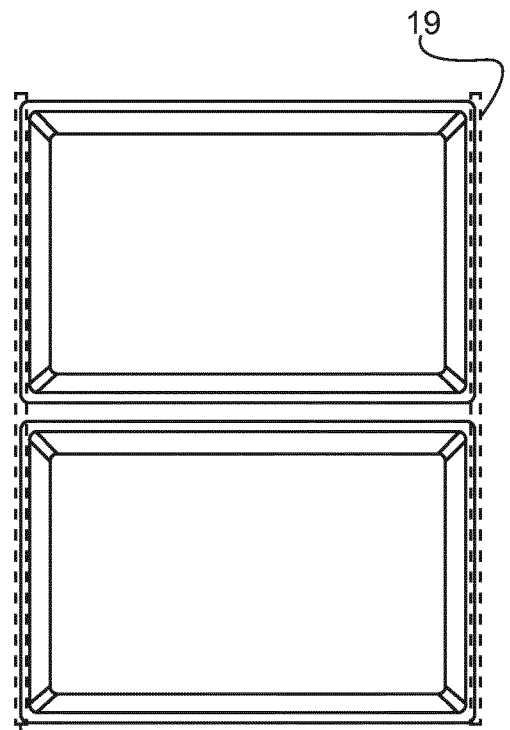


Fig 6

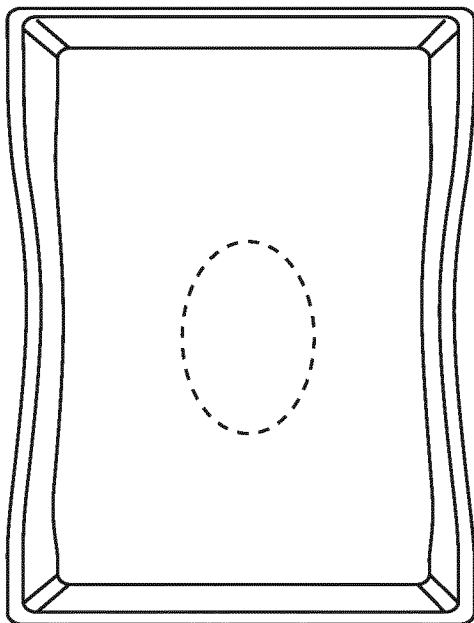


Fig 7

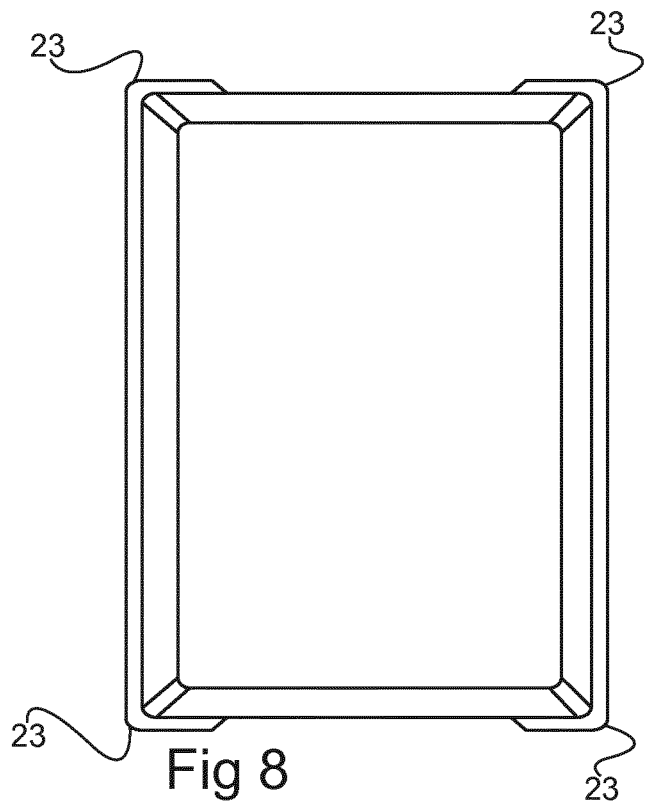


Fig 8

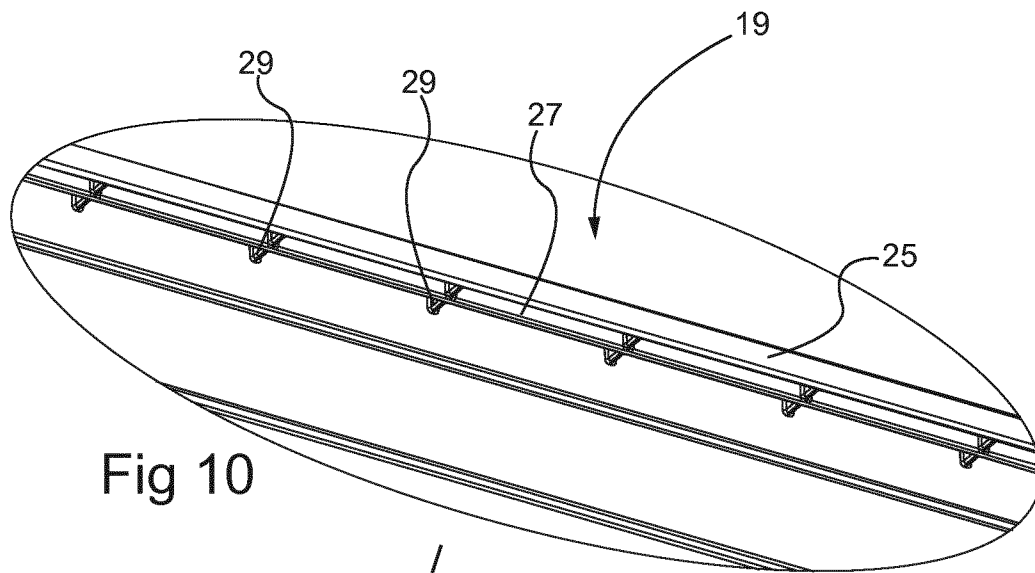


Fig 10

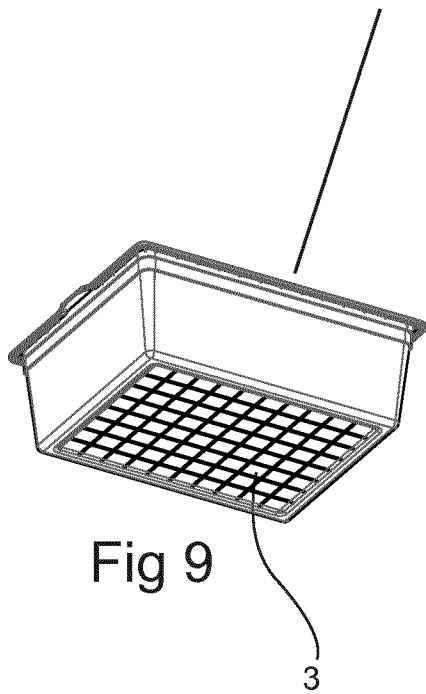


Fig 9

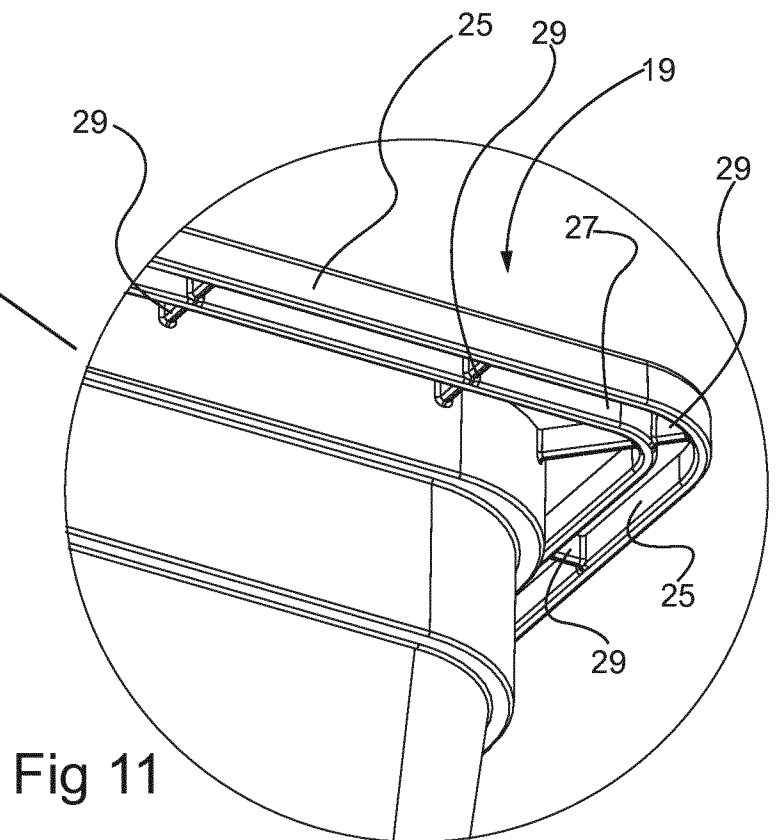


Fig 11

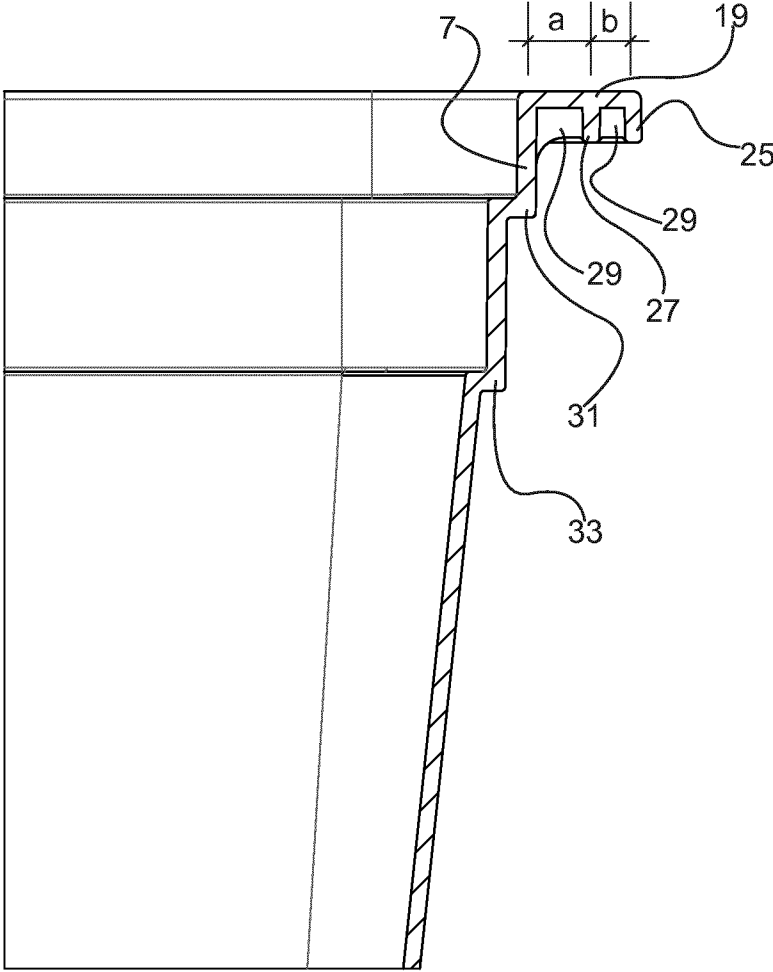
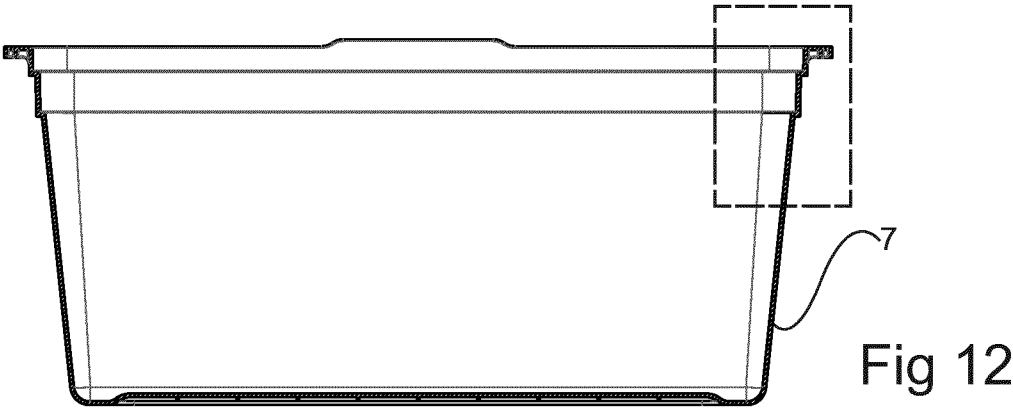


Fig 13

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2015/060429

A. CLASSIFICATION OF SUBJECT MATTER

INV. B65D43/02 B65D1/34 A47B47/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B65D A47B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/121295 A1 (DECOR CORP PTY LTD [AU]; SAMARTGIS JIM [AU]) 28 October 2010 (2010-10-28)	1-5,8,9
Y	page 9, line 15 - page 10, line 5; figures	10
A	16-21	6,7
Y	----- US 2013/063012 A1 (LU YEN-WEN [TW]) 14 March 2013 (2013-03-14) abstract; figures	10
A	----- US 2007/187277 A1 (FURLONG BRIAN D [US]) 16 August 2007 (2007-08-16)	1
A	----- US 3 484 035 A (SWETT JAMES B ET AL) 16 December 1969 (1969-12-16) -----	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 June 2015

Date of mailing of the international search report

11/06/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Serrano Galarraga, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/060429

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010121295 A1	28-10-2010	AU 2010239132 A1 NZ 578575 A WO 2010121295 A1	18-08-2011 28-01-2011 28-10-2010
US 2013063012 A1	14-03-2013	NONE	
US 2007187277 A1	16-08-2007	AU 2007213472 A1 CA 2640959 A1 CN 101454216 A JP 2009525932 A KR 20090039667 A NZ 571242 A US 2007187277 A1 WO 2007092954 A2	16-08-2007 16-08-2007 10-06-2009 16-07-2009 22-04-2009 25-06-2010 16-08-2007 16-08-2007
US 3484035 A	16-12-1969	AT 302160 B BE 726566 A CA 931532 A1 CH 502245 A DE 1900311 A1 DE 6900205 U DK 123923 B ES 144525 Y FI 48568 B FR 1602486 A GB 1251431 A IE 33431 B1 MY 7300192 A NL 6900219 A SE 354414 B US 3484035 A	10-10-1972 07-07-1969 07-08-1973 31-01-1971 07-08-1969 17-08-1972 21-08-1972 16-01-1970 31-07-1974 30-11-1970 27-10-1971 26-06-1974 31-12-1973 10-07-1969 12-03-1973 16-12-1969