


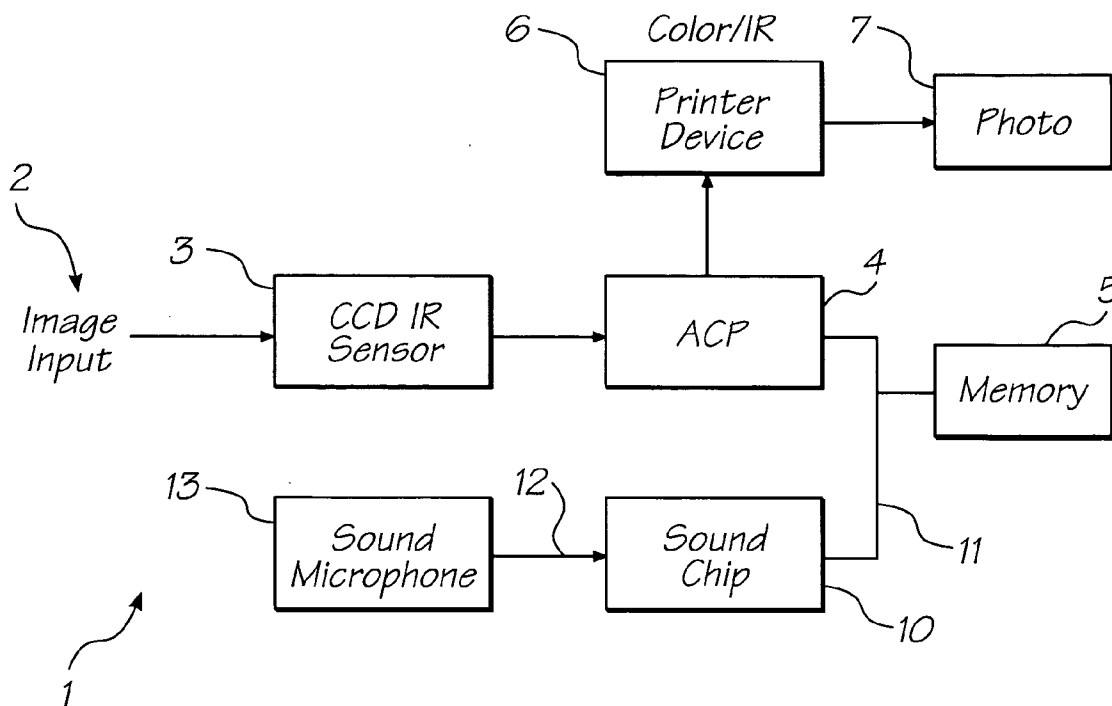

US 20050207746A1

(19) **United States**(12) **Patent Application Publication**
Silverbrook et al.(10) **Pub. No.: US 2005/0207746 A1**(43) **Pub. Date: Sep. 22, 2005**(54) **SUBSTRATE HAVING PHOTOGRAPH AND
ENCODED AUDIO SIGNAL
SIMULTANEOUSLY PRINTED THEREON**(75) Inventors: **Kia Silverbrook**, Balmain (AU); **Paul
Lapstun**, Balmain (AU); **Simon Robert
Walmsley**, Balmain (AU)Correspondence Address:
SILVERBROOK RESEARCH PTY LTD
393 DARLING STREET
BALMAIN 2041 (AU)(73) Assignee: **Silverbrook Research Pty Ltd**(21) Appl. No.: **11/123,007**(22) Filed: **May 6, 2005****Related U.S. Application Data**(63) Continuation of application No. 10/309,068, filed on
Dec. 4, 2002, now Pat. No. 6,910,014, which is a
continuation of application No. 09/693,078, filed on
Oct. 20, 2000, now Pat. No. 6,647,369.**Publication Classification**(51) **Int. Cl.⁷ G03B 17/24**
(52) **U.S. Cl. 396/312**(57) **ABSTRACT**

A substrate is provided having a photograph and an array of dots printed thereon. The array of dots are substantially invisible to the unaided human eye and encode a precoded audio signal in a fault tolerant manner. The dots are printed in substantially the same area as the photograph and substantially simultaneously with the photograph by a page-width inkjet printhead.



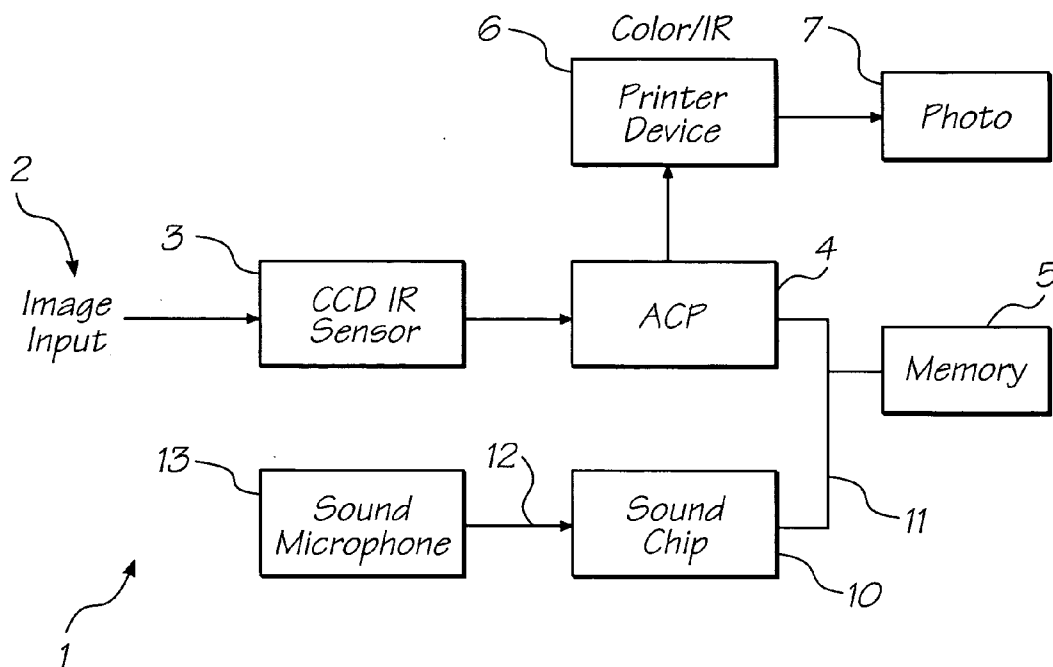


FIG. 1

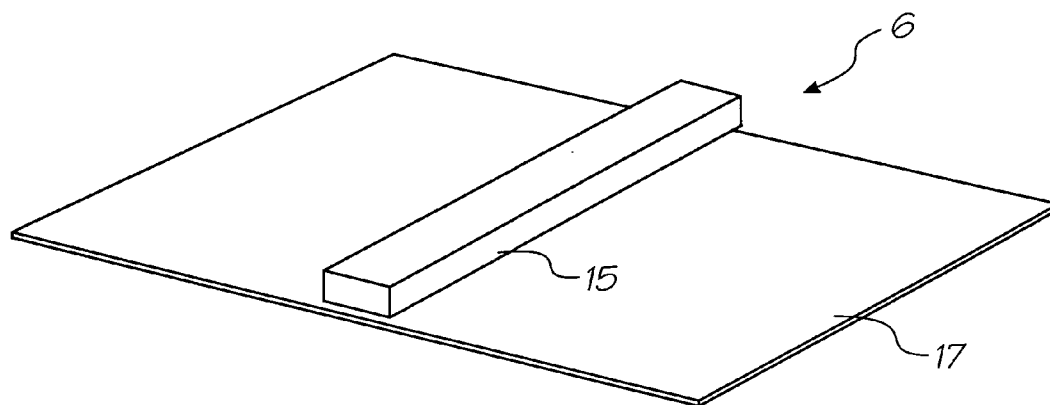


FIG. 2

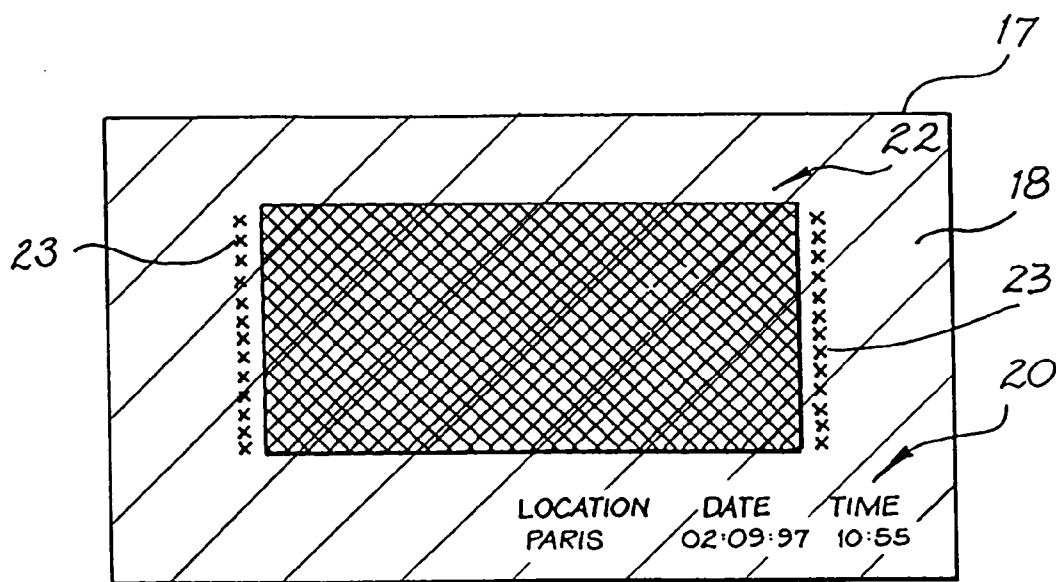


FIG. 3

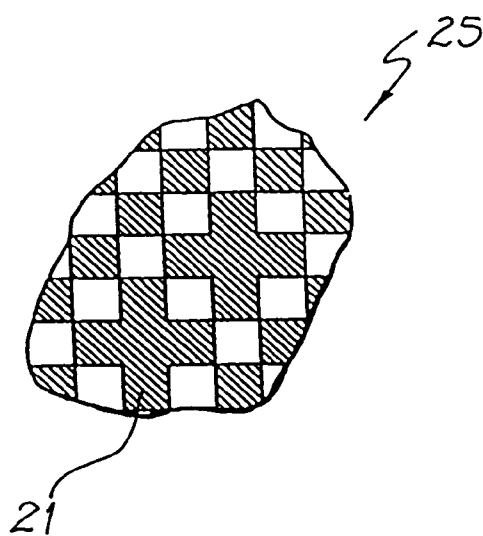


FIG. 4

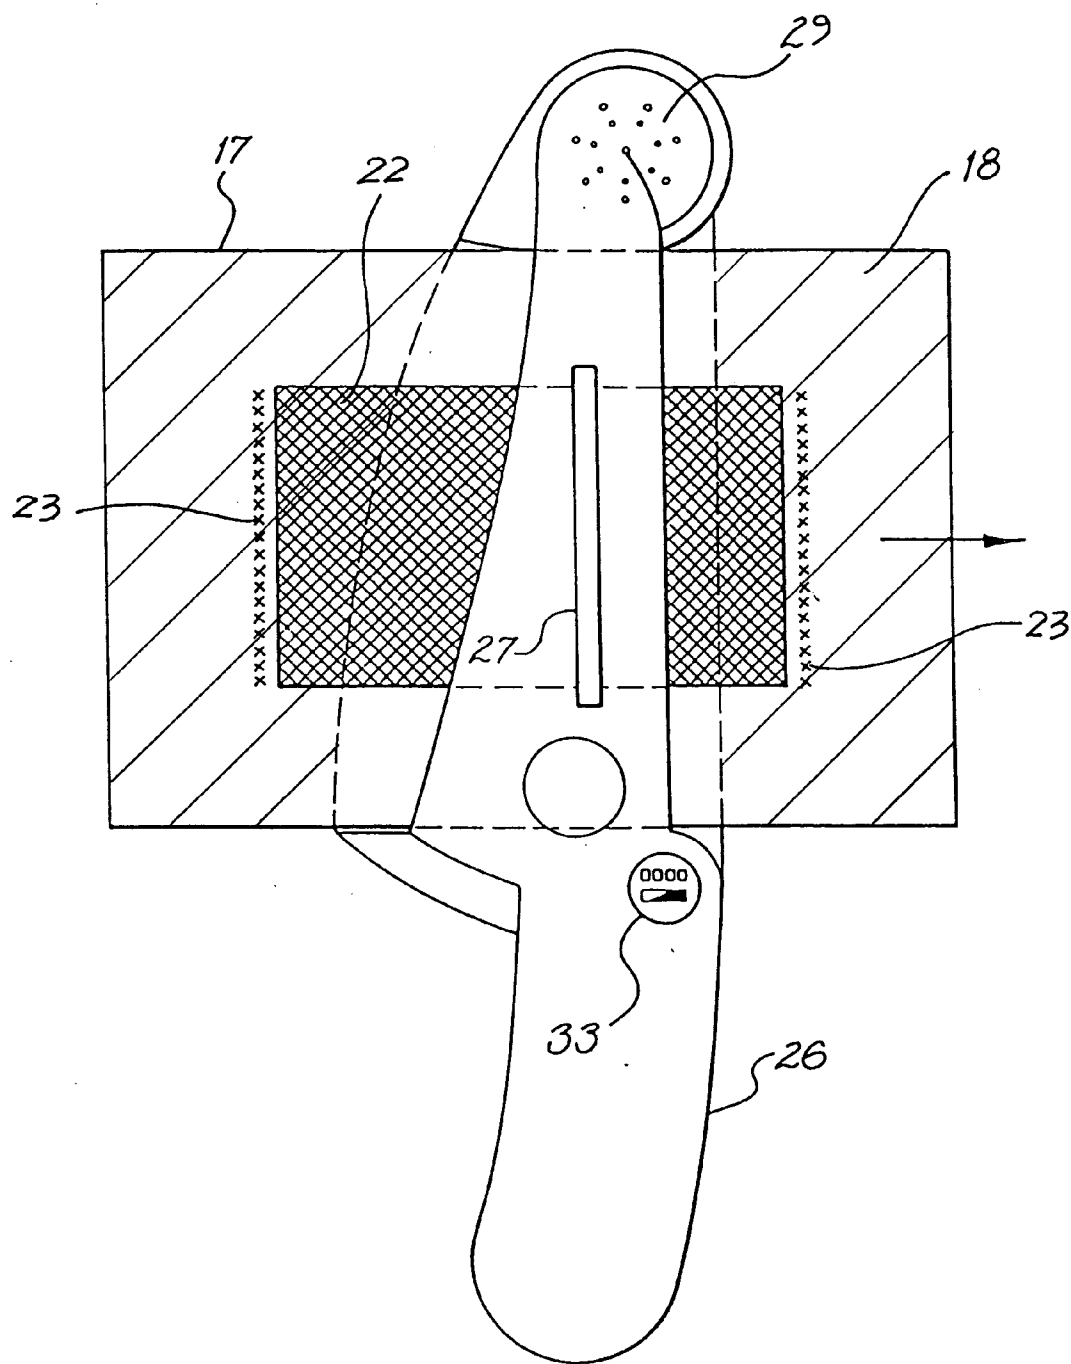


FIG. 5

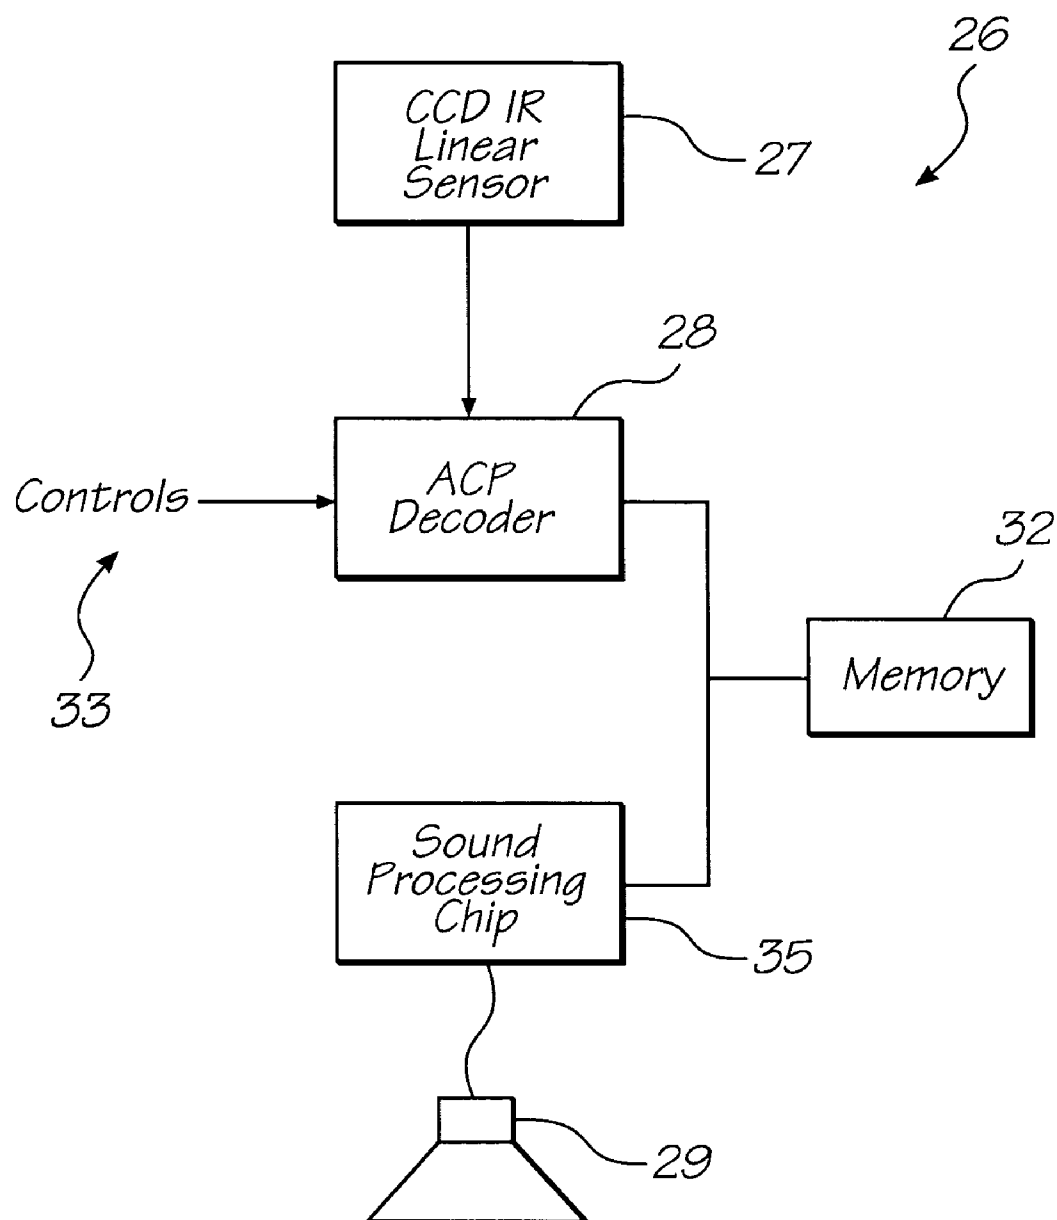


FIG. 6

SUBSTRATE HAVING PHOTOGRAPH AND ENCODED AUDIO SIGNAL SIMULTANEOUSLY PRINTED THEREON

RELATED APPLICATIONS

[0001] The present application is a Continuation of U.S. application Ser. No. 10/309,068 filed on Dec. 4, 2002, which is a Continuation of U.S. application Ser. No. 09/693,078 filed on Oct. 20, 2000, now issued as U.S. Pat. No. 6,647,369.

FIELD OF THE INVENTION

[0002] The present invention relates to a camera system having an integral sound recording means for recording and outputting a permanent record of sound associated with a photograph and recorded in infra-red ink over the photograph. Hence, the present invention relates to a photograph reader to decode sound and play sound.

[0003] The present invention also relates to a means for reproducing the recorded sound and discloses a photograph reader to decode sound and play sound.

CO-PENDING APPLICATIONS

[0004] Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention simultaneously with the present application:

US Patent Application Number
09/693,471
09/693,083
09/693,134
09/693,226
09/693,317

[0005] The disclosures of these co-pending applications are incorporated herein by reference.

[0006] Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending application filed by the applicant or assignee of the present invention on Jul. 10, 1998:

[0007] U.S. Ser. No. 09/113,060

[0008] U.S. Ser. No. 09/113,070

[0009] U.S. Ser. No. 09/112,741

[0010] U.S. Ser. No. 09/112,785

[0011] U.S. Ser. No. 09/113,107

[0012] The disclosures of this co-pending application are incorporated herein by reference.

[0013] Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on Jun. 30, 2000:

[0014] U.S. Ser. No. 09/608,308

[0015] U.S. Ser. No. 09/608,779

[0016] U.S. Ser. No. 09/607,987

[0017] U.S. Ser. No. 09/608/776

[0018] U.S. Ser. No. 09/607,250

[0019] U.S. Ser. No. 09/607,991

[0020] The disclosures of these co-pending applications is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0021] The production of images by means of photographic techniques have been well known for a substantial period of time. Further, recently, digital cameras have become increasingly popular where an image is captured by the digital camera device and stored for later printing.

[0022] In applicant's applications U.S. Ser. Nos. 09/113,060, 09/113,070 and U.S. Ser. No. 09/113,222, a camera system has been proposed that includes an integral printer device for the printing out of sensed images.

[0023] When using such devices and other image capture devices it will be desirable to be able to suitably deal with audio and other environmental information when taking a picture.

[0024] In applicant's application U.S. Ser. No. 09/113,107 one such device was disclosed in which audio data was recorded on the rear of a card or photograph using black ink on a white background. A reader could read the data and reproduce the signal through audio generator means when the card or photograph was passed through a scanner means.

[0025] In U.S. Pat. No. 5,896,403 (Nagasaki et al.) a printing system is disclosed which prints images and audio information on print media, for example, a sheet, in dot codes which can be read by a pen device. The information can be decoded notwithstanding scanning of the data being irregular or random due to the organization of the dot codes. In Nagasaki et al. system the scanning of data is low. In applicant's printing and scanning system as disclosed in U.S. Ser. No. 09/113,107 the process is a pagewidth process rather than a line by line process as in Nagasaki et al.

SUMMARY OF THE INVENTION

[0026] The present invention relates to a camera system able to record audio when acquiring a sensed image in addition to being able to playback the audio information when viewing a "photograph", the audio and "photograph" being recorded on the same surface of a print media.

[0027] In accordance with a first aspect of the present invention, there is provided a system for playing prerecorded audio encoded in a fault tolerant manner as an array of invisible ink dots printed on a photograph in substantially the same area whereas comprising: an infrared scanner means for scanning the printed invisible ink dots of said prerecorded audio; a processor means interconnected to said infra-red scanner means for decoding said scanned audio encoding to produce a corresponding audio signal; and audio emitter means interconnected to said processor means for emitting or playing said corresponding audio signal on demand.

[0028] A further embodiment of the present invention provides a system for playing prerecorded audio

encoded in a fault tolerant manner as an array of invisible ink dots printed on a card in substantially the same area thereof comprising:

[0029] an infra-red scanner configured to scan the printed infra-red ink dots of said prerecorded audio;

[0030] a decoder interconnected to said infra-red scanner and configured to decode said scanned audio encoding and to provide a corresponding output; and

[0031] an audio emitter interconnected to the decoder for emitting audio corresponding to said output on demand.

[0032] The invisible ink may be an infrared (IR) absorbing ink with negligible absorption in the visible spectrum.

[0033] The encoding can include Reed-Solomon encoding of the prerecorded audio and comprises an array of IR (infrared) ink dots which are printed on the photograph using a page width ink jet printhead. The array of dots may be high frequency modulated to aid scanning, for example using a checkerboard pattern.

[0034] The system can include a wand-like arm having a slot through which is inserted the photograph.

[0035] In accordance with a further aspect of the present invention, there is provided a method of decoding a prerecorded audio signal printed as an array of invisible ink dots in a fault tolerant encoded form on a surface of a photograph coincident with an image printed on said surface of said photograph, said method comprising the steps of:

[0036] (a) scanning the printed encoded form of said prerecorded audio on said photograph in the infra-red;

[0037] (b) decoding said encoded audio signal; and

[0038] (c) playing said audio signal on an audio output device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0039] Notwithstanding any other forms which may fall within the scope of the present invention, preferred forms of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

[0040] **FIG. 1** illustrates schematically the camera system constructed in accordance to the preferred embodiment;

[0041] **FIG. 2** illustrates schematically a printer mechanism for printing on the output media;

[0042] **FIG. 3** illustrates a format of the output data on the photograph;

[0043] **FIG. 4** illustrates an enlarged portion of the output media;

[0044] **FIG. 5** illustrates a reader device utilized to read data from the photograph; and

[0045] **FIG. 6** illustrates the utilization of an apparatus of the preferred embodiment.

DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

[0046] The preferred embodiment is preferably implemented through suitable programming of a hand held cam-

era device such as that described in U.S. Ser. No. 09/113,060 and U.S. Ser. No. 09/113,070.

[0047] The aforementioned patent specifications disclose a camera system, hereinafter known as an "Artcam" type camera, wherein sensed images can be directly printed out by an Artcam portable camera unit. Further, the aforementioned specifications disclose means and method for performing various manipulations on images captured by the camera sensing device leading to the production of various effects in any output image. The manipulations are disclosed to be highly flexible in nature and can be implemented through the insertion into the Artcam of cards having encoded thereon various instructions for the manipulation of images, the cards being known as Artcards. The Artcam further has significant onboard processing power implemented by an Artcam Central Processor unit (ACP) which is interconnected to a memory device for the storage of import data and images.

[0048] In the preferred embodiment, the Artcam device is suitably modified so as to equip it with a microphone device and associated recording technologies. When a picture is taken, the opportunity is provided to record either the surrounding sound environment or a message associated with the image. The recorded audio is then printed on the photograph in an encoded format, the encoding preferably being of a highly resilient form. The recorded audio provides a permanent audio record associated with the photograph. Subsequently, a playback apparatus is provided for scanning the encoded audio and decoding this information.

[0049] Turning now to **FIG. 1**, there is illustrated, in schematic form the preferred embodiment 1 which includes the arrangement as described in the aforementioned patent specifications wherein an image 2 is sensed via a CCD sensor 3 and forwarded to an Artcam central processor 4 which includes significant computational resources as described in the aforementioned patent specifications. The Artcam central processor 4 can store the image in memory 5 which preferably comprises a high speed RAMBUS (Trade Mark) interfaced memory. The Artcam central processor 4 is also responsible for controlling the operation of a printer device 6 having a page width ink jet printhead 15 (see **FIG. 2**) for the printing out of full color photographs, e.g. 7, so as to provide for instant images on demand. The printhead 15 can print color images and has at least (4) ink jet nozzles for printing at a resolution of 1600 dpi. The four inks include an infra-red ink for printing data, and cyan, magenta and yellow inks for printing a color image. Such a printhead, but having the capacity to print with six (6) inks, is disclosed in applicant's applications U.S. Ser. No. 09/608,308, U.S. Ser. No. 09/608,779, U.S. Ser. No. 09/607,987, U.S. Ser. No. 09/608,776, U.S. Ser. No. 09/607,250 and U.S. Ser. No. 09/607,991 using a monolithic construction.

[0050] In the preferred embodiment, the camera arrangement 1 is also supplied with a sound chip 10 which interfaces via RAMBUS bus 11 to memory 5 under the control of the ACP processor 4. The sound chip 10 can be of a standard or specialised form and can, for example, comprise a DSP processor that takes an analogue input 12 from a sound microphone 13. Alternatively, with increasing chip complexities (Moore's Law), the functionality of sound chip 10 can be incorporated onto the ACP chip which preferably comprises a leading edge CMOS type integrated in circuit

chip. It will be readily evident that many other types of arrangements can be provided which fall within the scope of the present invention. The sound chip **10** converts the analogue input **12** to a corresponding digital form and forwards it for storage in memory **5**. The recording process can be activated by means of the depressing of a button (not shown) on the camera device, the button being under the control of the ACP processor **4** otherwise it can be substantially automatic when taking a photograph. The recorded data is stored in the memory **5**.

[0051] Turning now to **FIG. 2**, the camera arrangement preferably includes a printer device **6** which includes print-head **15**. The printhead **15** is utilized to print an image on print media **17** and at the same time print audio (or other) information on the same face of print output media **17** using an IR ink. Similar arrangements but for printing information on the back of an output photo image are described in U.S. Ser. No. 09/112,741, the contents of which are hereby incorporated by reference mutatis mutandis. By using a single printhead a simpler apparatus is provided than as therein disclosed. The applicant has disclosed an infrared ink suitable for this purpose in Australian Provisional Patents Applications PQ9412 and PQ9376 both filed on Aug. 14, 2000 and applicant's applications PQ9509 filed on Aug. 18, 2000, and PQ9571, and PQ9561 both filed on Aug. 21, 2000.

[0052] Turning now to **FIG. 3**, there is illustrated an example of output printed on the photographic media **17**. The media **17** includes a photographic image **18** along with which is printed information **20** and data **22**. The detail of the image **18** is not shown for ease of illustration. The information **20** can include location, date and time data with the location data being provided by means of keyboard input or, alternatively, through the utilization of attached positioning systems such as GPS or the like. The information **20** is presented in a viewable form. The data **22** is provided in an encoded invisible (but infra-red visible) form with the beginning and end thereof marked by target boundaries **23**. The format of the encoding can be many and various, however, preferably the encoding is provided in a highly fault tolerant manner so as to tolerate scratches, grime, writing, wear, rotation, fading etc. One form of suitable technology is the printing technology utilized in the construction of "Artcards" as described in the aforementioned patent specifications U.S. Ser. No. 09/113,060 or as disclosed in U.S. Ser. No. 09/112,070 and U.S. Ser. No. 09/112,785 or the co-pending applications Docket Nos U.S. Ser. No. 09/693,471, U.S. Ser. No. 09/693,083 and U.S. Ser. No. 09/693,134 filed concurrently herewith. The encoding format relies heavily upon utilisation of Reed-Solomon encoding of the data to provide for a high degree of fault tolerance. A portion of the data **25** is shown in schematic form in **FIG. 4** and the data comprises an array of IR dots as printed by the printhead **15** of **FIG. 2** which is additionally modulated by a high frequency "checkerboard" pattern **21** added to the data so as to assist in sensing of the encoded data. The data **22**, in this particular instance, can comprise sound data as well as image information **20**. The disclosed methodologies as discussed in applicant's co-pending applications Nos. U.S. Ser. No. 09/693,471, U.S. Ser. No. 09/693,083 and U.S. Ser. No. 09/693,134 provide for the storage of about 6 Megabytes of arbitrary data on a photograph having a size of 4"x6" (102 mm.x152 mm.) for data printed at a resolution of 1600 dpi.

[0053] When it is desired to "play back" the recorded audio, the photograph **17** is passed through a reader device **26** which includes pinch rollers for pinch rolling the photograph **17** past a linear CCD sensor device **27** sensitive to infra-red, the photograph **17** being illuminated by an infra-red source of complimentary characteristics. The sensor device **27** can be a suitably adapted sensor device as described in the aforementioned patent specification or in applicant's application U.S. Ser. No. 09/693,317 specification. Suitable sensors are found in flat bed scanners or facsimile machines. The sensors of the CCD device are provided with lensing and/or filtering arrangements to optimise their sensitivity and coverage to that of the photograph's size and the spectral characteristics of the IR ink. An ink with minimal response in the wavelength range 400-700 mm and maximal response in the wavelength range 700 mm-1200 mm has been found suitable as disclosed in Australian Provisional Patent Applications PQ9412 and PQ9376 filed on 14 Aug. 2000 and applicant's applications PQ9509 filed on 18 Aug. 2000, and PQ9571, and PQ9561 filed on 21 Aug. 2000.

[0054] Referring now to **FIG. 6**, there is illustrated in schematic form the operation of the audio reader device **26** of **FIG. 5**. The linear CCD IR sensor **27** is interconnected to a second Artcam central processor **28** which is suitably adapted to read and decode the data stored in infra-red on the photograph. The decoded audio information is stored in memory **32** for playback via a sound processing chip **33** on speaker **29**. The sound processing chip **33** can operate under the control of the ACP decoder **28** which in turn operates under the control of various user input controls **33** which can include volume controls, rewind, play and fast forward controls etc. Importantly, the CCD linear IR sensor **27** and the ACP decoder **28** can implement the reading process as if the information were printed in an Artcard or an alternative Artcard format as described in the aforementioned patent specifications U.S. Ser. No. 09/113,070 and U.S. Ser. No. 09/112,785, or applicant's co-pending applications Nos. U.S. Ser. No. 09/693,471, U.S. Ser. No. 09/693,083 and U.S. Ser. No. 09/693,134.

[0055] It can be seen from the foregoing description of the preferred embodiment that there is provided a system for the automatic recording of audio associated with an output image so as to provide an audio record associated with a photograph. There is also disclosed an audio reader system for reading an audio output recorded on a photograph with IR ink.

[0056] It would be appreciated by a person skilled in the art that numerous variations and/or modifications any be made to the present invention as shown in the specific embodiment without departing from the spirit or scope of the invention as broadly described. For example, the utilisation of more complex audio recording and playback techniques such as stereo and B-format techniques. The present embodiment is, therefore, to be considered in all respects to be illustrative and not restrictive.

We claim:

1. A substrate having printed thereon:
a photograph; and

an array of dots substantially invisible to the unaided human eye, the dots encoding a precoded audio signal in a fault tolerant manner,

wherein the dots are printed in substantially the same area as the photograph and substantially simultaneously with the photograph by a pagewidth inkjet printhead.

2. The substrate of claim 1, wherein the dots are printed with an infra-red absorbing ink.

3. The substrate of claim 1, wherein the dots are readable by a scanner device, the scanner device being adapted to play the precoded audio signal.

4. The substrate of claim 1, wherein the encoded precoded audio signal is generated by a camera comprising a recording device.

5. The substrate of claim 4, wherein the camera further comprises the pagewidth inkjet printhead.

6. The substrate of claim 1, wherein the audio signal is encoded using Reed-Solomon encoding.

7. The substrate of claim 1, wherein the audio signal is encoded using a high frequency checkerboard modulation of said array of ink dots.

8. The substrate of claim 1, which is a card.

* * * * *