

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
30 July 2009 (30.07.2009)

PCT

(10) International Publication Number  
WO 2009/094293 A1

## (51) International Patent Classification:

*G06F 15/02* (2006.01)      *G06F 1/16* (2006.01)  
*G06F 3/04I* (2006.01)

## (21) International Application Number:

PCT/US2009/031159

## (22) International Filing Date: 15 January 2009 (15.01.2009)

## (25) Filing Language: English

## (26) Publication Language: English

## (30) Priority Data:

12/017,298      21 January 2008 (21.01.2008)      US

(71) Applicants (for all designated States except US): **SONY COMPUTER ENTERTAINMENT AMERICA INC.** [US/US]; 919 E. Hillsdale Blvd., Second Floor, Foster City, California 94404 (US). **SONY COMPUTER ENTERTAINMENT EUROPE LIMITED** [GB/GB]; 10 Great Marlborough Street, London W1F 7LP (GB).

## (72) Inventor; and

(75) Inventor/Applicant (for US only): **HARRISON, Phil** [GB/GB]; 15 Great Marlborough Street, London W1F 7HR (GB).

(74) Agent: **ISENBERG, Joshua, D.**; JDI Patent, 809 Corporate Way, Fremont, California 94539 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

## (54) Title: HAND-HELD DEVICE WITH TOUCHSCREEN AND DIGITAL TACTILE PIXELS

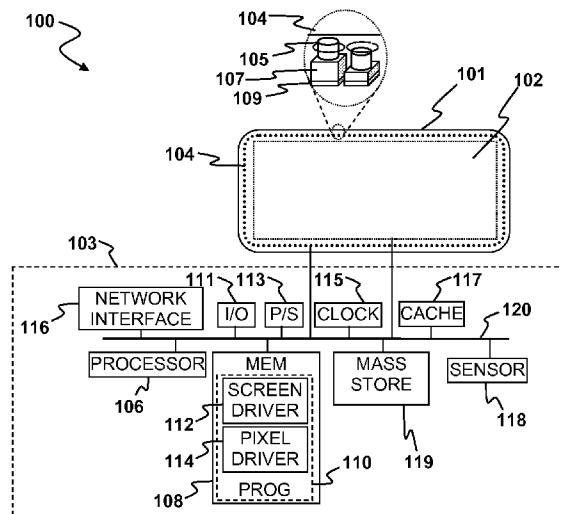


Fig. 1A

(57) **Abstract:** A hand-held electronic device is disclosed. The device may comprise a case having one or more major surfaces; a touch screen disposed on one of the major surfaces; a processor operably coupled to the touch screen; and one or more tactile pixels disposed proximate the touch screen. Each of the tactile pixels includes an actuatable portion coupled to an actuator and a sensor. The actuator and sensor are coupled to the processor. The actuator is configured to actuate in response to instructions from the processor and the sensor is configured to generate signals as inputs to one or more programs executed by the processor when pressure is applied to the actuatable portion. The actuatable portion is actuatable by the actuator between first and second positions. A tactile feel of the actuatable portion is different in the first and second positions.

WO 2009/094293 A1

## HAND-HELD DEVICE WITH TOUCHSCREEN AND DIGITAL TACTILE PIXELS

### PRIORITY CLAIM

This application claims the benefit of priority of commonly assigned U.S. Patent Application  
5 12/017,298, filed January 21, 2008, the entire disclosures of which are incorporated herein by  
reference.

### FIELD OF THE INVENTION

Embodiments of the present invention are related to handheld devices and more particularly  
to hand-held devices that utilize touchscreens.

10 **BACKGROUND OF THE INVENTION**

Touchscreens are displays which also have the ability to detect the location of touches within  
the display area. This allows the display to be used as an input device, removing the keyboard  
and/or the mouse as the primary input device for interacting with the display's content. Such  
displays can be attached to computers or, as terminals, to networks. Touchscreens also have  
15 assisted in recent changes in the design of personal digital assistant (PDA), satellite  
navigation and mobile phone devices, making these devices more usable.

Touchscreens have become commonplace since the invention of the electronic touch  
interface in 1971 by Dr. Samuel C. Hurst. They have become familiar in retail settings, on  
point of sale systems, on automatic teller machines (ATMs) and on PDAs where a stylus is  
20 sometimes used to manipulate a graphical user interface (GUI) and to enter data. The  
popularity of smart phones, PDAs, portable game consoles and many types of information  
appliances is driving the demand for, and the acceptance of, touchscreens.

Existing touch screens are configured to receive a mechanical input and provide a visible  
output. However, existing touch screens are not configured to provide both a visible and a  
25 mechanical output.

It is within this context that embodiments of the present invention arise.

### BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the  
following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1A is a block diagram of a hand-held device according to an embodiment of the present invention.

FIG. 1B is a three-dimensional diagram of a hand-held device according to an embodiment of the present invention.

5 FIG. 1C is a three-dimensional diagram of a hand-held device according to another alternative embodiment of the present invention.

FIG. 1D is a three-dimensional diagram of a hand-held device according to another alternative embodiment of the present invention.

10 FIG. 1E is a side elevation diagram of a hand-held device according to another alternative embodiment of the present invention.

FIG. 2 is a flow diagram of illustrating operation of a hand-held device of the type shown in FIGS. 1A-1E.

FIG. 3 is a three-dimensional diagram illustrating use of a portion of the tactile array as a command button in a hand-held device according to an embodiment of the present invention.

15 FIG. 4 is a three-dimensional diagram illustrating use of a portion of a tactile array as a scroll wheel in a hand-held device according to an embodiment of the present invention.

FIG. 5 is a three dimensional diagram illustrating use of a portion of a tactile array to indicate an end of a scrolling in a hand-held device according to an embodiment of the present invention.

20 FIGS. 6A-6B are three dimensional diagrams illustrating use of a portion of a tactile array as a level indicator in a hand-held device according to an embodiment of the present invention.

FIG. 7 is a three-dimensional diagram of an electronic device according to an alternative embodiment of the invention.

#### DESCRIPTION OF THE SPECIFIC EMBODIMENTS

25 Although the following detailed description contains many specific details for the purposes of illustration, anyone of ordinary skill in the art will appreciate that many variations and alterations to the following details are within the scope of the invention. Accordingly, the

exemplary embodiments of the invention described below are set forth without any loss of generality to, and without imposing limitations upon, the claimed invention.

According to an embodiment of the invention, a shown in FIG. 1A, a handheld electronic device **100** includes a case **101** with a touch screen **102** formed on a major surface of the case **101**. The case may be of sufficiently small size that it can be held in a user's hand. An array of one or more digital tactile pixels **104** may be located proximate an edge of the touch screen **102**. The device may include a controller **103**, the components of which may be located within the case **101**. The controller **103** includes a processor **106** operably coupled to the touch screen **102**. In some embodiments, the device **100** may include multiple processors **106** if parallel processing is to be implemented. The device **100** may be configured for use as a game device, a phone, a portable media player, an email device, web browser device and the like.

The touch screen **102** may be based on any suitable touch screen technology, such as resistive, surface-acoustic wave (SAW) capacitive, infrared, strain gauge, optical imaging, dispersive signal technology, acoustic pulse recognition, frustrated total internal reflection or graphics tablet based on magneto-strictive technology to locate the tip of a stylus. By way of example a resistive touch screen panel may be composed of several layers including two thin metallic electrically conductive and resistive layers separated by thin space. When some object touches this kind of touch panel, the layers are connected at certain point. The panel then electrically acts similar to two voltage dividers with connected outputs. This causes a change in the electrical current which is registered as a touch event which may be sent to the processor **106** for processing.

Surface Acoustic Wave technology uses ultrasonic waves that pass over the touch screen panel. When the panel is touched, a portion of the wave is absorbed. This change in the ultrasonic waves registers the position of the touch event and sends this information to the controller for processing.

A capacitive touch screen panel may be coated with a material, e.g., indium tin oxide that conducts a continuous electrical current across the sensor. The sensor therefore exhibits a precisely controlled field of stored electrons in both the horizontal and vertical axes. When the capacitive touch screen's 'normal' capacitance field (its reference state) is altered by an externally applied electric field, e.g., from a user's finger, electronic circuits located at each

corner of the panel measure a resultant 'distortion' in the characteristics of the reference field and send the information about the event to the processor **106** for mathematical processing.

An infrared touch screen panel may employ one of two different methodologies. One method uses thermal induced changes of the surface resistance. Another method is an array of

5 vertical and horizontal IR sensors that detected interruption of a modulated light beam near the surface of the screen.

In a strain gauge configuration the screen is spring mounted on the four corners and strain gauges are used to determine deflection when the screen is touched. This technology may also measure movement of the screen **102** along the Z-axis.

10 In touch screen technology based on optical imaging, two or more image sensors may be placed around the edges (mostly the corners) of the screen. Infrared backlights may be placed in a camera's field of view on the other sides of the screen. A touch shows up as a shadow and each pair of cameras can then be triangulated to locate the touch.

15 Dispersive signal technology may use sensors to detect mechanical energy in the glass that occurs due to a touch. Complex algorithms then interpret this information and provide the actual location of the touch.

Touch screens based on acoustic pulse recognition may use more than two piezoelectric transducers located at some positions of the screen to turn the mechanical energy of a touch (vibration) into an electronic signal. This signal may then be converted into an audio file, and

20 then compared to preexisting audio profile for every position on the screen.

Touch screens based on frustrated total internal reflection use the principle of total internal reflection to fill a refractive medium with light. When a finger or other soft object is pressed against the surface, the internal reflection light path is interrupted, making the light reflect outside of the medium and thus visible to a camera behind the medium.

25 Referring again to FIG. 1A, each of the tactile pixels **104** includes an actuatable portion **105** coupled to an actuator **107** and a sensor **109**. The actuator **107** and sensor **109** are coupled to the processor **106**. The actuator **107** is configured to actuate in response to instructions from the processor **106** and the sensor **109** is configured to generate signals as inputs to one or more programs executed by the processor **106** when pressure is applied to the actuatable

portion **105**. The actuator **107** may be any suitable electromechanical actuator. Examples of suitable actuators include piezoelectric actuators, MEMS actuators and magnetic coil actuators. The sensor **109** may be any suitable sensor, e.g., capacitive gauge sensor, piezoelectric sensor, resistive sensor, strain gauge and the like. In some cases, such as the 5 particular case of piezoelectric devices, the same device may be used as both the actuator **107** and the sensor **109**.

The actuatable portion **105** is actuatable by the actuator **107** between first and second positions. A tactile feel of the actuatable portion **105** is different in the first and second positions. For example, as shown in the inset to FIG. 1A, the actuatable portion **105** may be 10 flush with or recessed below a surface of the case **101** in the first position and raised up above the surface in the second position. By way of example, the actuatable portion **105** may change from flush to protruding or vice versa or from flush to recessed or vice versa. Preferably, the actuatable portion is sufficiently wide and protrudes by a sufficient amount 15 that it can be sensed by a user's fingers. It may also be desirable for adjacent tactile pixels to be spaced sufficiently far apart that they may be distinguished. By way of example a protrusion of about 0.5 millimeters and an inter-dot spacing of about 2.5 millimeters is sufficient for sensing and distinguishing the raised dots that make up Braille cells.

There are a number of different possible configurations for the digital tactile pixels **104**. By way of example, and without loss of generality, the one or more digital tactile pixels may be 20 located along perimeter of touch screen **102** on the same face of the device as the touch screen **102** as shown in FIG. 1B. In this example, a user may hold the device **100** in the right hand and work the touch screen **102** with the index finger of the left hand. The tactile pixels **104** may be sensed by the fingers of the left hand. In an alternative embodiment, shown in FIG. 1C, the tactile pixels **104** may be located along a side edge **122** of the device **100**. In 25 another alternative embodiment, the one or more digital tactile pixels **104** may be located on a beveled edge **124** of the handheld device as shown in FIG. 1D.

Furthermore, it is noted that in certain embodiments of the invention the device **100** may include two touch screens located on opposite faces of the case **101** and tactile pixels **104** located on one or more major surfaces as well as a side edge and one or more bevels. For 30 example, as shown in FIG. 1E, the hand-held device **100** may have a first touch screen **102A** disposed on a first major surface **125A** and a second touch screen **102B** disposed on a second major surface **125B**. Tactile pixels **104** may be disposed on the first major surface **125A**

proximate an edge of the first touch screen **102A** or on the second major surface **125B** proximate an edge of the second touch screen **102B**. In addition, tactile pixels **104** may be disposed on a side edge **122** between the first and second major surfaces. Furthermore tactile pixels **104** may be disposed on a first beveled edge **124A** between the first major surface **125A** and the side edge **122** and/or on a second beveled edge **124B** between the side edge **122** and the second major surface **125B**.

The hand-held device **100** may further include a memory **108** (e.g., RAM, DRAM, ROM, and the like). The memory **108** may store program instructions **110** for execution on the processor **106**. The program instructions **110** may be configured to respond to inputs from one or more input sources on the device (e.g., the touch screen **102** or tactile pixels **104**) or remote input sources that are coupled to the device. The program instructions **110** may include touch-screen driver instructions **112** configured to respond to inputs from and generate images displayed on the touch screen **102**. The instructions **110** may further include another tactile pixel driver instruction **114**. These later instructions may be configured to selectively actuate one or more of the tactile pixels **104** and/or receive input from one or more of the tactile pixels **104** when execution of the program instructions reaches a predetermined state. The tactile pixels **104** are located in proximity to the touch screen **102** in such a way that the tactile feel of the device may dynamically change in response to program commands or the state of what is occurring on the touch screen **102**.

The hand-held device **100** may also include well-known support functions, such as input/output (I/O) elements **111**, power supplies (P/S) **113**, a clock (CLK) **115** and cache **117**. The device **100** may optionally include a mass storage device **119** such as a disk drive, CD-ROM drive, flash drive, or the like to store programs and/or data. The touch screen **102**, tactile pixels **104**, processor **106**, memory **108** and other components of the device **100** may exchange signals (e.g., code instructions and data) with each other via a system bus **120** as shown in FIG. 1A. In some embodiments, the device **100** may include a network interface **116**, configured to allow the device to exchange signals with other devices over a network. Furthermore, the hand-held device **100** may include one or more sensors **118**. Such sensors may include, e.g., an inertial sensor such as an accelerometer or tilt sensor, an optical sensor, an acoustic sensor such as a microphone or microphone array. The sensors may generate inputs to the program instructions **110** that reflect the environment in which the hand-held device operates.

In embodiments of the invention the tactile pixel driver instructions **114** may be configured to control whether a given tactile pixel is in the first position or the second position, e.g., whether pixel is up or down, based on state of the touch screen **102**. The state of the tactile pixels may thereby be made to respond to what is being represented by images displayed on the touch screen (e.g., game events, in the case of a hand-held game device). By way of example, an array of tactile pixels **104** that surrounds the touch screen **102** could produce the tactile equivalent of a digital chaser light display effect in response to game events, by selectively changing particular tactile pixels from the “up” to down in sequence.

In addition, according to certain embodiments of the invention, the tactile pixel driver instructions **114** may dynamically configure which functions will be performed when particular tactile pixels or groups of tactile pixels are pressed. By way of example, FIG. 2 illustrates a method **200** for operating a hand-held device of the types shown in FIG. 1A through FIG. 1D. As indicated at **202** user input may be tracked with the touch screen **102**. The touch screen may track entries made by a user’s finger or a stylus in close proximity to or pressing against the touch screen. At **204** a state of the touch screen is determined. The state of the touch screen is generally a reflection of images that are displayed on the touch screen and inputs received with the touch screen. As an example, the device **100** may be configured as a video game device. In such a case, the state of the touch screen **102** may reflect a state of the game or events occurring within the context of a game. The state may be determined by comparing the image displayed on the touch screen and inputs received from the touch screen to a corresponding list of known images and inputs corresponding to known states.

In other embodiments the change of state may be triggered by a change of state of some other device that is in communication with the hand-held device. For example, if the device **100** is configured to operate as a mobile phone, e.g., a cell phone, the tactile pixels **104** may change state when a call to or from another remote device begins or ends.

By way of example, as indicated at **206**, the inputs may optionally be compared to known inputs made with the touch screen that correspond to predetermined gestures. For example, drawing an “X” with the finger on the touch screen may correspond to some particular command within the context of execution of the program instructions **110**. Gesture recognition may be implemented in any of a number of ways. Examples of gesture recognition are described, e.g., in commonly assigned US Provisional Patent Application

61/020,669 to Thomas Miller IV, entitled GESTURE CATALOGING AND RECOGNITION, filed January 11, 2008, which is incorporated herein by reference.

As indicated at 208 a state of one or more of the tactile pixels 104 may be changed in response to detection of a predetermined state of the display. By way of example, certain selected tactile pixels may be set in the “up” state and others may be set in the “down” state if a particular predetermined state is detected. In certain embodiments, selected tactile pixels may be activated to act as input buttons for execution of portions of the program instructions 110.

By way of example, as depicted in FIG. 3, when the state of the touch screen 102 is such that

10 a command region 126 is displayed one or more particular tactile pixels 104 proximate the command region 126 may be activated. In the activated state, the particular tactile pixels 104 proximate the command region 126 may be in an “up” position, where they can easily felt by a user and where they can act as buttons. The particular tactile pixel may be mapped to an input for a particular command corresponding to the command displayed in the command

15 region. When this state is detected, the state of the tactile pixels 104 may change by selectively actuating one or more particular tactile pixels 104 proximate the command region 126 shown on the touch screen such that the one or more particular tactile pixels 104 can be felt by a user and configuring the particular pixels to act as a button to execute the command with the hand-held device 100. In some embodiments the tactile pixel driver instructions 114

20 may be configured to vibrate one or more particular tactile pixels to draw the user’s attention to them. Vibration of the tactile pixels could be used guide the fingers toward command region 126. The tactile pixels could be configured to vibrate in response to images displayed on or inputs received from the touch screen 102. For example, certain tactile pixels may vibrate with greater amplitude when scrolling is close to an end point. Alternatively, the 25 frequency of tactile pixel vibration may be tied to a state of a gesture made with the finger on the touch pad 102.

For some touch screens it is sometimes hard to tell where the edge of screen is located. In certain embodiments of the invention, the tactile pixels 104 may be used as a guide to the location of the edge of the screen. For example, as shown in FIG. 4, changing the state of the 30 tactile pixels 104 may include selectively actuating one or more particular pixels 104 such that they can be felt by a user and configuring the particular pixels 104 to act as a scroll wheel for the hand-held device 100. The predetermined state may be one in which a scroll

bar **128** is displayed on the touch screen **102**. Selected tactile pixels **104** proximate the scroll bar **128** may be in a raised state for use as scroll wheel. The user may operate the selected tactile pixels **104**, e.g., by stroking them in sequence with the thumb or index finger. The tactile pixel driver **114** may be configured to associate pressing the selected tactile pixels **104**

5 in a particular sequence as scrolling instruction. A particular image displayed with the touch screen may be scrolled as a result.

In yet another example, as shown in FIG. 5, changing the state of the tactile pixels **104** may include using selected tactile pixels **104** to mark and endpoint for scrolling. Particular tactile pixels **104** at the corner of the touch screen **102** may be actuated to the “up” state when the

10 endpoint of scrolling is reached. The raised tactile pixels **104** may provide a tactile cue to the user that the end of scrolling has been reached.

In some embodiments, the change of state of the tactile pixels **104** may be triggered by a change of state of one or more of the sensors **118**. By way of example, the configuration of the tactile pixels **104** may respond to a tilt sensor. For instance, as shown in FIGs. 6A-6B,

15 the device **100** may include a tilt sensor **121** mounted within the case **101**. The tilt sensor **121** may be coupled to the processor **106**. The tilt sensor **121** may produce a signal input that depends on the relative orientation of the case **101** and this signal may be used to change the state of the tactile pixels **104**. For example, as shown in FIG. 6A, when the tilt sensor **121** senses that the case is held level, a particular subset of the tactile pixels **104** may be raised.

20 In this case, two tactile pixels **104A**, **104B** closest to an axis of rotation **Y** may be raised.

When the case **101** is tilted the tilt sensor **121** may produce a signal proportional to the magnitude of the tilt and sensitive to the direction of tilt. The tactile pixel driver **114** may be configured to cause the tactile pixels **104A**, **104B** closest to the axis **Y** to be lowered and one or more tactile pixels **104C**, **104D** further away from the axis to be raised, as shown in FIG.

25 The effect of a bubble level may be simulated by selectively raising and lowering tactile pixels in response to signals from the tilt sensor **121** as shown in FIGs. 6A-6B.

In some embodiments of the present invention an array of electro-mechanical tactile pixels of the type described above may be used as the equivalent to touch screen. For example, as

shown in FIG. 7, a device **700** may include a case **701** and a touch screen **702** formed from an

30 array of tactile pixels **704** may be disposed on a major surface of the case **701**. The tactile pixels **704** may be implemented as described above with respect to tactile pixels **104**, e.g., with piezoelectric actuator/sensors. A processor **706** may be operably coupled to the touch

screen. The device **700** may be configured to operate as a game device, a phone, a portable media player, an email device, web browser device and the like.

Each of the tactile pixels **704** in the array includes an actuatable portion **705** coupled to an actuator **707** and a sensor **709**. The actuator and sensor are coupled to the processor **706**.

5 The actuator **707** is configured to actuate in response to instructions from the processor **706**. The sensor **709** is configured to generate signals when pressure is applied to the actuatable portion **705**. The signals may act as inputs to as inputs to one or more programs **710** stored in a memory **708** and executed by the processor **706**. The programs **710** may include a specially configured tactile pixel array driver **714**. The actuatable portion **705** is actuatable by the

10 actuator **707** between first and second positions in response to execution of one or more instructions by the processor **706**. A tactile feel of the actuatable portion **705** is different in the first and second positions.

15 The device **700** may also include well-known support functions, such as input/output (I/O) elements **711**, power supplies (P/S) **713**, a clock (CLK) **715** and cache **717**. The device **700** may optionally include a mass storage device **719** such as a disk drive, CD-ROM drive, flash drive, or the like to store programs and/or data. The tactile pixels **704**, processor **706**, memory **708** and other components of the device **700** may exchange signals (e.g., code instructions and data) with each other via a system bus **720** as shown in FIG. 7. In some

20 embodiments, the device **700** may include a network interface **716**, configured to allow the device to exchange signals with other devices over a network. Furthermore, the hand-held device **700** may include one or more sensors **718**. Such sensors may include, e.g., an inertial sensor such as an accelerometer or tilt sensor, an optical sensor, an acoustic sensor such as a microphone or microphone array. The sensors may generate inputs to the program

25 instructions **710** that reflect the environment in which the hand-held device operates.

All of the features described above with respect to the hand-held device **100** may also be applied to the device **700**.

30 While the above is a complete description of the preferred embodiment of the present invention, it is possible to use various alternatives, modifications and equivalents. Therefore, the scope of the present invention should be determined not with reference to the above description but should, instead, be determined with reference to the appended claims, along with their full scope of equivalents. Any feature described herein, whether preferred or not,

may be combined with any other feature described herein, whether preferred or not. In the claims that follow, the indefinite article “A”, or “An” refers to a quantity of one or more of the item following the article, except where expressly stated otherwise. The appended claims are not to be interpreted as including means-plus-function limitations, unless such a limitation  
5 is explicitly recited in a given claim using the phrase “means for.”

WHAT IS CLAIMED IS:


1. 1. A hand-held electronic device, comprising:
  2. a case having one or more major surfaces;
  3. a touch screen disposed on at least one of the major surfaces;
  4. a processor operably coupled to the touch screen; and
  5. one or more tactile pixels disposed proximate the touch screen, wherein each of the one or more tactile pixels includes an actuatable portion coupled to an actuator and a sensor, wherein the actuator is coupled to the processor, wherein the actuator is configured to actuate in response to instructions from the processor and wherein the sensor is configured to generate signals as inputs to one or more programs executed by the processor when pressure is applied to the actuatable portion, wherein the actuatable portion is actuatable by the actuator between first and second positions in response to execution of one or more instructions by the processor, wherein a tactile feel of the actuatable portion in the first position is different from the tactile feel of the actuatable portion in the second position.
1. 2. The device of claim 1 wherein the one or more tactile pixels are located on the same major surface of the case as the touch screen.
1. 3. The device of claim 1 wherein the one or more tactile pixels are located on a side edge of the case proximate the major surface on which the touch screen is disposed.
1. 4. The device of claim 1 wherein the case includes a beveled edge between a side edge and the major surface on which the touch screen is disposed, wherein the one or more tactile pixels are located on the beveled edge.
1. 5. The device of claim 1 wherein the device is configured such that the one or more of the tactile pixels are positioned to provide tactile feedback to a user and/or receive input from a user in response to a predetermined state of the touch screen.
1. 6. The device of claim 5 wherein the device is configured such that a particular one or more of the one or more of the tactile pixels selectively actuate to mark an endpoint of scrolling of an image displayed on the touch screen.

- 1 7. The device of claim 5 wherein the device is configured such that a particular one or more  
2 of the one or more tactile pixels vibrate in response to the change in state of the touch  
3 screen.
- 1 8. The device of claim 7 wherein a frequency of vibration of the particular one or more of  
2 the one or more tactile pixels is related to a state of a gesture made with the touch pad.
- 1 9. The device of claim 1 wherein the device is configured such that the one or more of the  
2 tactile pixels are positioned to provide tactile feedback to a user and/or receive input from  
3 a user in response to a gesture entered with the touch pad.
- 1 10. The device of claim 1 wherein the device is configured such that a particular one or more  
2 of the one or more of the tactile pixels are positioned to act as buttons associated with  
3 specific command inputs to the device.
- 1 11. The device of claim 10 wherein the touch screen is configured to display information  
2 identifying the specific command inputs proximate the particular one or more tactile  
3 pixels.
- 1 12. The device of claim 1, further comprising a sensor configured to register a change in  
2 orientation of the device.
- 1 13. The device of claim 12 wherein the device is configured such that a particular one or  
2 more of the one or more of the tactile pixels actuate between the first and second  
3 positions in response to a change in orientation of the device.
- 1 14. The device of claim 10 wherein the device is configured to be used as game device,  
2 phone, portable media player, email device, web browser device or navigation device.
- 1 15. The device of claim 10 wherein the device is configured to be used as a game device and  
2 wherein the device is configured to change a state of the one or more tactile pixels in  
3 response to a change in a game state or game event.
- 1 16. The device of claim 1, further comprising a communication interface adapted to facilitate  
2 communication between the device and one or more other devices.

- 1 17. The device of claim 1, wherein the device is configured such that a state of the one or
- 2 more tactile pixels changes in response to a change in state of one or more other devices
- 3 in communication with the hand-held electronic device.
- 1 18. An electronic device, comprising:
  - 2 a touch screen disposed on a major surface of the electronic device;
  - 3 a processor operably coupled to the touch screen; and
  - 4 wherein the touch screen comprises an array of tactile pixels, wherein each of the tactile
  - 5 pixels in the array includes an actuatable portion coupled to an actuator and a sensor,
  - 6 wherein the transducer is coupled to the processor, wherein the actuator is configured to
  - 7 actuate in response to instructions from the processor and wherein the sensor is
  - 8 configured to generate signals as inputs to one or more programs executed by the
  - 9 processor when pressure is applied to the actuatable portion, wherein the actuatable
  - 10 portion is actuatable by the actuator between first and second positions in response to
  - 11 execution of one or more instructions by the processor, wherein a tactile feel of the
  - 12 actuatable portion in the first position is different from the tactile feel of the actuatable
  - 13 portion in the second position.
- 1 19. A method for operating a hand-held device having a touch screen and
- 2 one or more tactile pixels disposed proximate the touch screen, wherein each of the one or
- 3 more tactile pixels includes an actuatable portion coupled to an actuator and a sensor,
- 4 wherein the actuatable portion is actuatable by the actuator between first and second
- 5 positions, wherein a tactile feel of the actuatable portion in the first position is different
- 6 from the tactile feel of the actuatable portion in the second position, the method
- 7 comprising:
  - 8 tracking user input with the touch screen;
  - 9 determining a state of the touch screen;
  - 10 changing a state of the one or more tactile pixels in response to detection of a
  - 11 predetermined state of the display.
- 1 20. The method of claim 19 wherein tracking the user input includes tracking motion of a
- 2 user's finger with the touch screen.
- 1 21. The method of claim 19 wherein determining the state of the touch screen includes
- 2 determining whether the user has entered a particular gesture on the touch screen.

- 1 22. The method of claim 19 wherein the user input to the touch screen corresponds to user
- 2 input to a video game.
- 1 23. The method of claim 22 wherein the predetermined state reflects a change in state of the
- 2 video game or one or more particular game events.
- 1 24. The method of claim 19 wherein the predetermined state corresponds to a change in state
- 2 of one or more other devices in communication with the hand-held device.
- 1 25. The method of claim 19 wherein the hand-held device includes a title sensor and the
- 2 predetermined state corresponds to a change in state of the tilt sensor.
- 1 26. The method of claim 25 wherein changing the state of the tactile pixels includes
- 2 selectively actuating one or more particular pixels in response to a tilting of the hand-held
- 3 device sensed by the tilt sensor in a way that simulates a bubble level.
- 1 27. The method of claim 19 wherein changing the state of the tactile pixels includes
- 2 selectively actuating one or more particular pixels such that they can be felt by a user and
- 3 configuring the particular pixels to act as a scroll wheel for the hand-held device.
- 1 28. The method of claim 19 wherein changing the state of the tactile pixels includes
- 2 selectively actuating one or more particular pixels proximate a command shown on the
- 3 touch screen such that the one or more particular pixels can be felt by a user and
- 4 configuring the particular pixels to act as a button to execute the command with the hand-
- 5 held device.
- 1 29. The method of claim 28, further comprising vibrating the one or more particular tactile
- 2 pixels.
- 1 30. The method of claim 19 wherein changing the state of the tactile pixels includes
- 2 selectively actuating one or more particular pixels such that the one or more particular
- 3 pixels can be felt by a user when the user reaches a scroll limit with the touch screen.

1/6

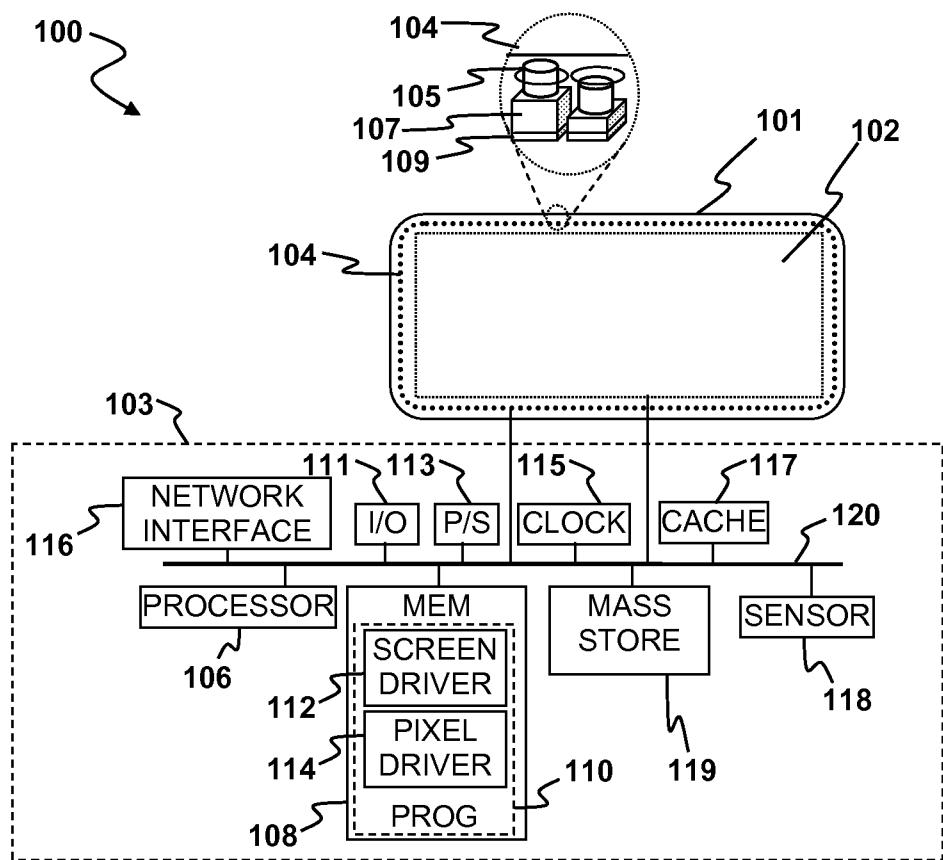

**Fig. 1A**

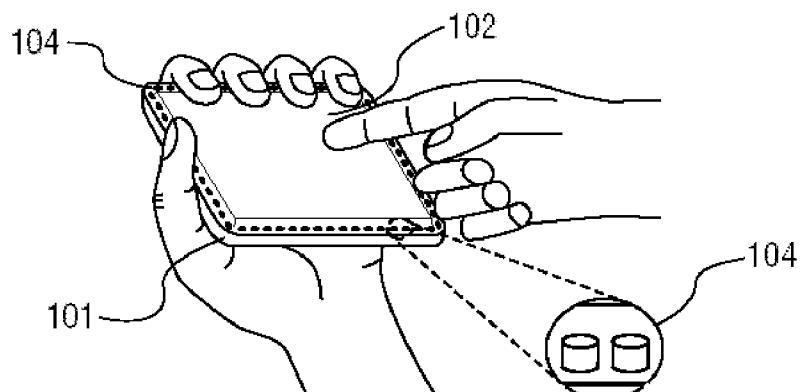


Fig. 1B

2/6

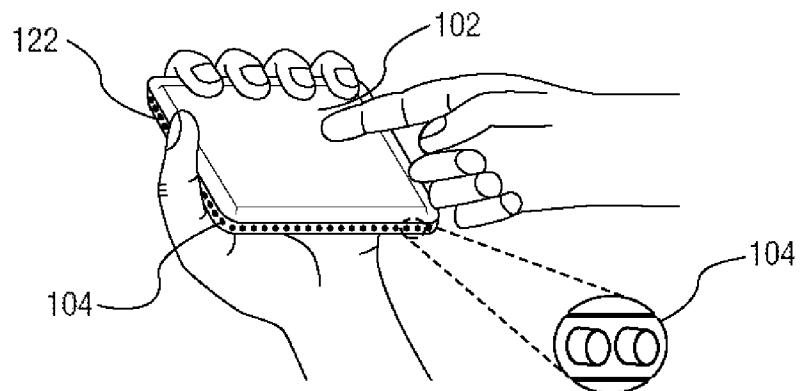


Fig. 1C

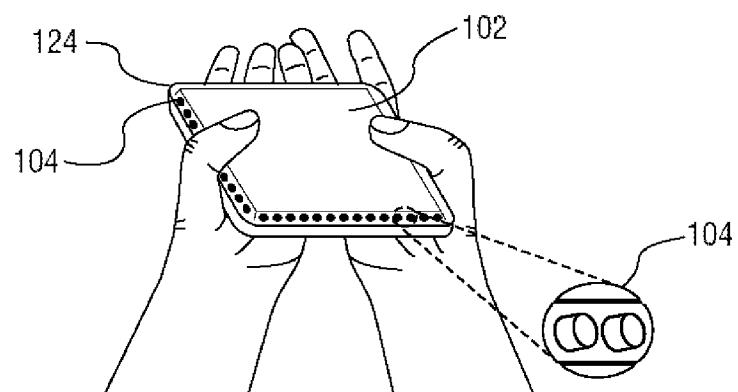


Fig. 1D

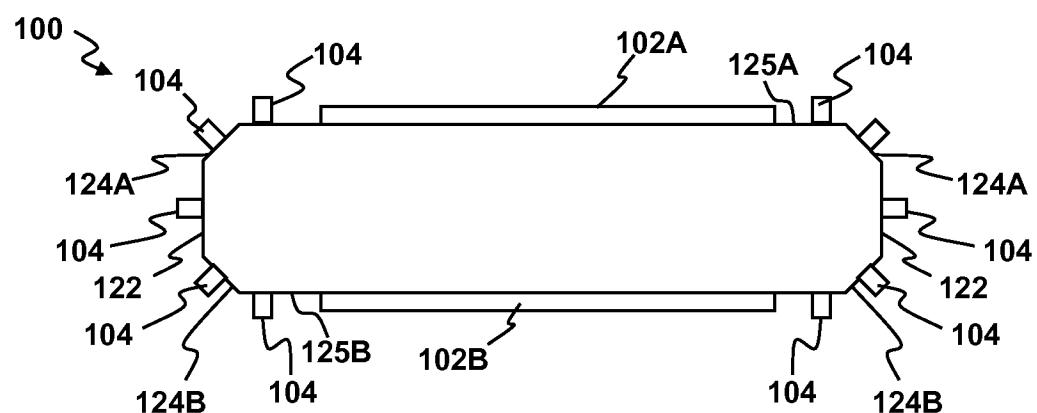


Fig. 1E

3/6

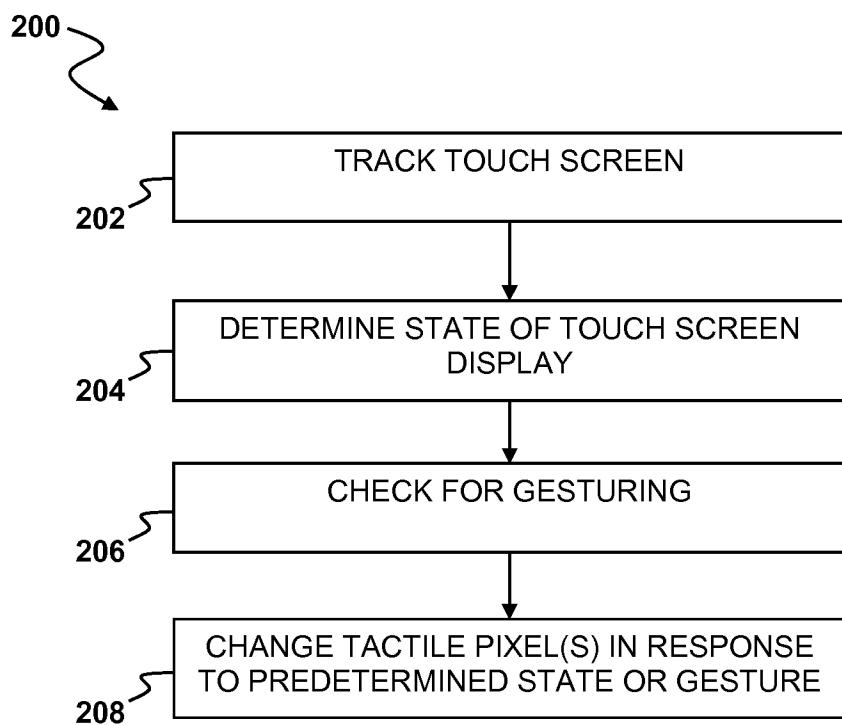


Fig. 2

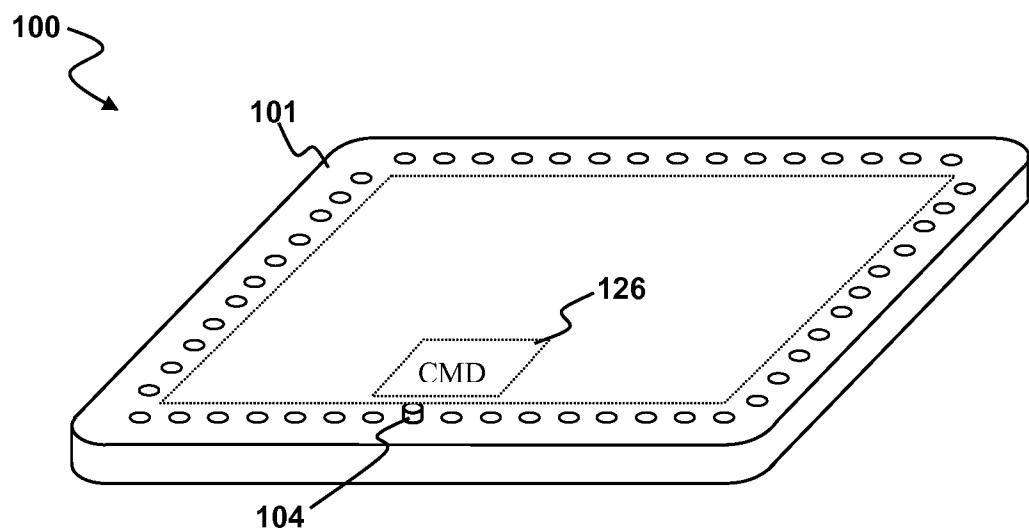
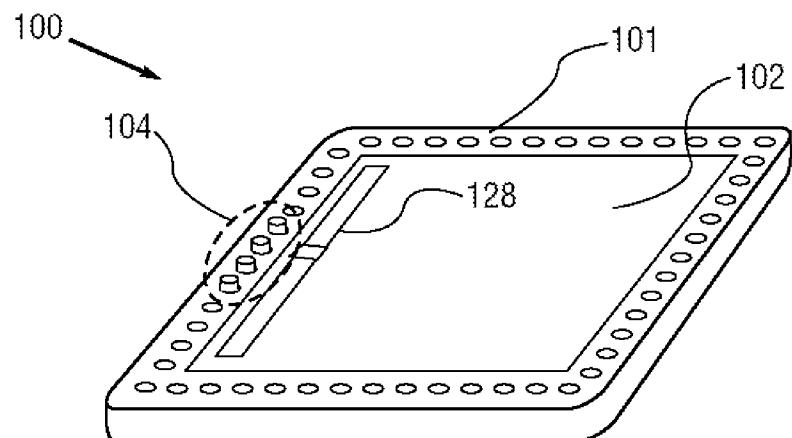
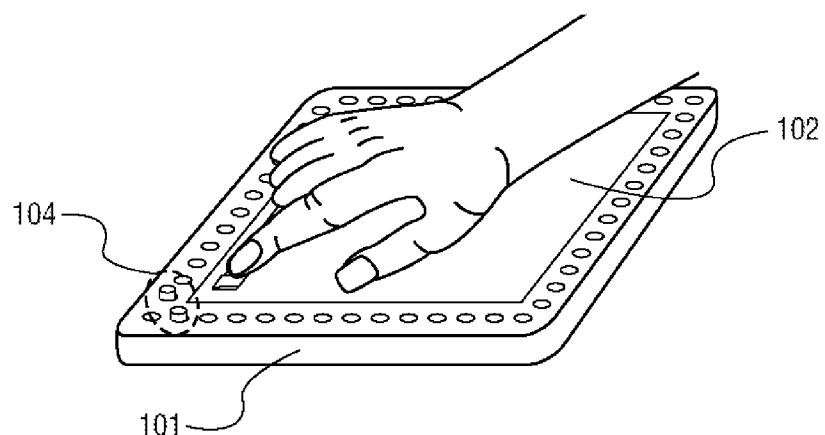


Fig. 3

4/6

**Fig. 4****Fig. 5**

5/6

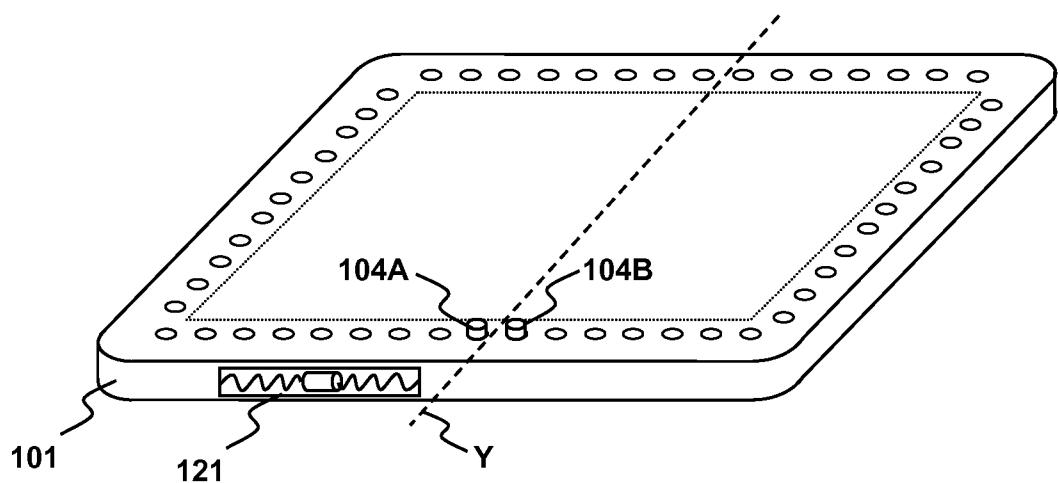


Fig. 6A

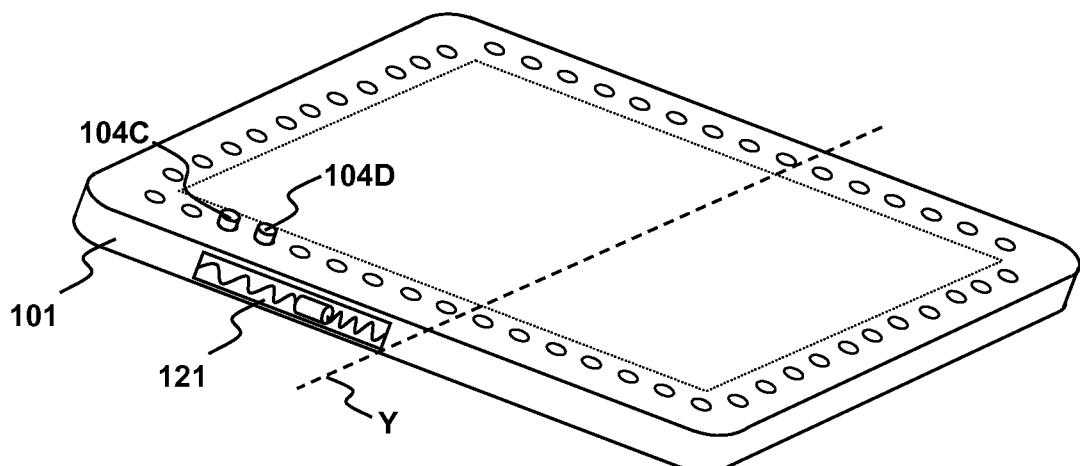


Fig. 6B

6/6

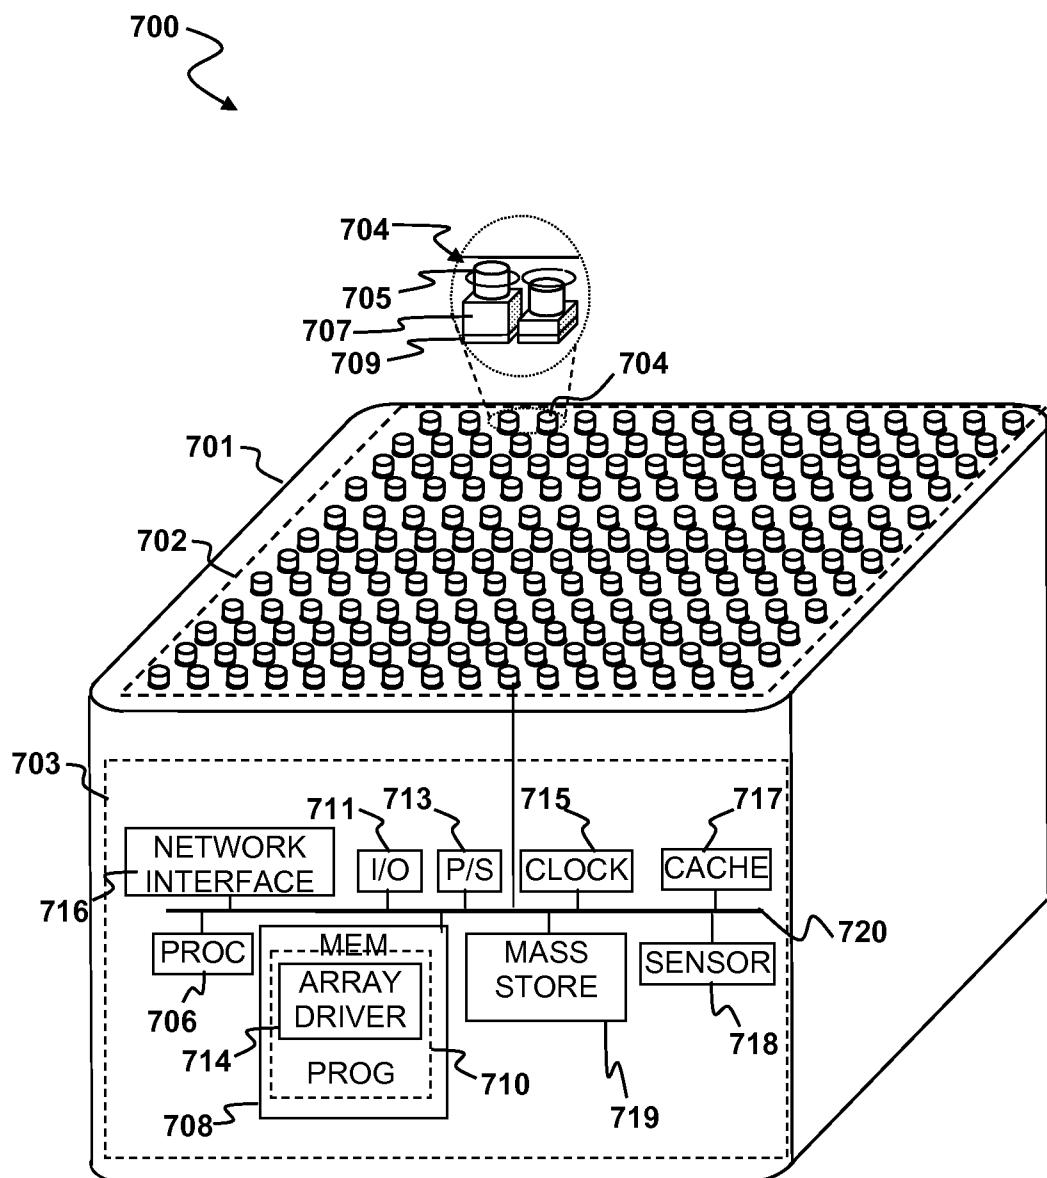


Fig. 7

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2009/031159****A. CLASSIFICATION OF SUBJECT MATTER****G06F 15/02(2006.01)i, G06F 3/041(2006.01)i, G06F 1/16(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC : G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean Utility Models and applications for utility models since 1975  
Japanese Utility Models and applications for utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS(KIPO internal), Google, IEEE xpl : "button control", "tactile", "tile sensor"

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2007-0152982 A1 (KIM KYU-YONG. et al.) 5 July 2007 See abstract, description [0012]-[0085], Figures 7A-14, claims	1-3, 10-11, 14, 16, 18
Y	KR 10-2000-0044444 A (SAMSUNG ELECTRONICS CO., LTD.) 15 July 2000 See abstract, Figures 3A-4, claims	1-3, 10-11, 14, 16, 18
A	US 2003-0184574 A1 (PHILLIPS JAMES V. et al.) 02 October 2003 See abstract, claims	1-30
A	US 2006-0022952 A1 (RYYNANEN MATTI) 02 February 2006 See abstract, claims	1-30

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:  
 "A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier application or patent but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
 "&" document member of the same patent family

Date of the actual completion of the international search

15 JUNE 2009 (15.06.2009)

Date of mailing of the international search report

**16 JUNE 2009 (16.06.2009)**

Name and mailing address of the ISA/KR



 Korean Intellectual Property Office  
 Government Complex-Daejeon, 139 Seonsa-ro, Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Jong Ick

Telephone No. 82-42-481-8373



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2009/031159**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0152982 A1	05.07.2007	KR 10-2007-0070897 A	04.07.2007
KR 10-2000-0044444 A	15.07.2000	NONE	
US 2003-0184574 A1	02.10.2003	NONE	
US 2006-0022952 A1	02.02.2006	US 7342573 B2	11.03.2008