



US 20030041523A1

(19) **United States**

(12) **Patent Application Publication**

Kiesler et al.

(10) **Pub. No.: US 2003/0041523 A1**

(43) **Pub. Date: Mar. 6, 2003**

(54) **DISHWASHER BOTTOM DOOR SEAL**

(21) Appl. No.: **09/682,423**

(76) Inventors: **Jeffrey Thomas Kiesler**, Louisville, KY (US); **Roger Shawn Nelson**, Louisville, KY (US); **Deryl Craig York**, Tempe, AZ (US); **John Joseph DiEnno**, Louisville, KY (US); **Raymond Edward Yuenger**, Louisville, KY (US)

(22) Filed: **Aug. 31, 2001**

Publication Classification

(51) **Int. Cl.⁷** **E01F 13/00**


(52) **U.S. Cl.** **49/490.1**

(57) **ABSTRACT**

Correspondence Address:

JOHN S. BEULICK
C/O ARMSTRONG TEASDALE, LLP
ONE METROPOLITAN SQUARE
SUITE 2600
ST LOUIS, MO 63102-2740 (US)

A door panel assembly for a dishwasher includes an inner door panel having a formation extending therefrom, and a seal member having a head portion and an opening there-through. The opening receives the formation and attaches the seal member to the formation.

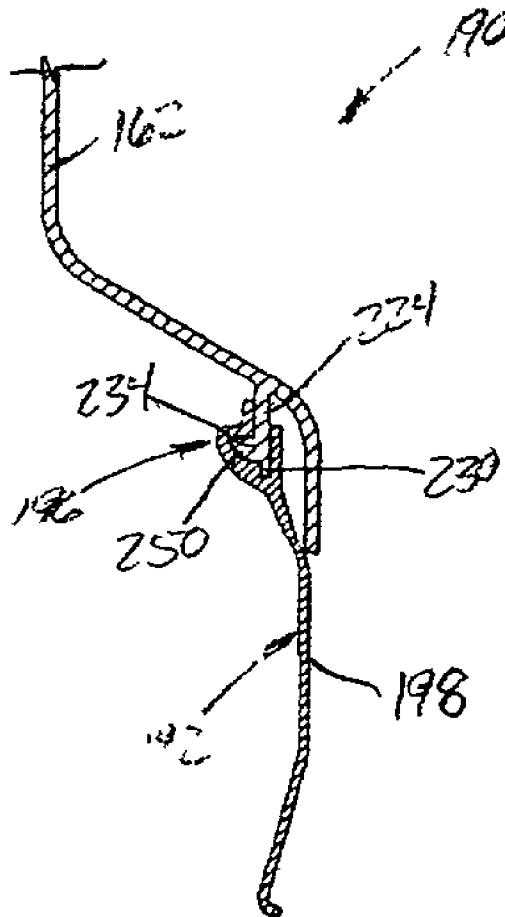

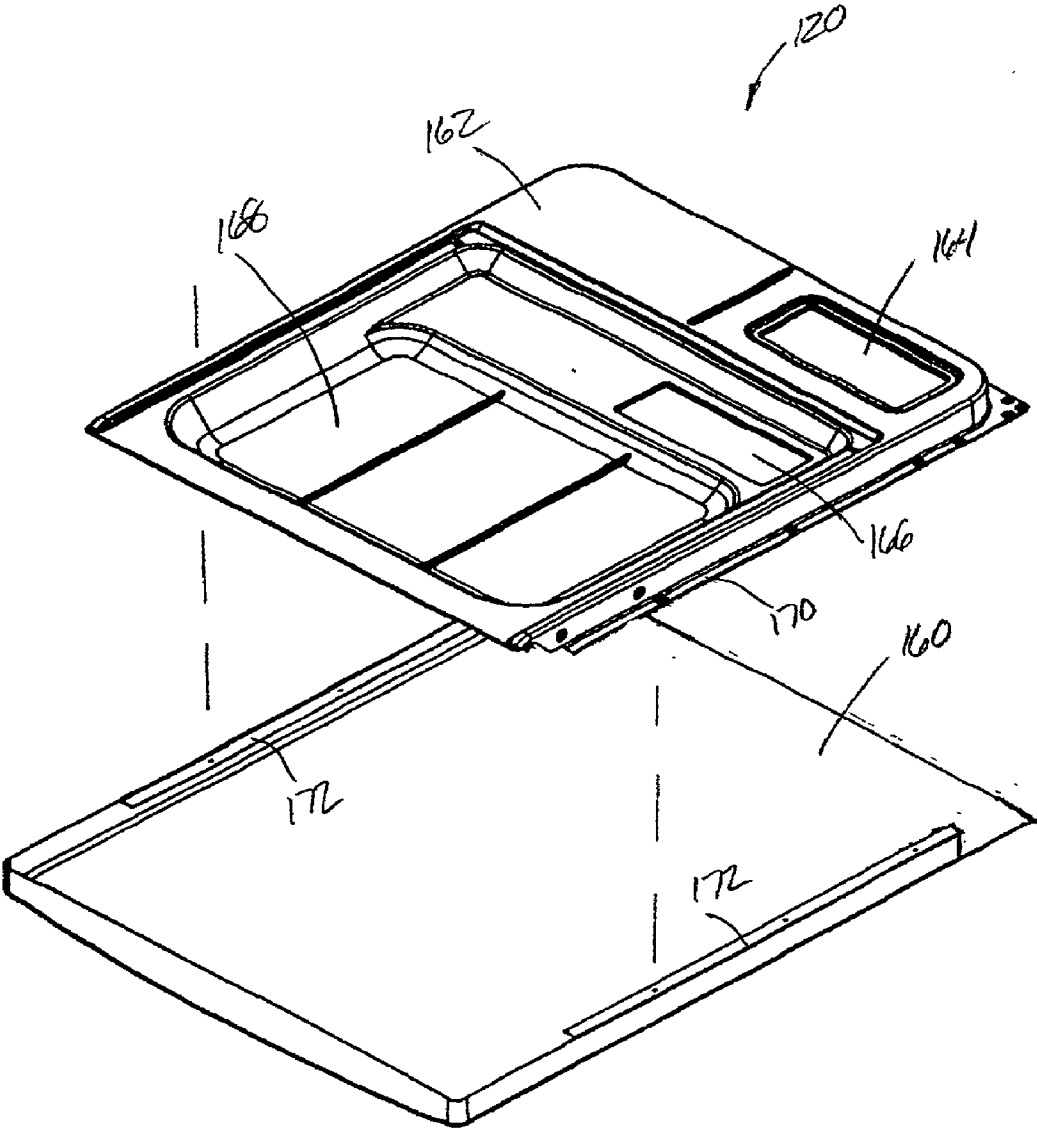


FIG. 2

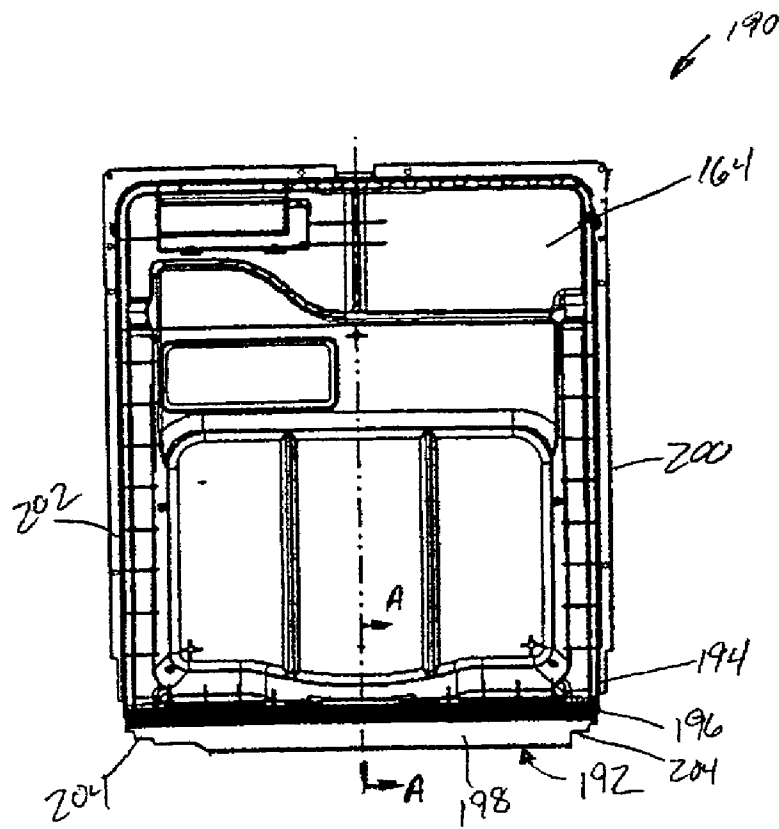


FIG. 3

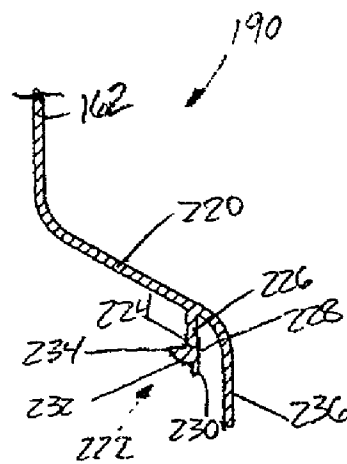


FIG. 4

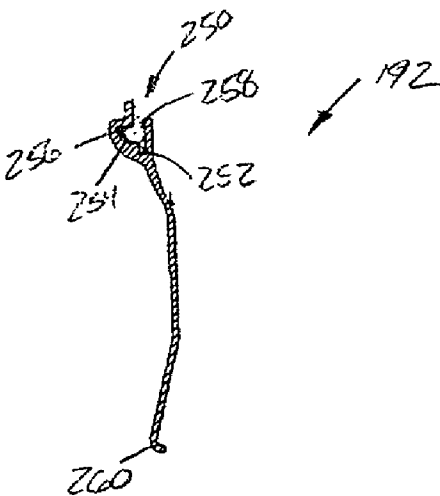


FIG. 5

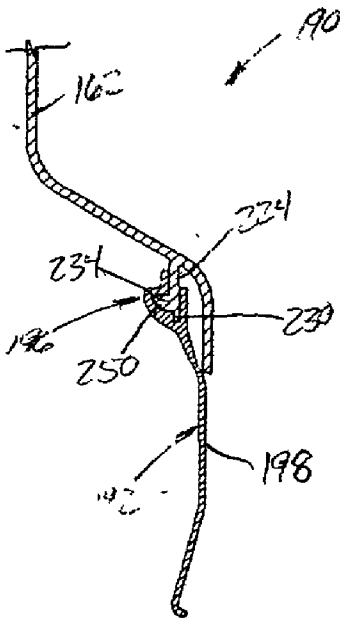


FIG. 6

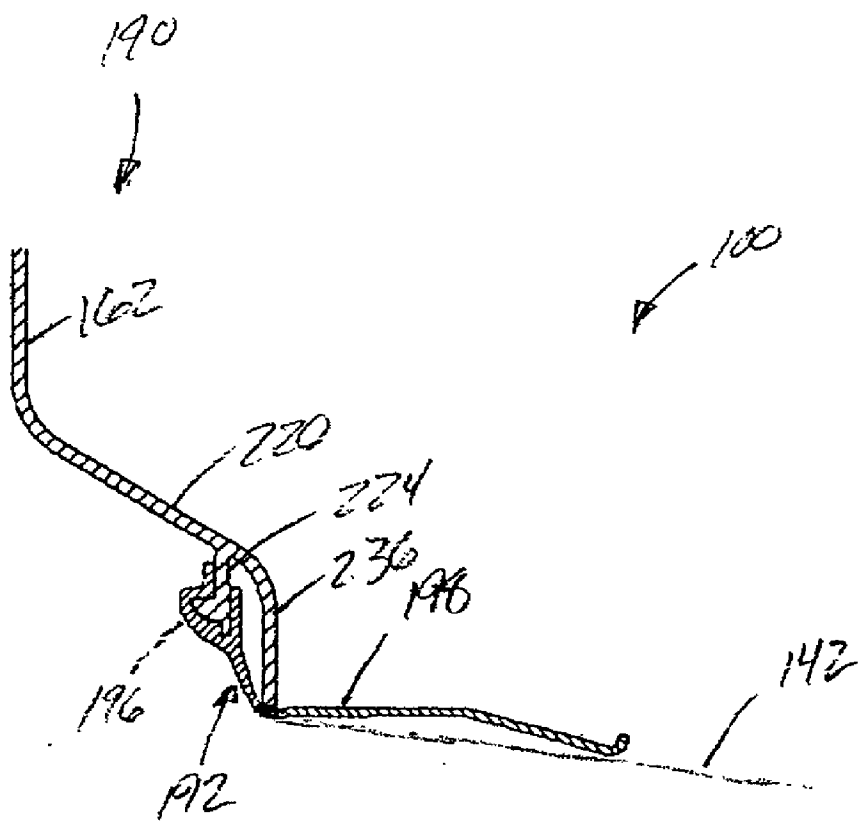


FIG. 7

DISHWASHER BOTTOM DOOR SEAL

BACKGROUND OF INVENTION

[0001] This invention relates generally to sealed door assemblies, and, more specifically, to a seal assembly for the bottom of a dishwasher door.

[0002] Known dishwasher systems include a cabinet, a tub within the cabinet that defines an open sided wash chamber, and a door assembly that seals the open side of the wash chamber when the dishwasher is in use. Soiled dishes, glasses, utensils, food and beverage containers, etc., are loaded into the dishwasher tub through the open side of the wash chamber when the door is open, and after the door is closed, a dishwasher cycle may be executed to clean the items placed therein. The wash chamber includes a sump portion where washing fluid is pumped from a fluid circulation assembly through spray arm conduits to wash items loaded onto dishwasher racks in the wash chamber, and also where wash fluid is collected after being circulated throughout the wash chamber. The door assembly is attached to the dishwasher at a bottom end of the door and pivots about a hinge between fully open and fully closed positions.

[0003] To properly seal the wash chamber when the door is closed, a number of sealing features are employed. For example, a number of rubber gaskets and other known sealing members are attached to the door and/or portions of the dishwasher wash chamber that receive an interior portion of the door assembly. In one type of dishwasher, a bottom door seal is attached to an inner panel of the door assembly to seal the lower region of the wash chamber in the vicinity of the tub sump portion where the door assembly is attached to the dishwasher. In some dishwashers, this is accomplished with a gasket that includes a number of ribs such that when the gasket is press-fit into a channel at the bottom of the door assembly, the gasket is maintained in place with an interference fit due to compression of the gasket ribs.

[0004] While this type of press-fit gasket assembly may form an adequate seal for the dishwasher door, the gasket can be difficult to properly place in the channel, thereby complicating assembly of the door and increasing assembly costs.

SUMMARY OF INVENTION

[0005] In one aspect, a door panel assembly for a dishwasher is provided. The door assembly comprises a panel comprising a formation depending therefrom, and a seal member comprising a head portion and an opening therein complementary in shape to said formation, said formation received in said opening.

[0006] In another aspect, a door panel assembly for a dishwasher is provided. The door panel assembly comprises an inner door panel comprising a formation extending therefrom, and a seal member comprising a head portion and an opening therethrough, said opening receiving said formation and attaching said seal member to said formation.

[0007] In still another aspect, a door panel assembly is provided that comprises a panel comprising a bottom portion, a formation extending therefrom, and a barrier portion extending therefrom in a spaced apart relationship to said formation. A seal member comprises a head portion and a flap portion extending from said head portion, said head

portion comprising an opening therethrough for receiving said formation, said head portion engaged to said formation.

[0008] In yet another aspect, a door panel assembly is provided that comprises a door panel comprising a boot-shaped formation depending therefrom, and a seal member comprising a head portion comprising a boot-shaped opening therethrough, said boot-shaped opening fitted to said boot-shaped formation.

BRIEF DESCRIPTION OF DRAWINGS

[0009] FIG. 1 is a side elevational view of an exemplary dishwasher system partially broken away.

[0010] FIG. 2 is a perspective exploded view of a dishwasher door assembly for the dishwasher shown in FIG. 1.

[0011] FIG. 3 is a rear plan view of an inner door panel assembly shown in FIG. 2.

[0012] FIG. 4 is a cross sectional view of a portion of the inner door shown in FIG. 3 along line A-A; FIG. 5 is a cross sectional view of a portion of a seal member shown in FIG. 3 along line A-A.

[0013] FIG. 5 is a cross sectional view of a portion of a seal member shown in FIG. 3 along line A-A.

[0014] FIG. 6 is a cross sectional view of the door assembly shown in FIG. 3 along line A-A.

[0015] FIG. 7 is a cross sectional schematic view of a portion of the dishwasher shown in FIG. 1 with the inner door panel assembly shown in FIG. 3 attached.

DETAILED DESCRIPTION

[0016] FIG. 1 is a side elevational view of an exemplary domestic dishwasher system 100 partially broken away, and in which the present invention may be practiced. It is contemplated, however, that the invention may be practiced in other types of dishwashers and dishwasher systems beyond dishwasher system 100 described and illustrated herein. Moreover, the door construction described below may find utility and its benefits accrue to appliances generally. Accordingly, the following description is for illustrative purposes only, and the invention is in no way limited to use in a particular type of appliance, such as a particular dishwasher system, for example dishwasher system 100.

[0017] Dishwasher 100 includes a cabinet 102 having a tub 104 therein and forming a wash chamber 106. Tub 104 includes a front opening (not shown in FIG. 1) and a door assembly 120 hinged at its bottom 122 for movement between a normally closed vertical position (shown in FIG. 1) wherein wash chamber 106 is sealed shut for washing operation, and a horizontal open position (not shown) for loading and unloading of dishwasher contents. Upper and lower guide rails 124, 126 are mounted on tub side walls 128 and accommodate upper and lower roller-equipped racks 130, 132, respectively. Each of upper and lower racks 130, 132 is fabricated from known materials into lattice structures including a plurality of elongate members 134, and each rack 130, 132 is adapted for movement between an extended loading position (not shown) in which the rack is substantially positioned outside wash chamber 106, and a retracted position (shown in FIG. 1) in which the rack is located inside wash chamber 106. Conventionally, a silverware

basket (not shown) is removably attached to lower rack **132** for placement of silverware, utensils, and the like that are too small to be accommodated by upper and lower racks **130**, **132**.

[0018] A control panel (not shown in **FIG. 1**) is integrated into an escutcheon **136** that is mounted to door assembly **120**, or in further and/or alternative embodiments control selectors, (e.g., buttons, switches or knobs) or control displays, etc. may be mounted at a convenient location on an outer face **138** of door assembly **120**. The control panel and associated selectors and displays are coupled to known control circuitry (not shown) and control mechanisms (not shown) for operating a fluid circulation assembly (not shown) that circulates water and dishwasher fluid in dishwasher tub **104**. The fluid circulation assembly is located in a machinery compartment **140** located below a bottom sump portion **142** of tub **104**. The construction and operation of the fluid circulation assembly is believed to be beyond the scope of the present invention but well within the purview of those in the art without detailed explanation, and further discussion of the fluid circulation assembly is therefore omitted.

[0019] A lower spray-arm-assembly **144** is rotatably mounted within a lower region **146** of wash chamber **106** and above tub sump portion **142** so as to rotate in relatively close proximity to lower rack **132**. A mid-level spray-arm assembly **148** is located in an upper region of wash chamber **106** and is located in close proximity to upper rack **130** and at a sufficient height above lower rack **132** to accommodate a largest item, such as a dish or platter (not shown), that is expected to be placed in lower rack **132** and washed in dishwasher system **100**. In a further embodiment, an upper spray arm assembly (not shown) is located above upper rack **130** at a sufficient height to accommodate a tallest item expected to be placed in upper rack **130**, such as a glass (not shown) of a selected height.

[0020] Lower and mid-level spray-arm assemblies **144**, **148** and the upper spray arm assembly are fed by the fluid circulation assembly, and each spray-arm assembly includes an arrangement of discharge ports or orifices for directing washing liquid onto dishes located in upper and lower racks **130**, **132**, respectively. The arrangement of the discharge ports in at least lower spray-arm assembly **144** provides a rotational force by virtue of washing fluid flowing through the discharge ports. The resultant rotation of lower spray-arm assembly **144** provides coverage of dishes and other dishwasher contents with a washing spray. In various alternative embodiments, mid-level spray arm **148** and/or the upper spray arm are also rotatably mounted and configured to generate a swirling spray pattern above and below upper rack **130** when the fluid circulation assembly is activated and door assembly **120** is properly closed to seal wash chamber **106** for operation.

[0021] **FIG. 2** is an exploded perspective view of an exemplary dishwasher door assembly **120** that may be used, for example, with dishwasher **100** (shown in **FIG. 1**). Door assembly **120** includes an outer door panel **160** and an inner door panel **162**.

[0022] Inner door panel **162**, in an exemplary embodiment, includes an opening **164** therethrough for a vent assembly (not shown) and an opening **166** therethrough for receiving a detergent dispenser (not shown). Inner door panel **162** is further contoured in a bottom region **168** for

accommodating lower rack **132** (shown in **FIG. 1**) of dishwasher **100** (shown in **FIG. 1**). It is noted that exemplary inner door panel **162** and outer door panel **160** are intended for illustrative purposes only, and that the present invention may be used with differently configured inner and/or outer door panels within the scope of the present invention.

[0023] In an illustrative embodiment, Inner door panel **162** is attached to outer door panel **160** via attachment flanges **170** on an outer perimeter of inner door panel **162** that are fastened to attachment flanges **172** in outer door panel **160**. In one embodiment, an appliance control module (not shown) and a latch assembly (not shown) are further accommodated into door assembly **120** as those in the art will appreciate.

[0024] **FIG. 3** is a rear plan view of an inner door panel assembly **190** (the inverse of inner door panel **162** as illustrated in **FIG. 2**). Inner door panel assembly **190** includes inner door panel **162** and a seal member **192** attached thereto at a bottom end **194** thereof. In an exemplary embodiment, seal member **192** includes an elongated head portion **196** attached to inner door **162** as explained further below, and a flap portion **198** depending from head portion **196** to prevent splash out of washing fluid at a bottom of door assembly **120**. Flap portion **198** extends substantially an entire width of inner door panel **162** between inner door panel lateral sides **200**, **202**, and includes tapers **204** at each lateral end to facilitate pivoting of door assembly **190** about its lower end when door assembly **190** is attached to a dishwasher, such as dishwasher **100** (shown in **FIG. 1**).

[0025] Seal member **192** is integrally formed in one embodiment and fabricated from known materials, such as for, example, double durometer rubber, according to methods and techniques familiar to those in the art to form a durable seal for a bottom of inner door panel **162**. In alternative embodiments, seal member **192** is fabricated from other suitable materials capable of withstanding a dishwasher environment and being sufficiently rigid for handling to ease installation of sealing member to inner door bottom **168**.

[0026] **FIG. 4** is a cross sectional view of a portion of inner door panel **162** along line A-A of **FIG. 3** with seal member **192** (shown in **FIG. 3**) removed. Specifically, a bottom portion **220** of inner door panel **162** is illustrated, and bottom portion **220** includes a formation **222** shaped to firmly maintain seal member **192** (shown in **FIG. 3**) in place despite opening and closing of door assembly **190**, and also while simplifying installation of sealing member **192** (shown in **FIG. 3**) to inner door panel **162**.

[0027] In an illustrative embodiment, formation **222** includes a boot-shaped portion **224** depending from inner door panel **162** and extending downwardly therefrom. Boot portion **224** includes a neck **226**, a substantially flat rear edge **228** partially defined by neck **226**, an extended heel portion **230** depending downwardly from flat rear edge **228**, and a curved arch portion **232** extending to a toe portion **234**. Boot portion **224**, as will be seen below, is shaped to engage and retain sealing member **192** while avoiding manufacturing and assembly difficulties of known door assemblies. A barrier portion **236** also extends downwardly from inner door panel **162** in a substantially parallel alignment with a

rear edge 228 of boot portion 224. Barrier portion 236 extends for a greater length than boot portion 224 and is in a spaced relationship with boot portion 224. In one embodiment, inner door panel 162 is integrally formed, including boot portion 224, from known materials, such as an injection molded plastic, although in alternative embodiments it is contemplated that other materials may likewise be utilized according to known methods and techniques to fabricate inner door panel 162.

[0028] FIG. 5 is a cross sectional view of a portion of seal member 192 taken along line A-A of FIG. 3 and removed from bottom portion 220 (shown in FIG. 4) of inner door panel 162 (shown in FIGS. 2-4).

[0029] Seal member head portion 196 includes an opening 250 generally complementary in shape to boot portion 224 (shown in FIG. 4) of inner door panel bottom portion 220. As such, seal member head opening 250 includes a heel portion 252, an arch portion 254, a toe portion 256, and a neck portion 258 for receiving respective portions of inner door panel boot portion 224 (shown in FIG. 4). Seal member flap portion 198 extends from head portion 230 to a curl 260 at a distal end thereof.

[0030] FIG. 6 is a cross sectional view of door assembly 190 (shown in FIG. 3) along line A-A and illustrating inner door panel boot portion 224 received in seal member head opening 250. As such, seal member 192 is securely fastened to inner door panel, and unintentional separation of seal member 192 from panel boot portion 224 is substantially eliminated by boot heel portion 230 and boot toe portion 234 that resist positive and negative forces (i.e., forces to the right and to the left in FIG. 6) generated in flap portion 198 as dishwasher door assembly 190 is opened and closed as dishwasher 100 (shown in FIG. 1) is used.

[0031] Further, and unlike known bottom door seals, seal member 192 is relatively easy to install with slide on action. Seal member head portion 196 is inserted over inner door panel boot portion 224, and seal member 192 may be slid across a length of boot heel portion 224 until seal member 192 is completely attached to inner door panel 162 (as shown in FIG. 3). Thus, depending upon installation preference and orientation of inner door panel 162, seal member 192 may be securely attached to inner door panel 162 with a left to right motion, a right to left motion, a bottom to top motion, a top to bottom motion, or other motion to slidably attach seal member 192 to inner door panel 162. Sliding attachment allows quick installation with reduced effort relative to conventional press fit bottom seals, thereby saving assembly time and associated assembly costs.

[0032] FIG. 7 is a cross sectional schematic view of a portion of dishwasher 100 (shown in FIG. 1) with inner door panel assembly 190 attached thereto. Seal member 192 is attached to inner door panel bottom portion 220 via boot portion 224 and seal member head portion 196. Flap portion 198 extends beneath door panel barrier portion 236 and contacts an interior surface of dishwasher 100, such as sump portion 142 in an exemplary embodiment. Flap member curl 260 seats on dishwasher interior surface 142, preventing water seepage under flap portion 198 to an exterior of dishwasher 100. Flap member 198 further forms a seal in conjunction with door panel barrier portion 236, thereby sealing dishwashing fluid splashed on a top surface 262 of seal member flap portion 198 from seeping to an exterior portion of dishwasher 100.

[0033] An effective bottom door seal 192 for a dishwasher, such as dishwasher 100, is therefore provided with simplified installation and reduced assembly costs.

[0034] While the invention has been described in terms of various specific embodiments, those skilled in the art will recognize that the invention can be practiced with modification within the spirit and scope of the claims.

1. a door panel assembly for a dishwasher, said door assembly comprising:

a panel comprising a formation depending therefrom; and

a seal member comprising a head portion and an opening therein complementary in shape to said formation, said formation received in said opening.

2. A door panel assembly in accordance with claim 1 wherein said formation comprises a boot portion.

3. A door panel assembly in accordance with claim 1, said seal member further comprising a flap portion extending from said head portion.

4. A door panel assembly in accordance with claim 1, said formation and said seal member adapted for slide on installation of said seal member to said door.

5. A door panel assembly in accordance with claim 4, said panel further comprising a barrier portion extending from said panel in a spaced apart relationship to said formation.

6. A door panel assembly in accordance with claim 1 wherein said door panel comprises an inner door panel.

7. A door panel assembly in accordance with claim 6 wherein said formation depends from a bottom portion of said door panel.

8. A door panel assembly for a dishwasher, said door panel assembly comprising:

an inner door panel comprising a formation extending therefrom; and

a seal member comprising a head portion and an opening therethrough, said opening receiving said formation and attaching said seal member to said formation.

9. A door panel assembly in accordance with claim 8 wherein said formation comprises a boot portion, said boot portion comprising a flat rear edge.

10. A door panel assembly in accordance with claim 9, said boot portion further comprising a heel portion extending from said rear edge.

11. A door panel assembly in accordance with claim 10, said boot portion comprising a curved arch portion extending from said heel.

12. A door panel assembly in accordance with claim 8, said inner door panel further comprising a barrier portion extending therefrom in a spaced apart relationship to said formation.

13. A door panel assembly in accordance with claim 8 wherein said formation extends from a bottom portion of said inner panel.

14. A door panel assembly comprising:

a panel comprising a bottom portion, a formation extending therefrom, and a barrier portion extending therefrom in a spaced apart relationship to said formation; and

a seal member comprising a head portion and a flap portion extending from said head portion, said head portion comprising an opening therethrough for receiving said formation, said head portion engaged to said formation.

15. A door panel assembly in accordance with claim 14 wherein said seal member is adapted for slide on engagement with said formation.

16. A door panel assembly in accordance with claim 15 wherein said formation comprises a boot portion.

17. A door panel assembly in accordance with claim 16 wherein said boot comprises a flat edge extending substantially parallel to said barrier portion.

18. A door panel assembly comprising:

a door panel comprising a boot-shaped formation depending therefrom; and

a seal member comprising a head portion comprising a boot-shaped opening therethrough, said boot-shaped opening fitted to said boot-shaped formation.

19. A door panel assembly in accordance with claim 18 wherein said boot-shaped formation depends from a bottom portion of said panel.

20. A door panel assembly in accordance with claim 18 wherein said seal member further comprises a flap portion extending from said head portion.

* * * * *