



HU000030995T2

(19) **HU**(11) Lajstromszám: **E 030 995**(13) **T2****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala**EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 09 706488**

(22) A bejelentés napja: **2009. 02. 02.**

(96) Az európai bejelentés bejelentési száma:
EP 20090706488

(97) Az európai bejelentés közzétételi adatai:
EP 2238081 A1 **2009. 08. 06.**

(97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2238081 B1 **2016. 08. 31.**

(51) Int. Cl.: **C02F 3/00** (2006.01)
C02F 1/12 (2006.01)
C02F 1/52 (2006.01)
C02F 9/00 (2006.01)
C02F 11/12 (2006.01)
C02F 101/32 (2006.01)
C05B 7/00 (2006.01)
C05F 17/02 (2006.01)
C05F 17/00 (2006.01)
C02F 101/34 (2006.01)
C02F 101/10 (2006.01)
C02F 11/04 (2006.01)
C02F 3/30 (2006.01)
C02F 1/66 (2006.01)

(86) A nemzetközi (PCT) bejelentési szám:
PCT/US 09/000689

(87) A nemzetközi közzétételi szám:
WO 09097160

(30) Elsőbbségi adatok: 12362 2008. 02. 01. US	(73) Jogosult(ak): Clean Water Services, Hillsboro, OR 97123 (US)
(72) Feltaláló(k): BAUR, Robert, Hillsboro, OR 97123 (US)	(74) Képviselő: SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54) **Hulladék-aktivált eljárás foszforak és magnéziumnak iszapból való sztrippelésére, valamint sztruvit-előállítási rendszer**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 2 238 081 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

31.08.2016 Bulletin 2016/35

(21) Application number: **09706488.5**

(22) Date of filing: **02.02.2009**

(51) Int Cl.:

C02F 3/00 (2006.01)	C02F 3/30 (2006.01)
C02F 1/52 (2006.01)	C05F 17/00 (2006.01)
C05B 7/00 (2006.01)	C05F 17/02 (2006.01)
C02F 1/66 (2006.01)	C02F 1/12 (2006.01)
C02F 11/04 (2006.01)	C02F 9/00 (2006.01)
C02F 11/12 (2006.01)	C02F 101/10 (2006.01)
C02F 101/32 (2006.01)	C02F 101/34 (2006.01)

(86) International application number:

PCT/US2009/000689

(87) International publication number:

WO 2009/097160 (06.08.2009 Gazette 2009/32)

(54) **Waste activated sludge phosphorus and magnesium stripping process and struvite production system**

Abfallaktiviertes Verfahren zum Austrieb von Phosphor und Magnesium aus Schlamm und Struvit-Produktionssystem

Procédé de retrait du phosphore et du magnésium des boues résiduelles activées et système de production de struvite

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR

(30) Priority: **01.02.2008 US 12362**

(43) Date of publication of application: **13.10.2010 Bulletin 2010/41**

(73) Proprietor: **Clean Water Services Hillsboro, OR 97123 (US)**

(72) Inventor: **BAUR, Robert Hillsboro, OR 97123 (US)**

(74) Representative: **Walker, Ross Thomson et al Forrester Skygarden Erika-Mann-Strasse 11 80636 München (DE)**

(56) References cited:

WO-A2-2007/089481 DE-A1- 3 833 039

US-A1- 2001 045 390	US-A1- 2003 172 697
US-A1- 2007 000 836	US-A1- 2007 209 998
US-B2- 6 706 185	

- **M. R. GATERELL ET AL: "An economic and environmental evaluation of the opportunities for substituting phosphorus recovered from wastewater treatment works in existing UK fertiliser markets", ENVIRONMENTAL TECHNOLOGY, vol. 21, no. 9, 1 January 2000 (2000-01-01), pages 1067-1084, XP055156938,**
- **S. WILLIAMS: "Struvite Precipitation in the Sludge Stream at Slough Wastewater Treatment Plant and Opportunities for Phosphorus Recovery", ENVIRONMENTAL TECHNOLOGY, vol. 20, no. 7, 1 January 1999 (1999-01-01), pages 743-747, XP055156935,**
- **M. R. Gaterell ET AL: "An Economic and Environmental Evaluation of the Opportunities for Substituting Phosphorus Recovered from Wastewater Treatment Works in Existing UK Fertiliser Markets", Environmental Technology, vol. 21, no. 9, 1 September 2000 (2000-09-01), pages 1067-1084, XP055195228, ISSN: 0959-3330, DOI: 10.1080/09593332108618050**

EP 2 238 081 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

RELATED APPLICATIONS

FIELD OF THE INVENTION

[0001] The invention relates generally to the field of "waste-activated sludge" (WAS) stripping. More particularly, the invention relates to adding readily biodegradable carbon compounds (RBCs) to biological sludge to reduce downstream struvite build-up in a digester and to produce a usable struvite product therefrom.

BACKGROUND OF THE INVENTION

[0002] As part of secondary sewage treatment, primary treated sewage is treated with air or pure oxygen. In what is termed the "activated sludge" process, microorganisms utilize the oxygen to metabolize the incoming waste sewage, forming a mixture of microorganisms and sewage known as "mixed liquor." This mixture is moved to settling tanks for concentration, thereby forming concentrated activated sludge. A majority of this sludge is returned to the activated sludge process tankage. A separate portion of this sludge, termed waste-activated sludge (WAS), is removed from the activated sludge process and sent to a sludge handling system for further treatment and disposal. In a stable system, the daily WAS is equal to the daily conversion of sewage into microorganisms so no net increase in mixed liquor biomass occurs. By manipulating the activated sludge process, phosphorus and magnesium are removed from the liquid stream and concentrated in the mixed liquor. The process is known as Enhanced Biological Phosphorus Removal (EBPR).

[0003] Referring to Figure 1, in one typical scheme 10, the WAS is sent to a centrifuge (or other thickening apparatus) 14 for thickening, the liquids are tapped off and returned to the wastewater plant for treatment, whereas the resultant thickened sludge is sent to an anaerobic digester 16 with other sludges, where it remains for 15 days or more before being sent to a second centrifuge (or other dewatering apparatus) 18 for dewatering.

[0004] Unfortunately, struvite tends to form in digester 16, and other equipment downstream because of the ammonia, magnesium and phosphorus that are present can precipitate as struvite. This struvite is impractical to harvest and also has the deleterious effect of being deposited on surfaces in the reactor 16 and plugging pipes and equipment leading from the reactor.

[0005] A further centrifuge (or other dewatering apparatus) 18 produces further dewatered sludge 20, which is either beneficially reused or disposed of, and liquids 22, which are rich in ammonia and phosphorus. It has been learned that prilled struvite can be harvested from liquids 22, by a struvite reactor 24. This prilled struvite is a marketable product that can be used as a timed release fertilizer, thereby defraying some of the costs of sewage

treatment. Unfortunately, the struvite harvest requires the addition of magnesium into the process, which forms a large part of the costs of the process and reduces the profitability.

5 **[0006]** In A Feasible Approach of Integrating Phosphate Recovery as Struvite at Waste Water Treatment Plants, Proceedings, Institute Of Environmental Engineering, pp. 551-558 (2007), D. Montag, et al. describe a phosphate recovery system that effectively teaches away from the addition of one or more volatile fatty acids (VFAs) for phosphorous removal. They do so by teaching long retention times instead of the addition of external organic or inorganic acids. In The Modified Renphosystem: A High Biological Nutrient Removal System, Wat. Sci. Tech., Vol. 35, No. 10, pp. 137-146 (1997), J. H. Rensink, et al. describe a so-called modified Renpho system. They fail to teach the addition of VFAs as dosing agents to WAS, fail to teach magnesium as well as phosphate release/removal, fail to teach fermentation, fail to teach pH adjustment prior to mixing w/centrate, and fail to teach the use of a dewaterer in connection with a digester.

20 **[0007]** In Wastewater Treatment Plant and Opportunities for Phosphorus Recovery, Environ. Techn., 1999, Vol. 20, No. 7, pp 743-747, S. Williams, et al. analyse the composition of a number of process streams for potential P recovery at a UK WWTW employing EBPR and suggest to combine the centrate (which is high in ammonia) and the waste activated sludge liquor (which releases phosphorus on storage). In An economic and environmental evaluation of the opportunities for substituting phosphorus recovered from wastewater treatment works in existing UK fertiliser markets, Environ. Techn., Vol. 21, No. 9, pp 1067-1084 (2000), M. R. Gaterell, et al. describe a simplified potential process for maximising struvite precipitation (adapted from Williams et al. cited above).

30 **[0008]** Neither of these articles nor any other known prior art publication teaches separation of a VFA-enabled reagent into a phosphorus-rich and magnesium-rich liquid stream to a struvite reactor for pelletized struvite production nor into a phosphorus-poor and magnesium-poor sludge stream to a digester to reduce nuisance struvite build-up therein.

45 SUMMARY

[0009] The present invention may take the form of a method of treating a first mixture of waste solids and microorganisms containing phosphorus and magnesium, by first inducing the mixture microorganisms to release phosphorus and magnesium which is then tapped off as the mixture is thickened, to produce phosphorus and magnesium-rich liquid and phosphorus and magnesium-reduced treated mixture. This treated mixture is placed in an anaerobic digester where ammonia is formed but combines very little with phosphorus or magnesium as these elements have been greatly reduced in concentration. Next the high-ammonia mixture is dewatered, to pro-

duce an ammonia-rich liquid, which is combined with the phosphorus and magnesium-rich liquid. In one preferred embodiment a useable struvite product is harvested from this combination.

[0010] Additionally, the production of nuisance struvite in the anaerobic digester is greatly reduced, in comparison with prior art waste treatment methods.

[0011] Systems and methods of practicing the present invention are shown in Figures 2, 3, and 2A and are described in the accompanying text, which should help to clarify the invention in its various embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Figure 1 is a block diagram of a prior art waste treatment system.

Figure 2 is a block diagram of a waste treatment system according to the present invention.

Figure 3 is a block diagram of an alternative embodiment of a waste treatment system according to the present invention.

Figure 2A is a block diagram of yet another embodiment of a waste treatment system according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] Referring to Figure 2, in a preferred embodiment of a waste activated sludge (WAS) treatment method 110, phosphorus and magnesium are released by microorganism action in an anaerobic reactor 112, where the WAS is held, for a minimum time of 0.5 hours. One method for effecting this release is by adding one or more readily biodegradable carbon compounds (RBCs), such as one or more volatile fatty acids (VFAs) to the sludge in the anaerobic reactor, with 3 to 8 grams (and preferably 4-6 grams) of the one or more VFAs added per gram of planned phosphorus release. In another technique, the activated sludge is held for 36 to 96 hours, without the addition of VFAs, for endogenous respiration and fermentation to release phosphorus and magnesium.

[0014] The resultant WAS is sent to a thickening device 114, such as a centrifuge, thickening belt or rotating screens and the resultant liquids 115, having enhanced phosphorus and magnesium levels, are sent to a struvite reactor 124, which will be discussed further below. There is only very minimal struvite production in the liquids 115, because they have a very low ammonia level. VFAs or other forms of RBCs can be generated by fermentation as in the unified fermentation and thickening (UFAT) process disclosed in U.S. Patent # 6,387,264 B1. Other methods of obtaining VFAs, include various fermentation methods, harvesting from various waste products and purchase as industrial chemicals, such as acetic acid.

[0015] The thickened WAS with reduced phosphorus

and magnesium levels is sent to an anaerobic digester 116 with other sludges and is typically held there for a minimum of fifteen days, where it further treated by anaerobic bacteria which generate high concentrations of ammonia. The production of struvite in digester 116, is however, greatly reduced in comparison with the amount of struvite produced in digester 16 of the prior art system (which could be identical to digester 116) because of the reduction in phosphorus and magnesium in the thickened WAS, both of which are necessary for the formation of struvite. This reduction in struvite formation greatly reduces the formation of struvite deposits in the digester and pipes and equipment downstream from anaerobic digester 116.

[0016] The treated sludge from digester 116 is dewatered 118, by use of a centrifuge, dewatering belt, screen, plate and frame presses, etc. with the resultant dewatered solids being beneficially reused or disposed. The ammonia-rich liquids 122, which are less able to make struvite in the associated pipes and equipment because of the reduced phosphorus and magnesium, are sent to struvite reactor 124, where the abundant ammonia combines with the phosphorus and magnesium of the liquids 115 to form struvite.

[0017] Referring to Figure 3, in a second preferred embodiment, input to the system 210 is in the form of mixed liquor suspended solids (MLSS) 214 taken from the anaerobic zone 212 of the aeration basin, in an enhanced biological phosphorus removal (EBPR) system. The majority of the MLSS progresses to a further portion of the aeration basin 218. RBCs are added to the added to the MLSS in a standard EBPR system, thereby causing phosphorus and magnesium to be released from the microorganisms. Other than this difference the processing is largely the same, although some variation is necessary to accommodate the larger flow 214 into the thickener 216, as MLSS is typically three times as dilute as WAS. To handle the dilute flow, thickener 216 may utilize gravity thickening that is optionally followed by a belt or centrifuge or other thickening device. The anaerobic reactor 112 and supplemental addition of RBCs, shown in Figure 2, can be eliminated.

[0018] Figure 2A shows yet another embodiment of the invented system similar to that of Figure 2 (and having identical reference designators for identical elements). System 220 may be seen to include a mainstream flow 220a and a sidestream flow 220b, as illustrated, respectively above and below the dashed horizontal line. System 220 is referred to herein as providing for the *in situ*, i.e. closed or contained, production of usable struvite by-product (e.g. marketable products such as regularly or irregularly shaped and sized pellets or particles, non-marketable products such as struvite sludge, etc.) from WAS, without external inputs being required to realize the production process.

[0019] As will be understood, primary sludge contained in a primary clarifier 222 is processed through an UFAT 224 in accordance with US Patent No. 6,387,264 or an

equivalent process that includes a fermenter 226 and a thickener 228 or combined fermenter/thickener that collectively process primary sludge into VFAs and a thickened sludge. The VFAs from UFAT 224 are inputted to an EBPR aeration basin 112a and to a separator/thickener 114 including, for example, an anaerobic release tank 114a and a second thickener such as a thickening centrifuge 114b. (Anaerobic reactor 112 of Figure 2 in this alternative embodiment of the invention thus takes the form of an EBPR aeration basin 112a and a secondary clarifier 112b, as illustrated in Figure 2A.)

[0020] The thickened sludge is fed to a digester 116, as shown in Figure 2A. Either downstream from digester 116 at the struvite reactor (as described above by reference to Fig. 2) or upstream from digester 116, the pH of the P-rich and Mg-rich liquids is adjusted by a pH adjuster 117 (shown in dashed outline since it is optionally located in this upstream location instead of in struvite reactor 124). Those of skill in the art will appreciate that, despite adjusting the pH of the P-rich and Mg-rich liquids before they reach the struvite reactor nevertheless struvite does not form in the upstream pipe because no ammonia is present). Moreover, peak concentrations of the fluids in the downstream struvite reactor are reduced. In this way, optionally upstream-located pH adjuster 117 produces a pH-adjusted phosphorus-rich and magnesium-rich liquids stream 115' as an input to struvite reactor 124. (Thus, upstream pH adjuster 117 provides a system 220 topology that is more cost-effective and straightforward than the system 110 topology described above by reference to Figure 2 wherein pH adjustment is performed in the struvite reactor.)

[0021] A separator/thickener 114 acts to separate the WAS input from a secondary clarifier 112b downstream from EBPR aeration basin 112a and the VFA input from UFAT 224 into two distinct output streams. A first relatively phosphorus-rich and magnesium-rich (P- & Mg-Rich) liquids stream 115 (or, preferably, pH-adjusted liquids stream 115') is fed into struvite reactor 124, as described above. A second relatively phosphorus-reduced and magnesium-reduced (P- & Mg-Poor) mixture 230 is fed into a digester 116 followed by a dewaterer or dewatering centrifuge 118 to produce an ammonia-rich liquids stream 122 that is also fed to struvite reactor 124. Phosphorus-reduced (P-reduced) biosolids are produced as another byproduct of the dewatering step. By separating the WAS into two separate, differentially concentrated streams containing phosphorus and magnesium, downstream so-called nuisance struvite production within digester 116 is minimized while concurrent struvite production within struvite reactor 124 is maximized.

[0022] Those of skill in the art will appreciate that further downstream treatment 232 within mainstream process 220a can be accomplished via precipitation, filtration, and disinfection (e.g. chlorination followed by de-chlorination) of the output of secondary clarifier 112b (some of which is returned to the input of EBPR aeration basin 112a, and some of which is detoured to the sidestream

process 220b, as illustrated). Thus, the output of downstream treatment 232 is suitable for return to a river or other body of water is the mainstream output of the invented process and system while usable and potentially sellable struvite product, e.g. pelletized fertilizer, is the sidestream output of the invented process and system. Those of skill also will appreciate that other output of struvite reactor 124 can be recycled as shown to the plant influent stream in what may be thought of as a substantially "closed-loop" system 220.

[0023] For the embodiments, the struvite reactor can take any form that permits the combination of the phosphorus and magnesium with the ammonium, to form struvite, including a simple settling tank, where spontaneously precipitated struvite would form and settle for reuse as a raw material, a usable product such as fertilizer, or a waste product. In one preferred embodiment prilled struvite is formed by a method disclosed in International Publication Number WO 2005/077834 A1.

[0024] In a first preferred variant of either the MLSS or the WAS embodiment the diversion of magnesium from the anaerobic digester and the resulting reduced nuisance struvite formation protects process equipment and reduces operational costs. In a second preferred variant, magnesium is added to capture additional phosphorus, thereby causing the system to produce additional struvite and a waste stream with less phosphorus and ammonia to be recycled back to the wastewater plant for re-treatment. In addition, phosphorus and magnesium can be added to increase struvite production and reduce the amount of ammonia sent back for re-treatment.

[0025] The above description is intended to provide an example of one method and system that falls within the scope of the invention. Skilled persons will recognize that other methods and systems will also fall within the scope of the invention.

[0026] It will be understood that the present invention is not limited to the method or detail of construction, fabrication, material, application or use described and illustrated herein. Indeed, any suitable variation of fabrication, use, or application is contemplated as an alternative embodiment, and thus is within the spirit and scope of the invention.

[0027] It is further intended that any other embodiments of the present invention that result from any changes in application or method of use or operation, configuration, method of manufacture, shape, size, or material, which are not specified within the detailed written description or illustrations contained herein yet would be understood by one skilled in the art, are within the scope of the present invention.

[0028] Accordingly, while the present invention has been shown and described with reference to the foregoing embodiments of the invented process and system, it will be apparent to those skilled in the art that other changes in form and detail may be made therein without departing from the scope of the invention as defined in the appended claims.

Claims**1.** A waste treatment process, comprising:

(a) producing a first mixture of solids, microorganisms and liquid from waste water, and wherein said microorganisms contain phosphorus and magnesium;

(b) removing phosphorus and magnesium from the microorganisms and permitting said removed phosphorus and magnesium to dissolve in a liquid portion of said first mixture, wherein said removing step includes adding readily biodegradable carbon compounds (RBCs) to said first mixture, thereby to produce a treated mixture that includes dissolved magnesium and phosphorus;

(c) fermenting and thickening said treated mixture to produce a phosphorus-rich and magnesium-rich liquid that is separated from a remaining phosphorus-reduced and magnesium-reduced mixture;

(d) further anaerobic treating said phosphorus-reduced and magnesium-reduced mixture, thereby creating an ammonia-rich, phosphorus-reduced and magnesium-reduced mixture;

(e) dewatering said ammonia-rich mixture to produce ammonia-rich liquid; and

(f) mixing said ammonia-rich liquid with said phosphorus-rich and magnesium-rich liquid, to produce struvite.

2. The process of claim 1, wherein step (b) is performed by holding said treated mixture in an anaerobic reactor for at least 0.5 hours.

3. The process of claim 1, wherein the RBCs include volatile fatty acids (VFAs).

4. The process of claim 1, wherein the RBCs include compounds that are converted into volatile fatty acids (VFAs) by said microorganisms.

5. The process of claim 1, wherein said first mixture is waste activated sludge.

6. The process of claim 1, wherein said first mixture is mixed liquor suspended solids.

7. The process of claim 1, wherein step (b) is performed by passing said first mixture through an anaerobic zone, wherein volatile fatty acids are present which cause phosphorus and magnesium to be expelled from the microorganisms.

8. The process of claim 1, wherein step (b) is performed by retaining said first mixture in an anaerobic reactor for more than 36 hours.

9. The process of claim 1, wherein said step of mixing said magnesium and phosphorus-rich liquid with said ammonia-rich liquid is performed in a struvite reactor and wherein magnesium is added to said struvite reactor or any input thereto, thereby to increase production of struvite.

10. The process of claim 1, wherein said ammonia-rich liquid is mixed with said phosphorus-rich and magnesium-rich liquid in a manner that produces a usable struvite product.

11. The process of claim 1, wherein said phosphorus-reduced and magnesium-reduced mixture produced in step (c) is in the form of a sludge, and wherein step (d) is performed with said sludge produced in step (c) mixed with at least one other sludge from said waste treatment process.

12. The process of claim 1, wherein said steps (a), (b), (c), (d), (e), and (f) are performed *in situ*.

Patentansprüche**1.** Abfallbehandlungsverfahren, umfassend:

(a) Herstellen eines ersten Gemischs von Feststoffen, Mikroorganismen und Flüssigkeit aus Abwasser, und worin besagte Mikroorganismen Phosphor und Magnesium enthalten;

(b) Entziehen von Phosphor und Magnesium aus den Mikroorganismen und Zulassen dessen, dass sich besagter entzogener Phosphor und besagtes entzogenes Magnesium in einem Flüssigkeitsanteil von besagtem erstem Gemisch auflösen, worin besagter Entzugsschritt das Zugeben von leicht biologisch abbaubaren Kohlenstoffverbindungen (RBCs) zu besagtem erstem Gemisch beinhaltet, um dadurch ein behandeltes Gemisch herzustellen, das aufgelöstes Magnesium und aufgelösten Phosphor beinhaltet;

(c) Fermentieren und Verdicken von besagtem behandeltem Gemisch, um eine phosphorreiche und magnesiumreiche Flüssigkeit herzustellen, die von einem verbleibenden phosphor-reduzierten und magnesiumreduzierten Gemisch getrennt wird;

(d) weitere anaerobe Behandlung von besagtem phosphorreduziertem und magnesiumreduziertem Gemisch, wodurch ein ammoniakreiches, phosphorreduziertes und magnesiumreduziertes Gemisch erzeugt wird;

(e) Entwässern von besagtem ammoniakreichem Gemisch, um ammoniakreiche Flüssigkeit herzustellen; und

(f) Mischen von besagter ammoniakreicher

- Flüssigkeit mit besagter phosphorreicher und magnesiumreicher Flüssigkeit, um Struvit herzustellen.
2. Verfahren nach Anspruch 1, worin Schritt (b) durchgeführt wird, indem besagtes behandeltes Gemisch mindestens 0,5 Stunden lang in einem anaeroben Reaktor gehalten wird. 5
 3. Verfahren nach Anspruch 1, worin die RBCs flüchtige Fettsäuren (VFAs) beinhalten. 10
 4. Verfahren nach Anspruch 1, worin die RBCs Verbindungen beinhalten, die von besagten Mikroorganismen in flüchtige Fettsäuren (VFAs) umgewandelt werden. 15
 5. Verfahren nach Anspruch 1, worin besagtes erstes Gemisch abfallaktivierter Schlamm ist. 20
 6. Verfahren nach Anspruch 1, worin es sich bei besagtem erstem Gemisch um gemischte in Lauge suspendierte Feststoffe handelt. 25
 7. Verfahren Anspruch 1, worin Schritt (b) durchgeführt wird, indem besagtes erstes Gemisch durch eine anaerobe Zone geleitet wird, worin flüchtige Fettsäuren zugegen sind, die bewirken, dass Phosphor und Magnesium aus den Mikroorganismen ausgetrieben werden. 30
 8. Verfahren nach Anspruch 1, worin Schritt (b) durchgeführt wird, indem besagtes erstes Gemisch mehr als 36 Stunden lang in einem anaeroben Reaktor zurückgehalten wird. 35
 9. Verfahren nach Anspruch 1, worin besagter Schritt des Mischens von besagter magnesium- und phosphorreicher Flüssigkeit mit besagter ammoniakreicher Flüssigkeit in einem Struvit-Reaktor durchgeführt wird und worin Magnesium zu besagtem Struvit-Reaktor oder jeglichem dafür bestimmtem Eintrag zugegeben wird, um dadurch die Produktion von Struvit zu steigern. 40
 10. Verfahren nach Anspruch 1, worin besagte ammoniakreiche Flüssigkeit mit besagter phosphorreicher und magnesiumreicher Flüssigkeit auf eine Weise gemischt wird, die ein nutzbares Struvit-Produkt herstellt. 45
 11. Verfahren nach Anspruch 1, worin besagtes phosphorreduziertes und magnesiumreduziertes, in Schritt (c) hergestelltes Gemisch in Form eines Schlammes vorliegt und worin Schritt (d) mit besagtem in Schritt (c) hergestelltem, mit mindestens einem anderen Schlamm aus besagtem Abfallbehandlungsverfahren gemischtem Schlamm durch-

geführt wird.

12. Verfahren nach Anspruch 1, worin besagte Schritte (a), (b), (c), (d), (e), und (f) *in situ* durchgeführt werden. 5

Revendications

1. Procédé de traitement de déchets, consistant à :
 - a) produire un premier mélange de matières solides, de micro-organismes et de liquide à partir d'eau usée, lesdits micro-organismes contenant du phosphore et du magnésium ;
 - b) éliminer le phosphore et le magnésium des micro-organismes et permettre audit phosphore et audit magnésium éliminés de se dissoudre dans une partie liquide dudit premier mélange, ladite étape d'élimination consistant à ajouter des composés de carbone facilement biodégradable (RBC) audit premier mélange, de manière à produire un mélange traité comprenant du magnésium et du phosphore dissous ;
 - c) faire fermenter et épaissir ledit mélange traité afin de produire un liquide riche en phosphore et riche en magnésium séparé d'un mélange restant réduit en phosphore et réduit en magnésium ;
 - d) traiter anaérobie ledit mélange réduit en phosphore et réduit en magnésium, de manière à créer un mélange riche en ammoniacque, réduit en phosphore et réduite en magnésium ;
 - e) déshydrater ledit mélange riche en ammoniacque afin de produire un liquide riche en ammoniacque ; et
 - f) mélanger ledit liquide riche en ammoniacque avec ledit liquide riche en phosphore et riche en magnésium afin de produire de la struvite. 20
2. Procédé selon la revendication 1, dans lequel l'étape (b) est réalisée en maintenant ledit mélange traité dans un réacteur anaérobie pendant au moins 0,5 heure. 25
3. Procédé selon la revendication 1, dans lequel les composés RBC comprennent des acides gras volatils (VFA). 30
4. Procédé selon la revendication 1, dans lequel les composés RBC comprennent des composés convertis en acides gras volatils (VFA) par lesdits micro-organismes. 35
5. Procédé selon la revendication 1, dans lequel ledit premier mélange est une boue activée excédentaire. 40
6. Procédé selon la revendication 1, dans lequel ledit

premier mélange est des matières solides en suspension dans la liqueur mixte.

7. Procédé selon la revendication 1, dans lequel l'étape (b) est réalisée en faisant passer ledit premier mélange dans une zone anaérobie, les acides gras volatils présents provoquant l'expulsion du phosphore et du magnésium des micro-organismes. 5
8. Procédé selon la revendication 1, dans lequel l'étape (b) est réalisée en maintenant ledit premier mélange dans un réacteur anaérobie pendant plus de 36 heures. 10
9. Procédé selon la revendication 1, dans lequel ladite étape de mélange dudit liquide riche en magnésium et riche en phosphore avec ledit liquide riche en ammoniac est réalisée dans un réacteur de struvite, et dans lequel du magnésium est ajouté audit réacteur de struvite ou à toute entrée correspondante, de manière à augmenter la production de struvite. 15
20
10. Procédé selon la revendication 1, dans lequel ledit liquide riche en ammoniac est mélangé avec ledit liquide riche en phosphore et riche en magnésium de manière à produire un produit de struvite utilisable. 25
11. Procédé selon la revendication 1, dans lequel ledit mélange réduit en phosphore et réduit en magnésium produit à l'étape (c) se présente sous la forme d'une boue, et dans lequel l'étape (d) est réalisée avec ladite boue produite à l'étape (c) mélangée avec au moins une autre boue provenant dudit procédé de traitement de déchets. 30
35
12. Procédé selon la revendication 1, dans lequel lesdites étapes (a), (b), (c), (d), (e) et (f) sont réalisées *in situ*. 40

40

45

50

55

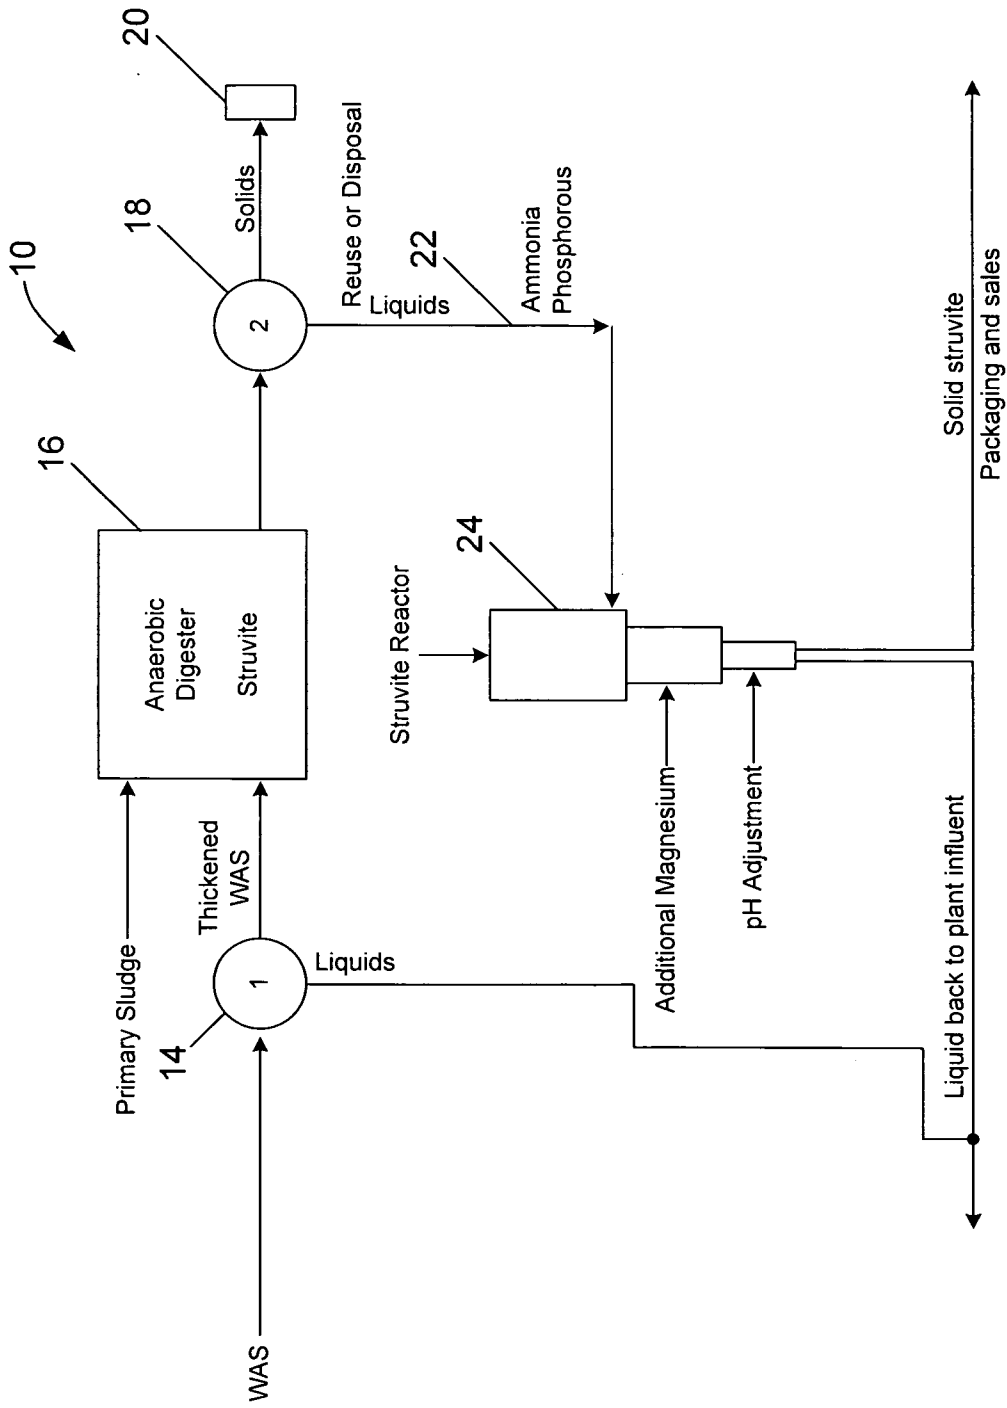


Figure 1 (Prior Art)

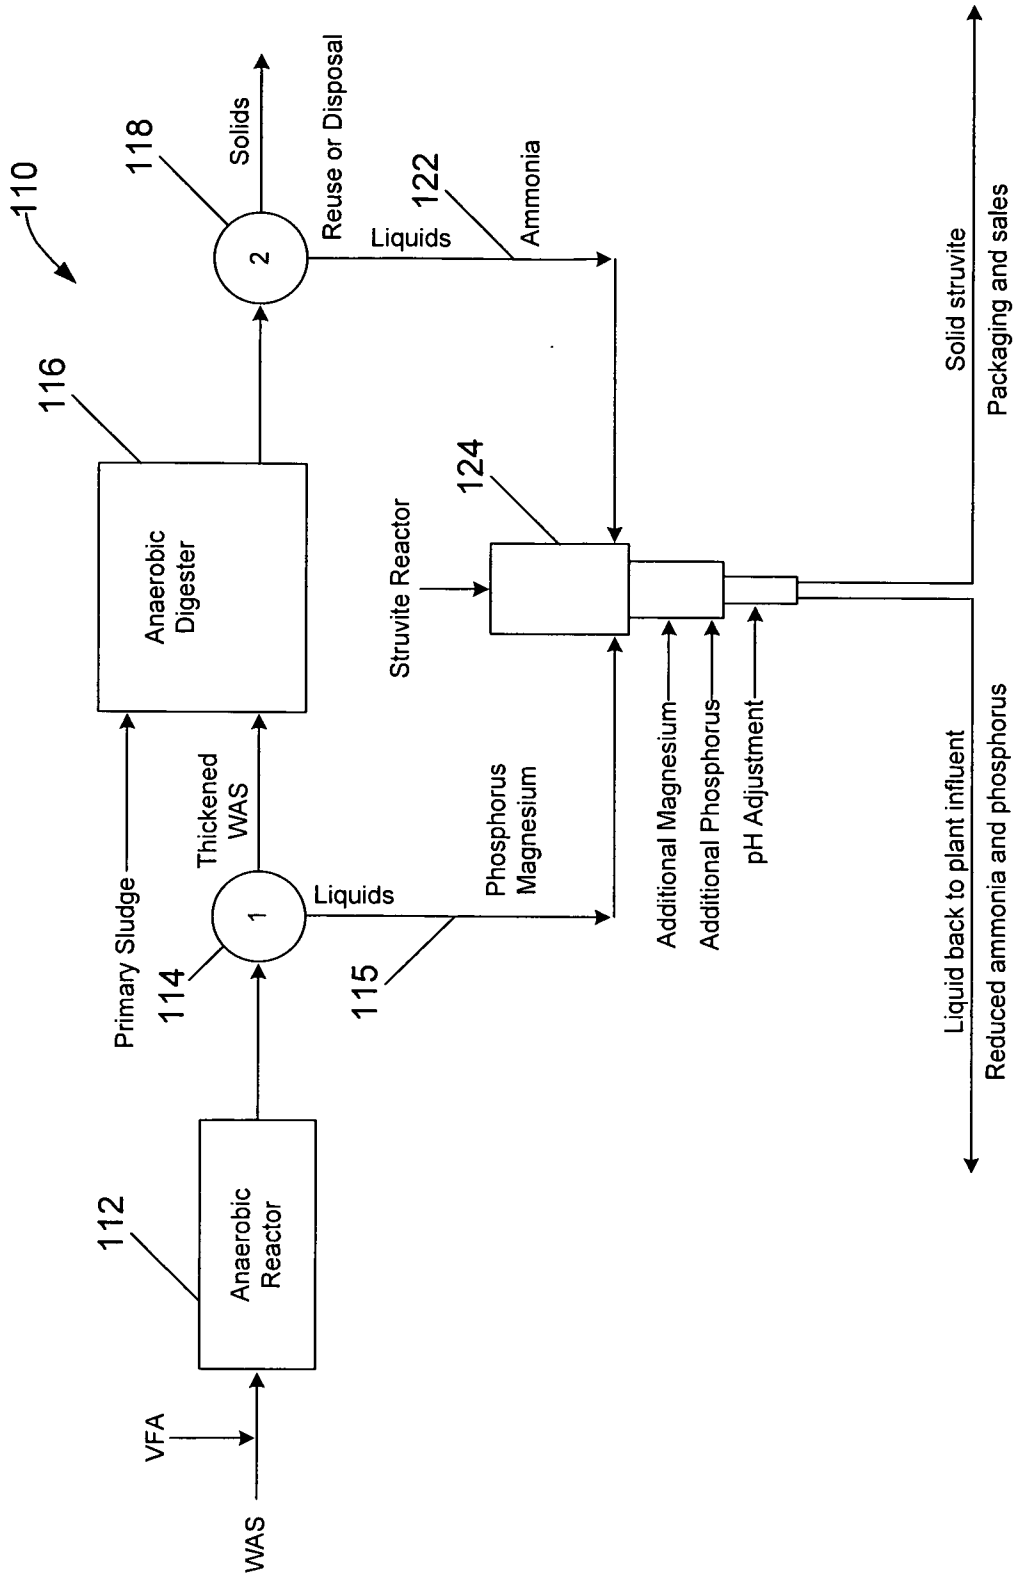


Figure 2

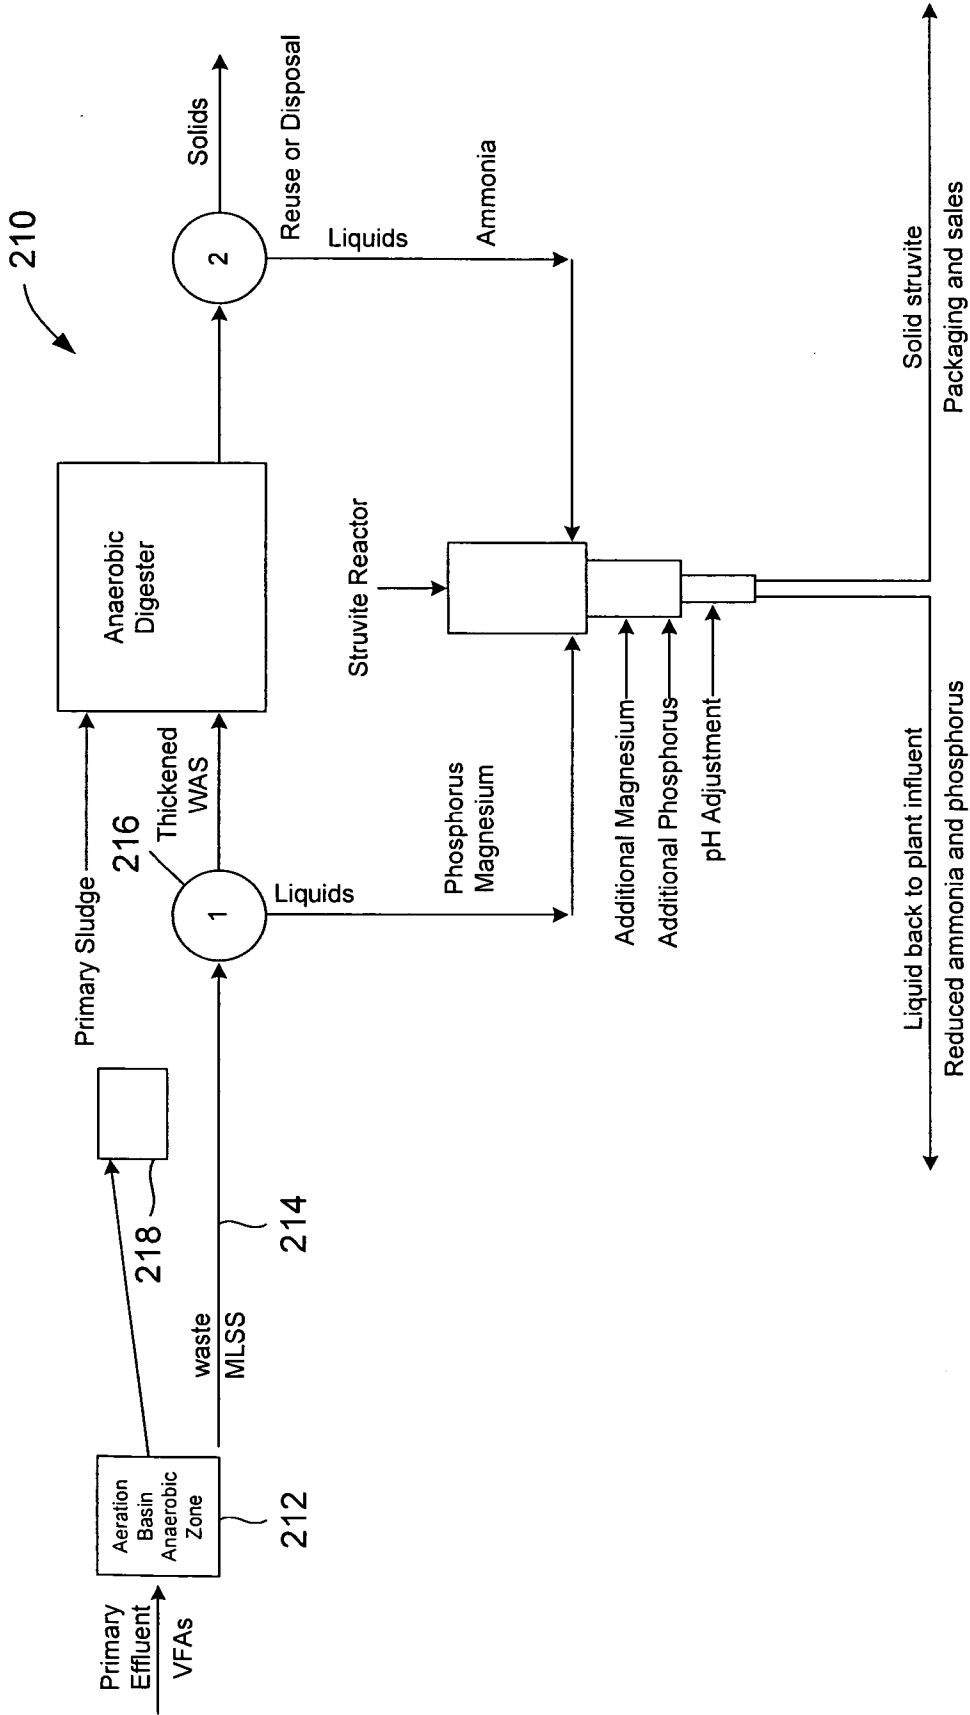


Figure 3

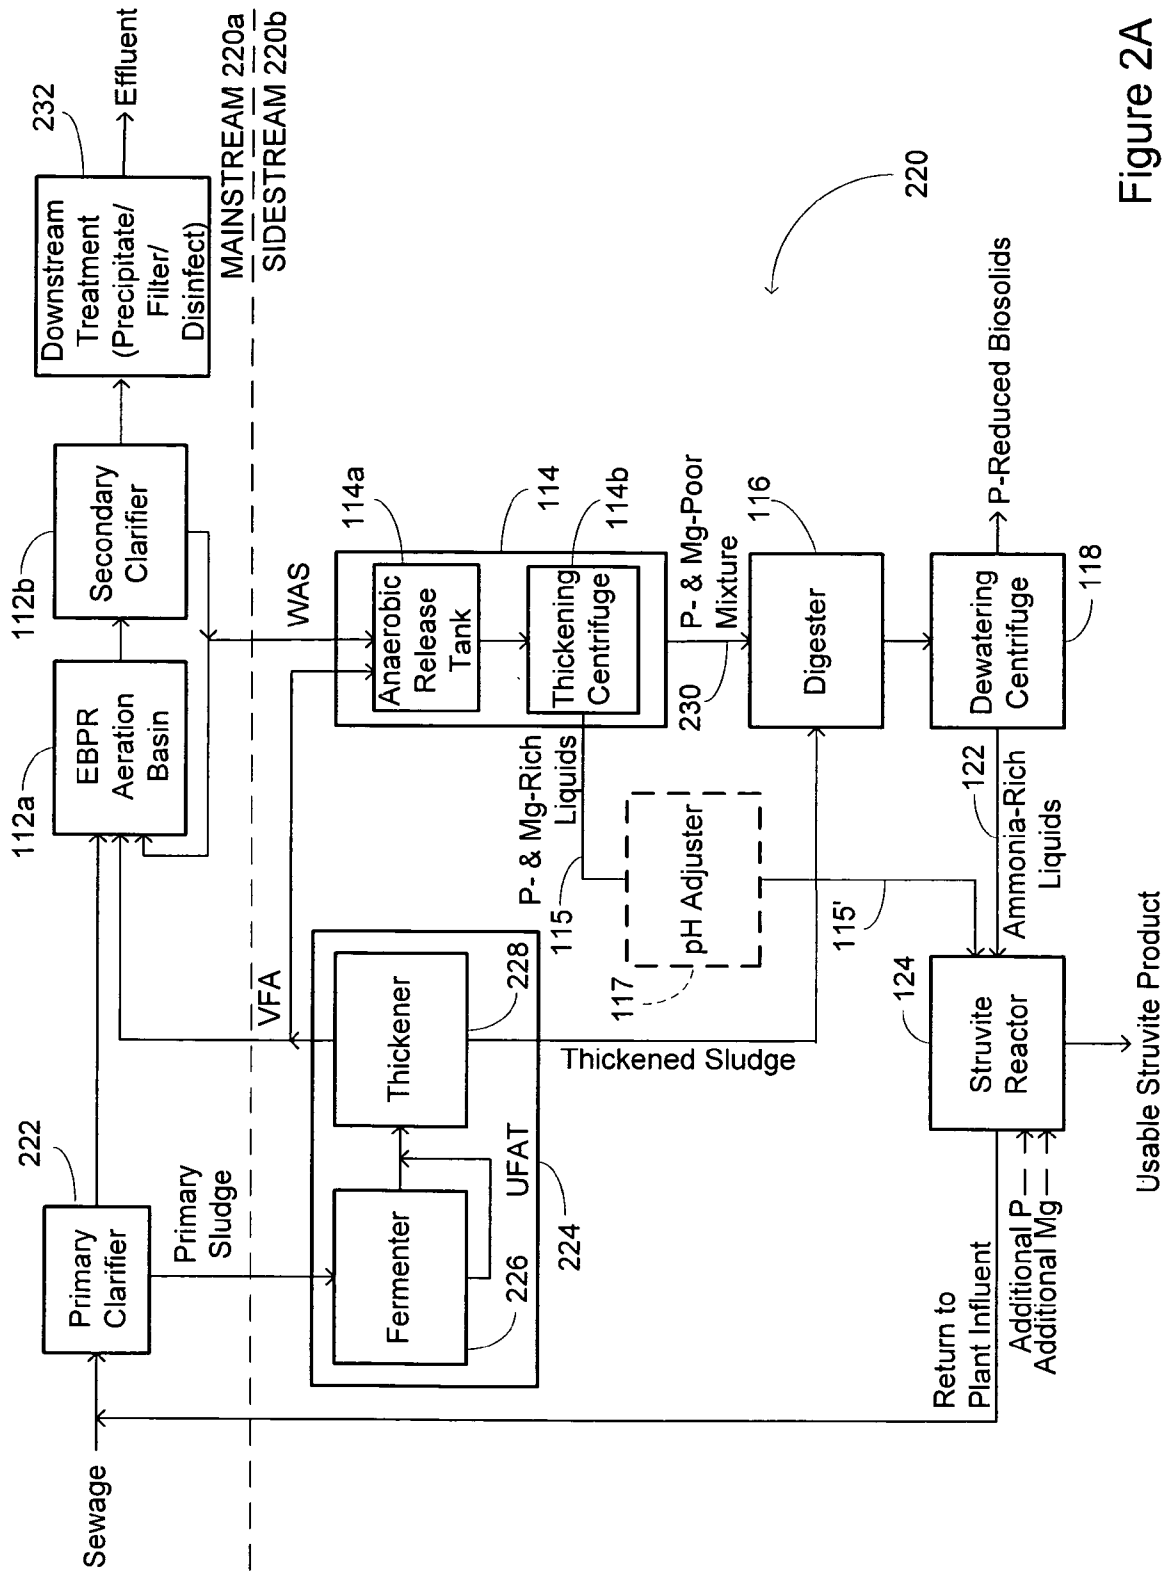


Figure 2A

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6387264 B [0019]
- WO 2005077834 A1 [0023]

Non-patent literature cited in the description

- **D. MONTAG.** A Feasible Approach of Integrating Phosphate Recovery as Struvite at Waste Water Treatment Plants. *Proceedings, Institute Of Environmental Engineering*, 2007, 551-558 [0006]
- **J. H. RENSINK.** The Modified Renphosystem: A High Biological Nutrient Removal System. *Wat. Sci. Tech.*, 1997, vol. 35 (10), 137-146 [0006]
- **S. WILLIAMS.** Wastewater Treatment Plant and Opportunities for Phosphorus Recovery. *Environ. Techn.*, 1999, vol. 20 (7), 743-747 [0007]
- An economic and environmental evaluation of the opportunities for substituting phosphorus recovered from wastewater treatment works in existing UK fertiliser markets. *Environ. Tech.*, 2000, vol. 21 (9), 1067-1084 [0007]



Hulladék-aktivált eljárás foszfornak és magnéziumnak iszaptól való sztrippelésére valamint sztruvit-előállítási rendszer

SZABADALMI IGÉNYPONTOK

1. Hulladékkezelési eljárás, amely magában foglalja:

- (a) egy olyan első keverék előállítását, amely hulladékvizekből származó szilárdanyagokból, mikroorganizmusokból és folyadékból áll, ahol a mikroorganizmusok tartalmaznak foszfort és magnéziumot;
- (b) foszfor és magnézium eltávolítását a mikroorganizmusokból, és annak a lehetővé tételét, hogy az eltávolított foszfor és magnézium feloldódjék az első keverék egy folyadék részében, ahol az eltávolítási lépés magában foglalja biológiailag könnyen lebomló szénvegyületek (readily biodegradable carbon compounds, RBC) hozzáadását az első keverékhez, amellyel egy kezelt keveréket kapunk, amely oldott magnéziumot és foszfort foglal magába;
- (c) a kezelt keveréknek a fermentálását és besűrítését, amellyel egy olyan foszforban gazdag és magnéziumban gazdag folyadékot kapunk, amely szeparálva van a fennmaradó, foszfortartalomban csökkentett és magnéziumtartalomban csökkentett keveréktől;
- (d) a foszfortartalomban csökkentett és magnéziumtartalomban csökkentett keverék további anaerob kezelését, amellyel egy ammóniában gazdag foszfortartalomban csökkentett és magnéziumtartalomban csökkentett keveréket kapunk;
- (e) az ammóniában gazdag keverék víztelenítését, amellyel ammóniában gazdag folyadékot kapunk; és
- (f) az ammóniában gazdag folyadéknak a foszforban gazdag és magnéziumban gazdag folyadékkal való összekeverését, amellyel sztruvitot nyerünk.

2. Az 1. igénypont szerinti eljárás, amelyben a (b) lépést a kezelt keveréknek egy anaerob reaktorban, legalább 0,5 óráig való tartásával valósítjuk meg.

3. Az 1. igénypont szerinti eljárás, amelyben az RBC-k illékony zsírsavakat (volatile fatty acids, VFA) foglalnak magukba.

4. Az 1. igénypont szerinti eljárás, amelyben az RBC-k olyan vegyületeket foglalnak magukba, amelyek illékony zsírsavakba (VFA-k) a mikroorganizmusok által kerülnek átalakításra.

5. Az 1. igénypont szerinti eljárás, amelyben az első keverék hulladék-aktivált iszap.

6. Az 1. igénypont szerinti eljárás, amelyben az első keverék kevert likvor szuszpendált szilárdanyagokkal.

7. Az 1. igénypont szerinti eljárás, amelyben a (b) lépést az első keveréknek egy anaerob zónán való átvezetésével valósítjuk meg, amelyben illékony zsírsavak vannak jelen, amelyek a foszfornak és a magnéziumnak a mikroorganizmusokból való kihajtását idézik elő.

8. Az 1. igénypont szerinti eljárás, amelyben a (b) lépést az első keveréknek egy anaerob reaktorban való, több mint 36 órán át történő tartásával valósítjuk meg.


9. Az 1. igénypont szerinti eljárás, amelyben a magnéziumban és foszforban gazdag folyadékot az ammóniában gazdag folyadékkal való összekeverési lépését egy sztruvit-reaktorban valósítjuk meg, és amelyben a magnéziumot adunk a sztruvit-reaktorhoz vagy bármely inputhoz, amellyel növeljük a sztruvit-termelést.

10. Az 1. igénypont szerinti eljárás, amelyben az ammóniában gazdag folyadékot a magnéziumban és foszforban gazdag folyadékkal oly módon keverjük össze, hogy ez egy használható sztruvit-terméket eredményezzen.

11. Az 1. igénypont szerinti eljárás, amelyben a (c) lépésben kapott foszfortartalomban csökkentett és a magnéziumtartalomban csökkentett keverék iszap formájában van jelen, és amelyben a (d) lépést a (c) lépésben kapott iszappal valósítjuk meg, összekeverve legalább egy másik, a hulladékkezelési eljárásból kapott iszappal.

12. Az 1. igénypont szerinti eljárás, amelyben az (a), (b), (c), (d), (e) és (f) lépéseket in situ végezzük.

A meghatalmazott:



BBKK Szabadalmi Ügyvédi Iroda
 H-1067 Budapest, Andrássy út 113.
 Telefon: +36-1-1990 Fax: +36-1-1990
 Email: bbkk@bbkk.hu