

March 20, 1928.


1,663,443

W. H. D'ARDENNE

PUNCHING MACHINE

Filed Nov. 13, 1920

4 Sheets-Sheet 1

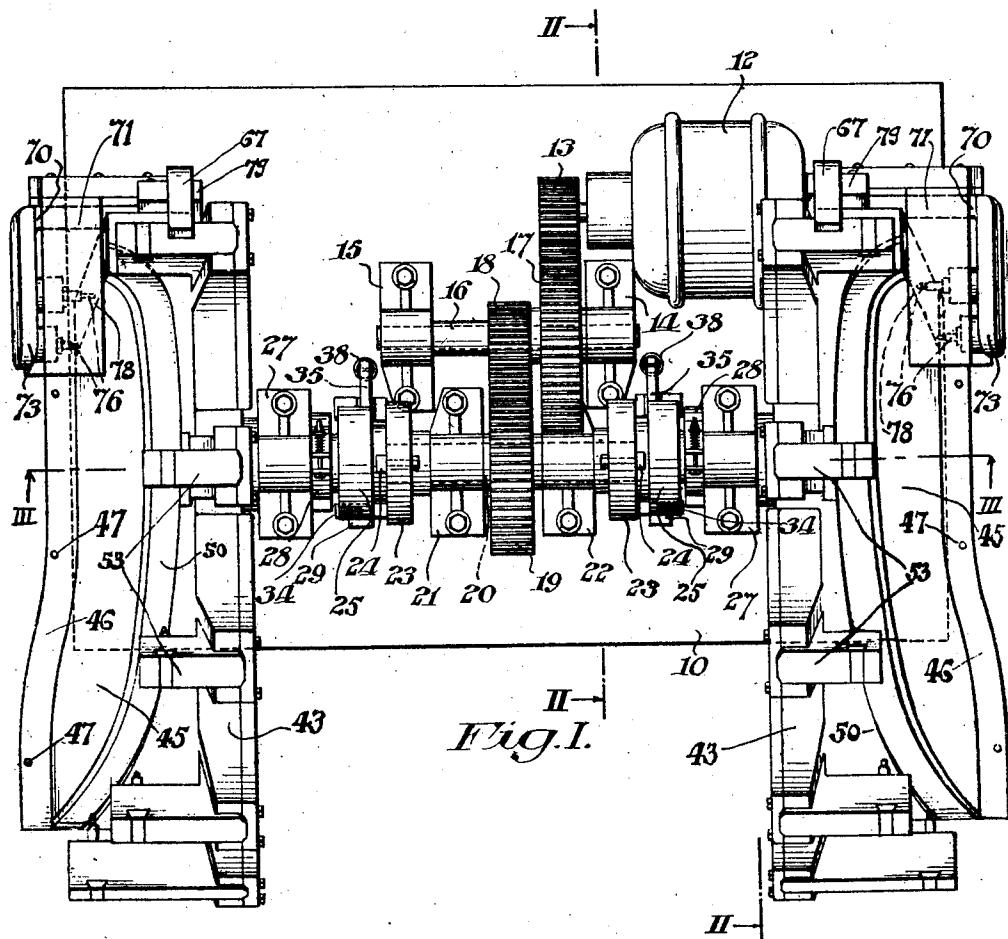

March 20, 1928.

1,663,443

W. H. D'ARDENNE

PUNCHING MACHINE

Filed Nov. 13, 1920

4 Sheets-Sheet 2

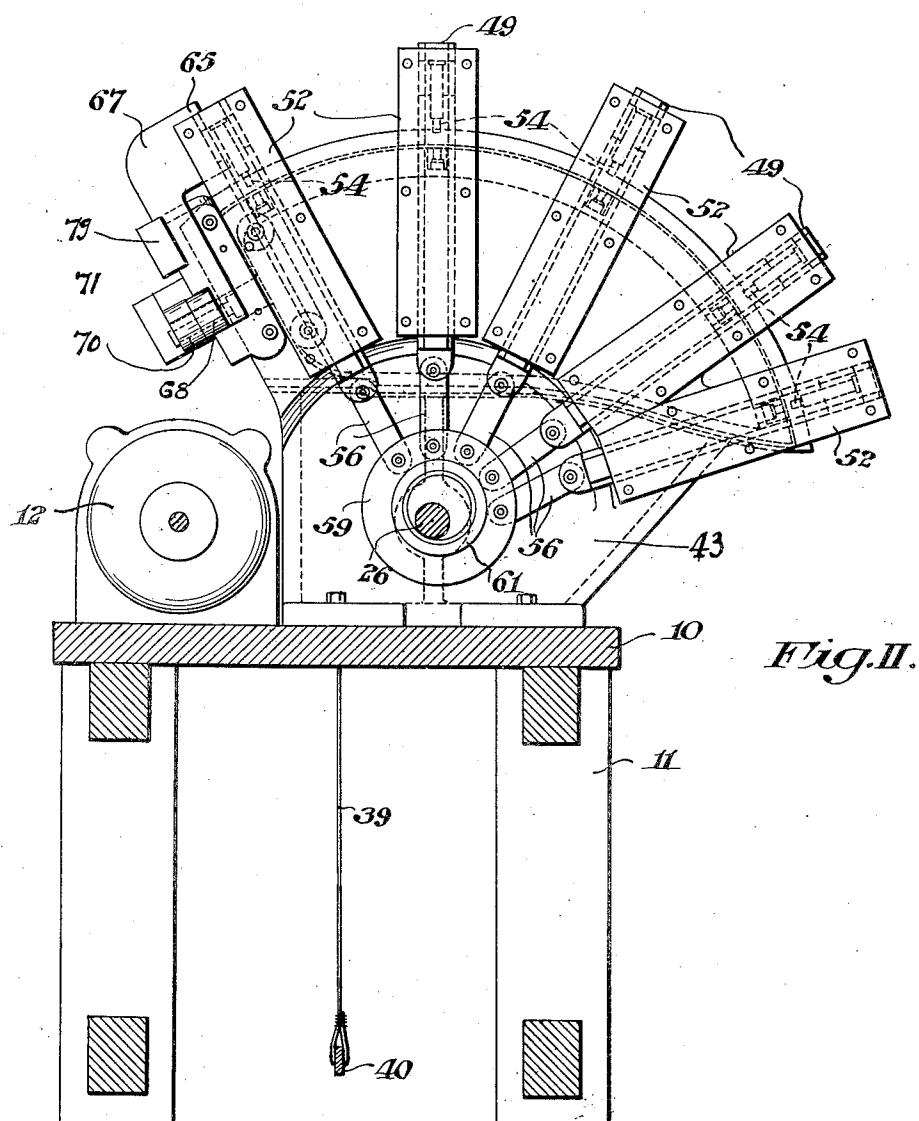


Fig. II.

Witness:
R. H. Schleicher.

Inventor:
Walter H. D'Ardenne,
By C. B. Desjardins
Attorney

March 20, 1928.

1,663,443

W. H. D'ARDENNE

PUNCHING MACHINE

Filed Nov. 13, 1920

4 Sheets-Sheet 3

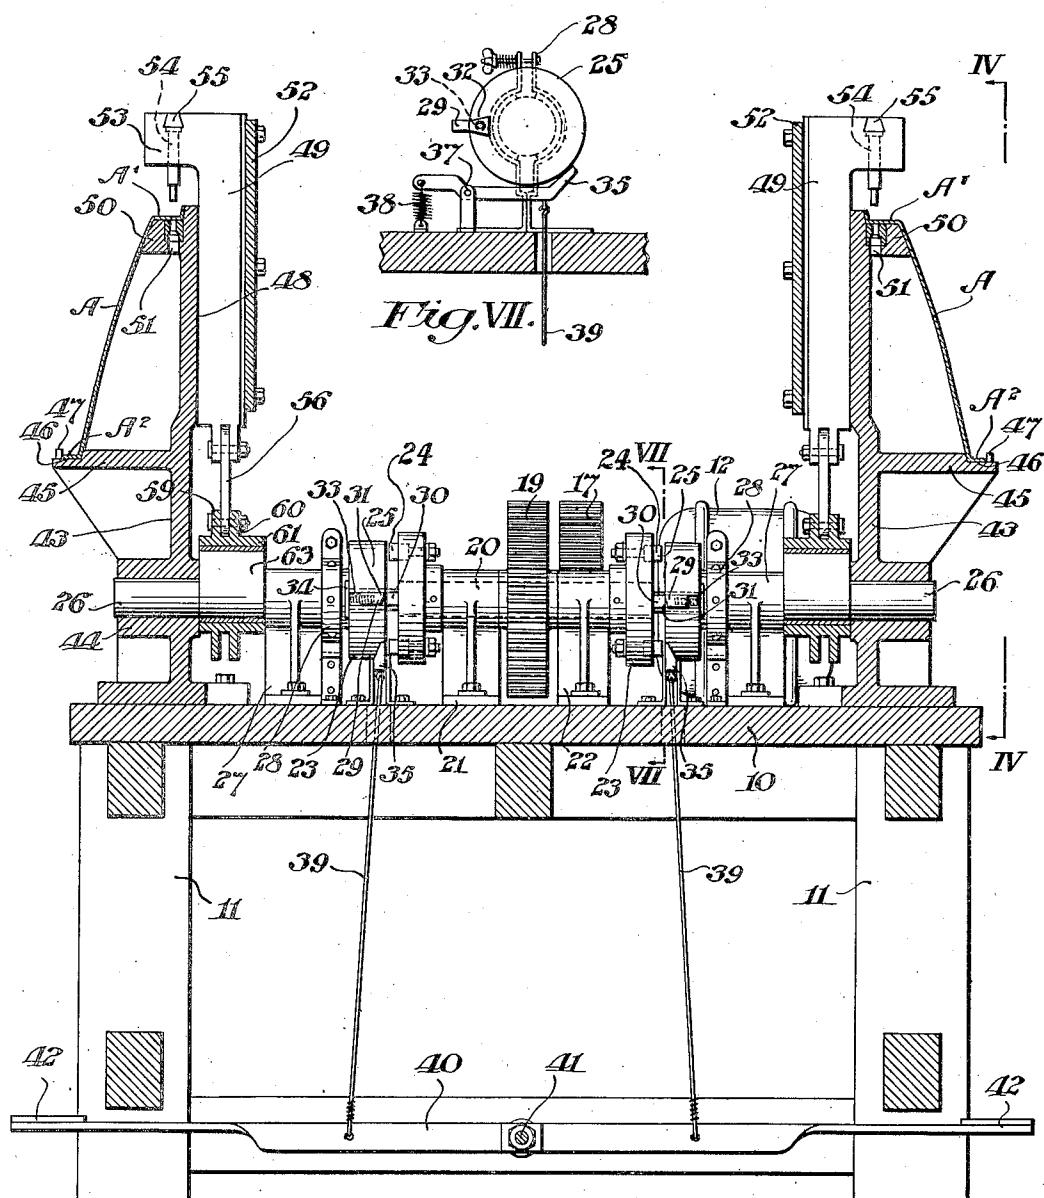


Fig. III.

Witness:
R. H. Schleicher.

*Inventor
Walter H. D'Ardenne,
By G. D. G. D'Ardenne
Attorney*

March 20, 1928.

1,663,443

W. H. D'ARDENNE

PUNCHING MACHINE

Filed Nov. 13, 1920

4 Sheets-Sheet 4

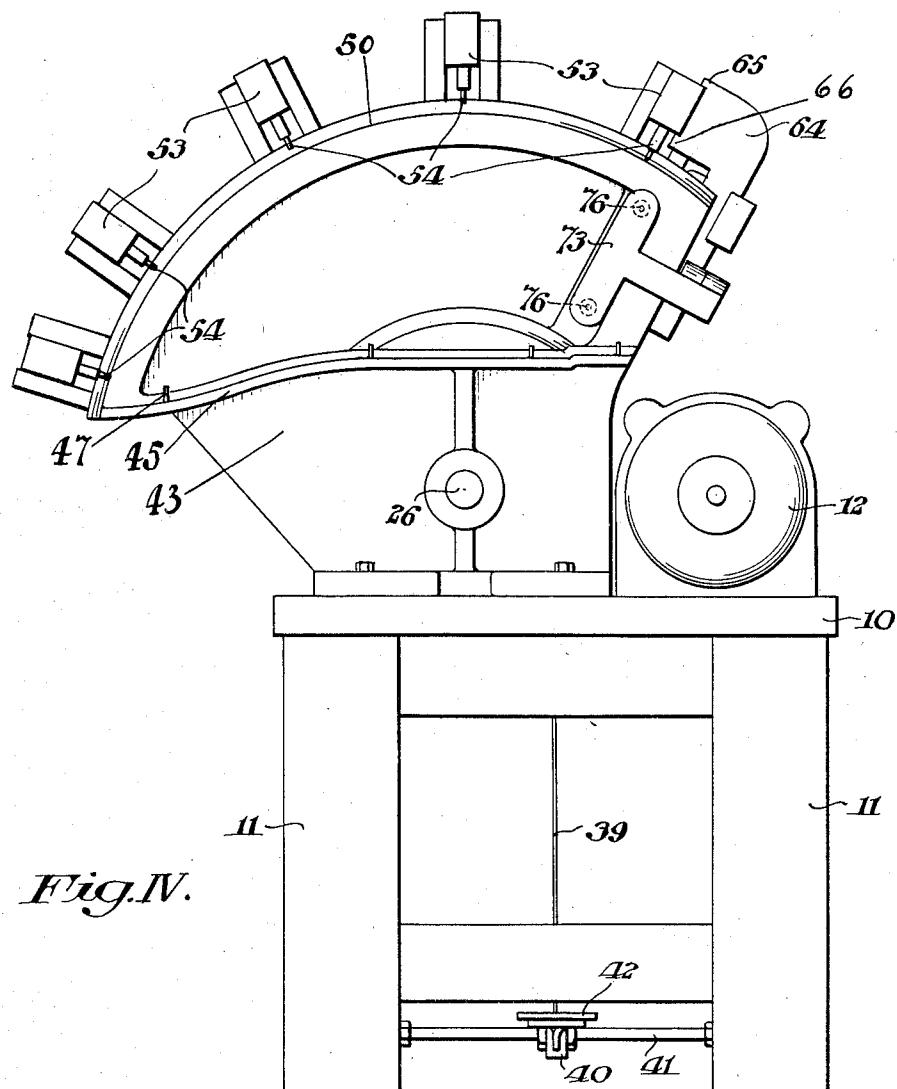


Fig. IV.

Witness:
R. H. Schleicher.

Inventor:
Walter H. D'Ardenne,
By C. B. Desjardins
Attorney

UNITED STATES PATENT OFFICE.

WALTER H. D'ARDENNE, OF PHILADELPHIA, PENNSYLVANIA, ASSIGNOR TO EDWARD G. BUDD MANUFACTURING COMPANY, OF PHILADELPHIA, PENNSYLVANIA, A CORPORATION OF PENNSYLVANIA.

PUNCHING MACHINE.

Application filed November 13, 1920. Serial No. 423,969.

My invention relates to improvements in punching machines and, more particularly, to machines for operating a plurality of punches.

6 One object of my invention is to provide an improved mechanism for actuating a plurality of punches at one operation, which mechanism is so designed as to require a minimum power output for the punching 10 operation.

Another object of my invention is to provide a punching mechanism, which will form a plurality of holes at one operation, the punches operating in different phase.

15 Another object of my invention is to provide a punching machine comprising a plurality of punches operating along radial lines and other punches acting along lines extending transversely to the plane containing 20 the radial lines.

Another object of my invention is to provide a punching machine having right and left hand work supports and cooperating punches driven by a common actuating 25 means.

Another object of my invention is to provide a punching machine which is particularly designed to punch, at one operation, radial holes in the flange of a wheel house 30 stamping and, also, holes through the lateral flange of said stamping. Another object of my invention is to provide an improved and more efficient punching machine.

Further objects, and objects relating to 35 economies of manufacture and details of construction, will definitely appear from the detailed description to follow. I accomplish the objects of my invention, in one instance, by the devices and means described 40 in the following specification. My invention is clearly defined and pointed out in the appended claims. A structure constituting one preferred embodiment of my invention is illustrated in the accompanying drawing, forming a part of this specification, in which:—

Fig. I is a top plan view of a machine embodying my invention.

Fig. II is a sectional view, taken substantially on the line II—II of Fig. I.

Fig. III is a transverse, sectional view taken substantially on the line III—III of Fig. I, the gears, clutch members and brakes

mounted on the driving shaft, being shown in full lines.

Fig. IV is an end view of the upper part of the machine shown in Fig. I.

Fig. V is a fragmentary view showing the means for actuating the horizontally acting punches.

Fig. VI is a detail, sectional view taken on the line VI—VI of Fig. V, and Fig. VII is a detail sectional view taken on the line VII—VII of Fig. III.

Similar reference numerals refer to similar parts throughout the several views, and the sectional views are taken looking in the direction of the little arrows at ends of the section lines.

My invention contemplates a punching 70 machine in which a plurality of punches are actuated by a common actuating means and move in different phases, so that the punches pass through the metal at different instants, thus reducing the power requirement of the 75 machine. My invention also contemplates the actuation of a series of radial punches, moving in different phases, by a driven shaft. According to one practical embodiment of my invention, such radial punches 80 may be actuated by an eccentric on the shaft and suitable connections to the punches. Another feature of my invention resides in the employment of a right hand and left hand work support, each having a gang or 85 set of punches cooperating therewith, driven from a common source of power but independently controlled. This is particularly desirable in cases where the punching machine works on stampings such as the right 90 and left wheel housings of an automobile body. The character of the work supports is determined by the work to be operated on, but, for wheel housings, I prefer to use a work support having a curved upper ledge 95 carrying the dies. My invention also contemplates the provision of connections with one of the reciprocating punches, acting to reciprocate a punch or punches in a direction at an angle to the path of the first punch.

In the construction of automobile bodies, the tonneau may sometimes include wheel housings which may be bolted or riveted to the tonneau panel. In one form of wheel housing, the curved marginal flange has a 105 series of holes formed therein and there are

also a pair of holes in another part of the wheel housing extending along lines substantially perpendicular to the plane containing the axis of the first holes. The machine, which I have disclosed here, has been designed particularly to punch all of those holes at one operation while keeping the maximum power requirement for the machine as low as possible. It will be apparent, however, that the invention embodied in this machine is capable of many other applications and is not to be restricted to this specific arrangement.

This machine comprises a table, 10, which may be supported by suitable frame work, 11, and which carries a head, 43, which forms the work support and in which the punch holders may be slidably mounted. In this instance, the head is provided with a lower, laterally extending ledge, 45, and an upper and narrower laterally extending ledge, 50. These ledges are curved to conform to the work, in this instance, the upper and lower flanges of the wheel housing, A. I may form a seat, 46, on the lower ledge and mount thereon gauge pins, 47. This forms a very convenient and satisfactory means for positioning the lower edge of the wheel housing on the work support. In the upper ledge, 50, I mount the dies, 51, with which the punches cooperate. On the head, 43, adjacent one end of the ledges, 45 and 50, I may form a work supporting surface, 78, against which a flange of the wheel housing lies.

The punches, 54, which cooperate with the dies, 51, to perforate the upper flange, A¹ of the wheel housing, A, are reciprocally mounted with reference to the head, 43. This may be done very satisfactorily by providing guideways, 48, in the head, 43, in which the punch holders, 49, are reciprocally mounted. The punch holders, 49, may be retained in the guide ways by the removable cover plates, 52, closing the open sides of the guideways. In the present instance, the punches are radially arranged and hence the guideways are formed along lines radiating from a common center. The guideways, 48, are formed in one side or face of the head and the ledges forming the work support project from the opposite side or face of the head. In order to bring the punches, 54, into line with the dies, 51, I provide each punch holder with a head, 53, which overhangs the upper ledge, 50. A punch, 54, may be mounted in each punch holder in line with the corresponding die, 51. Any suitable means for holding the punch, 54, in the head, 53, may be used, for instance, the key, 55.

In order that the punches may operate in different phase so that they enter the metal successively, I have found that a simple and effective means for actuating the punches consists in connecting the punch holders

with a driven shaft so that the rotation of the shaft successively reciprocates the punch holders. In this particular machine, I provide a drive shaft, 26, which may be journaled, at one end, in a bearing, 27, and, at the other end, in boss, 44, of the head, 43. This driven shaft has an eccentric, 63, on which is loosely mounted the collar, 61.

The lower end of each punch holder, 49, is connected to this collar. One convenient means for accomplishing this is to pivotally connect one end of a link, 56, to the lower end of a punch holder and the other end of the link between flanges, 59 and 60, on the collar, 61.

I have found it very efficient and convenient to provide a head, 43, at each end of the table, 10. These heads are alike with the exception that the ledges, 45 and 50, are so formed as to make a right and a left work support. That is, referring to Fig. 1, the ledges of the work support at the right hand side of the figure are so formed as to take only a right hand wheel housing and the opposite work support is so formed as to take only a left hand wheel housing. In other respects the two heads are identical. The gang of punches cooperating with each work support are driven from a common source of power, but I prefer to provide for their independent control.

In this instance, I accomplish it by providing a separate drive shaft, 26, for each gang of punches. Each of these drive shafts may have a spring brake, 28, which acts on the shaft to stop its rotation when the power is cut off. The manner in which the individual drive shafts are driven is not material to my invention, but I have shown a very compact and efficient motor drive. This comprises the motor, 12, mounted on the table, 10, and driving a central shaft, 20, through the train of gearing comprising the gears, 13, 17, 18 and 19. The gears, 17 and 18, may be carried by an idler shaft, 16, journaled in suitable bearings, 14 and 15. The central drive shaft, 20, is positioned in line with and between the shafts, 26, and may be journaled in suitable bearings, 21 and 22. This central drive shaft rotates continuously, so long as the motor, 12, operates, and in order to drive the shafts, 26, independently at the will of the operator, I provide independently controlled clutch connections between the central drive shaft, 20, and the individual drive shafts, 26. One very satisfactory clutch comprises a clutch disc, 23, mounted on the end of the shaft, 20, and carrying a pair of laterally projecting clutch pins, 24. On the adjacent end of the shaft, 26, there is mounted a clutch member, 25, having a slot, 32, in one edge thereof, in which a latch, 29, is mounted so as to slide parallel to the axis of the shaft. A spring, 33, compressed between one end

of the latch and a retainer plate, 34, normally presses the latch towards the clutch disc, 23, on the central drive shaft, 20. The latch has a projecting portion, 30, which is engaged by one of the clutch pins, 24, so as to drive the clutch member, 25. In order to retract the latch out of engagement with the clutch pin, the latch is provided with a radially extending portion having a bevelled nose, 31, to be engaged by the nose of a pawl, 35, fulcrumed on bracket, 37. A spring, 38, normally holds the pawl in position to engage the latch, but the pawl may be withdrawn against the tension of spring, 38, due to the link, 39, connecting the end of the pawl with the lever, 40, which is fulcrumed at 41, and has the foot pedal, 42.

The wheel housing, A, has a lateral flange, A³, (see Fig. VI) in which two holes are to be formed. This flange lies substantially at right angles to the curved flange, A¹, in which holes are formed by the radial punches. It was desired in designing this particular machine to form all of these holes at one operation. I have accomplished this by providing a gang of punches for forming the holes in the lateral flange, A³, and connecting it with one of the radial punch holders so that motion is transmitted from the latter to the former.

In this instance, I have accomplished this by mounting in the surface, 78, of the work support, dies, 77, with which the punches, 76, coact. A member, 71, forming part of the frame and fixed on the head, 43, has a punch holder, 70, slidably mounted therein. The punch holder has a head, 73, which overhangs the surface, 78, of the work support. In order to properly guide the punches and strengthen them against side thrust, I may provide the head, 73, with guide blocks, 74, which fit and work in recesses, 75, of the frame member, 71, and which carry the punches, 76, in line with the dies, 77. I have provided simple means for reciprocating the punch holder, 70, comprising a slide bar, 67, which is slidably mounted in the guide, 79. The upper end of the slide bar has the jaws, 65 and 66, engaging above and below the head, 53, of the adjacent punch holder, 49, so that the slide bar, 67, reciprocates with the punch holder. In order to reciprocate the punch holder, 70, the lower end of the slide bar, 67, is connected to a link, 68, the opposite end of which is connected to the rear end of the holder, 70. As a result, the up and down motion of the slide bar, 67, causes a transverse movement of the punch holder, 70. This occurs because the slide bar, 67, is so guided that it has a straight line movement as it reciprocates with the punch holder, 49. The punch holder, 70, is guided so that it is confined to a straight line movement. Since the end of the slide bar is connected to the end of

punch holder, 70, by the link, 68, a movement of the slide bar, 67, must cause a movement of punch holder, 70, so as to keep the same distance between the ends of such parts.

The operation of this punching machine should be very readily understood from the foregoing description. As the drive shaft, 26, rotates, the connections between the collar, 61, on the eccentric, 63, and the respective punch holders, 49, cause the latter to reciprocate successively. That is, these punch holders operate in different phase, no two of them being at the upper limit of their stroke at the same time. As a result, no two of these punches enter the metal at the same time and the power requirement of the machine is kept low because of that fact. This makes a very efficient machine. The work, in this case a wheel housing, A, is positioned on the proper work support with flange, A¹, resting on the upper ledge, 50, and flange A², seated on the lower ledge seat, 46. As the shaft, 26, rotates the punches, 54, successfully enter the metal and coact with the dies, 51, to form the holes in flange, A¹. At the same time, the punch holder, 70, is reciprocated through its connections with one of the radial punch holders, 49, so as to form the holes in the lateral flange, A³. The motor, 12, is to run continuously and the clutch connections are controlled and operated through the foot levers to drive one or the other of the gangs of punches coacting with the right and left work support. The clutch is of such a character that it is operable at but one point in each revolution of the shaft and, therefore, the shaft, 26, is always stopped at the same point in its rotation permitting the removal of the work from the work support. The spring brake, 28, aids in this by stopping the shaft as soon as the clutch is thrown out.

I am aware that the particular embodiment of my invention, which is disclosed in this application, is susceptible of considerable variation without departing from the spirit of my invention. I desire, therefore, to claim my invention broadly and also to claim those specific features of the present embodiment which I believe to be of value, all as indicated by the appended claims.

Having thus described my invention, what I claim as new and desire to secure by Letters Patent is:—

1. A punching machine comprising a frame, a plurality of punches mounted therein, a drive shaft, an eccentric on said shaft, and independent means controlled by said eccentric for actuating each of said punches in a predetermined sequence.

2. A punching machine comprising a frame, a drive shaft, an eccentric on said shaft, a plurality of punches mounted in said frame and reciprocable along lines radial to the axis of and angularly spaced with

reference to said shaft, and means controlled by said eccentric for actuating said punches in a predetermined sequence.

3. A punching machine comprising a stationary frame, a plurality of punches mounted for rectilinear movement therein, a drive shaft, an eccentric on said shaft, a collar loosely mounted on said eccentric, and individual connections between said collar and each of the punches.

4. A punching machine comprising a stationary frame, a drive shaft, an eccentric on said shaft, a collar loosely mounted on said eccentric, a plurality of punches mounted for rectilinear movement in said frame and reciprocable along lines radial to the axis of and angularly spaced with reference to said shaft, and connections between said collar and said punches.

5. A punching machine comprising a frame, a plurality of punches mounted therein, a drive shaft, an eccentric on said shaft, a collar loosely mounted on said eccentric, and a plurality of links connecting said collar and said punches.

6. A punching machine comprising a frame, a drive shaft, an eccentric on said shaft, a collar loosely mounted on said eccentric, a plurality of punches mounted in said frame and reciprocable along lines radial to the axis of said shaft and a plurality of links connecting said collar and the punches.

7. A machine of the class described comprising a head, a plurality of punch holders angularly positioned therein and adapted for rectilinear movement toward and from a common center, punches carried by said punch holders, a work support, and means for successively reciprocating a plurality of said punch holders towards the work support in a predetermined sequence while the work is in one position on said support.

8. A machine of the class described comprising a head, a ledge extending laterally therefrom and forming a work support, a plurality of punches reciprocably mounted in said head and adapted for movement along angularly spaced lines extending perpendicularly of said work support, and means for reciprocating said punches, said means being located substantially at the point of intersection of said angularly spaced lines.

9. A punching machine comprising a head, a ledge extending therefrom and forming a work support, a plurality of punch holders reciprocably mounted in said head, each punch holder having a portion overhanging the ledge, punches carried by said overhanging portions, and means for reciprocating said punch holders.

10. A punching machine comprising a head, a curved ledge extending therefrom and forming a work support, a drive shaft,

a plurality of punch holders mounted in said head and reciprocable along lines radial to the axis of said shaft, each punch holder having a portion overhanging said ledge, punches carried by said overhanging portions, and means actuated by said shaft for reciprocating said punches.

11. A punching machine comprising a head, two ledges extending therefrom and forming a work support, a plurality of punch holders reciprocably mounted in said head, each punch holder having a portion overhanging one of said ledges, punches carried by said punch holders, and means for reciprocating said punch holders.

12. A punching machine comprising a head, a substantially horizontal lower ledge and a curved upper ledge formed on said head, a plurality of punch holders reciprocably mounted in said head, punches carried by said punch holders and disposed substantially perpendicular to said curved upper ledge, and means for reciprocating said punch holders.

13. A punching machine comprising a head, having a plurality of radial guideways therein, punch holders reciprocably mounted in said guideways, a work support on said head including a curved ledge, punches carried by said punch holders and extending substantially perpendicular to said curved ledge, and means for reciprocating said punch holders in predetermined cyclical succession.

14. A punching machine comprising a head, a drive shaft, said head having a plurality of guideways formed therein, and extending radially to the axis of said shaft, a work support on said head including a substantially horizontal lower ledge and a curved upper ledge, a plurality of punch holders reciprocably mounted in said guideways, punches carried by said punch holders and disposed substantially perpendicularly to said curved ledge, and means actuated by said shaft for reciprocating said punch holders.

15. A punching machine comprising a head, having a plurality of radial guideways formed therein, a work support on said head including a curved ledge, a plurality of punch holders reciprocably mounted in said guideways, punches carried by said punch holders and disposed substantially perpendicularly to said curved ledge, and means for actuating said punch holders successively in a predetermined sequence whereby the punches perforate the work at successive instants.

16. A machine for punching holes in non-symmetrical panels comprising a frame, a pair of work supports carried thereby and so formed that one will support right hand panels and the other will support left hand panels, a set of punches reciprocable with

respect to each work support, a common actuating means for said punches, and independent controlling means for each set of punches.

5 17. A machine of the class described comprising a frame, a drive shaft journaled therein, driven shafts in line therewith, clutch means connecting said driven shafts with said drive shaft, a pair of work supports, said work supports being non-symmetrical with respect to a vertical plane containing the axis of said driven shafts and symmetrical with respect to a vertical plane perpendicular to said axis, a set of punches reciprocable with reference to each work support and actuated by the respective driven shafts, and independent means for controlling each of said clutch means.

10 18. In a machine of the class described, a pair of work supports for non-symmetrical panels respectively arranged to receive and support a right hand and a left hand panel, a set of punches reciprocable with reference to each work support, and means for actuating said punches.

15 19. In a machine of the class described, the combination of a work support including a ledge and a surface substantially transverse to said ledge, a plurality of punch holders reciprocable normally to said ledge and said surface respectively, punches carried by said punch holders, and a common means for actuating said punch holders.

20 20. In a machine of the class described, the combination of a reciprocating punch holder, a second punch holder reciprocating substantially transversely thereto, means for reciprocating the first punch holder, and connections between the first and second punch holders, whereby motion is transferred from the first to the second punch holder.

25 21. A punching machine comprising a frame, a punch holder reciprocably mounted therein, means for reciprocating said punch holder, a second punch holder mount-

ed to reciprocate in a direction transverse to the first named punch holder, and connections between said punch holders for transmitting movement from one to the other.

30 22. A punching machine comprising a frame, a punch holder reciprocably mounted therein, means for reciprocating said punch holder, a second punch holder mounted to reciprocate in a direction transverse to the first named punch holder, and a link pivotally connected to said punch holders and transmitting movement from one to the other.

35 23. In a punching machine, the combination of a frame, a punch holder slidably mounted therein, and having an overhanging portion, a guide block on said overhanging portion, said frame having a socket in which said block fits, and a punch carried by said punch holder.

40 24. In a punching machine, the combination of a frame, a punch holder reciprocably mounted therein, a guide block on said punch holder, said frame having a socket in which said guide block works, and a punch carried by said punch holder.

45 25. In a machine of the class described, work supports each having a work supporting ledge, said ledges respectively arranged to receive and support the edge of a right hand and a left hand panel, a set of punches reciprocable with reference to each work supporting ledge, and means to actuate said punches.

50 26. A punching machine comprising a support for the work to be punched, said support having work supporting faces substantially perpendicularly disposed relative to each other, and means cooperating with said perpendicularly disposed faces of the work support for simultaneously punching holes in the work supported thereon.

55 In testimony whereof, I affix my signature.

60

65

70

75

80

85

90

WALTER H. D'ARDENNE.