



US012031962B2

(12) **United States Patent**
Heindl et al.

(10) **Patent No.:** **US 12,031,962 B2**
(45) **Date of Patent:** **Jul. 9, 2024**

(54) **METHOD FOR IDENTIFYING A REAGENT DURING A PROCESS IN AN ANALYSIS SYSTEM**

(58) **Field of Classification Search**
CPC G01N 30/02; G01N 33/6848; G01N 2030/027; G01N 30/06; G01N 30/28;
(Continued)

(71) Applicant: **Roche Diagnostics Operations, Inc.**,
Indianapolis, IN (US)

(56) **References Cited**

(72) Inventors: **Dieter Heindl**, Munich (DE); **Thomas Heinemeyer**, Penzberg (DE); **Uwe Kobold**, Weilheim (DE); **Martin Rempt**, Penzberg (DE); **Christoph Seidel**, Weilheim (DE)

U.S. PATENT DOCUMENTS

5,677,186 A 10/1997 Anderson, II et al.
5,882,933 A 3/1999 Li et al.
(Continued)

(73) Assignee: **Roche Diagnostics Operations, Inc.**,
Indianapolis, IN (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

CN 143793 A 7/2003
CN 1427953 A 7/2003
(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **16/438,797**

International Search Report issued Feb. 26, 2018, in Application No. PCT/EP2017/084027, 3 pp.

(22) Filed: **Jun. 12, 2019**

(Continued)

(65) **Prior Publication Data**

US 2019/0293612 A1 Sep. 26, 2019

Related U.S. Application Data

Primary Examiner — Jennifer Wecker

Assistant Examiner — Ali Husain Faraz

(63) Continuation of application No. PCT/EP2017/084027, filed on Dec. 21, 2017.

(74) *Attorney, Agent, or Firm* — Stinson LLP

(30) **Foreign Application Priority Data**

Dec. 23, 2016 (EP) 16206595

(57) **ABSTRACT**


A method for identifying a reagent during a process in an analysis system is disclosed. The analysis system comprises a liquid chromatograph and a mass spectrometer. The method comprises providing a reagent, adding at least one chemical substance to the reagent with a concentration being above a detection level of the mass spectrometer, processing the reagent together with the chemical substance with the analysis system, and identifying the reagent based on a detection of a substance detection signal of the mass spectrometer representing the chemical substance.

(51) **Int. Cl.**
G01N 30/46 (2006.01)
G01N 30/02 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **G01N 30/466** (2013.01); **G01N 30/06** (2013.01); **G01N 30/28** (2013.01);
(Continued)

15 Claims, 2 Drawing Sheets

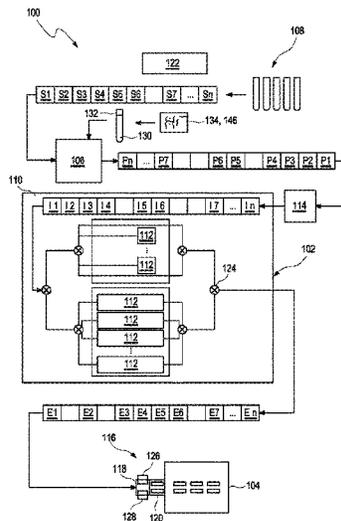

- (51) **Int. Cl.**
G01N 30/06 (2006.01)
G01N 30/28 (2006.01)
G01N 30/72 (2006.01)
G01N 33/58 (2006.01)

- (52) **U.S. Cl.**
CPC **G01N 30/7233** (2013.01); **G01N 33/58**
(2013.01); **G01N 2030/027** (2013.01); **G01N**
2030/067 (2013.01)

- (58) **Field of Classification Search**
CPC G01N 30/08; G01N 30/72; C12Q 1/6872;
B01D 15/34; B01D 59/44; H01J 49/063;
H01J 49/10

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,147,344	A	11/2000	Annis et al.
6,641,783	B1	11/2003	Pidgeon et al.
7,160,735	B2	1/2007	Dehlinger et al.
7,498,568	B2	3/2009	Overney et al.
7,815,803	B2*	10/2010	Kobold B01J 20/287 73/1.02
7,816,304	B2	10/2010	Schmidt et al.
7,820,023	B2*	10/2010	Curcio G01N 30/88 204/453
7,868,547	B2	1/2011	Pappin et al.
7,906,341	B2	3/2011	Purkayastha et al.
8,829,429	B2	9/2014	Geyer et al.
8,940,546	B2	1/2015	Grothe, Jr. et al.
8,945,940	B2	2/2015	Shin et al.
10,088,460	B2	10/2018	DeWitte et al.
10,488,374	B2	11/2019	Hanafusa et al.
2003/0194717	A1	10/2003	Schmidt et al.
2004/0033625	A1	2/2004	Aebersold
2004/0072250	A1	4/2004	Baranov et al.
2005/0208550	A1	9/2005	Pappin et al.
2006/0160131	A1	7/2006	Vandekerckhove et al.
2006/0186028	A1*	8/2006	Hughes G01N 30/32 210/101
2009/0090856	A1	4/2009	Grant et al.
2010/0003762	A1	1/2010	Kolbe et al.
2010/0068819	A1	3/2010	Hoffmann
2011/0028330	A1	2/2011	Hoffmann et al.
2012/0129247	A1*	5/2012	Tanoshima G01N 35/00732 435/286.1
2012/0269728	A1	10/2012	Jen et al.
2013/0102478	A1	4/2013	Amoura
2014/0093968	A1	4/2014	Grothe, Jr. et al.
2014/0158881	A1	6/2014	Cooper
2014/0349885	A1	11/2014	Dey et al.
2016/0139140	A1	5/2016	Thompson et al.
2016/0169902	A1	6/2016	Grothe, Jr. et al.

FOREIGN PATENT DOCUMENTS

CN	1873409	A	12/2006
CN	101358969	A	2/2009
CN	101421609	A	4/2009
CN	101542291	A	9/2009
CN	101848886	A	9/2010
CN	102099685	A	6/2011
CN	102484030	A	5/2012
CN	104508487	A	4/2013
CN	103370616	A	10/2013
CN	104508487	A	4/2015
CN	105209921	A	12/2015
CN	105699478	A	6/2016
EP	1750482	A2	9/2006
EP	1718962	A2	11/2006
EP	1918714	A1	5/2008
EP	2108957	A1	10/2009
GB	2430740	A	4/2007
JP	H0430686	Y2	7/1992
JP	2002527756	A	8/2002
JP	2003529059	A	9/2003
JP	2005538369	A	12/2005
JP	2010509567	A	3/2010
JP	2010156706	A	7/2010
JP	2010249838	A	11/2010
JP	2011519021	A	6/2011
JP	2012159356	A	8/2012
JP	2013102478	A1	4/2013
JP	2013088215	B2	5/2013
JP	2015503753	A	2/2015
JP	2015055531	A	3/2015
JP	2010507785	A	3/2020
WO	2000/064557	A1	11/2000
WO	2002029414	A3	4/2002
WO	2007087534	A2	8/2007
WO	2008005846	A2	1/2008
WO	2009091933	A1	7/2009
WO	2009125316	A2	10/2009
WO	2016035139	A1	10/2016

OTHER PUBLICATIONS

Fang et al., Determination of Free Fatty Acids by High Performance Liquid Chromatography with Fluorescence Detection and Identification with Mass Spectrometry; 2007, Chinese Journal of Analytical Chemistry; vol. 35, No. 4, 6-pages.

Huang et al., Comparative Analysis of Proteomics at Different Developmental Stages of Buffalo Testicular Seminiferous Tubules by TMT-Coupled 2D LC-MS/MS; 2014, Acta Veterinaria et Zootechnica Sinica; vol. 45, No. 8, pp. 1265-1273.

Gygi et al., Quantitative analysis of complex protein mixtures using isotope-coded affinity tags; Nature Biotechnology, Oct. 1999, vol. 17, pp. 994-999.

* cited by examiner

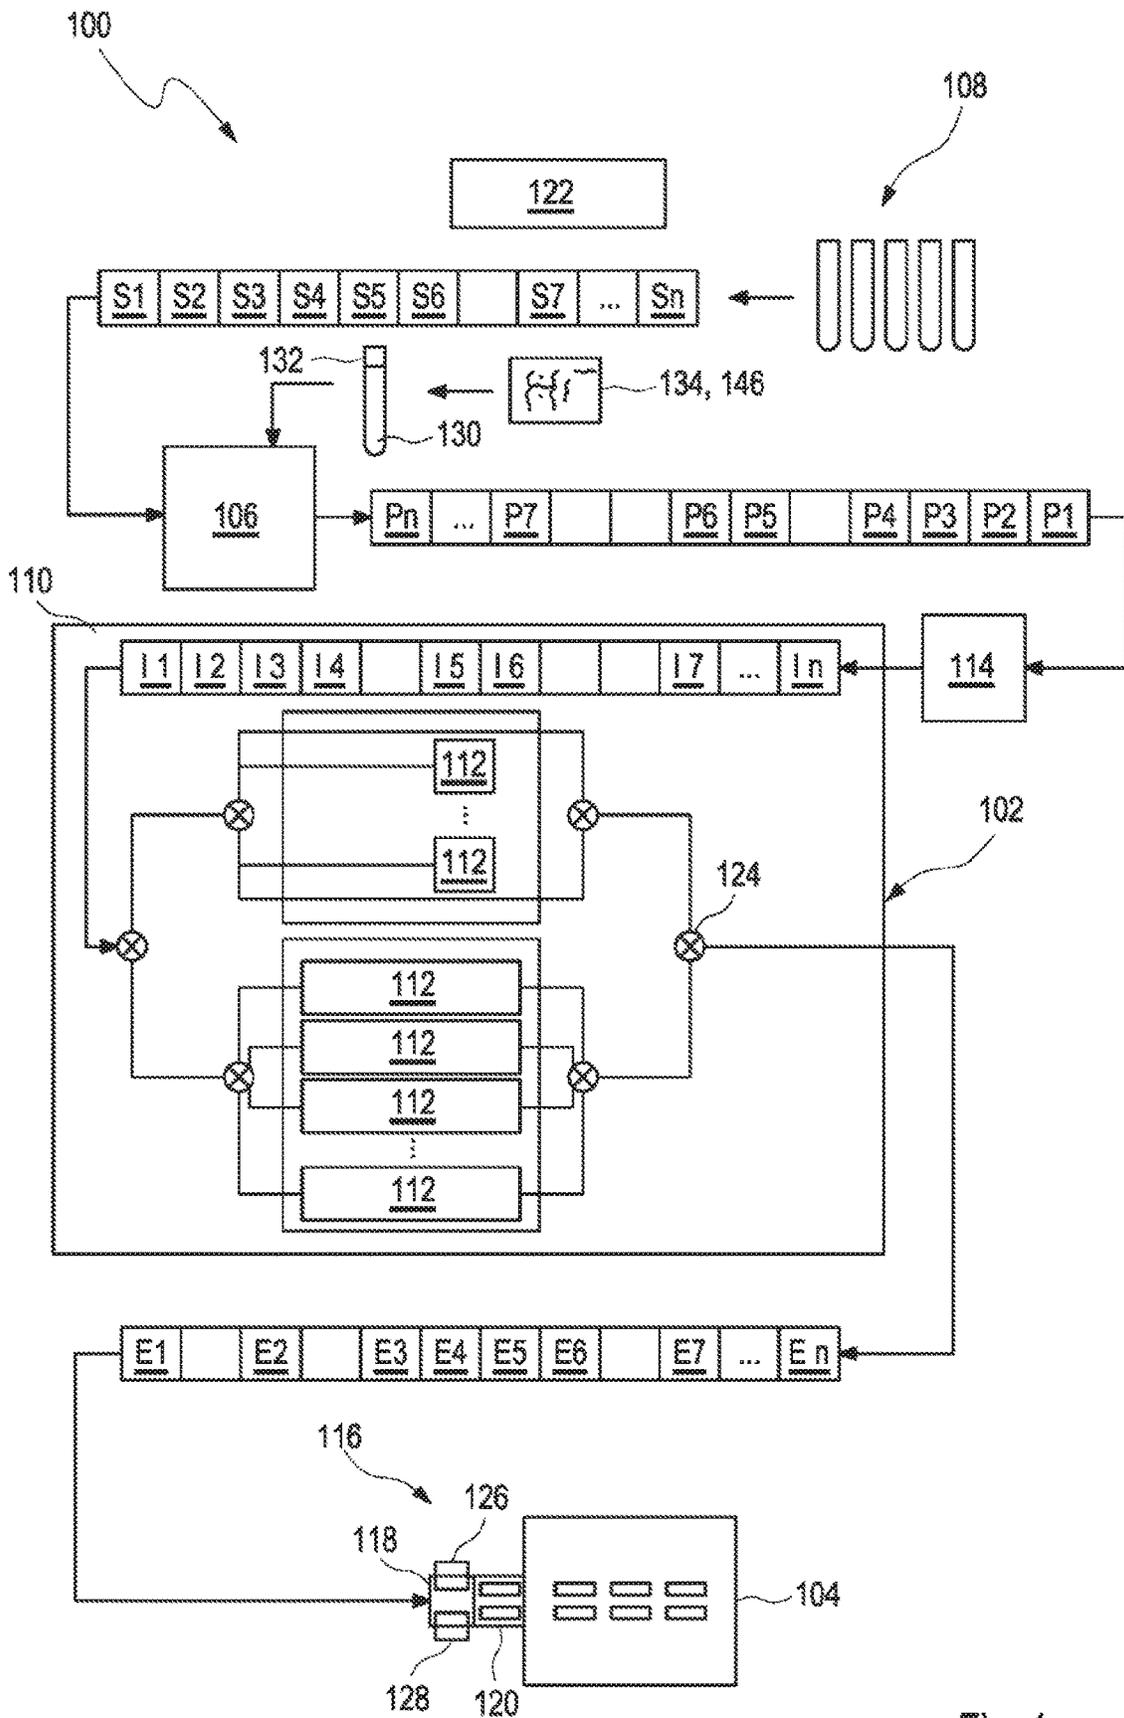


Fig. 1

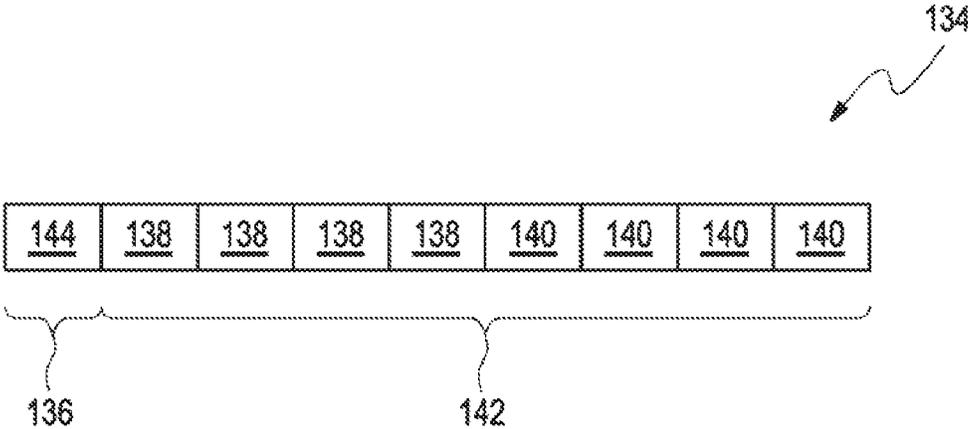


Fig. 2

METHOD FOR IDENTIFYING A REAGENT DURING A PROCESS IN AN ANALYSIS SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of International Patent Application No. PCT/EP2017/084027, filed 21 Dec. 2017, which claims the benefit of European Patent Application No. 16206595.7, filed 23 Dec. 2016, the disclosures of which are hereby incorporated herein by reference in their entirety.

TECHNICAL FIELD

The present disclosure relates to a method for identifying a reagent during a process in an analysis system.

BACKGROUND

There is growing interest for the implementation of mass spectrometry and more specifically of liquid chromatography coupled to tandem mass spectrometry (LC-MS/MS) in different types of laboratories such as a clinical laboratory. The number of published methods especially for small molecules in therapeutic drug monitoring or drug of abuse testing is increasing.

Some ready to use kits for pre-validated clinical MS applications are becoming commercially available. The use of mass spectrometry, however, even in connection with such kits, may not be regulatory approved for clinical diagnostics. This is mostly because of lack of standardized procedures, except for a very few analytes, and because of the still large number of user dependent factors, e.g., due to a number of manual steps that are still conducted and the diversity of hardware components that may be used and combined, and that play a role in delivering reliable and reproducible results of clinical relevance. In particular, sample preparation is typically a manual and tedious procedure. Protein precipitation with subsequent centrifugation is the most popular method to remove unwanted and potentially disturbing sample matrix. The use of kits may in part facilitate sample preparation that can be at least in part automated. Kits are however available only for a limited number of analytes of interest and the entire process from sample preparation, to separation and detection remains complex, requiring the attendance of highly trained laboratory personnel to run highly sophisticated instruments.

Also, typically, a batch approach is followed, where a batch of samples prepared in advance under the same preparation conditions undergo consecutive separation runs under the same separation conditions. This approach however does not enable high throughput and is not flexible, e.g., does not allow re-scheduling (changing a pre-defined processing sequence) in view for example of incoming emergency samples that have higher priority and have to be processed first.

The implementation of liquid chromatography coupled to tandem mass spectrometry allows to process several samples in parallel. The samples usually have to be prepared before being processed through the LC-MS-system. For this purpose, different types of reagents are used. At least one of these reagents is added to the sample for preparation thereof. Ensuring reagent identity and quality is an essential feature in automated systems for mass spectrometric analysis. Currently, it is in the responsibility of the user to ensure that the correct reagents are loaded onto the system, including iden-

tity and quality of the reagents and correct connection to the different flow paths. Currently there is no automated direct control available by the system. Further, ensuring flow path integrity is an essential feature in highly parallelized LC systems for mass spectrometric analysis. Currently this is ensured only by timing and positioning of flow diverting valves.

BRIEF SUMMARY

It is against the above background that the embodiments of the present disclosure provide certain unobvious advantages and advancements over the prior art. In particular, the inventors have recognized a need for improvements in a method for identifying a reagent during a process in an analysis system, and wherein the analysis system can comprise a liquid chromatograph and a mass spectrometer.

Although the embodiments of the present disclosure are not limited to specific advantages or functionality, it is noted that the present disclosure aims to provide an automated direct control of the reagent in an analysis system using liquid chromatography coupled to mass spectrometry by the mass spectrometric detector itself. Thus, the disclosed embodiments aim to provide a convenient and reliable method which, therefore, is suitable for specific analytical methods such as clinical diagnostics. In particular, high-throughput, e.g., up to 100 samples/hour or more with random access sample preparation and LC separation can be obtained while the respective reagents may be identified throughout the complete process. Moreover, the method can be fully automated increasing the walk-away time and decreasing the level of skills required.

In accordance with one embodiment of the present disclosure, a method for identifying a reagent during a process in an analysis system is provided, wherein the analysis system comprises a liquid chromatograph and a mass spectrometer, the method comprising: providing a reagent, adding at least one chemical substance to the reagent with a concentration being above a detection level of the mass spectrometer, processing the reagent together with the chemical substance with the analysis system, and identifying the reagent based on a detection of a substance detection signal of the mass spectrometer representing the chemical substance.

Embodiments of the disclosed method for identifying a reagent during a process in an analysis system have the features of the independent claim. Further embodiments of the disclosure, which may be realized in an isolated way or in any arbitrary combination, are disclosed in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The following detailed description of the embodiments of the present disclosure can be best understood when read in conjunction with the following drawings, where like structure is indicated with like reference numerals and in which:

FIG. 1 shows a schematic representation of an analysis system and a method for tracking a sample identity during a process in an analysis system, and

FIG. 2 shows schematically the construction a chemical substance.

Skilled artisans appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to

other elements to help improve understanding of the embodiments of the present disclosure.

DETAILED DESCRIPTION

As used in the following, the terms “have”, “comprise” or “include” or any arbitrary grammatical variations thereof are used in a non-exclusive way. Thus, these terms may both refer to a situation in which, besides the feature introduced by these terms, no further features are present in the entity described in this context and to a situation in which one or more further features are present. As an example, the expressions “A has B”, “A comprises B” and “A includes B” may both refer to a situation in which, besides B, no other element is present in A (i.e., a situation in which A solely and exclusively consists of B) and to a situation in which, besides B, one or more further elements are present in entity A, such as element C, elements C and D or even further elements.

Further, it shall be noted that the terms “at least one”, “one or more” or similar expressions indicating that a feature or element may be present once or more than once typically will be used only once when introducing the respective feature or element. In the following, in most cases, when referring to the respective feature or element, the expressions “at least one” or “one or more” will not be repeated, non-withstanding the fact that the respective feature or element may be present once or more than once.

Further, as used in the following, the terms “preferably”, “more preferably”, “particularly”, “more particularly”, “specifically”, “more specifically”, “typically”, “more typically”, or similar terms are used in conjunction with additional/alternative features, without restricting alternative possibilities. Thus, features introduced by these terms are additional/alternative features and are not intended to restrict the scope of the claims in any way. The disclosure may, as the skilled person will recognize, be performed by using alternative features. Similarly, features introduced by “in an embodiment of the disclosure” or similar expressions are intended to be additional/alternative features, without any restriction regarding alternative embodiments of the disclosure, without any restrictions regarding the scope of the disclosure and without any restriction regarding the possibility of combining the features introduced in such way with other additional/alternative or non-additional/alternative features of the disclosure.

According to the disclosed method, a method for identifying a reagent during a process in an analysis system disclosed. The analysis system comprises a liquid chromatograph and a mass spectrometer. The method comprises:

- providing a reagent,
- adding at least one chemical substance to the reagent with a concentration being above a detection level of the mass spectrometer,
- processing the reagent together with the chemical substance by means of the analysis system
- identifying the reagent based on a detection of a substance detection signal of the mass spectrometer representing the chemical substance.

The term “analysis system” as used herein encompasses any system comprising at least a liquid chromatograph and a mass spectrometer configured to obtain a measurement value. An analysis system is operable to determine via various chemical, biological, physical, optical or other technical procedures a parameter value of a sample or a component thereof. An analysis system may be operable to measure said parameter of the sample or of at least one

analyte and return the obtained measurement value. The list of possible analysis results returned by the analyzer comprises, without limitation, concentrations of the analyte in the sample, a digital (yes or no) result indicating the existence of the analyte in the sample (corresponding to a concentration above the detection level), optical parameters, DNA or RNA sequences, data obtained from mass spectroscopy of proteins or metabolites and physical or chemical parameters of various types. An analysis system may comprise units assisting with the pipetting, dosing, and mixing of samples and/or reagents. The analysis system may comprise a reagent holding unit for holding reagents to perform the assays. Reagents may be arranged for example in the form of containers or cassettes containing individual reagents or group of reagents, placed in appropriate receptacles or positions within a storage compartment or conveyor. It may comprise a consumable feeding unit. The analysis system may comprise a process and detection system whose workflow is optimized for certain types of analysis. Examples of such analysis systems are clinical chemistry analyzers, coagulation chemistry analyzers, immunochemistry analyzers, urine analyzers, nucleic acid analyzers, used to detect the result of chemical or biological reactions or to monitor the progress of chemical or biological reactions.

The analysis system may be designed as a clinical diagnostics system or may be part of a clinical diagnostics system.

A “clinical diagnostics system” as used herein refers to a laboratory automated apparatus dedicated to the analysis of samples for in vitro diagnostics. The clinical diagnostics system may have different configurations according to the need and/or according to the desired laboratory workflow. Additional configurations may be obtained by coupling a plurality of apparatuses and/or modules together. A “module” is a work cell, typically smaller in size than the entire clinical diagnostics system, which has a dedicated function. This function can be analytical but can be also pre-analytical or post analytical or it can be an auxiliary function to any of the pre-analytical function, analytical function or post-analytical function. In particular, a module can be configured to cooperate with one or more other modules for carrying out dedicated tasks of a sample processing workflow, e.g., by performing one or more pre-analytical and/or analytical and/or post-analytical steps. In particular, the clinical diagnostics system can comprise one or more analytical apparatuses, designed to execute respective workflows that are optimized for certain types of analysis, e.g., clinical chemistry, immunochemistry, coagulation, hematology, liquid chromatography separation, mass spectrometry, etc. Thus the clinical diagnostic system may comprise one analytical apparatus or a combination of any of such analytical apparatuses with respective workflows, where pre-analytical and/or post analytical modules may be coupled to individual analytical apparatuses or be shared by a plurality of analytical apparatuses. In alternative pre-analytical and/or post-analytical functions may be performed by units integrated in an analytical apparatus. The clinical diagnostics system can comprise functional units such as liquid handling units for pipetting and/or pumping and/or mixing of samples and/or reagents and/or system fluids, and also functional units for sorting, storing, transporting, identifying, separating, detecting.

The term “sample” as used herein refers to a biological material suspected of containing one or more analytes of interest and whose detection, qualitative and/or quantitative, may be associated to a clinical condition. The sample can be derived from any biological source, such as a physiological

fluid, including, blood, saliva, ocular lens fluid, cerebral spinal fluid, sweat, urine, milk, ascites fluid, mucous, synovial fluid, peritoneal fluid, amniotic fluid, tissue, cells or the like. The sample can be pretreated prior to use, such as preparing plasma from blood, diluting viscous fluids, lysis or the like; methods of treatment can involve filtration, centrifugation, distillation, concentration, inactivation of interfering components, and the addition of reagents. A sample may be used directly as obtained from the source in some cases or following a pretreatment and/or sample preparation workflow to modify the character of the sample, e.g., after adding an internal standard, after being diluted with another solution or after having being mixed with reagents, e.g., to enable carrying out one or more in vitro diagnostic tests, or for enriching (extracting/separating/concentrating) analytes of interest and/or for removing matrix components potentially interfering with the detection of the analyte(s) of interest. The term "sample" is tendentially used to indicate a sample before sample preparation whereas the term "prepared sample" is used to refer to samples after sample preparation. In non-specified cases the term "sample" may generally indicate either a sample before sample preparation or a sample after sample preparation or both. Examples of analytes of interest are vitamin D, drugs of abuse, therapeutic drugs, hormones, and metabolites in general. The list is however not exhaustive.

The term "liquid chromatograph" as used herein refers to an apparatus configured to be used for liquid chromatography (LC). LC is a separation technique in which the mobile phase is a liquid. It can be carried out either in a column or a plane. Present day liquid chromatography that generally utilizes very small packing particles and a relatively high pressure is referred to as high performance liquid chromatography (HPLC). In HPLC the sample is forced by a liquid at high pressure (the mobile phase) through a column that is packed with a stationary phase composed of irregularly or spherically shaped particles, a porous monolithic layer, or a porous membrane. HPLC is historically divided into two different sub-classes based on the polarity of the mobile and stationary phases. Methods in which the stationary phase is more polar than the mobile phase (e.g., toluene as the mobile phase, silica as the stationary phase) are termed normal phase liquid chromatography (NPLC) and the opposite (e.g., water-methanol mixture as the mobile phase and C18=octadecylsilyl as the stationary phase) is termed reversed phase liquid chromatography (RPLC).

The term "mass spectrometer" as used herein refers to an apparatus configured to be used for mass spectrometry (MS). MS is an analytical technique that ionizes chemical species and sorts the ions based on their mass to charge ratio. In simpler terms, a mass spectrum measures the masses within a sample. Mass spectrometry is used in many different fields and is applied to pure samples as well as complex mixtures. A mass spectrum is a plot of the ion signal as a function of the mass-to-charge ratio. These spectra are used to determine the elemental or isotopic signature of a sample, the masses of particles and of molecules, and to elucidate the chemical structures of molecules, such as peptides and other chemical compounds. In a typical MS procedure, a sample, which may be solid, liquid, or gas, is ionized, for example by bombarding it with electrons. This may cause some of the sample's molecules to break into charged fragments. These ions are then separated according to their mass-to-charge ratio, typically by accelerating them and subjecting them to an electric or magnetic field: ions of the same mass-to-charge ratio will undergo the same amount of deflection. The ions are detected by a mechanism capable of detecting

charged particles, such as an electron multiplier. Results are displayed as spectra of the relative abundance of detected ions as a function of the mass-to-charge ratio. The atoms or molecules in the sample can be identified by correlating known masses to the identified masses or through a characteristic fragmentation pattern.

The term "reagent" as used herein refers to a substance used for treatment of a sample in order to prepare the sample for analysis, to enable a reaction to occur, or to enable detection of a physical parameter of the sample or analyte contained in the sample. In particular, a reagent can be a substance that is or comprises a reactant, typically a compound or agent capable, e.g., of binding to or chemically transforming one or more analytes present in a sample or an unwanted matrix component of the sample. Examples of reactants are enzymes, enzyme substrates, conjugated dyes, protein-binding molecules, ligands, nucleic acid binding molecules, antibodies, chelating agents, promoters, inhibitors, epitopes, antigens, and the like. However, the term reagent is used to include any fluid that can be added to a sample including a dilution liquid, including water or other solvent or a buffer solution, or a substance that is used for disruption of specific or nonspecific binding of an analyte to a protein, binding proteins or surfaces. A sample may be provided for example in sample containers such as sample tubes, including primary tubes and secondary tubes, or multi-well plates, or any other sample carrying support. Reagents may be arranged for example in the form of containers or cassettes containing individual reagents or group of reagents and placed in appropriate receptacles or positions within a storage compartment or conveyor. Other types of reagents or system fluids may be provided in bulk containers or via a line supply.

The term "chemical substances" as used herein refers to any chemical substance being different from the reagent to which the substance is allocated or added. Basic requirement is that the used chemical substance shows almost identical behavior during the reagent processing and chromatography than the reagent of interest as it has to follow the same workflow as the reagent. This could be achieved by using chemical isotopes or substances with similar polarity as the reagent.

With the disclosed method, a possibility for chemical coding is provided. The possibility of chemical coding is a special feature which is made possible by the high multiplexing capabilities of mass spectrometric detection, which enables the detection of additional signals such as background signals at any time during the measurement provided that the concentration of the chemical substance is sufficiently high so as to be above the detection level of the mass spectrometer. A combination of several markers (present/not present; high/low concentration, etc.) would allow unambiguously labeling of all reagents which are on the system. The chemical substance is spiked into the system reagent(s) during production of the specific reagent lot which are mainly HPLC eluents like water, acetonitrile, methanol and the like. The chemical substance is present in the LC-MS system background signals at any time during the analysis. Thus, the identity of the specific reagent lot can be traced back during any sample analysis to the production event and manufacturer.

As it is likely that the chemical substances are present as minor, trace components in the system reagents (solvents) and will be continuously infused into the analytical system such as HPLC column, trapping column, mass spectrometric ion source and the like, any unrequested enrichment of these trace components has to be avoided as this could affect the

analysis system. Thus for tracking purpose the used chemicals should have specific elution and detection behavior, depending on the used chromatographic conditions.

With the disclosed method, the chemical substance(s) is (are) present in the solvent in concentrations levels which may be easily detected by mass spectrometer without any further enrichment steps. Polarity conditions ensure that the chemical substance(s) is (are) not retained on the chromatographic stationary phase during the whole analysis time, for example high polar chemical substance(s) and medium polar to low polar eluent system on reversed phase material. This results in a constant signal background of the chemical substance(s) which could be monitored continuously by the mass spectrometric detector and allows readout of the chemical substance(s) at any time during the analysis.

Particularly, the reagent may be continuously identified during the process. The term "continuously identified" as used herein refers to a permanent identification within a time range from the input of the reagent into the analysis system to the discharge or removal of the reagent from the analysis system. Thus, as long as the reagent is present in the analysis system, it may be identified. This is possible, as the chemical substance causes a background signal of the mass spectrometer.

The chemical substance may be configured to prevent retaining thereof on a stationary phase of the liquid chromatograph. Thus, it is ensured that the chemical substance follows the reagent throughout the workflow such that reagent identity is unambiguously detectable.

For example, the polarity and the molecular weight of the chemical substance may be adapted to the stationary phase of the liquid chromatograph such that the chemical substance is prevented from being retained on the stationary phase of the liquid chromatograph.

The polarity of the chemical substance may be adapted by means of using a mixture of isobaric oligomers of the chemical substance. Thus, the used chemical substances show almost identical behavior during the reagent processing and chromatography as the reagent of interest. Thereby, identity of the reagents may be unambiguously detected.

The molecular weight may adapted by using homologs, derivatives or isotope labelling of the chemical substance. Thus, the molecular weight may be adapted in a rather simple manner.

The liquid chromatograph may comprise a liquid chromatography separation station comprising a plurality of liquid chromatography channels, wherein the chemical substance is assigned to one of the plurality of liquid chromatography channels.

The term "liquid chromatograph separation station" as used herein refers to an analytical apparatus or module or a unit in an analytical apparatus designed to subject the prepared samples to chromatographic separation in order for example to separate analytes of interest from matrix components, e.g., remaining matrix components after sample preparation that may still interfere with a subsequent detection, e.g., a mass spectrometry detection, and/or in order to separate analytes of interest from each other in order to enable their individual detection. According to an embodiment, the liquid chromatograph separation station is an intermediate analytical apparatus or module or a unit in an analytical apparatus designed to prepare a sample for mass spectrometry and/or to transfer the prepared sample to a mass spectrometer. In particular, the liquid chromatograph separation station is a multi-channel liquid chromatograph separation station comprising a plurality of liquid chromatography channels.

A "liquid chromatography channel" is a fluidic line comprising at least one capillary tubing and/or liquid chromatography column comprising a stationary phase selected according to the type of sample(s) and analytes and through which a mobile phase is pumped in order to trap and/or separate and elute and/or transfer analytes of interest under selected conditions, e.g., according to their polarity or log P value, size or affinity, as generally known. The at least one liquid chromatography column in the at least one liquid chromatography channel may be exchangeable. In particular, the liquid chromatography may comprise more liquid chromatography columns than liquid chromatography channels, where a plurality of liquid chromatography columns may be interchangeably coupled to the same liquid chromatography channel. A capillary tubing may bypass a liquid chromatography column or may allow adjustment of dead volumes to fine-tune elution time windows.

The liquid chromatography separation station typically further comprises also a sufficient number of pumps, e.g., binary pumps in case of conditions requiring the use of elution gradients, and several switching valves.

Thus, by detecting the chemical substance at the mass spectrometer, it may be detected whether the reagent is associated with the correct or target channel.

Particularly, a flow of the reagent through one of the channels may be tracked. Thus, it may be detected whether the reagent flows through the correct or target channel.

The method may further comprise detecting a flow of the reagent through the channel to which the chemical substance is assigned by detecting whether an actual detection signal of the mass spectrometer includes a reagent detection signal representing the reagent and the substance detection signal. Thus, if both the reagent detection signal representing the reagent and the substance detection signal are detected, a flow of the reagent through the target channel may be detected.

The chemical substance may be assigned to one of the plurality of liquid chromatography channels depending on the type of reagent. Thus, an effective assignment of the reagent to the channels is provided.

The method may further comprise adding a composition of different chemical substances to the reagent, processing the reagent together with the composition of chemical substances by means of the analysis system, and identifying the reagent based on a detection of a substance detection signal pattern of the mass spectrometer including substance detection signals representing the composition of chemical substances. Thus, a chemical coding for the reagent is provided improving the detection quality for detecting the identity of the reagent.

The method may further comprise providing a plurality of reagents, adding a composition of different chemical substances to each of the plurality of reagents, wherein the compositions added to the plurality of reagents are different from one another, processing the plurality of reagents together with the compositions of chemical substances by means of the analysis system, and identifying each of the plurality of reagents based on a detection of substance detection signal patterns of the mass spectrometer including substance detection signals representing the different compositions of chemical substances. Thus, even a plurality of reagents which are processed in a parallel manner or at the same time may be unambiguously and reliably identified. Particularly, the provision of a composition of different chemical substances allows to provide a chemical coding of the respective reagents such that the reagents may be unambiguously identified.

The number of compositions may correspond to the number of liquid chromatography channels. Thus, to each channel a kind of signature may be assigned.

The chemical substances may differ from one another at least by the molecular weight. Thus, a signature is generated by a variable composition of defined substances, which are chemically different or stable isotopes of one chemical substance, with different molecular weight, wherein the applied concentration of each species is typically equal. The number of digital patterns, which are needed, is equal to the number of flow paths or channels which have to be differentiated. For example, five flow paths or channels need five different chemical codes provided by the compositions only.

The chemical substance may be at least one element selected from the group consisting of: peptides, derivatives of peptides, peptide nucleic acids, oligonucleotides, carbohydrates, derivatives of carbohydrates and oligomers. Thus, substances which may be well handled may be used.

The method may further comprise generating a code by adding at least two different chemical substances to the reagent with each chemical substance having a predetermined concentration, wherein the predetermined concentration of at least one of the chemical substances is above a detection level of the mass spectrometer. Thus, a safe code may be generated in a rather simple manner by varying the concentration of at least two different chemical substances.

The step of adding of at least one chemical substance to the reagent may be carried out in a factory made step. Thus, it is not the user of the analysis system which has to add the chemical substance to the reagent but this is done beforehand by the manufacturer of the reagent. Thereby, the identity and quality of the reagent is ensured as the reagent may not be manipulated by the user of the analysis system. Thus, the chemical coding of the reagent by the manufacturer allows to detect if the reagent has been manipulated or modified by the user of the analysis system.

The disclosure further provides and proposes a computer program including computer-executable instructions for performing the method according to the present disclosure in one or more of the embodiments enclosed herein when the program is executed on a computer or computer network. Specifically, the computer program may be stored on a computer-readable data carrier. Thus, specifically, one, more than one or even all of the method steps as indicated above may be performed by using a computer or a computer network, typically by using a computer script.

The disclosure further provides and proposes a computer program product having program code means, in order to perform the method according to the present disclosure in one or more of the embodiments enclosed herein when the program is executed on a computer or computer network. Specifically, the program code means may be stored on a computer-readable data carrier.

Further, the disclosure provides and proposes a data carrier having a data structure stored thereon, which, after loading into a computer or computer network, such as into a working memory or main memory of the computer or computer network, may execute the method according to one or more of the embodiments disclosed herein.

The disclosure further proposes and discloses a computer program product with program code means stored on a machine-readable carrier, in order to perform the method according to one or more of the embodiments disclosed herein, when the program is executed on a computer or computer network. As used herein, a computer program product refers to the program as a tradable product. The product may generally exist in an arbitrary format, such as

in a paper format, or on a computer-readable data carrier. Specifically, the computer program product may be distributed over a data network.

Finally, the disclosure proposes and discloses a modulated data signal which contains instructions readable by a computer system or computer network, for performing the method according to one or more of the embodiments disclosed herein.

Typically, referring to the computer-implemented aspects of the disclosure, one or more of the method steps or even all of the method steps of the method according to one or more of the embodiments disclosed herein may be performed by using a computer or computer network. Thus, generally, any of the method steps including provision and/or manipulation of data may be performed by using a computer or computer network. Generally, these method steps may include any of the method steps, typically except for method steps requiring manual work, such as providing the samples and/or certain aspects of performing the actual measurements.

Specifically, the present disclosure further provides:

A computer or computer network comprising at least one processor, wherein the processor is adapted to perform the method according to one of the embodiments described in this description,

a computer loadable data structure that is adapted to perform the method according to one of the embodiments described in this description while the data structure is being executed on a computer,

a computer script, wherein the computer program is adapted to perform the method according to one of the embodiments described in this description while the program is being executed on a computer,

a computer program comprising program means for performing the method according to one of the embodiments described in this description while the computer program is being executed on a computer or on a computer network,

a computer program comprising program means according to the preceding embodiment, wherein the program means are stored on a storage medium readable to a computer,

a storage medium, wherein a data structure is stored on the storage medium and wherein the data structure is adapted to perform the method according to one of the embodiments described in this description after having been loaded into a main and/or working storage of a computer or of a computer network, and

a computer program product having program code means, wherein the program code means can be stored or are stored on a storage medium, for performing the method according to one of the embodiments described in this description, if the program code means are executed on a computer or on a computer network.

Summarizing the findings of the disclosed method, the following embodiments are disclosed:

Embodiment 1: Method for identifying a reagent during a process in an analysis system, wherein the analysis system comprises a liquid chromatograph and a mass spectrometer, the method comprising:

providing a reagent,

adding at least one chemical substance to the reagent with a concentration being above a detection level of the mass spectrometer,

processing the reagent together with the chemical substance by means of the analysis system, and

11

identifying the reagent based on a detection of a substance detection signal of the mass spectrometer representing the chemical substance.

Embodiment 2: Method according to embodiment 1, wherein the reagent is continuously identified during the process.

Embodiment 3: Method according to embodiment 1 or 2, wherein the chemical substance is configured to prevent retaining thereof on a stationary phase of the liquid chromatograph.

Embodiment 4: Method according to embodiment 3, wherein the polarity and the molecular weight of the chemical substance are adapted to the stationary phase of the liquid chromatograph such that the chemical substance is prevented from being retained on the stationary phase of the liquid chromatograph.

Embodiment 5: Method according to embodiment 4, wherein the polarity of the chemical substance is adapted by means of using a mixture of isobaric oligomers of the chemical substance.

Embodiment 6: Method according to embodiment 3 or 4, wherein the molecular weight is adapted by using homologs, derivatives or isotope labelling of the chemical substance.

Embodiment 7: Method according to any one of embodiments 1 to 6, wherein the liquid chromatograph comprises a liquid chromatography separation station comprising a plurality of liquid chromatography channels, wherein the chemical substance is assigned to one of the plurality of liquid chromatography channels.

Embodiment 8: Method according to embodiment 7, wherein a flow of the reagent through one of the channels is tracked.

Embodiment 9: Method according to embodiment 8, further comprising detecting a flow of the reagent through the channel to which the chemical substance is assigned by detecting whether an actual detection signal of the mass spectrometer included a reagent detection signal representing the reagent and the substance detection signal.

Embodiment 10: Method according to any one of embodiments 7 to 9, wherein the chemical substance is assigned to one of the plurality of liquid chromatography channels depending on the type of reagent.

Embodiment 11: Method according to any one of embodiments 7 to 10, further comprising adding a composition of different chemical substances to the reagent, processing the reagent together with the composition of chemical substances by means of the analysis system, and identifying the reagent based on a detection of a substance detection signal pattern of the mass spectrometer including substance detection signals representing the composition of chemical substances.

Embodiment 12: Method according to embodiment 11, further comprising providing a plurality of reagents, adding a composition of different chemical substances to each of the plurality of reagents, wherein the compositions added to the plurality of reagents are different from one another, processing the plurality of reagents together with the compositions of chemical substances by means of the analysis system, and identifying each of the plurality of reagents based on a detection of substance detection signal patterns of the mass spectrometer including substance detection signals representing the different compositions of chemical substances.

Embodiment 13: Method according to embodiment 12, wherein the number of compositions corresponds to the number of liquid chromatography channels.

12

Embodiment 14: Method according to any one of embodiments 11 to 13, wherein the chemical substances differ from one another at least by the molecular weight.

Embodiment 15: Method according to any one of embodiments 1 to 14, wherein the chemical substance is at least one element selected from the group consisting of: peptides, derivatives of peptides, peptide nucleic acids, oligonucleotides, carbohydrates, derivatives of carbohydrates and oligomers.

Embodiment 16: Method according to any one of embodiments 1 to 15, further comprising generating a code by adding at least two different chemical substances to the reagent with each chemical substance having a predetermined concentration, wherein the predetermined concentration of at least one of the chemical substances is above a detection level of the mass spectrometer.

Embodiment 17: Method according to any one of embodiments 1 to 16, wherein adding of at least one chemical substance to the reagent is carried out in a factory made step.

In order that the embodiments of the present disclosure may be more readily understood, reference is made to the following examples, which are intended to illustrate the disclosure, but not limit the scope thereof.

With reference to FIG. 1, an example of an analysis system 100 is described. The analysis system may be a clinical diagnostic system. The analysis system 100 comprises at least a liquid chromatograph 102 and a mass spectrometer 104. In the present embodiment, the analysis system 100 further comprises a sample preparation station 106 for the automated pre-treatment and preparation of samples 108 each comprising at least one analyte of interest.

The liquid chromatograph 102 comprises a liquid chromatography separation station 110 comprising a plurality of liquid chromatography channels 112. The liquid chromatography channels 112 may differ from one another in that there are liquid chromatography channels 112 with a shorter cycle time and liquid chromatography channels 112 with a longer cycle time. However, the liquid chromatography separation station 110 may comprise a plurality of only faster liquid chromatography channels 112, or a plurality of only slower liquid chromatography channels 112. The analysis system 100 further comprises a sample preparation/liquid chromatography interface 114 for inputting prepared samples into any one of the liquid chromatography channels 112.

The analysis system 100 further comprises a liquid chromatography/mass spectrometer interface 116 for connecting the liquid chromatography separation station 110 to the mass spectrometer 104. The liquid chromatography/mass spectrometer interface 116 comprises an ionization source 118 and an ion mobility module 120 between the ionization source 118 and the mass spectrometer 104. The ion mobility module 120 may be a high-field asymmetric waveform ion mobility spectrometry (FAIMS) module. The mass spectrometer 104 is a tandem mass spectrometer and in particular a triple quadrupole mass spectrometer, capable of multiple reaction monitoring (MRM).

The analysis system 100 further comprises a controller 122 programmed to assign the samples 108 to pre-defined sample preparation workflows each comprising a pre-defined sequence of sample preparation steps and requiring a pre-defined time for completion depending on the analytes of interest. The controller 122 is further programmed to assign (reserve in advance) a liquid chromatography channel 112 for each prepared sample depending on the analytes of interest and to plan a liquid chromatography channel input sequence 11-n for inputting the prepared samples that allows analytes of interest from different liquid chromatography

13

channels **112** to elute in a non-overlapping LC eluate output sequence **E1-n** based on expected elution times. The controller **122** is further programmed to set and initiate a sample preparation start sequence **S1-n** that generates a prepared sample output sequence **P1-n** that matches the liquid chromatography channel input sequence **I1-n**.

In FIG. 1, each sample of the sample preparation start sequence **S1-n**, each prepared sample of the prepared sample output sequence **P1-n** and liquid chromatography channel input sequence **I1-n**, each liquid chromatography eluate of the liquid chromatography eluate output sequence **E1-n** is indicated in a segment of a sequence comprising non-overlapping adjacent segments, each segment representing schematically one reference period. Each sequence is thus a sequence of reference periods or time units, the length of which can be fixed and remains constant across the different sequences.

Preparation of new samples in the sample preparation start sequence **S1-n** is started with a frequency of one sample per reference period or at intervals separated by one or more reference periods, indicated by empty segments in the sequence, in which no sample preparation is started.

Also, preparation of samples in the prepared sample output sequence **P1-n** is completed with a frequency of one prepared sample per reference period or at intervals separated by one or more reference periods, indicated by empty segments in the sequence, in which no sample preparation is completed.

Also, the prepared samples are inputted in the respective assigned liquid chromatography channels **112** according to the liquid chromatography channel input sequence **I1-n** with a frequency of one liquid chromatography channel input per reference period or at intervals separated by one or more reference periods, indicated by empty segments in the sequence, in which no liquid chromatography channel input takes place.

Also, the liquid chromatography eluates in the liquid chromatography eluate output sequence **E1-n** are outputted with a frequency of one liquid chromatography eluate per reference period or at intervals separated by one or more reference periods, indicated by empty segments in the sequence, in which no liquid chromatography eluate is outputted.

The liquid chromatography channels **112** are alternately connectable to the liquid chromatography/mass spectrometer interface **116** and the controller **122** controls a valve switching **124** according to the liquid chromatography eluate output sequence **E1-n** for inputting one liquid chromatography eluate at a time into the ionization source **118**. In particular, the liquid chromatography eluates in the liquid chromatography eluate output sequence **E1-n** are inputted into the ionization source **118** with a frequency of one liquid chromatography eluate per reference period or at intervals separated by one or more reference periods according to the liquid chromatography eluate output sequence **E1-n**.

The ionization source **118** is a double ionization source, including an ESI source **126** and an APCI source **128**, where depending on the liquid chromatography eluate in the liquid chromatography eluate output sequence **E1-n** and on the analyte(s) of interest contained therein the controller **122** may select one of the two ionization sources **126**, **128** that is most appropriate. When setting the sample preparation start sequence **S1-n**, the controller **122** may group together (place adjacent to each other in the sequence) samples also according to the ionization source **126**, **128** so that frequent switch between ionization sources **126**, **128** is prevented.

14

Ionization source switching may be planned during one or more empty reference periods, for example.

With continued reference to FIG. 1, a method for identifying a reagent **130** during a process in an analysis system **112** is described. The method comprises providing a reagent **130**. The reagent **130** may be present in a reagent vessel **132** such as a container. A chemical substance **134** is added to the reagent **130** with a concentration being above a detection level of the mass spectrometer **104**. The adding of the chemical substance **134** to the reagent **130** is carried out in a factory made step. The reagent container **132** may be input to the sample preparation station **106**. The sample **108** is prepared using the reagent **130**. For example, a predefined dose of the reagent **130** is dispensed into the sample **108**. In any case, the reagent **130** together with the chemical substance **134** is added to the sample **108** before the sample **108** is input into the liquid chromatograph **102**.

Then, the sample **108** is processed together with the reagent **130** and the chemical substance **134** by means of the analysis system **100**. With other words, the thus prepared sample **108** together with the reagent **130** and the chemical substance **134** is input into the liquid chromatograph **102**, passes through the liquid chromatograph **102** and is input into the mass spectrometer **104**. By means of the mass spectrometer **104**, a component and/or components of the sample **108** is detected and measured. In addition, the reagent **130** is detected and measured by the mass spectrometer **104**. The reagent **130** is identified based on a detection of a substance detection signal of the mass spectrometer **104** including substance detection signals representing the chemical substances **132**. With other words, the signal of the mass spectrometer **104** not only includes the detection result corresponding to the reagent **130** but also includes signals unique to the chemical substance **134**, thereby allowing to unambiguously identify the reagent **130**. With this method, the reagent **130** is continuously identified during the process.

Hereinafter, specific details of chemical substances **134** that may be used with the disclosed method will be described. Basically, the reagent **130** comprises at least one analyte of interest and the chemical substances **134** are chemical isotopes and/or have similar polarity as the analyte of interest in order to ensure that the used chemicals show almost identical behavior during the sample and reagent processing and chromatography than the analyte of interest as they have to follow the same workflow as the analyte. The chemical substances **134** have an identical the molecular weight. The chemical substance **134** is at least one element selected from the group consisting of: peptides, derivatives of peptides, peptide nucleic acids, oligonucleotides, and oligomers. Further, the chemical substances are configured to prevent retaining thereof on a stationary phase of the liquid chromatograph **102**. This may be realized in that the polarity and the molecular weight of the chemical substances **134** are adapted to the stationary phase of the liquid chromatograph **102** such that the chemical substances **134** are prevented from being retained on the stationary phase of the liquid chromatograph **102**. For example, the polarity of the chemical substances **134** is adapted by means of using a mixture of isobaric oligomers or isotopes of the chemical substances **134** and the molecular weight is adapted by using homologs, derivatives or isotope labelling of the chemical substances **134**. More particularly, the polarity of the chemical substances **134** is adapted by means of using a mixture of oligomers or derivatives of the chemical substances **134**. Each oligomer component has a labeling group **136** for molecular weight coding which is measured intact or

released during a mass spectrometric process and measured by means of the mass spectrometer **104** as will be described in further detail below.

FIG. 2 shows schematically the construction of one of the chemical substances **134**. The chemical substances **134** comprise polar molecule groups **138** and lipophilic molecule groups **140**. The chemical substances **134** are formed from monomeric blocks having a structure of (polar)_n-(lipophil)_m, wherein (polar) represents a polar molecule group **138**, (lipophil) represents a lipophilic molecule group **140** and n, m are integers greater than 0. More particularly, the chemical substances are formed from monomeric building blocks n*(polar) and m*(lipophil) which are polymerized randomly, wherein (polar) represents a polar molecule group **138**, (lipophil) represents a lipophilic molecule group **140** and n, m are integers greater than 0. In the example shown in FIG. 2, the chemical substance **134** comprises four polar molecule groups **138** followed by four lipophilic molecule groups **140**. Thus, each chemical substance **134** comprises an isobaric oligomer group **142** and at least one molecular weight coding group **144**, wherein the isobaric oligomer group **142** and the molecular weight coding group **144** of the different chemical substances **134** differ from one another.

The chemical substances **134** may thus be used for chemical coding of the samples. The number of target analytes is highly depending of the application menu on the analysis system **100**. A prerequisite to the coding chemicals is therefore to cover the whole polarity range of the application menu. This is achieved by a composition of a complex functional entity of coding chemicals as described above. The monomers are designed to have identical molecular weight (isobaric building blocks), thus the overall molecular weight of this oligomeric subunit is constant independently of the ratio n/m generating an isobaric oligomer backbone. The sequence distribution of n and m may be random or not random depending on the desired readout of the mass spectrometer **104**, molecular weight only by using selected ion monitoring or by readout of molecular weight and sequence by fragmentation pattern (daughter ion scan). Attached to this building block there is a molecular weight discriminating label. Function of the molecular weight coding group **144** is to enable the generation of a variety of encoding substances with different molecular weight. This is generated for example by using different amounts of stable isotopic labels or different chemical functionality within the molecular weight coding group **144**. Function of the oligomeric building block is to generate a polarity leader in which the subunits have different chromatographic properties (logP) but have identically molecular weights. Thus, by the combination of the molecular weight coding group **144** and the isobaric oligomer backbone it is possible to generate a chemical coding-entity. Examples for monomers used for generation of the isobaric oligomer backbone are serin-propylether having a molecular weight of 129.16, homoserinethylether having a molecular weight of 129.16, and glutamine acid having a molecular weight of 129.11.

Thus, finally each molecular weight coding group **144** is linked to a mixture of an isobaric oligomer backbone which covers the whole chromatographic space of the application. Thus, independently of the polarity (logP) of the analytes of interest at least on member of each chemical coding entity or chemical substance **134** will be detected by the mass spectrometer **104** in the same time window as the analyte of interest. For example, by using 7 different molecular weight coding group **144** attached to the same isobaric oligomer backbone it is possible to generate a matrix of 107 different

chemical codes. In this case, the only differentiation criterion is the molecular weight (SIM readout only).

As described above, the liquid chromatography separation station **110** comprises a plurality of liquid chromatography channels **112**. Thus, a plurality of samples **108** and reagents **130** may be processed at the same time. The chemical substance **134** is assigned to one of the plurality of liquid chromatography channels **112**. For example, the chemical substance **134** is assigned to one of the plurality of liquid chromatography channels **112** depending on the type of reagent **130**. Thereby, a flow of the reagent **130** through one of the channels **112** may be tracked. Particularly, a flow of the reagent **130** through the channel **112** to which the chemical substance **134** is assigned may be detected by detecting whether an actual detection signal of the mass spectrometer **104** includes a reagent detection signal representing the reagent **134** and the substance detection signal. With other words, it may be detected whether the reagent **130** has passed the target or correct channel **112**.

The method may further comprise providing a plurality of reagents **130**, adding a composition **146** of different chemical substances **134** to each of the plurality of reagents **130**, wherein the compositions **146** added to the plurality of samples **108** are different from one another, processing the plurality of reagents **130** together with the compositions **146** of chemical substances **134** by means of the analysis system **100**, and identifying each of the plurality of reagents **130** based on a detection of substance detection signal patterns of the mass spectrometer **104** including substance detection signals representing the different compositions **146** of chemical substances **134**. The chemical substances **134** differ from one another at least by the molecular weight. In this case, the number of compositions **146** may correspond to the number of liquid chromatography channels **112**. Thus, a code may be generated by adding at least two different chemical substances **134** to the reagent **130**. For this purpose, each chemical substance **134** has a predetermined concentration, wherein the predetermined concentration of at least one of the chemical substances **134** is above a detection level of the mass spectrometer **104**.

LIST OF REFERENCE NUMBERS

100	analysis system
102	liquid chromatograph
104	mass spectrometer
106	sample preparation station
108	sample
110	liquid chromatography separation station
112	liquid chromatography channel
114	sample preparation/liquid chromatography interface
116	liquid chromatography/mass spectrometer interface
118	ionization source
120	ion mobility module
122	controller
124	valve switching
126	ESI source
128	APCI source
130	composition
134	chemical substance
136	labeling group
138	polar molecule groups
140	lipophilic molecule group
142	isobaric oligomer group
144	molecular weight coding group
146	composition

What is claimed is:

1. A method for identifying a reagent lot during a process in an analysis system, wherein the analysis system comprises a liquid chromatograph and a mass spectrometer, the method comprising:

1) adding at least one chemical substance with a concentration detectable by the mass spectrometer to a reagent in a specific reagent lot, thereby coding the specific reagent lot, wherein the reagent is a solvent, the chemical substance is spiked into the reagent during production of the specific reagent lot and wherein the at least one chemical substance is selected from the group consisting of peptides, derivatives of peptides, peptide nucleic acids, oligonucleotides, carbohydrates, derivatives of carbohydrates, oligomers, and combinations thereof,

2) once added, processing the reagent and the added chemical substance together, using the analysis system, and

3) identifying the specific reagent lot based on a detection of a substance detection signal of the at least one chemical substance using the mass spectrometer, and wherein the identity of the specific reagent lot is traced back during sample analysis during step 2).

2. The method according to claim 1, wherein the specific reagent lot is continuously identified during the process.

3. The method according to claim 1, wherein the chemical substance is configured to prevent retaining thereof on a stationary phase of the liquid chromatograph.

4. The method according to claim 3, wherein the polarity and the molecular weight of the chemical substance are adapted to the stationary phase of the liquid chromatograph such that the chemical substance is prevented from being retained on the stationary phase of the liquid chromatograph.

5. The method according to claim 4, wherein the polarity of the chemical substance is adapted by using a mixture of isobaric oligomers of the chemical substance.

6. The method according to claim 3, wherein the molecular weight is adapted by using homologs, derivatives or isotope labelling of the chemical substance.

7. The method according to claim 1, wherein the liquid chromatograph comprises a liquid chromatography separation station comprising a plurality of liquid chromatography channels, wherein the chemical substance is assigned to one of the plurality of liquid chromatography channels.

8. The method according to claim 7, wherein a flow of the reagent through one of the channels is tracked.

9. The method according to claim 8, further comprising detecting a flow of the reagent through the channel to which the chemical substance is assigned by detecting whether an actual detection signal of the mass spectrometer includes a reagent detection signal representing the reagent and the substance detection signal.

10. The method according to claim 7, wherein the chemical substance is assigned to one of the plurality of liquid chromatography channels depending on the type of reagent.

11. The method according to claim 7, further comprising adding a composition of different chemical substances to the reagent, processing the reagent together with the composition of chemical substances with the analysis system, and identifying the reagent based on a detection of a substance detection signal pattern of the mass spectrometer including substance detection signals representing the composition of chemical substances.

12. The method according to claim 11, further comprising providing a plurality of reagents, adding a composition of different chemical substances to each of the plurality of reagents, wherein the compositions added to the plurality of reagents are different from one another, processing the plurality of reagents together with the compositions of chemical substances with the analysis system, and identifying each of the plurality of reagents based on a detection of substance detection signal patterns of the mass spectrometer including substance detection signals representing the different compositions of chemical substances.

13. The method according to claim 12, wherein the number of compositions corresponds to the number of liquid chromatography channels.

14. The method according to claim 11, wherein the chemical substances differ from one another at least by the molecular weight.

15. The method according to claim 1, further comprising generating a code by adding at least two different chemical substances to the reagent with each chemical substance having a predetermined concentration, wherein the predetermined concentration of at least one of the chemical substances is above a detection level of the mass spectrometer.

* * * * *