



- (51) **International Patent Classification:**
C11D 7/50 (2006.01) *C11D 17/00* (2006.01)
- (21) **International Application Number:**
PCT/US2015/042448
- (22) **International Filing Date:**
28 July 2015 (28.07.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/444,004 28 July 2014 (28.07.2014) US
- (71) **Applicant:** THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).
- (72) **Inventors:** VETTER, Nicholas, David; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US). SIVIK, Mark, Robert; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US). FLITER, Kristi, Lynn; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US). WHITING, Patrick, B.; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US). BROENING, Harry, W.; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US). KENEALLY, Corey, James; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).
- (74) **Agent:** KREBS, Jay A.; c/o THE PROCTER & GAMBLE COMPANY, Global Patent Services, One Procter & Gamble Plaza, C8-229, Cincinnati, Ohio 45202 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— *with international search report (Art. 21(3))*



WO 2016/018898 A1

(54) **Title:** FABRIC TREATMENT COMPOSITION COMPRISING AN AMINOSILOXANE POLYMER NANOEMULSION

(57) **Abstract:** The present invention relates to fabric treatment compositions containing aminosiloxane polymer nanoemulsions. More specifically, the present invention relates to fabric treatment compositions containing aminosiloxane polymer nanoemulsions that may be used to protect surfaces from being soiled or wetted.

FABRIC TREATMENT COMPOSITION COMPRISING AN AMINOSILOXANE POLYMER NANOEMULSION

FIELD OF THE INVENTION

5 The present invention relates to fabric treatment compositions comprising aminosiloxane polymer nanoemulsions and methods of making said treatment compositions. More specifically, the present invention relates to a process for making fabric treatment compositions comprising aminosiloxane polymer nanoemulsions that may be used to protect surfaces from being soiled or wetted.

10

BACKGROUND OF THE INVENTION

Numerous attempts have been made to develop a treatment composition that provides protection of surfaces by repelling water and oil based soils from the surface. Fluoropolymers, such as those used in Scotchguard® from 3M, have become well established as soil-repellant molecules. However, fluoropolymers are not preferred due to environmental, health and safety

15

concerns, such as the potential and possibility of persistent bioaccumulation and toxicity. Amino-modified silicone microemulsions that contain an amino-modified silicone and a high concentration of both ethylene glycol monoalkyl ether and nonionic surfactant, e.g., polyoxyalkylene branched decyl ether, are known and generally described as transparent in

20

appearance and having a small particle diameter. However, these compositions have the challenge of delivering maximum hydrophobicity to a surface since they incorporate significant amounts of nonionic surfactant to obtain desired stability and particle sizes. Unfortunately, to date, the attempts at non-fluoropolymer protection of surfaces continue to demonstrate disadvantages, including low efficiency, difficulty in achieving the desired benefits

25

at affordable cost and in a preferred format, processing and formulation challenges, and product instability. A continued need exists for a non-fluoropolymer technology that delivers depositable benefits to surfaces, such as water and oily soil repellency, in a convenient and stable form and at a high efficiency. Even attempts at using non-fluoropolymer technologies have been less than successful

30

due to a general failure to recognize the importance of the order of addition of materials during the making process as well as the processing conditions themselves, in addition to optimization of the solvent system, addition of adjunct ingredients that can enhance performance, and equally the removal of adjuncts that can hinder performance. Applicants have found that by optimizing

the order of addition of the raw materials during emulsion making and finished product formulation using said emulsion, the overall stability of the emulsion and finished product can be greatly enhanced. Furthermore, the deposition efficiency and overall soil repellency benefit can be maximized, whilst minimizing the potential for negative results often seen with silicone-
5 containing compositions, such as staining or spotting of fabrics, laundry machine residues, and product discoloration.

SUMMARY OF THE INVENTION

The present invention attempts to solve one more of the needs by providing, in one aspect
10 of the invention, a method of making an aminosilicone nanoemulsion which can be incorporated into a surface treatment composition comprising the nanoemulsion. Said nanoemulsion comprising a silicone resin, an aminosiloxane polymer having an amine equivalent of less than about 0.6 meq/g, wherein said polymer has greater than about 5% but less than about 25% of terminal groups comprising hydroxyl functionality; a single organic solvent selected from the
15 group consisting of linear alcohols, branched alcohols, Guerbet alcohols, fatty esters, glycol ethers, isoparaffins, naphthols, and mixtures thereof; an aqueous carrier; a protonating agent; optionally, a deposition aid polymer selected from cationic and amphoteric polymers, and adjunct ingredients; wherein said nanoemulsion is substantially free of surfactant.

Another aspect of the invention includes treatment compositions comprising the aminosiloxane
20 polymer nanoemulsions as described herein. Other aspects of the invention include methods of making treatment compositions comprising the aminosiloxane polymer nanoemulsions and methods of treating surfaces with treatment compositions comprising the aminosiloxane polymer nanoemulsions.

DETAILED DESCRIPTION OF THE INVENTION

25 Features and benefits of the various embodiments of the present invention will become apparent from the following description, which includes examples of specific embodiments intended to give a broad representation of the invention. Various modifications will be apparent to those skilled in the art from this description and from practice of the invention. The scope is not intended to be limited to the particular forms disclosed and the invention covers all
30 modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the claims.

As used herein, the articles including “the,” “a” and “an” when used in a claim or in the specification, are understood to mean one or more of what is claimed or described.

As used herein, the terms “include,” “includes” and “including” are meant to be non-limiting.

5 As used herein, the terms “substantially free of” or “substantially free from” means that the indicated material is at the very minimum not deliberately added to the composition to form part of it, or, preferably, is not present at analytically detectable levels. It is meant to include compositions whereby the indicated material is present only as an impurity in one of the other materials deliberately included. Preferably, substantially free from surfactant means that the
10 emulsion comprises at most 1 percent by weight of surfactant, more preferably at most 0.1 percent by weight of surfactant.

As used herein, the term nanoemulsion refers to thermodynamically stable oil in water emulsions that have extremely small droplet sizes (below 750 nm, or typically below 250 nm). These materials have special properties, including optical translucency, very large dispersed
15 phase surface-to-volume ratios and long term kinetic stability. Due to similarity in appearance, translucent nanoemulsions are sometimes confused with microemulsions, which belong to another class of stable (thermodynamically) and optically clear colloidal systems. Microemulsions are spontaneously formed by “solubilizing” oil molecules with a mixture of surfactants, co-surfactants and co-solvents. The required surfactant concentration in a
20 microemulsion is typically several times higher than that in a nanoemulsion and significantly exceeds the concentration of the dispersed phase (generally, oil). Because of many undesirable side-effects caused by surfactants, this is disadvantageous or prohibitive for many applications. In addition, the stability of microemulsions is easily compromised by dilution, heating, or changing pH levels. By contrast nanoemulsions in accordance with the present invention are
25 formed by judiciously selecting solvent systems that provide adequate dissolution of the siloxanes and also exhibit some level of miscibility with water, thus a stable aqueous emulsion can be achieved without the use of surfactants. Without wishing to be bound by theory, applicants believe that choosing a solvent or solvent system whereby the solvents exhibit dual polarity, these solvents of choice can behave similarly to surfactants in solution without
30 introducing the wetting effect that surfactants typically bring. Thus, it is possible to deliver an oil-in-water emulsion, without having surfactant present, that is capable of providing maximum hydrophobicity to a target surface.

All cited patents and other documents are, in relevant part, incorporated by reference as if fully restated herein. The citation of any patent or other document is not an admission that the cited patent or other document is prior art with respect to the present invention.

In this description, all concentrations and ratios are on a weight basis of the total nanoemulsion composition, all pressures are equal to 0.10 MPa (absolute) and all temperatures are equal to 20°C unless otherwise specified.

Known aminosiloxane polymer microemulsions and methods for preparing aminosiloxane polymer microemulsions employ high levels of solvent and nonionic surfactant (e.g., 12% ethylene glycol monohexyl ether per 100% of aminosiloxane polymer and 40% polyoxyalkylene branched decyl ether per 100% of aminosiloxane polymer), and/or require high energy in the form of heat or high shearing forces in order to obtain the desired nanoparticle size. Without being bound by theory, it is believed that the presence of high levels of solvent and surfactant in the emulsion hinders the deposition of the aminosiloxane polymer on the surface that is to be treated; aminosiloxane polymer droplets in high-solvent and high-surfactant emulsions tend to stay in the emulsion, rather than deposit on the surface. This results in a poor delivery of any benefit, such as increased water repellency or oil repellency, to the surface. Such benefits may be measured as an increased time to wick on treated fabrics, a reduced dry-time for treated fabrics and/or an increased contact angle on a hard surface.

In contrast to conventional aminosiloxane polymer microemulsions, the aminosiloxane polymer nanoemulsions of the present invention comprise reduced levels of solvent and no intentionally added surfactant and may be obtained without the input of high energy to process the emulsion. Yet, the aminosiloxane polymer nanoemulsions disclosed herein provide highly efficient deposition on a target surface. Benefits derived from this deposition may generally apply in the area of repellency of water and/or water-based compositions and/or oil and/or oil-based compositions, such as water-based stains and oily soils. Without being bound by theory, it is believed that the aminosiloxane polymer nanoemulsions disclosed herein comprise self-assembled, spherical, positively charged aminosiloxane polymer nano-particles (which contain reduced levels of solvent and surfactant). These self-assembled, spherical, positively charged nano-particles exhibit efficient deposition and controlled spreading, that is believed to form a structured film on a surface that provides the repellency benefit as determined by the below specified time to wick method.

The average particle sizes of the disclosed nanoemulsions range from about 20 nm to about 750 nm, or about 20 nm to about 500 nm, or about 50 nm to about 350 nm, or about 80nm to

about 200 nm, or about 90nm to about 150 nm (as measured by Malvern Zetasizer Nano Series instrument). The disclosed nanoemulsions are generally transparent or slightly milky in appearance.

5 Silicone Resin

Typically, the aminosiloxane polymer nanoemulsion of the present invention comprises a silicone resin.

An example of a silicone resin is a mixture of polyorganosiloxane-silicone resins, where each of the one or more silicone resins of the polyorganosiloxane-silicone resin mixture contains
 10 at least about 80 mol% of units selected from the group consisting of units of the general formulas 3, 4, 5, 6:



in which R is selected from H, -OR¹⁰, or -OH residues or monovalent hydrocarbon residues with 1 to 40 carbon atoms, optionally substituted with halogens, where at least 20 mol% of the units are selected from the group consisting of units of the general formulas 5 and 6, and a maximum
 20 of 10 wt% of the R residues are -OR¹⁰ and -OH residues.

The silicone resins may preferably be MQ silicon resins (MQ) comprising at least 80 mol% of units, preferably at least 95 mol% and particularly at least 97 mol% of units of the general formula 3 and 6. The average ratio of units of the general formula 3 to 6 is preferably at least 0.25, particularly at least 0.5, preferably at most 4, and more preferably at most 1.5.


25 The silicon resins may also preferably be DT silicone resins (DT) comprising at least 80 mol% of units, preferably at least 95 mol% and particularly at least 97 mol% of units of the general formula 4 and 5. The average ratio of units of the general formula 4 to 5 is preferably at least 0.01, particularly at least 0.2, preferably at most 3.5, and more preferably at most 0.5.

Preferred halogen substituents of the hydrocarbon residues R are fluorine and chlorine. Preferred
 30 monovalent hydrocarbyl radicals R are methyl, ethyl, phenyl.

Preferred monovalent hydrocarbyl radicals R¹⁰ are methyl, ethyl, propyl and butyl.

Aminosiloxane Polymer

Suitable aminosiloxane polymers are represented by one or more liquid aminoalkyl-containing polyorganosiloxanes (P) comprising at least 80 mol% of units selected from units of the general formulae 7, 8, 9 and 10



10



where

a has the value 0 or 1,

15 **b** has the value 1 or 2,

a+b has a value of 2,

R¹ represents monovalent hydrocarbyl radicals having 1-40 carbon atoms and optionally substituted with halogens,

R² represents either

20 a) aminoalkyl radicals of the general formula 11




where

25 **R⁵** represents divalent hydrocarbyl radicals having 1-40 carbon atoms,

R⁶ represents monovalent hydrocarbyl radicals having 1-40 carbon atoms, H, hydroxymethyl or alkanoyl radicals, and

R⁷ represents a radical of the general formula 12



where

x has the value 0 or an integer value from 1 to 40, and

R^8 represents a divalent radical of the general formula 13



5 where

y has an integer value from 1 to 6, and

R^9 represents H or hydrocarbyl radicals having 1-40 carbon atoms, or

b) in the general formula (11) R^6 and R^7 combine with the nitrogen atom to form a cyclic organic radical having 3 to 8 $-CH_2-$ units, although nonadjacent $-CH_2-$ units may be replaced by units selected from $-C(=O)-$, $-NH-$, $-O-$ and $-S-$,

10 R^3 represents hydrocarbyl radicals having 1-40 carbon atoms and optionally substituted with halogens,

R^4 represents $-OR$ or $-OH$ radicals, and

wherein, in the polyorganosiloxanes (P),

15 the average ratio of the sum of units of the general formula (7) and (8) to the sum of units of the general formulae (9) and (10) is in the range from 0.5 to 500, the average ratio of units (9) to (10) being in the range from 1.86 to 100, and the polyorganosiloxanes (P) have an average amine number of at least 0.01 mequiv/g.

20 The monohydric hydrocarbyl radicals R , R^1 , R^3 , R^6 , R^9 and R^{10} may be halogen substituted, linear, cyclic, branched, aromatic, saturated or unsaturated. Preferably, the monovalent hydrocarbyl radicals R , R^1 , R^3 , R^6 , R^9 and R^{10} each have 1 to 6 carbon atoms, and particular preference is given to alkyl radicals and phenyl radicals. Preferred halogen substituents are fluorine and chlorine. Particularly preferred monovalent hydrocarbyl radicals R , R^1 , R^3 , R^6 , R^9 and R^{10} are methyl, ethyl, phenyl.

The divalent hydrocarbyl radicals R^5 may be halogen substituted, linear, cyclic, branched, aromatic, saturated or unsaturated. Preferably, the R^5 radicals have 1 to 10 carbon atoms, and particular preference is given to alkylene radicals having 1 to 6 carbon atoms, in particular propylene. Preferred halogen substituents are fluorine and chlorine.

30 Preferred R^6 radicals are alkyl and alkanoyl radicals. Preferred halogen substituents are fluorine and chlorine. Preferred alkanoyl radicals are $-C(=O)R^{11}$, where R^{11} has the meanings and

preferred meanings of \mathbf{R}^1 . Particularly preferred substituents \mathbf{R}^6 are methyl, ethyl, cyclohexyl, acetyl and H. It is particularly preferable for the \mathbf{R}^6 and \mathbf{R}^7 radicals to have the meaning H.

Preferred cyclic organic radicals formed from \mathbf{R}^6 and \mathbf{R}^7 in the general formula (11) together
5 with the attached nitrogen atom are the five and six rings, in particular the residues of pyrrolidine, pyrrolidin-2-one, pyrrolidine-2,4-dione, pyrrolidin-3-one, pyrazol-3-one, oxazolidine, oxazolidin-2-one, thiazolidine, thiazolidin-2-one, piperidine, piperazine, piperazine-2,5-dione and morpholine.

10 Particularly preferred \mathbf{R}^2 radicals are $-\text{CH}_2\text{NR}^6\text{R}^7$, $-(\text{CH}_2)_3\text{NR}^6\text{R}^7$ and $-(\text{CH}_2)_3\text{N}(\text{R}^6)(\text{CH}_2)_2\text{N}(\text{R}^6)_2$. Examples of particularly preferred \mathbf{R}^2 radicals are aminoethylamino-propyl and cyclohexylaminopropyl.

Preference is also given to mixtures (M) wherein at least 1 mol%, more preferably at least 5
15 mol%, particularly at least 20 mol% and at most 90 mol%, more preferably at most 70 mol% and particularly at most 60 mol% of the \mathbf{R}^6 and \mathbf{R}^7 radicals are acetyl radicals and the remaining \mathbf{R}^6 and \mathbf{R}^7 radicals have the meaning H.

Preferably, \mathbf{b} is 1. Preferably, $\mathbf{a+b}$ has an average value from 1.9 to 2.2.

20

Preferably, \mathbf{x} has the value 0 or a value from 1 to 18, more preferably 1 to 6.

Preferably, \mathbf{y} has the values of 1, 2 or 3.

25 Preferably, the polydiorganosiloxanes (P) comprise at least 3 and particularly at least 10 units of the general formula (7) and (8).

Preferably, the liquid aminoalkyl-containing polyorganosiloxanes (P) comprise at least 95 mol%,
30 more preferably at least 98 mol% and particularly at least 99.5 mol% of units selected from units of the general formula (7), (8), (9) and (10).

Further units of the polyorganosiloxanes (P) can be selected for example from units selected from units of the general formula (3), (4), (5) and (6).

The ratio of **a** to **b** is chosen such that the polyorganosiloxanes (P) preferably have an amine number of at least 0.1, in particular at least 0.3 mequiv/g of polyorganosiloxane (P). The amine number of the polyorganosiloxanes (P) is preferably at most 7, more preferably at most 4.0 and particularly at most 3.0 mequiv/g of polyorganosiloxane (P).

The amine number designates the number of ml of 1N HCl which are required for neutralizing 1 g of polyorganosiloxane (P).

10 The viscosity of the polyorganosiloxanes (P) is preferably at least 1 and particularly at least 10 mPa·s and preferably at most 100 000 and particularly at most 10 000 mPa·s at 25°C.

The ratio of the units of the general formulae 7 and 8 to the sum total of 9 and 10 is preferably at least 10, particularly at least 50 and preferably at most 250, particularly at most 150.

15

The ratio of units 9 to 10 is preferably at least 1.9 and particularly at least 2.0 and preferably at most 70 and particularly at most 50.

20 The polyorganosiloxanes (P) are obtainable via known chemical processes such as, for example, hydrolysis or equilibration.

Organic Solvent System

The aminosiloxane polymer nanoemulsion of the present invention comprises from about 0.1% to about 50% of one or more solvents, by weight of the aminosiloxane polymer. In certain aspects, the aminosiloxane polymer nanoemulsion comprises from about 5% to about 30% of one or more solvents, by weight of the aminosiloxane polymer. In some aspects, the aminosiloxane polymer nanoemulsion comprises from about 10% to about 25% of one or more solvents, by weight of the aminosiloxane polymer. In other aspects, the aminosiloxane polymer nanoemulsion comprises from about 15% to about 23% or from about 18% to about 21% of one or more solvents, by weight of the aminosiloxane polymer.

25 In one aspect of the invention the solvent system comprises a single solvent. Suitable solvents to be used in a single solvent system are selected from monoalcohols, polyalcohols, ethers of monoalcohols, ethers of polyalcohols, fatty esters, Guerbet alcohols, isoparaffins,

naphthols, glycol ethers or mixtures thereof, provided that if the solvent is a glycol ether it is not diethyleneglycol monobutyl ether. In some aspects, the solvent is selected from a mono-, di-, or tri-ethylene glycol monoalkyl ether that comprises an alkyl group having 1-12 carbon atoms, or a mixture thereof. Suitable alkyl groups include methyl, ethyl, propyl, butyl groups, hexyl groups, 5 heptyl groups, octyl groups, nonyl groups, decyl groups, undecyl groups, phenyl, and dodecyl groups, as well as acetate groups of each.

Suitable examples of monoethylene glycol monoalkyl ethers, include ethyleneglycol methyl ether, ethyleneglycol ethyl ether, ethyleneglycol propyl ether, ethyleneglycol butyl ether, ethyleneglycol butyl ether acetate, ethyleneglycol phenyl ether, ethyleneglycol hexyl ether, and 10 combinations thereof. Suitable examples of diethylene glycol monoalkyl ethers, include diethyleneglycol methyl ether, diethyleneglycol ethyl ether, diethyleneglycol propyl ether, diethyleneglycol butyl ether, diethyleneglycol phenyl ether, diethyleneglycol hexyl ether, and combinations thereof.

In some aspects, the solvent is selected from a mono-, di-, or tri-propylene glycol 15 monoalkyl ether that comprises an alkyl group having 1-12 carbon atoms, or a mixture thereof. Suitable alkyl groups include methyl, ethyl, propyl, butyl groups, hexyl groups, heptyl groups, octyl groups, nonyl groups, decyl groups, undecyl groups, phenyl, and dodecyl groups, as well as acetate groups of each.

Suitable examples of monopropylene glycol monoalkyl ethers, include propyleneglycol 20 methyl ether, propyleneglycol methyl ether acetate, propyleneglycol methyl ether diacetate, propyleneglycol propyl ether, propyleneglycol butyl ether, propyleneglycol phenyl ether, and combinations thereof. Suitable examples of dipropylene glycol monoalkyl ethers, include dipropyleneglycol methyl ether, dipropyleneglycol methyl ether acetate, dipropyleneglycol propyl ether, dipropyleneglycol butyl ether, and combinations thereof. Suitable examples of 25 tripropylene glycol monoalkyl ethers, include tripropyleneglycol methyl ether, tripropyleneglycol propyl ether, tripropyleneglycol butyl ether, and combinations thereof.

In some aspects the solvent is selected from fatty esters such as isopropyl esters of long chain fatty acids having 8 to 21 carbon atoms. Suitable examples of fatty esters include isopropyl laurate, isopropyl myristate, isopropyl palmitate, isopropyl stearate, isopropyl oleate, 30 isopropyl linoleate, and combinations thereof.

In some aspects, the solvent comprises a linear or branched mono- or polyhydric alcohol, or a Guerbet alcohol, such as 2-ethylhexanol, 2-butyloctanol, or 2-hexyldecanol, or mixtures thereof.

In some aspects the solvent comprises a naphthol or isoparaffin having from about 8 to about 16 carbon atoms, such as isoparaffins sold under the trade name Isopar E™, Isopar L™, Isopar G™, or Isopar M™ (available from ExxonMobile Chemicals, Houston, TX).

5 Protonating Agent

The protonating agent is generally a monoprotic or multiprotic, water-soluble or water-insoluble, organic or inorganic acid. Suitable protonating agents include, for example, formic acid, acetic acid, propionic acid, malonic acid, citric acid, hydrochloric acid, sulfuric acid, phosphoric acid, nitric acid, or mixtures thereof. In some aspects, the protonating agent is selected from formic acid, acetic acid, or a mixture thereof. In some aspects, the protonating agent is acetic acid. Generally, the acid is added in the form of an acidic aqueous solution. The protonating agent is added in an amount necessary to achieve a nanoemulsion pH of from about 3.5 to about 7.0. In certain aspects, the aminosiloxane polymer nanoemulsions comprise the protonating agent in an amount necessary to achieve a pH of from about 3.5 to about 6.5 or about 4.0 to about 6.0. In other aspects, the aminosiloxane polymer nanoemulsions comprise the protonating agent in an amount necessary to achieve a pH of most preferably from about 3.5 to about 5.0.

Water

20 The aminosilicone nanoemulsions of the present invention can be diluted to produce any desired concentration of nanoemulsion by the addition of water.

Optional Adjunct Ingredients

The aminosiloxane polymer nanoemulsions may additionally include further substances, such as preservatives, scents, corrosion inhibitors, UV absorbers, structurants, opacifiers, optical brighteners, and dyes. Examples of preservatives are alcohols, formaldehyde, parabens, benzyl alcohol, propionic acid and salts thereof and also isothiazolinones. The nanoemulsions may further include yet other additives, such as non-silicon-containing oils and waxes. Examples thereof are rapeseed oil, olive oil, mineral oil, paraffin oil or non-silicon-containing waxes, for example carnauba wax and candelilla wax incipiently oxidized synthetic paraffins, polyethylene waxes, polyvinyl ether waxes and metal-soap-containing waxes. In some aspects, the aminosiloxane polymer nanoemulsions further comprise carnauba wax, paraffin wax, polyethylene wax, or a mixture thereof. The nanoemulsions may comprise up to about 5% by

weight of the nanoemulsion or from about 0.05% to about 2.5% by weight of the nanoemulsion of such further substances.

Method of Making

5 The method for preparing the aminosiloxane polymer nanoemulsions of the present invention includes the steps of: solubilizing the silicone resin in an organic solvent or mixture of organic solvents to yield a resin solution concentration of about 80% or less, preferably of about 70% or less, more preferably of about 60% or less, or most preferably of about 55% or less, followed by mixing the resin solution with an amino siloxane polymer to obtain an amino
10 siloxane polymer:resin ratio of about 20:1, preferably about 10:1, more preferably about 7:1, most preferably about 5.8:1, and allowing the mixture to age for at least about 6 hours at room temperature; the emulsion is then prepared by adding the amino siloxane polymer:resin mixture to a vessel containing a small amount of water with agitation, optionally followed by addition of
15 a second organic solvent to aid in the dispersion of the amino siloxane polymer:resin mixture in aqueous carrier; once the solvent, silicone and carrier mixture has become homogenous, then the protonating agent is added, followed by additional amounts of carrier to produce a nanoemulsion at the desired concentration. Optional adjunct materials are then added to the mixture and agitated until thoroughly mixed.

20 Treatment Composition

The aminosiloxane polymer nanoemulsions of the present invention may be incorporated into treatment compositions or cleaning compositions, such as, but not limited to, a fabric care composition, a hard surface care composition, or a home care composition. In some aspects, the treatment composition comprises from about 0.001% to about 99% by weight of the composition,
25 of the aminosiloxane polymer nanoemulsion. In certain aspects, the treatment composition comprises from about 0.001% to about 40%, or from about 0.1% to about 35%, or from about 1% to about 30%, or from about 5% to about 25%, or from about 9% to about 22% or from about 13% to about 18% of the aminosiloxane polymer nanoemulsion, by weight of the composition.

In one aspect, the fabric treatment composition comprising a nanoemulsion of the present
30 invention may be made according to a process comprising the steps of :

- a) solubilizing a silicone resin in an organic solvent system to yield a silicone resin solution concentration of about 80% or less, wherein the organic solvent system comprises a single solvent selected from the group consisting of

monoalcohols, polyalcohols, ethers of monoalcohols, ethers of polyalcohols, fatty esters, Guerbet alcohols, isoparaffins, naphthols, glycol ethers, provided that if the solvent is a glycol ether it is not diethyleneglycol monobutyl ether;

- 5 b) mixing the silicone resin solution from a) with an aminosiloxane polymer to obtain an aminosiloxane polymer:silicone resin mixture having ratio of about 20:1;
- c) allowing the aminosiloxane polymer:silicone resin mixture to age for at least about 6 hours at ambient temperature;
- d) adding the aminosiloxane polymer:silicone resin mixture to a vessel;
- 10 e) optionally adding with agitation an additional organic solvent to the aminosiloxane polymer:silicone resin mixture;
- f) mixing until homogenous;
- g) adding a protonating agent;
- h) additionally adding an aqueous carrier in an amount to produce the desired concentration of nanoemulsion
- 15 i) adding the nanoemulsion to a vessel;
- j) optionally, adding to the vessel containing the aforementioned nanoemulsion a perfume oil;
- k) adding an organic solvent;
- 20 l) optionally, adding a deposition aid polymer;
- m) adding additional water to achieve the desired finished product concentration;
- n) optionally, adding a preservative;
- o) optionally, adding a dispersant;
- p) adding a protonating agent; and
- 25 q) optionally, adding a dye.

Examples of treatment compositions include, but are not limited to, laundry spray treatment products, laundry pre-treatment products, fabric enhancer products, hard surface treatment compositions (hard surfaces include exterior surfaces, such as vinyl siding, windows, and decks),
30 carpet treatment compositions, and household treatment compositions. Examples of fabric care compositions suitable for the present disclosure include, but are not limited to, laundry spray treatment products, laundry pre-treatment products, laundry soak products, and rinse additives. Examples of suitable home care compositions include, but are not limited to, rug or carpet

treatment compositions, hard surface treatment compositions, floor treatment compositions, and window treatment compositions.

In some aspects, the treatment composition may be provided in combination with a nonwoven substrate, as a treatment implement.

5 In certain aspects, the compositions provide water and/or oil repellency to the treated surfaces, thereby reducing the propensity of the treated surface to become stained by deposited water- or oil-based soils.

By "surfaces" it is meant any surface. These surfaces may include porous or non-porous, absorptive or non-absorptive substrates. Surfaces may include, but are not limited to, celluloses,
10 paper, natural and/or synthetic textiles fibers and fabrics, imitation leather and leather. Selected aspects of the present invention are applied to natural and/or synthetic textile fibers and fabrics.

By "treating a surface" it is meant the application of the composition onto the surface. The application may be performed directly, such as spraying or wiping the composition onto a hard surface. The composition may or may not be rinsed off, depending on the desired benefit.

15 The present invention also encompasses the treatment of a fabric as the surface. This can be done either in a "pretreatment mode", where the composition is applied neat onto the fabric before the fabrics are washed or rinsed, or a "post-treatment mode", where the composition is applied neat onto the fabric after the fabric is washed or rinsed. The treatment may be performed in a "soaking mode", where the fabric is immersed and soaked in a bath of neat or diluted
20 composition. The treatment may also be performed in a "through the wash" or "through the rinse" mode where the treatment composition, as defined herein, is added to the wash cycle or the rinse cycle of a typical laundry wash machine cycle. When used in the wash or rinse cycle, the compositions are typically used in a diluted form. By "diluted form" it is meant that the compositions may be diluted in the use, preferably with water at a ratio of water to composition
25 up to 2000:1, or from 1:1 to about 1000:1, or from 3:1 to about 500:1, or from 5:1 to 200:1, or from 10:1 to 80:1.

Such treatment compositions may comprise carriers, which may be any known material that is useful in delivering the treatment compositions to the surface to be treated. The carrier may be as simple as a single component delivery vehicle, such as water or alcohol, which would allow
30 the nanoemulsion to be sprayed onto a surface. Alternatively, the carrier may be complex, such as a cleaning composition, e.g., a laundry detergent where the nanoemulsion would be applied in conjunction with the other beneficial uses of the complex carrier.


Such treatment compositions may comprise various other materials, including bleaching agents, bleach activators, builders, chelating agents, smectite clays, dye transfer inhibiting agents, dispersants, enzymes, and enzyme stabilizers, catalytic metal complexes, polymeric dispersing agents, clay and soil removal/anti-redeposition agents, brighteners, suds suppressors, suds
5 boosters, dyes, additional perfumes and perfume delivery systems, structure elasticizing agents, fabric softeners, carriers, hydrotropes, processing aids and/or pigments.

Deposition Assisting Polymer or Deposition Polymer - The compositions of the present invention contain non-polysaccharide based cationic copolymers comprising the polymerized monomer
10 unit residues of one or more ethylenically unsaturated cationic or amine monomers and one or more ethylenically unsaturated nonionic monomer and optionally one or more ethylenically unsaturated anionic monomers. When anionic monomeric units are present in the polymer, it is understood that the polymer is net cationic i.e., the number of cationic monomeric units are more than the number of anionic monomeric units in the polymer chain. Specifically, the cationic
15 polymers are compatible with detergent enzymes in the detergent composition and are capable of assisting and/or enhancing the deposition of benefit agents onto fabrics during laundering.

Exemplary cationic or amine monomers useful in this invention are N,N-dialkylaminoalkyl methacrylate, N,N-dialkylaminoalkyl acrylate, N,N-dialkylaminoalkyl acrylamide, N,N-dialkylaminoalkylmethacrylamide, methacrylamidoalkyl trialkylammonium chloride,
20 acrylamidoalkyltrialkylamminium chloride, vinylamine, vinyl imidazole, quaternized vinyl imidazole and diallyl dialkyl ammonium chloride. Preferred cationic and amine monomers are N,N-dimethyl aminoethyl acrylate, N,N-dimethyl aminoethyl methacrylate (DMAM), [2-(methacryloylamino)ethyl]tri-methylammonium chloride (QDMAM), N,N-dimethylaminopropyl acrylamide (DMAPA), N,N-dimethylaminopropyl methacrylamide (DMAPMA),
25 acrylamidopropyl trimethyl ammonium chloride, methacrylamidopropyl trimethylammonium chloride (MAPTAC), quaternized vinyl imidazole and diallyldimethylammonium chloride.

Exemplary nonionic monomers suitable for use in this invention are acrylamide (AM), N,N-dialkyl acrylamide, methacrylamide, N,N-dialkylmethacrylamide, C1-C12 alkyl acrylate, C1-C12 hydroxyalkyl acrylate, C1-C12 hydroxyetheralkyl acrylate, C1-C12 alkyl methacrylate,
30 C1-C12 hydroxyalkyl methacrylate, vinyl acetate, vinyl alcohol, vinyl formamide. Preferred nonionic monomers are acrylamide, N,N-dimethyl acrylamide, C1-C4 alkyl acrylate, C1-C4 hydroxyalkylacrylate, vinyl formamide, vinyl acetate, and vinyl alcohol. Most preferred

nonionic monomers are acrylamide, hydroxyethyl acrylate (HEA), hydroxypropyl acrylate (HPA), vinyl formamide, vinyl acetate, and vinyl alcohol.

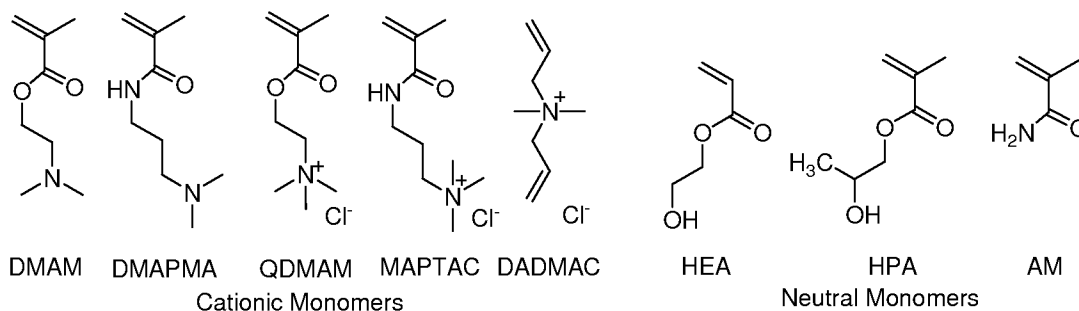

The polymer may optionally comprises anionic monomers, such as acrylic acid,
 5 methacrylic acid, maleic acid, vinyl sulfonic acid, styrene sulfonic acid,
 acrylamidopropylmethane sulfonic acid (AMPS) and their salts.

The polymer may optionally be cross-linked. Crosslinking monomers include, but are not limited to, ethylene glycol diacrylate, divinylbenzene, butadiene.

The most preferred polymers are poly(acrylamide-co-diallyldimethylammonium chloride),
 10 poly(acrylamide-methacrylamidopropyltrimethyl ammonium chloride), poly(acrylamide-co-N,N-dimethyl aminoethyl methacrylate), poly(acrylamide-co-N,N-dimethyl aminoethyl methacrylate), poly(hydroxyethylacrylate-co-dimethyl aminoethyl methacrylate), poly(hydroxypropylacrylate-co-dimethyl aminoethyl methacrylate), poly(hydroxypropylacrylate-co-methacrylamidopropyltrimethylammonium chloride).

15 In order for the deposition polymers to be formulable and stable in the composition, it is important that the monomers are incorporated in the polymer to form a copolymer, especially true when monomers have widely different reactivity ratios are used. In contrast to the commercial copolymers, the deposition polymers herein have a free monomer content less than 10%, preferably less than 5%, by weight of the monomers. Preferred synthesis conditions to
 20 produce reaction products containing the deposition polymers and low free monomer content are described below.

The deposition assisting polymers can be random, block or grafted. They can be linear or branched. The deposition assisting polymers comprises from about 1 to about 60 mol percent, preferably from about 1 to about 40 mol percent, of the cationic monomer repeat units and from
 25 about 98 to about 40 mol percent, from about 60 to about 95 mol percent, of the nonionic (i.e., "neutral") monomer repeat units.

The deposition assisting polymer has a charge density of about 0.1 to about 5.0 milliequivalents/g (meq/g) of dry polymer, preferably about 0.2 to about 3 meq/g. This refers to

the charge density of the polymer itself and is often different from the monomer feedstock. For example, for the copolymer of acrylamide and diallyldimethylammonium chloride with a monomer feed ratio of 70:30, the charge density of the feed monomers is about 3.05 meq/g. However, if only 50% of diallyldimethylammonium is polymerized, the polymer charge density is only about 1.6 meq/g. The polymer charge density is measured by dialyzing the polymer with a dialysis membrane or by NMR. For polymers with amine monomers, the charge density depends on the pH of the carrier. For these polymers, charge density is measured at a pH of 7. The weight-average molecular weight of the polymer will generally be between 10,000 and 5,000,000, preferably from 100,000 to 2,00,000 and even more preferably from 200,000 and 1,500,000, as determined by size exclusion chromatography relative to polyethyleneoxide standards with RI detection. The mobile phase used is a solution of 20% methanol in 0.4M MEA, 0.1 M NaNO₃, 3% acetic acid on a Waters Linear Ultrahydrogel column, 2 in series. Columns and detectors are kept at 40°C. Flow is set to 0.5 mL/min.

Perfume - The treatment composition of the present disclosure may optionally comprise a perfume component selected from the group consisting of:

- (1) a perfume microcapsule, or a moisture-activated perfume microcapsule, comprising a perfume carrier and an encapsulated perfume composition, wherein said perfume carrier may be selected from the group consisting of cyclodextrins, starch microcapsules, porous carrier microcapsules, and mixtures thereof; and wherein said encapsulated perfume composition may comprise low volatile perfume ingredients, high volatile perfume ingredients, and mixtures thereof;
- (2) a pro-perfume;
- (3) a low odor detection threshold perfume ingredients, wherein said low odor detection threshold perfume ingredients may comprise less than about 25%, by weight of the total neat perfume composition; and
- (4) mixtures thereof.

Microcapsule - The treatment composition of the present disclosure may comprise from about 0.05% to about 5%; or from about 0.1% to about 1% of a microcapsule. In one aspect, the microcapsule may comprise a shell comprising a polymer crosslinked with an aldehyde. In one aspect, the microcapsule may comprise a shell comprising a polymer selected from the group consisting of polyurea, polyurethane, polyamine, urea crosslinked with an aldehyde or melamine crosslinked with an aldehyde. Examples of materials suitable

for making the shell of the microcapsule include melamine-formaldehyde, urea-formaldehyde, phenol-formaldehyde, or other condensation polymers with formaldehyde.

In one aspect, the microcapsules may vary in size (i.e., the maximum diameter is from about 1 to about 75 microns, or from about 5 to about 30 microns). The capsules may have an average
5 shell thickness ranging from about 0.05 to about 10 microns, alternatively from about 0.05 to about 1 micron.

In one aspect, the microcapsule may comprise a perfume microcapsule. In turn, the perfume core may comprise a perfume and optionally a diluent. Suitable perfume microcapsules may include those described in the following references: published USPA Nos 2003-215417 A1;
10 2003-216488 A1; 2003-158344 A1; 2003-165692 A1; 2004-071742 A1; 2004-071746 A1; 2004-072719 A1; 2004-072720 A1; 2003-203829 A1; 2003-195133 A1; 2004-087477 A1; 2004-0106536 A1; USPNs 6645479; 6200949; 4882220; 4917920; 4514461; RE32713; 4234627; EP 1393706 A1. Capsules having a perfume loading of from about 50% to about 95% by weight of the capsule may be employed.

15 Pro-perfume - The perfume component of the treatment composition of the present disclosure may additionally include a pro-perfume. Pro-perfumes may comprise nonvolatile materials that release or convert to a perfume material as a result of, e.g., simple hydrolysis, or may be pH-change-triggered pro-perfumes (e.g. triggered by a pH drop) or may be enzymatically releasable pro-perfumes, or light-triggered pro-perfumes. The pro-perfumes may exhibit varying release
20 rates depending upon the pro-perfume chosen. Pro-perfumes suitable for use in the disclosed compositions are described in the following: USPNs 5,378,468; 5,626,852; 5,710,122; 5,716,918; 5,721,202; 5,744,435; 5,756,827; 5,830,835; and 5,919,752 .

Builders - The treatment compositions of the present disclosure may comprise one or more detergent builders or builder systems. When present, the compositions will typically comprise at
25 least about 1% builder, or from about 5% or 10% to about 80%, 50%, or even 30% by weight, of said builder. Builders include, but are not limited to, the alkali metal, ammonium and alkanolammonium salts of polyphosphates, alkali metal silicates, alkaline earth and alkali metal carbonates, aluminosilicate builders polycarboxylate compounds, ether hydroxypolycarboxylates, copolymers of maleic anhydride with ethylene or vinyl methyl ether, 1,3,5-trihydroxybenzene-
30 2,4,6-trisulphonic acid, and carboxymethyl-oxysuccinic acid, the various alkali metal, ammonium and substituted ammonium salts of polyacetic acids such as ethylenediamine

tetraacetic acid and nitrilotriacetic acid, as well as polycarboxylates such as mellitic acid, succinic acid, oxydisuccinic acid, polymaleic acid, benzene 1,3,5-tricarboxylic acid, carboxymethylxysuccinic acid, and soluble salts thereof.

Chelating Agents - The treatment compositions may also optionally contain one or more
5 copper, iron and/or manganese chelating agents. If utilized, chelating agents will generally
comprise from about 0.1% by weight of the compositions herein to about 15%, or even from
about 3.0% to about 15% by weight of the compositions herein.

Dye Transfer Inhibiting Agents - The treatment compositions of the present disclosure may
also include one or more dye transfer inhibiting agents. Suitable polymeric dye transfer
10 inhibiting agents include, but are not limited to, polyvinylpyrrolidone polymers, polyamine N-
oxide polymers, copolymers of N-vinylpyrrolidone and N-vinylimidazole (PVPVI),
polyvinylloxazolidones and polyvinylimidazoles or mixtures thereof. When present in the
compositions herein, the dye transfer inhibiting agents are present at levels from about 0.0001%,
from about 0.01%, from about 0.05% by weight of the cleaning compositions to about 10%,
15 about 2%, or even about 1% by weight of the cleaning compositions.

Dispersants - The treatment compositions of the present disclosure may also contain
dispersants. Suitable water-soluble organic materials are the homo- or co-polymeric acids or their
salts, in which the polycarboxylic acid may comprise at least two carboxyl radicals separated
from each other by not more than two carbon atoms, ethoxylated tallow amines, linear or
20 branched fatty alcohol alkoxyates, and mixtures thereof.

Enzymes - The treatment compositions may comprise one or more detergent enzymes,
which provide cleaning performance and/or fabric care benefits. Examples of suitable enzymes
include, but are not limited to, hemicellulases, peroxidases, proteases, cellulases, xylanases,
lipases, phospholipases, esterases, cutinases, pectinases, keratanases, reductases, oxidases,
25 phenoloxidases, lipoxygenases, ligninases, pullulanases, tannases, pentosanases, malanases, β -
glucanases, arabinosidases, hyaluronidase, chondroitinase, laccase, and amylases, or mixtures
thereof. A typical combination is a cocktail of conventional applicable enzymes like protease,
lipase, cutinase and/or cellulase in conjunction with amylase.

Enzyme Stabilizers - Enzymes for use in the treatment compositions, e.g., detergents, may
30 be stabilized by various techniques. The enzymes employed herein can be stabilized by the
presence of water-soluble sources of calcium and/or magnesium ions in the finished
compositions that provide such ions to the enzymes.

Hueing Dyes- The composition may comprise a fabric hueing agent (sometimes referred to as shading, bluing or whitening agents). Typically the hueing agent provides a blue or violet shade to fabric. Hueing agents can be used either alone or in combination to create a specific shade of hueing and/or to shade different fabric types. This may be provided for example by
5 mixing a red and green-blue dye to yield a blue or violet shade. Hueing agents may be selected from any known chemical class of dye, including but not limited to acridine, anthraquinone (including polycyclic quinones), azine, azo (e.g., monoazo, disazo, trisazo, tetrakisazo, polyazo), including premetallized azo, benzodifurane and benzodifuranone, carotenoid, coumarin, cyanine, diazahemicyanine, diphenylmethane, formazan, hemicyanine, indigoids, methane,
10 naphthalimides, naphthoquinone, nitro and nitroso, oxazine, phthalocyanine, pyrazoles, stilbene, styryl, triarylmethane, triphenylmethane, xanthenes and mixtures thereof.

In some aspects, the treatment composition comprises an aminosiloxane polymer nanoemulsion and a carrier. In some aspects, the treatment composition comprises an aminosiloxane polymer nanoemulsion, a carrier, and a perfume.

15 In certain aspects of the present disclosure, the treatment composition is a fabric care composition. Such a fabric care composition may take the form of a rinse added fabric conditioning compositions. Such compositions may comprise a fabric softening active and a dispersant polymer, to provide a stain repellency benefit to fabrics treated by the composition, typically from about 0.00001 wt. % (0.1 ppm) to about 1 wt. % (10,000 ppm), or even from about
20 0.0003 wt. % (3 ppm) to about 0.03 wt. % (300 ppm) based on total rinse added fabric conditioning composition weight. In another specific aspect, the compositions are rinse added fabric conditioning compositions. Examples of typical rinse added conditioning composition can be found in U.S. Provisional Patent Application Serial No. 60/687,582 filed on October 8, 2004.

25 Methods of Using Treatment Compositions

The treatment compositions of the present disclosure may be used in a method of treating a surface. The method of treating a surface comprises the step of applying the aminosiloxane polymer nanoemulsion treatment composition of the present disclosure to a surface, where the surface is selected from fabric or a hard surface.

30

Fabric Treatment Compositions

The treatment compositions disclosed in the present specification may be used to treat a fabric, such as those described herein. Typically at least a portion of the fabric is contacted with

an embodiment of the aforementioned fabric care compositions, in neat form or diluted in a liquor, for example, a wash liquor and then the fabric may be optionally washed and/or rinsed and/or dried without further treatment. In one aspect, a fabric is optionally washed and/or rinsed, contacted with an embodiment of the aforementioned fabric care compositions and then
5 optionally washed and/or rinsed. For purposes of the present disclosure, washing includes but is not limited to, scrubbing, and mechanical agitation. The fabric may comprise most any fabric capable of being laundered or treated.

The fabric treatment compositions disclosed in the present specification can be used to form aqueous washing or treatment solutions for use in the laundering and/or treatment of fabrics.
10 Generally, an effective amount of such compositions is added to water, preferably in a conventional fabric laundering automatic washing machine, to form such aqueous laundering solutions. The aqueous washing solution so formed is then contacted, preferably under agitation, with the fabrics to be laundered therewith. An effective amount of the fabric care composition, such as the liquid detergent compositions disclosed in the present specification, may be added to
15 water to form aqueous laundering solutions that may comprise from about 500 to about 7,000 ppm or even from about 1,000 to about 3,000 ppm of fabric care composition.

In one aspect, the fabric care compositions may be employed as a laundry additive, a pre-treatment composition and/or a post-treatment composition.

Without being bound by theory it is believed the treatment of a fabric with compositions
20 disclosed in the present specification may increase the time-to-wick of the fabric. Table VII shows an increase in the time-to-wick of cotton fabric as a result of treatment with examples of compositions disclosed in the present specification.

In some aspects, there is provided a method of treating a surface comprising the step of applying the aminosiloxane polymer nanoemulsion treatment composition of the present
25 disclosure to a surface, where the surface is a fabric and where the water repellency relative to the untreated fabric is increased, as measured by an increase in Time to Wick. In certain aspects, the increase in Time to Wick is greater than about 100 seconds, or greater than about 500 seconds, or greater than about 1200 seconds. In some aspects, the oil repellency relative to the untreated fabric is increased, as measured by an increase in Time to Wick. In some aspects, the
30 oil repellency relative to the untreated fabric is increased, as measured by an increase in Time to Wick greater than about 10 seconds.

Hard Surfaces

The treatment compositions disclosed in the present specification may be used to clean or treat hard surfaces, such as those described herein. Typically at least a portion of the hard surface is contacted with an embodiment of the aforementioned hard surface care compositions, in neat form or diluted in a liquor, for example, a wash liquor and then the hard surface may be optionally washed and/or rinsed and/or dried without further treatment. In one aspect, a hard surface is optionally washed and/or rinsed, contacted with an embodiment of the aforementioned hard surface care compositions and then optionally washed and/or rinsed and/or dried without further treatment. For purposes of the present disclosure, washing includes but is not limited to, scrubbing, and mechanical agitation.

The hard surface care compositions disclosed in the present specification can be used to form aqueous washing or treatment solutions for use in the washing and/or treatment of hard surfaces. Generally, an effective amount of such compositions is added to water to form such aqueous washing and/or treatment solutions. The aqueous washing and/or treatment solution so formed is then contacted with the hard surface to be washed or treated therewith.

Without being bound by theory, it is believed the treatment of the hard surface with compositions disclosed in the present specification may increase the contact angle of water or water-based composition and/or oily substances on the hard surface. Without being bound by theory it is believed that increasing the contact angle of substances on a hard surface increases the ease of removing said substances from the surface

In some aspects, there is provided a method of treating a surface comprising the step of applying the aminosiloxane polymer nanoemulsion treatment composition of the present disclosure to a surface, where the surface is a hard surface and where the contact angle relative to the untreated hard surface is increased.

While various specific embodiments have been described in detail herein, the present disclosure is intended to cover various different combinations of the disclosed embodiments and is not limited to those specific embodiments described herein. The various embodiments of the present disclosure may be better understood, when read in conjunction with the following representative examples. The following representative examples are included for purposes of illustration and not limitation.

TEST METHODS

Time to Wick (T2W) Measurement Method

The fabric Time to Wick property is a measure of the water repellency of a fabric, where longer times indicate greater repellency. Water repellency is measured when a drop of water is applied to the fabric, such as white 6.1 oz (165-200 gsm) Gildan Ultra 100% Cotton t-shirts (size large, item number 2000, Gildan USA, Charleston, SC). The Gildan t-shirts are prepared by desizing for 2 cycles of laundering with clean rinses using the AATCC 2003 standard reference liquid detergent without optical brighteners (AATCC - American Association of Textile Chemists and Colorists, Research Triangle Park, NC, USA) in a standard top-loader, North American style washing machine, such as a Kenmore 600 Model 110.28622701. For treatment, 12 t-shirts are added to the drum of a standard washing machine, set on Heavy Duty wash cycle, water level equal to 17 gallons (Super load size), warm water, selected with single rinse option. Water is regulated to standardize the wash temperature to 90° F, Rinse to 60° F, and water hardness to 6 grain per gallon. Detergent is added to the wash water, such as Tide liquid Detergent (50.0g dose), Clean Breeze scent. With the fabrics in the washer, the rinse water is allowed to fill the tub. Prior to agitation, the fabric treatment composition of the present invention (40 grams) is equally dispersed and added to the rinse water, followed by completion of the rinse cycle. The garments are then placed in a standard dryer, such as a Kenmore standard 80 series, cotton cycle (high heat), for 30 minutes or until dry. The fabrics are then removed from the dryer and placed in a cool, well ventilated room with controlled humidity set at 50 % RH, and temperature regulated to 70° F, for a period of 24-48 hours. The section of the fabric that will be measured for Time to Wick is subjected to UV light, such as standard overhead lab lighting, for 24-48 hours prior to measurement. Treated test fabric is compared for Time to Wick value versus an untreated control fabric that has been prepared in a similar manner as the test fabric without the addition of the fabric treatment composition.

The Time to Wick value is measured as follows: On a flat, level hard surface (e.g. benchtop) a fresh square of a paper towel at least 10 cm x 10cm in size, is placed inside the prepared t-shirt so that 1 layer of fabric is being measured. A 300µL drop of DI water is then dispensed onto the fabric surface from a calibrated pipette. The process of absorption of the liquid drop is visually monitored and recorded counting the time elapsed in seconds. Eight drops are administered per t-shirt, with each drop placed at a different location separate from all adjacent drops.

For each drop, the time differential between when the drop is applied and when absorbed is calculated and recorded in seconds. The time at drop absorption is defined as being the earliest time point at which no portion of the drop is observed remaining above the surface of the fabric. If the drop remains after 10 minutes, observation is discontinued. Such drops are recorded as having a time differential of 600 seconds. The Time to Wick value for a given liquid on fabric is the average of the time differentials recorded for 8 drops of that liquid. In order to determine the effect of a treatment, comparisons are made between the average Time to Wick value obtained from the treated fabric, versus the average obtained from its untreated control fabric using the same liquid, where longer times indicate greater repellency.

10

Particle Size Measurement Test Method by Using Malvern Zetasizer Nano ZS

The organosilicone nanoemulsions finished product containing the nanoemulsions are measured either neat or diluted with DI water to a specific concentration (1:10, 1:500 or 1:1000) with filtered DI water (using Gelman acrodisc LC PVDF 0.45 μ m) prior to making particle size measurements. The particle size measurement is performed immediately after the sample completely disperses in water. The data is reported as the average of 3 readings.

15

Sample preparation:

The dilution used will be dependent upon the type of sample: silicone emulsions are diluted at a concentration of 1:500 and 1:1000 and finish products are measured as neat and diluted to a concentration of 1:10 in DI water.

20

- Before diluting the sample, gently invert it several times to mix it well.
- Rinse the 10ml vial with filtered DI water to remove any dust then pipette a specific amount of filtered DI water and sample to the vial to make up the correct concentration (1:10, 1:500 or 1:1000). Invert the vial several times to make sure the sample completely disperses in water.
- Add 1ml of diluted sample or neat sample to a clean cuvette ensuring that there are no air bubbles present in the sample.

25

Instrument Set up Conditions:

The particle size measurements are made via Malvern Zetasizer Nano Series ZS, with model #ZEN3600 with the fixed parameter settings for both Silicone emulsion and finish product:

30

Material: Silicone

		Refractive Index (RI)	1.400
		Absorption	0.001
	Dispersion:	Water	
		Temp.	25°C
5		Viscosity	0.8872cP
		RI	1.33
	General Option:	Using dispersant viscosity as sample viscosity	
	Temperature:	25°C	
	Aging time:	0 second	
10	Cell Type:	DTS0012- Disposable sizing cuvette	
	Measurement:	Meas. Angle	173° Backscatter (NIBS default)
		Meas. Duration	Manual
		Number of runs	3
		Run duration	60s
15		Number of Meas.	3
		Delay between meas.	0s
		Positioning method	Seek for optimum position
		Automatic attenuation selection	Yes
	Data Processing:	Analysis model	General purpose (normal resolution)

20

Test Method for Determining the Range of Nanoparticle Typical Diameters and the Presence/Absence of Nanoparticle Aggregates, using a Cryo-Transmission Electron Microscope (cryo-TEM).

25 Samples of the liquid composition to be tested are prepared for microscopic analysis in order to observe nanoparticles that may be suspended in the composition. Sample preparation involves pipetting approximately 5 µl of the liquid composition onto a holey carbon grid (such as Lacey Formvar Carbon on 300 mesh copper grid, P/N 01883-F, available from Ted Pella Inc., Redding, California, U.S.A., or similar). The excess liquid is blotted away from the edge of the grid with a filter paper (such as Whatman brand #4, 70 mm diameter, manufactured by GE Healthcare /

30 General Electric Company, Fairfield, Connecticut, U.S.A., or similar). The grid-mounted sample is plunged rapidly into liquid ethane using a freezing apparatus capable of producing a flash-frozen vitreous thin film of sample lacking crystalline ice (such as a Controlled Environment Vitrification System (CEVS device), or similar apparatus). The apparatus configuration and use

of a CEVS device is described in the *Journal of Electron Microscopy Technique* volume 10 (1988) pages 87-111. Liquid ethane may be prepared by filling an insulated container with liquid nitrogen and placing a second smaller vessel into the liquid nitrogen. Gaseous ethane blown through a syringe needle into the second vessel will condense into liquid ethane. Tweezers pre-cooled in liquid nitrogen are used to rapidly handle the frozen grids while taking great care to maintain the vitreous non-crystalline state of the sample and minimize the formation of frost on the sample. After being flash frozen the grid-mounted samples are stored under liquid nitrogen until being loaded into the cryo-TEM via a cryo transfer holder (such as Gatan model 626 Cryo-Holder available from Gatan Inc., Warrendale, Pennsylvania, U.S.A., attached to a TEM instrument such as the model Tecnai G² 20 available from FEI Company, Hillsboro, Oregon, U.S.A., or similar). The cryo-TEM is equipped with a camera such as the Gatan Model 994 UltraScan 1000XP (available from Gatan Inc., Warrendale, Pennsylvania, U.S.A.). The grid-mounted frozen samples are imaged in the cryo-TEM using low beam dosages (such as 200 KV in Low Dose Mode) in order to minimize sample damage. Suitable magnifications are selected in order to observe the size of nanoparticles which may be present. This may include magnifications in the range of 5,000x – 25,000x. During imaging the sample is kept as cold as possible, typically at or near the temperature of liquid nitrogen (approximately minus 175 °C). Images of the samples are carefully examined to detect the presence of artefacts. A grid-mounted sample is discarded if any crystalline ice. Images are inspected for beam damage artefacts and are rejected if damage is observed. For each grid-mounted sample, representative images are captured of approximately 40 fields of view which are representative of the sample. These images are used to determine the range of nanoparticle typical diameters, and to determine the presence or absence of nanoparticle aggregates. In each image, the diameters are measured from nanoparticles which are typical of that image. The range of typical diameter values reported for the composition is the range of the diameters measured across all images captured from that composition. In each image, the spacing between nanoparticles is observed. A nanoparticle aggregate is defined as a cluster which contains at least 10 nanoparticles clumped together, rather than being individually dispersed. Nanoparticle aggregates are reported as present if at least one nanoparticle aggregate is observed in at least one image captured from that composition.

30

Examples

1. Solvent Examples

The following list of solvent options is for illustrative purposes of making the silicone resin

solution of example prep 2 below and is considered to be non-limiting:

Table I. Example Solvents

	A	B	C
Guerbet Alcohols	2-Ethylhexanol ¹	2-Butyloctanol ²	2-Hexyldecanol ³
	D	E	F
Glycol Ethers	Propyleneglycol n-Butyl ether ⁴	Dipropyleneglycol n-Butyl ether ⁵	Tripropyleneglycol n-Butyl ether ⁶
	G	H	I
Fatty Esters	Isopropyl Laurate ⁷	Isopropyl Myristate ⁸	Isopropyl Palmitate ⁹

2. Preparation of Resin Solution

- 5 In a 400mL beaker add specified amount of MQ resin powder ($\{[Me_3SiO_{1/2}]_{0.373}[SiO_2]_{0.627}\}_{40}$, Mn = 2700 g/mol, resin contains 0.2% OH and 3.1% OEt [corresponds to OR¹⁰]) according to Table II below; slowly add solvent(s) and begin mixing using an Ika RWA-20 mixer with a 4-blade agitator (2 inch diameter tip-to-tip)_having 45° pitch on each blade using appropriate level of agitation. Continue with gentle mixing until all resin powder is completely dissolved; allow
- 10 solution to settle at least 24 hours to allow for complete de-aeration.

Table II: Example Resin solution compositions

Component	Resin Solution Examples										
	J	K	L	M	N	O	P	Q	R	S	T
Resin Powder ¹⁰	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7
Total Solvent wt. (g)	44.3	44.3	44.3	44.3	44.3	44.3	44.3	44.3	44.3	44.3	44.3
Butyl Carbitol ¹¹	0	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	19.0
Solvent A-I	44.3	42.3	40.3	38.3	36.3	34.3	32.3	30.3	28.3	26.3	25.3

3. Preparation of Resin-Aminosilicone Oil Mixture

- 15 To a 6 oz. glass container add 76.3g of aminosilicone fluid and 23.7g of resin solution according to Table III below.

The amine oil U has a viscosity about 1000 mm²/s at 25°C [corresponds to units of formulas 7+8+9+10 = 230], functional radicals $-(CH_2)_3NH(CH_2)NH_2$ [corresponds to R²], amine number of 0.5 mmol/g, 92% SiMe₃ end groups, and 8% SiMe₂OH end groups [corresponds to

20 units of formulas 9/10 = 11.5].

The amine oil V has a viscosity about 1000 mm²/s at 25°C [corresponds to units of formulas 7+8+9+10 = 230], functional radicals $-(\text{CH}_2)_3\text{NH}(\text{CH}_2)\text{NH}_2$ [corresponds to R²], amine number of 0.5 mmol/g, 85% SiMe₃ end groups, and 15% SiMe₂OH end groups [corresponds to units of formulas 9/10 = 5.7].

- 5 The amine oil W has a viscosity about 1000 mm²/s at 25°C [corresponds to units of formulas 7+8+9+10 = 230], functional radicals $-(\text{CH}_2)_3\text{NH}(\text{CH}_2)\text{NH}_2$ [corresponds to R²], amine number of 0.5 mmol/g, 80% SiMe₃ end groups, and 20% SiMe₂OH end groups [corresponds to units of formulas 9/10 = 4.0].

- 10 Mix fluids until completely homogenous using an Ika® RWA-20 mixer with a 4-blade agitator having 45° pitch on each blade using appropriate level of agitation. Place lid on container and allow oil mixture to age at room temperature for at least 72 hours.

Table III: Example Resin-Aminosilicone Oil mixture solutions

	Resin-AminoSilicone Oil Mixture Examples		
Example	U	V	W
Aminosilicone Terminal group	8% -OH termination	15% -OH termination	20% -OH termination
Aminosilicone amt. (g)	76.3	76.3	76.3
Resin solution, Ex. J-T (g)	23.7	23.7	23.7

15

4. Preparation of Aminosilicone-Resin Emulsion

- In a 250mL beaker add 78.0g of oil mixture from examples U – W above, followed by additional solvent according to Table IV below. Begin mixing solution using an Ika® RWA-20 mixer with a 4-blade agitator having 45° pitch on each blade using appropriate level of agitation. Continue mixing; once solvent has completely incorporated, add specified protonation agent to the mixture; add remaining water slowly and in 3 separate but equal increments, allowing each addition to fully incorporate prior to adding the next. Continue agitation to ensure the mixture is completely emulsified.
- 20

25

Table IV: Example Aminosilicone-Resin Emulsions

Component (g)	Silicone-Resin Emulsion Examples					
	AA	BB	CC	DD	EE	FF
Oil Mix. Example U-W	39.0	39.0	39.0	39.0	39.0	39.0
Solvent from examples A- I ¹⁻⁹	-	1.5	1.2	0.8	9.75	19.5
Butyl Carbitol ¹¹	19.5	18.0	18.3	18.7	9.75	0.0
Resin Composition from Table II	T	J, T	T	T	T	J-T
Protonating Agent ¹²	0.9	0.9	0.9	0.9	0.9	0.9
Water (13.5g x 3)	40.6	40.6	40.6	40.6	40.6	40.6
Total Amount (g)	100.0	100.0	100.0	100.0	100.0	100.0

5. Finished product Formulation Examples

5 In a 400mL beaker, add specified amount of emulsion from examples AA-FF, followed by perfume; begin mixing solution using an Ika® RWA-20 mixer with a 4-blade agitator having 45° pitch on each blade using appropriate level of agitation. Add solvent to the mixture with continued agitation, allowing solvent to fully incorporate. Add deposition aid polymer followed by water; continue to mix until fully incorporated. Add preservative, followed by surfactant, then add the protonating agent and allow the mixture to fully incorporate. Finish product with continued agitation by adding the dye following the specified order of addition 10 in Table V below:

Table V: Example Finished Product Formulations

Component (g)	Finished Product Example Formulations							
	Comparative Example GG	Order of Addition	HH	Order of Addition	Comparative Example II	Order of Addition	Comparative Example JJ	Order of Addition
Emulsion from ex. AA-FF	25.8	1	25.8	1	25.8	1	25.8	2
Perfume	0.8	2	0.8	2	0.8	2	0.8	3
Butyl Carbitol	4.0	3	4.0	3	-	-	4.0	4
Solvent ex. A-I	-	-	-	-	4.0	3	-	-

Surfactant ¹²	0.1	4	0.1	7	0.1	7	0.1	5
Protonating Agent ¹³	0.25	5	0.25	8	0.25	8	0.25	6
Water	62.65	6	62.65	5	62.65	5	62.65	1
Deposition Aid Polymer ¹⁴	6.35	7	6.35	4	6.35	4	6.35	7
Preservative ¹⁵	0.1	8	0.1	6	0.1	6	0.1	8
Dye ¹⁶	0.004	9	0.004	9	0.004	9	0.004	9

¹ 2-Ethylhexanol: Available from Sigma-Aldrich, St.Louis, MO

² 2-Butyloctanol: Available from Sasol Chemical, Johannesburg, South Africa

³ 2-Hexyldecanol: Available from Sigma-Aldrich, St.Louis, MO

⁴ Propyleneglycol n-butyl ether: Available from Dow Chemical, Midland MI

5 ⁵ Dipropyleneglycol n-butyl ether: Available from Dow Chemical, Midland MI

⁶ Tripropyleneglycol n-butyl ether: Available from Dow Chemical, Midland MI

⁷ Isopropyl Laurate: Available from Sigma-Aldrich, St.Louis, MO

⁸ Isopropyl Myristate: Available from Evonik Corporation, Hopewell, VA.

⁹ Isopropyl Palmitate: Available from Evonik Corporation, Hopewell, VA.

10 ¹⁰ Silicone MQ Resin: Wacker MQ 803TF, available from Wacker Chemie, AG; Burghausen, Germany

¹¹ Butyl Carbitol: available from Dow Chemical, Midland MI

¹² Surfactant: TAE-80, Tallow Alkyl ethoxylate, available from Akzo-Nobel

¹³ Protonating Agent: Glacial Acetic Acid, 97%, available from Sigma-Aldrich, St.Louis, MO

15 ¹⁴ Deposition Aid Polymer: Terpolymer of acrylamide, acrylic acid and methacrylamidopropyl trimethylammonium chloride; Available from Nalco Chemicals, Naperville, IL

¹⁵ Preservative: Proxel GXL, available from Lonza Group, Basel, Switzerland

¹⁶ Dye: Licitint Blue AH; available from Milliken, Spartanburg, SC

20 **Data:**

Table VI: Characterization of Finished product for Appearance and Particle size

	Finished Product (FP) Formulation Example			
	GG	HH	II	JJ
Cryo-TEM visual appearance	Product Phase split	Uniform particles, no void volumes	Product Phase split	Distribution of particle sizes,

				apparent void volumes
Avg. Particle Size (nm.); FP	Not Tested	373	Not Tested	497




Table VII: Stability of Finished Products and Performance

	Finished Product (FP) Formulation Example			
	GG	HH	II	JJ
Initial Product Stability	Fail	Pass	Fail	Pass
Initial TTW Performance*	Not Tested	100% Pass, avg. TTW = 328sec.	Not Tested	92% Pass, avg. TTW = 162sec.
8 Week Stability	Not Tested	Pass	Not tested	Fail
8 Week TTW Performance	Not Tested	100% Pass, avg. TTW = 295sec.	Not Tested	Not Tested

*TTW = Time to Wick; % Pass is determined by the number of treated garments that exhibit an average Time to Wick of >30 seconds

5

Table VIII: Representative Cryo-TEM Images of Fabric Treatment Compositions

Formulation	JJ	HH	GG
Cryo-TEM Image			
Description	Tecnai TEM image at 200 KV in low dose mode; image shows uniform particle size distribution with no abnormalities or areas showing changes in particle density	Tecnai TEM image at 200 KV in low dose mode; image shows varying particle size distribution with some abnormalities and areas showing changes in particle density	Tecnai TEM image at 200 KV in low dose mode; image shows varying particle size distribution with some abnormalities and areas showing changes in particle density

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range

surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm.”

Every document cited herein, including any crossreferenced or related patent or application, is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise
5 limited. The citation of any document is not an admission that it is prior art with respect to any invention disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such invention. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition
10 assigned to that term in this document shall govern.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this
15 invention.

CLAIMS

What is claimed is:

1. A fabric treatment composition comprising a nanoemulsion made according to a process comprising the steps of :
 - a) solubilizing a silicone resin in an organic solvent system to yield a silicone resin solution concentration of 80% or less, wherein the organic solvent system comprises a single solvent selected from the group consisting of monoalcohols, polyalcohols, ethers of monoalcohols, ethers of polyalcohols, fatty esters, Guerbet alcohols, isoparaffins, naphthols, glycol ethers, provided that if the solvent is a glycol ether it is not diethyleneglycol monobutyl ether;
 - b) mixing the silicone resin solution from a) with an aminosiloxane polymer to obtain an aminosiloxane polymer:silicone resin mixture having ratio of 20:1;
 - c) allowing the aminosiloxane polymer:silicone resin mixture to age for at least 6 hours at ambient temperature;
 - d) adding the aminosiloxane polymer:silicone resin mixture to a vessel;
 - e) optionally adding with agitation an additional organic solvent to the aminosiloxane polymer:silicone resin mixture;
 - f) mixing until homogenous;
 - g) adding a protonating agent;
 - h) additionally adding an aqueous carrier in an amount to produce the desired concentration of nanoemulsion
 - i) adding the nanoemulsion to a vessel;
 - j) optionally, adding to the vessel containing the aforementioned nanoemulsion a perfume oil;
 - k) adding an organic solvent;
 - l) optionally, adding a deposition aid polymer;
 - m) adding additional water to achieve the desired finished product concentration;
 - n) optionally, adding a preservative;
 - o) optionally, adding a dispersant;
 - p) adding a protonating agent; and
 - q) optionally, adding a dye.

2. A fabric treatment composition according to Claim 1 wherein the fabric treatment composition has a pH of less than 7.
3. A fabric treatment composition according to any preceding claim wherein the fabric treatment composition has a pH of from 1 to 6.5.
4. A fabric treatment composition according to any preceding claim wherein said nanoemulsion has an average particle size less than 1 μm .
5. A fabric treatment composition according to any preceding claim wherein said nanoemulsion has an average particle size greater than 30nm but less than 500nm.
6. A fabric treatment composition according to any preceding claim having a time to wick of greater than 30 seconds when applied to a fabric surface.
7. A fabric treatment composition according to any preceding claim, wherein said treatment composition is selected from the group consisting of laundry spray composition, laundry rinse additive composition, and hard surface treatment compositions.
8. A fabric treatment composition according to any preceding claim wherein said treatment composition further comprises an adjunct ingredient.
9. The fabric treatment composition of Claim 8 where the adjunct ingredient is selected from the group consisting of builders, deposition aid polymers, chelating agents, dye transfer inhibiting agents, dispersants, enzymes, and enzyme stabilizers, catalytic materials, bleach, bleach activators, polymeric dispersing agents, clay soil removal/anti-redeposition agents, brighteners, dyes, hueing agents, UV absorbers, perfume, perfume delivery systems, structure elasticizing agents, thickeners/structurants, fabric softeners, carriers, hydrotropes, processing aids, oligoamines, and pigments.
10. A fabric treatment composition according to Claim 9 wherein:

- a) said fabric softener active is selected from the group consisting of polyglycerol esters, oily sugar derivatives, wax emulsions, fatty acids, N, N-bis(stearoyl-oxy-ethyl) N,N-dimethyl ammonium chloride, N,N-bis(tallowoyl-oxy-ethyl) N,N-dimethyl ammonium chloride, N,N-bis(stearoyl-oxy-ethyl) N-(2 hydroxyethyl) N-methyl ammonium methylsulfate and mixtures thereof;
- b) said deposition aid polymer comprises a cationic polymer having a cationic charge of from 0.005 meq/g to 23 meq/g, at the pH of said composition;
- c) said preservative is selected from the group consisting of alcohols, formaldehyde, parabens, benzyl alcohol, propionic acid and salts thereof and also isothiazolinones;
- d) said structurant is selected from the group of hydrogenated castor oil; derivatives of hydrogenated castor oil; microfibrillar cellulose; hydroxyfunctional crystalline materials, long-chain fatty alcohols, 12-hydroxystearic acid; clays; and mixtures thereof;
- e) said polymeric dispersing agent is selected from the group consisting of homo- or co-polymeric acids or the salts of water-soluble organic materials in which the polycarboxylic acid may comprise at least two carboxyl radicals separated from each other by not more than two carbon atoms, ethoxylated tallow amines, linear or branched fatty alcohol alkoxyates, polyvinylpyrrolidone polymers, polyamine N-oxide polymers, copolymers of N-vinylpyrrolidone and N-vinylimidazole (PVPVI), polyvinylloxazolidones and polyvinylimidazoles, and mixtures thereof; and
- f) said hueing agent is selected from the group consisting of acridine, anthraquinone, polycyclic quinones, azine, monoazo, disazo, trisazo, tetrakisazo, polyazo, premetallized azo, benzodifurane, benzodifuranone, carotenoid, coumarin, cyanine, diazahemicyanine, diphenylmethane, formazan, hemicyanine, indigoids, methane, naphthalimides, naphthoquinone, nitro and nitroso, oxazine, phthalocyanine, pyrazoles, stilbene, styryl, triarylmethane, triphenylmethane, xanthenes and mixtures thereof.

11. A fabric treatment composition according to Claim 9 wherein:

- a) said perfume oil comprises perfume raw materials having less than 50% of free aromatic aldehydes and/or free aromatic ketones, by weight of the total perfume oil;
- b) said organic solvent comprises a solvent selected from the group consisting of monoalcohols, polyalcohols, ethers of monoalcohols, ethers of polyalcohols, fatty esters, Guerbet alcohols, isoparaffins, naphthols, glycol ethers, and mixtures thereof;
- c) said deposition aid polymer comprises a cationic polymer having a cationic charge of from 0.005 meq/g to 23 meq/g, at the pH of said composition;
- d) said preservative is selected from the group consisting of alcohols, formaldehyde, parabens, benzyl alcohol, propionic acid and salts thereof and isothiazolinones;
- e) said dispersant is selected from the group consisting of homo- or co-polymeric acids or their salts, in which the polycarboxylic acid may comprise at least two carboxyl radicals separated from each other by not more than two carbon atoms, ethoxylated tallow amines, linear or branched fatty alcohol alkoxyates, and mixtures thereof;
- f) said protonating agent is selected from a monoprotic or multiprotic, water-soluble or water-insoluble, organic or inorganic acid.

12. A fabric treatment composition according to Claim 11 wherein:

- a) said organic solvent comprises a Guerbet alcohol or a glycol ether, and mixtures thereof, and is selected from 2-ethyl hexanol, 2-butyl octanol, 2-hexyl decanol, ethyleneglycol methyl ether, ethyleneglycol ethyl ether, ethyleneglycol propyl ether, ethyleneglycol butyl ether, ethyleneglycol butyl ether acetate, ethyleneglycol phenyl ether, ethyleneglycol hexyl ether, diethyleneglycol methyl ether, diethyleneglycol ethyl ether, diethyleneglycol propyl ether, diethyleneglycol butyl ether, diethyleneglycol phenyl ether, diethyleneglycol hexyl ether, propyleneglycol methyl ether, propyleneglycol methyl ether acetate, propyleneglycol methyl ether diacetate, propyleneglycol propyl ether, propyleneglycol butyl ether, propyleneglycol phenyl ether, dipropyleneglycol methyl ether, dipropyleneglycol methyl ether acetate, dipropyleneglycol propyl ether, dipropyleneglycol butyl ether,

tripropylene glycol methyl ether, tripropylene glycol propyl ether, and tripropylene glycol butyl ether, and mixtures thereof;

- b) said deposition aid polymer comprises a cationic polymer having monomeric units selected from acrylamide and methacrylamidopropyltrimethyl ammonium chloride;
- c) said preservative is an isothiazolinone;
- d) said dispersant is a fatty alcohol ethoxylate having on average 80 moles or less of ethoxylation;
- e) said protonating agent is selected from formic acid, acetic acid, sulphuric acid, phosphoric acid, hydrochloric acid, citric acid and mixtures thereof.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/042448

A. CLASSIFICATION OF SUBJECT MATTER
INV. C11D7/50 C11D17/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
C11D C08G D06M A61K
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2008/000814 A1 (BLUESTAR SILICONES FRANCE [FR]; MARTIN NADIA [FR]; GIRAUD YVES [FR]; D) 3 January 2008 (2008-01-03) claims 1.6-9 page 2, line 35 - page 3, line 37 page 5, line 24 - page 7, line 16 page 10, lines 21-37 page 12, line 28 - page 13, line 19 -----	1-12
Y	EP 0 469 316 A2 (PFERSEE CHEM FAB [DE]) 5 February 1992 (1992-02-05) claims 1,2,12,15-17; example 1 page 2, line 27 - page 3, line 20 page 5, lines 49-53 page 6, lines 21-41 ----- -/--	1-12

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 7 October 2015	Date of mailing of the international search report 14/10/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Gault, Nathalie

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/042448

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2006/041026 A1 (MAHR GUNTER [DE] ET AL) 23 February 2006 (2006-02-23) abstract claims 1,4-8 page 3, paragraph 0062-0063 page 6, paragraphs 0090-0091,0094,0095,0098,0099 page 7, paragraph 0101 -----	1-12
Y	US 2014/020188 A1 (GIZAW YONAS [US] ET AL) 23 January 2014 (2014-01-23) claims 1,7,8; examples 2,7 page 19, paragraph 0422 - page 20, paragraph 0425 -----	1-12
Y	US 2002/161116 A1 (YU HUA [US]) 31 October 2002 (2002-10-31) claims 1,2,11; examples 1,4,6-9 -----	1-12
A	US 5 925 341 A (CERVANTES FREDERIC [FR] ET AL) 20 July 1999 (1999-07-20) column 12, lines 50-62 -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/042448

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008000814	A1	03-01-2008	AT 502071 T 15-04-2011
			CN 101506274 A 12-08-2009
			EP 2035489 A1 18-03-2009
			FR 2903113 A1 04-01-2008
			JP 2010504375 A 12-02-2010
			KR 20090023656 A 05-03-2009
			WO 2008000814 A1 03-01-2008
EP 0469316	A2	05-02-1992	DE 4024403 A1 06-02-1992
			EP 0469316 A2 05-02-1992
US 2006041026	A1	23-02-2006	CN 1737061 A 22-02-2006
			DE 102004040266 A1 23-02-2006
			EP 1632521 A1 08-03-2006
			JP 4510721 B2 28-07-2010
			JP 2006057095 A 02-03-2006
			US 2006041026 A1 23-02-2006
US 2014020188	A1	23-01-2014	CA 2879687 A1 23-01-2014
			CN 104471046 A 25-03-2015
			EP 2875109 A1 27-05-2015
			US 2014020188 A1 23-01-2014
			WO 2014015226 A1 23-01-2014
US 2002161116	A1	31-10-2002	AU 2002244067 A1 12-09-2002
			BR 0207392 A 10-02-2004
			CA 2434751 A1 06-09-2002
			JP 2004530052 A 30-09-2004
			KR 20040034598 A 28-04-2004
			US 2002161116 A1 31-10-2002
			WO 02068752 A2 06-09-2002
US 5925341	A	20-07-1999	AR 011985 A1 13-09-2000
			AT 215349 T 15-04-2002
			AU 698457 B2 29-10-1998
			AU 5645198 A 24-09-1998
			BR 9801355 A 29-06-1999
			CA 2230723 A1 18-09-1998
			CN 1196928 A 28-10-1998
			CZ 9800806 A3 14-10-1998
			DE 69804528 D1 08-05-2002
			DE 69804528 T2 17-10-2002
			DK 0879589 T3 29-07-2002
			EP 0879589 A1 25-11-1998
			ES 2180124 T3 01-02-2003
			FR 2760970 A1 25-09-1998
			HU 9800592 A1 28-04-1999
			JP 3078256 B2 21-08-2000
			JP H10265326 A 06-10-1998
			JP 2000095629 A 04-04-2000
			PL 325388 A1 28-09-1998
			PT 879589 E 30-08-2002
RU 2142481 C1 10-12-1999			
US 5925341 A 20-07-1999			
ZA 9801865 A 06-10-1998			