

674234

Section 29(1)

AUSTRALIA

Patents Act 1990

NOTICE OF ENTITLEMENT

We, **TELSTRA CORPORATION LIMITED**, being the Applicant/Nominated Person in respect of Application No. 68082/94, state the following:

The person nominated for the grant of the patent has entitlement from the actual inventor because the Nominated Person would, on the grant of a patent for the invention, be entitled to have the patent assigned to it.

The person nominated for the grant of the patent is the applicant of the application listed in the declaration under Article 8 of the PCT.

The basic application listed in the declaration under Article 8 of the PCT is the first application made in a Convention country in respect of the invention.



14 October, 1996

(A member of the firm of DAVIES COLLISON CAVE
for and on behalf of the Applicant)



AU9468082

(12) PATENT ABRIDGMENT (11) Document No. AU-B-68082/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 674234

- (54) Title
AN OPTICAL ISOLATOR
- International Patent Classification(s)
(51)⁵ G02F 001/09 G02F 001/095
- (21) Application No. : 68082/94 (22) Application Date : 16.12.93
- (87) PCT Publication Number : WO94/15243
- (30) Priority Data
- | | | |
|-------------|-----------|--------------|
| (31) Number | (32) Date | (33) Country |
| PL6504 | 22.12.92 | AU AUSTRALIA |
- (43) Publication Date : 19.07.94
- (44) Publication Date of Accepted Application : 12.12.96
- (71) Applicant(s)
TELSTRA CORPORATION LIMITED
- (72) Inventor(s)
ROBERT ALAN PATTIE
- (74) Attorney or Agent
DAVIES COLLISON CAVE , 1 Little Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents
US 5111330
US 5052786
US 5029953
- (57) Claim

1. An optical isolator comprising two polariser means, two input/output ports formed respectively on said polariser means, and optical rotator means disposed between said polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics selected such that respective ones of a plurality of functions are performed on light of at least two different wavelength bands propagating, in use, through said isolator.




IN.

(51) International Patent Classification ⁵ : G02F 1/09, 1/095		A1	(11) International Publication Number: WO 94/15243
			(43) International Publication Date: 7 July 1994 (07.07.94)
(21) International Application Number: PCT/AU93/00663		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 16 December 1993 (16.12.93)			
(30) Priority Data: PL 6504 22 December 1992 (22.12.92) AU			
(71) Applicant (for all designated States except US): TELSTRA CORPORATION LIMITED [AU/AU]; 242 Exhibition Street, Melbourne, VIC 3000 (AU).		Published With international search report. With amended claims.	
(72) Inventor; and (75) Inventor/Applicant (for US only): PATTIE, Robert, Alan [AU/AU]; Lot 1, Cnr. Patman Drive and Grayden Street, Nyora, VIC 3987 (AU).			
(74) Agents: WEBBER, David, Brian et al.; Davies Collison Cave, 1 Little Collins Street, Melbourne, VIC 3000 (AU).			

674234

(54) Title: AN OPTICAL ISOLATOR

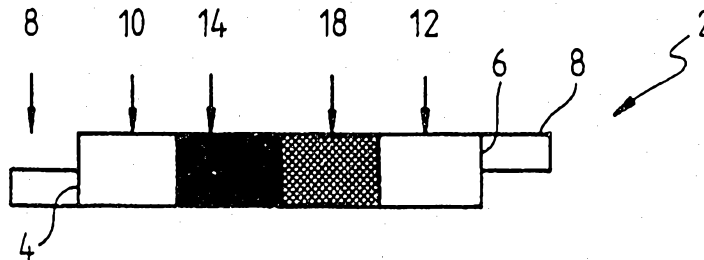

(57) Abstract

An optical isolator (2) comprising two polariser means (10, 12), two input/output ports (4, 6) formed respectively on the polariser means (10, 12), and optical rotator means (14, 18) disposed between the polariser means (10, 12), the optical rotator means (14, 18) including Faraday rotator means (14) and being selectively configured so the isolator (2) performs one of a plurality of isolator functions.

5

AN OPTICAL ISOLATOR

The present invention relates to an optical isolator, and in particular, an isolator which is wavelength selective.

10 Optical isolators are used in optical communications systems to restrict, or isolate, the direction of travel of optical signals to one direction over a broad wavelength band. It has also recently been discovered that there is application for isolators which are wavelength selective and restrict a first wavelength band to one direction of travel, and a second wavelength band to the opposite direction, as discussed in International Patent
15 Application No. PCT/AU93/00258 for a bidirectional isolator.

The present invention, more specifically, relates to using the wavelength dispersion characteristics of optical rotator materials, such as Faraday rotator materials, to provide isolator functions, and, in some instances, enhance performance.

20

Faraday rotators rotate polarised signals of a wavelength band λ by a selected number of degrees in a set clockwise or anticlockwise direction, regardless of whether the signals travel through the rotator in a forward or reverse direction. Faraday rotators are normally constructed from YIG, which is Yttrium based, or BIG, which is based on
25 Bismuth substituted YIG. Optical rotators can also be provided by multi-order half-wave plates, which can be cut from quartz and used to rotate optical signals of wavelength λ by a predetermined number of degrees. Unlike Faraday rotators, the half-wave plates will rotate a signal of wavelength λ in one direction as it passes therethrough in a forward direction but will perform a reciprocal rotation, by rotating the
30 signal in the opposite direction, when it passes through the wave plate in the reverse direction. Reciprocal optical rotators can also be fabricated from optically active material which continuously rotates polarised light along its length in a linear polarisation state.

Half-wave plates normally can achieve a desired rotation in a much shorter length of material than optically active material, which can also be cut from quartz.

5 The term wavelength dispersion is used herein to describe a characteristic of a device which processes differently or has a different effect on signals of different wavelengths. Similarly, the term polarisation dispersion is used to refer to a characteristic of a device which processes differently or has a different effect on signals of different polarisations.

10 Previously the dispersion characteristic of a Faraday material in a cascaded isolator assembly has only been used to achieve isolation of a broader signal wavelength band, as discussed in Kazuo Shiraishi and Shorjiro Kawakami, "Cascaded optical isolator configuration having high-isolation characteristics over a wide temperature and wavelength range", Optics Letters, Volume 12, No. 7, July 1987, pages 462 to 464.

15 In accordance with the present invention there is provided an optical isolator comprising two polariser means, two input/output ports formed respectively on said polariser means, and optical rotator means disposed between said polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics selected such that respective ones of a plurality of functions are performed on light of at least two different wavelength bands propagating, in use, through said isolator.

20 Advantageously the wavelength dispersion characteristics of said optical rotator means may determine said one of said isolator functions for at least two wavelength bands.

25 The present invention also provides an optical isolator comprising two polariser means, two input/output ports formed respectively on said polariser means, and optical rotator means disposed between said polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics such that said isolator performs different respective functions on light of at least two different wavelength bands propagating, in use, through said isolator.



The present invention further provides an optical isolator comprising two polariser means, two input/output ports formed respectively on said polariser means, and optical rotator means disposed between said polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics such that said isolator performs respective functions on light of at least two different and separate wavelength bands propagating, in use, through said isolator.

The present invention also provides an optical isolator comprising two polariser means, two input/output ports formed, respectively, on said two polariser means, and a first optical rotator means disposed between said two polariser means, said first optical rotator means including Faraday rotator means, said isolator being able to perform a selected one of a plurality of isolator functions on light of at least two different wavelength bands propagating, in use, through said isolator, said isolator functions including:

(a) isolating light in one of said wavelength bands and allowing light in the other one of said wavelength bands to pass between said ports in forward and reverse directions;

(b) isolating light in both of said wavelength bands;

(c) isolating light in one of said wavelength bands and partially isolating light in the other one of said wavelength bands; and

(d) isolating light in one of said wavelength bands in a forward direction and isolating light in the other one of said wavelength bands in a reverse direction;

wherein said selected one of said plurality of isolator functions is selected by selecting wavelength dispersion characteristics of said first optical rotator means.

The present invention further provides a method of manufacturing an optical isolator comprising two polariser means, two input/output ports formed, respectively, on said two polariser means, and optical rotator means disposed between said two polariser means, said optical rotator means including Faraday rotator means, said method including selecting wavelength dispersion characteristics of said optical rotator means to select one of a plurality of isolator functions to be performed on light of at least two different wavelength bands propagating, in use, through said isolator, said isolator functions including:



(a) isolating light in one of said wavelength bands and allowing light in the other one of said wavelength bands to pass between said ports in forward and reverse directions;

(b) isolating light in both of said wavelength bands;

5 (c) isolating light in one of said wavelength bands and partially isolating light in the other one of said wavelength bands; and

(d) isolating light in one of said wavelength bands in a forward direction and isolating light in the other one of said wavelength bands in a reverse direction.



10 Preferred embodiments of the present invention are hereinafter described, by way of example only, with reference to the accompanying drawings, wherein:

Figure 1 is a side view of a first preferred embodiment of an isolator;

Figure 2 is polarisation diagrams for the isolator of Figure 1 for light of wavelength

λ_2 ;

15



- 3 -

Figure 3 is polarisation diagrams for the isolator of Figure 1 for light of wavelength λ_1 ;

Figure 4 is a side view of a second preferred embodiment of an isolator;

Figure 5 is polarisation diagrams for the isolator of Figure 4 for light of wavelength λ_2 ;

Figure 6 is polarisation diagrams for the isolator of Figure 4 for light of wavelength λ_1 ;

Figure 7 is a side view of a third preferred embodiment of an isolator;

Figure 8 is polarisation diagrams for normal operation of the isolator of Figure 7;

Figure 9 is polarisation diagram for the isolator of Figure 7 when errors occur in a second Faraday rotator;

Figure 10 is polarisation diagrams for the isolator of Figure 7 when errors occur in a first Faraday rotator;

Figure 11 is a side view of a fourth preferred embodiment of an isolator;

Figure 12 is polarisation diagrams for normal operation of the isolator of Figure 11;

Figure 13 is polarisation diagrams for the isolator of Figure 11 when errors occur in a second Faraday rotator;

Figure 14 is polarisation diagrams for the isolator of Figure 11 when errors occur in a first Faraday rotator;

Figure 15 is a side view of fifth preferred embodiment of an isolator;

Figure 16 is polarisation diagrams for normal operation of the isolator of Figure 15 for light of wavelength λ_2 ;

Figure 17 is polarisation diagrams for normal operation of the isolator of Figure 15 for light of wavelength λ_1 ;

Figure 18 is polarisation diagrams for the isolator of Figure 15 for light of wavelength λ_2 when errors occur in a first Faraday/optical rotator;

Figure 19 is polarisation diagrams for the isolator of Figure 15 for light of wavelength λ_1 when errors occur in a first Faraday/optical rotator;

Figure 20 is polarisation diagrams for the isolator of Figure 15 for light of wavelength λ_2 when errors occur in a second Faraday/optical rotator; and

Figure 21 is polarisation diagrams for the isolator of Figure 15 for light of

wavelength λ_1 when errors occur in a second Faraday/optical rotator.

A first optical isolator 2, as shown in Figure 1, includes first and second input ports 4 and 6 formed at the junction of respective graded refractive index (GRIN) lenses 8 and spatial walk-off polarisers (SWP) 10 and 12. The GRIN lenses 8 are used to connect the ends of fibres to the isolator 2 and direct incoming and outgoing optical signals between the isolator 2 and the optical fibres with minimum insertion loss. The isolator 2 also includes a Faraday rotator 14 and a reciprocal optical rotator 18 disposed between the SWPs 10 and 12, such that all of the components form an in line series assembly. The first SWP 10 separates signals received on the first port 4 into vertically polarised and horizontally polarised components, and walks the vertical component upwards, and performs the reciprocal operation on components travelling in the reverse direction, i.e., from the second port 6 to the first port 4. The second SWP 12 also walks vertically polarised components upwards with respect to received horizontally polarised components, when the components travel in the forward direction from the first port 4 to the second port 6. Again, the second SWP 12 performs the reciprocal operation for components travelling the reverse direction, by walking vertically polarised components down with respect to the received horizontal components. The SWPs may be both formed from calcite. The assembly of the isolator 2 can be considered to have an upper and a lower section, where the first port 4 is aligned with the lower section and the second port 6 is aligned with the upper section.

The Faraday rotator 14 and the optical rotator 18 are configured so as to provide one of a plurality of isolator functions for the isolator 2 for two or more wavelength bands. For example, if λ_1 and λ_2 denote first and second wavelength bands, the functions may comprise:

- (a) Isolate signals of λ_1 and λ_2 for one direction. First wavelength λ_1 may be 1300 nm and the second, λ_2 may be 1500 nm. This function would provide isolation for separate wavelength bands.
- (b) Isolate signals of λ_2 for one direction and allow signals of λ_1 to travel through the isolator in both directions, i.e., allow the isolator 2 to be transparent to λ_1 . For example, either 1300 or 1550 nm could be isolated

- 5 -

and the other wavelength used for optical system communications. Also 1550 nm could be isolated and the assembly transparent to 1480 nm to reduce undesirable noise in doped fibre devices, such as rare earth amplifiers. The uninhibited wavelength λ_1 could also be used to perform OTDR analysis on the system, as discussed in International Patent Application No. PCT/AU93/00258.

- (c) Signals of λ_2 are isolated for one direction and signals of λ_1 may be partially isolated. This is relatively easy to achieve for most wavelength combinations of interest without producing a device which is overly sensitive to temperature variations. This function may be used for the same applications as discussed for (b), except λ_1 cannot be used effectively for OTDR analysis.
- (d) Isolate signals of λ_2 in one direction and isolate signals of λ_1 in the opposite direction. This allows the isolator 2 to function as a bidirectional isolator.

The different combinations of Faraday and optical rotators 14 and 18 which can be selected to provide the functions (a) to (d) are shown in Table 1 below, which is discussed hereinafter.

TABLE 1

Function	FARADAY ROTATOR (Odd and even refer to odd and even multiples of 45 degree rotation)					Effective Optical Rotation Examples		General Optical Rotator Requirements
	same plane odd λ_1 odd λ_2	orthogonal planes odd λ_1 odd λ_2	λ_2 plane +45 with respect to λ_1 plane even λ_1 odd λ_2	λ_2 plane -45 with respect to λ_1 plane even λ_1 odd λ_2	# λ_1 odd λ_2	λ_1	λ_2	
(a) Isolate λ_1 & λ_2	•					0 +45 -45	0 +45 -45	Always keeps both λ_1 and λ_2 in the same plane
		•				+45 -45	-45 +45	Always moves both λ_1 and λ_2 into the same plane
(b) Transparent to λ_1 & isolate λ_2			•			+45 0	0 -45	Always moves both λ_1 and λ_2 into the same plane
				•		-45 0	0 +45	Always moves both λ_1 and λ_2 into the same plane
(c) Partially isolate λ_1 & isolate λ_2					•	#	+45	Always moves both λ_1 and λ_2 into the same plane
(d) Isolate λ_1 forward & isolate λ_2 backward	•					+45 -45	-45 +45	Always moves both λ_1 and λ_2 into orthogonal planes
		•				+45 -45	+45 -45	Always keeps both λ_1 and λ_2 in orthogonal planes

The functions (a) to (d) are listed in the left hand column, and the type of Faraday rotator 14 required is marked with an *. The types of Faraday rotators are characterised by firstly the planes of polarisation which signals of the two wavelengths appear in after rotation by the Faraday rotator 14, i.e., the same plane, orthogonal to one another, or signals of λ_2 leading or lagging λ_1 by 45° . The notation $+45^\circ$ refers to clockwise rotation and -45° to anticlockwise rotation. Secondly, the type is characterised by whether the signals of λ_1 or λ_2 are rotated by an odd or even number of 45° rotations. The effective rotation required to be achieved by the optical rotator, for each wavelength λ_1 and λ_2 , to ensure the Faraday rotator 14 and reciprocal optical rotator 18 combination achieves the desired function for each case, is listed in the three right hand columns of Table 1.

The length of the Faraday rotator 14, which governs the length of the light transmission path therethrough, is selected so as to provide the rotator with a wavelength dispersion characteristic which gives rise to the desired polarisation component rotation $\pm m 180^\circ$, where m is a non-negative integer. Similarly, the optical path length of the reciprocal optical rotator 18 is selected to provide a wavelength dispersion characteristic which achieves the desired effective rotation $\pm m 180^\circ$. The reciprocal optical rotator may comprise half-wave plate or optically active material. The thinnest Faraday rotator 14 which provides an effective rotator combination is selected as the temperature sensitivity of the Faraday rotator 14 increases with increasing thickness.

The function (c) is a special case in that for the partially isolated wavelength λ_1 it is only desired to ensure that signals of λ_1 travel in one direction, whereas in the reverse direction it is unimportant whether the λ_1 signals are inhibited or allowed to pass through the isolator 2. The band λ_1 may be used, for example, to pass pump signals through the isolator 2 to an optical amplifier. Normally pump signals are introduced between the isolator associated with an amplifier, and enabling the signals to be passed through one of those isolators instead significantly improves the noise characteristic of the optical system including the amplifier and isolators. The # in the column for λ_1 of the optical rotator 18 and in the Faraday rotator column indicates that Faraday and optical rotators are selected to achieve the same total effective rotation as that for λ_2 in the forward direction. Yet, the total effective rotation produced by the combination in the

reverse direction for λ_1 is of no concern.

If the reciprocal optical rotator is required to perform the same effective rotation, according to Table 1, for λ_1 and λ_2 then it can be omitted from isolator 2, which requires
5 the SWP 12 to then be reoriented to take the omission into account. The Faraday rotator must in this case rotate the polarisation components to be parallel and perpendicular to the SWP walk-off direction.

The isolator 2 in Figure 1 may be configured to perform any one of the functions
10 (a) to (d) but is described hereinafter as configured to perform function (b). The polarisation diagrams of Figures 2 and 3 show the polarisation components and the positions of the components at each of the interfaces of the parts 10 to 12 of the isolator 2, when viewed from the first port 4 of the isolator 2. The polarisation diagrams of Figures 5, 6, 8, 9, 10, 12, 13, 14 and 16 to 21 adopt the same convention, and omit
15 representations for the interfaces between the Faraday rotators 14 and optical rotators 18.

With reference to the forward direction diagram 20 of Figure 2, the vertical component of light incident on the first port 4 is walked up to the upper section of the Faraday rotator 14 by the first SWP 10, whereas the horizontal component is allowed to
20 pass unchanged. Both components are rotated 90° , i.e., $\pm 90^\circ \pm m180^\circ$, by the Faraday/optical rotator combination 14, 18, and then the lower vertically polarised component is walked up by the second SWP 12 to be incident on the second port 6 with the horizontally polarised component. In the reverse direction diagram 22, light incident on the second port 2 follows the same path to the rotator combination 14, 18, but in this
25 direction the components effectively undergo no rotation, i.e., $\pm m 180^\circ$. The upper horizontally polarised component is allowed to pass unchanged by the first SWP 10 so as to be dispersed above the first port 4, and the lower vertically polarised component is walked downwards out of the isolator 2 before reaching the first port 4. For signals of wavelength λ_1 , with reference to the forward direction diagram 24 of Figure 3, the
30 components of the signals incident on the first port 4 follow the same path as those of λ_2 as shown in diagram 20. However in the reverse direction, as shown in diagram 26, the signals of λ_1 are rotated by 90° by the rotator combination 14, 18 so a vertically

polarised component appears at the upper section of the first SWP 10 and can be walked down to a horizontal component so that both components are incident at the first port 4.

With the ports 4 and 6 displaced vertically by the spatial walk-off distance as illustrated in Figure 1, both polarised components travel the same distance through the isolator 2, which gives minimum polarisation dispersion. However the spatial walk-off distance of the SWPs has a slight wavelength dependency, so as the components are only walked in one direction, the isolator 2 is more sensitive to the wavelength dispersion of the SWPs 10 and 12. The insertion loss due to the wavelength dependence of the SWPs 10 and 12 can be minimised by aligning the GRIN lenses as shown in Figure 4 for a second isolator 30. This however is at the cost of minimising polarisation dispersion as the polarised components of signals will now travel different distances between the first port 4 and the second port 6. The second isolator 30 can also be used to perform all of the functions (a) to (d).

15

Any one of the isolator assemblies discussed herein may be configured with the first and second ports 4 and 6 aligned or not aligned, and the same isolator function is performed provided the last SWP 12 and GRIN lens 8 or the last SWP 12, GRIN lens 8 and last half-wave plate for isolators having multiple half-wave plates, are rotated by 180°. This may, however, require some alteration of the effective rotation performed by rotators in the isolator. A polariser can be included at the face of a Faraday rotator which is the closest to an SWP 10 or 12 to enhance the performance of each isolator 2.

With reference to the polarisation diagram 32 of Figure 5, signals of wavelength λ_2 incident on the first port 4 of the second isolator 30 are split into a vertically polarised component which is walked up to the Faraday rotator 14 and a horizontally polarised component is unchanged by the first SWP 10. The rotator combination 14, 18 is now configured to effect no rotation on the components in the forward direction but effects the 90° rotation on the components in the reverse direction, as the second SWP 12 has been rotated by 180° with the GRIN lens 8 of the second port 6. The SWP 12 therefore walks the vertically polarised component down to the horizontally polarised component so that both components are incident on the second port 6. Light incident on the second

port 6, with reference to the diagram 34, travels the same path until the components are rotated 90° by the rotator combination 14, 18. A horizontally polarised component is then passed by the first SWP 10 unchanged to be dispersed above the first port 4, and the vertical component received by the SWP 10 is walked out of the isolator 2 before reaching the first port 4. For signals of wavelength λ_1 , as shown in the polarisation diagrams 36 and 38 of Figure 6 for the forward and reverse directions respectively, signals incident on the first port 4 follow the same path as that shown in the diagram 32 of Figure 5. However, in the reverse direction the rotator combination does not effect a rotation on the incident components so a vertical component is incident on the first SWP 10 in the upper section, and a horizontal component in the lower section. Therefore the first SWP 10 walks the vertical component down to the horizontal component so that both are incident on the first port 4.

The first and second isolators 2 and 30 are sensitive to errors in the rotators which may be induced by temperature or wavelength fluctuations. The third and fourth isolators 50 and 80 of Figures 7 and 11 are able to perform functions (a) and (d) and are less sensitive to Faraday errors. Erroneous components included by Faraday errors should not appear at the ports 4 and 6.

The third isolator 50 includes a rotator combination comprising two Faraday rotators 14 with a polariser 54 disposed between them. The rotators 14 both perform an effective rotation of 45° . A first half-wave plate 52 is disposed between the rotator combination and the first SWP 10, and a second half-wave plate 56 is disposed between the rotated combination and the second SWP 12. The first and second ports 4 and 6 are not aligned, and the half-wave plates 52 and 56 are aligned with the first port in the lower section of the isolator 50. The half-wave plates each perform an effective 90° rotation of all signals. The rotator combination 14,54 rotates horizontal and vertical components received into the same polarisation plane. The polariser 54 only allows light polarised in the 45° - 225° plane to pass therethrough. The isolator 50 is configured to perform function (a) with 0° effective optical rotator rotation, i.e., no optical rotators are required. For designs which include a plurality of Faraday rotators or optical rotators, as in the isolator 50 of Figure 7, each must meet the requirements of Table 1. With

reference to the forward direction polarisation diagram 58 of Figure 8, light incident on the first port 4 is split into horizontal and vertical components by the first SWP 10, with the horizontal component being incident on the first half-wave plate 52, and the vertical component being walked up to the transmissive medium, e.g., 0° half-wave plate, immediately above the half-wave plate 52. The horizontal component is rotated 90° by the half-wave plate 52 so both components are polarised in the same plane when incident on the first rotator 14a. The components are rotated into the 45° - 225° plane and are allowed to pass by the polariser 54 to the second rotator 14b, which rotates the components into the horizontal plane. The second half-wave plate 56 rotates the lower component 90° into the vertical plane, and this vertical component is then walked up to the horizontal component by the second SWP 12, so both components are incident on the second port 6. Light incident on the second port 6 returns via the same path, as shown in the reverse direction polarisation diagram 60, until the two horizontally polarised components are incident on the second rotator 14b. The two components are rotated by the second rotator 14b into the 135° - 315° diagonal plane, which is orthogonal to the plane of the polariser 54. The components are therefore inhibited by the polariser 54 and no light appears in the first rotator 14a or at the first port 4.

If an error is induced in the second Faraday rotator 14b such that some effective rotation of the components is performed in the reverse direction, i.e., anticlockwise, then in the forward direction, as shown in the polarisation diagram 62 of Figure 9, the second Faraday rotator 14 outputs two components polarised in the vertical plane, instead of the horizontal plane. The lower component is rotated by the second half-wave plate 56 into the horizontal plane and is allowed to pass unchanged by the second SWP 12 so as to be dispersed below the second port 6. The vertical component passed above the half-wave plate 56 is walked up by the second SWP 12 out of the isolator 50 before reaching the second port 6. In the reverse direction, as shown in the reverse direction diagram 64, the second rotator 14b will output components polarised in the 45° - 225° plane which are allowed to pass to the first rotator 14a by the polariser 54. The components are rotated into the horizontal plane by the first rotator 14a, and the lower component is rotated 90° into the vertical plane by the first half-wave plate 52. The upper horizontally polarised component passes above the half-wave plate 52 through the first SWP 10 unchanged so

as to be dispersed above the first port 4. The vertical component emitted by the half-wave plate 52 is walked out of the isolator 50 below the first port by the first SWP 10.

5 If a similar error occurs in the first Faraday rotator 14a, for the forward direction, as shown in the polarisation diagram 66 of Figure 10, the Faraday rotator 14a produces components polarised in the 135° - 225° plane which are immediately inhibited from proceeding further by the polariser 54. The reverse direction polarisation diagram 68 of Figure 10 is the same as the reverse direction diagram 60 of Figure 8 for normal
10 operation.

The fourth isolator 80 of Figure 11 is the same as the third isolator 50, except the first and second rotators 14a and 14b perform their effective 45° rotation in the anticlockwise direction, instead of the clockwise direction, so the polariser 54 polarises
15 light in the 135° - 315° plane, instead of the 45° - 135° plane. Outside of the rotator combination 14,54, light travels precisely the same path through the fourth isolator 80 as for the third isolator 50, as shown in the forward and reverse polarisation diagrams 82 and 84 of Figure 12 for normal operation of the isolator 80, the forward and reverse
20 direction polarisation diagrams 86 and 88 of Figure 13 where the second rotator 14b induces errors and the forward and reverse direction polarisation diagrams 90 and 92 of Figure 14 where the first Faraday rotator 14a introduces errors.

The third and fourth isolators 50 and 80 illustrate that the same function can be performed provided the Faraday rotator combination provides effective rotation which is
25 an odd multiple of 45° .

A fifth isolator 100 has the same structure as the third and fourth isolators 50 and 80, except the Faraday rotators 14 are replaced by two Faraday/optical rotators 102 and 104, which are Faraday rotator 14 and reciprocal optical rotator 18 combinations. The
30 structure of the fifth isolator 100 can be used to realise all of the four functions (a) to (d). The structure can also invoke rotations which are odd integer multiples of 45° for both λ_1 and λ_2 , where the polarised components appear in orthogonal planes for function (a),

and appear in the same plane for function (d), as indicated in Table 1. This cannot be achieved using the structure of the third and fourth isolators. The structure is also not sensitive to rotator errors, as errors induced by the rotators 102 and 104 are not passed to the ports 4 or 6.

5

Considering the fifth isolator when configured to perform function (b), light of the second wavelength λ_2 incident on the first port 4 is split into a vertical component which is walked up by the first SWP 10, and a horizontal component which is passed to the first half-wave plate 52, as shown in the forward direction diagram 106 of Figure 16. The horizontal component is rotated into the vertical plane and the two vertically polarised components are rotated by 45° in a clockwise direction by the first rotator 102. The polariser 54 passes the components to the second rotator 104 which rotates them again by 45° in the clockwise direction. The lower component is rotated into the vertical plane by the second half-wave plate 56 and is walked up to the other horizontal component by the second SWP 12 so as to be incident on the second port 6. Light incident on the second port 6 returns via the same path, as shown in the reverse direction diagram 108 of Figure 16, until the second rotator 104 rotates the components clockwise by 45° so as to be polarised in the 135° - 225° diagonal plane. The polariser 54 then prevents the components from proceeding further to the first port 4.

20

Light of the wavelength λ_1 incident on the first port 4 follows the same path as light of the wavelength λ_2 to the second port 6, as shown in the forward direction polarisation diagram 110 of Figure 17. In the reverse direction, for light incident on the second port 6, as shown in the polarisation diagram 112, the horizontal components received by the second rotator 104 are rotated in an anticlockwise direction by 45° , instead of the clockwise direction for wavelength λ_2 . This occurs because for λ_1 the optical rotator of the rotator 104 produces no effective rotation but for λ_1 the optical rotator of the rotator 104 produces a 45° effective rotation, according to Table 1. The 45° - 225° polarised components are therefore allowed to pass by the polariser 54 and are rotated into the vertical plane by the second rotator 102. The lower vertically polarised component is rotated into the horizontal plane by the first half-wave plate 52 and the two components are then combined by the first SWP 10 so as to be incident on the first

30

port 4.

If the first Faraday/optical rotator 102 induces errors by producing an effective 45° rotation in the anticlockwise direction, for signals of λ_2 incident on the first port 4, the components are prohibited from proceeding to the second rotator 104 and the second port 6 by the polariser 54, as shown in the forward direction diagram 114 of Figure 18. For the reverse direction, as shown in diagram 116, signals incident on the second port 6 travel the same path as that shown in Figure 16. For signals of λ_1 incident on the first port 4, the path is the same as that for diagram 114 of Figure 18, as shown in the forward direction diagram 118 of Figure 19. In the reverse direction, as shown in diagram 120 of Figure 19, the components polarised in the 45°-225° plane which are incident on the first rotator 102 are rotated into the horizontal plane, instead of the vertical plane, and the lower component is then rotated by the half-wave plate 52 into the vertical plane. The lower vertical component is walked out of the isolator 100 before reaching the first port 4 and the upper horizontally polarised component passes above the half-wave plate 52 through the first SWP 10 and is dispersed above the first port 4.

If, however, errors are induced by the second Faraday/optical rotator 104, wherein the rotator 104 produces an effective 45° in a direction opposite to that shown in the diagrams 106 to 112 of Figures 16 and 17, then for light incident on the first port 4, as shown in the forward direction diagram 122 of Figure 20, the second rotator 104 rotates the components received into the vertical plane. The lower vertical plane is rotated in the horizontal plane by the second half-wave plate 56 and passes unchanged through the second SWP 12 so as to be dispersed below the second port 6. The upper vertical component passes above the second half-wave plate 56 and is walked out of the isolator 100 by the second SWP 12 before reaching the second port 6. For light incident on the second port 6, as shown in the reverse direction diagram 124 the second rotator 104 outputs components polarised in the 45°-225° diagonal plane, which are allowed to pass by the polariser 54 to the first rotator 102. The first rotator 102 rotates the components into the horizontal plane and the upper component passes directly to the first SWP 10 and is allowed to pass therethrough unchanged so as to be dispersed above the first port 4. The lower component is rotated into the vertical plane by the first half-wave plate 52 and

- 15 -

is walked out of the isolator 100 by the first SWP 10. The signals of wavelength λ_1 , the path is the same in the forward direction as for signals of λ_2 , as shown in the polarisation diagrams 126 of Figure 21 and 122 of Figure 20. In the reverse direction, as shown in diagram 128 of Figure 21, the second rotator 104 outputs components polarised in the
5 135°-315° diagonal plane which are prohibited from proceeding to the first rotator 102 and the first port 4 by the polariser 54.

The rotator elements of all of the isolators 2, 30, 50, 80 and 100 can be selected so that the various isolator functions can be performed for more than two wavelengths.
10 For example, wavelengths λ_1 , λ_2 and λ_4 may be isolated, and the isolator could be made transparent to wavelengths λ_3 and λ_5 . The Faraday elements of all the isolators 2, 30, 50, 80 and 100 may be a single Faraday element or a cascade of Faraday elements to obtain their required thickness or rotation characteristic.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An optical isolator comprising two polariser means, two input/output ports formed respectively on said polariser means, and optical rotator means disposed between said
5 polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics selected such that respective ones of a plurality of functions are performed on light of at least two different wavelength bands propagating, in use, through said isolator.
- 10 2. An optical isolator as claimed in claim 1, wherein said functions include isolating light in one of said wavelength bands and allowing light in the other one of said wavelength bands to pass between said ports in forward and reverse directions.
- 15 3. An optical isolator as claimed in claim 1, wherein said functions include isolating light in both of said wavelength bands.
4. An optical isolator as claimed in claim 1, wherein said functions include isolating light in one of said wavelength bands and partially isolating light in the other one of said wavelength bands.
- 20 5. An optical isolator as claimed in claim 1, wherein said functions include isolating light in one of said wavelength bands in a forward direction and isolating light in the other one of said wavelength bands in a reverse direction.
- 25 6. An optical isolator as claimed in claim 1, 12 or 13, wherein said optical rotator means further includes reciprocal rotator means.
7. An optical isolator as claimed in claim 1, 12 or 13, which is substantially tolerant to errors induced by said Faraday rotator means.
- 30 8. An optical isolator as claimed in claim 1, 12 or 13, wherein said optical rotator means further includes segmented reciprocal rotator means having at least two light



receptive sections, one of said sections including a transmissive medium and the other of said sections including optical rotating material.

9. An optical isolator as claimed in claim 8, including two of said optical rotator
5 means abutting said polariser means, respectively, and having further polariser means disposed therebetween.

10. An optical isolator as claimed in claim 9, wherein said segmented reciprocal rotator means abut the polariser means on which said ports are formed.

10

11. An optical isolator as claimed in claim 1, 12 or 13, wherein said polariser means includes a spatial walk-off polariser.

12. An optical isolator comprising two polariser means, two input/output ports formed
15 respectively on said polariser means, and optical rotator means disposed between said polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics such that said isolator performs different respective functions on light of at least two different wavelength bands propagating, in use, through said isolator.

20

13. An optical isolator comprising two polariser means, two input/output ports formed respectively on said polariser means, and optical rotator means disposed between said polariser means, said optical rotator means including Faraday rotator means and having wavelength dispersion characteristics such that said isolator performs respective functions
25 on light of at least two different and separate wavelength bands propagating, in use, through said isolator.

14. An optical isolator as claimed in claim 12, wherein light in one of said wavelength bands is isolated and light in the other one of said wavelength bands is passed between said
30 ports in forward and reverse directions.



15. An optical isolator as claimed in claim 13, wherein light in both of said wavelength bands is isolated.

16. An optical isolator as claimed in claim 12, wherein light in one of said wavelength
5 bands is isolated and light in the other one of said wavelength bands is partially isolated.

17. An optical isolator as claimed in claim 12, wherein light in one of said wavelength bands is isolated in a forward direction and light in the other one of said wavelength bands is isolated in a reverse direction.

10

18. An optical isolator as claimed in claim 1, 12 or 13, wherein the optical path length of said optical rotator means is selected to provide said wavelength dispersion characteristics.

15 19. An optical isolator comprising two polariser means, two input/output ports formed, respectively, on said two polariser means, and a first optical rotator means disposed between said two polariser means, said first optical rotator means including Faraday rotator means, said isolator being able to perform a selected one of a plurality of isolator functions on light of at least two different wavelength bands propagating, in use, through said
20 isolator, said isolator functions including:

(a) isolating light in one of said wavelength bands and allowing light in the other one of said wavelength bands to pass between said ports in forward and reverse directions;

(b) isolating light in both of said wavelength bands;

25 (c) isolating light in one of said wavelength bands and partially isolating light in the other one of said wavelength bands; and

(d) isolating light in one of said wavelength bands in a forward direction and isolating light in the other one of said wavelength bands in a reverse direction;

wherein said selected one of said plurality of isolator functions is selected by
30 selecting wavelength dispersion characteristics of said first optical rotator means.



20. An optical isolator as claimed in claim 19, wherein said optical rotator means further includes reciprocal rotator means.

21. An optical isolator as claimed in claim 19, wherein said optical isolator is
5 substantially tolerant to errors induced by said Faraday rotator means.

22. An optical isolator as claimed in claim 19, wherein said optical rotator means further includes segmented reciprocal rotator means having at least two light receptive sections, one of said sections including a transmissive medium and the other of said
10 sections including optical rotating material.

23. An optical isolator as claimed in claim 22, including a second optical rotator means, each of the first and second optical rotator means respectively abutting said two polariser means and a third polariser means disposed between the first and second optical rotator
15 means.

24. An optical isolator as claimed in claim 23, wherein said segmented reciprocal rotator means abut the polariser means on which said ports are formed.

25. An optical isolator as claimed in claim 19, wherein said polariser means includes a spatial walk-off polariser.

26. An optical isolator as claimed in claim 19, wherein the optical path length of said optical rotator means is selected to select said wavelength dispersion characteristics.

27. A method of manufacturing an optical isolator comprising two polariser means, two input/output ports formed, respectively, on said two polariser means, and optical rotator means disposed between said two polariser means, said optical rotator means including Faraday rotator means, said method including selecting wavelength dispersion
25 characteristics of said optical rotator means to select one of a plurality of isolator functions to be performed on light of at least two different wavelength bands propagating, in use, through said isolator, said isolator functions including:
30



(a) isolating light in one of said wavelength bands and allowing light in the other one of said wavelength bands to pass between said ports in forward and reverse directions;

(b) isolating light in both of said wavelength bands;

5 (c) isolating light in one of said wavelength bands and partially isolating light in the other one of said wavelength bands; and

(d) isolating light in one of said wavelength bands in a forward direction and isolating light in the other one of said wavelength bands in a reverse direction.

10 28. An optical isolator substantially as hereinbefore described with reference to the accompanying drawings.

15

DATED this 14th day of October, 1996

TELSTRA CORPORATION LIMITED

By its Patent Attorneys

20 DAVIES COLLISON CAVE



1/8

68082/94

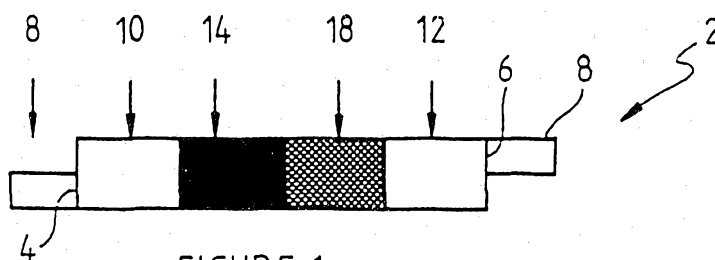


FIGURE 1

FIGURE 2

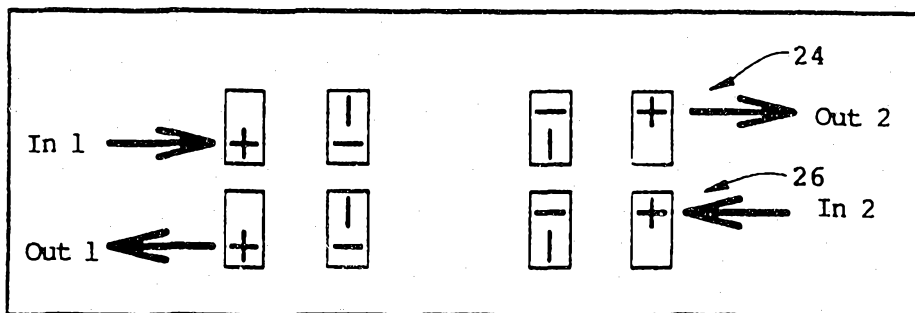
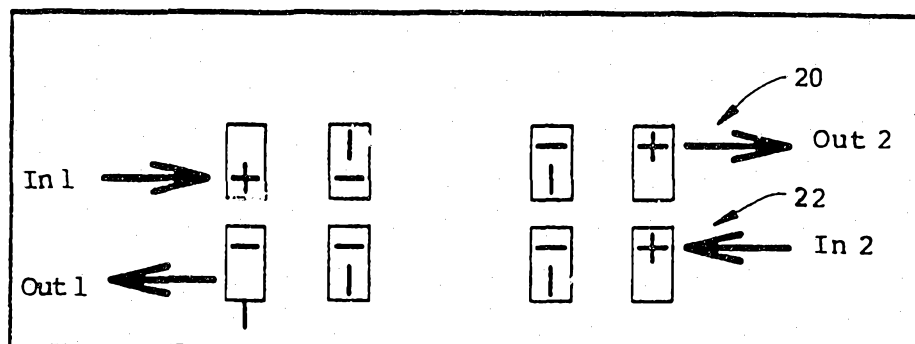


FIGURE 3

2'8

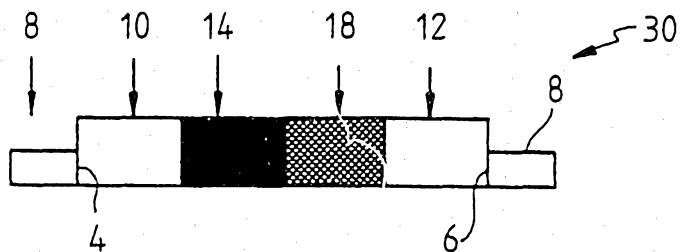


FIGURE 4

FIGURE 5

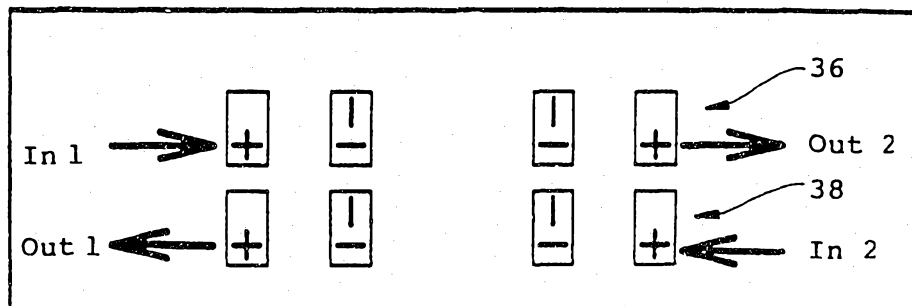
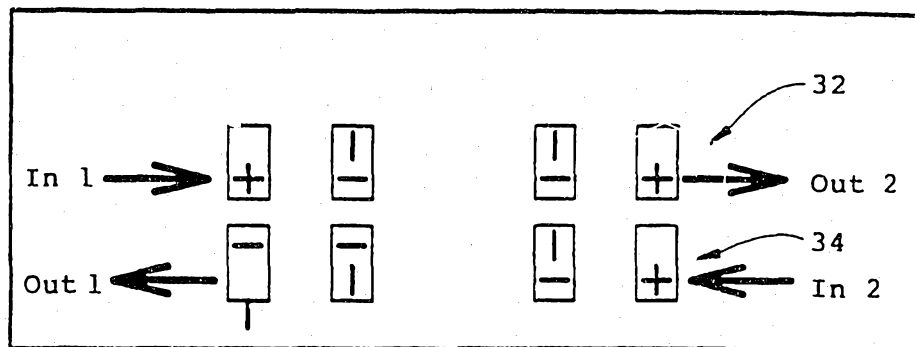


FIGURE 6

3/8

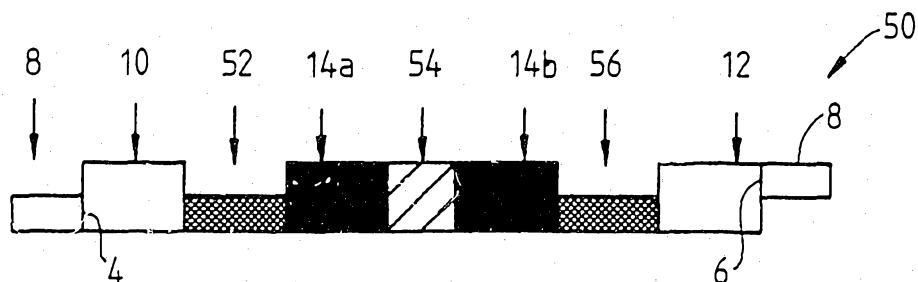


FIGURE 7

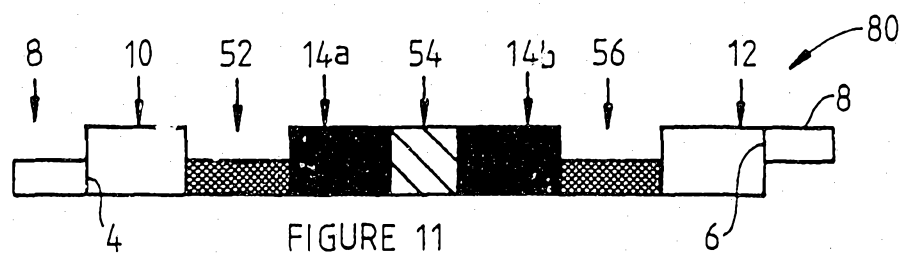


FIGURE 11

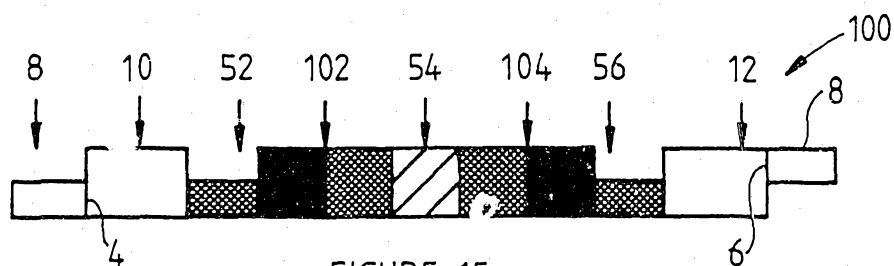
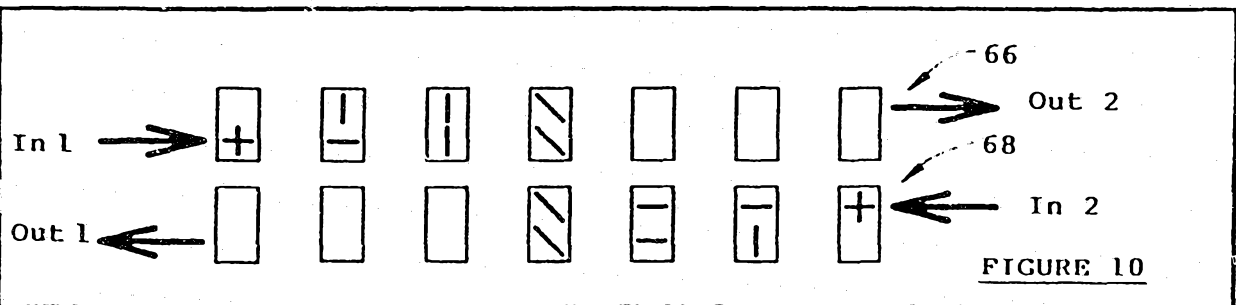
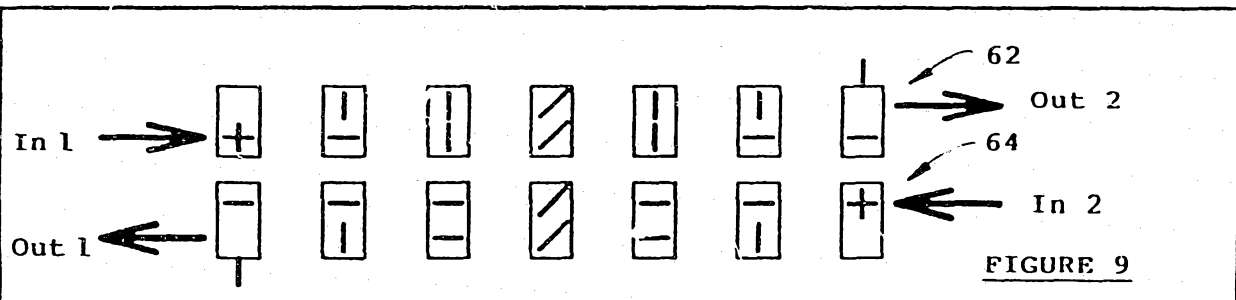
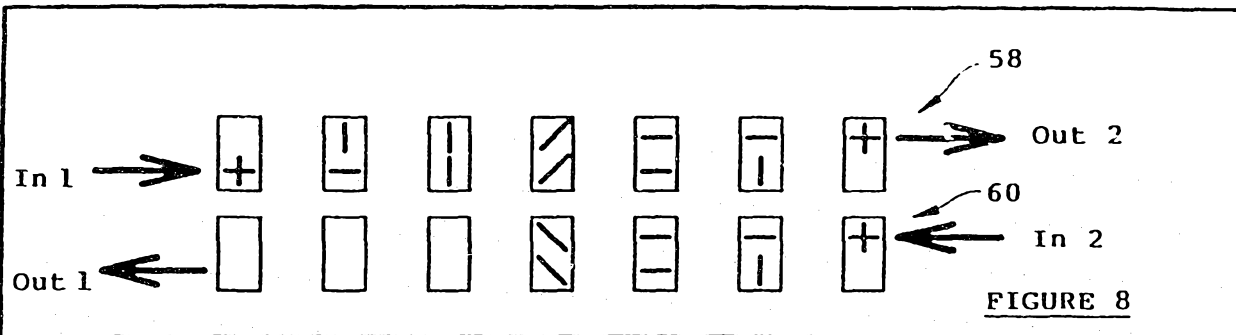


FIGURE 15

4/8



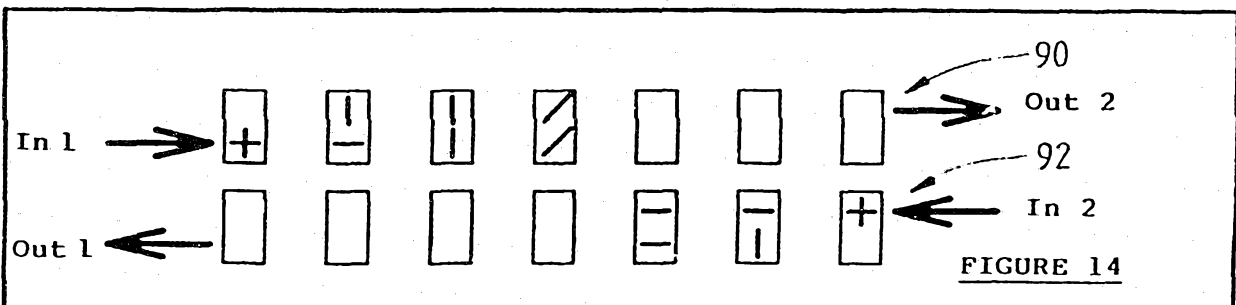
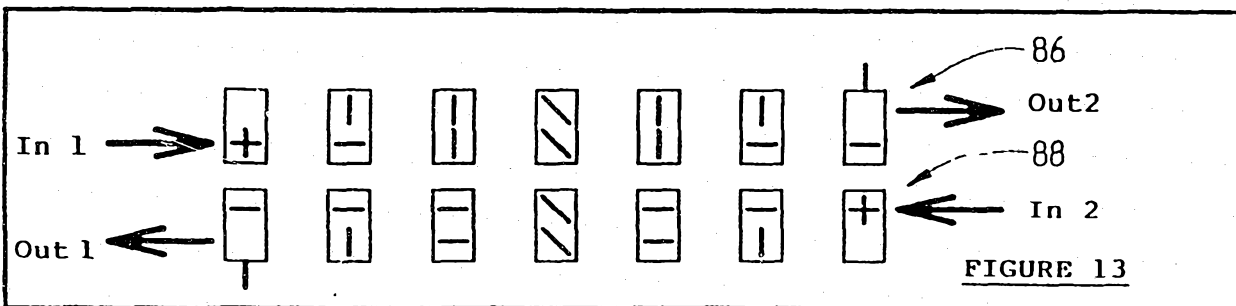
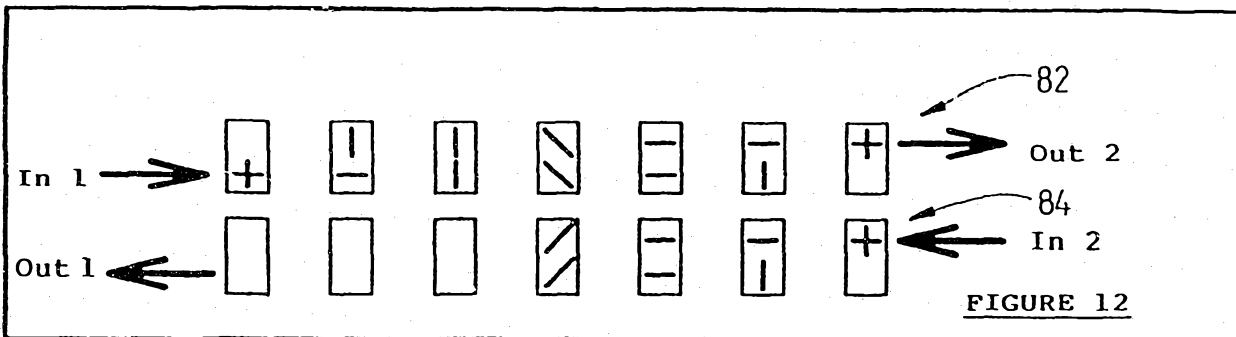


FIGURE 16

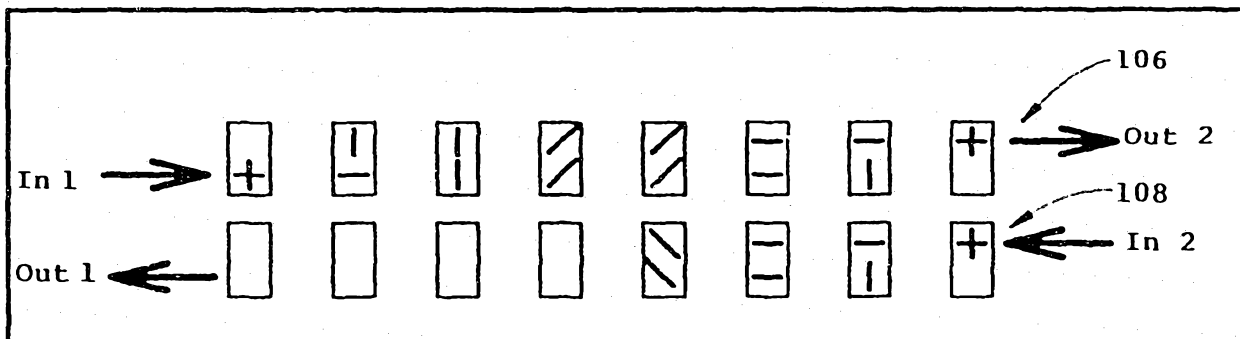
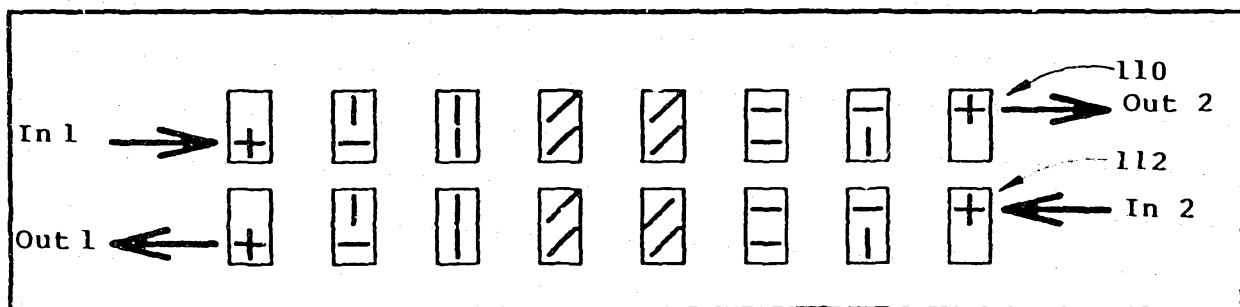


FIGURE 17



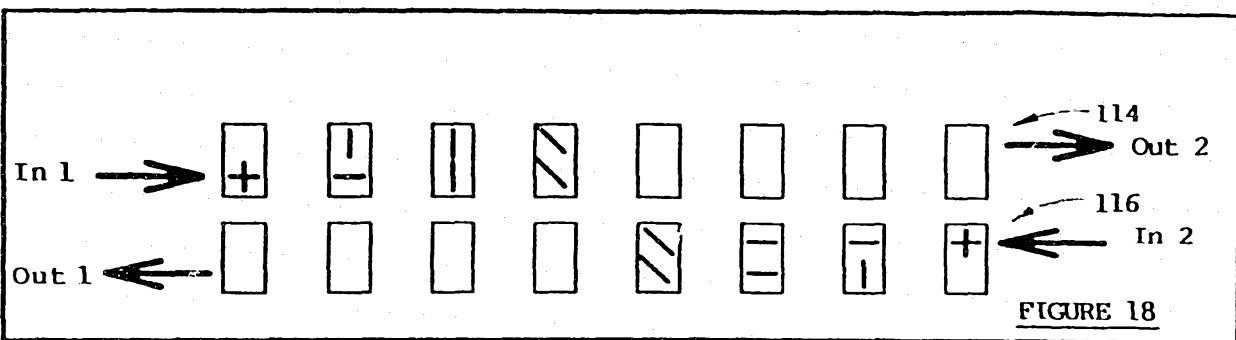


FIGURE 18



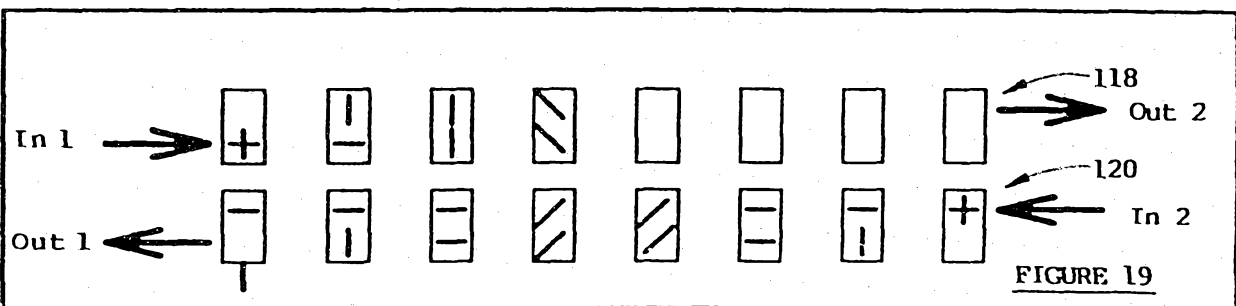


FIGURE 19


8/8

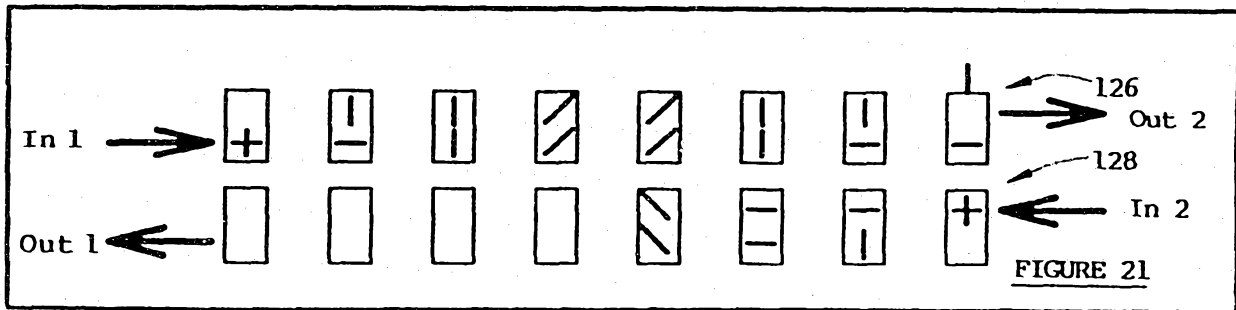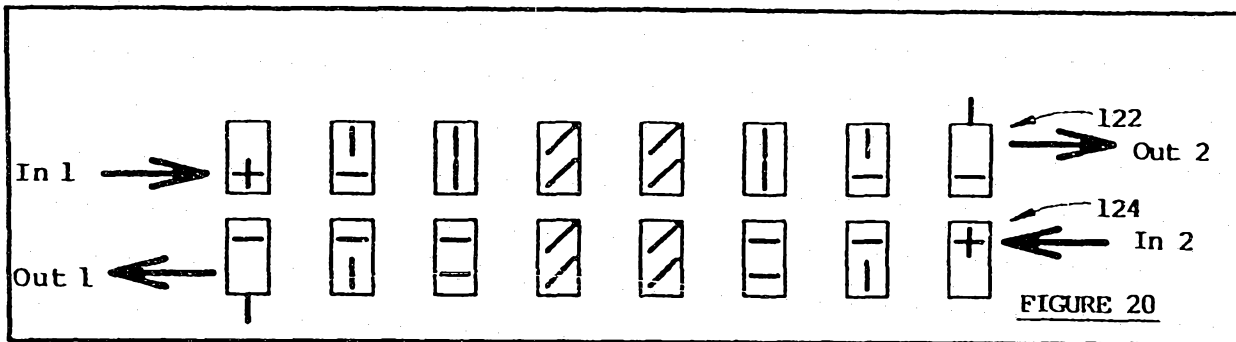

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 93/00663

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl. ⁵ G02F 1/09, 1/095 According to International Patent Classification (IPC) or to both national classification and IPC					
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC G02F 1/09, 1/095 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC as above Electronic data base consulted during the international search (name of data base, and where practicable, search terms used) DERWENT JAPIO					
C. DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.			
X	US,A, 5029953 (DEXTER et al) 9 July 1991 (09.07.91) column 1, lines 13-36; column 4 lines 14-26; column 5 lines 6-10; column 6, lines 32-41, lines 57-64; column 7 lines 57-66	1,2,4,12			
X	EP,A, 413566 (OPTICS FOR RESEARCH) 20 February 1991 (20.02.91) page 3 lines 5-25; page 3 line 57 - page 4 line 10; page 6 lines 27-29; page 7 lines 36-49; page 8 lines 18-30; Fig. 1	1,2,4			
X	WO,A, 91/14199 (MASSACHUSETTS INST TECH) 19 September 1991 (19.09.91) page 3 line 1 - page 4 line 2; page 4 line 21 - page 5 line 11; page 6 line 25 - page 7 line 33; Fig. 1	1,2,4,7,8,12			
<div style="display: flex; justify-content: space-between;"> <div> <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. </div> <div> <input checked="" type="checkbox"/> See patent family annex. </div> </div>					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> * Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 33%; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> <td style="width: 33%;"></td> </tr> </table>			* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family				
Date of the actual completion of the international search 30 March 1994 (30.03.94)		Date of mailing of the international search report 13 April 1994 (13.04.94)			
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No. 06 2853929		Authorized officer  M.E. DIXON Telephone No. (06) 2832194			

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.
A	US,A, 5031983 (DILLON, et al) 16 July 1991 (16.07.91) Abstract; col 1 - col 4	1,7,8
A	US,A, 4978189 (BLONDER et al) 18 December 1990 (18.12.90) Abstract; col 7 line 42 - col 8 line 2; Fig. 13	
A	US,A, 4856878 (WILSON et al) 15 August 1989 (15.08.89) Whole document	
A	US,A, 4178073 (UCHIDA et al) 11 December 1979 (11.12.79) Abstract	
P,A	EP,A, 533398 (AMERICANA TELEPHONE & TELEGRAPH CO) 24 March 1993 (24.03.93) Abstract; Figure 1	1,12
A	EP,A, 512783 (AMERICAN TELEPHONE & TELEGRAPH CO) 11 November 1992 (11.11.92) page 2 line 58 - page 3 line 13; page 5 lines 15,16	
A	EP,A, 390604 (GTE LABS INC) 3 October 1990 (03.10.90) Abstract	
A	EP,A, 252509 (NEC CORP) 13 January 1988 (13.01.88) Abstract	
P,A	Patent Abstracts of Japan, P-1573, page 46, JP,A, 5-61002 (MATSUSHITA ELECTRIC CO LTD) 12 March 1993 (12.03.93) Abstract	
A	OPTICS LETTERS, Volume 12, No. 7, issued July 1987 (Optical Society of America), Shiraishi et al "Cascaded optical isolator configuration having high-isolation characteristics over a wide temperature and wavelength range", pages 462-464 Whole document	

INTERNATIONAL SEARCH REPORT

information on patent family members

International application No.

PCT/AU 93/00663

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
EP	413566	JP	3116114	US	5111330
WO	9114199	US	5052786		
US	5031983	EP	450887	JP	4230730
US	4978189	EP	429216	JP	3171103
US	4178073	JP	53149046		
EP	512783	JP	5157994		
EP	390604	CA	2011830	JP	2284111
				US	4988170
EP	252509	JP	63017426	US	4756607
END OF ANNEX					