



(43) International Publication Date
29 January 2015 (29.01.2015)

- (51) International Patent Classification:
G02B 1/11 (2006.01)
- (21) International Application Number:
PCT/US2014/046962
- (22) International Filing Date:
17 July 2014 (17.07.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/858,529 25 July 2013 (25.07.2013) US
14/099,810 6 December 2013 (06.12.2013) US
- (71) Applicant: **APPLE INC.** [US/US]; 1 Infinite Loop, Cupertino, California 95014 (US).
- (72) Inventors: **ROGERS, Matthew S.**; 1 Infinite Loop, Cupertino, California 95014 (US). **BABIARZ, Kristina A.**; 1 Infinite Loop, Cupertino, California 95014 (US). **MEMERING, Dale N.**; 1 Infinite Loop, Cupertino, California 95014 (US).
- (74) Agents: **FERRAZANO, Michael J.** et al.; Womble Carlyle Sandridge & Rice LLP, 10050 North Wolfe Road, Suite 260, Cupertino, California 95014 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CHEMICAL STRENGTHENING OF ANTI-REFLECTIVE COATINGS (ARC)

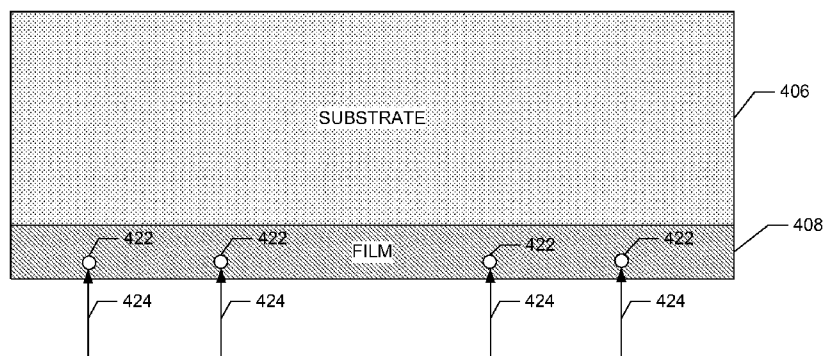


FIG. 11

(57) Abstract: A strengthened film for a substrate such as a glass panel is provided. The strengthened film may be formed by implanting sodium in the film, and then performing an exchange through which the sodium is replaced by potassium. The film may be an anti-reflective coating. Related assemblies and methods are also provided.

CHEMICAL STRENGTHENING OF ANTI-REFLECTIVE COATINGS (ARC)

TECHNICAL FIELD

[0001] The present disclosure relates generally to chemical strengthening, and
5 more particularly to chemical strengthening of films and substrates and related assemblies and methods. In another aspect, the present disclosure relates generally to computing and electronic devices, and more particularly to visual displays and presentations for such computing and electronic devices.

BACKGROUND

10 [0002] Personal computing and electronic devices, such as laptop computers, media players, cellular telephones, smartphones, personal digital assistants (PDAs) and the like are becoming ubiquitous. Such computing devices typically employ a display to output graphics, text, and other visual information. Often the display is covered by a panel that protects the display from damage and contamination. In
15 many devices the panel is formed from glass. Glass panels may be preferable in that they may substantially avoid interfering with a user's view of the display due to desirable optical properties thereof.

[0003] The ability to provide such devices in decreasing sizes at affordable costs to consumers while still maintaining or increasing the power, operating speed and
20 aesthetic appeal of such devices, has contributed greatly to this trend. Unfortunately, the trend of smaller, lighter and more powerful portable electronic devices presents continuing design challenges in the actual production of these devices, particularly where such devices have relatively large displays. Some design challenges associated with such portable electronic devices include the ability to provide clear and robust
25 visual displays, minimize power consumption, and dissipate heat without sacrificing size, processing power or user convenience.

[0004] For example, many users like to be able to use their portable electronic devices at virtually any time, such as while the user is on the go or simply outdoors. As many consumers know, however, the use of a portable electronic device is not
30 always ideal when the device is exposed to direct sunlight or when the ambient environment is unduly bright. For example, the relatively small size of a portable device having a powerful processing system can by itself lead to a significant amount of heat generation. As many consumers can attest, such a heated device condition can

then be exacerbated by exposure to direct sunlight or being outdoors. The rapid heating or overheating of a portable electronic device in use in direct sunlight can be even further accelerated where the device has a large display screen that permits the ready passage of solar energy into the device.

- 5 [0005] An anti-reflective coating (or ARC) can be applied to the portable electronic device that can prevent overheating. Generally, the ARC is applied at a front surface of a cover glass, or glass panel. The ARC can be formed of many individual transmissive layers having differing optical characteristics that when taken together can provide an effective shield from the heating effects of direct sunlight. The ARC may additionally or
10 alternatively improve the usability of the display by reducing reflections associated with viewing the display through the glass panel. The ARC and/or various other functional layers may be applied to the glass panel as a film. However, such films may be relatively weaker than the glass panel and may propagate cracks into the glass under certain circumstances.
- 15 [0006] Accordingly, strengthened films for display panels or other substrates may be desirable.

SUMMARY

- [0007] Embodiments of the present disclosure relate to films and coatings for glass panels and other substrates that are strengthened. For example, an anti-reflective coating
20 (ARC) for an electronic device may be strengthened to prevent cracking therein that can propagate to an underlying glass panel. The strengthened ARC can also facilitate heat dissipation for the device, reduce the absorption of heat from outside the device due to direct sunlight or other infrared sources, and/or reduce glare and reflections. This can be accomplished at least in part through the use of a specialized optical coating for the glass
25 panel. The ARC may be adapted to reflect most infrared and ultraviolet wavelengths, transmit most electromagnetic wavelengths in the visible spectrum, and absorb, distribute and radiate a significant amount of blackbody radiation from inside the device.

- [0008] In some embodiments at least one of the layers of the film or coating may be formed of silicon dioxide. In various detailed embodiments, the optical coating
30 can include alternating layers of two different materials, such as, for example, silicon dioxide and tantalum pentoxide. The plurality of layers can have individual thicknesses ranging from about 10 to about 400 nanometers.

[0009] In one embodiment the film or coating may be strengthened by chemical strengthening. In this way, the ARC is strengthened to resist cracks and other surface

defects that can propagate to the underlying cover glass having the potential to propagate further into the cover glass. Strengthening may occur by replacing atoms of the coating or film with another species of atoms having a larger size. For example, sodium (Na) atoms may be implanted in the film, and then potassium (K) atoms may exchange with the sodium to strengthen the film. A similar process may also be employed to strengthen the substrate itself. In another embodiment, potassium is directly inserted into a film or substrate to provide strengthening without performing an intermediate exchange with inserted sodium.

[0010] Other apparatuses, methods, features and advantages of the disclosure will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the disclosure, and be protected by the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The included drawings are for illustrative purposes and serve only to provide examples of possible structures and arrangements for the disclosed apparatuses, assemblies, methods, and systems. These drawings in no way limit any changes in form and detail that may be made to the disclosure by one skilled in the art without departing from the spirit and scope of the disclosure.

[0012] FIG. 1 illustrates in top perspective view of a portable electronic device according to an example embodiment of the present disclosure;

[0013] FIG. 2 illustrates a front facing perspective view of a portable electronic device according to a second example embodiment of the present disclosure;

[0014] FIG. 3 illustrates a partially exploded side perspective view of the portable electronic device of FIG. 2 in which an optical coating is positioned outside of a display coating according to an example embodiment of the present disclosure;

[0015] FIG. 4 illustrates a partially exploded side perspective view of the portable electronic device of FIG. 2 in which an optical coating is positioned inside of a display coating according to an example embodiment of the present disclosure;

[0016] FIG. 5 illustrates a partial side cross-sectional view of an optical coating for an electronic device according to an example embodiment of the present disclosure;

[0017] FIG. 6 illustrates a partial side cross-sectional view of the optical coating of FIG. 5 transmitting a visible light wavelength and reflecting an infrared light wavelength according to an example embodiment of the present disclosure;

5 [0018] FIG. 7 illustrates a top view of an embodiment of a portable electronic device including a display and a protective assembly according to an example embodiment of the present disclosure;

[0019] FIG. 8 illustrates a sectional view through the display and a film and substrate of the protective assembly of FIG. 7 along line 8-8 according to an example embodiment of the present disclosure;

10 [0020] FIG. 9 illustrates a sectional view through the film of FIG. 8 according to an example embodiment of the present disclosure;

[0021] FIG. 10 schematically illustrates chemically strengthening the substrate of FIG. 8 according to an example embodiment of the present disclosure;

15 [0022] FIG. 11 schematically illustrates inserting sodium into the film of FIG. 8 according to an example embodiment of the present disclosure;

[0023] FIG. 12 schematically illustrates chemically strengthening the film of FIG. 8 after sodium insertion and after chemically strengthening the substrate of FIG. 8 according to an example embodiment of the present disclosure;

20 [0024] FIG. 13 schematically illustrates inserting sodium into the film of FIG. 8 according to an example embodiment of the present disclosure;

[0025] FIG. 14 schematically illustrates substantially simultaneously chemically strengthening the film and substrate of FIG. 8 after sodium insertion into the film according to an example embodiment of the present disclosure;

25 [0026] FIG. 15 schematically illustrates a method for strengthening a material according to an example embodiment of the present disclosure;

[0027] FIG. 16 schematically illustrates a flowchart detailing a strengthening process according to an example embodiment of the present disclosure; and

[0028] FIG. 17 schematically illustrates a block diagram of an electronic device according to an example embodiment of the present disclosure.

30 **DETAILED DESCRIPTION**

[0029] Representative applications of assemblies, apparatuses, and methods according to the presently described embodiments are provided in this section. These examples are being provided solely to add context and aid in the understanding of the described embodiments. It will thus be apparent to one skilled in the art that the

presently described embodiments can be practiced without some or all of these specific details. In other instances, well known process steps have not been described in detail in order to avoid unnecessarily obscuring the presently described embodiments. Other applications are possible, such that the following examples should not be taken as limiting.

5 [0030] In the following detailed description, references are made to the accompanying drawings, which form a part of the description and in which are shown, by way of illustration, specific embodiments of the present disclosure. Although these embodiments are described in sufficient detail to enable one skilled in the art to practice the disclosure, it is understood that these examples are not limiting; 10 such that other embodiments may be used, and changes may be made without departing from the spirit and scope of the disclosure. Although this disclosure primarily focuses on portable electronic devices for purposes of illustration and discussion, it will be readily appreciated that the present disclosure is not limited to 15 such devices, and that the present disclosure can be used in conjunction with any computing device or item having a visual display or any substrate or film.

[0031] In this regard, as described in detail below, the following relates to strengthening films, also referred to herein as coatings, for substrates. It should be noted that the present description is generally provided in terms of films coupled to a 20 substrate covering a display of an electronic device. However, the films disclosed herein may be employed with any substrate in accordance with embodiments of the disclosure. In this regard, the films may be employed with front, side, or back plates for electronic devices, substrates on laptop or television displays, automotive windows, building windows, and any other embodiment of substrate. Further, the 25 methods described herein may be employed to strengthen the substrate itself rather than, or in addition to, a film thereon.

[0032] Turning first to FIG.1, a portable electronic device 100 according to a first example embodiment of the present disclosure is illustrated in top perspective view. The portable electronic device 100 can be, for example, a tablet computing device, 30 and can include an outer housing 110, a display assembly 120, and one or more buttons 130 or other user inputs. Such a tablet portable electronic device 100 can be, for example, an iPad® computing device manufactured and sold by Apple, Inc. of Cupertino, California, although many other types of devices may also be used. Although portable electronic device 100 can appear to be exactly or substantially like

any other similar portable electronic device, it can be different due to the presence of a specialized coating being located proximate the visual display or display cover, as set forth in greater detail below.

5 [0033] FIG. 2 illustrates a front facing perspective view of a portable electronic device 200 according to another embodiment of the present disclosure. The portable electronic device 200 can be, for example, a portable media player having an outer housing 210, a display assembly 220 and a click-wheel 230 or other user input. Such a portable media player can be, for example, an iPod® computing device, also manufactured and sold by Apple, although many other types of media player devices
10 may also be used. Again, device 200 can appear to be the same or similar to other devices, despite the presence of a specialized coating proximate the visual display.

[0034] In fact, virtually any device having a display screen can be suitable for use with the present disclosure, as will be readily appreciated by those skilled in the art. As such, the exemplary devices 100, 200 provided in FIGS. 1 and 2 serve only to
15 illustrate examples of such devices, and in no way limit the amount or types of devices that can be used. Other types of devices that may also be used with the inventive optical display coating can include, for example, cellular telephones, pagers, laptop computers, desktop computers, televisions, and wristwatches among other possible devices.

20 [0035] Again, although virtually any type of device having a display screen can be used in conjunction with the present disclosure, the portable electronic devices described herein are being used simply for purposes of illustration with respect to the display screen and its specialized optical coating. Variations and extrapolations suitable for use with devices having different display screen types, sizes and
25 dimensions can be applied as may be desired for any device having a display screen, as will be readily appreciated.

[0036] Continuing with FIG. 3, the portable electronic device 200 of FIG. 2 is shown in side perspective and partially exploded view. The outer housing 210 of the portable electronic device 200 can define an interior cavity 240 adapted to contain
30 various internal electronic components (not shown), such as a processor, memory, display device, speakers and the like. In addition to the display device, the display assembly 240 may include a transparent display cover 250 situated in an opening in the outer housing 210 that is specifically dimensioned to hold the display cover in place. The display cover 250 can be designed to protect a video or visual display (not

shown) situated therebeneath, and is preferably see-through. Although the display cover 250 can be purely transparent, a partially transparent or translucent display cover may also be used, and it will be understood that all such variations can be considered “transparent” for purposes of the disclosed devices and displays.

5 [0037] A specialized optical coating 260, also referred to herein as a “film,” can be situated atop the display cover 250, with details and properties of this optical coating or film being set forth in greater detail below. Although the optical coating 260 is shown in FIG. 3 as being atop display cover 250, the actual location can be beneath or otherwise proximate the display cover, depending upon the given
10 application. In this regard, by way of example, FIG. 4 illustrates an embodiment of a portable electronic device 200’, which is substantially similar to the electronic device 200 illustrated in FIG. 3, except the optical coating 260 is positioned beneath the display cover 250.

[0038] The optical coating can be specially formulated to block out unwanted
15 solar energy, transmit visible light, absorb blackbody radiation, and/or reduce glare and reflections. This optical coating can be applied directly to a display cover glass or product skin, or can be applied indirectly via an accessory designed to interact with a visual display. Multiple different types of applications of such an optical coating can also be used in some instances.

20 [0039] In some embodiments the coating may comprise an anti-reflective coating. In general, the anti-reflective coating can be a thin overall coating that is made up of many alternating layers of thin materials having both high and low refractive indices, arranged in such a manner so as to: absorb blackbody radiation from inside the device to promote better device cooling; reflect most of all electromagnetic
25 wavelengths that are not visible light to reduce device heating from outside sources; transmit most of all visible light wavelengths to enable robust visual displays; and/or reduce glare and reflections. In general, the coating operates such that the unwanted infrared and ultraviolet radiation from the sun is reflected back to the ambient environment as much as possible. This does not appear as glare to the user as these
30 wavelengths are invisible. Visible light is transmitted through the optical coating as much as possible, so as not to interfere with the appearance and brightness of the intended visual image of the display. The coating also absorbs the black body infrared radiation range emitted by the device as much as possible.

[0040] In this regard, FIG. 5 illustrates a partial side cross-sectional view of a specialized optical coating 324 for an electronic device according to one example embodiment of the present disclosure. As shown, the optical coating 324 can be situated atop or otherwise proximate to a display cover 322 for a visual display (not shown). Such a visual display can be for an electronic device, among other possible devices.

[0041] The optical coating 324 can be comprised of numerous thin layers, ranging in thickness from about 10 to about 400 nanometers, although other thicknesses are possible. Each layer can be comprised of a material having a high or low index of refraction, and the layers are preferably interleaved or alternated between high and low indices of refraction. Preferably, desirable wavelengths of light are transmitted through optical coating 324, while unwanted wavelengths are reflected away from the optical coating, similar to that which occurs for a “hot mirror.” In addition, the various layers and thicknesses of optical coating 324 may be designed such that most blackbody radiation is neither transmitted nor reflected, but rather absorbed by and transmitted throughout the optical coating itself.

[0042] Although more than two different materials can certainly be used, as may be desired, only two different materials for the various layers are shown here for purposes of illustration. As shown, a first set of layers 326 is composed of a first material having one index of refraction, while a second set of layers 328 is composed of a second different material having a different index of refraction. In one particular non-limiting example, the two different materials can be silicon dioxide and tantalum pentoxide, having indices of refraction of about 1.45 and 2.10 respectively. Again, layers of other materials can be added to or substituted for these particular materials, so long as there is a significant difference between layers in the indices of refraction.

[0043] FIG. 6 illustrates the optical coating 324 of FIG. 5 transmitting a visible light wavelength and reflecting an infrared light wavelength. As shown, visible light wavelength 340 incumbent upon the optical coating 324 and the display cover 322 is permitted to transmit through both of these items. Although the alternating indices of refraction of the various optical coating layers may alter the path of wavelength 340 a bit, the wavelength is ultimately transmitted all the way therethrough, as are other visible light wavelengths. As will be appreciated, similar light wavelengths from the display located beneath the display cover 322 will transmit upward and through the display cover and the optical coating 324, and will then be visible to users of the

electronic device having the display. Conversely, light having an infrared wavelength 342 is ultimately reflected back away from the display cover 322 due to the arrangement of layers in the optical coating 324, which substantially prevents the infrared wavelength from entering and heating the device through the display cover.

5 Similar results preferably occur for other infrared wavelengths.

[0044] As noted above, embodiments of the present disclosure relate to chemical strengthening. In this regard, FIG. 7 illustrates a top view of a portable electronic device 400 according to an additional embodiment of the present disclosure that is subjected to chemical strengthening as described hereinafter. For example, the
10 portable electronic device 400 may comprise a smartphone. As illustrated, the portable electronic device 400 may include a display assembly including a display 402 configured to output one or more graphical images and a protective assembly 404 positioned thereon and configured to cover and protect the display.

[0045] FIG. 8 schematically illustrates a sectional view through a display
15 assembly including the display 402 and the protective assembly 404 of the portable electronic device 400 along line 8-8 from FIG. 7. As illustrated, the protective assembly 404 may include a substrate 406 and a film 408. In some embodiments the film 408 may be directly coupled to the substrate 406 (e.g., deposited thereon). In another embodiment an adhesive layer may couple the film 408 to the substrate 406.

[0046] In one embodiment the substrate 406 may comprise a glass panel. Use of
20 a glass substrate may be preferable in some embodiments due to glass defining desirable optical properties. The glass may comprise silicon dioxide and one or materials such as aluminum, magnesium, sodium, etc. Note, however, that although the present disclosure generally describes usage of such films in conjunction with a
25 glass substrate, the substrate may comprise various other substances in other embodiments (e.g., crystal, acrylic, plastic, sapphire, etc.). Accordingly, it should be understood that reference to a glass substrate is for example purposes only, and the substrate may comprise various other materials in accordance with embodiments of the present disclosure.

[0047] The film 408 may be configured to perform one or more functions. For
30 example, the film 408 may be configured to protect the substrate 406 from damage such as cracks and scratches. In this regard, some materials employed as the substrate 406, such as glass, may be relatively brittle and otherwise prone to such damage when a hard and/or sharp object comes into contact therewith. Sharp objects, as used

herein, refers to objects defining a surface area of about 2 square millimeters or less. In some embodiments each of the one or more layers of the film 408 may be at least partially transparent. Accordingly, the film 408 may be employed in conjunction with the display 402, without substantially detrimentally affecting the usability thereof.

5 **[0048]** The film 408 may additionally or alternatively be configured to reduce glare and reflections and/or perform other functions as described above. In this regard, the film 408 may comprise an anti-reflective film in some embodiments. In some embodiments the film 408 may comprise silicon dioxide and one or more other materials.

10 **[0049]** For example, FIG. 9 illustrates a sectional view through an embodiment of the film 408 including multiple layers. As illustrated, the film 408 may include layers of a first material 412a-c and layers of a second material 414a,b positioned therebetween. The layers of the first material 412a-c may define a relatively low index of refraction. In this regard, the layers of the first material 412a-c may
15 comprise silicon dioxide in some embodiments. Conversely, the layers of the second material 414a,c may define a relatively higher index of refraction. In this regard, the layers of the second material 414a,c may comprise silicon nitride, titanium oxide, tantalum pentoxide, and/or tantalum oxide in some embodiments. This combination of layers defining relatively lower and higher indices of refraction may function to
20 provide the film 408 with anti-reflective properties, as described above.

[0050] However, an issue with respect to the film 408 described above is that it may be relatively weak. In particular, silicon dioxide may be relatively weak. Accordingly, the film 408 may be prone to cracking or other damage. Such cracks may form as a result of a bending moment being applied to the portable electronic
25 device 400, impacts, or other events.

[0051] Further, as a result of the film 408 being relatively weak, such cracks may spread throughout a substantial portion of the film. Additionally, in some instances cracks in the film 408 may propagate into the substrate 406. Due to propagation of the cracks through the protective assembly 404, it may be relatively hard to view the
30 display 402 thereunder. Regardless of the cause of the damage, the propagated cracks in the in the protective assembly 404 may substantially impair the usability of the portable electronic device 400.

[0052] Accordingly, embodiments of the present disclosure are directed to strengthening the protective assembly 404. In this regard, FIG. 10 illustrates

chemical strengthening of the substrate 406. A chemically strengthened substrate (e.g., glass) is a type of substrate that has increased strength as a result of a post-production chemical process performed thereon. Chemically strengthened glass may be six to eight times stronger than unstrengthened float glass. Accordingly, the benefits associated with use of chemically strengthened substrates may be substantial.

5 [0053] Substrates may be chemically strengthened using a species exchange process whereby a native species (sodium (Na), for example) is replaced by a species having a larger size (potassium (K), for example). The exchange can be facilitated by a surface finishing process. As illustrated, in one embodiment the substrate 406 may be submersed in a fluid 416 in order to chemically strengthen the substrate. For example, fluid 416 into which the substrate 406 is submersed may comprise a potassium salt (e.g., potassium nitrate) at an elevated temperature.

10 [0054] As illustrated, potassium ions or atoms 418 in the potassium nitrate fluid 416 may exchange with sodium ions or atoms 420 of the substrate 406. This exchange may cause the substrate 406 to harden. More particularly, the potassium atoms 418 are larger than the sodium atoms 420 and the potassium atoms wedge into the gaps left by the smaller sodium atoms when they migrate to the potassium nitrate solution. Accordingly, this substitution causes compressive stresses on the substrate 406, particularly around the outer surface thereof, where the exchange of atoms may be greatest. Thus, the substrate 406 may be in a state of compression around the outer surface thereof and the core of the substrate may be in a state of compensating tension.

20 [0055] Another substrate strengthening process may include at least two stages in which the substrate is first immersed in a sodium nitrate bath at an elevated temperature (e.g., 450 °C), which enriches the surface of the substrate with sodium ions. Accordingly, when the substrate is thereafter immersed in, or otherwise exposed to a fluid including larger ions or atoms that exchange therewith in the manner described above, a greater degree of ion or atom exchange may occur. In this regard, when the substrate is immersed in potassium nitrate, more sodium ions or atoms may be available to exchange with potassium ions or atoms. In this way, the use of a sodium nitrate bath increases the potential for surface compression in the finished substrate. Chemical strengthening results in a strengthening similar to toughened glass. However, the process does not use extreme variations of

25 30

temperature and therefore chemically strengthened glass may have little or no bow or warp, optical distortion or strain pattern.

[0056] After the substrate 406 is strengthened, the film 408 may be coupled thereto. However, as noted above, it may be desirable to additionally or alternatively strengthen the film 408. Strengthening the film 408 may be employed to resist cracks from forming in the film that may otherwise propagate to the substrate 406, which may comprise a cover glass, glass panel, or cover panel, as described elsewhere herein.

[0057] Generally speaking, strengthening the film may be conducted by subjecting the layers of silicon dioxide thereof to an exchange process whereby smaller ions or atoms (e.g., sodium (Na) ions) are replaced by relatively larger ions or atoms (e.g., potassium (K) ions). More specifically, those layers of the film formed of silicon dioxide can be strengthened by replacing at least some of the sodium ions or atoms in a surface region with potassium ions or atoms. It should be noted that the exchange can occur chemically (using a potassium rich bath in which the film can be immersed in a manner described above) whereby potassium ions migrate a distance inwardly from the surface of the film. In some cases, however, it may be necessary to perform the exchange process from more than one direction (top and bottom, for example) if intervening layers of the film (SiN₄, for example) prevent the diffusion of the potassium ions or atoms. In some cases, the exchange process can involve implanting potassium ions or atoms into the layers of the film requiring strengthening. In some cases, the potassium ions or atoms can be implanted through layers (such as SiN₄) that heretofore block the thermal diffusion of potassium ions or atoms. In this way, silicon dioxide layers within the film can be strengthened by directly introducing potassium ions or atoms. In this way, a silicon dioxide layer in the film can be strengthened beyond the inherent strength of glass formed of primarily silicon dioxide.

[0058] By way of greater particularity, FIGS. 11 and 12 illustrate an example embodiment of steps involved in strengthening a film. FIG. 11 illustrates insertion of sodium ions or atoms 422 into the material of the film 408, as indicated by arrows 424. In one embodiment sodium may be inserted into the material that defines the film 408 prior to depositing the film on the substrate 406. In this regard, for example, the film 408 may be doped with sodium (e.g., using dopants) prior to coupling with the

substrate 406. In another embodiment the film 408 may be coupled to the substrate 406, and then the sodium may be inserted in the film 408 by ion or atom implantation.

[0059] Thereafter, as illustrated in FIG. 12, the film 408 may be subjected to chemical strengthening. As illustrated, in one embodiment the film 408 may be
5 submersed in a fluid 426 in order to chemically strengthen the film. For example, the fluid 426 may comprise potassium nitrate. As illustrated, potassium ions or atoms 428 in the potassium nitrate fluid 426 may exchange with sodium ions or atoms 422 of the film 408. This exchange may cause the film 408 to harden. More particularly, the potassium atoms 428 are larger than the sodium atoms 422, and hence this
10 substitution causes compressive stresses on the film 408, particularly around the outer surface thereof, where the exchange of atoms may be greatest.

[0060] However, the film 408 and the substrate 406 may be strengthened in other manners. For example, as illustrated in FIG. 13, in one embodiment the film 408 may be coupled to the substrate prior to the substrate 406 being strengthened. In order to
15 allow for strengthening of the film 408, sodium ions or atoms 430 may be inserted into the material of the film 408, as indicated by arrows 432. In one embodiment sodium may inserted into the material that defines the film 408 prior to depositing the film on the substrate 406. In this regard, for example, the film 408 may be doped with sodium (e.g., using dopants) prior to coupling with the substrate 406. In another
20 embodiment the film 408 may be coupled to the substrate 406, and then the sodium may be inserted in the film 408 by ion exchange.

[0061] Thereafter, as illustrated in FIG. 14, the substrate 406 and the film 408 may be subjected to chemical strengthening. As illustrated, in one embodiment the substrate 406 and the film 408 may be submersed in a fluid 434 in order to chemically
25 strengthen the film. For example, the fluid 434 may comprise potassium nitrate. As illustrated, potassium ions or atoms 436 in the potassium nitrate fluid 426 may exchange with the sodium ions or atoms 430 inserted in the film 408 and sodium ions or atoms 438, which may already be present in the substrate 406. This exchange may cause the substrate 406 and the film 408 to harden. More particularly, the potassium
30 atoms 436 are larger than the sodium atoms 430, 438, and hence this substitution causes compressive stresses on the substrate 406 and the film 408, particularly around the outer surfaces thereof, where the exchange of atoms may be greatest.

[0062] Note that in the above-described methods, additional steps may be performed. For example, the film 408 may be annealed after the sodium is inserted

therein. In this regard, insertion of the sodium into the film 408 may cause damage to the film. Annealing the film 408 may repair such damage and assist in bonding the sodium to the film 408.

5 [0063] Note that the sodium may be inserted in the film 408 via various other manners in other embodiments. For example, the substrate 406 may include a layer enriched with sodium proximate an outer surface to which the film 408 couples. Thereby, the sodium may diffuse out of the enriched layer of the substrate 406 into the film 408, such that exchange of the sodium with potassium may thereafter occur as described above.

10 [0064] Further, in another embodiment, insertion of sodium into the film 408 may not be employed. Rather, the potassium may be directly inserted into the film 408 (or the substrate 406). Accordingly, in some embodiments the intermediate step of inserting sodium into the film 408 may be avoided.

15 [0065] In some embodiments one or more of another species such as aluminum oxide, magnesium oxide, and boron nitride may be added to the film 408. In this regard, one or more of these materials may assist in diffusion of potassium through the film 408. Thus, for example, the film 408 may be formed from silicon dioxide plus an aluminum oxide dopant (and/or the other above-mentioned materials). In another embodiment the aluminum oxide (and/or the other above-mentioned
20 materials) could be inserted into the film 408 with the sodium or with the potassium (e.g., co-deposited) or subsequent thereto. The other species can be implanted in varying combinations and proportions.

[0066] Exchange of sodium ions or atoms with potassium ions or atoms is generally discussed herein as being employed to strengthen components such as films
25 and substrates. However, in other embodiments various other elements may be exchanged. In this regard, exchange of relatively smaller ions or atoms with relatively larger ions or atoms, defining a greater volume or size, may strengthen materials in the manner discussed herein, so long as the compressive state is not relieved upon completion of the exchange. In other words, retention of the
30 compressive state proximate the surface of the component at which the exchange occurs may be required to retain a strengthened state.

[0067] Note further that the strengthening process described herein could be employed to strengthen any of various films, coatings, and substrates. Thus, for example, sodium could be inserted into a glass substrate, and the sodium could be

exchanged with potassium to strengthen the glass substrate. Alternatively, potassium may be directly inserted as described above.

[0068] In one embodiment a film of silicon dioxide may be applied to a substrate (e.g., glass) to create a smooth outer surface substantially free of defects by filling any defects in the substrate. In this regard, substrates may initially define certain surface defects. The surface defects can be related to finishing operations such as polishing that invariably leave micro-cracks or other visible or potentially visible surface defects that have the potential to initiate cracks that can propagate into and possibly through the glass substrate thereby weakening the glass substrate. The layer of silicon dioxide can be deposited over the surface of the glass substrate in such a way to encapsulate the defects thereby eliminating the defects as a potential source of cracks. Optionally, the layer of silicon dioxide can then be strengthened using any of the techniques described herein.

[0069] Further, the insertion of sodium or direct insertion of potassium may be conducted selectively, such that locations on the film or substrate are selectively strengthened. Masking may be employed to cause the selective strengthening. For example, selective insertion may occur at locations that may be subjected to stress over and above that expected by a majority of the film or substrate. By way of further example, in one embodiment the corners of a film on a substrate may be strengthened. Thus, corner regions of a cover glass can be implanted with potassium or other appropriate species in order to provide extra strength in those portions subjected to excess stress (e.g., caused by a fall event). In this regard, in the event that the strengthening affects the optical properties of the protective assembly, such strengthening may only be provided, or may be provided to a greater extent, outside of the active viewing area through the protective assembly such that a view of the display is not blocked.

[0070] In accordance with an embodiment of the present disclosure, an electronic device display is additionally provided. The device display may include a visual display unit adapted to provide a visual display to a user of an electronic device associated with the electronic device display, a transparent display cover situated proximate to the visual display unit, and an optical coating disposed proximate said display cover, said optical coating including a plurality of layers of different materials and thicknesses at least one of which is a strengthened layer of glass formed of silicon dioxide wherein said optical coating is adapted to transmit therethrough most of all

visible wavelengths of light collectively, reflect therefrom most of all non-visible wavelengths of light collectively, and to absorb most blackbody radiation generated from within the electronic device. The optical coating may be selectively strengthened at specific regions subjected to excess stress. The layers may consist of alternating layers of two different materials, which may be silicon dioxide and tantalum pentoxide. The arrangement and thicknesses of the layers may be designed based upon the thickness and optical properties of the transparent display cover.

[0071] A related method for strengthening is also provided. As illustrated in FIG. 15, the method may include providing a material at operation 502. Further, the method may include inserting a first plurality of atoms into the material at operation 504. Additionally, the method may include exchanging a second plurality of atoms respectively defining a relatively greater volume with the first plurality of atoms in the material to strengthen the material at operation 506.

[0072] In some embodiments the first plurality of atoms may comprise sodium and the second plurality of atoms may comprise potassium. The material may define an anti-reflective film. The method may further comprise coupling the anti-reflective film to a substrate. Further, the method may include strengthening the substrate. Strengthening the substrate may be conducted substantially simultaneously with, or after, exchanging the second plurality of atoms respectively defining the relatively greater volume with the first plurality of atoms in the material to strengthen the material of the anti-reflective film at operation 506. Additionally, the method may include annealing the material prior to exchanging the second plurality of atoms respectively defining a relatively greater volume with the first plurality of atoms in the material to strengthen the material at operation 506.

[0073] FIG. 16 shows a flowchart detailing process 600 for strengthening an anti-reflective coating on a substrate in accordance with the described embodiments. At 602, the anti-reflective coating is deposited on the glass substrate. At 604, Na ions are implanted into the anti-reflective coating. At 606, the anti-reflective coating is annealed. The annealing promotes repair of any defects caused by the implantation. At 608, a potassium (K) exchange process takes place. The K exchange process can be chemical in nature in which the anti-reflective coating is immersed in a K rich bath and the K ions migrate by thermal diffusion from the bath to a surface region of the anti-reflective coating replacing at least some of the sodium in the ARC. In another embodiment, the K ions can be implanted directly using an ion implanter. In this

case, a mask can be used to selectively implant K ions in the anti-reflective layer to provide regions of greater strength than other regions. For example, regions of the anti-reflective coating near corners (or other regions susceptible to excess stress during, for example, a drop event) can be exposed to greater concentrations of K ions than other regions particularly those regions that overlay optically important areas such as a display.

[0074] In another embodiment, a method for improving a display of an electronic device is provided. The method may include determining the thickness and optical properties of a display cover adapted to be situated proximate to a visual display unit of an electronic device, designing an optical coating adapted to be placed proximate the display cover, said optical coating including a plurality of layers of different materials and thicknesses, wherein said optical coating is adapted to transmit therethrough most of all visible wavelengths of light collectively and reflect therefrom most of all non-visible wavelengths of light collectively, and strengthening at least one of the plurality of layers comprising silicon dioxide.

[0075] It will be readily appreciated that the refined and specialized optical coating and devices to which it is applied provide clear improvements and benefits over previous devices for which device overheating can be an issue. One notable application is simply the substantially permanent application of an optical coating to a display cover or cover glass during the manufacturing of a device. Such a permanent application can be atop, inside or at the bottom of the display cover, as may be desired by a given manufacturer. In addition to a simple permanent application of an optical coating to an existing device though, there are further applications that may prove useful to consumers.

[0076] FIG. 17 is a block diagram of an electronic device 700 suitable for use with the described embodiments. In one example embodiment the electronic device 700 may be embodied in or as a controller configured for controlling operations performed in strengthening materials as described herein. In this regard, for example, films on substrates and/or the substrates themselves may be strengthened as described herein.

[0077] The electronic device 700 illustrates circuitry of a representative computing device. The electronic device 700 may include a processor 702 that may be microprocessor or controller for controlling the overall operation of the electronic device 700. In one embodiment the processor 702 may be particularly configured to

perform the functions described herein relating to strengthening materials. The electronic device 700 may also include a memory device 704. The memory device 704 may include non-transitory and tangible memory that may be, for example, volatile and/or non-volatile memory. The memory device 704 may be configured to store information, data, files, applications, instructions or the like. For example, the memory device 704 could be configured to buffer input data for processing by the processor 702. Additionally or alternatively, the memory device 704 may be configured to store instructions for execution by the processor 702.

[0078] The electronic device 700 may also include a user interface 706 that allows a user of the electronic device 700 to interact with the electronic device. For example, the user interface 706 can take a variety of forms, such as a button, keypad, dial, touch screen, audio input interface, visual/image capture input interface, input in the form of sensor data, etc. Still further, the user interface 706 may be configured to output information to the user through a display, speaker, or other output device. A communication interface 708 may provide for transmitting and receiving data through, for example, a wired or wireless network such as a local area network (LAN), a metropolitan area network (MAN), and/or a wide area network (WAN), for example, the Internet.

[0079] The electronic device 700 may also include a strengthening module 710. The processor 702 may be embodied as, include or otherwise control the strengthening module 710. The strengthening module 710 may be configured for controlling or executing the material strengthening operations as discussed herein including, for example, inserting sodium and exchanging the sodium with potassium or directly inserting the sodium.

[0080] The various aspects, embodiments, implementations or features of the described embodiments can be used separately or in any combination. Various aspects of the described embodiments can be implemented by software, hardware or a combination of hardware and software. The described embodiments can also be embodied as computer readable code on a computer readable medium for controlling manufacturing operations or as computer readable code on a computer readable medium for controlling a manufacturing line. The computer readable medium is any data storage device that can store data which can thereafter be read by a computer system. Examples of the computer readable medium include read-only memory, random-access memory, CD-ROMs, DVDs, magnetic tape, optical data storage

devices, and carrier waves. The computer readable medium can also be distributed over network-coupled computer systems so that the computer readable code is stored and executed in a distributed fashion.

5 [0081] In this regard, a computer program product comprising at least one computer-readable storage medium having computer-executable program code portions stored therein is provided. The computer-executable program code portions may comprise program code instructions for providing a material, program code instructions for inserting a first plurality of atoms into the material, and program code instructions for exchanging a second plurality of atoms respectively defining a relatively greater volume with the first plurality of atoms in the material to strengthen the material.

10 [0082] In some embodiments the first plurality of atoms may comprise sodium and the second plurality of atoms may comprise potassium. The material may comprise an anti-reflective film. The computer program product may comprise program code instructions for coupling the anti-reflective film to a substrate. Further, the computer program product may include program code instructions for strengthening the substrate. In one embodiment the program code instructions for strengthening the substrate may comprise program code instructions for strengthening the substrate substantially simultaneously with exchanging the second plurality of atoms respectively defining a relatively greater volume with the first plurality of atoms in the material to strengthen the material of the anti-reflective film. In another embodiment the program code instructions for strengthening the substrate may comprise program code instructions for strengthening the substrate after exchanging the second plurality of atoms respectively defining a relatively greater volume with the first plurality of atoms in the material to strengthen the material of the anti-reflective film. The computer program product may further comprise program code instructions for annealing the material prior to exchanging the second plurality of atoms respectively defining a relatively greater volume with the first plurality of atoms in the material to strengthen the material.

25 [0083] Although the foregoing disclosure has been described in detail by way of illustration and example for purposes of clarity and understanding, it will be recognized that the above described disclosure may be embodied in numerous other specific variations and embodiments without departing from the spirit or essential characteristics of the disclosure. Certain changes and modifications may be practiced,

and it is understood that the disclosure is not to be limited by the foregoing details, but rather is to be defined by the scope of the appended claims.

CLAIMS

What is claimed is:

1. A method for strengthening an anti-reflective coating, the method comprising:
5 exposing the anti-reflective coating to a fluid containing a chemical dopant such that the chemical dopant enters into the anti-reflective coating strengthening the anti-reflective coating, the anti-reflective coating being substantially transparent to visible light and configured to reduce optical reflection of light incident a surface of the anti-reflective coating,
10 wherein the anti-reflective coating includes a plurality of layers, wherein the chemical dopant enters into at least one of the plurality of layers.
2. The method of claim 1, wherein the plurality of layers includes at least a first type of layer and a second type of layer, the first type of layer comprised of a first material characterized as having a first index of refraction and the second type of
15 layer comprised of a second material characterized as having a second index of refraction different than the first index of refraction.
3. The method as in any one of claims 1 and 2, further comprising:
coupling the anti-reflective coating with a substrate.
4. The method of claim 3, wherein the anti-reflective coating is coupled with the
20 substrate after exposing the anti-reflective coating to a fluid containing the chemical dopant.
5. The method of claim 3, wherein the anti-reflective coating is coupled with the substrate before exposing the anti-reflective coating to a fluid containing the chemical dopant.
- 25 6. The method as in any one of claims 1 and 2, wherein the chemical dopant comprises at least one of sodium and potassium.
7. The method of claim 6, wherein the fluid includes at least one of sodium salt and a potassium salt.
8. The method as in any one of claims 1 and 2, wherein the chemical dopant
30 includes a first type of chemical dopant, the method further comprising:
exchanging the first type of chemical dopant with a second type of chemical dopant, the second type of chemical dopant defining a greater volume within the anti-

reflective coating than the first type of chemical dopant further strengthening the anti-reflective coating.

9. The method of claim 8, wherein the first type of chemical dopant comprises sodium and the second type of chemical dopant comprises potassium.

5 10. The method as in any one of claims 1 and 2, further comprising:

annealing the anti-reflective coating to repair damage caused by entry of the chemical dopant.

11. A method of strengthening an anti-reflective coating, the method comprising: enriching at least a portion of a substrate with a chemical dopant, the substrate

10 including a surface, wherein the enriched portion includes the surface; and

depositing the anti-reflective coating on the surface of the substrate such that the chemical dopant diffuses into the anti-reflective coating strengthening the anti-reflective coating, wherein the anti-reflective coating is substantially transparent to visible light and is configured to reduce optical reflection of light incident a surface of
15 the anti-reflective coating.

12. The method of claim 11, wherein enriching at least the portion of a substrate with the chemical dopant comprises:

exposing the substrate to a fluid containing the chemical dopant; and

20 elevating a temperature of the fluid increasing an amount of chemical dopant entering into the substrate.

13. The method as in any one of claims 11 and 12, wherein the chemical dopant includes sodium.

14. The method as in any one of claims 11 and 12, wherein the substrate is comprised of glass.

25 15. The method as in any one of claims 11 and 12, wherein the chemical dopant is a first type of chemical dopant, the method further comprising:

exposing the anti-reflective coating to fluid containing a second type of chemical dopant different than the first type of chemical dopant such that at least a portion of the first type of chemical dopant within the anti-reflective coating is
30 replaced with the second type of chemical dopant.

16. The method of claim 15, wherein the second type of chemical dopant within the anti-reflective coating further strengthening the anti-reflective coating.

17. The method of claim 15, wherein the second type of chemical dopant includes larger chemical species than the first type of chemical dopant such that second type of chemical dopant defines a greater volume within the anti-reflective coating than the first type of chemical dopant.
- 5 18. The method of claim 15, wherein the first type of chemical dopant includes sodium and the second type of chemical dopant includes potassium.
19. The method as in any one of claims 11 and 12, wherein the anti-reflective coating includes a plurality of layers, wherein the chemical dopant enters into at least one of the plurality of layers.
- 10 20. A method of strengthening an anti-reflective coating, the method comprising:
depositing a first type of chemical dopant into the anti-reflective coating
strengthening the anti-reflective coating, the anti-reflective coating being substantially transparent to visible light and configured to reduce optical reflection of light incident a surface of the anti-reflective coating; and
- 15 replacing at least a portion of the first type of chemical dopant within the anti-reflective coating with a second type of chemical dopant different than the first type of chemical dopant, wherein the second type of chemical dopant defines a greater volume within the anti-reflective coating than the first type of chemical dopant further strengthening the anti-reflective coating.
- 20 21. The method of claim 20, further comprising:
annealing the anti-reflective coating prior to replacing at least the portion of the first type of chemical dopant within the anti-reflective coating with a second type of chemical dopant, wherein the annealing repairs damage caused by entry of the first type of chemical dopant into the anti-reflective coating.
- 25 22. The method as in any one of claims 20 and 21, wherein the annealing assists bonding of the first type of chemical dopant to the anti-reflective coating.
23. The method as in any one of claims 20 and 21, further comprising:
annealing the anti-reflective coating after replacing at least the portion of the first type of chemical dopant within the anti-reflective coating with a second type of
- 30 chemical dopant, wherein the annealing repairs damage caused by entry of the second type of chemical dopant into the anti-reflective coating.

24. The method as in any one of claims 20 and 21, wherein the first type of chemical dopant includes sodium and the second type of chemical dopant includes potassium.
25. The method as in any one of claims 20 and 21, wherein depositing a first type
5 of chemical dopant into the anti-reflective coating comprises:
 exposing the anti-reflective coating to a fluid containing the first type of chemical dopant.
26. The method as in any one of claims 20 and 21, wherein depositing a first type of chemical dopant into the anti-reflective coating comprises:
10 enriching at least a portion of a substrate with the first type of chemical dopant, the substrate including a surface, wherein the enriched portion includes the surface; and
 depositing the anti-reflective coating on the surface of the substrate such that the first type of chemical dopant diffuses into the anti-reflective coating.
- 15 27. The method as in any one of claims 20 and 21, wherein replacing at least the portion of the first type of chemical dopant within the anti-reflective coating with a second type of chemical dopant:
 exposing the anti-reflective coating having the first type of chemical dopant deposited therein to a fluid containing the second type of chemical dopant.
- 20 28. The method as in any one of claims 20 and 21, further comprising:
 depositing the anti-reflective coating onto a substrate.
29. The method of claim 28, further comprising:
 strengthening the substrate by incorporating at least one of the first type of chemical dopant and the second type of chemical dopant into the substrate.
- 25 30. The method of claim 29, wherein the substrate is strengthening prior to depositing the anti-reflective coating onto a substrate.
31. The method of claim 29, wherein the substrate is strengthening after depositing the anti-reflective coating onto a substrate.
32. The method of claim 29, wherein strengthening the substrate comprises:
30 depositing the first type of chemical dopant into the substrate; and
 replacing at least a portion of the first type of chemical dopant within the substrate with the second type of chemical dopant.

33. The method of claim 32, wherein the second type of chemical dopant defines a greater volume within the substrate than the first type of chemical dopant.

34. The method of claim 32, wherein replacing at least the portion of the first type of chemical dopant within the substrate with the second type of chemical dopant

5 increases a compressive stress within the substrate.

35. The method of as in any one of claims 20 and 21, wherein the anti-reflective coating is applied to a display screen of an electronic device.

36. The method as in any one of claims 20 and 21, wherein the anti-reflective coating includes a plurality of layers, wherein the first type of chemical dopant and
10 the second type of chemical dopant enter into at least one of the plurality of layers.

37. An electronic device, comprising:

a display configured to output a graphical image; and

a protective assembly covering the display, the protective assembly comprising:

15 a substrate; and

a film coupled to the substrate,

wherein the film comprises a chemical dopant that increases a compressive stress of the film causing the film to be strengthened and preventing cracking of the film.

20 38. The electronic device of claim 37, wherein the film comprises an anti-reflective coating that is substantially transparent to visible light and configured to reduce optical reflection of light incident a surface of the anti-reflective coating.

39. The electronic device as in any one of claims 37 and 38, wherein the chemical dopant includes at least one of sodium and potassium.

25 40. The electronic device as in any one of claims 37 and 38, wherein the substrate comprises the chemical dopant strengthening the substrate.

41. The electronic device of claim 40, wherein the chemical dopant includes at least one of sodium and potassium.

42. The electronic device as in any one of claims 37 and 38, wherein the chemical
30 dopant is a first type of chemical dopant, wherein the substrate comprises a second type of chemical dopant different than the first type of chemical dopant.

43. The electronic device of claim 42, wherein the second type of chemical dopant includes at least one of sodium and potassium.

44. The electronic device as in any one of claims 37 and 38, wherein the substrate comprises silicon dioxide.
45. The electronic device of claim 44, wherein the substrate further comprises at least one of aluminum, magnesium and sodium.
- 5 46. A display assembly, comprising:
a display configured to output an image to a user;
a substrate layer configured to protect the display, the substrate layer being substantially transparent to visible light allowing viewing of the display; and
an anti-reflective coating disposed on and configured to reduce optical
10 reflection of light incident the display assembly, the anti-reflective coating comprising a plurality of dopant species incorporated therein strengthening the anti-reflective coating and preventing cracking of the anti-reflective coating.
47. The display assembly of claim 46, wherein the plurality of dopant species includes at least one of sodium and potassium.
- 15 48. The display assembly as in any one of claims 46 and 47, wherein the substrate layer comprises a second plurality of dopant species that strengthens the substrate layer.
49. The display assembly of claim 48, wherein the second plurality of dopant species includes at least one of sodium and potassium.
- 20 50. The display assembly as in any one of claims 46 and 47, wherein the dopant species is a first type of dopant species, wherein the substrate layer comprises a second type of dopant species different than the first type of dopant species.
51. The display assembly of claim 42, wherein the second type of dopant species includes at least one of sodium and potassium.
- 25 52. The display assembly as in any one of claims 46 and 47, wherein the anti-reflective coating is comprised of at least one of silicon dioxide, silicon nitride, titanium oxide, tantalum pentoxide, and tantalum oxide.
53. The display assembly as in any one of claims 46 and 47, wherein the anti-reflective coating includes a plurality of layers, wherein the plurality of dopant
30 species is incorporated into at least one of the plurality of layers.

54. A computer program product comprising at least one computer-readable storage medium having computer-executable program code portions stored therein, the computer-executable program code portions comprising:

program code instructions for depositing a first type of chemical dopant into a anti-reflective coating strengthening the anti-reflective coating, the anti-reflective coating being substantially transparent to visible light and configured to reduce optical reflection of light incident a surface of the anti-reflective coating; and

program code instructions for replacing at least a portion of the first type of chemical dopant within the anti-reflective coating with a second type of chemical dopant different than the first type of chemical dopant, wherein the second type of chemical dopant defines a greater volume within the anti-reflective coating than the first type of chemical dopant further strengthening the anti-reflective coating.

55. The computer program product of claim 54, wherein the first type of chemical dopant includes sodium and the second type of chemical dopant includes potassium.

56. The computer program product as in any one of claims 54 and 55, further comprising program code instructions for coupling the anti-reflective coating to a substrate.

57. The computer program product of claim 56, further comprising program code instructions for strengthening the substrate.

58. The computer program product of claim 57, wherein the program code instructions for strengthening the substrate comprise program code instructions for strengthening the substrate substantially simultaneously with replacing at least the portion of the first type of chemical dopant within the anti-reflective coating with the second type of chemical dopant.

59. The computer program product of claim 57, wherein the program code instructions for strengthening the substrate comprise program code instructions for strengthening the substrate after replacing at least the portion of the first type of chemical dopant within the anti-reflective coating with the second type of chemical dopant.

60. The computer program product as in any one of claims 54 and 55, further comprising program code instructions for annealing the anti-reflective coating prior to replacing at least the portion of the first type of chemical dopant within the anti-reflective coating with the second type of chemical dopant.

1/15

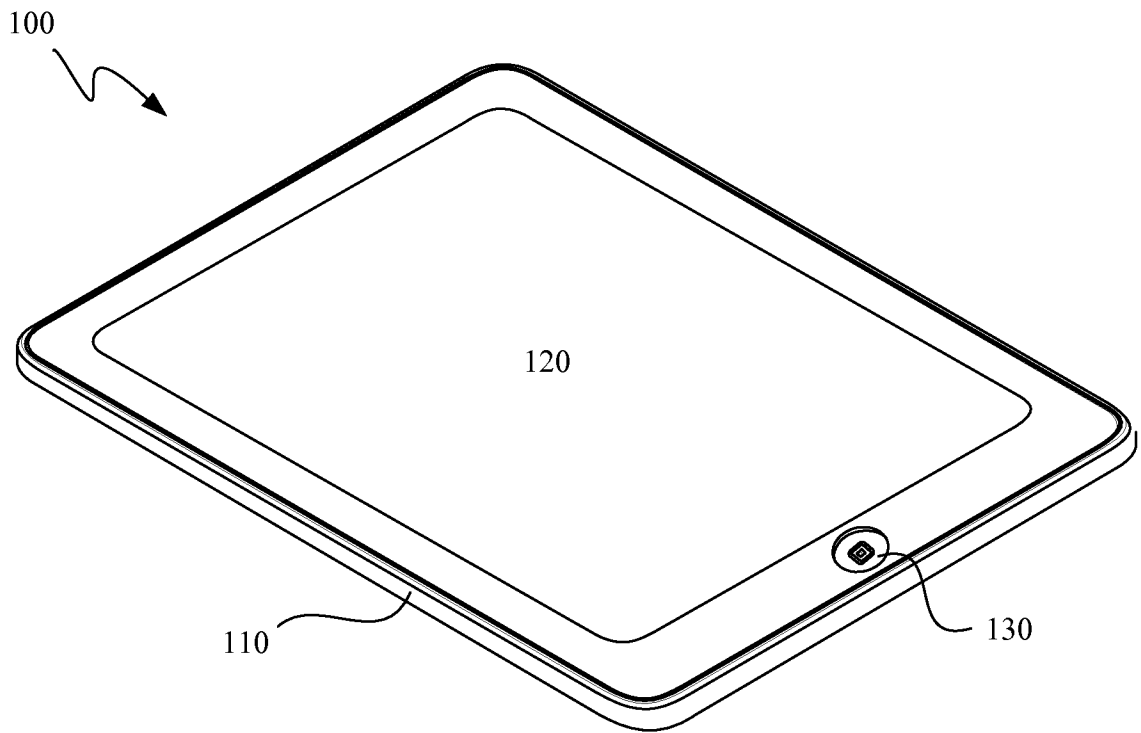


FIG. 1

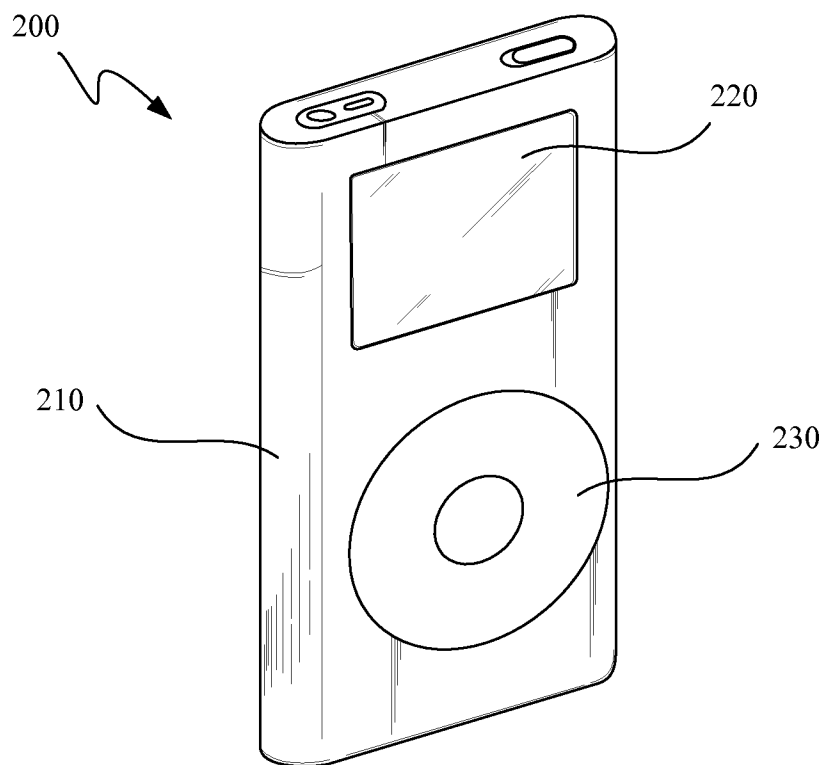


FIG. 2

2/15

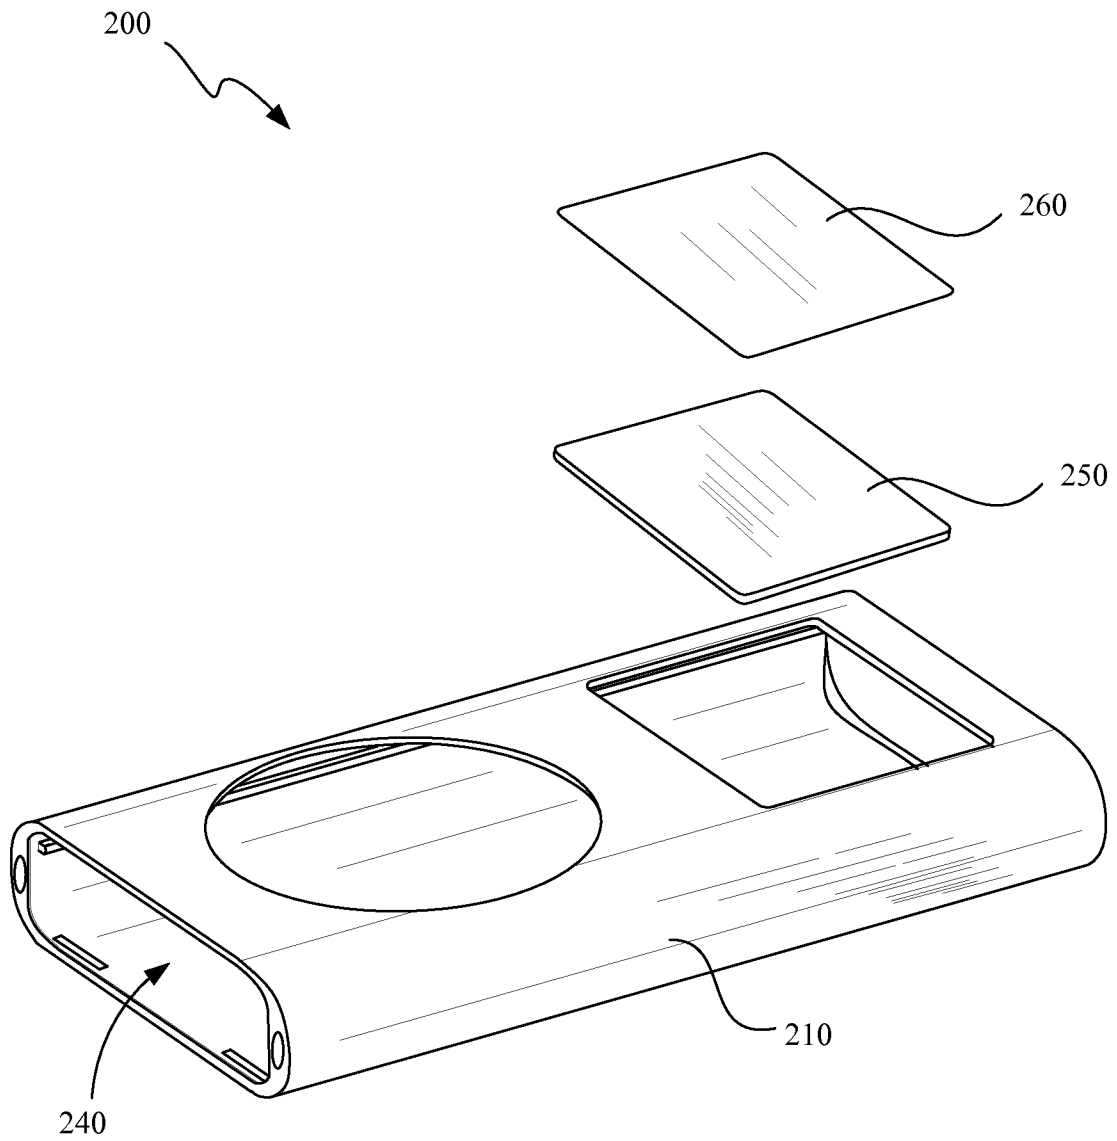


FIG. 3

3/15

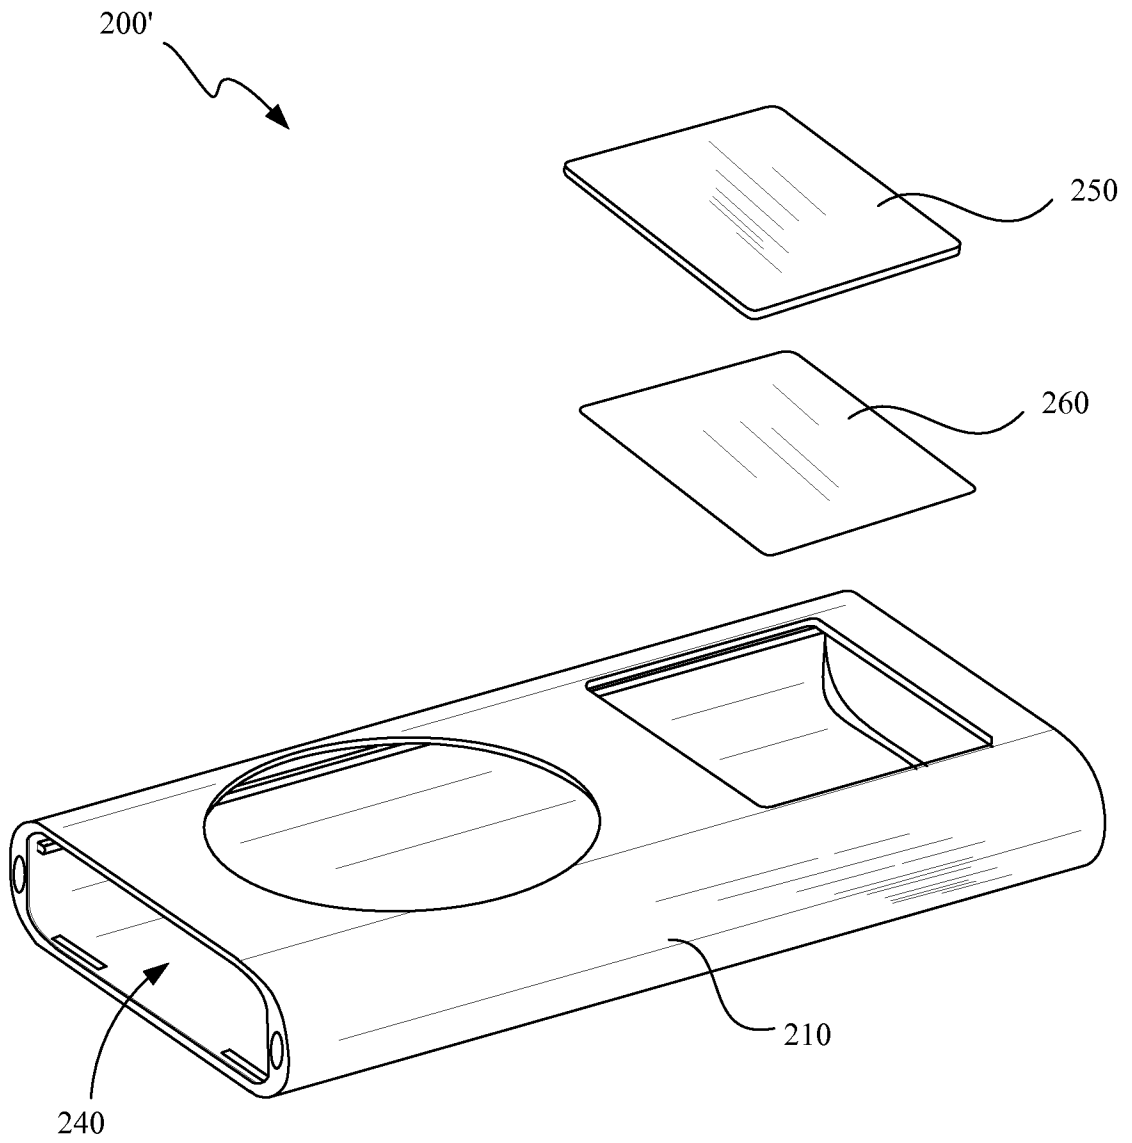


FIG. 4

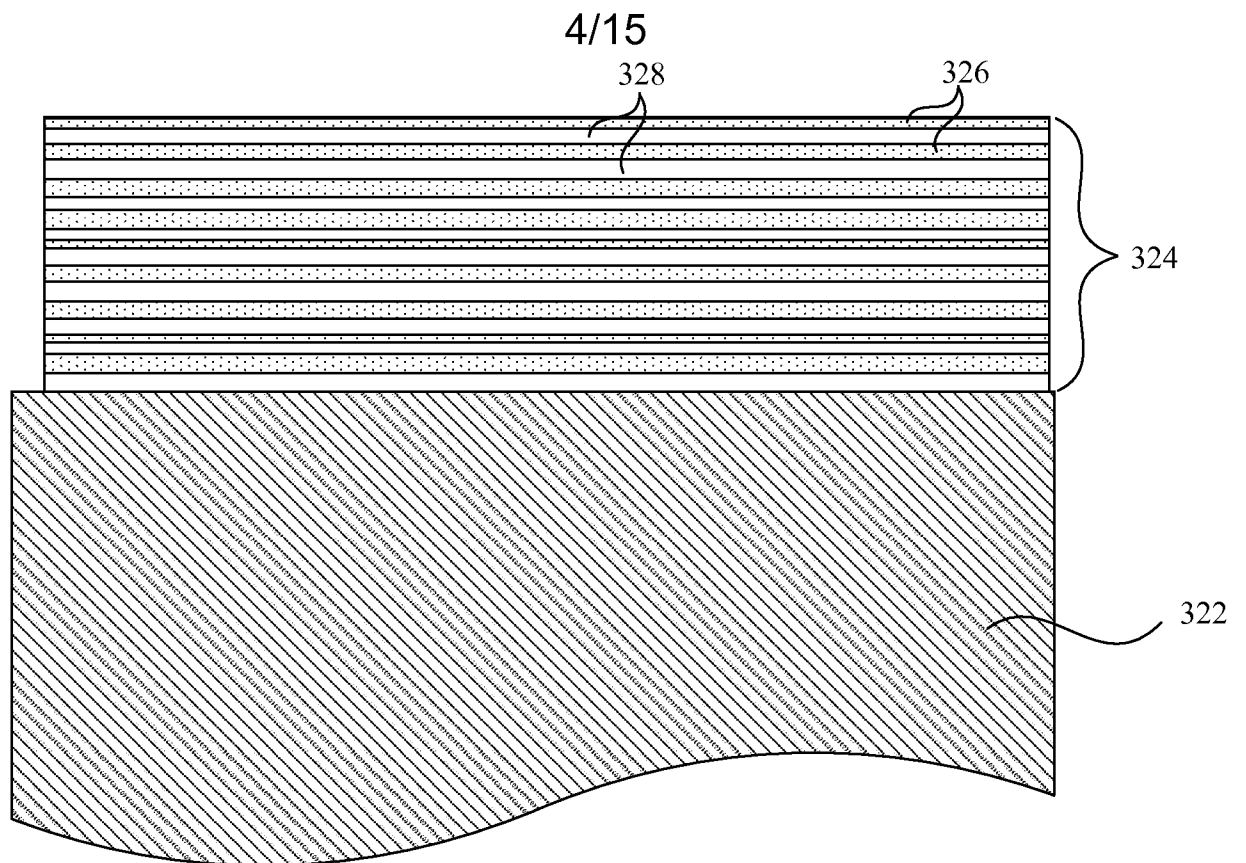


FIG. 5

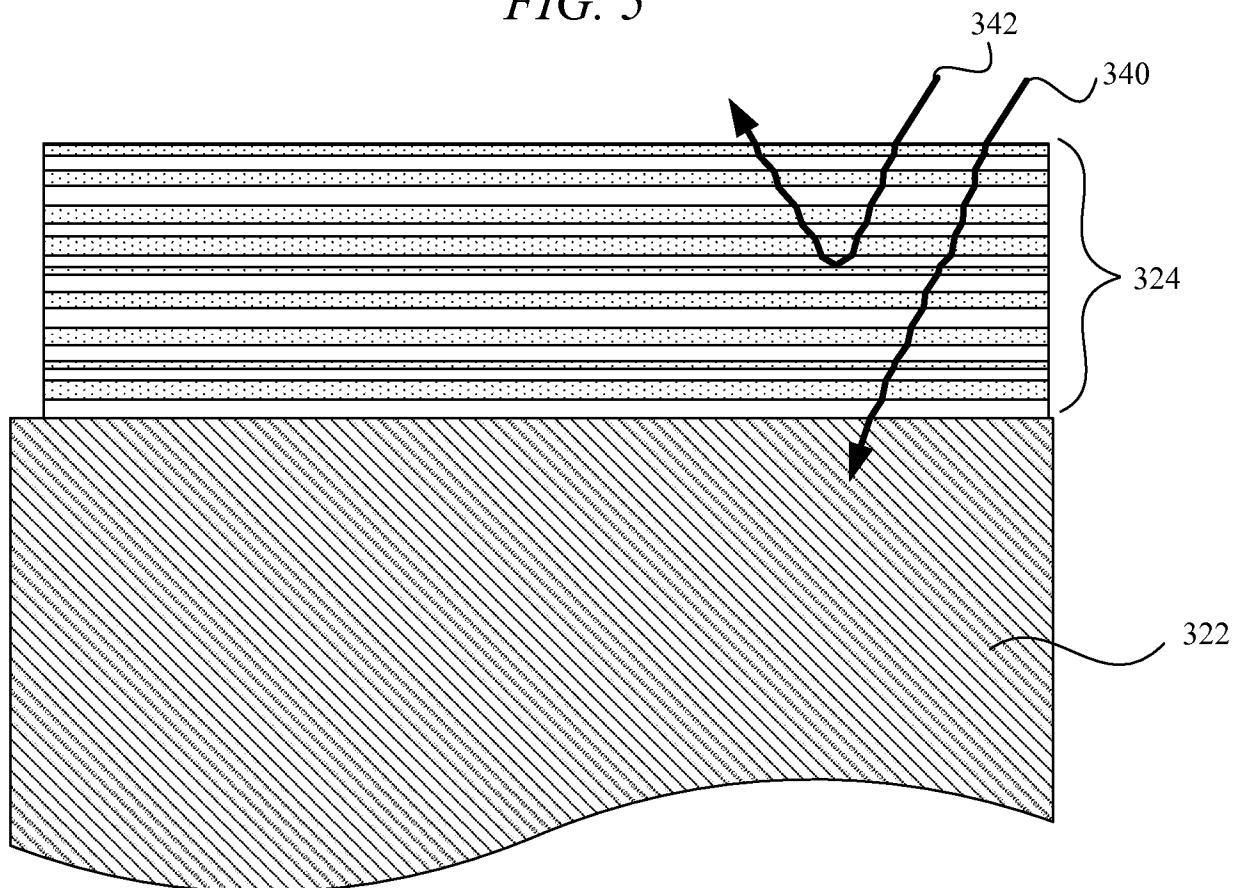


FIG. 6

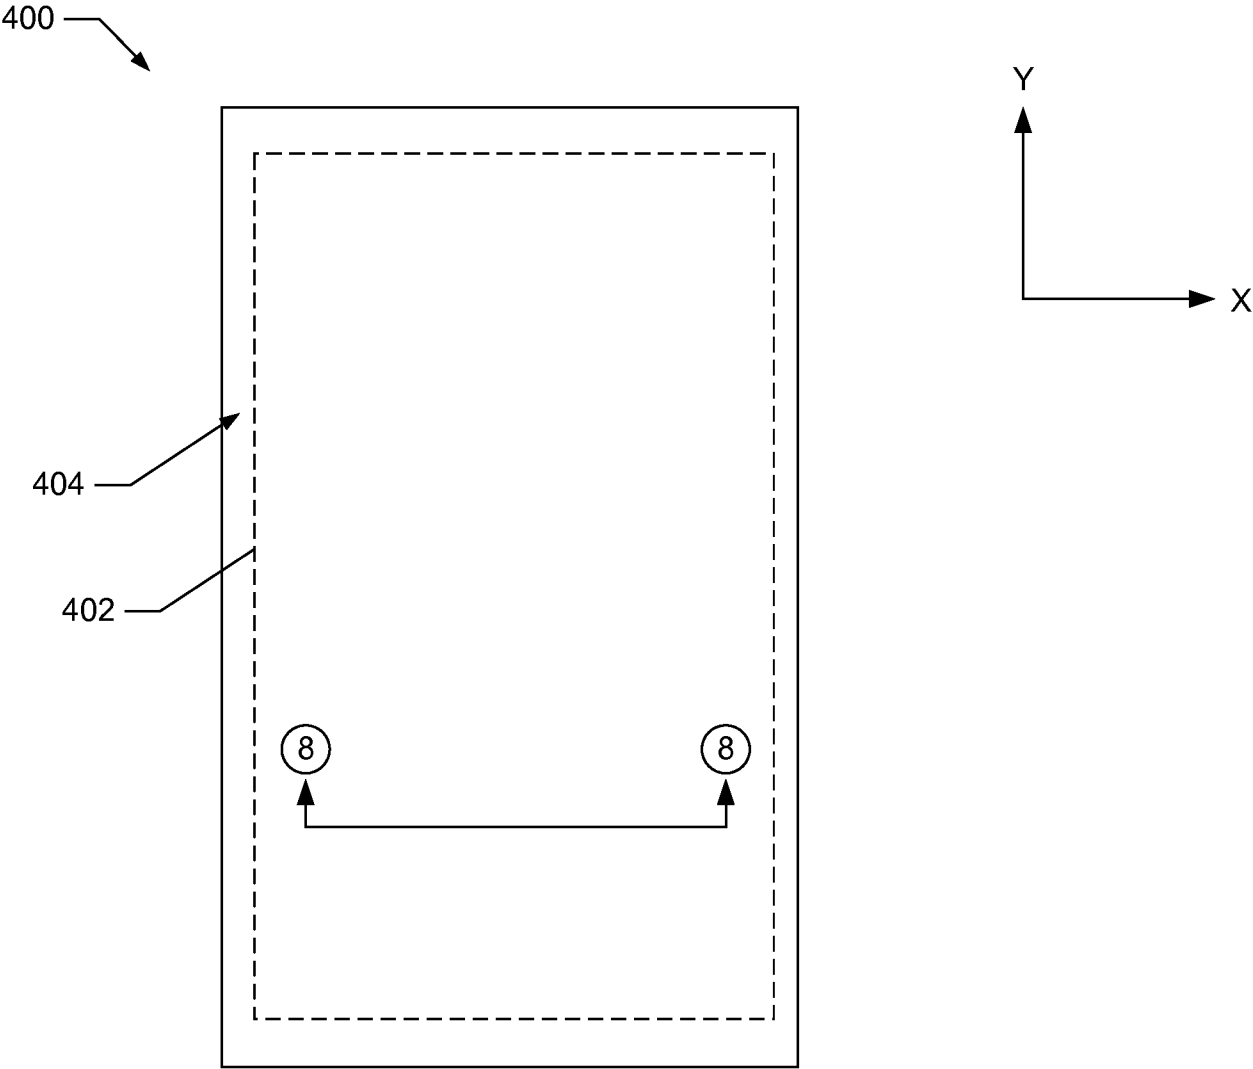


FIG. 7

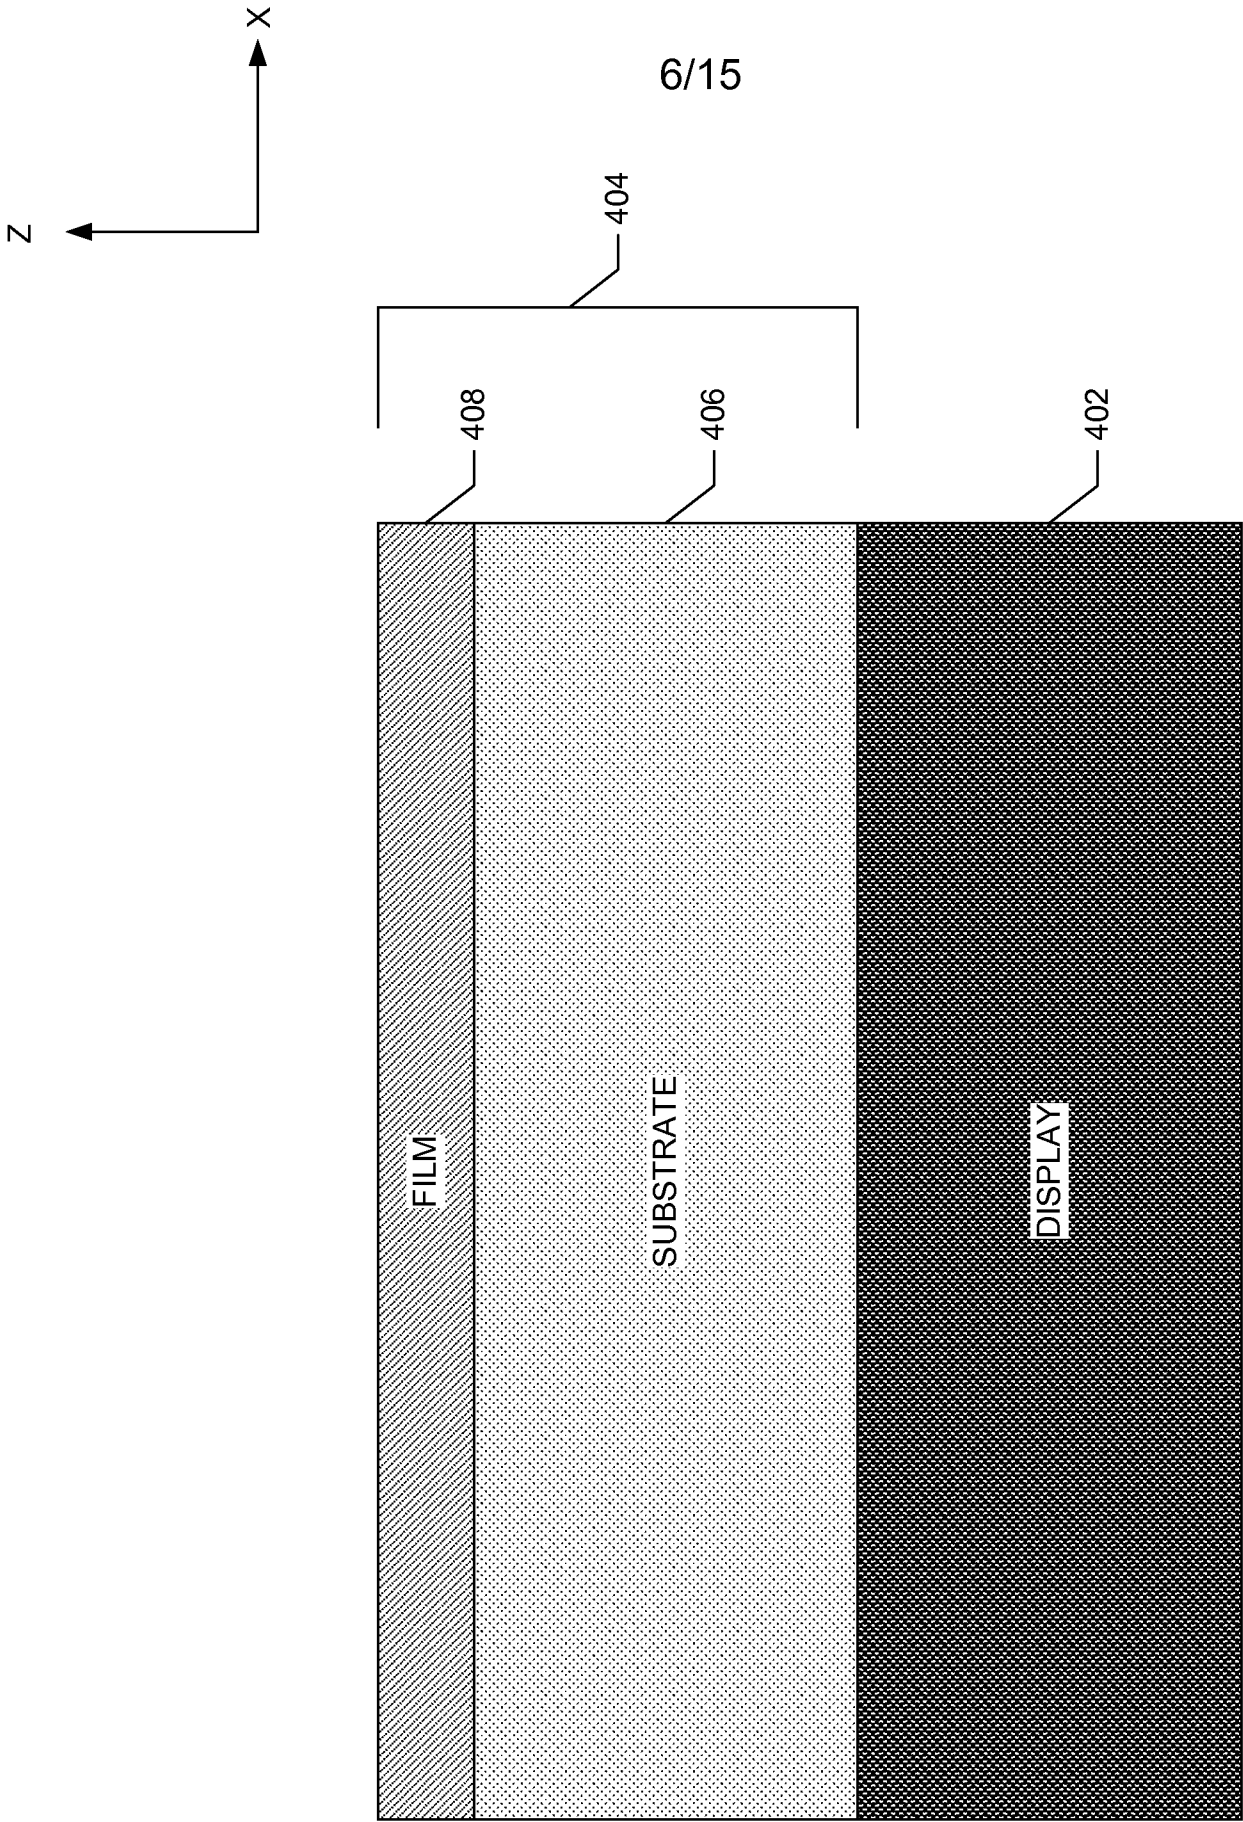


FIG. 8

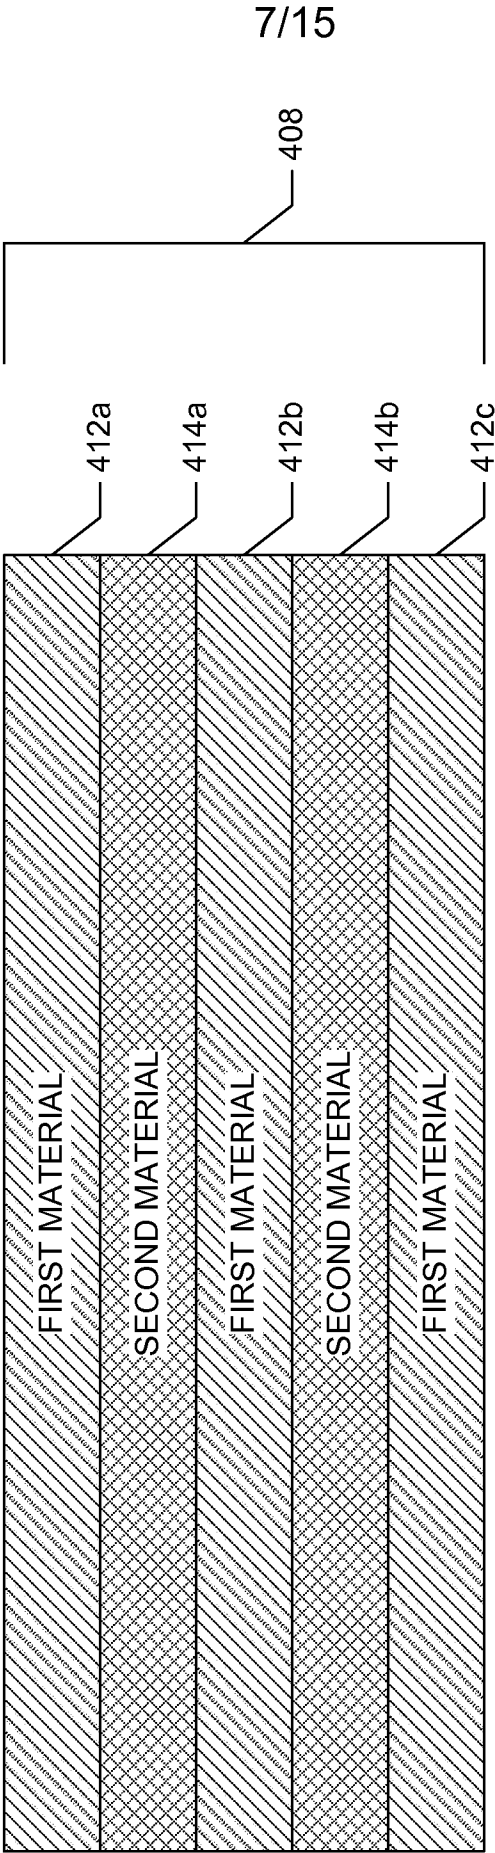


FIG. 9

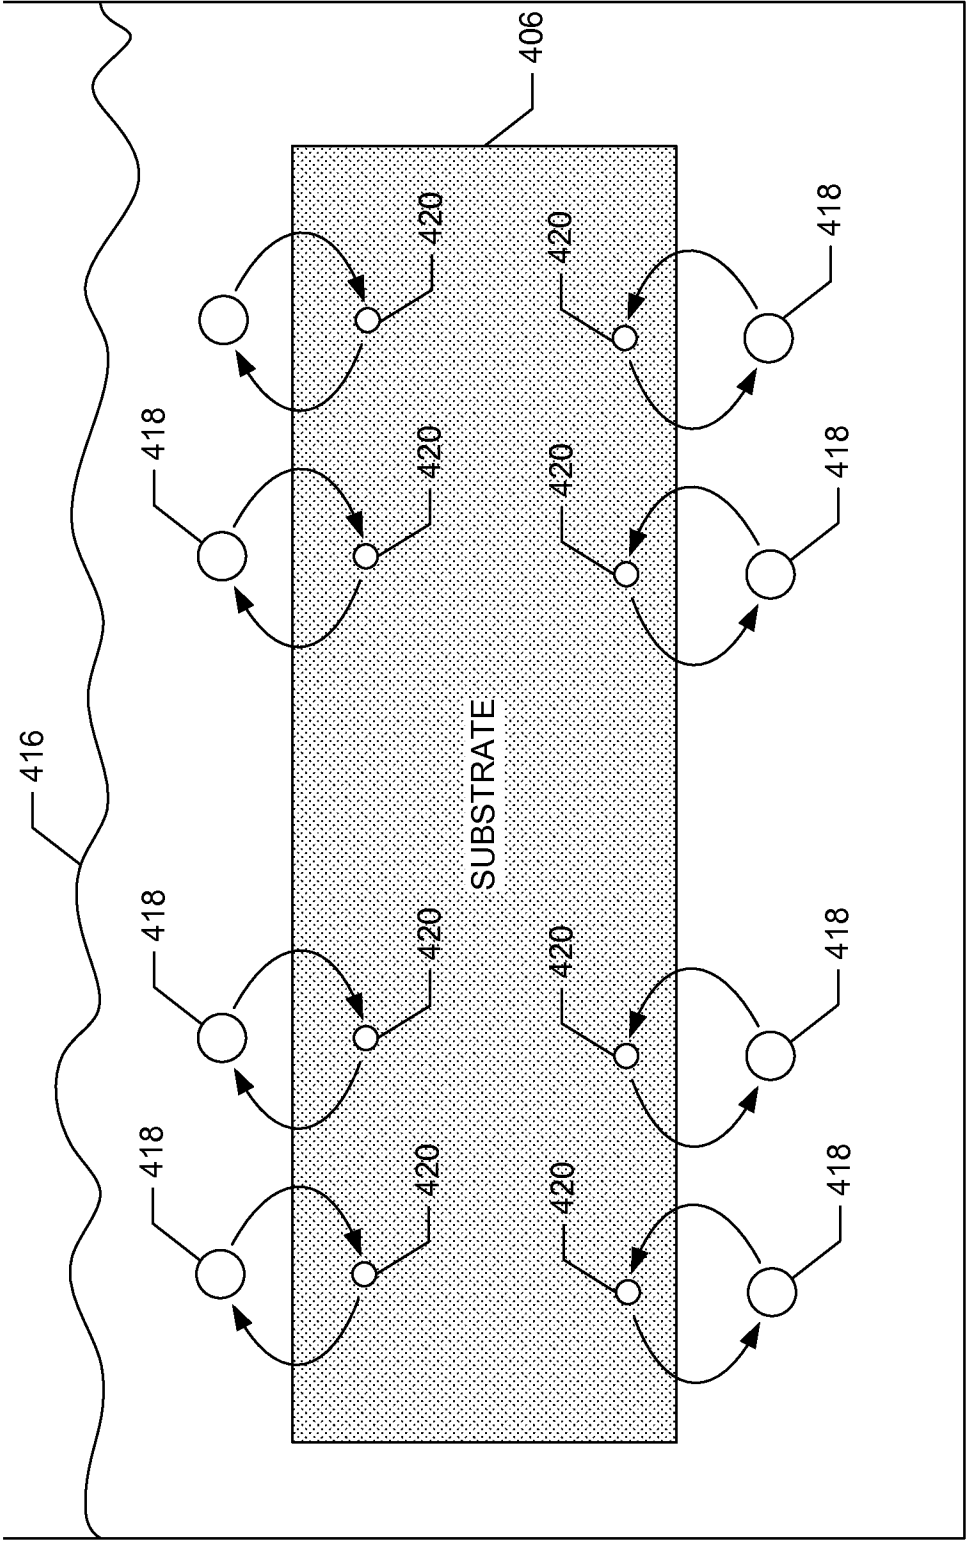


FIG. 10

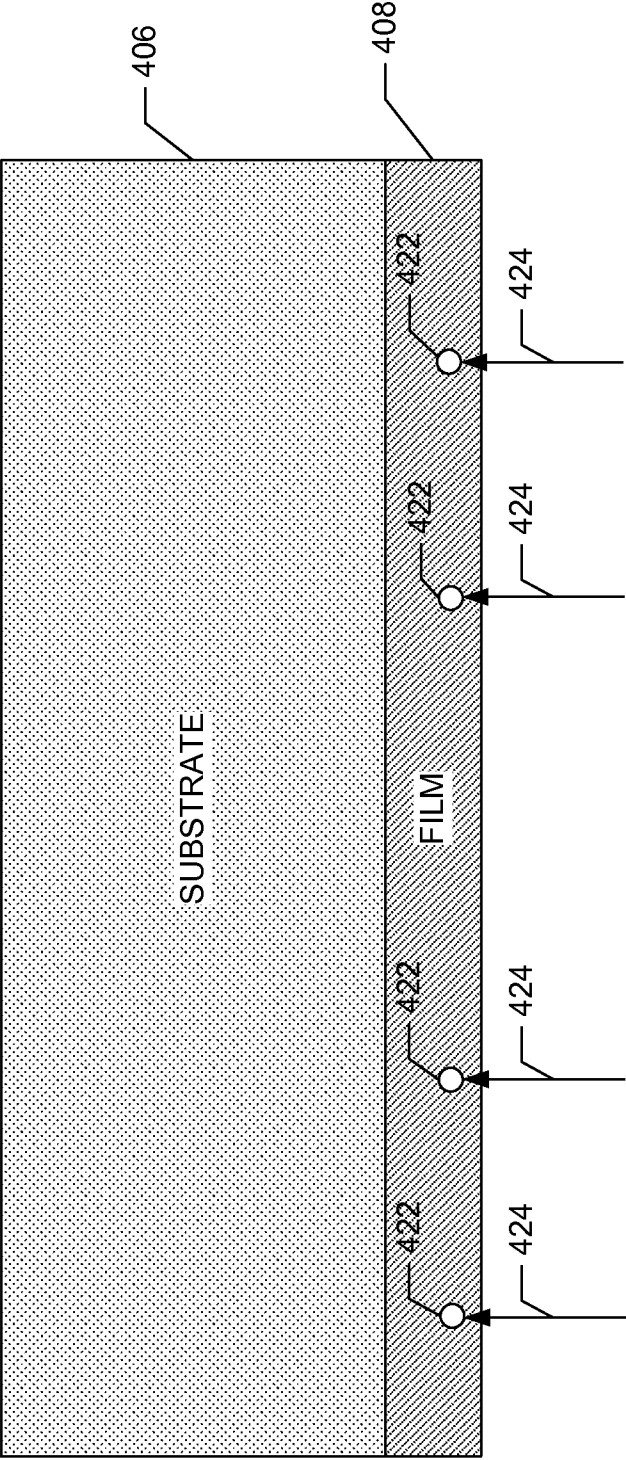


FIG. 11

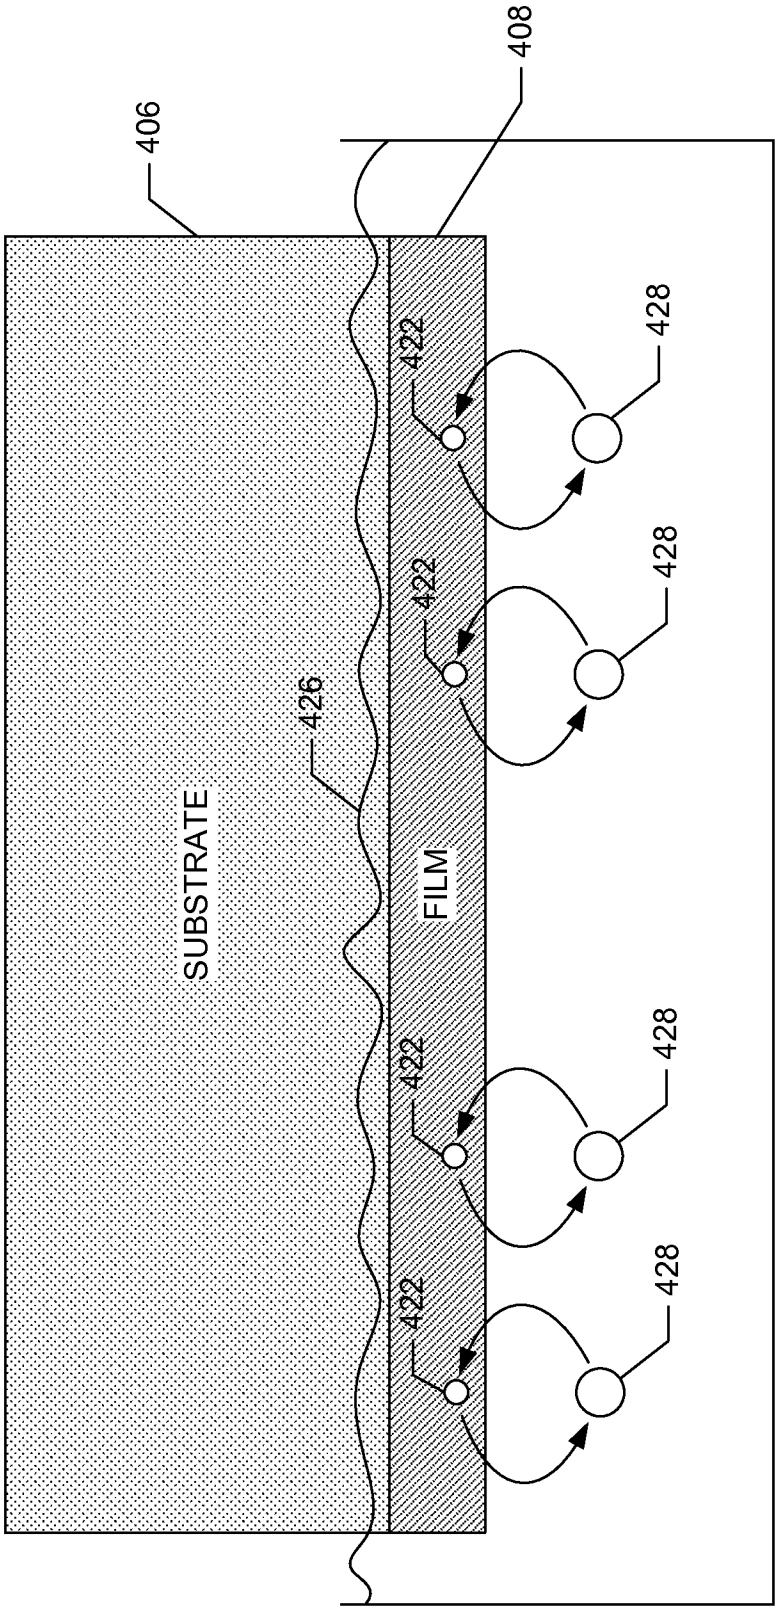


FIG. 12

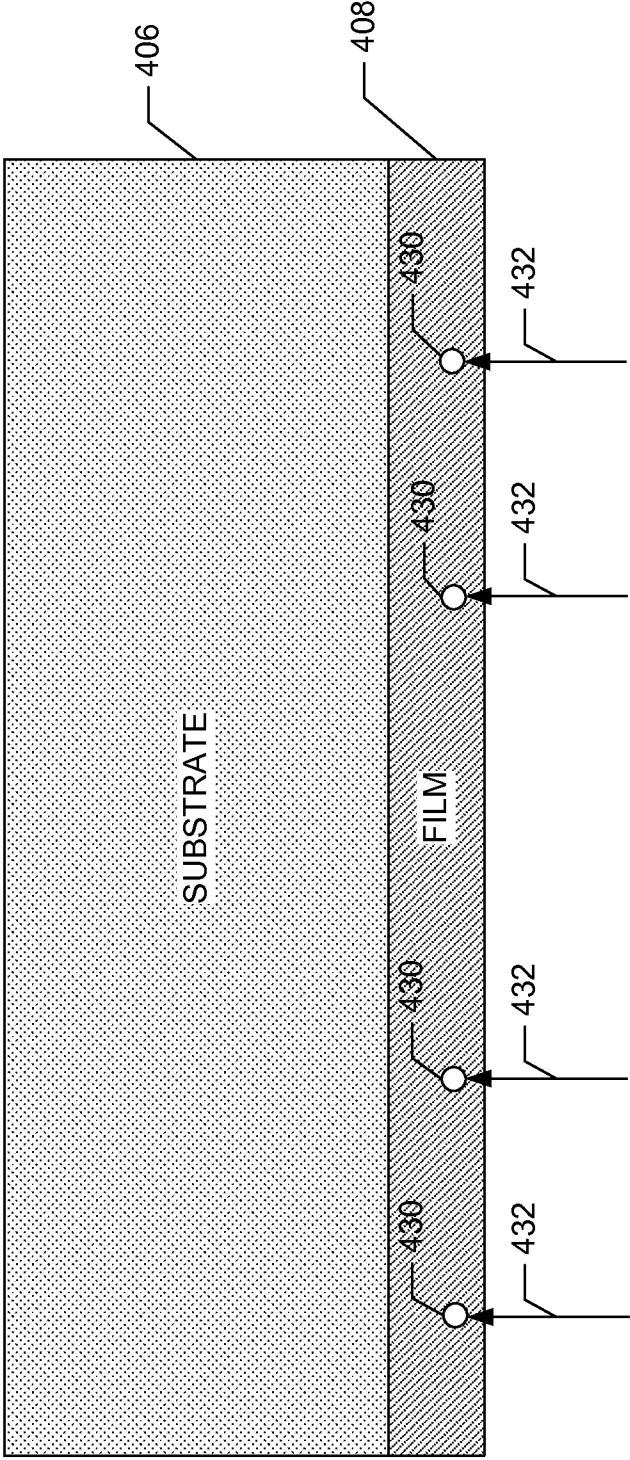


FIG. 13

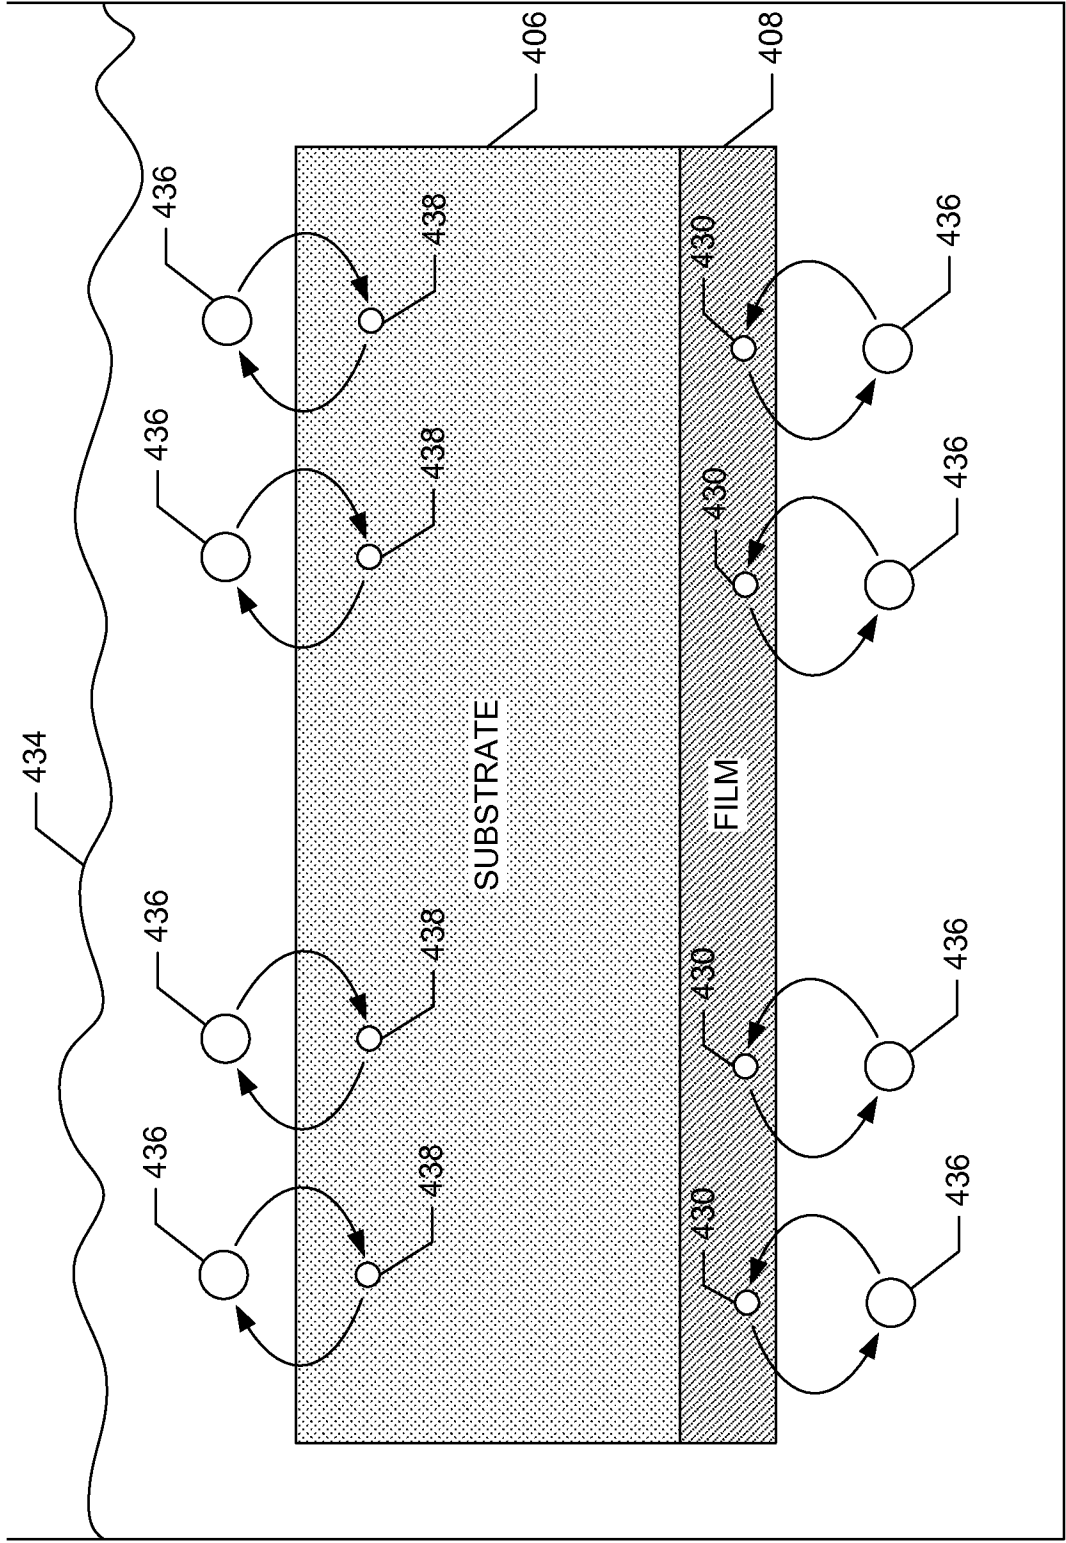
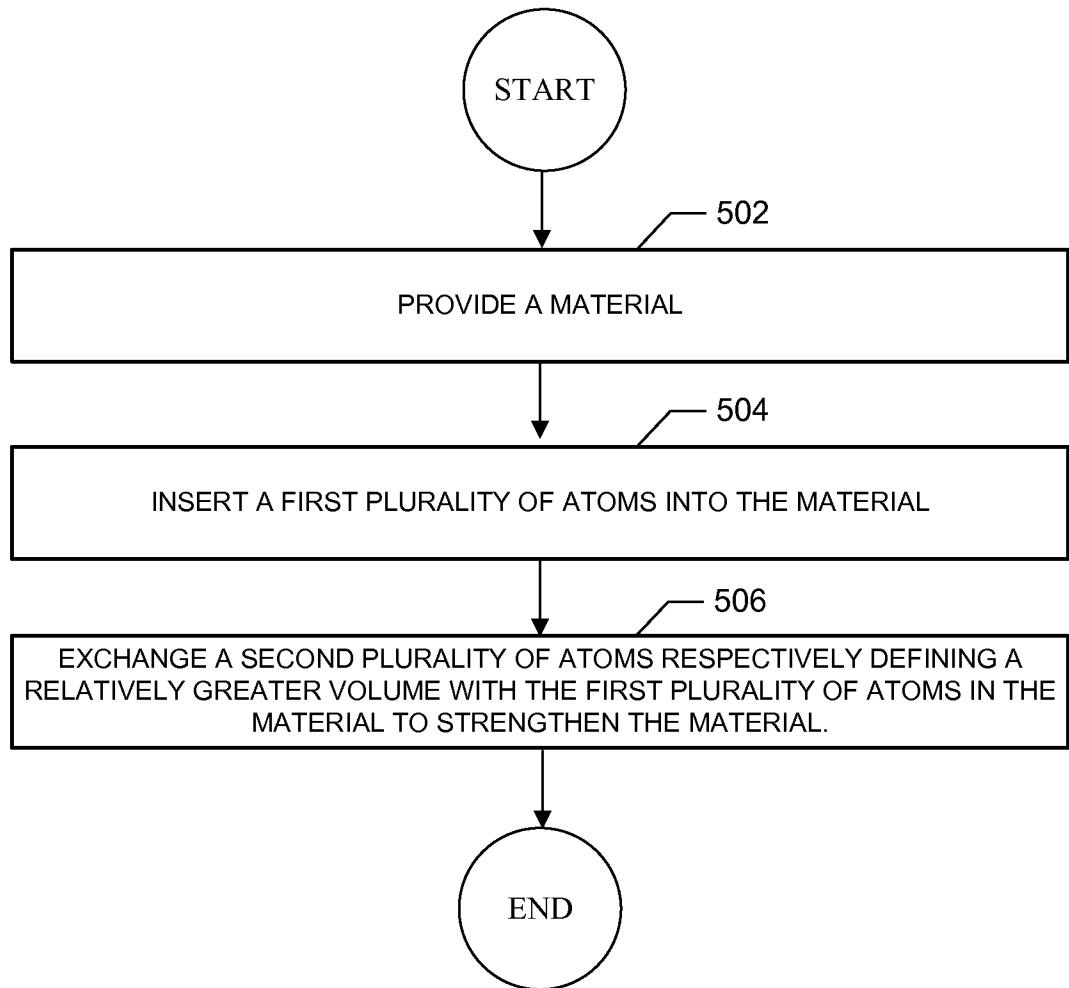
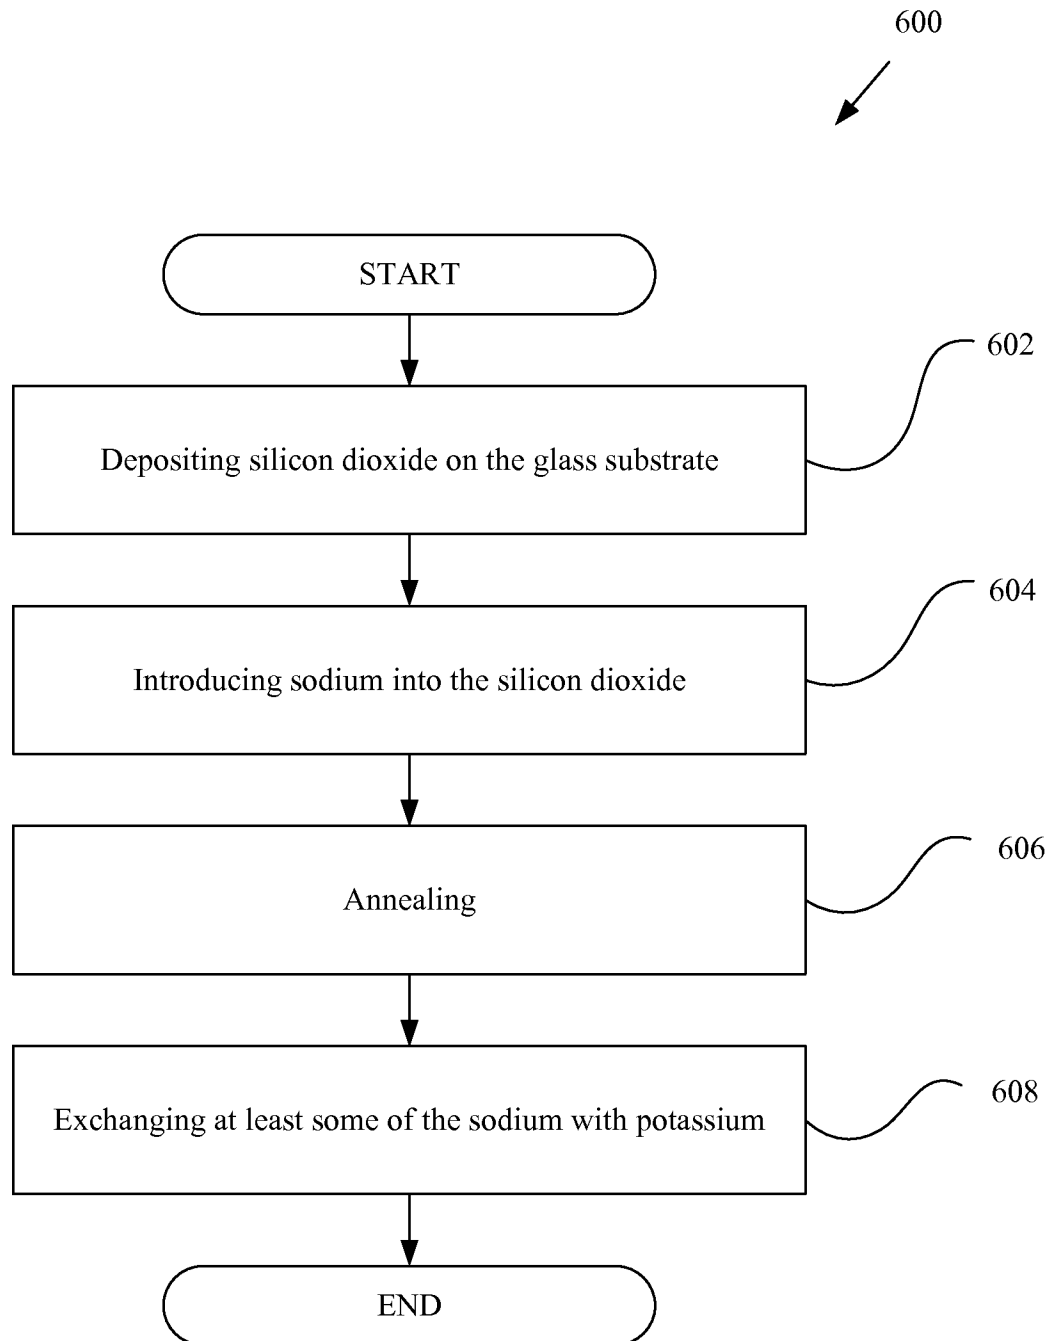


FIG. 14

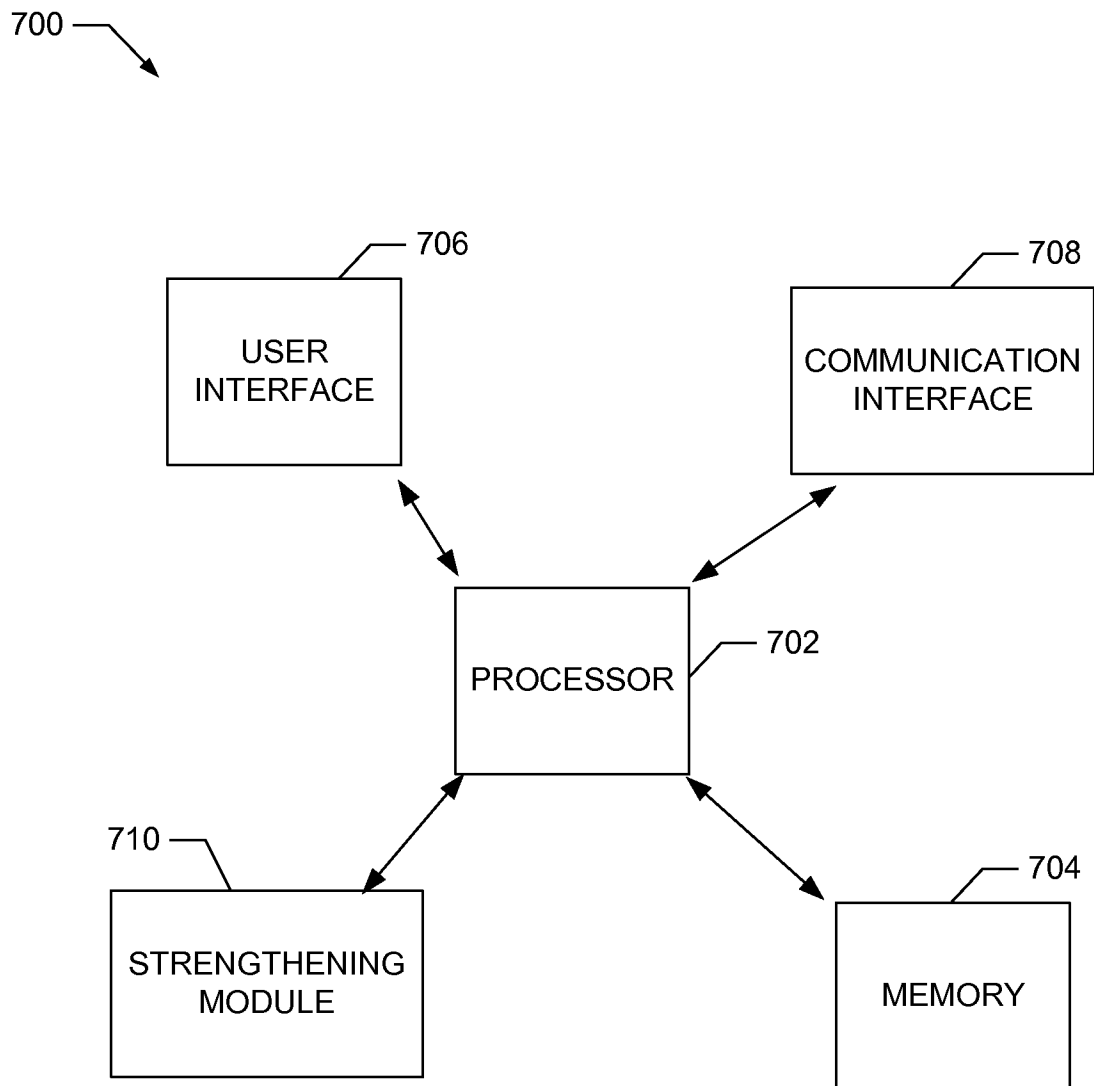
13/15

*FIG. 15*

14/15

*FIG. 16*

15/15

*FIG. 17*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/046962**A. CLASSIFICATION OF SUBJECT MATTER****G02B 1/11(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02B 1/11; B32B 9/00; C03C 17/34; B32B 27/28; B32B 15/00; B32B 5/16; H01L 31/04; B32B 19/00; C03C 17/00; B05D 5/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: anti-reflective coating, dopant, strengthen, layer and sodium

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011-0026126 A1 (TAKADA, KATSUYUKI et al.) 03 February 2011 See abstract and paragraphs [0205]-[0325].	1-60
A	US 2010-0297430 A1 (THIES, JENS CHRISTOPH et al.) 25 November 2010 See abstract and paragraphs [0033]-[0134].	1-60
A	WO 01-98222 A1 (KABUSHIKI KAISHA TOSHIBA et al.) 27 December 2001 See abstract, page 8, line 18 - page 10, line 13 and figures 1A-1D.	1-60
A	US 2008-0295884 A1 (SHARMA, PRAMOD K. et al.) 04 December 2008 See abstract, paragraphs [0012]-[0022] and figures 1-2.	1-60
A	US 4721657 A (TAKAHASHI, KENICHI et al.) 26 January 1988 See abstract, column 2, lines 25-47 and figures 1-2.	1-60



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 November 2014 (07.11.2014)

Date of mailing of the international search report

07 November 2014 (07.11.2014)

Name and mailing address of the ISA/KR


 International Application Division
 Korean Intellectual Property Office
 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
 Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/046962

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0026126 A1	03/02/2011	JP 2011-048358 A	10/03/2011
US 2010-0297430 A1	25/11/2010	AU 2007-214777 A1	23/08/2007
		AU 2007-214779 A1	23/08/2007
		AU 2007-214779 B2	23/02/2012
		AU 2007-214780 A1	23/08/2007
		AU 2007-214781 A1	23/08/2007
		BR PI0707762 A2	10/05/2011
		BR PI0707817 A2	10/05/2011
		CA 2635132 A1	23/08/2007
		CA 2635132 C	23/07/2013
		CA 2635427 A1	23/08/2007
		CA 2636053 A1	23/08/2007
		CA 2638010 A1	23/08/2007
		CN 101384923 A	11/03/2009
		CN 101384923 B	02/03/2011
		CN 101384924 A	11/03/2009
		CN 101384925 A	11/03/2009
		CN 101384926 A	11/03/2009
		CN 101384926 B	02/02/2011
		EP 1818693 A1	15/08/2007
		EP 1818694 A1	15/08/2007
		EP 1984760 A1	29/10/2008
		EP 1984762 A1	29/10/2008
		EP 1984763 A1	29/10/2008
		EP 1984764 A2	29/10/2008
		EP 1984765 A1	29/10/2008
		JP 2009-526638 A	23/07/2009
		JP 2009-526727 A	23/07/2009
		JP 2009-526881 A	23/07/2009
		JP 2009-527011 A	23/07/2009
		KR 10-2008-0095251 A	28/10/2008
		KR 10-2008-0106510 A	08/12/2008
		US 2010-0165467 A1	01/07/2010
		US 2010-0167009 A1	01/07/2010
		US 2010-0167046 A1	01/07/2010
		US 2011-0033678 A1	10/02/2011
		WO 2007-093339 A1	23/08/2007
		WO 2007-093340 A2	23/08/2007
		WO 2007-093340 A3	01/11/2007
		WO 2007-093341 A1	23/08/2007
		WO 2007-093342 A1	23/08/2007
		WO 2007-093343 A1	23/08/2007
WO 01-98222 A1	27/12/2001	CN 100478292 C	15/04/2009
		CN 1436156 A	13/08/2003
		CN 1673144 A	28/09/2005
		DE 60143654 D1	27/01/2011
		EP 1294652 A1	26/03/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/046962

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 1294652 B1	15/12/2010
		KR 10-0775391 B1	12/11/2007
		KR 10-2003-0004383 A	14/01/2003
		US 2003-0157317 A1	21/08/2003
		US 2005-0037201 A1	17/02/2005
		US 2009-0202834 A1	13/08/2009
		US 6777069 B2	17/08/2004
		US 7575803 B2	18/08/2009
		US 8029898 B2	04/10/2011
		WO 01-98222 A1	27/12/2001
US 2008-0295884 A1	04/12/2008	EP 2150984 A2	10/02/2010
		WO 2008-153617 A2	18/12/2008
		WO 2008-153617 A3	24/09/2009
US 4721657 A	26/01/1988	EP 0147946 A2	10/07/1985
		EP 0147946 B1	19/07/1989
		JP 60-125801 A	05/07/1985