

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 November 2009 (19.11.2009)

PCT

(10) International Publication Number
WO 2009/137876 A1

(51) International Patent Classification:

A01G 9/10 (2006.01) *E03F 1/00* (2006.01)
E02B 13/00 (2006.01) *E02D 17/20* (2006.01)
E02B 11/00 (2006.01)

(21) International Application Number:

PCT/AU2009/000597

(22) International Filing Date:

13 May 2009 (13.05.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2008902415 16 May 2008 (16.05.2008) AU

(71) Applicants and

(72) Inventors: **LEE, Alan, Sian, Ghee** [SG/SG]; 21 Almond Crescent, Singapore 677779 (SG). **OLIVER, David** [AU/AU]; 18/8 Avenue of Americas, Newington, New South Wales 2127 (AU). **GREAVES, Henry** [AU/AU]; 171 Hopetoun Avenue, Watsons Bay, New South Wales 2030 (AU).

(74) Agent: **F B RICE & CO**; Level 23, 44 Market Street, Sydney, NSW 2000 (AU).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLEXIBLE DRAINAGE CELL

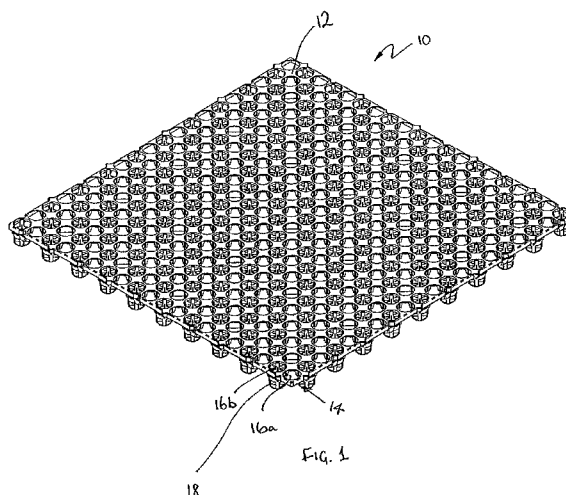

(57) Abstract: A drainage cell (10) comprises a backing plate (12) defining a plurality of holes (16a, 16b), a series of conical tubular structures (18) having side walls and a base extending from the backing layer, the tubular structures being in fluid communication with at least some of the holes (16a, 16b) in the backing plate (12) thereby allowing fluid to pass through the holes into a generally tubular structure. The sides of the tubular structures define apertures (109) permitting fluid flow out of the tubular structures through the walls of the tubular portions. Typically, the perforated or open area of the tubular structures is at least 20% of the area of the side walls of the tubular structures, more preferably at least 40%, more preferably 50% or greater and most preferably of the order of 70 to 75%. Providing apertures (109) in the side walls of the tubular structures significantly improves not only the rate of flow of the water through the cell but also creates a higher internal drain void volume area as the water can occupy the interior of the tubular structures and not just the volume in between the tubular structures.



WO 2009/137876 A1

Flexible Drainage Cell

Cross-Reference to related applications

This application claims priority from Australian provisional patent application
5 No 2008902415 entitled "Flexible drainage cell" filed 16 May 2008, the entire contents
of which are hereby incorporated by reference.

Field of the Invention

This invention relates to an improved drainage cell.
10

Background to the Invention

The control and flow of surface water, such as rain water or storm water, is
important in preventing the build up of surface water adjacent to the foundations of
buildings or other structures, and in other areas such as playing fields, golf courses,
15 landscaped decks, gardens and the like. Roof gardens are becoming increasingly
popular both to "green" buildings and make them more environmentally friendly, and
also to provide recreational spaces. The use of drainage cells in roof gardens is critical
in allowing excess water to escape quickly from the roof garden to drainage outlets.
This reduces the potential for leakage of water through roofs, and also helps prevent
20 load issues due to the weight of water, growth media and the like on top of a building's
roof.

A typical drainage cell (often known as a dimpled drainage sheet) is formed
from an extruded sheet of plastic in which is formed an array of protruding frusto-
conical dimples . A layer of geotextile is adhered to the base of the frusto conical
25 sections of the drainage cell. The cells are placed with the base of the frusto-conical
sections and the geo-textiles facing upwards. The opposite face, or base, of the cell
typically lies on a sheet of waterproof membrane or like when used in a roof garden
application.

However, the problem with the existing drainage cells is that flow tends to be
30 inhibited by the volume of the conical dimples occupying the space beneath the
geotextile layer. More significantly, the geotextile tends to sag due to the weight of soil
or other growth medium lying on top of the geotextile layer. This tends to block or
partially block the spaces between the conical dimples, thus impeding water flow and
slowing the rate of water flow through the drainage cell. The problem of sagging
35 geotextile tends to increase as the drainage cell and geotextile age.

The present invention aims to provide an improved drainage cell which addresses some of the problems of prior art drainage cells discussed above.

Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is solely for the purpose of providing a context for the present invention. It is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

Summary of the Invention

In a first broad aspect, the present invention provides a drainage cell comprising a backing plate or sheet defining a plurality of holes, a series of tubular structures having side walls and a base extending from the backing layer, the tubular structures being in fluid communication with at least some of the holes in the backing layer thereby allowing fluid to pass through a hole into a tubular structure, wherein the side of the tubular structures define apertures thereby permitting fluid flow out of the tubular structures through the walls of the tubular portions.

Typically, the perforated or open area of the tubular structures is at least 20% of the area of the side walls of the cones, more preferably at least 40%, more preferably 50% or greater, and most preferably of the order of 70 to 75%.

Advantageously, providing apertures in the side walls of the tubular structures significantly improves not only the rate of flow of the water through the cell but also creates a higher internal drain void volume area as the water can occupy the interior of the tubular structures and not just the volume between cones. This contrasts with existing drainage cells in which the interior of the conical structures is not occupied by water.

Typically, the backing sheet is generally planar and is covered with a layer of a fluid permeable geotextile which allows a restricted flow of fluid (usually water) through it.

Typically, half of the holes in the backing layer coincide with tubular structures with the other half of the holes being located in between the tubular structures. Thus only 50% of the apertures are typically located above tubular structures.

In use the drainage cell is used in the opposite orientation to existing drainage cells with the cell resting on and supported by the base of the tubular structures. The total area of the base of the tubular structures is typically less than 35%, most preferably less than 25% of the total area of the base of the cell. In one specific
5 preferred embodiment the area is about 20%. The geo-textile layer is better supported by the planar backing layer and this reduces the tendency for the geo-textile to sag.

Because the geotextile lies against the backing sheet and not on the ends of the tubular members, as in prior art drainage cells, it is possible for the drainage cells to be nested with the tubular structures from one drainage cell nesting in between the gaps
10 between the tubular structures of another drainage cell. This significantly reduces the volume occupied by the drainage cells and makes transport of the drainage cells more cost effective.

The tubular structures are typically frustro-conical. However it will be appreciated that the structures need not be circular in cross-section but may be square
15 or have any other suitable cross-sectional shape.

Typically the holes in the sheet have a diameter of about 15 to 25mm, most preferably about 22.5 mm, to maximise the open area of the cell without compromising its strength. The diameter at the base of the conical structures is in the order of 18.5 mm for a 22.5 mm diameter hole.

20 The total area of the holes in the sheet is typically around 60 to 65% of the area of the sheet. This allows for rapid drainage.

The conical structures and apertures are preferably arranged in parallel arrays with one line of conical structures separated from the next line of conical structures by a line of simple, unsupported, holes. The centres of the holes and the conical structures
25 is offset so that each hole is located in the centre of four conical structures and vice versa.

It is preferred that the interior of the tubular structures is reinforced. Typically this is achieved by means of an internal rib or ribs which extends down the internal side walls of the structure. Four such ribs may be provided for each conical structure and
30 these may meet to define a cruciform structure at the base of the conical structure.

It is preferred that reinforcing ribs are also defined on the under side of the backing sheet extending between each pair of adjacent conical support structures.

Brief Description of the Drawings

35 A specific embodiment of the present invention will now be described by way of example only with reference to the accompany drawings which:

Figure 1 is an isometric view from above of a drainage cell embodying the present invention;

Figure 2 is an isometric view of the drainage cell of Figure 1 seen from below;

Figure 3 is an enlarged isometric view of one corner of the drainage cell of
5 Figure 1;

Figure 4 is an enlarged side view of part of the drainage cell shown in Figure 1;

Figure 5 is an enlarged top plan view of one corner of the drainage cell of Figure
1;

Figure 6 is an isometric view showing two drainage cells stacked one within the
10 other;

Figure 7 is a side view of the stacked arrangement shown in Figure 6;

Figure 8 is an isometric view showing two drainage cells embodying the present invention nested facing each other for transport or storage; and

Figure 9 shows a side view of a drainage cell covered with a layer of geotextile.
15

Detailed Description of the Preferred Embodiment

Referring to the drawings, Figures 1 and 2, show a drainage cell 10 embodying the present invention. The drainage cell is typically injection molded from a plastics material such as polypropylene, HDPE or LDPE. Recycled polypropylene may be
20 used. However, any other suitable materials which can be molded or cast may be used. In the specific embodiment, the cell is about 30mm high but it may range from 15mm to 50mm or more.

The drainage cell 10 comprises a generally square sheet of plastics material defining a perforated backing plate 12 which defines a plurality of parallel rows 14 of
25 first and second circular holes 16a and 16b. A tubular support member 18 which is generally frusto-conical, extends from each second hole 16b.

More specifically, with reference to Figures 3 and 5, it can be seen that in each row 14, running parallel to the side of the cell, a support member 18 depends from every second hole 16b in the row, with unsupported holes 16a being located between
30 the holes 16b associated with supports. A similar arrangement is defined in the adjacent row 14₁ except that the supported and unsupported holes are offset by one. Thus as can be seen in the Figures, there is an unsupported hole 16a in the centre of four supported holes 16b and a supported hole 16b is located at the centre of four unsupported holes 16a. The unsupported holes 16a are the same size as the supported
35 holes 16b, in the described embodiment but in a variant (not shown) may be larger.

This arrangement allows two cells to be nested facing each other as shown in Figure 8 to reduce the volume occupied by the cells for storage and/or transport by about 50%.

Alternatively, one can view the drainage cell as having alternating rows of supported and unsupported holes extending at 45° to the edges of the cell.

5 With reference to Figure 3, one side edge 30 of the backing plate defines a series of alternating generally triangular cut out portions 32 and generally triangular projections 34. Depending from each triangular projection 34 is a male connecting member in the form of depending prong 36.

10 The adjacent side edge 40 of the cell also defines a series of triangular cut out portions 42 alternating with triangular protrusions 44. A slot 46 or female engaging means is defined below each of the triangular cut out portions 42. The slot is shaped and configured to receive the male connecting member so that the cells can be interconnected using the prongs and female slots. The prongs are ideally much longer than the slots as this helps keep the cells together when they are interlocked and
15 prevents accidental disengagement.

However, for storage and transport, the cut-out portions 32 allow the cells also to be simply abutted without interconnecting them. In this case, the projecting triangular portions 34 locate in the cut out portions 32 of an adjacent cell. With reference to Figure 2, it can be seen that two adjacent side edges have male connecting
20 members and that those side walls have their slots 32 and projections 34 offset to allow that.

Figures 3 and 4 also show the tubular support structures 18 in more detail. Each support structure is generally frusto-conical in shape tapering from the backing plate towards the base 100 of the support structure. The diameter of the hole 16b at the top of
25 the cone is approximately 22.5 mm and the diameter of the base 101 of the cone is approximately 18.5 mm. The areas occupied by the base of the cones is small, typically about 20% of the total surface area of the base of the cell. This assists when stacking and nesting the cells.

The side walls of the cone are made up of four depending legs 102 spaced at 90°
30 apart around the circumference of the base 100. Each leg is arcuate in horizontal cross-section so that envelope created by the rotation of the legs about a vertical axis passing through the centre of the base is frusto-conical. An annular ring 104 extends around the support 18 about midway between its base at its top connecting the four legs 102. Extending down the interior of each leg from the ring 104 to the base is a strengthening
35 rib 106. The four ribs meet at the centre of the base in a cross 108 - best seen in Figure 5. With reference to figure 4 in particular, eight apertures 109a, 109b are defined in the

sides of the support structure four (109b) between the legs 102, base 101 and ring 104 and four (109a) between the legs 102, top and ring 104. Typically, the open area of the tubular structures is of the order of 70 to 75% of the total surface area of the sides of the support structures/cones including the apertures. In other words the apertures
5 constitute 70 to 75% of the unperforated area of the sides of the cone if the cone did not define apertures/perforations.

With reference to Figure 3 a further strengthening rib 110 extends between each pair of diagonally opposite supports 18. As can be seen the ribs extend down the exterior of the support as far as the ring 104 as well as extending under the top surface
10 to the next support 18. Four ribs extend from each support 18.

It can be seen that the space between adjacent cones is relatively large - bigger than the diameter of the cones. The void area of the sheet (defined by the holes 16a and 16b is about 65% of the total area of the sheet (that is the solid part plus the holes). As the cones are open, water can flow through the interior of the cones and the total
15 internal void are of the cell is about 95%. The cell allows water flow in there dimensions compared to existing dimple drainage sheets where the flow is essentially only 2-dimensional. Typically water flow rates may be around 20 litres/min which is two to three times the flow rate for typical dimpled drainage cells.

The cells have a compressive strength of about 70 tonnes/m². This is nearly
20 twice the compressive strength of dimpled drainage sheets and allows for the cells to be used in other applications.

For most uses, use the backing sheet 10 is covered with a layer of geo-textile material 200 - refer to Figure 9. In that arrangement it is possible to nest the cells for transport as shown in Figure 8. For this purpose the top layer must be rotated through
25 90° so that the base of the cones of the top layer oppose holes 16a in the lower layer. Clearly, to enable nesting the cells should be square.

Figures 6 and 7 shows the cells without geo-textile stacked and nested with each support 18 of an upper cell inserted about halfway into an unsupported hole 16a of a lower cell, as best seen in Figure 7. In the stacked arrangement of Figure 6, it is
30 anticipated that a plurality of cells may be stacked and nested one on top of another and enclosed in a permeable geo-textile or impermeable envelope thereby creating a tank for temporary storage or more permanent storage and control of water such as storm water, drainage water or the like. The construction of the cells allows the tank to support a considerably greater weight, typically doubling the strength of the cells. The
35 cells may be used in the nested configuration for other purposes other than enclosed in an envelope as a tank, for example where increased strength is required. The stacked

cells also occupy less volume and when a plurality of cells are nested one within the other the cells occupy about 50% less volume than if they were not nested.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific
5 embodiments without departing from the scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

CLAIMS:

1. A drainage cell comprising a backing plate defining a plurality of holes, a series of tubular structures having side walls and a base extending from the backing plate, the tubular structures being in fluid communication with at least some of the holes in the
5 backing plate thereby allowing fluid to pass through a hole into a tubular structure, wherein the side of the tubular structures define apertures thereby permitting fluid flow out of the tubular structures through the apertures in the walls of the tubular portions.
2. A drainage cell as claimed in claim 1 wherein the open area of the tubular
10 structures is at least 20% of the total area of the side walls of the cones.
3. A drainage cell as claimed in claim 2 wherein the perforated or open area of the tubular structures is at least at least 40% of the total area of the side walls of the cones.
- 15 4. A drainage cell as claimed in claim 3 wherein the perforated or open area of the tubular structures is at least at least 50% of the total area of the side walls of the cones.
5. A drainage cell as claimed in claim 4 wherein the perforated or open area of the tubular structures is between 70 to 75% of the total area of the side walls of the cones.
20
6. A drainage cell as claimed in any one of claims 1 to 5 wherein, the backing plate is generally planer and is covered with a layer of a fluid permeable geotextile.
7. A drainage cell as claimed in any one of claims 1 to 6 wherein half of the holes
25 in the backing layer coincide with tubular structures with the other half of the holes being unsupported and located in between the tubular structures.
8. A drainage cell as claimed in any one of claims 1 to 7 wherein the holes in the sheet have a diameter of about 15 to 25mm, typically about 20 to 25mm, most
30 preferably about 22.5 mm.
9. A drainage cell as claimed in any one of claims 1 to 8 wherein the tubular structures are frusto-conical.
- 35 10. A drainage cell as claimed in any one of claims 1 to 9 wherein the total area of the holes in the sheet around 60 to 65% of the total area of the plate.

11. A drainage cell as claimed in any one of claims 7 to 10 wherein the tubular structures and unsupported holes are preferably arranged in parallel arrays with one line of conical structures separated from an adjacent line of conical structures by a line of
5 unsupported holes with centres of the unsupported holes and the conical structures being offset so that each unsupported hole is located in the centre of four tubular structures and each tubular structure is located in the centre of four unsupported holes.
12. A drainage cell as claimed in any one of claims 1 to 11 wherein that the interior
10 of the tubular structures is reinforced by one or more internal ribs which extend down the internal side wall of the structure.
13. A drainage cell as claimed in claim 12 wherein four ribs reinforce each conical structure and meet to define a cruciform structure at the base of the conical structure.
15
14. A drainage cell as claimed in claim 12 or 13 wherein reinforcing ribs are also defined on the under side of the backing sheet extending between each pair of adjacent conical support structures.
- 20 15. A drainage cell as claimed in any one of claims 1 to 14 wherein the total area of the holes in the sheet is from 60 to 65% of the area of the sheet.
16. A drainage cell as claimed in any one of claims 1 to 15 wherein the total area of the base of the tubular structures is typically less than 35%, more preferably less than
25 25% of the total area of the base of the cell and most preferably about 20% of the total area of the base of the cell.
17. An underground drainage structure comprising a plurality of stacked drainage cells as claimed in any one of claims 6 to 16 wherein the cells are oriented with the
30 bases of the tubular structures lowermost and supporting their respective backing plate.
18. An underground drainage structure comprising a plurality of drainage cells as claimed in any one of claims 1 to 16 in a stacked and nested formation wherein the tubular structures of one cell in the stack are nested at least partly within the
35 unsupported holes of the cell directly below the one cell.

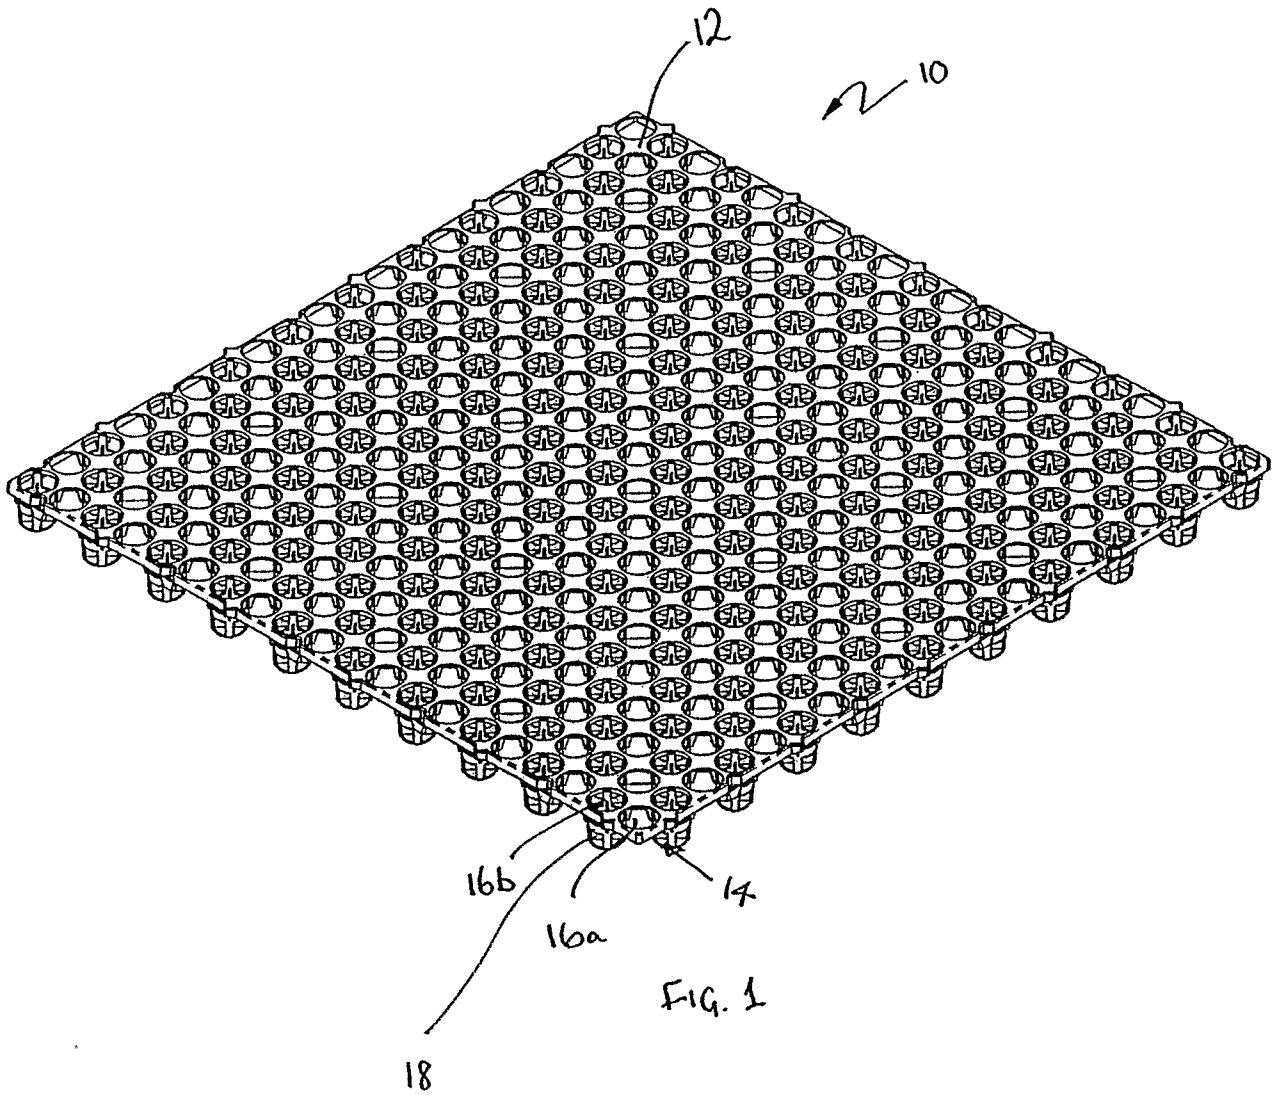


FIG. 1

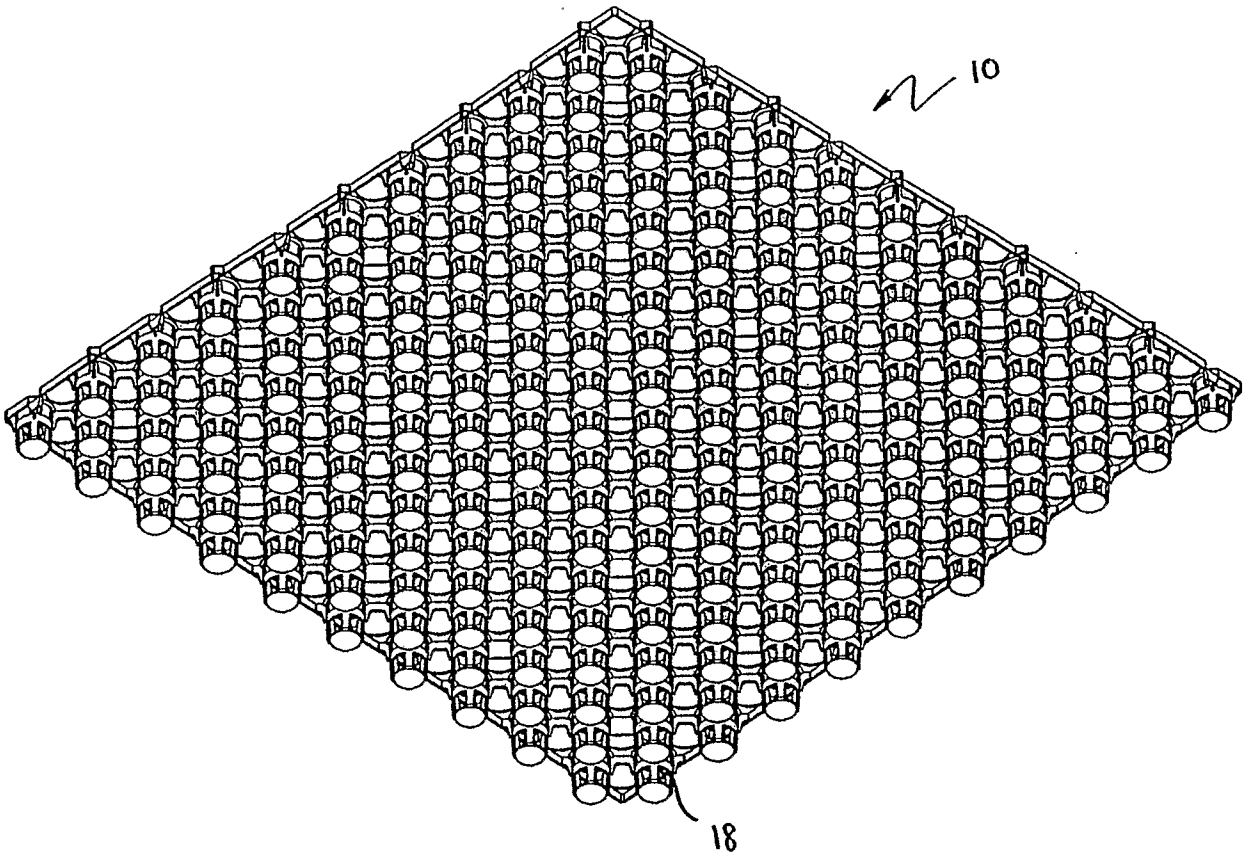
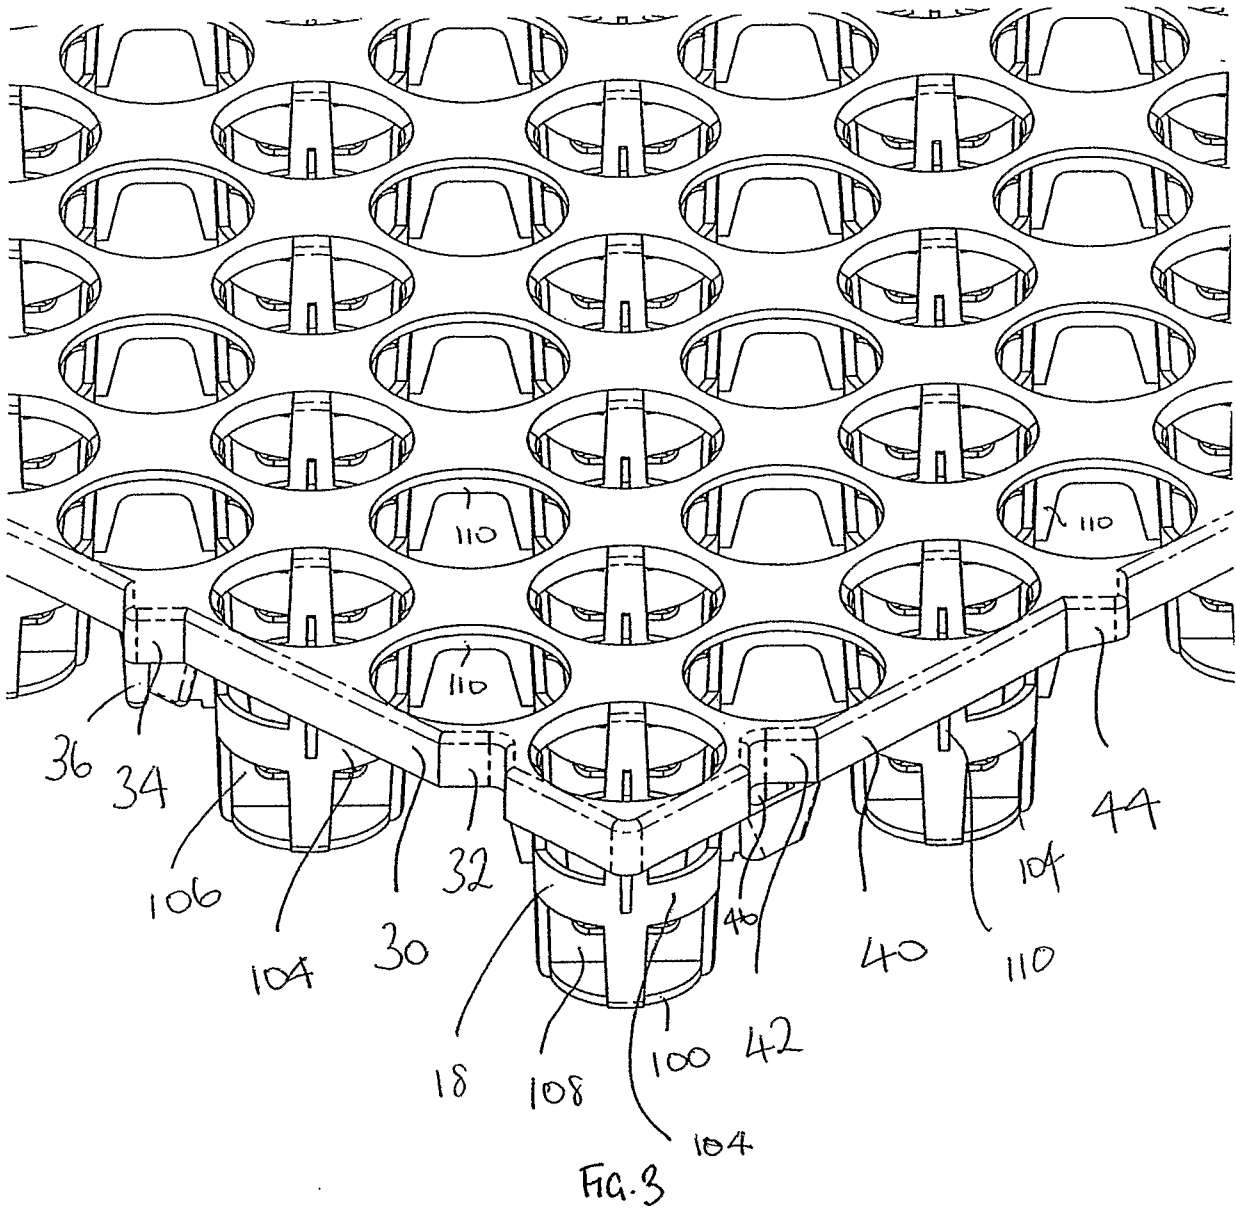


FIG. 2



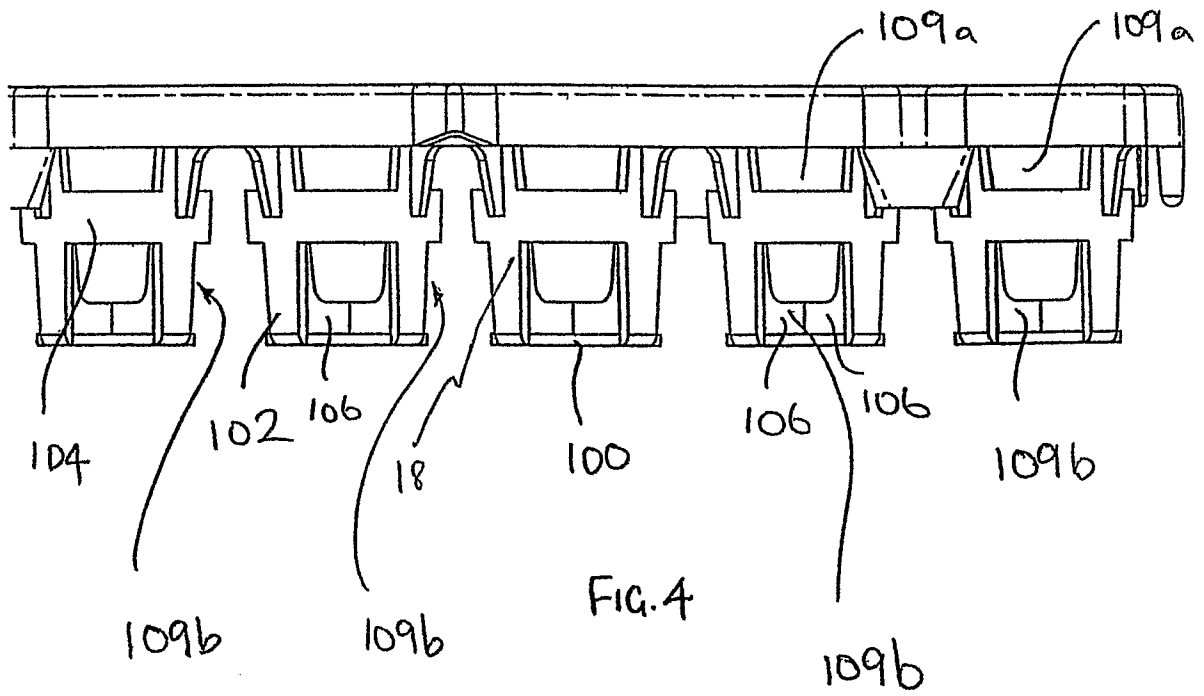
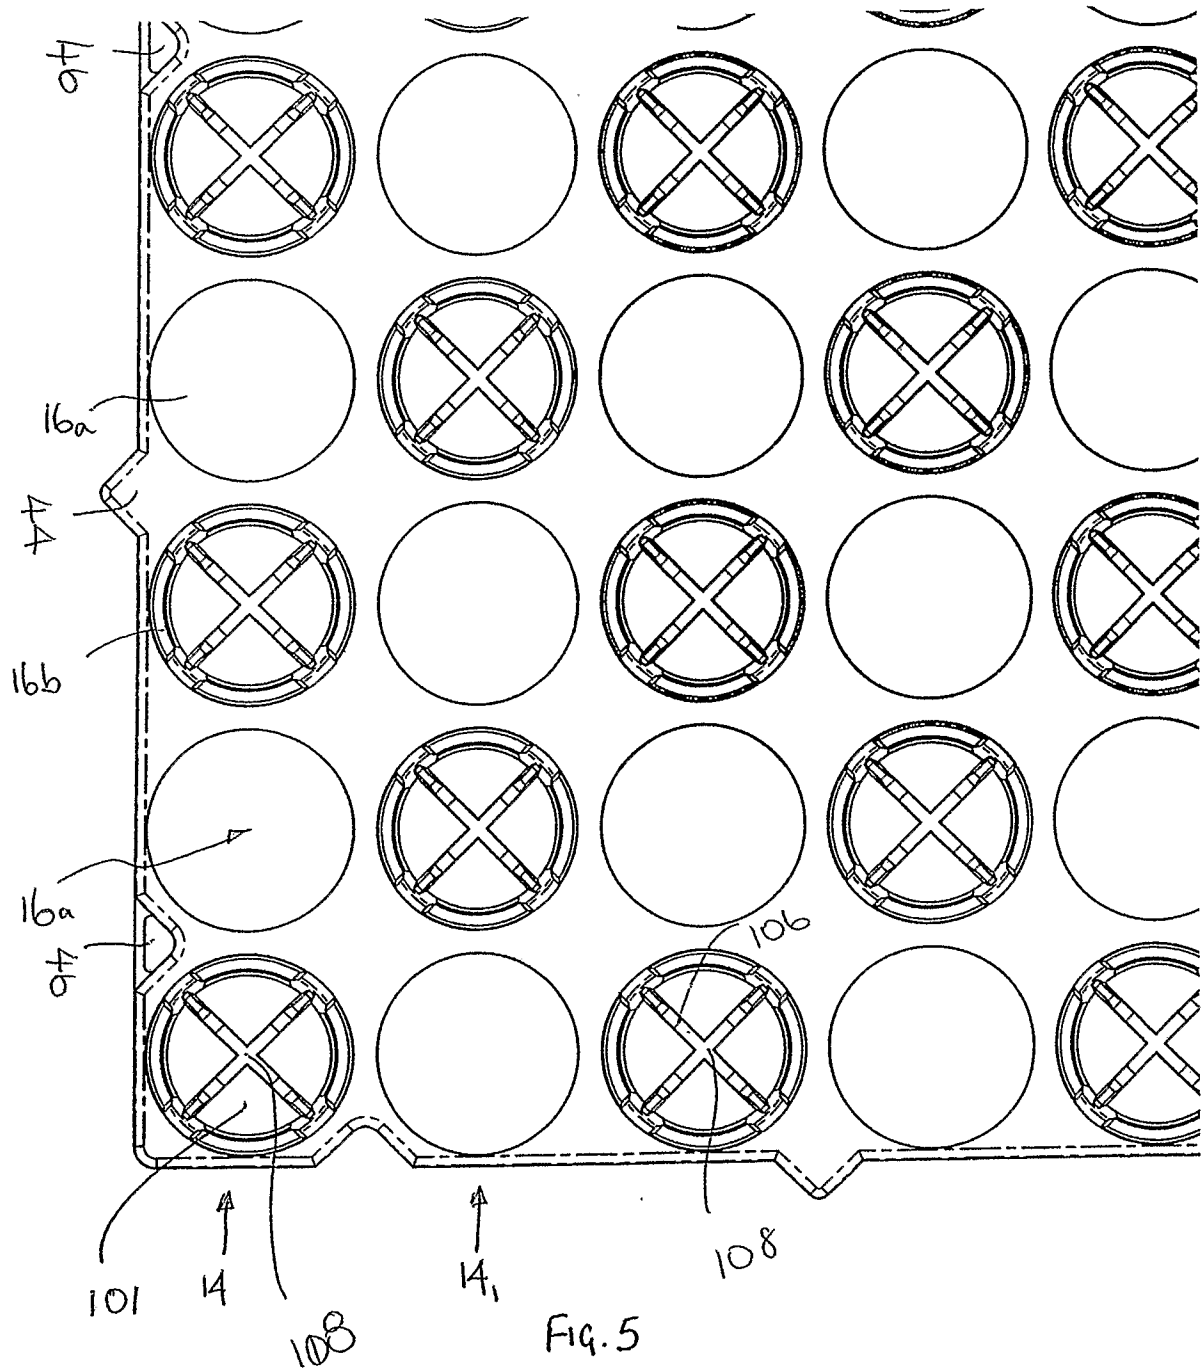


FIG. 4



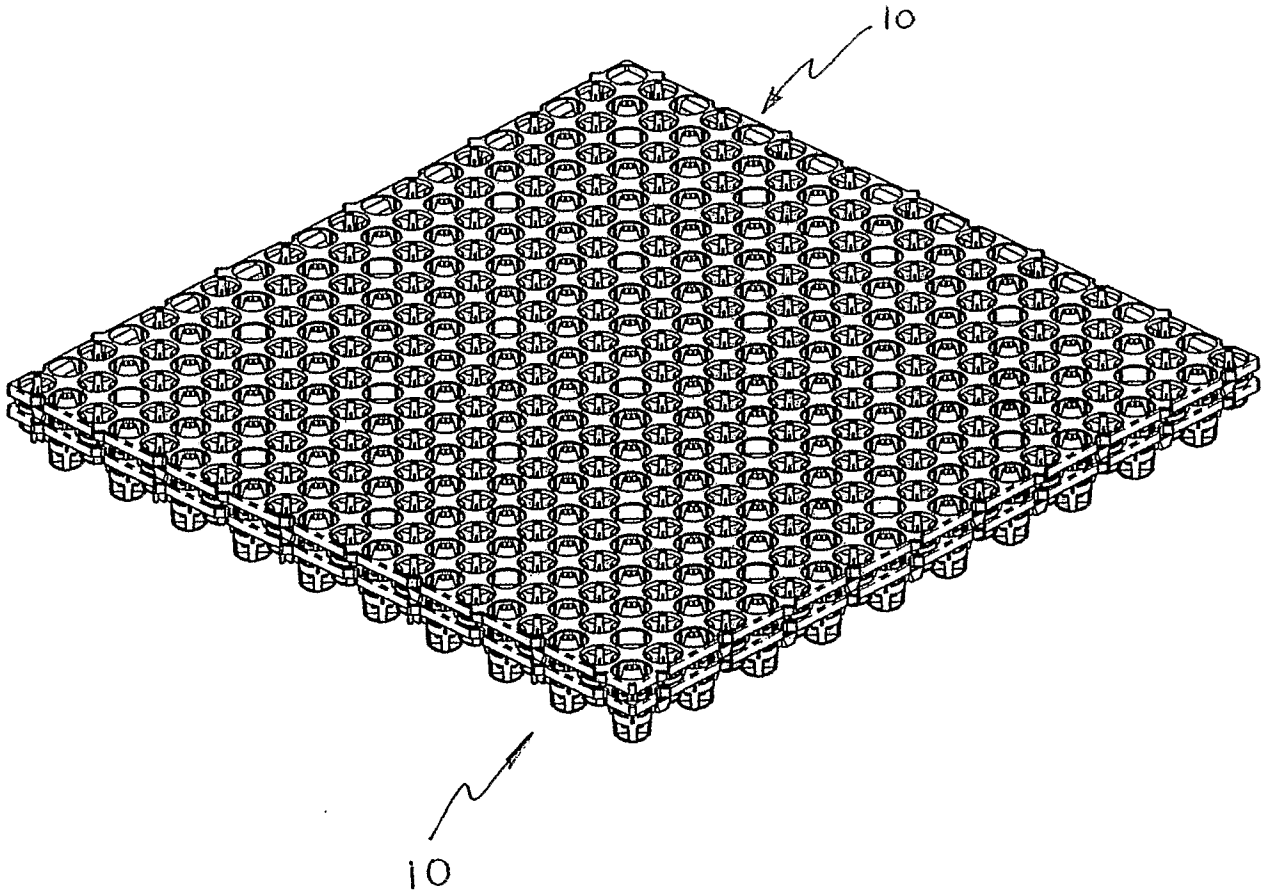


FIG. 6


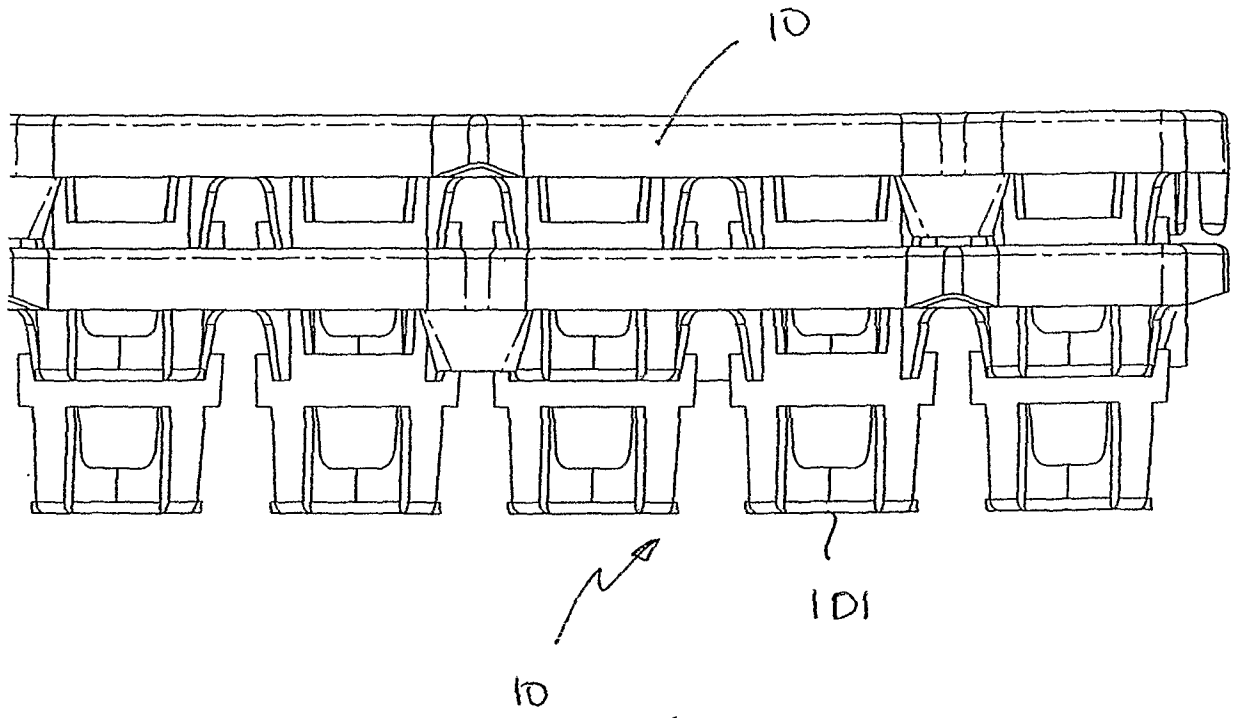


FIG. 7

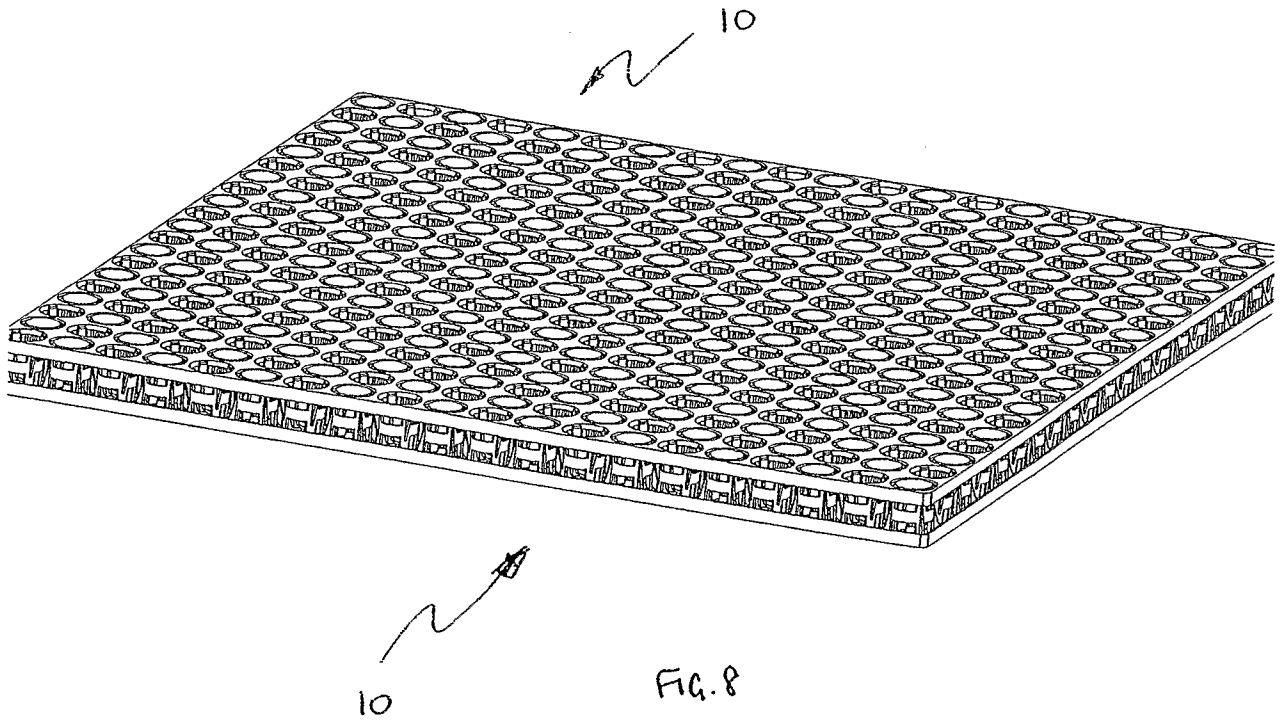

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2009/000597

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl.Int. - Cl. <i>A01G 9/10</i> (2006.01) <i>E02B 11/00</i> (2006.01) <i>E02D 17/20</i> (2006.01) <i>E02B 13/00</i> (2006.01) <i>E03F 1/00</i> (2006.01)					
According to International Patent Classification (IPC) or to both national classification and IPC					
B. FIELDS SEARCHED					
Minimum documentation searched (classification system followed by classification symbols)					
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched					
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPODOC, WPI: CELL+, GRID+, DRAIN+, CLEAR+, SEEP+, DRIP+, APERTURE, SIDEWALLS					
C. DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
X	WO 2001/053608 A1 (ELMICH AUSTRALIA PTY LTD) 26 July 2001 (See page 5, lines 5-30 & fig.9)	1-6, 8-10, 15-17			
A	US6266921 B1 (KESKILOHKO) 31 July 2001 (See Entire Document)	1-18			
A	US2006/0120804 A1 (BLACKWOOD et al.) 8 June 2006 (See Entire Document)	1-18			
A	US6095718 A (BOHNHOFF) 1 August 2000 (See Entire Document)	1-18			
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; border: none;"> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 33%; border: none;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> <td style="width: 33%; border: none;"></td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family				
Date of the actual completion of the international search 28 May 2009 28 July 2009		Date of mailing of the international search report 04 AUG 2009			
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustralia.gov.au Facsimile No. +61 2 6283 7999		Authorized officer VARUN MALIK AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No : +61 2 6283 2611			

INTERNATIONAL SEARCH REPORT

International application No.

Information on patent family members

PCT/AU2009/000597

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report	Patent Family Member		
WO 0153608	AU 24935/01	EP 1280965	GB 2374268
	HK 1050922	US 6736569	US 2003118404
US 6266921	AU 42411/99	CA 2279010	FI 981684
	NZ 336935	SE 9902689	
US 2006120804	US 7201538	US 7290958	US 7503726
	US 2006120803	US 2008056824	US 2009169303
US 6095718	AU 61494/98	CA 2286336	CA 2531826
	EP 0966571	IL 131311	NZ 337533
	US 5848856	US 6450731	WO 9835106

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

END OF ANNEX