



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 468 959 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
20.10.2004 Bulletin 2004/43

(51) Int Cl.7: **B67C 7/00**

(21) Application number: **04005910.7**

(22) Date of filing: **22.04.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **Tomba, Franco**
37016 Garda (IT)

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
02008930.6 / 1 357 081

(71) Applicant: **Krones AG**
93073 Neutraubling (DE)

Remarks:

This application was filed on 12 - 03 - 2004 as a
divisional application to the application mentioned
under INID code 62.

(54) **Aseptic filling machine**

(57) The invention described in this paper introduces a new aseptic packing technology for plastic bottles made of PET, PE, PEHD, polypropylene or other hygienically compatible plastics. In order to apply this technology to aseptic product packing lines, a special system configuration of the product packing machine is required: an aseptic room is to be created inside the machine, where sterile air constantly flows into. Its structure consists of one stationary section and one rotating section whose special configurations create a volume where the bottle filling process takes place.

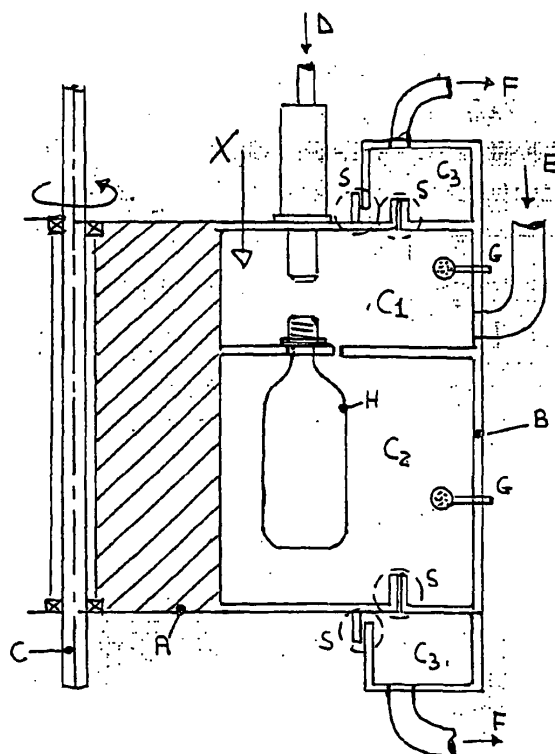


Fig. 1

EP 1 468 959 A2

Description

[0001] This invention introduces a new aseptic filling technology for plastic bottles made of PET, PE, PEHD, polypropylene or other hygienically compatible plastics, which is applied to aseptic product packing machines with a rotary or carousel-based concept. Aseptic product packing in plastic bottles is a fairly recent technology. It has developed in the last years especially for products like fruit juices, tea, soft drinks, milk and its byproducts, going hand in hand with companies offering their new technological solutions for this field and, of course, with the market's interest for them to be applied. This kind of packing is a complex technology, which implies several stages and depends on the type, shape and condition of the original bottle, as well as on the product itself. It requires interventions by machine operators to be reduced to the lowest possible degree and to be carried out under the safest conditions in order to preclude the possibility of contamination of the machine, in particular of its internal microclimate and, as a consequence, of the product.

[0002] There are basically two main families of bottles which can serve this packing purpose:

- a) bottles produced by means of the blow-extrusion process from virgin resins (polyethylene - polypropylene family);
- b) bottles produced by means of the blowing process from a preform produced per injection (PET family).

[0003] Bottles belonging to the first group can be produced aseptically (i.e. completely closed) or else not hermetically (their inner part is open to the surrounding air). PET bottles are produced from preforms that are open to the ambient air, and therefore they are always blown under non-sterile conditions. In both cases, the bottles can be either produced at the product packing factory or bought from a specialized producer, who will deliver them arranged on pallets or in bulk within proper containers. Regardless of their delivery format, however, all bottles destined to aseptic packing undergo one of two different procedures, depending on their production:

Procedure no. 1: non-aseptically produced bottles (all bottles described under "b") and non-hermetic bottles (described under "a"):

1. The bottles are fed into the packing machine on a pneumatic or chain conveyance system.
2. The bottles enter the first section, where their inner and outer surfaces undergo chemical sterilization by use of chemical agents like hydrogen peroxide (peroxide), combinations of media based on peracetic acid and peroxide (oxonia) or similar media.

3. The bottles are introduced into the bottle drying section: here all traces of chemical agents are removed by a sterile water stream (or sterile air only, if the sterilization has been carried out using only peroxide).

4. After their treatment and sterilization, the bottles enter the aseptic filling section: here they are filled with a preset quantity of product through special dosing nozzles. In order to control this process, a volumetric or a weight-measuring system is used, i.e. by flow-meters, pre-calibrated chambers or weighting cells.

5. The bottles enter the closing section and are closed with pre-sterilized plastic caps or sterilized pre-cut aluminium foils. 6. Now the bottles leave the aseptic product packing machine and enter the packaging and post-packaging sections on conveyors: when the labelling and final packaging processes are over, they are palletized.

Procedure no. 2) aseptically produced bottles (described under "a") by means of the aseptic extrusion process:

In this case there is no need for sterilization. The extrusion process guarantees that the bottles' inner surfaces are already sterile. As a consequence the cycle is different.

1. The bottles are fed into a section where only their external surface is washed and sterilized.

2. The bottles enter a cutting section: here the plastic part which preserved their closed condition (and at the same time their above mentioned sterility) is cut away.

3. The bottles enter the aseptic filling section: here they are filled with a preset quantity of product through special dosing nozzles. In order to control this process, a volumetric or a weight-measuring system is used, i.e. by flow-meters, pre-calibrated chambers or weighting cells.

4. The bottles enter the closing section and are closed with pre-sterilized plastic caps or sterilized pre-cut aluminium foils

5. Now the bottles leave the aseptic product packing machine and enter the packaging and post-packaging sections on conveyors: when the labelling and final packaging processes are over, they are palletized.

[0004] In both cases it is necessary to preserve the aseptic condition in the whole inner part of the product packing machine: if the microclimate is not perfectly sterile, the bottle and/or its content might be contaminated. It is also to be considered that a machine cannot always work optimally and that bottles do not always comply with perfect standards. As a consequence,

sometimes it happens that a stuck bottle blocks the operating cycle of the machine. It is therefore necessary for the machine operator to intervene and remove the stuck bottle and/or the machine's block: in order to do so, the machine operator has to work within the machine's microclimate and, consequently, there is a risk of contamination from the outside environment.

When an intervention is needed, traditional technology offers two solutions, the one deriving actually from the other.

[0005] First solution - The whole machine is positioned inside a cleanroom, where sterile air (filtered in Class 1000 or Class 100) flows into; a slight overpressure is to be found in this environment. The machine operator wearing a sterilized overall, facial mask, gloves and all pre-sterilized accessories controls the machine functioning from inside the cleanroom and directly intervenes to solve the problem. The machine operator is part of the microclimate and integrates the operational cycle of the machine.

[0006] Second solution - Proper laminar flows are generated in order to protect each machine's section (mini-cleanrooms in each section) enclosed by an upper wall (purposely built to support the filters), a lower wall (machine base) and a rigid side wall (sheet steel and/or glass) or alternatively a flexible side wall (transparent plastic material for the food industry). In this case the machine operator can intervene from outside, working on the machine through openings dislocated in strategically optimal positions in the side walls, his arms covered by long flexible gloves ("sleeves"): they are fixed to the openings and thus always inside the aseptic environment, therefore a part of the internal microclimate. Although they cannot be contaminated from outside, they restrict intervention possibilities for the machine operator.

[0007] In both solutions it is therefore assumed that a condition of laminar flow and air sterility is maintained inside the machine as a whole, also in the event of an interruption or stop of the production process. Both sterility and microclimate have to be continuously preserved all round the clock, with no interruption - otherwise it will be necessary to sterilize the whole environment once again, a complex procedure requiring a long treating time (even 48-60 hours) before all surfaces and filters are brought back to their safety conditions.

[0008] Situations of this kind occur anyway in the event of major maintenance works on the machine, when the use of the "sleeves" is not sufficient to carry out the operation, in the event of a sudden break with leaking of product and/or oil or other fluids due to a mistake made by the operator.

[0009] It should be highlighted that the most critical sections in the machine are the dosing and cap application sections, where both the bottle and the product are most exposed to possible environmental contamination. In the sterilization section, instead, the chemical agents' vapours protect the microclimate against bacte-

ria possibly coming from outside. The first two sections are also more frequently subject to intervention by the machine operator, for instance in case of wrong measuring up of the product, loss of closures or aluminium caps, stuck bottles and caps and so on. A wrong intervention in this area determines severe problems and may make it necessary to carry out a new sanitization cycle of the whole machine.

[0010] This invention aims at creating a protection room for the dosing and cap application area that facilitates interventions by the machine operator, ensuring highest sterility and aseptic conditions at the same time, and reducing the need for intervention from outside - but above all also making it possible to clean and sterilize the machine in its dosing and cap application sections with chemical cleaning and sterilization solutions every time that the machine is to be prepared for production. In other words, the filling and closing room is regularly sterilized by means of traditional methods every time that the cleaning and sterilization phases of the main dosing unit and of the dosing nozzles are started. This ensures that the most critical environment is completely sanitized at every production start.

As a second benefit, this invention enables the operator to have direct access to stuck bottles through passages purposely planned in the room: wearing only a protective glove, he will be able to extract the bottle/cap without contaminating the environment.

A third benefit given by this invention is the stationary part of the room, that makes it possible to create a safe and rigid connection between the room and the sterile air generation system, as well as the cleaning solution infeed and recovery systems. This concept makes the room independent of the other sections of the machine as a whole.

Description of the invention

[0011] The invention is the special configuration of the enclosing room containing the dosing and cap application sections, which can be applied to any machine with a rotary or carousel-based concept for bottling products destined to the food industry and/or to the chemical and pharmaceutical industry. It is made of two sections and a series of accessories: the room contains two smaller rooms, the first protecting the filling and cap application area, the second enclosing the bottle's body. This concept may include two additional rooms to enable sterile air to be taken in.

Please see the drawing.

[0012] Explanation of the room's main parts:

- A) Rotating part of the room (supporting the bottle, dosing devices and closers)
- B) Stationary part of the room (supporting the infeed of the utilities)

- C) Axis of rotation
- D) Product dosing device or closer (depending on the section in which it is positioned)
- E) Infeed of sterile air under pressure into the room
- F) Extraction of sterile air from the room
- G) Spray balls and sanitizer infeed
- H) PE or PET bottle with neck-handling
- S) Sliding sealing surfaces and/or labyrinth seals

Room's sections:

[0013]

- C1: Packing and closing area
- C2: Bottle's body enclosing area
- C3: Sterile air intake area

Description of the sections:

[0014]

C1: upper room, consisting of

1. one section (built on the rotating part) obtained on the moving part of the filler and consisting of:

- an upper side, i.e. a plate thick enough to support the dosing system, comprising a certain number of dosing nozzles and the sealing/closing heads;
- a vertical side as an enclosure for the room and its microclimate;
- a lower side where the neck-handling clamp devices are to be found. The space left between each clamp device can be closed using sheet steel or plastic material.

2. one stationary section closing the room by means of proper sliding surfaces (S), and a second horizontal surface closing the room at the same level with the clamp devices supporting the bottles, in order to guarantee the maintenance of the inner overpressure; the inner volume is kept to a minimum, just enabling the upper part of the bottle's neck to pass.

C2: lower room, consisting of:

- an upper side, comprising the (rotating) clamp devices supporting the bottles and the fixed plate at the same level (fixed);
- a vertical side (rotating, obtained on the moving part of the closer) as an enclosure for the room and its microclimate;
- a lower side consisting of one rotating surface and one stationary surface, built in order to sup-

port a sliding surface or a labyrinth surface for sterile air containment;

and equipped with suitable openings (closed by doors or similar closure devices) for making it possible to reach stuck bottles and/or wrongly positioned closures and caps.

C3: compensation rooms:

rooms for the intake of sterile air consisting of a room created between the stationary part and the rotating part by means of two sliding surfaces; they enable the sterile air to be taken in from the main rooms C1 and C2 and to better control the pressure level in the sections.

[0015] While the upper room (C1) is absolutely essential, the lower room (C2) and the other rooms (C3) are useful but not strictly necessary, as the internal microclimate is maintained by the internal room with proper overpressure.

[0016] Accessories inside rooms C1 and C2: these are pipe circuits, valves and instruments (letters E, F and G) used for feeding the cleaning and sterilization solutions during the machine's preparation stages and for feeding and maintaining the room under sterile air overpressure conditions during all production phases. For reasons of structural and functional simplicity, these circuits are connected to the stationary part.

[0017] This invention aims at obtaining an easier and safer process of aseptic filling for plastic bottles, regardless of their specific material, without using standard traditional cleanrooms or else laminar flows, but by making use of a room enclosing the critical area and consisting of two sections; both sections are purposely developed in order to best serve their functional purpose, minimizing the sterile room's volume, that is to say reducing it to the critical area comprising the bottle's neck and the lower part of the nozzles and of the closer.

This is certainly an innovative solution: besides the advantages presented above, this invention also makes it possible to intervene directly on all mechanical parts of the machine without altering the microclimate in the filling area; thanks to this solution, any intervention becomes simpler and safer. Further benefits come from the new sterile air distribution: sterile air is no more top-down distributed only through the filters, but it is now fed through apposite pipes and circuits, resulting in a better flow distribution and a more accurate control of the positive pressure, and offering better guarantees in terms of functionality.

[0018] An embodiment of the aseptic filling machine is suitable, especially for plastic bottles, and comprises a carousel and an enclosing room apt to protect the product dosing and/or bottles closing, consisting of two main rooms C1, C3 each of them comprising a stationary part, a rotating part and accessories which make it possible to maintain an aseptic condition in the enclos-

ing room, wherein at least one room C3 is provided for the purpose of intaking the sterile air flow coming out of the main room C1.

[0019] In a second embodiment, the volume of the upper room C1 is kept to a minimum, that is to say to the volume existing between the dosing nozzles/closing heads and bottle's neck.

[0020] In a third embodiment, the sealing between the stationary and the rotating surfaces is guaranteed by suitable sliding surfaces and/or labyrinth surfaces for sterile use in order to enclose the inner microclimate.

[0021] In a fourth embodiment, the upper surface of the main room C1 consists of the plate supporting the dosing nozzles/closing heads, and where the lower surface consists of the plate supporting the bottle neck handling clamp devices and of a sealing surface with suitable sliding points for guaranteeing tightness for the maintenance of the inner pressure.

[0022] In a fifth embodiment, the upper surface of the main room C2 consists of the plate supporting the bottle neck handling clamp devices and of a fixed surface, and where the lower surface consists of a stationary plate and of a rotating plate with suitable points for guaranteeing tightness for the maintenance of inner pressure.

[0023] In a sixth embodiment at least one room C3 is provided for the purpose of taking the sterile air flow coming out of the other main room C2.

[0024] In a seventh embodiment, sterile air is fed into the room through proper pipelines.

[0025] In an eighth embodiment, the room can be cleaned and sterilized through proper pipelines, independently of the machine and without any human intervention, using traditional chemical agents

[0026] In a ninth embodiment, suitable nozzles for dosing/vaporizing chemical agents on the room's surfaces can be installed in the inside without any prejudice to the room's sterile conditions.

[0027] In a tenth embodiment, the fixed enclosing wall is made of rigid plastic material or, alternatively, of flexible plastic material.

[0028] In an eleventh embodiment, where the described room is used also in the bottles' sterilization and rinsing phases.

[0029] In a twelfth embodiment, where the concept may not include the rooms defined as C3, as the sterile air pressure and internal microclimate can be maintained also by the main rooms C1 and C2 only.

[0030] In a thirteenth embodiment, the concept may not include the room defined as C2, as the sterile air pressure inside the room C1 can be maintained also without the room C2.

[0031] In a fourteenth embodiment, where the two main rooms C1, C2 comprise accessories to sanitize it using sterilizing agents when the machine undergoes its preparation phases.

Claims

1. Aseptic filling machine, especially for plastic bottles, comprising dosing nozzles and/or closing heads (D), a carousel and an enclosing room apt to protect the product dosing and/or bottles closing, consisting of a first and a second room (C1, C3) each of them comprising a stationary part, a rotating part and accessories which make it possible to maintain an aseptic condition in the enclosing room, **characterized in that** the second room (C3) is provided for the purpose of intaking the sterile air flow coming out of the first room (C1).
2. Aseptic filling machine according to claim 1, wherein the volume of the first room (C1) is kept to the volume existing between the dosing nozzles and/or closing heads (D) and the bottle's neck.
3. Aseptic filling machine according to claims 1 or 2, wherein a sealing between surfaces of the stationary and the rotating part is guaranteed by suitable sliding surfaces of the stationary and the rotating part and/or labyrinth surfaces of the stationary and the rotating part for sterile use.
4. Aseptic filling machine according to any of claims 1 to 3, wherein the upper surface of the first room (C1) consists of the plate supporting the dosing nozzles and/or closing heads (D), and where the lower surface of the first room (C1) consists of the plate supporting the bottle neck handling clamp devices.
5. Aseptic filling machine according to any of claims 1 to 4, wherein an upper surface of another room (C2) consists of a plate supporting the bottle neck handling clamp devices and of a fixed surface, and where the lower surface of the other room (C2) consists of a stationary plate and of a rotating plate.
6. Aseptic filling machine according to claim 5, wherein at least one room (C3) is provided for the purpose of intaking the sterile air flow coming out of the other room (C2).
7. Aseptic filling machine according to claims 1 to 6, wherein proper pipelines are provided for feeding sterile air into the enclosing room.
8. Aseptic filling machine according to claims 1 to 7, wherein the first room (C1) can be cleaned and sterilized through proper pipelines, independently of the machine and without any human intervention, using traditional chemical agents.
9. Aseptic filling machine according to claims 1 to 8, wherein suitable nozzles for dosing/vaporizing

chemical agents on the first room's (C1) surfaces can be installed in the inside without any prejudice to the first room's (C1) sterile conditions.

10. Aseptic filling machine according to claims 1 to 9, wherein the stationary part is made of rigid plastic material or, alternatively, of flexible plastic material. 5
11. Aseptic filling machine according to claims 1 to 10, wherein the enclosing room is suitable for use in the bottles' sterilization and rinsing phases. 10
12. Aseptic filling machine according to any of claims 1 to 11, wherein the first and the other room (C1, C2) comprise accessories to sanitize it using sterilizing agents when the machine undergoes its preparation phases. 15

20

25

30

35

40

45

50

55

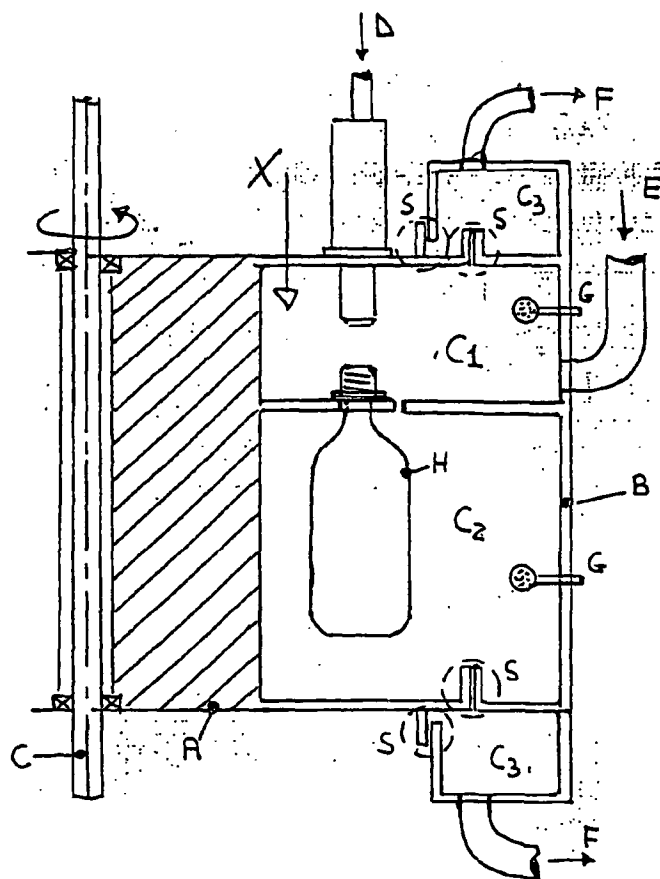


Fig. 1

view X

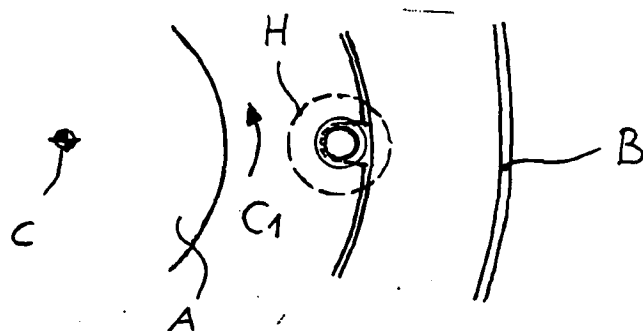


Fig. 2