



(11) (21) (C) **2,026,087**
(22) 1990/09/24
(43) 1991/06/08
(45) 2000/05/02

(72) Wölfelschneider, Lothar, DE


(73) VDO Luftfahrtgeräte Werk GmbH, DE

(51) Int.Cl.⁵ H05B 41/46

(30) 1989/12/07 (P 39 40 506.0) DE

(54) **DISPOSITIF D'ÉCLAIRAGE A DEUX LAMPES IDENTIQUES
CONNECTÉES EN PARALLELE**

(54) **ILLUMINATING DEVICE, HAVING TWO IDENTICAL LAMPS
CONNECTED IN PARALLEL**

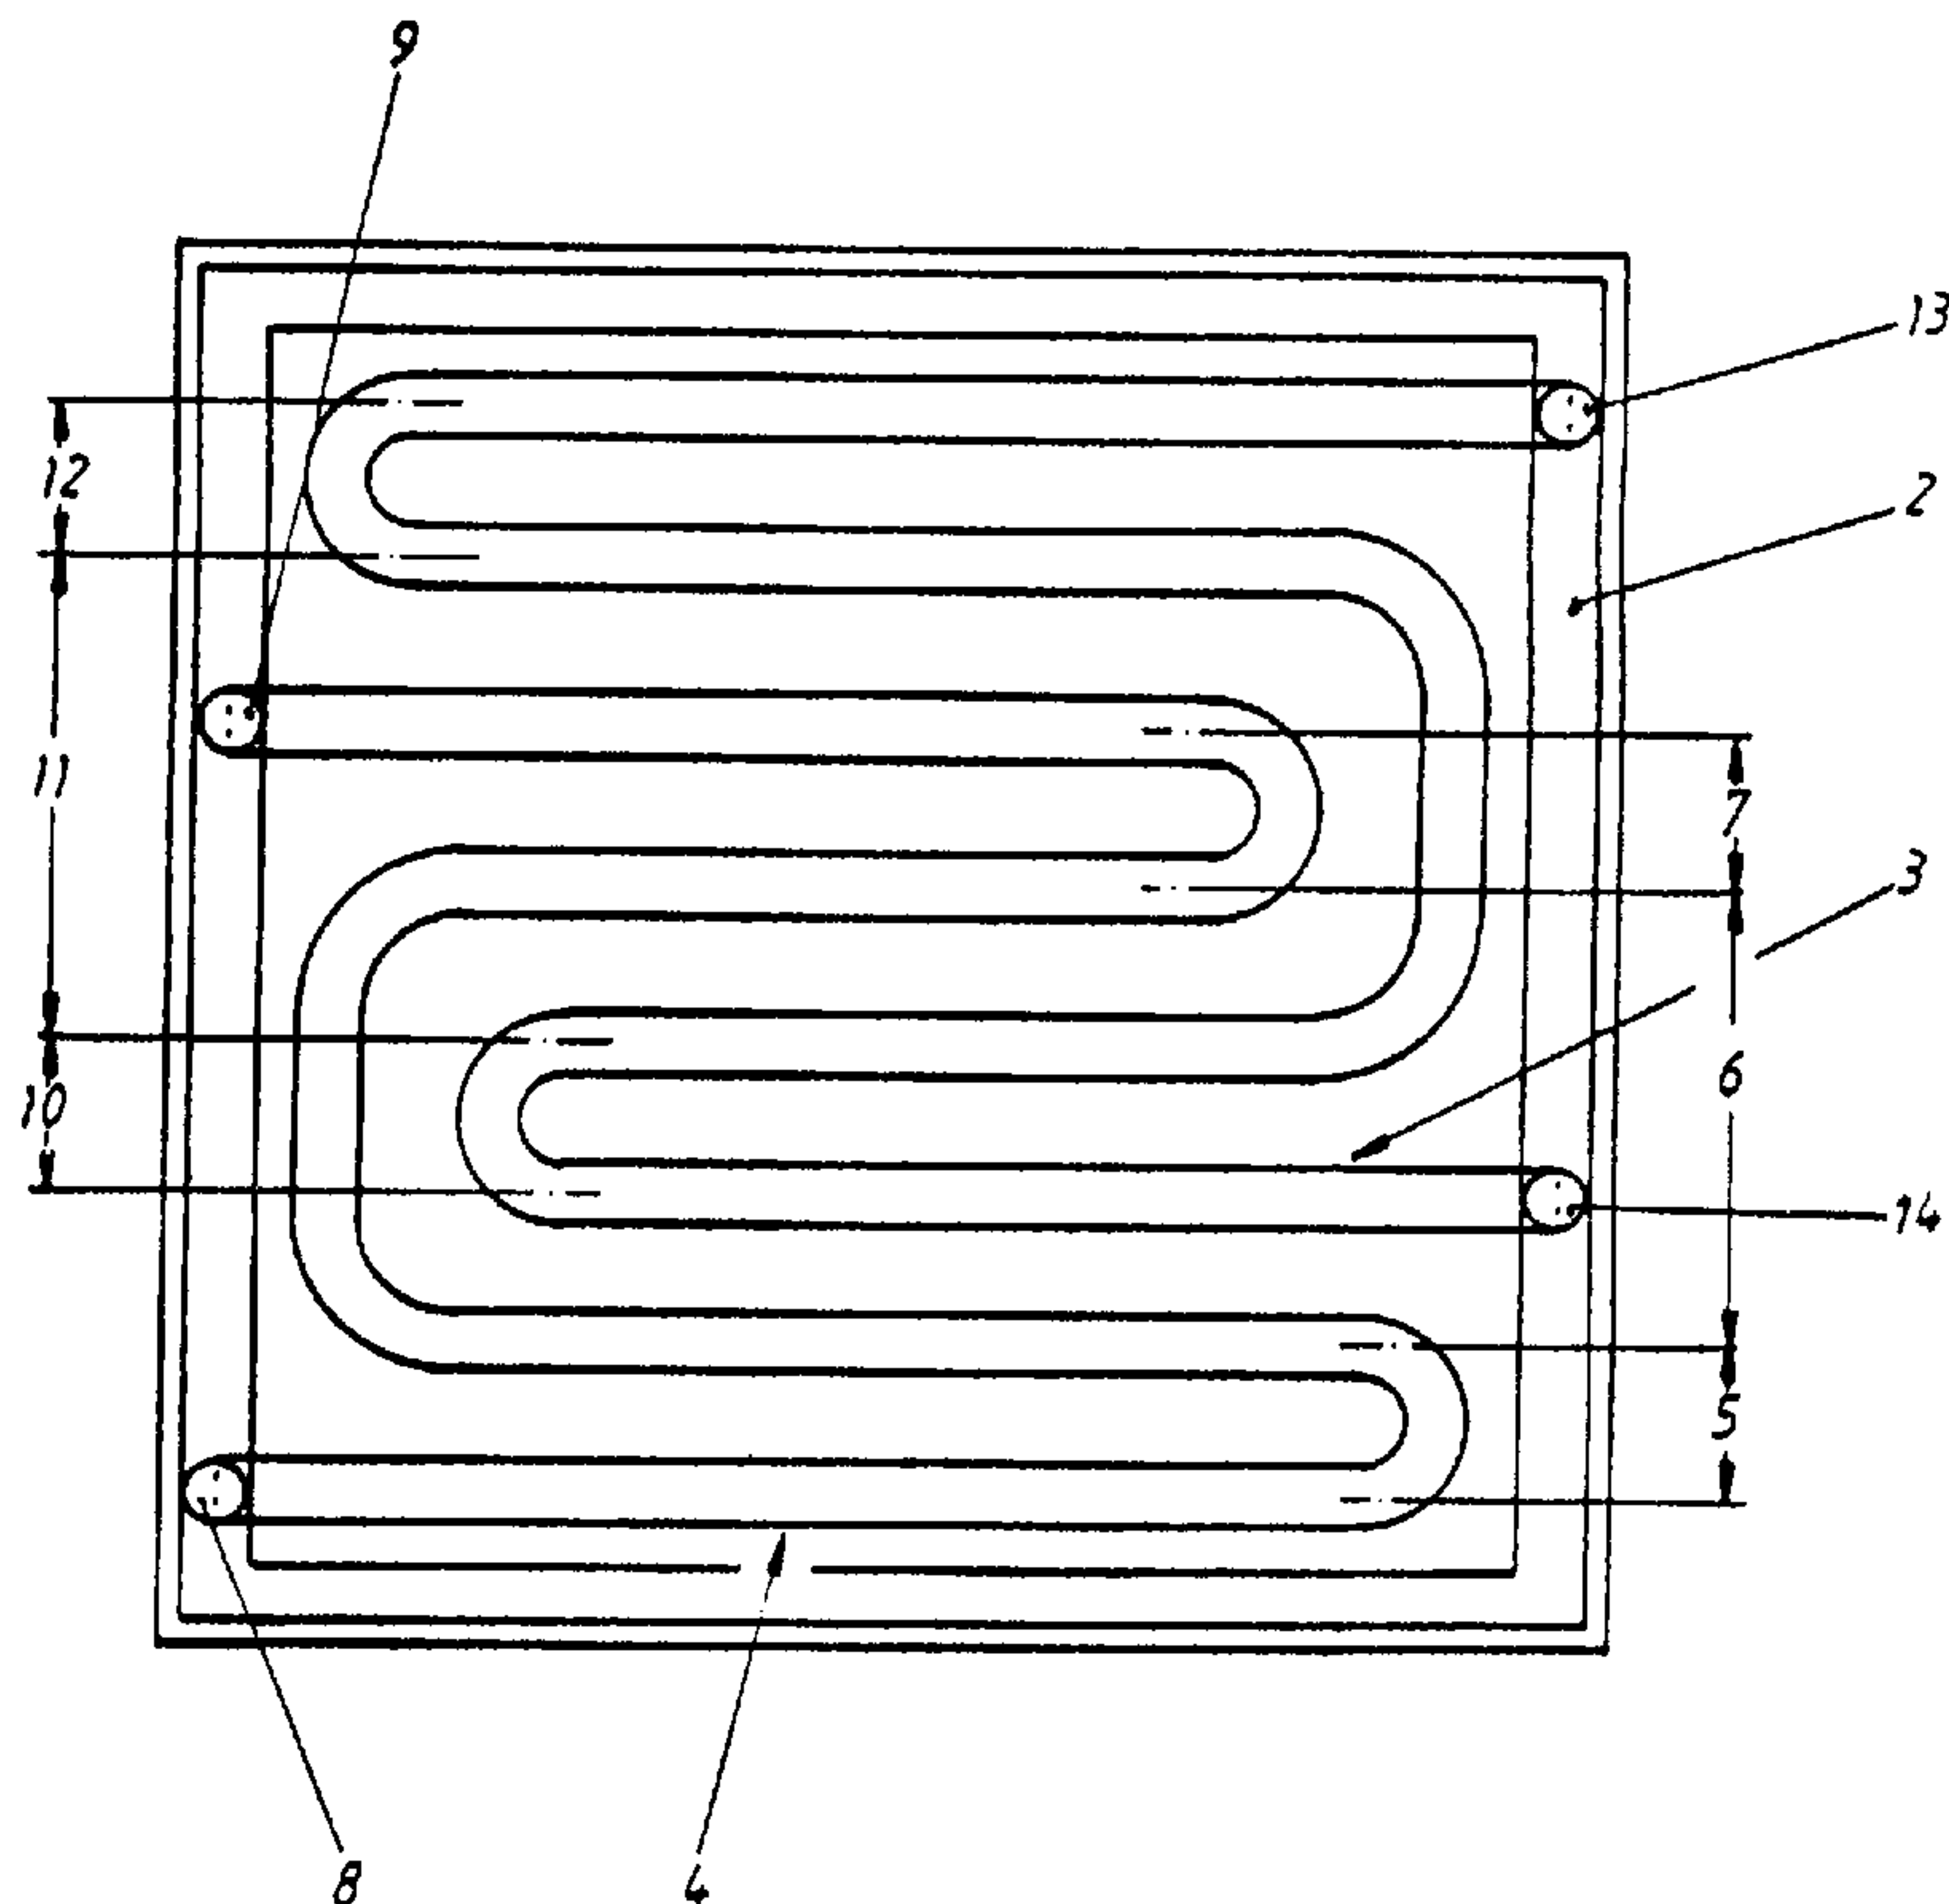

(57) An illuminating device has two lamps (3, 4) developed as discharge tubes which have a serpentine course and are nested in each other by, in each case, a narrow U-shaped region (7, 10) and a wide U-shaped region (11, 6). In this way both lamps (3, 4) can be of identical development and permit uniform illumination of a rectangular liquid crystal cell even upon failure of one lamp (3 or 4).

ILLUMINATING DEVICE HAVING TWO IDENTICAL LAMPS
CONNECTED IN PARALLEL

ABSTRACT OF THE DISCLOSURE

An illuminating device has two lamps (3, 4) developed as discharge tubes which have a serpentine course and are nested in each other by, in each case, a narrow U-shaped region (7, 10) and a wide U-shaped region (11, 6). In this way both lamps (3, 4) can be of identical development and permit uniform illumination of a rectangular liquid crystal cell even upon failure of one lamp (3 or 4).

2026087

ILLUMINATING DEVICE, HAVING TWO IDENTICAL LAMPS
CONNECTED IN PARALLEL

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to an illuminating device for rectangular surface, which device, has two identical lamps connected electrically in parallel, in particular for illuminating a liquid crystal cell from the rear.

Such illuminating devices are customary for indicating instruments in automotive vehicles and are therefore known.

The two lamps, provided for reasons of redundancy should be as identical as possible because of considerations of cost. Upon the failure of one lamp the illuminated surface should still be easily illuminated as uniformly as possible so that the indicating instrument can still be read well. In order to save energy, to be able to operate with lamps which are as weak as possible and to make the illuminating device as compact as possible, they must be arranged relatively close to the surface to be illuminated. In the previously known illuminating device, this necessarily leads to the result that upon failure of a lamp the illumination of the surface is relatively non-uniform.

SUMMARY OF THE INVENTION

It is desired so to develop an illuminating device of the aforementioned kind that, even in the event of the failure of one lamp, uniform illumination of the surface to be illuminated can still be obtained without the device becoming undesirably large and without need to use lamps of undesired brightness.

The invention provides an illuminating device for illuminating a rectangular surface, comprising two identical lamps connected electrically in parallel; means for positioning the lamps in nested arrangement wherein each lamp is developed as a gas-discharge tube of serpentine shape having at least one narrow U-shaped region and an adjoining wider U-shaped region; each lamp has its U-shaped regions nested with the U-shaped regions of the other lamp providing for engagement of the narrow U-shaped region of one lamp into the wider U-shaped region of the other lamp; and each of said lamps having, in sequential order, a first narrow U-shaped region, a wider U-shaped region and, adjoining same, a second narrow U-shaped region which is shorter than the first narrow U-shaped region.

By this internested arrangement of the lamp, a very uniform illumination of the surface to be illuminated can still be obtained even upon the failure of one lamp. Due to the fact that each lamp has a narrow U-shaped region and a wider U-shaped region, the lamps can be arranged nested in each other in a plane despite their identical configuration without regions of the two lamps having to cross each other.

BRIEF DESCRIPTION OF THE DRAWINGS

With the above and other advantages in view, the present invention will become more clearly understood in connection with the detailed description of a preferred embodiment when considered with the accompanying drawings, of which:

Figure 1 is a section through an illuminating device of the invention;

Figure 2 is a view of the rear side of the illuminating device of Figure 1; and

Figure 3 is an electrical schematic of the device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 shows a liquid crystal cell 1 behind which a lightbox 2, shown open on its rear, is arranged. Two lamps 3, 4 developed as gas-discharge tubes are contained within and are positioned relative to each other by the lightbox 2.

The gas-discharge tubes of the lamps 3, 4 extend in serpentine shape, as shown in Figure 2. It can be noted that the lamp 4 has first of all a narrow U-shaped region 5, adjoining this a wider U-shaped region 6, and adjoining same again a narrower U-shaped region 7. This makes it possible to arrange the ends of the lamp 4 on a common side of the lightbox 2 so that the lamp 4 has terminals 8, 9 there.

The lamp 3 is of entirely identical shape to the lamp 4. A narrow U-shaped region 10 of the lamp 3 engages into the wider U-shaped region 6 of the other lamp 4, and a wider U-shaped region 11 of the lamp 3 is arranged over the narrow U-shaped region 7 of the lamp 4. By means of an adjoining narrow U-shaped region 12, the lamp 3 is able to have both its terminals 13, 14 disposed on the same side of the lightbox 2.

In order to achieve the result that the two gas-discharge tubes are always at the same distance from each other, the narrow U-shaped region 10 in the case of the lamp 3 is less deep than its first narrow U-shaped region 12. In corresponding fashion, the narrow U-shaped region 7 of the lamp 4 is less deep than its first U-shaped region 5.

It is clear that the pattern of the gas-discharge tubes consisting of a narrow U-shaped region and a wider U-shaped region can be repeated as many times as desired. In this way it is possible to illuminate a relatively large display surface.

One particular advantage of the illuminating device is that its structural depth can be kept very small.

The two lamps 3 and 4 are connected electrically in parallel to a source of electric power as shown in Fig. 3.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An illuminating device for illuminating a rectangular surface, comprising

two identical lamps connected electrically in parallel;
means for positioning the lamps in nested arrangement wherein each lamp is developed as a gas-discharge tube of serpentine shape having at least one narrow U-shaped region and an adjoining wider U-shaped region;

each lamp has its U-shaped regions nested with the U-shaped regions of the other lamp providing for engagement of the narrow U-shaped region of one lamp into the wider U-shaped region of the other lamp; and

each of said lamps having, in sequential order, a first narrow U-shaped region, a wider U-shaped region and, adjoining same, a second narrow U-shaped region which is shorter than the first narrow U-shaped region.
2. A liquid crystal cell assembly comprising

a liquid crystal cell;
a lightbox disposed behind the cell for directing light through the cell from a back surface of the cell toward a front surface of the cell.

two lamps disposed in the box in a coplanar arrangement for generating the light, each of said lamps having a serpentine

shape having U-shaped bends, wherein U-shaped bends of a first of the lamps nest between U-shaped bends of the second of the lamps;

each lamp is developed as a gas-discharge tube of serpentine shape having at least one narrow U-shaped region and an adjoining wider U-shaped region;

each lamp has its U-shaped regions nested with the U-shaped regions of the other lamp providing for engagement of the narrow U-shaped region of one lamp into the wider U-shaped region of the other lamp; and

each of said lamps has, in sequential order, a first narrow U-shaped region, a wider U-shaped region and, adjoining same, a second narrow U-shaped region which has a course which is shorter than the first narrow U-shaped region.

FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS

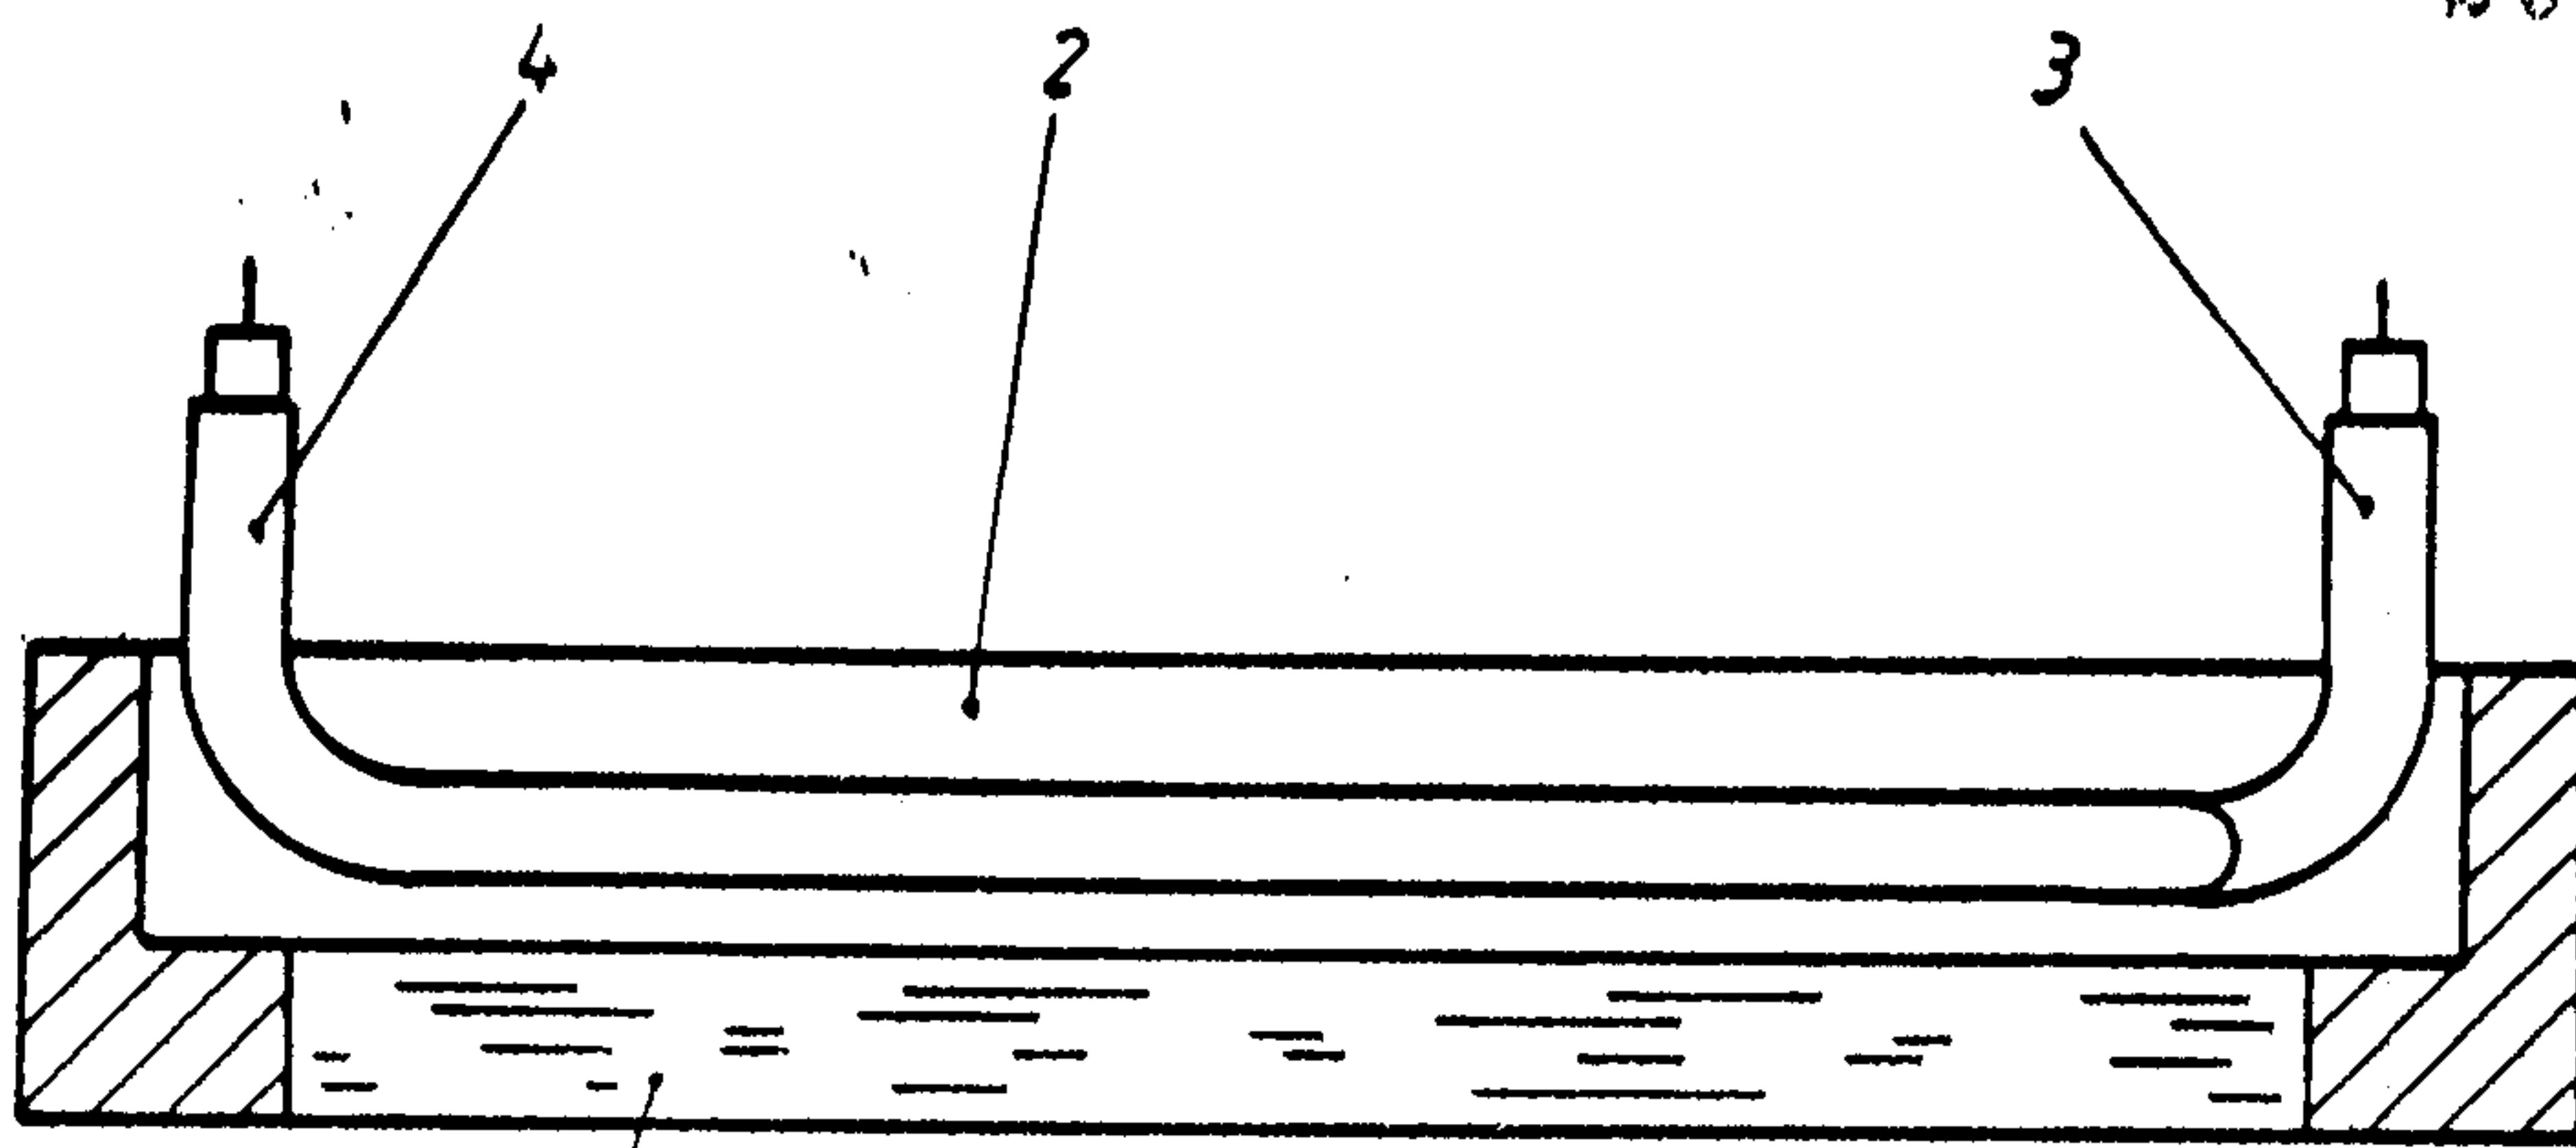


Fig. 1

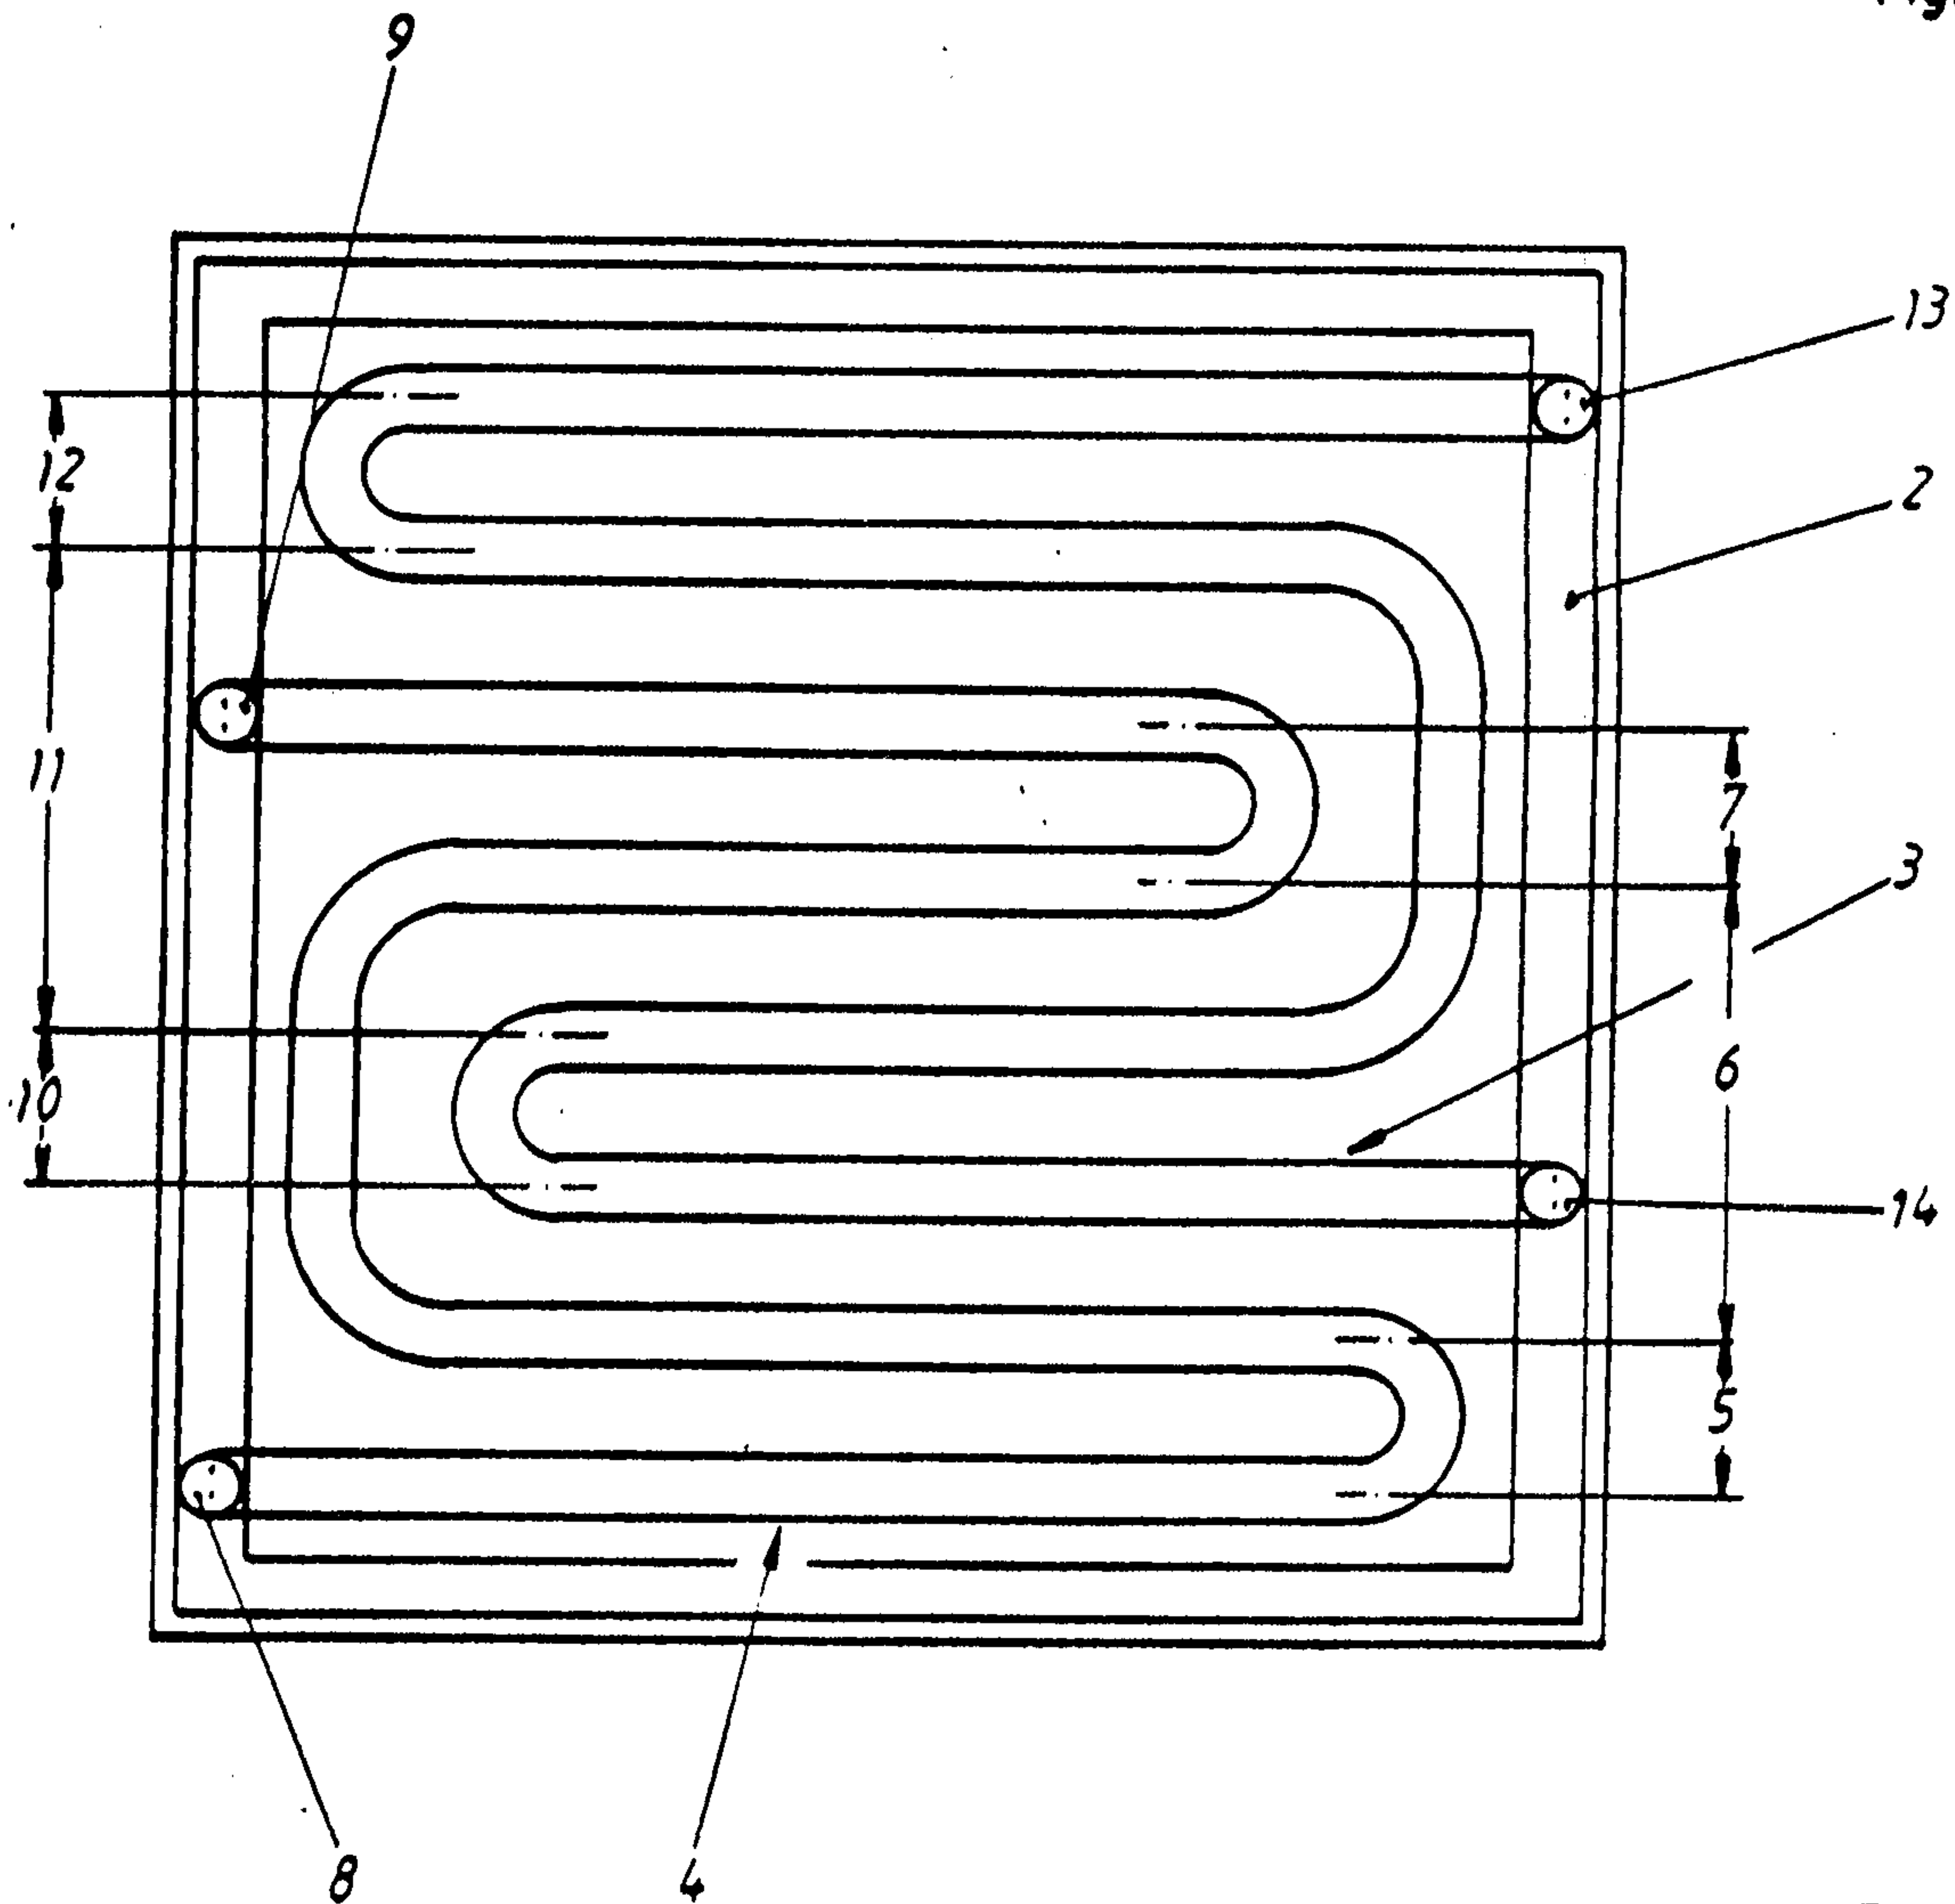


Fig. 2

Patent Agents
Fetherstonhaugh & Co.

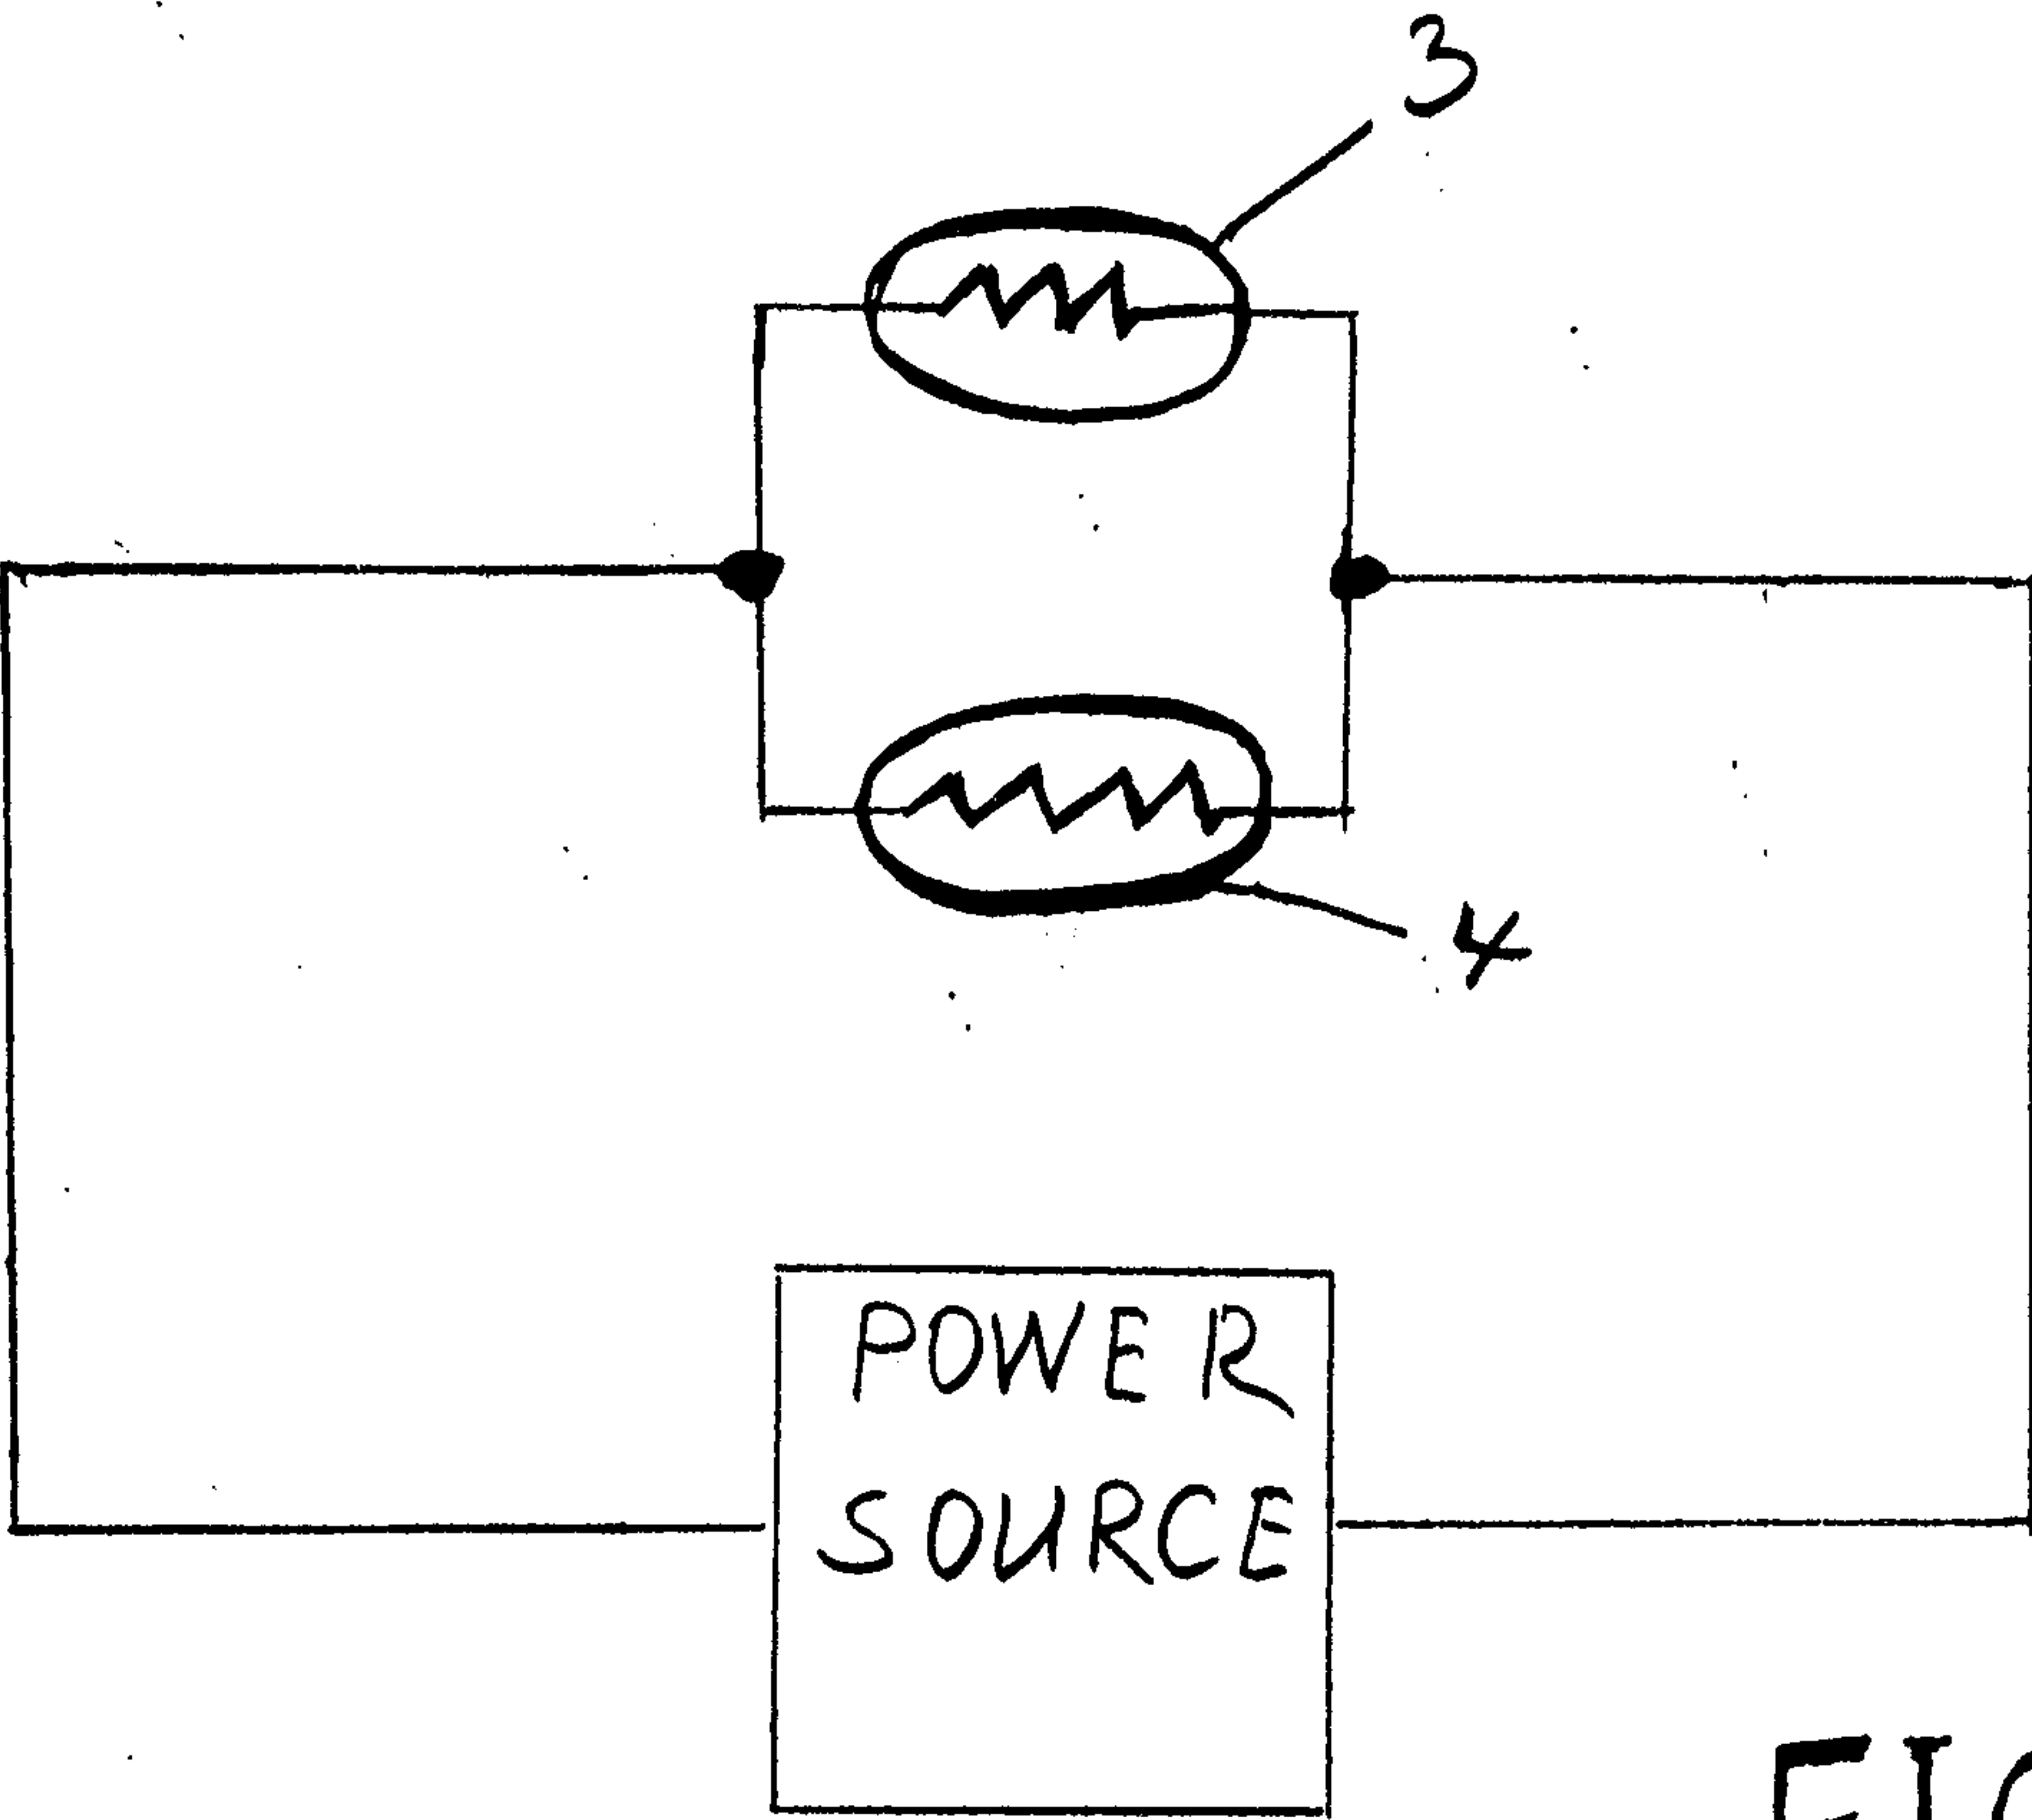


FIG. 3

*Patent Agents
Fetherstonhaugh & Co.*