

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number  
**WO 00/77941 A1**

(51) International Patent Classification<sup>7</sup>: **H04B 1/60 //**  
17/00

(21) International Application Number: PCT/SE00/00999

(22) International Filing Date: 18 May 2000 (18.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
9902212-1 11 June 1999 (11.06.1999) SE

(71) Applicant (for all designated States except US): **ALL-  
GON AB** [SE/SE]; Antennvägen 6, S-18780 Täby (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KEREK, Daniel**  
[SE/SE]; Vilans Väg 32, S-182 35 Danderyd (SE).

(74) Agent: **EHRNER & DELMAR PATENTBYRÅ AB**;  
Box 103 16, Gumshornsgatan 7, S-100 55 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH,

CN, CR, CU, CZ, CZ (utility model), DE, DE (utility  
model), DK, DK (utility model), DM, DZ, EE, EE (utility  
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility  
model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,  
SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ,  
UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- With international search report.
- Before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments.

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR STABILITY MARGIN DETERMINATION IN A REPEATER

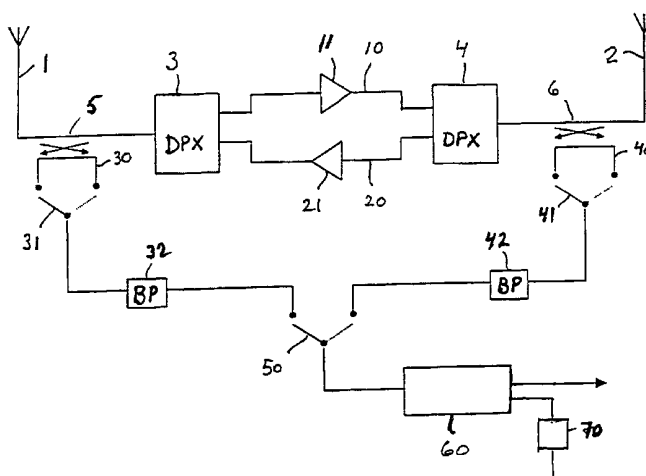

(57) Abstract: A method and device for determining the stability margin of a RF repeater. The method is carried out in two steps, viz. establishing the amplification of the repeater as a function of the frequency in a frequency band, and observing the magnitude of wave-like variations in the established frequency response, this magnitude constituting a measure of the stability margin such that an increasing magnitude corresponds to a decreasing stability margin.

WO 00/77941 A1

**Method and apparatus for stability margin determination in a repeater**

## FIELD OF THE INVENTION

5

The present invention relates to a method and apparatus for determining the stability margin, with respect to a possible self-oscillation, in a radio frequency repeater operating with a predetermined delay between an input and an output and having a feedback path between said output and said input. The invention also relates to a repeater system provided with such an apparatus.

15

Primarily, the invention concerns repeaters for use in cellular telecommunication systems, including two antennas and two sets amplifier chains for amplifying a signal from a base station (down-link) and a signal from a cellular mobile telephone (up-link), respectively. In such a system, the repeater receives, amplifies and retransmits signals between the base station and the mobile telephone in both directions. However, the invention can be applied also to repeaters with only one signal path.

25

More particularly, the invention deals with the problem of ensuring that the repeater does not reach a state of instability because of self-oscillation, which may happen when the gain becomes too high. Because of the inevitable feed back between the output and the input, the too strongly amplified output signal will be transferred back to the input and will be amplified over again so as to cause a self-oscillation in the system.

30

## BACKGROUND OF THE INVENTION - PRIOR ART

35

The problem of preventing self-oscillation and securing a sufficient margin to such an instability in repeaters is well-known to those skilled in the art. Normally, in order to solve

this problem, the input or output signal level (or power level) is monitored during operation of the repeater.

One way, see US-A-5,095,528 (Leslie), is to continuously measure the average output power of the repeater and to determine whether this power level exceeds a predetermined threshold value, in which case the amplifier gain of the repeater is drastically reduced so as to restore a stable state of operation.

Another way, which is especially useful in GSM systems operating with time slots, see WO 97/33381 (Allgon), is to measure the time proportion during which the power level of an input signal exceeds a certain threshold value, whereupon the amplifier gain is reduced in case this time proportion is relatively large, such as 90% or even larger. This method may be combined with a test whether the difference between the maximum and minimum values of the input signal level is less than a given value.

However, in both these known methods, like in all other methods being used in repeaters today, it is necessary to adjust the gain rather drastically in response to a detected rise of the signal level. Basically, this is because the criteria being used are met only when a state of instability is reached. Thus, in the known systems, it is not possible to obtain a quantified value of the stability margin as such. Therefore, it is difficult to provide a smooth control of the amplifier gain of the repeater.

#### SUMMARY OF THE INVENTION

Against this background, a main object of the present invention is to provide a method and an apparatus for determining the stability margin, with respect to a possible self-oscillation, in a repeater of the kind discussed above.

Another object is to provide a method which would enable a smooth control of the repeater without drastic changes of the amplifier gain. Accordingly, it should be possible to establish a quantified value of the stability margin as such.

5

These and other objects are achieved, according to the present invention, by taking two basic steps, viz.

- establishing the amplification of the repeater as a function of the frequency in a frequency band (which should be relatively wide), and
- observing the magnitude of wave-like variations in the established amplification as a function of the frequency, this magnitude constituting a measure of the stability margin such that an increasing magnitude corresponds to a decreasing stability margin.

10

15

In this way, it is possible to obtain a measure of the stability margin even when the system operates normally and is still stable. Consequently, any control measures can be taken already long before the system approaches a state of instability, and the control can therefore be performed smoothly, i.e. with relatively small adjustments of the amplifier gain of the system.

20

When using an appropriate control algorithm, the system can be retained in a stable state without self-oscillation.

The method can be carried out by means of a measurement receiver connected to the input and/or the output of the repeater by means of a directional coupler, preferably via a switch alternating between the input and the output.

30

Advantageously, in order to establish the amplification or frequency response in the particular frequency band, provided that the spectral properties of the input signal are known, it is sufficient to measure the output signal as a function of

35

the frequency. Then, the frequency response and the stability margin can be calculated.

5 The invention will be explained further below with reference to the appended drawings illustrating a repeater and a measurement receiver for determining the stability margin in accordance with the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10

Fig. 1 illustrates schematically a repeater for use in a cellular telephone system, and associated apparatus for measuring the stability margin of the system;

15

Figs. 2 and 3 are schematic representations of the repeater and the associated antennas as a simple feed back amplifier system;

20

Fig. 4 is a diagram representing the output power as a function of the frequency in a frequency band; and

25

Fig. 5 is a diagram representing the magnitude of the peak-to-peak variations (of the power or amplification shown in fig. 4) as a function of the stability margin of the repeater.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

30

The repeater illustrated in fig. 1 is of the kind generally used in cellular telephone systems, e.g as described in the above-mentioned document WO97/33381, including a first antenna 1 for radio communication between the repeater and a cellular mobile telephone (not shown) and a second antenna 2 for a corresponding radio communication between the repeater and a base station (not shown).

35

The first and second antennas 1,2 are connected via duplex filters 3,4 to two oppositely directed links, namely an uplink

10 for transferring signals originating from mobile telephones towards the associated base station, serving the cell in which the repeater and the mobile telephone are located, and a downlink 20 for transferring signals in the opposite direction. Each link includes a number of mutually parallel amplifier chains, each such chain handling a specific frequency or frequency band. In fig. 1, the amplifiers in these chains are represented by an amplifier 11 in the uplink 10 and an amplifier 21 in the downlink 20.

10 In the transmission lines 5,6 connecting the respective antenna 1,2 and the respective duplex filter 3,4, directional couplers 30 and 40 are disposed so as to enable the sensing of signals in the respective transmission line segment 5,6. The sensed signals are fed via switches 31,41 and band pass filters 32,42 to a common switch 50 connected to a measurement receiver 60. In the measurement receiver 60, the particular signal is analysed, so that the signal level as a function of the frequency in the particular frequency band is obtained.

20 It will be appreciated that the directional couplers and switches are connected in such a way that any input or output signal in the respective transmission line 5,6 (the input or output of the system) can be analysed.

25 The inventive concept is based on a simplified model of the repeater as represented in figs. 2 and 3. An input RF signal I (from a mobile telephone, not shown) is propagated on a microwave carrier wave in the air and hits the first antenna 1 in fig. 2, whereupon the signal is transferred through the uplink, represented by the amplifier 11, to the second antenna 2. Inevitably, a (normally very small) portion B of the signal is fed back through the air, represented by a leakage path 12. In fig. 3, the repeater R and the two antennas 1,2 are represented as a schematic, standardized control system with a summation element S, a main amplifier 11, a delay element 13 and a feed back loop 12 corresponding to the leakage path

between the two antennas. The delay element corresponds to the inevitable delay occurring in filters and other components normally included in the amplifier chains of a repeater of the kind indicated above.

5

Because of the delay element 13, the effective amplification of the system of fig. 3 will depend on the frequency. As can be shown by a Laplace-transform representation of the system, using the frequency domain rather than the time domain, the ratio between the output and input signals (or the transfer function as it is normally denoted in control theory) in the system of fig. 3 can be represented as

10

15

$$\frac{g_1 e^{-ds}}{1 - g_1 g_2 e^{-ds}}$$

20

where  $g_1$  is the gain of the amplifier 11,  $g_2$  is the gain in the (schematic) amplifier 14 in the feedback loop 12 and  $d$  is the delay in the delay element 13. From this formula, it is clear that the amplification is a harmonic function of the frequency.

25

30

A frequency response diagram of the output power of signal in a receiver is shown in fig. 4. The curve shows a pattern of harmonic variations of the power  $P$  as a function of the frequency  $f$ . It has been verified, by practical measurements, that the magnitude of such variations is a measure, though in an inverse relation, of the stability margin. Thus, when the magnitude of the variations, e.g. the peak-to-peak value, decreases, the stability margin will increase and vice versa.

35

Fig. 5 illustrates the relation between the isolation or stability margin  $SM$  (horizontal axis or abscissa in dB) and the peak-to-peak value or magnitude  $MA$  of the amplification variations (vertical axis or ordinata in dB).

Accordingly, by using the apparatus shown in fig. 1, it is possible to establish a functional relationship between the input and output signals and to calculate the stability margin, with respect to a possible self-oscillation, by way of the functional relation illustrated in fig. 5.

When the spectral properties of the input signal are known beforehand, it is sufficient to measure the output power level  $P$  as a function of the frequency  $f$ , as illustrated in fig. 4.

Of course, the calculated value of the stability margin can form the basis of a control signal controlling the gain of the repeater, so as to keep the stability margin substantially constant at a desired level. For this purpose, the measurement receiver 60 may be connected to a control unit 70 adapted to implement such a control. If desired, the measurement and control can be initiated remotely, e.g. from an operation and monitoring centre (not shown) via a telephone modem 80 or some other telecommunication link.

25

30

35



## CLAIMS

1. A method of determining the stability margin, with  
5 respect to a possible self-oscillation, in a radio frequency  
repeater operating with a predetermined delay between an input  
(5) and an output (6) and having a feedback path between said  
output and said input, comprising the steps of
- establishing the amplification of the repeater as a function  
10 of the frequency in a frequency band, and
  - observing the magnitude (MA) of wave-like variations in said  
amplification as a function of the frequency, said magnitude  
constituting a measure of the stability margin such that an  
increasing magnitude corresponds to a decreasing stability  
15 margin.
2. The method defined in claim 1, wherein the spectral  
properties of an input signal are known and wherein:
- the step of establishing the amplification as a function of  
20 the frequency is carried out by measuring an output signal  
(P) as a function of the frequency (f) in said frequency  
band, and
  - said magnitude (MA) of said wave-like variations and said  
stability margin (SM) are calculated on the basis of the  
25 result of the first step.
3. A method of controlling a radio frequency repeater,  
operating with a predetermined delay between an input and an  
output and having a feedback path between said output and said  
30 input, including the steps of:
- determining the stability margin in the repeater in  
accordance with claim 1 or 2, and
  - controlling the gain of the repeater in response to the  
determined stability margin.
- 35
4. An apparatus for determining the stability margin,  
with respect to a possible self-oscillation, in a radio

frequency repeater operating with a predetermined delay between an input (5) and an output (6) and having a feedback path between said output and said input, comprising

- at least one sensing element (30, 40) connected to at least one of said input and said output of the repeater , and
- at least one measurement receiver (60) connected to said at least one sensing element for measuring at least an output signal from said repeater, on the basis of which the stability margin (SM) is calculated.

10

5. The apparatus as defined in claim 4, wherein said at least one sensing element comprises at least one directional coupler.

15

6. The apparatus as defined in claim 5, wherein two directional couplers are connected to a single measurement receiver via a switch (50) for alternating measurement of the signals at the output and the input, respectively.

20

7. The apparatus as defined in claim 4, wherein: said measurement receiver (60) is connected to a control unit (70) for controlling the gain of said repeater.

25

8. The apparatus as defined in claim 4, wherein: said measurement receiver is connectable, via a modem (80), to a central operational monitoring unit, whereby the measurements and calculations for determining said stability margin can be made by remote control.

30

9. The apparatus as defined in claim 4, wherein: a band pass filter (32, 42) is inserted between said sensing element and said measurement receiver.

35

10. A repeater system, including a radio frequency  
repeater of the kind having two antennas (1,2) and two links  
therebetween, said two links comprising an uplink (10) for  
5 amplifying signals from a mobile telephone to a base station  
and a downlink (20) for amplifying signals from said base  
station to said mobile telephone, said repeater system being  
provided with an apparatus as defined in any one of the claims  
4-9.

10

15

20

25

30

35

Fig. 1

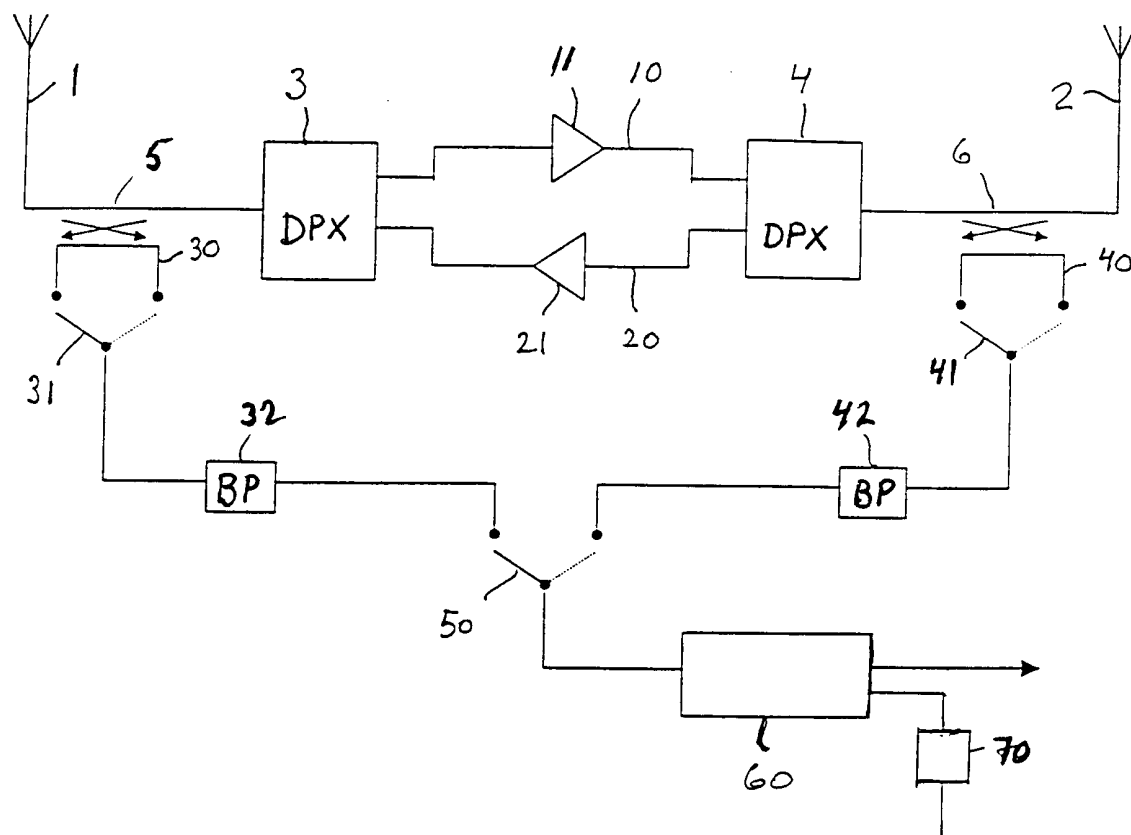


Fig. 2




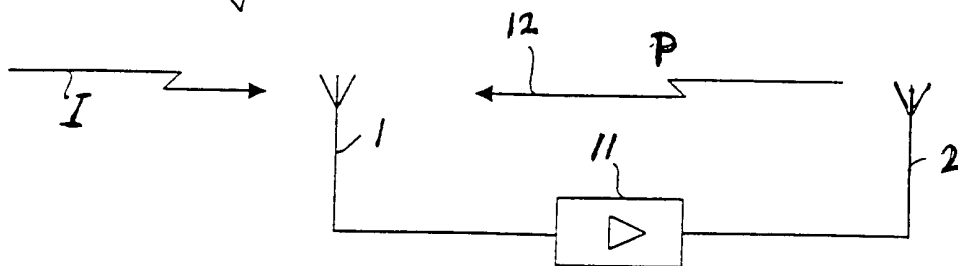


Fig. 3

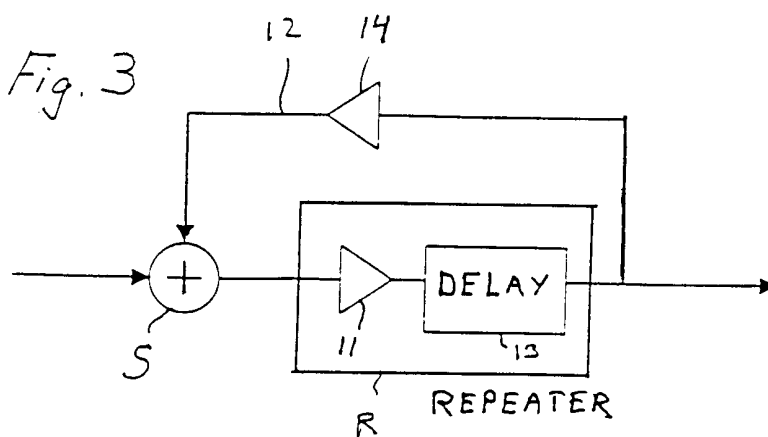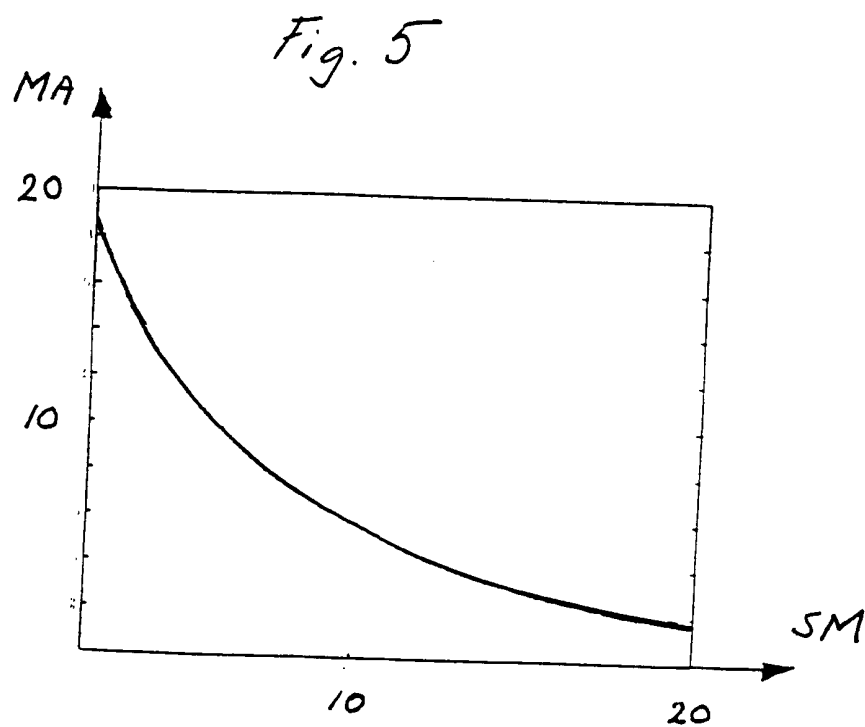

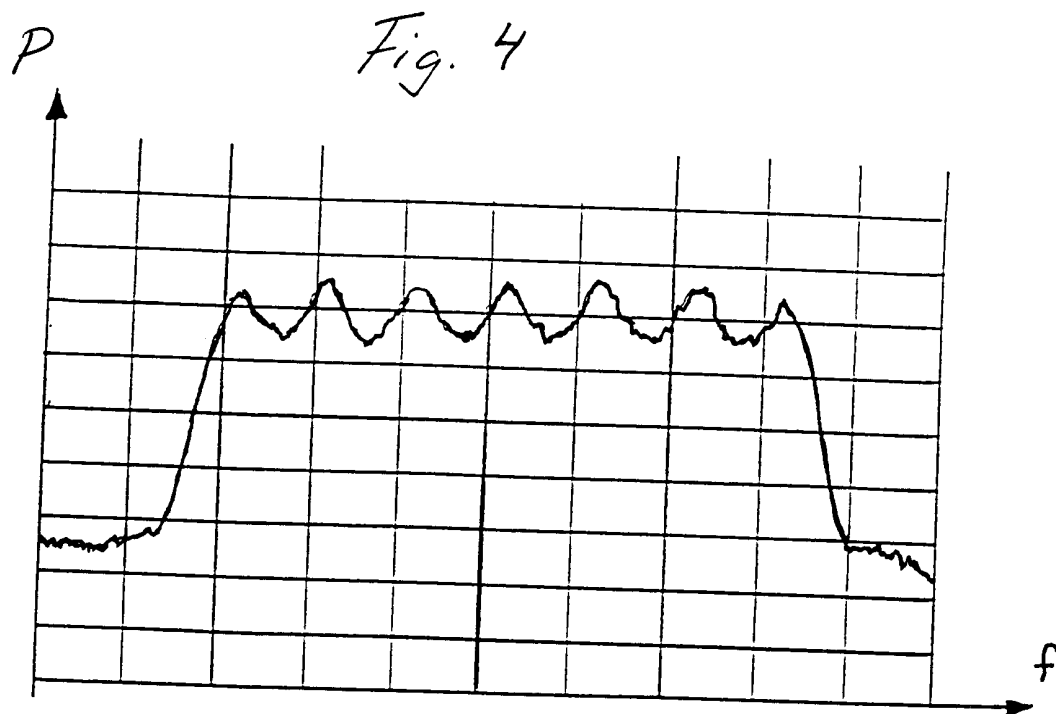

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00999

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 1/60 // H 04 B 17/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0905914 A2 (KO, SUNG SUN ET AL.), 31 March 1999 (31.03.99), page 3, line 21 - page 4, line 7, abstract  --	1-10
A	US 4776032 A (H. ODATE ET AL), 4 October 1988 (04.10.88), column 2, line 30 - line 57, abstract  --	1-10
A	US 5115514 A (S.A. LESLIE), 19 May 1992 (19.05.92), column 5, line 20 - column 8, line 18, abstract  -- -----	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

4 October 2000

Date of mailing of the international search report

19 -10- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Åsa Hällgren/AE

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE 00/00999

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
EP	0905914	A2	31/03/99	NONE	
US	4776032	A	04/10/88	DE 3650241 D,T EP 0227393 A,B SE 0227393 T3 JP 1970094 C JP 6105881 B JP 62266930 A JP 1955614 C JP 6052881 B JP 63079429 A JP 1959329 C JP 6095654 B JP 62141826 A	14/06/95 01/07/87  18/09/95 21/12/94 19/11/87 28/07/95 06/07/94 09/04/88 10/08/95 24/11/94 25/06/87
US	5115514	A	19/05/92	AT 96954 T DE 3885369 D,T EP 0302455 A,B SE 0302455 T3 ES 2047510 T FI 88658 B,C FI 883617 A HK 1004310 A JP 1051730 A JP 2919839 B US 4941200 A US 5023930 A US 5065449 A US 5093923 A US 5152002 A US 5168574 A	15/11/93 24/03/94 08/02/89  01/03/94 26/02/93 04/02/89 00/00/00 28/02/89 19/07/99 10/07/90 11/06/91 12/11/91 03/03/92 29/09/92 01/12/92