



- (51) International Patent Classification:
B65D 85/804 (2006.01) B65B 1/02 (2006.01)
- (21) International Application Number:
PCT/CA2019/050504
- (22) International Filing Date:
23 April 2019 (23.04.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/661,464 23 April 2018 (23.04.2018) US
62/661,471 23 April 2018 (23.04.2018) US
- (71) Applicant: 2266170 ONTARIO INC. [CA/CA]; 2531 Stanfield Road, Mississauga, Ontario L4Y 1S4 (CA).
- (72) Inventors: TROMBETTA, Liberatore; 525 Golfinks Road, Ancaster, Ontario L9G 4X6 (CA). FU, Yucheng; 3379 Oakglade Crescent, Mississauga, Ontario L5C 1X4 (CA).
- (74) Agent: RIDOUT & MAYBEE LLP et al.; 5500 North Service Road, Suite 101, Burlington, Ontario L7L 6W6 (CA).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: CAPSULES AND OTHER CONTAINERS WITH OPTIMIZED RECYCLING ATTRIBUTES AND METHODS FOR MAKING SAME

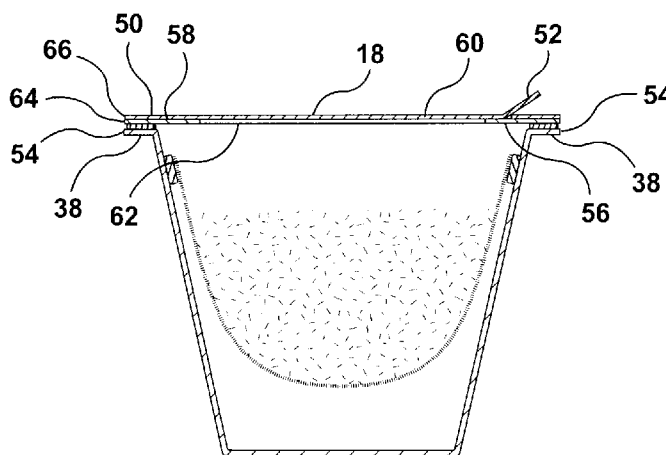


FIG. 9

(57) Abstract: A capsule or container is provided having optimized recycling attributes. The capsule is provided for use in a machine for preparing a consumable product from capsules. The capsule includes a body that defines an interior space with an opening. A cover is disposed over the opening. A filter is disposed in the interior space to define a chamber between the filter and the cover. The body, filter and cover are preferably formed of the same substantially pure polymer material. Ingredients are disposed in the interior space for preparing a desired product. A hinge is provided to tether the cover to the body. The cover is attached with a peelable seal to the body so that cover may be peeled away from the body while remaining tethered at the hinge.



Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

CAPSULES AND OTHER CONTAINERS WITH OPTIMIZED RECYCLING ATTRIBUTES AND METHODS FOR MAKING SAME

FIELD

[0001] This specification relates to capsules and other containers for preparing or containing consumable products, and in particular to capsules and containers with optimized recycling attributes and systems and methods for making same.

BACKGROUND

[0002] The following background discussion is not an admission that anything discussed below is citable as prior art or common general knowledge. The documents listed below are incorporated herein in their entirety by this reference to them.

[0003] Single serve capsules adapted for use in machines to prepare a desired consumable product from pre-cursor ingredients are becoming increasingly popular. Such capsules come in a variety of formats for producing consumable products such as coffee, tea or hot chocolate.

[0004] Single serve capsules are often poorly suited for recycling following their use by the consumer. The capsules are often formed from a mix of materials that are not easily distributed to specific recycling streams. Keurig K-Cup™ capsules for example have a body that is formed from a multilayered material that includes a polyethylene or polypropylene outer layer, an EVOH barrier layer and a polyethylene sealing layer, a filter that is formed primarily out of paper and a cover that is formed from a multilayered material that includes an aluminum foil outer layer, an EVOH barrier layer and a polyethylene sealing layer.

[0005] Similar problems exist with conventional food or beverage containers containing a prepared food or beverage that does not require a machine to prepare. Such containers may be formed from a mix of materials or they may have components that are separable from the remainder of the container and too small to be collected for the proper recycling stream.

[0006] There is a need for a capsule or other container with optimized recycling attributes to overcome one or more of the problems identified above.

SUMMARY

[0007] In one aspect the invention provides a beverage capsule for use in a beverage preparing machine to prepare a beverage product, said beverage capsule comprising:

a body formed entirely of a substantially pure polymer material, said body defining an interior space having an opening;

a filter formed entirely of the same substantially pure polymer material as said body, said filter being disposed in said interior space to define an ingredients chamber for containing and filtering ingredients for preparing a desired beverage product;

ingredients disposed in said ingredients chamber for preparing a desired beverage product; and

a cover disposed on said body to close said opening.

[0008] In another aspect, the invention provides a beverage capsule for use in a beverage preparing machine to prepare a beverage product, said beverage capsule comprising:

a body defining an interior space having an opening;

a filter disposed in said interior space to define an ingredients chamber for containing and filtering ingredients for preparing a desired beverage product, said filter being formed of a hydrophobic and non-absorbent polymer material having a basis weight of less than 40 gsm;

ingredients disposed in said ingredients chamber for preparing a desired beverage product; and

a cover disposed on said body to close said opening.

[0009] In another aspect, the invention provides a capsule for containing a food product, the capsule comprising:

a body defining an interior space for containing a food product, said body having an opening for accessing the food product, said opening being surrounded by a flange; and

a cover sealed to said flange to close said opening, wherein said cover includes a hinge, that is permanently sealed at a hinge zone to said flange, and a peelable portion that is peelably sealed at a peel zone to said flange to enable said cover to be opened following use of said capsule while remaining connected at said hinge, wherein said body and said cover are made of the same substantially pure material that is at least 95% of the same type of material by weight.

[0010] In another aspect, the invention provides a capsule for containing a food product, the capsule comprising:

a body formed entirely of a substantially pure material, said body defining an interior space for containing a food product, said body having an opening for accessing the food product, said opening being surrounded by a flange; and

a cover formed entirely of the same substantially pure material as said body, said cover being sealed to said flange to close said opening.

[0011] In another aspect, the invention provides a system for making a beverage capsule for use in a beverage preparing machine, the system comprising:

a filter station for sealing a filter to an interior space of a body for the beverage capsule to define an ingredients chamber;

an ingredients station for depositing a desired volume of desired ingredients into said ingredients chamber;

a cover sealing station for sealing a cover to said body.

[0012] In another aspect, the invention provides a process for making a beverage capsule for use in a beverage preparing machine, the process comprising the steps of:

sealing a filter to an interior surface of a body for the beverage capsule to define an ingredients chamber;

depositing a desired volume of desired ingredients into said ingredients chamber;
sealing a cover to said body to cover said opening.

[0013] Other aspects and features of the teachings disclosed herein will become apparent, to those ordinarily skilled in the art, upon review of the following description of the specific examples of the specification.

DRAWINGS

[0014] The drawings included herewith are for illustrating various examples of articles, methods, and apparatuses of the present specification and are not intended to limit the scope of what is taught in any way. For simplicity and clarity of illustration, where considered appropriate, reference numerals may be repeated among the drawings to indicate corresponding or analogous elements.

[0015] Figure 1 is a schematic view of a capsule in accordance with one aspect of the present invention disposed in a machine for preparing a beverage;

[0016] Figure 2 is a top view of the capsule of Figure 1;

[0017] Figure 3 is a sectional view of the capsule of Figure 1 as viewed along lines 3-3;

[0018] Figure 4 is a schematic cross-sectional view of a material for forming the body and/or cover of the capsule of Figure 1.

[0019] Figure 5 is a schematic cross-sectional view of a fiber for forming the filter of the capsule of Figure 1;

[0020] Figure 6 is a top view of another embodiment of the capsule of Figure 1 showing a different hinge structure;

[0021] Figure 7 is a sectional view of the capsule of Figure 6 as viewed along lines 7-7;

[0022] Figure 8 is a top view of another embodiment of the capsule of Figure 1 showing a different hinge structure;

[0023] Figure 9 is a sectional view of the capsule of Figure 8 as viewed along lines 9-9;

[0024] Figure 10 is a perspective view of the capsule of Figure 8 showing the flap open;

[0025] Figure 11 is a sectional view of the capsule in accordance with another embodiment of the present invention;

[0026] Figure 12 is a schematic sectional view of a container in accordance with one aspect of the present invention;

[0027] Figure 13 is a top view of the capsule of Figure 12;

[0028] Figure 14 is a schematic view of a manufacturing system for manufacturing a capsule in accordance with the present invention;

[0029] Figure 15 is a flow chart depicting a method for manufacturing a capsule in accordance with the present invention;

[0030] Figures 16(a) and (b) are schematic views of the hinge sealing process in accordance with the present invention; and

[0031] Figures 17(a) and (b) are schematic views of an alternate hinge sealing process in accordance with the present invention.

DESCRIPTION OF VARIOUS EMBODIMENTS

[0032] Various apparatuses or methods will be described below to provide examples of the claimed invention. The claimed invention is not limited to apparatuses or methods having all of the features of any one apparatus or method described below or to features common to multiple or all of the apparatuses described below. The claimed invention may reside in a combination or sub-combination of the apparatus elements or method steps described below. It is possible that an apparatus or method described below is not an example of the claimed invention. The applicant(s), inventor(s) and/or owner(s) reserve all rights in any invention disclosed in an apparatus or method described below that is not claimed in this document and do not abandon, disclaim or dedicate to the public any such invention by its disclosure in this document.

[0033] A capsule in accordance with the present invention is shown generally at 10 in the Figures. Capsule 10 includes a body 12, filter 14 (when required), ingredients 16 and cover 18.

[0034] Capsule 10 is sized and configured for use in a machine 20 that is adapted for preparing a product from capsule 10.

[0035] Machine 20 includes an injection system 22 for injecting a fluid, typically heated water, into the capsule 10 for mixing with ingredients 16. Injection system 22 may include at least one injection nozzle 22a disposed on machine 20 that is adapted to pierce cover 18 to inject fluid into capsule 10.

[0036] Machine also includes a dispensing system 24 for dispensing product from capsule 10 into a desired receptacle such as a bowl or cup. Dispensing system 24 may include a hollow probe 24a that is adapted to pierce capsule 10 to dispense a prepared product from capsule 10.

[0037] In an alternative embodiment, which is commonly used with high pressure espresso machines (not shown), dispensing system 22 may be provided within the capsule 10 instead of the machine 20. Capsule 10 may for example have at least one component disposed within capsule 10 that is adapted to move under exposure to pressure to pierce a portion of capsule downstream of injection system 22 to dispense the prepared product. Alternatively, pressure within the capsule may cause a portion of the capsule to break upon contact with a portion of the machine to dispense the prepared product.

[0038] Body 12 of capsule 10 includes a sidewall 30 and an end wall 32 together defining an interior space 34. Interior space 34 preferably has a volume in the range of 30 cc to 100 cc for preparing a single serving of beverage and more preferably a volume in the range of 40 cc to 80 cc.

[0039] An opening 36 is defined at one end of body 12 and a flange 38 extends around the perimeter of opening 36 to receive cover 18 and to support capsule 10 within machine 20. Filter 14 may be secured to flange 38 or to an interior surface of capsule 10 (such as to sidewall 30 or the underside of cover 18). Filter 14 is formed to define an ingredients chamber 40 within interior space 34 for receiving and filtering at least some of ingredients 16. Filter 14 may optionally be peelably sealed to body 12 to allow filter 14 containing ingredients 16 to be removed from body 12 following use of capsule 10.

[0040] In another embodiment (not shown), body 12 may be formed with no end wall 32 and no sidewall 30 or a partial sidewall 30. Flange 38 may still extend around the perimeter of opening 36 to receive cover 18 and to support capsule 10 within machine 20. Filter 14 may be secured to flange 38 or to partial sidewall 30 or underside of cover 18 to define ingredients chamber 40.

[0041] Preferably, filter 14 is formed of a non-woven polymer fabric having a basis weight that is 40 grams or less per square meter (gsm), preferably in the range of 5 to 40 gsm, more preferably between 10 to 30 gsm and even more preferably 25 gsm or less and most preferably in the range of 10-25 gsm.

[0042] Filter 14 preferably has the material properties specified below to facilitate optimum cutting of filter 14 during the manufacture of capsule 10.

[0043] Filter 14 preferably has a tensile strength of less than 100 N/5cm - in the Machine Direction (MD) and less than 70 N/5cm in the Cross Direction (CD), preferably in the range of 20-70 MD and 10 to 40 CD, and more preferably in the range of 20-60 MD and 10 to 30 CD. The test method used to measure tensile strength test is described under ISO 9073.3.

[0044] Filter 14 preferably has a material tear strength of less than 15N MD and less than 20N CD, preferably in the range of 1-12 MD and 1-15 CD, and more preferably in the range of 3-10 MD and x3-10 CD. The test method used to determine material tear strength is described under ISO 13937.2.

[0045] Filter 14 preferably has an elongation to break value of less than 50% MD and less than 40% CD, and more preferably less than 40% MD and less than 30% CD. The test method used to determine elongation to break value is described under ISO 9073.3.

[0046] Ingredients 16 may include insoluble ingredients 16, such as tea leaves, coffee grounds, herbs, spices or other ingredients, that are disposed in ingredients chamber 40 and adapted for forming a consumable product by extraction or infusion using machine 20. Additional ingredients 16 may be disposed in ingredients chamber 40 or elsewhere in interior space 34. Such additional ingredients 16 may include soluble ingredients 16 such as coffee, chocolate, soup stock, flavor additives or other ingredients in powdered, crystallized or other forms

adapted for solubility or contained within a soluble film or pouch. Additional ingredients 16 may also include active ingredients (eg foaming agents), natural health additives, regulated drugs, alcohol or other soluble or insoluble ingredients.

[0047] Cover 18 is disposed over opening 36 and secured to body 12 such as by sealing cover 18 directly to flange 38 or by sealing cover 18 to filter 14 which in turn is sealed to flange 38. Cover 18 may be formed of a polymer material that is resistant to tearing and adapted to shrink upon exposure to heat. Cover 18 may thus be adapted to shrink around the opening formed in cover 18 by injection system 22 to form a sufficient seal to withstand the buildup in pressure within capsule 10 under normal conditions during use in machine 20. In other words, cover 18 may be adapted to shrink sufficiently around the at least one injection nozzle when the at least one injection nozzle pierces the cover and injects heated fluid into the capsule to create a seal and allow the buildup in pressure within capsule up to a maximum pressure. Alternatively, cover 18 may be formed of a metallic foil material such as aluminum foil.

[0048] In a preferred embodiment, components of capsule 10 (not including ingredients 16) are formed from a single, substantially pure, type of material. This is also referred to herein as a mono-material capsule made with mono-material components. The type of material is selected based on factors including recyclability, ease of manufacturing, durability and desired shelf life. Thus body 12, filter 14 (if provided) and cover 18 each may be separate components that each are formed from the same, substantially pure, type of material. Alternatively, body 12 and filter 14 (if provided) each may be formed from the same, substantially pure, type of material and cover 18 may be formed of a different material.

[0049] The term "substantially pure" is defined herein to mean at least 90% of the same type of material by weight (90%/wt), preferably at least 95%/wt, even more preferably at least 97%/wt and most preferably 100%/wt. The remaining different type of materials may include residual materials such as adhesives, barrier materials and print coatings. As noted above, the desired purity is determined in part by choice of material and shelf life considerations (for example, certain ingredients 16 may require little or no barrier protection or may have a shorter shelf life).

[0050] One preferable type of material for forming the components of the capsule 10 is polypropylene (PP) (which may include variants such as cast polypropylene (CPP)). Another preferable type of material is polyethylene terephthalate (PET) (which may include variants such as cast polyethylene terephthalate (CPET)). The PP and PET (and their variants) may be 100% fossil fuel based or it may be a mix of fossil fuels, post-recycled material and/or or bio-resins. Another preferable type of material is aluminum. Yet another preferred type of material is polylactic acid (PLA) for its biodegradable properties. The invention is not intended however to be restricted to any specific type of material provided that it is a single, substantially pure, type and that it meets the needs for operation of the capsule 10 in the machine 20.

[0051] Referring to Fig 4, a schematic view of a cross-section of material that may be used for body 12 and/or cover 18 is shown. Material is preferably a multi-layered material that includes an outer layer O, a barrier layer B and a sealing layer S. Outer layer may for example be formed of PP, barrier layer B may be formed of a glass coating of aluminum oxide or silicon oxide and sealing layer may be formed of CPP (which is considered herein to be the same type of material as PP). Barrier layer B is formed of a different type of material however the overall material is still within the defined ranges of being substantially pure.

[0052] Referring to Fig 5, a schematic view of a cross section of a fiber for forming filter 14 is shown. Fiber is preferably a multi-component material that includes a sheath material Sh surrounding a core material C. Sheath Sh may for example be formed of CPP and core may for example be formed of PP. In a preferred embodiment a single core is provided. Core material C preferably has a higher meltpoint than sheath material Sh.

[0053] In some embodiments, cover 18 may be formed of a different type of material from body 12 and filter 14 provided that cover 18 may be easily separated from the remainder of the capsule 10 following use or is otherwise compatible from a recycling standpoint. For example, body 12 and filter 14 may be formed of PP and cover 18 may be formed of aluminum foil. Following use, the consumer may separate the cover 18 from the remainder of the capsule 10 so that the cover 18 may be placed into one stream of recycling and the remainder of the capsule 10

may be placed into another stream of recycling (with the consumer optionally also placing used ingredients 16 from capsule 10 into another stream for composting).

[0054] Preferably however, cover 18 is formed from the same type of material as the body 12 and filter 14 of capsule 10. In such instances, it is desirable that cover 18 remain at least partially attached to the remainder of capsule 10 in order that capsule 10 with cover 18 attached may be disposed into the same recycling stream. This avoids placing small components (such as cover 18) separately into the recycling stream where they may not be large enough to be mechanically collected for recycling. Preferably, a hinge 50 is formed on one or both of cover 18 and body 12 to allow cover 18 to be lifted or peeled partially away from the remainder of capsule 10 to allow ingredients 16 to be discarded (preferably to compost) while ensuring that cover 18 remains tethered to the remainder of capsule 10. A tab 52 may also be provided to assist the user with lifting or peeling away cover 18.

[0055] Referring to Figs 2 and 3, a preferred structure for hinge 50 is shown. Capsule 10 includes a seal 54 between the underside of cover 18 and the top of flange 38 around the circumference of body 12. Seal 54 includes a peel zone 56 and a hinge zone 58. Seal 54 for peel zone 56 is a peelable seal between cover 18 and flange 38 that allows a consumer to peel cover 18 away from flange 38 by hand without excessive effort. Seal 54 for hinge zone 58 has a more secure seal between cover 18 and flange 38 that does not allow a consumer to peel cover 18 away from flange 38 by hand without excessive effort. In other words, hinge zone 58 has a higher seal or bond strength than peel zone 56. Preferably, hinge zone 58 has a seal or bond strength that is at least 1.5 times as strong as the strength of peel zone 56 and even more preferably at least 2 times as strong. Seal or bond strength may be measured following the principals of ASTM F904.

[0056] Referring to Figs 6 and 7, another structure for forming hinge 50 is shown. Similar reference numerals are used to refer to similar elements for the embodiments described herein. Capsule 10 includes an integral connection between body 12 and cover 18. Hinge 50 is integrally formed from both body 12 and cover 18 to allow cover 18 to be opened following use. Cover 18 may be sealed to flange 38 with seal 54 in the form of a peelable seal around the entire circumference of body 12 or cover 18 may be adapted to snap fit to body 12 (not shown).

[0057] Referring to Figs 8-10, another structure for forming hinge 50 is shown. Similar reference numerals are used to refer to similar elements for the embodiments described herein. Capsule 10 includes a more secure seal 54 between the underside of cover 18 and the top of flange 38 around the circumference of body 12. Cover 18 includes a flap 60 that may be lifted or peeled away from the remainder of cover 18 to permit access to the contents of capsule 10. Cover 18 may be formed of a multi-layered material with an aperture 62 defined in a base layer 64 and flap 60 defined in a top layer 66 to cover aperture 62. Base layer 64 includes a peel zone 56 extending around a substantial portion of the periphery of aperture 62. Seal 54 for peel zone 56 is a peelable seal between flap 60 and base layer 64. Tab 52 may also be provided on flap 60 to assist the user with lifting or peeling away flap 60. Hinge 50 is preferably disposed on hinge zone 58 of flap 60.

[0058] Referring to Figure 11, another embodiment for capsule 10 is shown. Similar reference numerals are used to refer to similar elements for the embodiments described herein.

[0059] Capsule 10 includes filter 14 that is secured with a seal 68 to an interior surface of body 12 fully around the circumference of sidewall 30 at a location L between opening 36 and end wall 32. Preferably, filter 14 is spaced away from opening 36 (ie not proximate to opening 36). More preferably, filter 14 is secured to body 12 at a location that is in the middle 1/3 of the distance between opening 36 and end wall 32. Filter 14, at it's lowest point, is preferably spaced a distance D from end wall 32. Distance D is selected to avoid filter 14 being contacted by hollow probe 24a of dispensing system 24 during use of capsule 10 in machine 20 (as shown in Figure 1).

[0060] Filter 14 forms a cup shaped area for containing and filtering ingredients 16. Filter 14 includes a sufficient surface area A for allowing fluid to flow through filter 14 at a desired rate during the preparation of the beverage product. Preferably, for a capsule having a volume of 40-80 cc, filter 14 has a surface area of 10-70 cm². More preferably, filter 14 has a surface area of 15-50 cm². Filter 14 and body 12 are formed from the same substantially pure material and thus, filter 14 may be secured with seal 68 to body 12 using a heat seal that causes the materials to

melt and securely bond together to form seal 68 that does not allow ingredients 16 to bypass filter around seal 68.

[0061] Referring to Figures 12-13, a container 70 for containing a prepared consumable product 72 is shown. Prepared consumable product 72 is a prepared food or beverage product that is ready to be consumed by the end user without any further preparation steps and thus does not require an intermediate process of preparing the consumable product in a machine such as described for capsule 10 above. Container 70 is, in certain other respects, similar to the embodiments of capsule 10 described herein and similar reference numerals are used to refer to similar elements for the embodiments described herein.

[0062] Container 70 includes body 12 and cover 18 that are each formed from a single, substantially pure, type of material. Body 12 defines an interior space 34 for containing prepared consumable product 70 and a flange 38 surrounding an opening 36 for receiving cover 18 to cover opening 36. Cover 18 is connected to flange 38 with a seal 54 that includes a peel zone 56 and a hinge zone 58. Cover 18 may further include a tab 52 to assist a user with peeling cover 18 away from body 12 to access the prepared consumable product 70 through opening 36. Hinge 50 is provided to allow cover to be partially removed from body 12 while still ensuring that cover 18 remains tethered to body 12 after use.

[0063] Referring to Figures 14-15, schematic views of a system 100 and a process 1000 for making capsules 10 is shown.

[0064] System 100 comprises at least one transfer belt 102 having a plurality of capsule holders 103 adapted to cyclically and sequentially transfer capsules 10 from a working station to a following station as described further below. While only a single capsule holder 103 is shown at each station for system 100 it will be understood that transfer belt 102 has multiple capsule holders 103 disposed at each station in order that manufacturing operations may be performed simultaneously on multiple capsules at each station.

[0065] System 100 includes a body forming station 104 for engaging a sheet of moldable multilayered body material 106 with a heated mandrel 108 to form body 12 in accordance with body forming step 1002. Alternatively, body forming station

may be replaced with a body supply station 104A having a body supplier, such as a denester, that denests previously formed bodies 12 from a body supply, and places each body 12 into a respective capsule holder 103.

[0066] Capsule holder 103 with body 12 is then transferred to a filter station 110 for forming and sealing filter 14 to body 12 (in those instances where a filter 14 is required). Filter station 110 may include a supply of pre-cut filters 14 that are sized to be formed and sealed to body 12. A pre-cut filter 14 may be picked from pre-cut filter supply and deposited over opening 36 of body 12. A forming and sealing tool 112 may then engage pre-cut filter to form filter 14 and seal to body 12 (or seal to body 12 and subsequently form filter 14). Alternatively, filter station 110 may include a roll of filter material that is subsequently cut to a desired size either before or after the filter is formed within body 12 and/or sealed to body 12. It should be noted that filter 14 is preferably loosely formed within body 12 to define ingredients chamber 40. Preferably filter 14 is not stretched in the process of forming filter 14. Preferably, filter material is cut into a circular disc having a diameter that is larger than the diameter of opening 36. Filter 14 will then be loosely formed within body 12 with portions of filter 14 overlapping each other or bunching together within body 12.

[0067] Capsule holder 103 with body 12 and filter 14 (where filter is required) is then transferred to an ingredients station 124 having an ingredients supplier 126 for supplying a desired amount of ingredients 16 into ingredients chamber 46 in accordance with ingredients loading step 1010. A scale 128 weighs beverage capsule 10 to ensure that the desired amount of ingredients 16 have been disposed into ingredients chamber 46.

[0068] If a dosing agent is required, then capsule holder 103 transfers body 12 with filter 14 and ingredients 16 to dosing agent station 130 having a dispenser 50 for dispensing a desired amount of dosing agent 40 into ingredients 16 in accordance with dosing step 1012.

[0069] Following dosing step 1012, capsule holder 103 then transfers body 12 with filter 14 and ingredients 16 with dosing agent 40 to cleaning station 132 where a vacuum conduit 134 cleans the exposed surface of flange 28 or gasket portion 50 of

filter 14 in preparation for sealing with cover 18 in accordance with cleaning step 1014.

[0070] The system and process described above may either be performed in a non-modified atmospheric environment (such as a regular open-air manufacturing environment) or it may be performed in a modified atmospheric environment (such as an environment where air has been evacuated and replaced with an inert gas such as nitrogen). In a non-modified atmospheric environment, capsules 10 may need to be transferred to a modified atmospheric environment for the remaining steps of replacing the air within capsule with an inert gas and sealing cover 18 to body 12. In a modified atmospheric environment, capsules 10 already contain an inert gas and simply require cover 18 to be sealed to body 12.

[0071] Various options for forming hinge 50 on cover 18 are described below for both non-modified and modified atmospheric embodiments.

[0072] In a non-modified atmospheric environment, capsule holder 103 transfers body 12 with filter 14 and ingredients 16 with dosing agent 40 to a cover pre-sealing station 136 for receiving a supply of a cover material 138 and pre-sealing a portion of cover 18 to flange 38 of body 12 in accordance with pre-sealing step 1016. Pre-sealing may be accomplished for example by thermal welding (heat sealing) or ultrasonic welding. Cover pre-sealing station 136 leaves openings 188 along edge of cover 18 for allowing air to be evacuated and inert gas to be flushed into capsule during the modified atmosphere packaging (MAP) process step 1018 as described in more detail below. Cover material 138 may be supplied in the form of pre-cut covers 12 that are picked and placed on body 12 for pre-sealing. Alternatively, a roll of cover material 138 may be provided and each cover 18 may be cut to a desired size prior to or following the step of pre-sealing cover 18 to body 12.

[0073] Referring to Figures 16(a) and (b), one approach to pre-sealing cover 18 to body 12 is shown. In Figure 16(a), cover 18 is pre-sealed at a first temperature T1 in specific locations around flange 38 to form a peelable seal. Cover 18 is also sealed at hinge zone 58 to define hinge 50. Hinge 50 is formed at a second temperature T2 and/or using a different sealing technique (such as an ultrasonic

weld instead of a thermal weld) to form a stronger seal than the seal in peel zone 56. In Figure 16(b), cover 18 is subsequently sealed, following the MAP process described below, entirely around flange 38 to define a peelable seal in peel zone 56 and to fully seal capsule 10.

[0074] Referring to Figures 17(a) and (b), another approach to pre-sealing cover 18 to body 12 is shown. In Figure 17(a), cover 18 is pre-sealed at a first temperature T1 in specific locations around flange 38 to form a peelable seal. In Figure 16(b), cover 18 is subsequently sealed, following the MAP process described below, around peel zone 56 at temperature T1. Hinge 50 is formed in hinge zone 58 at a second temperature T2 and/or using a different sealing technique (such as an ultrasonic weld instead of a thermal weld) to form a stronger seal than the seal in peel zone 56.

[0075] Hinge 50 may be formed in a two-stage process where the seal in hinge zone 58 is formed at one stage and the seal in peel zone is formed at another stage. Alternatively, hinge 50 may be formed in a single-stage process where a hinge applicator tool (not shown) having two different sealing heads is provided. One sealing head is adapted for forming a peelable seal in peel zone 56 of capsule 10 and the other sealing head is adapted for forming a relatively non-peelable seal in hinge zone 58 of capsule. The sealing heads of the hinge applicator tool may be adapted to operate at different sealing temperatures T1 and T2 and/or it may be adapted to perform different sealing operations (such as a thermal weld and an ultrasonic weld).

[0076] Partially sealed capsules 10 are then transferred from capsule holders 103 in transfer plate 102 to corresponding capsule holders 176 disposed within a transfer plate 178 using a pick-and-place device (not shown) or other suitable mechanism. Capsule holders 176 and transfer plate 178 are specially adapted for use during the MAP process step 1018.

[0077] Transfer plate 178 with partially sealed beverage capsules 10 disposed in capsule holders 176 is then moved to a MAP station 170 for execution of the MAP process step 1018 as described in more detail in US patent publication 20140141128 which is incorporated herein in its entirety by reference. Once the

MAP process is complete, openings 188 in cover 18 are sealed with sealer 192 in accordance with sealing step 1020 and the finished capsule 10 is transferred using a pick-and-place device (not shown) or other suitable mechanism to a collection station 140 for subsequent packaging into boxes (not shown).

[0078] In a modified atmospheric environment, capsule holder 103 transfers body 12 with filter 14 and ingredients 16 with dosing agent 40 to a final cover sealing station 136 for receiving a supply of a cover material 138 and sealing cover 18 to flange 28 of body 12 in accordance with sealing step. Sealing may be accomplished by thermal welding (heat sealing) or ultrasonic welding. Cover material 138 may be supplied in the form of pre-cut covers 12 that are picked and placed on body 12 for pre-sealing. Alternatively, a roll of cover material 138 may be provided and each cover 18 may be cut to a desired size prior to or following the step of pre-sealing cover 18 to body 12.

[0079] In the modified atmospheric environment, hinge 50 may be formed prior to the final sealing step, after the final sealing step or during the final sealing step. Hinge 50 may be formed in a similar manner as discussed above with reference to Figures 16 and 17. Thus, cover 18 may be sealed to hinge zone of flange 38 at temperature T2 and/or by using a different sealing technique (such as an ultrasonic weld instead of a thermal weld) to define hinge 50 and the remainder of cover may be sealed to peel zone of flange 38 at temperature T1 and/or by using a different sealing technique (such as a thermal weld instead of an ultrasonic weld). Alternatively, cover 18 may first be sealed around flange 38 at temperature T1 to define peel zone 56 and then cover 18 may be sealed at hinge zone 58 to define hinge 50.

[0080] It will be understood that system 100 and process 1000 do not require all stations and steps to be provided. It will also be understood that the relative position of stations or the order of process steps may be changed depending on the desired structure and contents of the finished capsule 10.

[0081] While the above description provides examples of one or more processes or apparatuses, it will be appreciated that other processes or apparatuses may be within the scope of the accompanying claims.

CLAIMS

I/We claim:

1. A beverage capsule for use in a beverage preparing machine to prepare a beverage product, said beverage capsule comprising:

a body formed entirely of a substantially pure polymer material, said body defining an interior space having an opening;

a filter formed entirely of the same substantially pure polymer material as said body, said filter being disposed in said interior space to define an ingredients chamber for containing and filtering ingredients for preparing a desired beverage product;

ingredients disposed in said ingredients chamber for preparing a desired beverage product; and

a cover disposed on said body to close said opening.

2. The beverage capsule of claim 1 wherein said filter has a basis weight of less than 40 g/m².

3. The beverage capsule of claim 1 wherein said filter has a basis weight of no more than 25 g/m².

4. The beverage capsule of claim 1 wherein said filter has a tensile strength of 100 N/5cm or less in the Machine Direction (MD) and 70 N/5cm or less in the Cross Direction (CD).

5. The beverage capsule of claim 1 wherein said filter has a tensile strength in the range of 20-70 N/5cm in the Machine Direction (MD) and 10-40 N/5cm in the Cross Direction (CD).

6. The beverage capsule of claim 1 wherein said filter has a tensile strength in the range of 20-60 N/5cm in the Machine Direction (MD) and 10-30 N/5cm in the Cross Direction (CD).

7. The beverage capsule of claim 1 wherein said filter has a material tear strength of 15 N or less in the Machine Direction (MD) and 20 N or less in the Cross Direction (CD).
8. The beverage capsule of claim 1 wherein said filter has a material tear strength in the range of 3-10 N in the Machine Direction (MD) and 3-10 N in the Cross Direction (CD).
9. The beverage capsule of claim 1 wherein said filter has an elongation to break value of 50% or less in the Machine Direction (MD) and 40% or less in the Cross Direction (CD).
10. The beverage capsule of claim 1 wherein said filter is formed of bi-component fibers having a CPP core and a PP sheath.
11. The beverage capsule of claim 1 wherein said filter is hydrophobic and non-absorbent.
12. The capsule of claim 1 wherein the filter is sealed to said body within said interior space.
13. The capsule of claim 1 wherein said body includes a sidewall and an end wall that define said interior space.
14. The capsule of claim 13 wherein said filter is sealed to said sidewall within said interior space at a location that is in the middle one-third of the distance between said opening and said end wall.
15. The capsule of claim 14 wherein said filter, at its lowest point, is spaced a minimum distance D from said end wall to avoid said filter being contacted by a dispensing system during use of capsule in the machine.
16. The capsule of claim 1 wherein said cover is formed entirely of the same substantially pure polymer material as said body and said filter.
17. The capsule of claim 1 wherein said substantially pure polymer material is at least 90% pure by weight.

18. The capsule of claim 1 wherein said substantially pure polymer material is at least 95% pure by weight.

19. The capsule of claim 1 wherein said substantially pure polymer material is at least 97% pure by weight.

20. The capsule of claim 1 wherein said substantially pure polymer material is at least 100% pure by weight.

21. The capsule of claim 1 wherein said substantially pure polymer material is selected from one of PP, PET or PLA.

22. The capsule of claim 1 wherein said substantially pure polymer material for said body includes a barrier material that provides an oxygen barrier between an exterior of said capsule and said interior space.

23. The capsule of claim 22 wherein said barrier material comprises less than 5% of said substantially pure polymer material by weight

24. The capsule of claim 22 wherein said substantially pure polymer material for said body is a multilayered material comprising at least one layer of PP, at least one layer of CPP and at least one layer of barrier material.

25. The capsule of claim 1 wherein said cover is peelably sealed to said body to enable said cover to be at least partially separated from said body following use of said capsule.

26. The capsule of claim 1 wherein said cover includes a hinge, that is permanently sealed at a hinge zone to said body, and a peelable portion that is peelably sealed at a peel zone to said body to enable said cover to be partially separated from said body following use of said capsule while remaining connected at said hinge.

27. A beverage capsule for use in a beverage preparing machine to prepare a beverage product, said beverage capsule comprising:

a body defining an interior space having an opening;

a filter disposed in said interior space to define an ingredients chamber for containing and filtering ingredients for preparing a desired beverage product, said filter being formed of a hydrophobic and non-absorbent polymer material having a basis weight of less than 40 gsm;

ingredients disposed in said ingredients chamber for preparing a desired beverage product; and

a cover disposed on said body to close said opening.

28. The beverage capsule of claim 27 wherein said filter has a basis weight in the range of 10-30 gsm.

29. The beverage capsule of claim 27 wherein said filter has a basis weight of no more than 25 g/m².

30. The beverage capsule of claim 27 wherein said filter has a tensile strength of 100 N/5cm or less in the Machine Direction (MD) and 70 N/5cm or less in the Cross Direction (CD).

31. The beverage capsule of claim 27 wherein said filter has a tensile strength in the range of 20-70 N/5cm in the Machine Direction (MD) and 10-40 N/5cm in the Cross Direction (CD).

32. The beverage capsule of claim 27 wherein said filter has a tensile strength in the range of 20-60 N/5cm in the Machine Direction (MD) and 10-30 N/5cm in the Cross Direction (CD).

33. The beverage capsule of claim 27 wherein said filter has a material tear strength of 15 N or less in the Machine Direction (MD) and 20 N or less in the Cross Direction (CD).

34. The beverage capsule of claim 27 wherein said filter has a material tear strength in the range of 3-10 N in the Machine Direction (MD) and 3-10 N in the Cross Direction (CD).

35. The beverage capsule of claim 27 wherein said filter has an elongation to break value of 50% or less in the Machine Direction (MD) and 40% or less in the Cross Direction (CD).

36. The beverage capsule of claim 27 wherein said filter is formed of bi-component fibers having a CPP core and a PP sheath.

37. The capsule of claim 27 wherein the filter is sealed to said body within said interior space.

38. The capsule of claim 27 wherein said body includes a sidewall and an end wall that define said interior space.

39. The capsule of claim 38 wherein said filter is sealed to said sidewall within said interior space at a location that is in the middle one-third of the distance between said opening and said end wall.

40. The capsule of claim 39 wherein said filter, at its lowest point, is spaced a minimum distance D from said end wall to avoid said filter being contacted by a dispensing system during use of capsule in the machine.

41. The capsule of claim 27 wherein said cover is peelably sealed to said body to enable said cover to be at least partially separated from said body following use of said capsule.

42. The capsule of claim 27 wherein said cover includes a hinge, that is permanently sealed at a hinge zone to said body, and a peelable portion that is peelably sealed at a peel zone to said body to enable said cover to be partially separated from said body following use of said capsule while remaining connected at said hinge.

43. A capsule for containing a food product, the capsule comprising:

a body defining an interior space for containing a food product, said body having an opening for accessing the food product, said opening being surrounded by a flange; and

a cover sealed to said flange to close said opening, wherein said cover includes a hinge, that is permanently sealed at a hinge zone to said flange, and a peelable portion that is peelably sealed at a peel zone to said flange to enable said cover to be opened following use of said capsule while remaining connected at said hinge, wherein said body and said cover are made of the same substantially pure material that is at least 95% of the same type of material by weight.

44. The capsule of claim 43 wherein said substantially pure material is selected from one of aluminum, PP, PET or PLA.

45. The capsule of claim 43 wherein said substantially pure material includes a barrier material that provides an oxygen barrier between an exterior of said capsule and said interior space.

46. The capsule of claim 45 wherein said barrier material comprises less than 5% of said substantially pure material by weight

47. The capsule of claim 45 wherein said substantially pure material is a multilayered material comprising at least one layer of PP, at least one layer of CPP and at least one layer of barrier material.

48. A capsule for containing a food product, the capsule comprising:

a body formed entirely of a substantially pure material, said body defining an interior space for containing a food product, said body having an opening for accessing the food product, said opening being surrounded by a flange; and

a cover formed entirely of the same substantially pure material as said body, said cover being sealed to said flange to close said opening.

49. The capsule of claim 48 wherein said substantially pure material is at least 95% pure by weight.

50. The capsule of claim 48 wherein said substantially pure material is selected from one of aluminum, PP, PET or PLA.

51. The capsule of claim 48 wherein said substantially pure material includes a barrier material that provides an oxygen barrier between an exterior of said capsule and said interior space.

52. The capsule of claim 51 wherein said barrier material comprises less than 5% of said substantially pure material by weight.

53. The capsule of claim 48 wherein said substantially pure material is a multilayered material comprising at least one layer of PP, at least one layer of CPP and at least one layer of barrier material.

54. The capsule of claim 48 wherein said cover is peelably sealed to said flange to enable said cover to be opened following use of said capsule.

55. The capsule of claim 48 wherein said cover includes a hinge, that is permanently sealed at a hinge zone to said flange, and a peelable portion that is peelably sealed at a peel zone to said flange to enable said cover to be opened following use of said capsule while remaining connected at said hinge.

56. A system for making a beverage capsule for use in a beverage preparing machine, the system comprising:

a filter station for sealing a filter to an interior space of a body for the beverage capsule to define an ingredients chamber;

an ingredients station for depositing a desired volume of desired ingredients into said ingredients chamber;

a cover sealing station for sealing a cover to said body.

57. The system of claim 56 wherein said filter has a basis weight of less than 40 gsm.

58. The system of claim 56 wherein said filter is pre-cut to a desired diameter that is larger than the diameter of said interior space.

59. The system of claim 56 further comprising a cover pre-sealing station for sealing a portion of said cover to said body and a MAP station for replacing air in said capsule with an inert gas and sealing the remainder of said cover to said body.

60. The system of claim 59 wherein said cover is sealed to said body to define a hinge zone and a peel zone, wherein said hinge zone has a stronger seal than said peel zone

61. The system of claim 60 wherein said peel zone is formed by sealing a portion of said cover to said body at a first temperature T1 and said hinge zone is formed by sealing the remaining portion of said cover to said body at a second temperature T2, where T2 is a higher temperature than T1.

62. The system of claim 60 wherein said peel zone is formed by sealing a portion of said cover to said body using a first sealing technique that forms a peelable seal and said hinge zone is formed by sealing the remaining portion of said cover to said body using a second sealing technique that is different from the first sealing technique and forms a stronger seal than the peelable seal.

63. A process for making a beverage capsule for use in a beverage preparing machine, the process comprising the steps of:

sealing a filter to an interior surface of a body for the beverage capsule to define an ingredients chamber;

depositing a desired volume of desired ingredients into said ingredients chamber;

sealing a cover to said body to cover said opening.

64. The process of claim 63 wherein said filter has a basis weight of less than 40 gsm.

65. The process of claim 63 wherein said filter is pre-cut to a desired diameter that is larger than the diameter of said interior space.

66. The process of claim 63 further comprising the steps of (i) sealing a portion of said cover to said body and (ii) replacing air in said capsule with an inert gas and (iii) sealing the remainder of said cover to said body.

67. The process of claim 66 wherein said cover is sealed to said body to define a hinge zone and a peel zone, wherein said hinge zone has a stronger seal than said peel zone

68. The process of claim 67 wherein said peel zone is formed by sealing a portion of said cover to said body at a first temperature T1 and said hinge zone is formed by sealing the remaining portion of said cover to said body at a second temperature T2, where T2 is a higher temperature than T1.

69. The process of claim 67 wherein said peel zone is formed by sealing a portion of said cover to said body using a first sealing technique that forms a peelable seal and said hinge zone is formed by sealing the remaining portion of said cover to said body using a second sealing technique that is different from the first sealing technique and forms a stronger seal than the peelable seal.

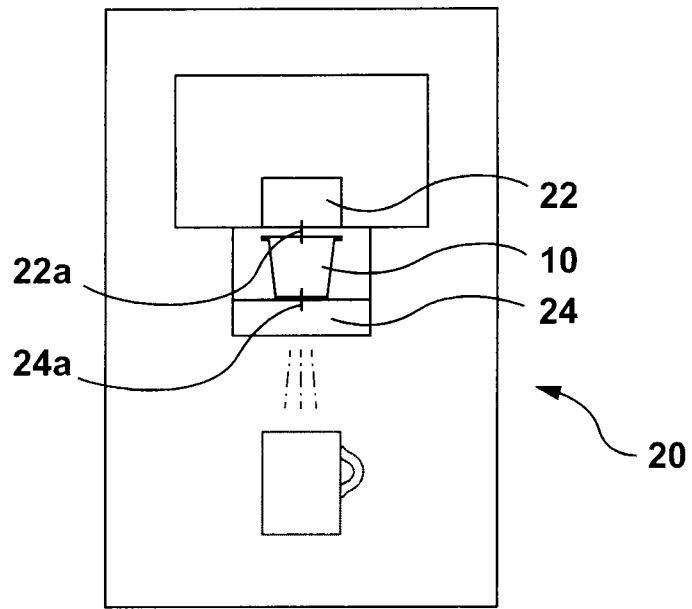


FIG. 1

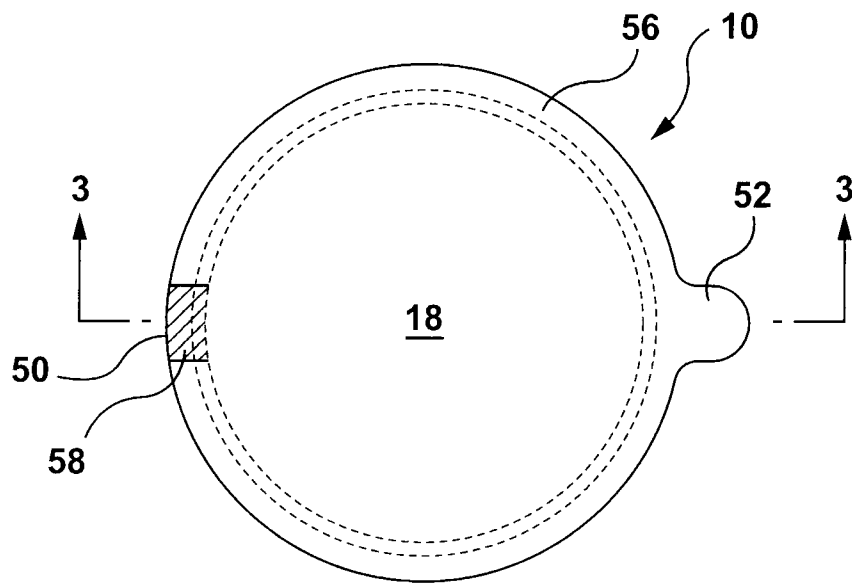


FIG. 2

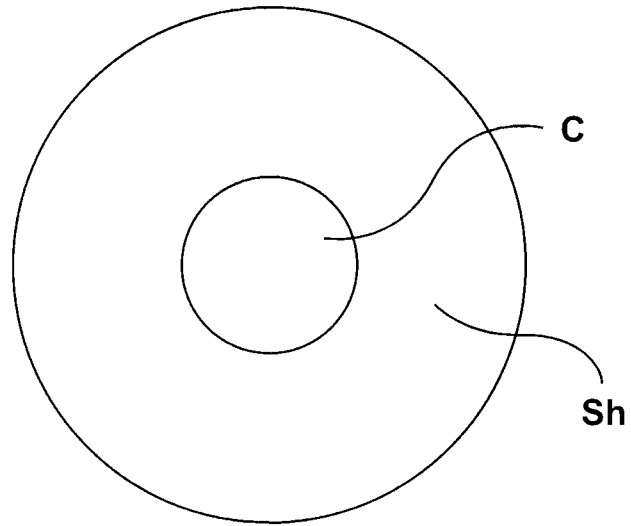


FIG. 5

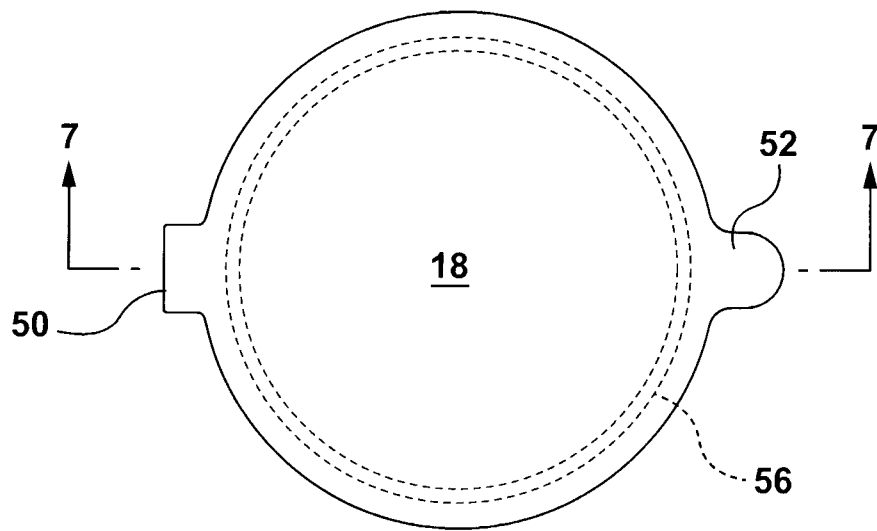


FIG. 6

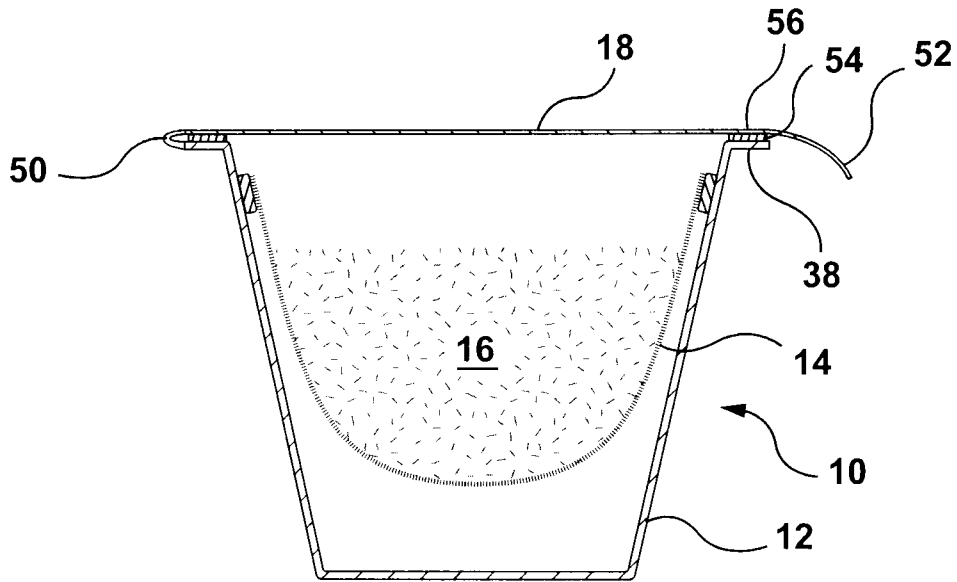


FIG. 7

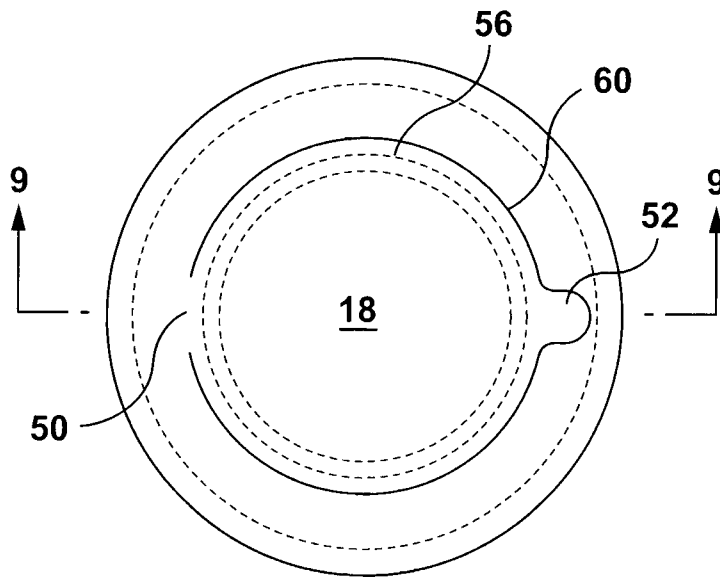


FIG. 8

5 / 10

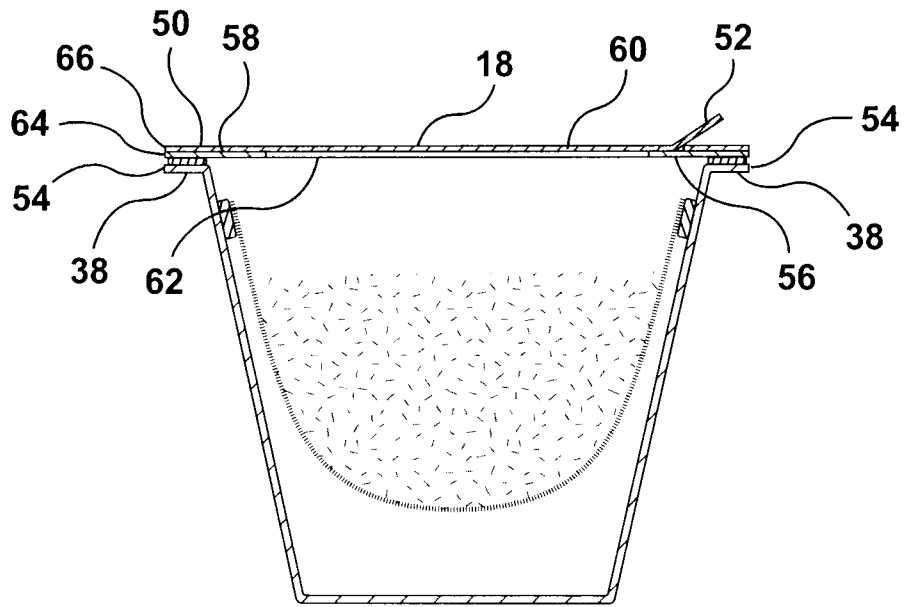


FIG. 9

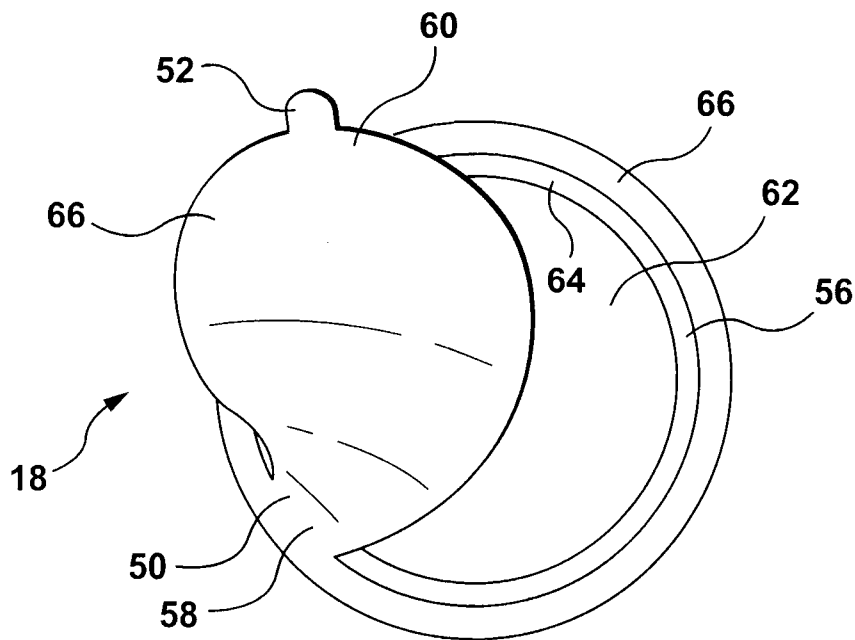


FIG. 10

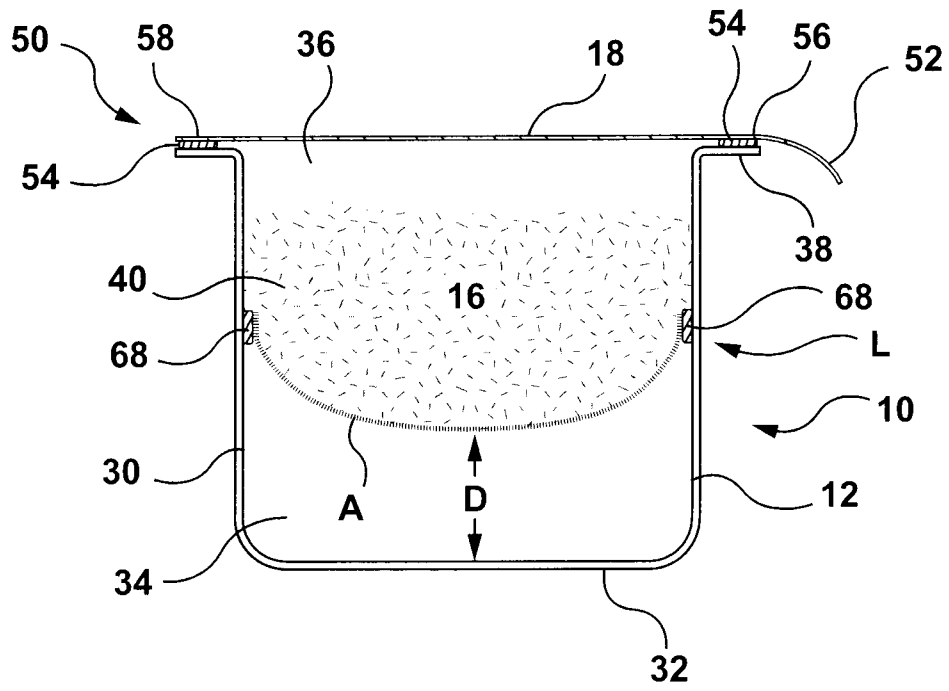


FIG. 11

7 / 10

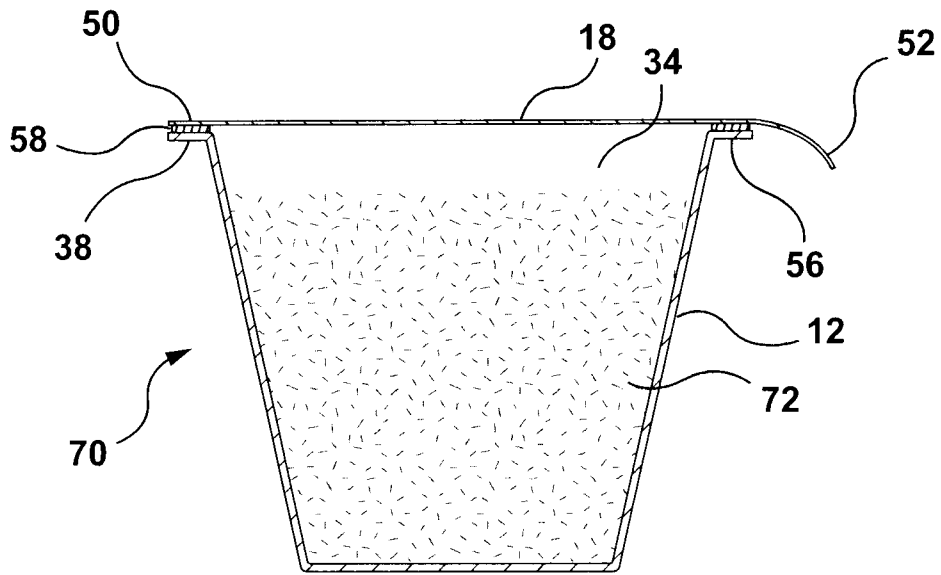


FIG. 12

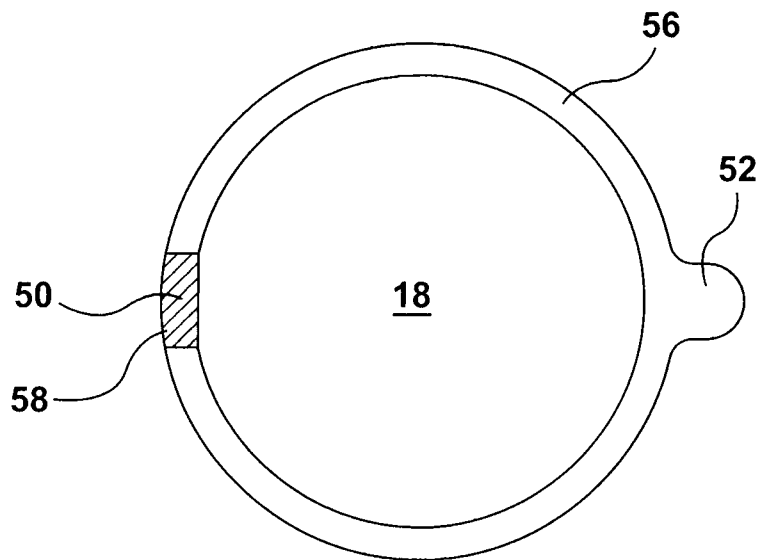


FIG. 13

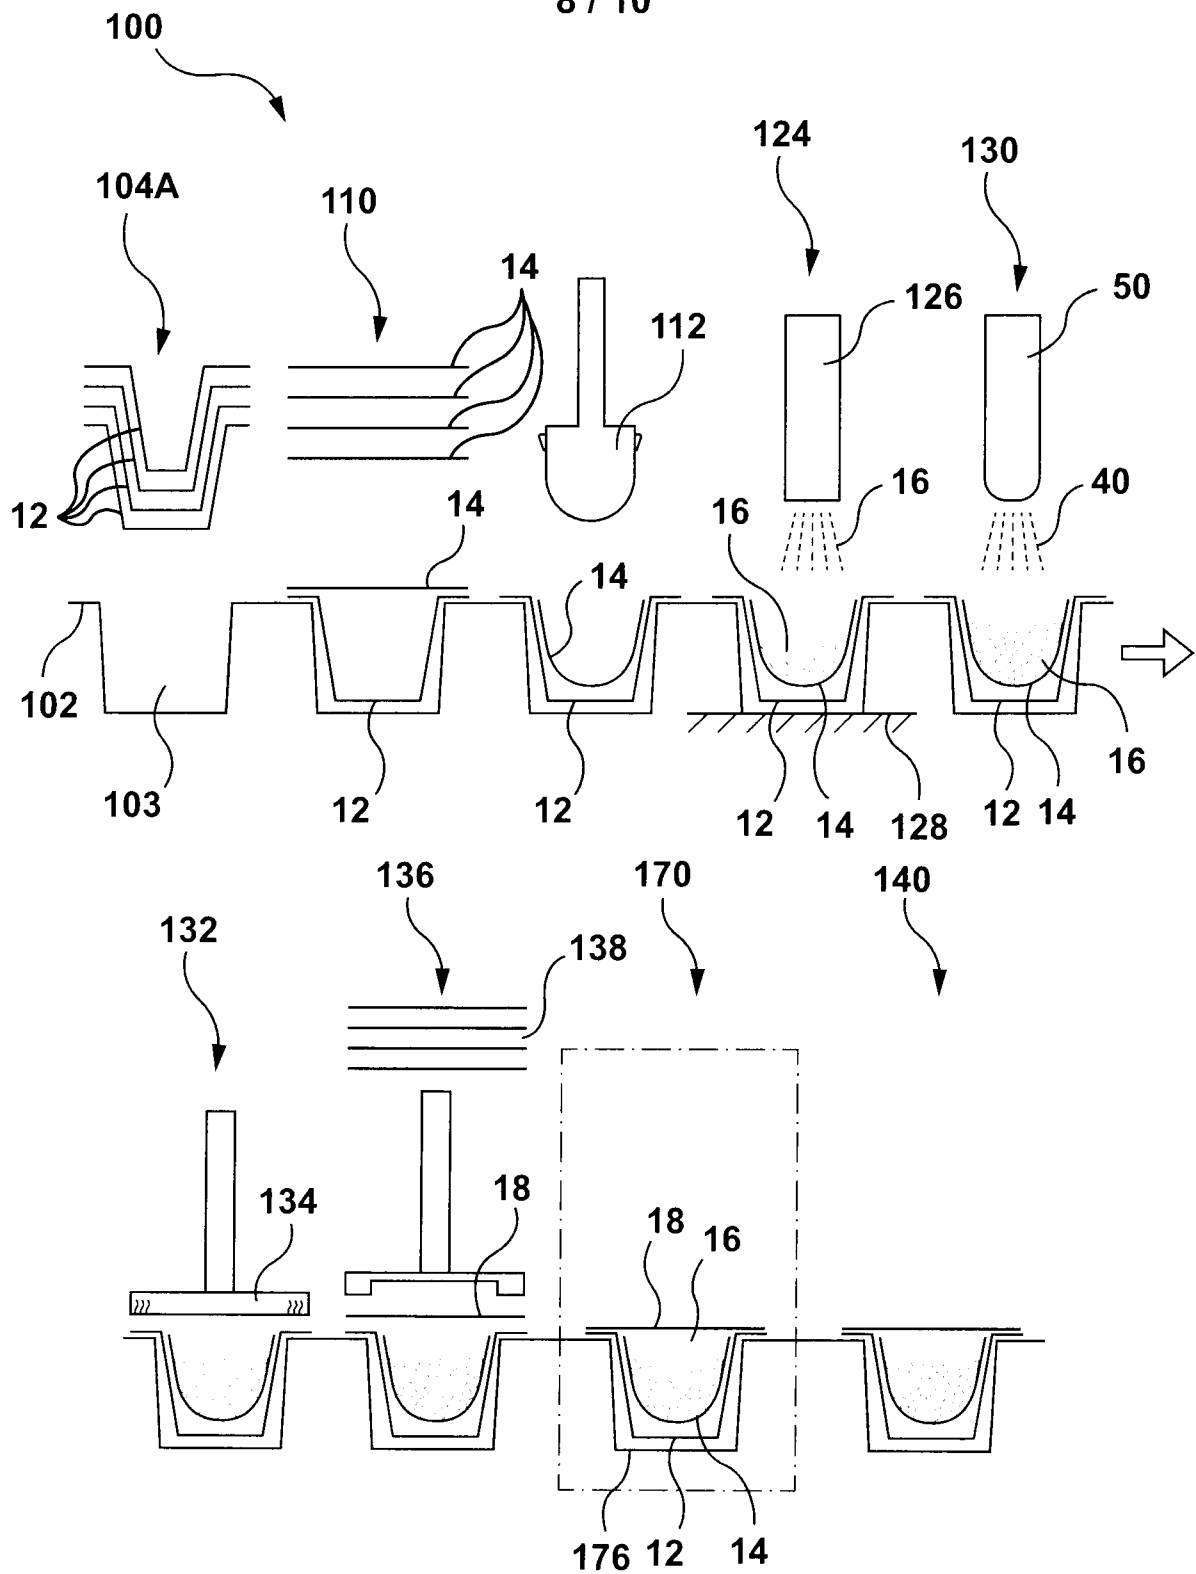


FIG. 14

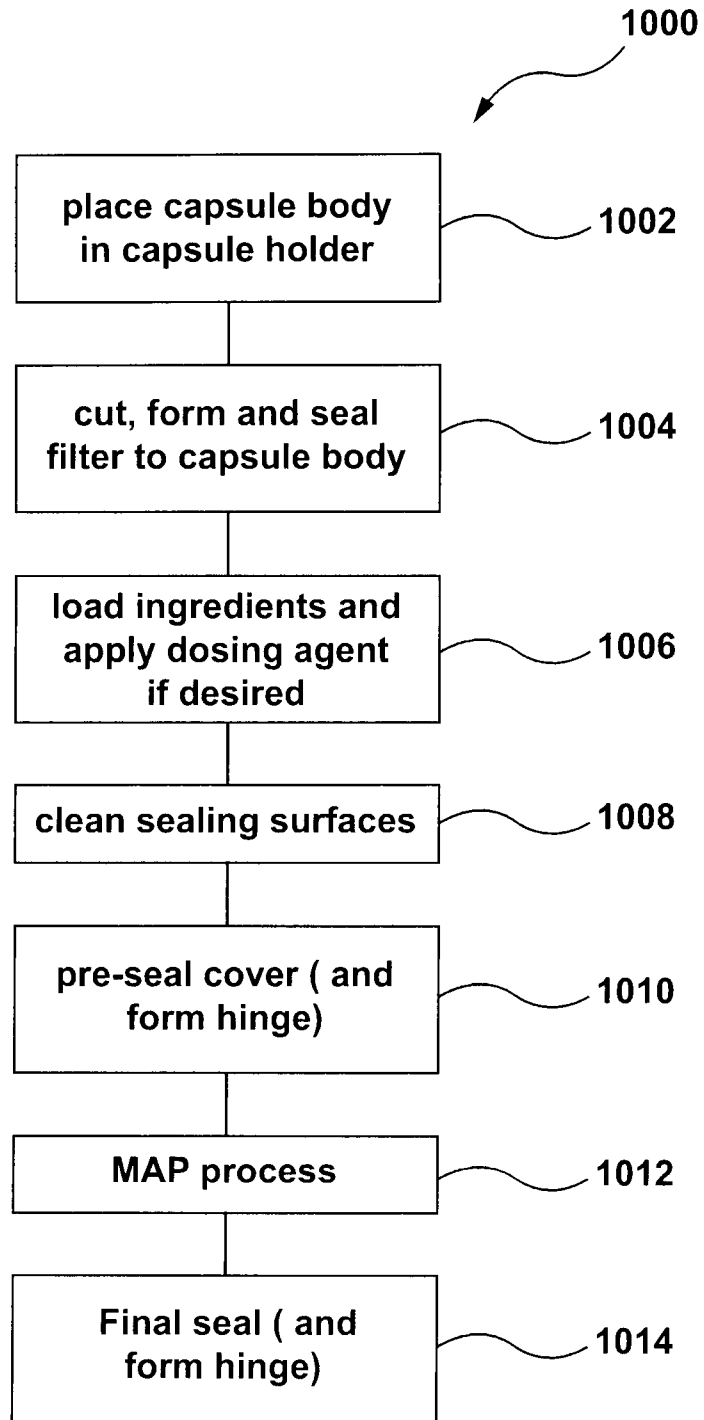


FIG. 15

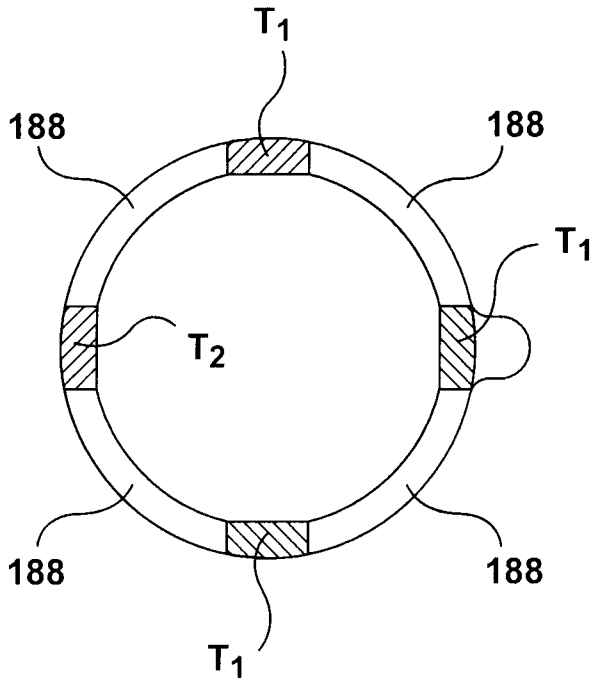


FIG. 16(a)

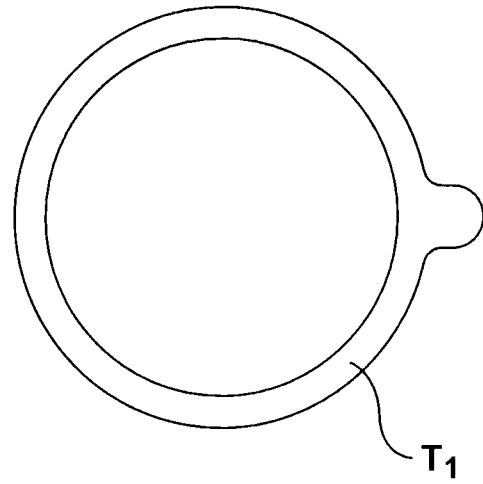


FIG. 16(b)

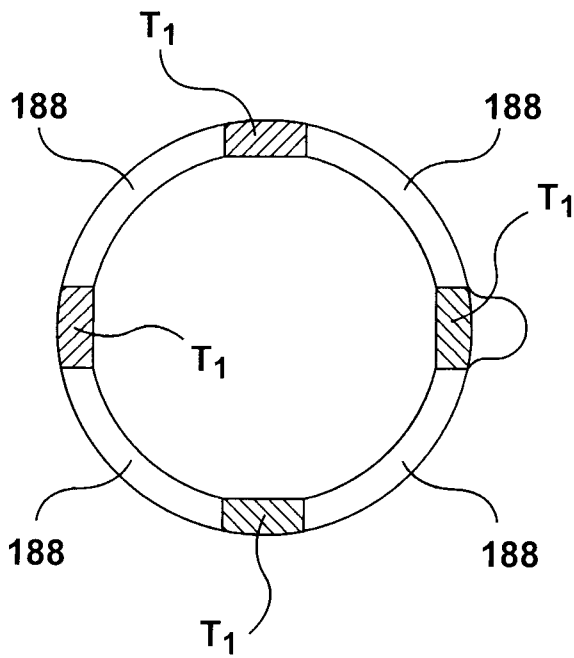


FIG. 17(a)

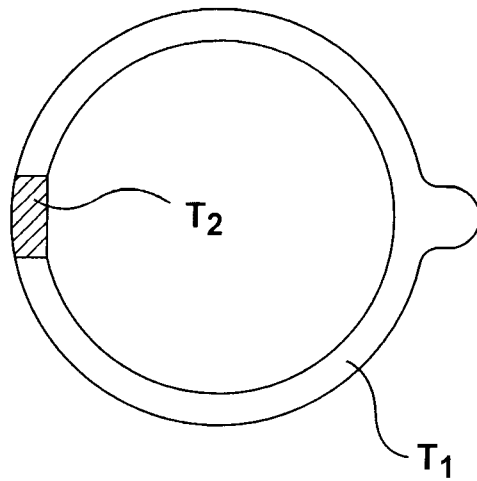


FIG. 17(b)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2019/050504A. CLASSIFICATION OF SUBJECT MATTER
IPC: **B65D 85/804** (2006.01), **B65B 1/02** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: **B65D 85/804** (2006.01), **B65B 1/02** (2006.01), **A47J 31/06** (2006.01), **A47J 31/10** (2006.01), **B01D 27/08** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

Keywords: capsule coffee beverage brew* filter pure polymer recycl* PET PLA same material one material mono-material monolayer injection molded barrier oxygen hydrophobic non-absorbent tensile strength peel hinge cover lid top station diameter bunch overlap pleat* filter.
Databases: Questel-Orbit, Canadian Patent Database.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US2017290460A1, (KARLES et al.) 12 October 2017 (12-10-2017) *Whole Document*	1, 4 – 10, 12, 13, 16, 17 – 25 2, 3, 11, 14, 15, 26, 43 – 47, 51 – 53, 55
X Y	US7946217B2, (FAVRE et al.) 24 May 2011 (24-05-2011) *Whole Document*	48 – 50, 54 51 – 53
X Y	CA2943295A1, (TROMBETTA et al.) 24 September 2015 (24-09-2015) *Whole Document*	27 – 29, 30 – 40 2, 3, 11, 14, 15, 41, 42, 57, 64
Y	US6959832B1, (SAWADA et al.) 01 November 2005 (01-11-2005) *Whole Document*	26, 41, 42, 43 – 47, 55, 60 – 62, 67 – 69
X Y	US20170259989A1, (TROMBETTA et al.) 14 September 2017 (14-09-2017) *Whole Document*	56, 59, 63, 66 57, 58, 60 – 62, 64, 65, 67 – 69

 Further documents are listed in the continuation of Box C. See patent family annex.

* "A" "E" "L" "O" "P"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier application or patent but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	"T" "X" "Y" "&"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
--------------------------------------	--	--------------------------	--

Date of the actual completion of the international search
20 June 2019 (20-06-2019)Date of mailing of the international search report
03 July 2019 (03-07-2019)Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 819-953-2476Authorized officer

Tanya Hanham (819) 639-7854

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2019/050504

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US20140127364A1, (FU et al.) 08 May 2014 (08-05-2014) *Whole Document*	58, 65
P, X	EP3348495A1, (AFFOLTER et al.) 18 July 2018 (18-07-2018) *Whole Document*	1, 12, 13, 16 – 23, 25, 48 – 54
A	WO201706229A1, (FACCHINI) 12 January 2017 (12-01-2017) *Whole Document*	
A	AU2015274023A1, (PATON et al.) 21 January 2016 (21-01-2016) *Whole Document*	
A	US20170347825A1, (WALTER) 07 December 2017 (07-12-2017) *Whole Document*	
A	EP2607269A2, (LAFUENTE) 26 June 2013 (26-06-2013) *Whole Document*	

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claim Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

The claims are directed to a plurality of inventive concepts as follows:

Group A - Claims 1 - 26 are directed to a beverage capsule for use in a beverage preparing machine comprising a filter formed entirely of the same substantially pure polymer material as said body;

Group B - Claims 27 - 42 are directed to a beverage capsule for use in a beverage preparing machine comprising a filter being formed of a hydrophobic and non-absorbent polymer material having a basis weight of less than 40 gsm;

Group C - Claims 43 - 55 are directed to a capsule comprising a cover sealed to a flange; and

Group D - Claims 56 - 69 are directed to a system and a process for making a beverage capsule comprising sealing a filter, depositing ingredients, and sealing a cover.

The claims must be limited to one inventive concept as set out in PCT Rule 13.

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2019/050504

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2017290460A1	12 October 2017 (12-10-2017)	US9963291B2	08 May 2018 (08-05-2018)
		CN109068877A	21 December 2018 (21-12-2018)
		EP3439513A1	13 February 2019 (13-02-2019)
		JP2019513638A	30 May 2019 (30-05-2019)
		US2018229924A1	16 August 2018 (16-08-2018)
		WO2017176473A1	12 October 2017 (12-10-2017)
US7946217B2	24 May 2011 (24-05-2011)	US2006174769A1	10 August 2006 (10-08-2006)
		AR047210A1	11 January 2006 (11-01-2006)
		AR083945A2	10 April 2013 (10-04-2013)
		AT318099T	15 March 2006 (15-03-2006)
		AT366536T	15 August 2007 (15-08-2007)
		AU2004257463A1	27 January 2005 (27-01-2005)
		AU2004257463B2	10 September 2009 (10-09-2009)
		AU2009245857A1	07 January 2010 (07-01-2010)
		AU2009245857B2	15 September 2011 (15-09-2011)
		BRPI0412770A	26 September 2006 (26-09-2006)
		BRPI0412770B1	01 October 2013 (01-10-2013)
		CA2531544A1	27 January 2005 (27-01-2005)
		CA2531544C	01 May 2012 (01-05-2012)
		CN1826072A	30 August 2006 (30-08-2006)
		CN1826072B	09 June 2010 (09-06-2010)
		CN101843440A	29 September 2010 (29-09-2010)
		CN101843440B	14 December 2011 (14-12-2011)
		DE60303629D1	27 April 2006 (27-04-2006)
		DE60303629T2	14 December 2006 (14-12-2006)
		DE602004007524D1	23 August 2007 (23-08-2007)
		DE602004007524T2	13 March 2008 (13-03-2008)
		DK1500357T3	19 June 2006 (19-06-2006)
		DK1646304T3	12 November 2007 (12-11-2007)
		EP1500357A1	26 January 2005 (26-01-2005)
		EP1500357B1	22 February 2006 (22-02-2006)
		EP1646304A1	19 April 2006 (19-04-2006)
		EP1646304B1	11 July 2007 (11-07-2007)
		ES2257621T3	01 August 2006 (01-08-2006)
		ES2289522T3	01 February 2008 (01-02-2008)
		HK1092668A1	17 December 2010 (17-12-2010)
		HK1146202A1	24 August 2012 (24-08-2012)
		IL172887D0	11 June 2006 (11-06-2006)
		IL172887A	30 November 2010 (30-11-2010)
		IL199864A	27 June 2013 (27-06-2013)
		JP2006528507A	21 December 2006 (21-12-2006)
		JP4920411B2	18 April 2012 (18-04-2012)
		KR20060039444A	08 May 2006 (08-05-2006)
		KR101146053B1	14 May 2012 (14-05-2012)
		MXPA06000727A	25 May 2006 (25-05-2006)
		MX2008004237A	11 February 2009 (11-02-2009)
		NO20060647L	09 February 2006 (09-02-2006)
		NO339827B1	06 February 2017 (06-02-2017)
		PT1500357E	31 July 2006 (31-07-2006)
		PT1646304E	27 September 2007 (27-09-2007)
		RU2006105503A	10 October 2007 (10-10-2007)
		RU2349244C2	20 March 2009 (20-03-2009)
		SI1646304T1	31 December 2007 (31-12-2007)
		TW200505760A	16 February 2005 (16-02-2005)
		TWI276582B	21 March 2007 (21-03-2007)
		UA89945C2	25 March 2010 (25-03-2010)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2019/050504

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
		WO2005006927A1 ZA200600603B	27 January 2005 (27-01-2005) 30 May 2007 (30-05-2007)
CA2943295A1	24 September 2015 (24-09-2015)	US2018118450A1 WO2015139140A1	03 May 2018 (03-05-2018) 24 September 2015 (24-09-2015)
US6959832B1	01 November 2005 (01-11-2005)	AT303957T AT310684T BR9914469A BR9916966A BR9916966B1 BRPI9914469B8 CA2345796A1 CA2345796C CA2354005A1 CA2354005C CN1320096A CN1108964C CN1329565A CN1108965C DE69927187D1 DE69927187T2 DE69928572D1 DE69928572T2 EP1162156A1 EP1162156A4 EP1162156B1 EP1164093A1 EP1164093A4 EP1164093B1 HK1038338A1 HK1044923A1 JP2000203655A JP4090608B2 JP2000109141A JP4190625B2 JP2000185774A JP4231912B2 JP2000229674A JP4231913B2 JP2000229673A JP4235738B2 JP2000203653A JP4235739B2 JP2000203656A JP4256512B2 JP2000219278A US6669046B1 WO0018657A1 WO0034149A1	15 September 2005 (15-09-2005) 15 December 2005 (15-12-2005) 22 May 2001 (22-05-2001) 06 November 2001 (06-11-2001) 13 January 2009 (13-01-2009) 28 June 2016 (28-06-2016) 06 April 2000 (06-04-2000) 08 January 2008 (08-01-2008) 15 June 2000 (15-06-2000) 27 November 2007 (27-11-2007) 31 October 2001 (31-10-2001) 21 May 2003 (21-05-2003) 02 January 2002 (02-01-2002) 21 May 2003 (21-05-2003) 13 October 2005 (13-10-2005) 29 June 2006 (29-06-2006) 29 December 2005 (29-12-2005) 27 July 2006 (27-07-2006) 12 December 2001 (12-12-2001) 15 May 2002 (15-05-2002) 23 November 2005 (23-11-2005) 19 December 2001 (19-12-2001) 02 January 2003 (02-01-2003) 07 September 2005 (07-09-2005) 21 January 2004 (21-01-2004) 21 April 2006 (21-04-2006) 25 July 2000 (25-07-2000) 28 May 2008 (28-05-2008) 18 April 2000 (18-04-2000) 03 December 2008 (03-12-2008) 04 July 2000 (04-07-2000) 04 March 2009 (04-03-2009) 22 August 2000 (22-08-2000) 04 March 2009 (04-03-2009) 22 August 2000 (22-08-2000) 11 March 2009 (11-03-2009) 25 July 2000 (25-07-2000) 11 March 2009 (11-03-2009) 25 July 2000 (25-07-2000) 22 April 2009 (22-04-2009) 08 August 2000 (08-08-2000) 30 December 2003 (30-12-2003) 06 April 2000 (06-04-2000) 15 June 2000 (15-06-2000)
US2017259989A1	14 September 2017 (14-09-2017)	CA2833096A1 CA2833096C EP2730523A1 EP2730523B1 US2014141128A1 US9688465B2	12 May 2014 (12-05-2014) 31 May 2016 (31-05-2016) 14 May 2014 (14-05-2014) 06 April 2016 (06-04-2016) 22 May 2014 (22-05-2014) 27 June 2017 (27-06-2017)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CA2019/050504

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2014127364A1	08 May 2014 (08-05-2014)	CA2832794A1 CA2832794C US2017297811A1	07 May 2014 (07-05-2014) 22 March 2016 (22-03-2016) 19 October 2017 (19-10-2017)
EP3348495A1	18 July 2018 (18-07-2018)	None	
WO201706229	12 January 2017 (11-01-2017)	ITUB20151957A1	02 January 2017 (02-01-2017)
AU2015274023A1	21 January 2016 (21-01-2016)	AU2015274023B2	17 November 2016 (17-11-2016)
US2017347825A1	07 December 2017 (07-12-2017)	AR102684A1 AU2015348852A1 BR112017008337A2 CN107000927A EA201790612A1 EP3221237A1 JP2017537693A WO2016078866A1	15 March 2017 (15-03-2017) 11 May 2017 (11-05-2017) 20 February 2018 (20-02-2018) 01 August 2017 (01-08-2017) 31 October 2017 (31-10-2017) 27 September 2017 (27-09-2017) 21 December 2017 (21-12-2017) 26 May 2016 (26-05-2016)
EP2607269A2	26 June 2013 (26-06-2013)	EP2607269B1 ES2351835A1 ES2351835B1 ES2538801T3 WO2012022819A2 WO2012022819A3	25 February 2015 (25-02-2015) 11 February 2011 (11-02-2011) 16 December 2011 (16-12-2011) 24 June 2015 (24-06-2015) 23 February 2012 (23-02-2012) 05 April 2012 (05-04-2012)