



(51) International Patent Classification:

G06F 3/01 (2006.01) G06T 19/00 (2011.01)
G02B 27/01 (2006.01) G06F 1/16 (2006.01)

(21) International Application Number:

PCT/US2023/019745

(22) International Filing Date:

25 April 2023 (25.04.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/661,498 29 April 2022 (29.04.2022) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 17/661,498 (CON)
Filed on 29 April 2022 (29.04.2022)

(71) Applicant: SNAP INC. [US/US]; 3000 31st Street, Santa Monica, California 90405 (US).


(72) Inventors: PATTON, Russell Douglas; 3000 31st Street, Santa Monica, California 90405 (US). RODRIGUEZ II, Jonathan M.; 3000 31st Street, Santa Monica, California 90405 (US).

(74) Agent: PERDOK, Monique M. et al.; P.O. Box 2938, Minneapolis, Minnesota 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: AR/VR ENABLED CONTACT LENS

FIG. 5A

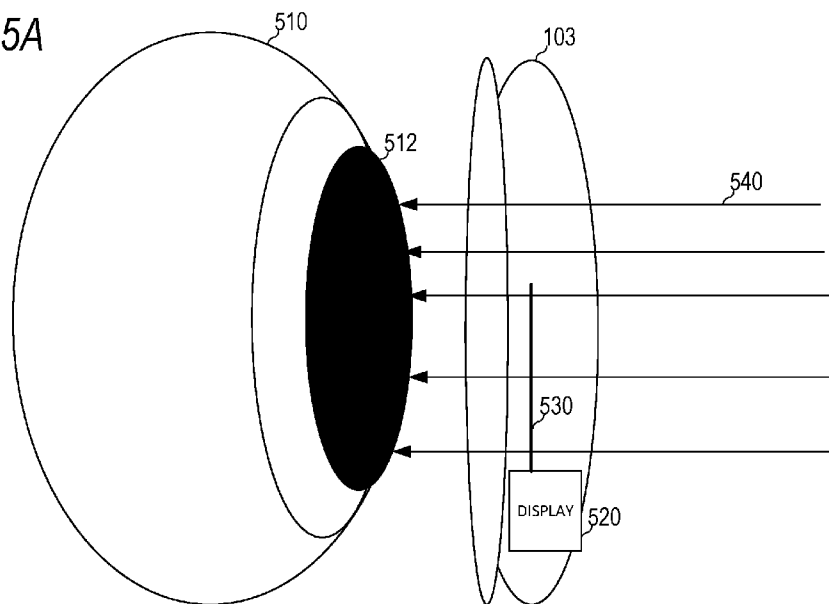

(57) Abstract: Methods and systems are disclosed for performing operations for displaying virtual content on a contact lens. The operations comprise causing the contact lens to operate in a first display mode to allow unobstructed light associated with a real-world environment to be received by a pupil of a user; detecting a condition associated with display of virtual content; selecting between a second display mode and a third display mode as a new display mode in which to operate the contact lens, the second display mode obstructing a portion of the light associated with a real-world environment received by the pupil with the virtual content, the third display mode obstructing all of the light associated with a real-world environment received by the pupil with the virtual content; and transitioning the contact lens from operating in the first display mode to operating in the new display mode in response to detecting the condition.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

AR/VR ENABLED CONTACT LENS

PRIORITY CLAIM

[0001] This application claims the benefit of U.S. Patent Application Serial No. 17/661,498, filed on April 29, 2022, which is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates generally to providing augmented reality (AR) experiences using a messaging application.

BACKGROUND

[0003] AR is a modification of a virtual environment. For example, in Virtual Reality (VR), a user is completely immersed in a virtual world, whereas in AR, the user is immersed in a world where virtual objects are combined or superimposed on the real world. An AR system aims to generate and present virtual objects that interact realistically with a real-world environment and with each other. Examples of AR applications can include single or multiple player video games, instant messaging systems, and the like.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0004] In the drawings, which are not necessarily drawn to scale, like numerals may describe similar components in different views. To easily identify the discussion of any particular element or act, the most significant digit or digits in a reference number refer to the figure number in which that element is first introduced. Some nonlimiting examples are illustrated in the figures of the accompanying drawings in which:

[0005] FIG. 1 is a diagrammatic representation of a networked environment in which the present disclosure may be deployed, in accordance with some examples.

[0006] FIG. 2 is a diagrammatic representation of a messaging client application, in accordance with some examples.

[0007] FIG. 3 is a diagrammatic representation of a data structure as maintained in a database, in accordance with some examples.

[0008] FIG. 4 is a diagrammatic representation of a message, in accordance with some examples.

[0009] FIGS. 5A, 5B, and 5C are block diagrams showing an example contact lens mode selection system, according to some examples.

[0010] FIGS. 6, 7, and 8 are diagrammatic representations of various implementations of the contact lens mode selection system, in accordance with some examples.

[0011] FIG. 9 is a flowchart illustrating example operations of the contact lens mode selection system, according to some examples.

[0012] FIG. 10 is a diagrammatic representation of a machine in the form of a computer system within which a set of instructions may be executed for causing the machine to perform any one or more of the methodologies discussed herein, in accordance with some examples.

[0013] FIG. 11 is a block diagram showing a software architecture within which examples may be implemented.

[0014] FIG. 12 is a user interface generated by the contact lens mode selection system, in accordance with some examples.

DETAILED DESCRIPTION

[0015] The description that follows includes systems, methods, techniques, instruction sequences, and computing machine program products that embody illustrative examples of the disclosure. In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide an understanding of various examples. It will be evident, however, to those skilled in the art, that examples may be practiced without these specific details. In general, well-known instruction instances, protocols, structures, and techniques are not necessarily shown in detail.

[0016] Typical AR and VR systems are designed to present virtual content to a user by utilizing a display that is held or worn by the user. For example, an AR system can be provided in which a user wears AR glasses, and virtual content is presented in lenses of the AR glasses through which the user can also see the real-world environment. A VR system usually involves wearing a headset so that the user can only perceive the virtual content and is fully immersed in the virtual world without seeing their real-world surroundings. While such systems generally work well, users in these systems need to switch between physical devices to access the AR and VR content. Namely, a user who desires to access VR content needs to wear a headset specially designed to display VR content. When such a user later desires to access AR content, the user needs to remove the headset and replace the headset with specially designed AR glasses. These tasks can be daunting and distracting and take away from the overall use and enjoyment of such systems. Also, switching from an AR task to a VR task or vice versa can consume a great deal of system resources (e.g., memory and processing resources). For example, a task that was initially in one space (e.g., AR or VR) may need to be transferred from one device to another to continue performing such a task in another space (e.g., AR or VR).

[0017] The disclosed techniques improve the efficiency of using the electronic device by providing a single device (e.g., a contact lens) that can be worn by the user and can seamlessly transition between various spaces (e.g., AR, VR, or no display of virtual content). In some examples, the seamless transition can be based on automatically determined conditions, such as power loss or determining that the contact lens has entered a geofence or a particular geographical location. In some examples, the seamless transition can be based on user input requesting a particular operating mode, such as AR, VR, or no display of virtual content. The enabling of any one of a plurality of display modes to be provided on the same device avoids the need for manually switching between different physical devices to access an AR or VR experience.

[0018] In some examples, to switch between the various spaces (e.g., from no display of virtual content to a VR experience), a display is provided on the contact lens that is movable into a plurality of display positions, such as using a physical track or arm. For example, a first position of the plurality of display positions can correspond to a first display mode in which light of a real-world environment is received by a user's pupil with no obstruction. In this first display position, the display fails to cover any portion of the pupil. A second position of the plurality of display positions can correspond to a second display mode in which the display covers less than all of the pupil. This mode can be suitable for accessing or presenting an AR experience to a user. A third position of the plurality of display positions can correspond to a third display mode in which the display completely covers the pupil. This mode can be suitable for accessing or presenting a VR experience to the user.

[0019] In some examples, the control of how much outside light (e.g., light representing the real-world environment) can be performed using other components integrated into the contact lens. For example, the other components can include any combination of a switchable element that can be switched into different transparency states; a polarized mirror which selectively and partially or fully reflects light representing virtual content from a projector towards the pupil; and/or one or more mirrored slats which can be selectively rotated to partially or fully reflect light representing the virtual content from a projector towards the pupil.

[0020] The contact lenses reduce the overall complexities involved with providing AR or VR experiences on a device. This improves the overall experience of the user in using the electronic device and reduces the overall amount of system resources needed to accomplish a task.

[0021] Although the examples are described with respect a physical contact lens it is possible for the disclosed techniques to also apply to any other wearable lenses (e.g., hard or soft smart contact lenses).

NETWORKED COMPUTING ENVIRONMENT

[0022] FIG. 1 is a block diagram showing an example messaging system 100 for exchanging data (e.g., messages and associated content) over a network. The messaging system 100 includes multiple instances of a client device 102, each of which hosts a number of applications, including a messaging client 104 and other external applications 109 (e.g., third-party applications). Each messaging client 104 is communicatively coupled to other instances of the messaging client 104 (e.g., hosted on respective other client devices 102), a messaging server system 108, and external app(s) servers 110 via a network 112 (e.g., the Internet). A messaging client 104 can also communicate with locally-hosted third-party applications, such as external apps 109 using Application Programming Interfaces (APIs).

[0023] The client device 102 may operate as a standalone device or may be coupled (e.g., networked) to other machines. In a networked deployment, the client device 102 may operate in the capacity of a server machine or a client machine in a server-client network environment, or as a peer machine in a peer-to-peer (or distributed) network environment. The client device 102 may comprise, but not be limited to a server computer, a client computer, a personal computer (PC), a tablet computer, a laptop computer, a netbook, a set-top box (STB), a personal digital assistant (PDA), an entertainment media system, a cellular telephone, a smartphone, a mobile device, a wearable device (e.g., a smartwatch), a smart home device (e.g., a smart appliance), other smart devices, a web appliance, a network router, a network switch, a network bridge, or any machine capable of executing the disclosed operations. Further, while only a single client device 102 is illustrated, the term “client device” shall also be taken to include a collection of machines that individually or jointly execute the disclosed operations.

[0024] In some examples, the client device 102 can include AR glasses or an AR headset in which virtual content is displayed within lenses of the glasses while a user views a real-world environment through the lenses. For example, an image can be presented on a transparent display that allows a user to simultaneously view content presented on the display and real-world objects.

[0025] In some examples, the client device 102 can include one or more contact lenses 103. Each contact lens 103 or only one of the one or more contact lenses 103 can include electronic components. The electronic components can include a processor, a memory, a display (display screen), a projector, a communication device (e.g., BLUETOOTH, WiFi, cellular, or other short-range or long-range communication device), a battery, solar panel, location component (e.g., GPS component), and/or a camera. The electronic components can also include a waveguide or light guide element (e.g., a set of mirrored slats, a polarized mirror, a switchable element, and so forth). The waveguide or light guide element can selectively allow or prevent light associated with a real-world environment to pass through and be received by a pupil of a user or wearer of the contact lens 103. The contact lens 103 can include any one or combination of components of a machine 1000 (FIG. 10).

[0026] In some examples, the contact lens 103 is a soft and disposable contact lens. In some cases, the contact lens 103 is a hard contact lens. The contact lens 103, when placed in a case, can receive electromagnetic energy (inductance energy) from a power source included in the case and can recharge a battery of the contact lens 103 using the electromagnetic energy. In some examples, the contact lens 103 can include a light emitting diode (LED) that can change color to represent different statuses of the contact lens 103 including a battery charge level, an activity mode (e.g., representing whether an AR or VR experience is currently active on the contact lens 103), and/or whether a camera of the contact lens 103 is currently recording a video feed captured by the camera. In some examples, the contact lens 103 is automatically turned on when the contact lens 103 physically touches or makes contact with a body part (e.g., an eyeball, a finger, and so forth). Specifically, the contact lens 103 can include an electronic component (e.g., a capacitive element) that is engaged or activated when a capacitance is changed as a result of capacitance associated with the body part touching the electronic component. For example, a touch screen can be integrated on a periphery or at any suitable location on the contact lens 103. When the touch screen receives touch input from a user (e.g., when the touch screen of the

contact lens 103 makes contact with an eyeball of the user), the touch screen instructs the processing device of the contact lens 103 to turn ON the contact lens 103 (e.g., switch the contact lens 103 from a standby state in which very lower power is used, just enough to power the touch screen, to an active state in which all of the components including a display component and communication device components are powered up).

[0027] When the contact lens 103 is in the active mode (e.g., as a result of being placed physically on an eyeball), the contact lens 103 can be placed into one of three display modes. A first of the three display modes can be a normal vision mode in which unobstructed light representing a real-world environment is received by a pupil of an eyeball on which the contact lens 103 is placed. In this mode, light representing virtual content is prevented from being received by the pupil. A second of the three display modes can be an AR display mode. In the AR display mode, some but not all of the light associated with the real-world environment is obstructed by one or more virtual elements (e.g., graphics, virtual content, or other electronically generated visual content). In this way, the pupil can receive both light associated with the real-world environment and light associated with the virtual content, which results in a perception that the virtual content is incorporated in the real-world environment. A third of the three display modes can be a VR display mode. In the VR display mode, all of the light associated with the real-world environment is obstructed by one or more virtual elements (e.g., graphics, virtual content, or other electronically generated visual content). In this way, the pupil can receive only light associated with the virtual content and is prevented from receiving light associated with the real-world environment. This results in a perception that the user is in a virtual environment.

[0028] In some examples, the contact lens 103 can communicate over a short-range or long-range communication path with an external device or another client device 102 (e.g., a mobile device, an eyewear device, or other headset device). For example, the external device can include a camera that captures a video feed of a real-world environment. The external device can

transmit a real-time video feed of the real-world environment to the contact lens 103 via the communication device of the contact lens 103. The contact lens 103 can receive the real-time video feed and integrate or incorporate at least some portion of the real-time video feed in the display of the contact lens 103 or projection device to provide light representing the real-time video feed of the real-world environment to the pupil of the user. In some examples, the contact lens 103 can communicate the external device via the messaging client 104, which can be executed on the contact lens 103 and the external device.

[0029] In some examples, the external device can include a camera that captures a video feed of a real-world environment. The external device can generate an augmented reality experience in which one or more augmented reality elements are added to a real-time video feed of the real-world environment. The combined real-time video feed (including the one or more augmented reality elements) can be transmitted to the contact lens 103 via the communication device of the contact lens 103. The contact lens 103 can receive the real-time video feed and integrate or incorporate at least some portion of the real-time video feed in the display of the contact lens 103 or projection device to provide light representing the real-time video feed of the real-world environment to the pupil of the user to provide the augmented reality experience.

[0030] In some examples, the contact lens 103 can include a camera that captures a video feed of a real-world environment. The contact lens 103 can transmit a real-time video feed of the real-world environment to an external device (e.g., a mobile phone) via the communication device of the contact lens 103. The external device can receive the real-time video feed and integrate or incorporate at least some portion of the real-time video feed in a display or projection device to provide light representing the real-time video feed of the real-world environment together with one or more augmented reality elements.

[0031] A messaging client 104 is able to communicate and exchange data with other messaging clients 104 and with the messaging server system 108

via the network 112. The data exchanged between messaging clients 104, and between a messaging client 104 and the messaging server system 108, includes functions (e.g., commands to invoke functions) as well as payload data (e.g., text, audio, video, or other multimedia data).

[0032] The messaging server system 108 provides server-side functionality via the network 112 to a particular messaging client 104. While certain functions of the messaging system 100 are described herein as being performed by either a messaging client 104 or by the messaging server system 108, the location of certain functionality either within the messaging client 104 or the messaging server system 108 may be a design choice. For example, it may be technically preferable to initially deploy certain technology and functionality within the messaging server system 108 but to later migrate this technology and functionality to the messaging client 104 where a client device 102 has sufficient processing capacity.

[0033] The messaging server system 108 supports various services and operations that are provided to the messaging client 104. Such operations include transmitting data to, receiving data from, and processing data generated by the messaging client 104. This data may include message content, client device information, geolocation information, media augmentation and overlays, message content persistence conditions, social network information, and live event information, as examples. Data exchanges within the messaging system 100 are invoked and controlled through functions available via user interfaces (UIs) of the messaging client 104.

[0034] Turning now specifically to the messaging server system 108, an API server 116 is coupled to, and provides a programmatic interface to, application servers 114. The application servers 114 are communicatively coupled to a database server 120, which facilitates access to a database 126 that stores data associated with messages processed by the application servers 114. Similarly, a web server 128 is coupled to the application servers 114 and provides web-based interfaces to the application servers 114. To this

end, the web server 128 processes incoming network requests over the Hypertext Transfer Protocol (HTTP) and several other related protocols.

[0035] The API server 116 receives and transmits message data (e.g., commands and message payloads) between the client device 102 and the application servers 114. Specifically, the API server 116 provides a set of interfaces (e.g., routines and protocols) that can be called or queried by the messaging client 104 in order to invoke functionality of the application servers 114. The API server 116 exposes various functions supported by the application servers 114, including account registration; login functionality; the sending of messages, via the application servers 114, from a particular messaging client 104 to another messaging client 104; the sending of media files (e.g., images or video) from a messaging client 104 to a messaging server 118, and for possible access by another messaging client 104; the settings of a collection of media data (e.g., story); the retrieval of a list of friends of a user of a client device 102; the retrieval of such collections; the retrieval of messages and content; the addition and deletion of entities (e.g., friends) to an entity graph (e.g., a social graph); the location of friends within a social graph; and opening an application event (e.g., relating to the messaging client 104).

[0036] The application servers 114 host a number of server applications and subsystems, including, for example, a messaging server 118, an image processing server 122, and a social network server 124. The messaging server 118 implements a number of message processing technologies and functions, particularly related to the aggregation and other processing of content (e.g., textual and multimedia content) included in messages received from multiple instances of the messaging client 104. As will be described in further detail, the text and media content from multiple sources may be aggregated into collections of content (e.g., called stories or galleries). These collections are then made available to the messaging client 104. Other processor- and memory-intensive processing of data may also be performed server-side by the messaging server 118, in view of the hardware requirements for such processing.

[0037] The application servers 114 include an image processing server 122 that is dedicated to performing various image processing operations, typically with respect to images or video within the payload of a message sent from or received at the messaging server 118.

[0038] Image processing server 122 is used to implement scan functionality of the augmentation system 208 (shown in FIG. 2). Scan functionality includes activating and providing one or more AR experiences on a client device 102 when an image is captured by the client device 102. Specifically, the messaging client 104 on the client device 102 can be used to activate a camera. The camera displays one or more real-time images or a video to a user along with one or more icons or identifiers of one or more AR experiences. The user can select a given one of the identifiers to launch the corresponding AR experience or perform a desired image modification (e.g., replacing a garment being worn by a user in a video or recoloring the garment worn by the user in the video or modifying the garment based on a gesture performed by the user).

[0039] The social network server 124 supports various social networking functions and services and makes these functions and services available to the messaging server 118. To this end, the social network server 124 maintains and accesses an entity graph 308 (as shown in FIG. 3) within the database 126. Examples of functions and services supported by the social network server 124 include the identification of other users of the messaging system 100 with which a particular user has relationships or is “following,” and also the identification of other entities and interests of a particular user.

[0040] Returning to the messaging client 104, features and functions of an external resource (e.g., a third-party application 109 or applet) are made available to a user via an interface of the messaging client 104. The messaging client 104 receives a user selection of an option to launch or access features of an external resource (e.g., a third-party resource), such as external apps 109. The external resource may be a third-party application (external apps 109) installed on the client device 102 (e.g., a “native app”), or a small-scale version of the third-party application (e.g., an “applet”) that

is hosted on the client device 102 or remote of the client device 102 (e.g., on third-party servers 110). The small-scale version of the third-party application includes a subset of features and functions of the third-party application (e.g., the full-scale, native version of the third-party standalone application) and is implemented using a markup-language document. In one example, the small-scale version of the third-party application (e.g., an “applet”) is a web-based, markup-language version of the third-party application and is embedded in the messaging client 104. In addition to using markup-language documents (e.g., a *.ml file), an applet may incorporate a scripting language (e.g., a *.js file or a .json file) and a style sheet (e.g., a *.ss file).

[0041] In response to receiving a user selection of the option to launch or access features of the external resource (external app 109), the messaging client 104 determines whether the selected external resource is a web-based external resource or a locally-installed external application. In some cases, external applications 109 that are locally installed on the client device 102 can be launched independently of and separately from the messaging client 104, such as by selecting an icon, corresponding to the external application 109, on a home screen of the client device 102. Small-scale versions of such external applications can be launched or accessed via the messaging client 104 and, in some examples, no or limited portions of the small-scale external application can be accessed outside of the messaging client 104. The small-scale external application can be launched by the messaging client 104 receiving, from an external app(s) server 110, a markup-language document associated with the small-scale external application and processing such a document.

[0042] In response to determining that the external resource is a locally-installed external application 109, the messaging client 104 instructs the client device 102 to launch the external application 109 by executing locally-stored code corresponding to the external application 109. In response to determining that the external resource is a web-based resource, the messaging client 104 communicates with the external app(s) servers 110 to

obtain a markup-language document corresponding to the selected resource. The messaging client 104 then processes the obtained markup-language document to present the web-based external resource within a UI of the messaging client 104.

[0043] The messaging client 104 can notify a user of the client device 102, or other users related to such a user (e.g., “friends”), of activity taking place in one or more external resources. For example, the messaging client 104 can provide participants in a conversation (e.g., a chat session) in the messaging client 104 with notifications relating to the current or recent use of an external resource by one or more members of a group of users. One or more users can be invited to join in an active external resource or to launch a recently-used but currently inactive (in the group of friends) external resource. The external resource can provide participants in a conversation, each using a respective messaging client 104, with the ability to share an item, status, state, or location in an external resource with one or more members of a group of users into a chat session. The shared item may be an interactive chat card with which members of the chat can interact, for example, to launch the corresponding external resource, view specific information within the external resource, or take the member of the chat to a specific location or state within the external resource. Within a given external resource, response messages can be sent to users on the messaging client 104. The external resource can selectively include different media items in the responses, based on a current context of the external resource.

[0044] The messaging client 104 can present a list of the available external resources (e.g., third-party or external applications 109 or applets) to a user to launch or access a given external resource. This list can be presented in a context-sensitive menu. For example, the icons representing different ones of the external application 109 (or applets) can vary based on how the menu is launched by the user (e.g., from a conversation interface or from a non-conversation interface).

SYSTEM ARCHITECTURE

[0045] FIG. 2 is a block diagram illustrating further details regarding the messaging system 100, according to some examples. Specifically, the messaging system 100 is shown to comprise the messaging client 104 and the application servers 114. The messaging system 100 embodies a number of subsystems, which are supported on the client side by the messaging client 104 and on the sever side by the application servers 114. These subsystems include, for example, an ephemeral timer system 202, a collection management system 204, an augmentation system 208, a map system 210, a game system 212, and an external resource system 220.

[0046] The ephemeral timer system 202 is responsible for enforcing the temporary or time-limited access to content by the messaging client 104 and the messaging server 118. The ephemeral timer system 202 incorporates a number of timers that, based on duration and display parameters associated with a message, or collection of messages (e.g., a story), selectively enable access (e.g., for presentation and display) to messages and associated content via the messaging client 104. Further details regarding the operation of the ephemeral timer system 202 are provided below.

[0047] The collection management system 204 is responsible for managing sets or collections of media (e.g., collections of text, image, video, and audio data). A collection of content (e.g., messages, including images, video, text, and audio) may be organized into an “event gallery” or an “event story.” Such a collection may be made available for a specified time period, such as the duration of an event to which the content relates. For example, content relating to a music concert may be made available as a “story” for the duration of that music concert. The collection management system 204 may also be responsible for publishing an icon that provides notification of the existence of a particular collection to the UI of the messaging client 104.

[0048] The collection management system 204 further includes a curation interface 206 that allows a collection manager to manage and curate a particular collection of content. For example, the curation interface 206 enables an event organizer to curate a collection of content relating to a specific event (e.g., delete inappropriate content or redundant messages).

Additionally, the collection management system 204 employs machine vision (or image recognition technology) and content rules to automatically curate a content collection. In certain examples, compensation may be paid to a user for the inclusion of user-generated content into a collection. In such cases, the collection management system 204 operates to automatically make payments to such users for the use of their content.

[0049] The augmentation system 208 provides various functions that enable a user to augment (e.g., annotate or otherwise modify or edit) media content associated with a message. For example, the augmentation system 208 provides functions related to the generation and publishing of media overlays for messages processed by the messaging system 100. The augmentation system 208 operatively supplies a media overlay or augmentation (e.g., an image filter) to the messaging client 104 based on a geolocation of the client device 102. In another example, the augmentation system 208 operatively supplies a media overlay to the messaging client 104 based on other information, such as social network information of the user of the client device 102. A media overlay may include audio and visual content and visual effects. Examples of audio and visual content include pictures, texts, logos, animations, and sound effects. An example of a visual effect includes color overlaying. The audio and visual content or the visual effects can be applied to a media content item (e.g., a photo) at the client device 102. For example, the media overlay may include text, a graphical element, or an image that can be overlaid on top of a photograph taken by the client device 102. In another example, the media overlay includes an identification of a location overlay (e.g., Venice beach), a name of a live event, or a name of a merchant overlay (e.g., Beach Coffee House). In another example, the augmentation system 208 uses the geolocation of the client device 102 to identify a media overlay that includes the name of a merchant at the geolocation of the client device 102. The media overlay may include other indicia associated with the merchant. The media overlays may be stored in the database 126 and accessed through the database server 120.

[0050] In some examples, the augmentation system 208 provides a user-based publication platform that enables users to select a geolocation on a map and upload content associated with the selected geolocation. The user may also specify circumstances under which a particular media overlay should be offered to other users. The augmentation system 208 generates a media overlay that includes the uploaded content and associates the uploaded content with the selected geolocation.

[0051] In other examples, the augmentation system 208 provides a merchant-based publication platform that enables merchants to select a particular media overlay associated with a geolocation via a bidding process. For example, the augmentation system 208 associates the media overlay of the highest bidding merchant with a corresponding geolocation for a predefined amount of time. The augmentation system 208 communicates with the image processing server 122 to obtain AR experiences and presents identifiers of such experiences in one or more UIs (e.g., as icons over a real-time image or video or as thumbnails or icons in interfaces dedicated for presented identifiers of AR experiences). Once an AR experience is selected, one or more images, videos, or AR graphical elements are retrieved and presented as an overlay on top of the images or video captured by the client device 102. In some cases, the camera is switched to a front-facing view (e.g., the front-facing camera of the client device 102 is activated in response to activation of a particular AR experience) and the images from the front-facing camera of the client device 102 start being displayed on the client device 102 instead of the rear-facing camera of the client device 102. The one or more images, videos, or AR graphical elements are retrieved and presented as an overlay on top of the images that are captured and displayed by the front-facing camera of the client device 102.

[0052] In other examples, the augmentation system 208 is able to communicate and exchange data with another augmentation system 208 on another client device 102 and with the server via the network 112. The data exchanged can include a session identifier that identifies the shared AR session, a transformation between a first client device 102 and a second

client device 102 (e.g., a plurality of client devices 102 include the first and second devices) that is used to align the shared AR session to a common point of origin, a common coordinate frame, functions (e.g., commands to invoke functions), and other payload data (e.g., text, audio, video or other multimedia data).

[0053] The augmentation system 208 sends the transformation to the second client device 102 so that the second client device 102 can adjust the AR coordinate system based on the transformation. In this way, the first and second client devices 102 synch up their coordinate systems and frames for displaying content in the AR session. Specifically, the augmentation system 208 computes the point of origin of the second client device 102 in the coordinate system of the first client device 102. The augmentation system 208 can then determine an offset in the coordinate system of the second client device 102 based on the position of the point of origin from the perspective of the second client device 102 in the coordinate system of the second client device 102. This offset is used to generate the transformation so that the second client device 102 generates AR content according to a common coordinate system or frame as the first client device 102.

[0054] The augmentation system 208 can communicate with the client device 102 to establish individual or shared AR sessions. The augmentation system 208 can also be coupled to the messaging server 118 to establish an electronic group communication session (e.g., group chat, instant messaging) for the client devices 102 in a shared AR session. The electronic group communication session can be associated with a session identifier provided by the client devices 102 to gain access to the electronic group communication session and to the shared AR session. In some examples, the client devices 102 first gain access to the electronic group communication session and then obtain the session identifier in the electronic group communication session that allows the client devices 102 to access the shared AR session. In some examples, the client devices 102 are able to access the shared AR session without aid or communication with the augmentation system 208 in the application servers 114.

[0055] The map system 210 provides various geographic location functions and supports the presentation of map-based media content and messages by the messaging client 104. For example, the map system 210 enables the display of user icons or avatars (e.g., stored in profile data 316) on a map to indicate a current or past location of "friends" of a user, as well as media content (e.g., collections of messages including photographs and videos) generated by such friends, within the context of a map. For example, a message posted by a user to the messaging system 100 from a specific geographic location may be displayed within the context of a map at that particular location to "friends" of a specific user on a map interface of the messaging client 104. A user can furthermore share his or her location and status information (e.g., using an appropriate status avatar) with other users of the messaging system 100 via the messaging client 104, with this location and status information being similarly displayed within the context of a map interface of the messaging client 104 to selected users.

[0056] The game system 212 provides various gaming functions within the context of the messaging client 104. The messaging client 104 provides a game interface providing a list of available games (e.g., web-based games or web-based applications) that can be launched by a user within the context of the messaging client 104 and played with other users of the messaging system 100. The messaging system 100 further enables a particular user to invite other users to participate in the play of a specific game by issuing invitations to such other users from the messaging client 104. The messaging client 104 also supports both voice and text messaging (e.g., chats) within the context of gameplay, provides a leaderboard for the games, and also supports the provision of in-game rewards (e.g., coins and items).

[0057] The external resource system 220 provides an interface for the messaging client 104 to communicate with external app(s) servers 110 to launch or access external resources. Each external resource (apps) server 110 hosts, for example, a markup language (e.g., HTML5) based application or small-scale version of an external application (e.g., game, utility, payment, or ride-sharing application that is external to the messaging client

104). The messaging client 104 may launch a web-based resource (e.g., application) by accessing the HTML5 file from the external resource (apps) servers 110 associated with the web-based resource. In certain examples, applications hosted by external resource servers 110 are programmed in JavaScript leveraging a Software Development Kit (SDK) provided by the messaging server 118. The SDK includes APIs with functions that can be called or invoked by the web-based application. In certain examples, the messaging server 118 includes a JavaScript library that provides a given third-party resource access to certain user data of the messaging client 104. HTML5 is used as an example technology for programming games, but applications and resources programmed based on other technologies can be used.

[0058] In order to integrate the functions of the SDK into the web-based resource, the SDK is downloaded by an external resource (apps) server 110 from the messaging server 118 or is otherwise received by the external resource (apps) server 110. Once downloaded or received, the SDK is included as part of the application code of a web-based external resource. The code of the web-based resource can then call or invoke certain functions of the SDK to integrate features of the messaging client 104 into the web-based resource.

[0059] The SDK stored on the messaging server 118 effectively provides the bridge between an external resource (e.g., third-party or external applications 109 or applets and the messaging client 104). This provides the user with a seamless experience of communicating with other users on the messaging client 104, while also preserving the look and feel of the messaging client 104. To bridge communications between an external resource and a messaging client 104, in certain examples, the SDK facilitates communication between external resource servers 110 and the messaging client 104. In certain examples, a WebViewJavaScriptBridge running on a client device 102 establishes two one-way communication channels between an external resource and the messaging client 104. Messages are sent between the external resource and the messaging client

104 via these communication channels asynchronously. Each SDK function invocation is sent as a message and callback. Each SDK function is implemented by constructing a unique callback identifier and sending a message with that callback identifier.

[0060] By using the SDK, not all information from the messaging client 104 is shared with external resource servers 110. The SDK limits which information is shared based on the needs of the external resource. In certain examples, each external resource server 110 provides an HTML5 file corresponding to the web-based external resource to the messaging server 118. The messaging server 118 can add a visual representation (such as a box art or other graphic) of the web-based external resource in the messaging client 104. Once the user selects the visual representation or instructs the messaging client 104 through a graphical user interface (GUI) of the messaging client 104 to access features of the web-based external resource, the messaging client 104 obtains the HTML5 file and instantiates the resources necessary to access the features of the web-based external resource.

[0061] The messaging client 104 presents a GUI (e.g., a landing page or title screen) for an external resource. During, before, or after presenting the landing page or title screen, the messaging client 104 determines whether the launched external resource has been previously authorized to access user data of the messaging client 104. In response to determining that the launched external resource has been previously authorized to access user data of the messaging client 104, the messaging client 104 presents another GUI of the external resource that includes functions and features of the external resource. In response to determining that the launched external resource has not been previously authorized to access user data of the messaging client 104, after a threshold period of time (e.g., 3 seconds) of displaying the landing page or title screen of the external resource, the messaging client 104 slides up (e.g., animates a menu as surfacing from a bottom of the screen to a middle of or other portion of the screen) a menu for authorizing the external resource to access the user data. The menu identifies

the type of user data that the external resource will be authorized to use. In response to receiving a user selection of an accept option, the messaging client 104 adds the external resource to a list of authorized external resources and allows the external resource to access user data from the messaging client 104. In some examples, the external resource is authorized by the messaging client 104 to access the user data in accordance with an OAuth 2 framework.

[0062] The messaging client 104 controls the type of user data that is shared with external resources based on the type of external resource being authorized. For example, external resources that include full-scale external applications (e.g., a third-party or external application 109) are provided with access to a first type of user data (e.g., only two-dimensional (2D) avatars of users with or without different avatar characteristics). As another example, external resources that include small-scale versions of external applications (e.g., web-based versions of third-party applications) are provided with access to a second type of user data (e.g., payment information, 2D avatars of users, three-dimensional (3D) avatars of users, and avatars with various avatar characteristics). Avatar characteristics include different ways to customize a look and feel of an avatar, such as different poses, facial features, clothing, and so forth.

[0063] A contact lens mode selection system 224 can communicate with or implement some or all of the functionality of the augmentation system 208. The contact lens mode selection system 224 can be implemented on one or more contact lenses 103. The contact lens mode selection system 224 can instruct components of the contact lens 103 on which it is implemented to be placed into a selected display mode (e.g., normal vision mode (unobstructed light of the real-world environment is received by the pupil), AR display mode, or VR display mode). Various implementations of these different display modes on a given contact lens 103 are discussed below in connection with FIGS. 5A-C, 6, 7, and 8. Specifically, the contact lens mode selection system 224 can detect a condition, such as a condition associated with

display of virtual content, and can instruct the components of the contact lens 103 to be placed into a display mode corresponding to the condition.

[0064] In some examples, the condition that is detected can result from input received from a user and/or based on a current location of the contact lens 103. Specifically, the contact lens mode selection system 224 can receive input from a user designating different locations with different display modes. Specifically, a user can draw a geofence around a given location. The contact lens mode selection system 224 can generate location information for the geofence, such as any one or combination of a set of GPS coordinates that represent the geofence (e.g., a room in a home or a particular venue), a set of images representing the geofence (e.g., visual-inertial odometry data), radio frequency signals associated with the geofence, or any other indoor positioning system information (E.g., WiFi signals, Bluetooth signals, location tags, ultra-wide band (UWB) acoustic signals, and/or RFID tags).

[0065] The contact lens mode selection system 224 can then receive input from the user specifying that a first geofence is associated with an AR display mode and a second geofence is associated with a VR display mode. The contact lens mode selection system 224 can include GPS, indoor location circuitry, or location determination circuitry. The contact lens mode selection system 224 can communicate with a location device of the contact lens 103 being worn by a user to determine a current location of the contact lens 103, such as by accessing a set of GPS coordinates that represent the geofence (e.g., a room in a home or a particular venue), a set of images representing the geofence (e.g., visual-inertial odometry data), radio frequency signals associated with the geofence, or any other indoor positioning system information (E.g., WiFi signals, Bluetooth signals, location tags, ultra-wide band (UWB) acoustic signals, and/or RFID tags). The contact lens mode selection system 224 can search a list of previously designated locations (geofences) (e.g., by searching for previously stored location information for the geofence) to determine whether locally obtained information (e.g., locally obtained set of GPS coordinates, set of images,

radio frequency signals, or any other indoor positioning system information) associated with the current location of the contact lens 103 match any of the previously designated locations.

[0066] In response to determining that the locally obtained location information associated with the current location of the contact lens 103 matches the location information for a given previously designated location, the contact lens mode selection system 224 can retrieve the display mode associated with the given previously designated location. For example, the contact lens mode selection system 224 can determine that the current location corresponds to an AR display mode. In such cases, the contact lens mode selection system 224 instructs the processor of the contact lens 103 to transition the contact lens 103 into the AR display mode. As another example, the contact lens mode selection system 224 can determine that the current location corresponds to a VR display mode. In such cases, the contact lens mode selection system 224 instructs the processor of the contact lens 103 to transition the contact lens 103 into the VR display mode.

[0067] **FIG. 12** is an example user interface 1200 generated by the contact lens mode selection system, in accordance with some examples. The depicted user interface 1200 includes a representation of the user 1230 wearing the contact lens 103. The user 1230 is shown for demonstrative purposes and is not actually depicted in the user interface 1200 that appears within the contact lens 103. In some examples, the user 1230 can look or point the eyes of the user 1230 towards a room or location that is associated with an VR (or AR) display mode. In such cases, the contact lens mode selection system 224 can transition or cause the contact lens 103 worn by the user to generate an approximate representation of the AR content 1210 associated with the VR display mode of the room. The approximate representation can be generated and displayed using translucent approximation of what a VR scene in the room looks like, such as by transitioning the contact lens 103 to the AR display mode. This may be the case because while outside of the room, the contact lens mode selection system 224 is not in the VR display mode and cannot draw an opaque

representation of the room. In this way, the user can walk around a real-world environment and peak into different rooms or locations associated with VR content or experiences without having to engage with the experiences. When the user reaches a location of interest, the user can cross over into the geofence to cause the contact lens mode selection system 224 to transition to the VR display mode from the translucent or the AR display mode.

[0068] In response to detecting that the user 1230 has entered the geofence associated with the room, the contact lens mode selection system 224 transitions the contact lens 103 to the VR display mode. At this point, the VR content 1210 appears within view in an opaque and non-translucent manner. The user 1230 can turn around within the room and view the real-world hallway or area outside of the location associated with the VR content 1210 from where the user entered or another exit from the location. The contact lens mode selection system 224 can simulate a display 1220 of the real-world location within the virtual content 1210 being presented to the user 1230. Namely, the display 1220 shows a VR duplicate of what the real-world area outside of the room or location or geofence in which the user 1230 is currently located or positioned. This allows the user to walk around the room or location or geofence associated with the VR display mode and to easily find the locations within the room that lead to exists from the VR display mode. Once the user is detected as walking through one of the exists that are depicted as VR representations of the real-world locations (e.g., the exists can include displayed content that mimics or resembles the actual visual attributes of the real-world location outside of the room associated with the VR experience), the contact lens mode selection system 224 transitions the contact lens 103 from the VR display mode to the AR display mode, translucent, or non-opaque display.

[0069] In some examples, the condition that is detected can result from input received from an external device or a communication received from the external device. The contact lens 103 can communicate with an external device, such as a mobile phone or an eyewear device to receive virtual

content from the external device. Namely, the external device can present a GUI to a user. The external device can receive input from the user selecting an AR or VR experience from the GUI. In response, the external device can launch the AR or VR experience and provide virtual content associated with the AR or VR experience to the contact lens 103. The contact lens 103 can then generate light (e.g., by way of a display screen or projector) that represents the virtual content of the AR or VR experience and provides the light to the pupil of the user. The contact lens 103 can continuously receive a video feed representing the virtual content.

[0070] In some cases, the contact lens 103 can implement various AR or VR experiences. The external device can receive input from a user selecting a particular AR or VR experience and provides an identifier of the selected AR or VR experience to the contact lens 103. The contact lens 103 can then locally launch the selected AR or VR experience and generate virtual content for display to the pupil or projection towards the pupil. The contact lens 103 can selectively switch between different display modes based on whether an AR or VR experience is selected.

[0071] In some examples, the condition that is detected can result from detecting a change of location of the contact lens 103. In some examples, the contact lens mode selection system 224 can continue monitoring the current location of the contact lens 103. In response to determining that the current location of the contact lens 103 changes to a new location, the contact lens mode selection system 224 can determine whether the new location is associated with a different display mode than what is currently being implemented on the contact lens 103. For example, the contact lens 103 can currently be set in an AR display mode and the contact lens 103 can be moved to a new location associated with a VR display mode. In such cases, the contact lens mode selection system 224 communicates with the contact lens 103 to switch or transition the current display mode to the VR display mode. In response to determining that the contact lens 103 has moved to a new location which is not associated with any geofences or any display modes, the contact lens mode selection system 224 can instruct the contact

lens 103 to transition to a default display mode, such as the normal vision mode where no light representing virtual content is received by the pupil.

[0072] In some examples, the contact lens mode selection system 224 can receive a communication from a server that includes a database of locations. Each location in the database of locations can be associated with one of the three display modes. The contact lens mode selection system 224 can transition the contact lens 103 to different display modes by matching the current location of the contact lens 103 to a given location specified in the database of locations and obtaining the display mode associated with the given location. For example, a given restaurant or venue can be associated with an AR display mode. In response to determining that the contact lens 103 is currently within a threshold distance of the restaurant or venue (e.g., the current GPS coordinates of the contact lens 103 are within a threshold distance of one or more GPS coordinates of the restaurant or venue), the contact lens mode selection system 224 can instruct the contact lens 103 to transition to the AR display mode. The contact lens mode selection system 224 can also receive virtual content associated with the restaurant or venue and instruct the contact lens 103 to present the virtual content by way of a display screen or projector implemented by the contact lens 103.

[0073] In some examples, the condition that is detected can result from monitoring a power state of the contact lens 103. Specifically, the contact lens mode selection system 224 can monitor a power state (e.g., battery level or remaining battery life) of the contact lens 103. In response to determining that the power state transgresses a threshold (e.g., the battery level falls below the threshold, such as less than 5% battery life remains), the contact lens mode selection system 224 can instruct the contact lens 103 to transition to a default display mode, such as the normal vision mode where no light representing virtual content is received by the pupil or any other default display mode that is preconfigured or specified by a user.

DATA ARCHITECTURE

[0074] **FIG. 3** is a schematic diagram illustrating data structures 300, which may be stored in the database 126 of the messaging server system 108, according to certain examples. While the content of the database 126 is shown to comprise a number of tables, it will be appreciated that the data could be stored in other types of data structures (e.g., as an object-oriented database).

[0075] The database 126 includes message data stored within a message table 302. This message data includes, for any particular one message, at least message sender data, message recipient (or receiver) data, and a payload. Further details regarding information that may be included in a message, and included within the message data stored in the message table 302, are described below with reference to **FIG. 4**.

[0076] An entity table 306 stores entity data, and is linked (e.g., referentially) to an entity graph 308 and profile data 316. Entities for which records are maintained within the entity table 306 may include individuals, corporate entities, organizations, objects, places, events, and so forth. Regardless of entity type, any entity regarding which the messaging server system 108 stores data may be a recognized entity. Each entity is provided with a unique identifier, as well as an entity type identifier (not shown).

[0077] The entity graph 308 stores information regarding relationships and associations between entities. Such relationships may be social, professional (e.g., work at a common corporation or organization) interested-based, or activity-based, merely for example.

[0078] The profile data 316 stores multiple types of profile data about a particular entity. The profile data 316 may be selectively used and presented to other users of the messaging system 100, based on privacy settings specified by a particular entity. Where the entity is an individual, the profile data 316 includes, for example, a user name, telephone number, address, settings (e.g., notification and privacy settings), as well as a user-selected avatar representation (or collection of such avatar representations). A particular user may then selectively include one or more of these avatar representations within the content of messages communicated via the

messaging system 100 and on map interfaces displayed by messaging clients 104 to other users. The collection of avatar representations may include “status avatars,” which present a graphical representation of a status or activity that the user may select to communicate at a particular time.

[0079] Where the entity is a group, the profile data 316 for the group may similarly include one or more avatar representations associated with the group, in addition to the group name, members, and various settings (e.g., notifications) for the relevant group.

[0080] The database 126 also stores augmentation data, such as overlays or filters, in an augmentation table 310. The augmentation data is associated with and applied to videos (for which data is stored in a video table 304) and images (for which data is stored in an image table 312).

[0081] The database 126 can also store data pertaining to individual and shared AR sessions. This data can include data communicated between an AR session client controller of a first client device 102 and another AR session client controller of a second client device 102 and data communicated between the AR session client controller and the augmentation system 208. Data can include data used to establish the common coordinate frame of the shared AR scene, the transformation between the devices, the session identifier, images depicting a body, skeletal joint positions, wrist joint positions, feet, and so forth.

[0082] Filters, in one example, are overlays that are displayed as overlaid on an image or video during presentation to a recipient user. Filters may be of various types, including user-selected filters from a set of filters presented to a sending user by the messaging client 104 when the sending user is composing a message. Other types of filters include geolocation filters (also known as geo-filters), which may be presented to a sending user based on geographic location. For example, geolocation filters specific to a neighborhood or special location may be presented within a user interface by the messaging client 104, based on geolocation information determined by a GPS unit of the client device 102.

[0083] Another type of filter is a data filter, which may be selectively presented to a sending user by the messaging client 104 based on other inputs or information gathered by the client device 102 during the message creation process. Examples of data filters include current temperature at a specific location, a current speed at which a sending user is traveling, battery life for a client device 102, or the current time.

[0084] Other augmentation data that may be stored within the image table 312 includes AR content items (e.g., corresponding to applying AR experiences). An AR content item or AR item may be a real-time special effect and sound that may be added to an image or a video.

[0085] As described above, augmentation data includes AR content items, overlays, image transformations, AR images, AR logos or emblems, and similar terms that refer to modifications that may be applied to image data (e.g., videos or images). This includes real-time modifications, which modify an image as it is captured using device sensors (e.g., one or multiple cameras) of a client device 102 and then displayed on a screen of the client device 102 with the modifications. This also includes modifications to stored content, such as video clips in a gallery that may be modified. For example, in a client device 102 with access to multiple AR content items, a user can use a single video clip with multiple AR content items to see how the different AR content items will modify the stored clip. For example, multiple AR content items that apply different pseudorandom movement models can be applied to the same content by selecting different AR content items for the content. Similarly, real-time video capture may be used with an illustrated modification to show how video images currently being captured by sensors of a client device 102 would modify the captured data. Such data may simply be displayed on the screen and not stored in memory, or the content captured by the device sensors may be recorded and stored in memory with or without the modifications (or both). In some systems, a preview feature can show how different AR content items will look within different windows in a display at the same time. This can, for example,

enable multiple windows with different pseudorandom animations to be viewed on a display at the same time.

[0086] Data and various systems using AR content items or other such transform systems to modify content using this data can thus involve detection of objects (e.g., faces, hands, bodies, cats, dogs, surfaces, objects, etc.), tracking of such objects as they leave, enter, and move around the field of view in video frames, and the modification or transformation of such objects as they are tracked. In various examples, different methods for achieving such transformations may be used. Some examples may involve generating a 3D mesh model of the object or objects and using transformations and animated textures of the model within the video to achieve the transformation. In other examples, tracking of points on an object may be used to place an image or texture (which may be 2D or 3D) at the tracked position. In still further examples, neural network analysis of video frames may be used to place images, models, or textures in content (e.g., images or frames of video). AR content items thus refer both to the images, models, and textures used to create transformations in content, as well as to additional modeling and analysis information needed to achieve such transformations with object detection, tracking, and placement.

[0087] Real-time video processing can be performed with any kind of video data (e.g., video streams, video files, etc.) saved in a memory of a computerized system of any kind. For example, a user can load video files and save them in a memory of a device or can generate a video stream using sensors of the device. Additionally, any objects can be processed using a computer animation model, such as a human's face and parts of a human body, animals, or non-living things such as chairs, cars, or other objects.

[0088] In some examples, when a particular modification is selected along with content to be transformed, elements to be transformed are identified by the computing device and then detected and tracked if they are present in the frames of the video. The elements of the object are modified according to the request for modification, thus transforming the frames of the video stream. Transformation of frames of a video stream can be performed by different

methods for different kinds of transformation. For example, for transformations of frames mostly referring to changing forms of an object's elements, characteristic points for each element of an object are calculated (e.g., using an Active Shape Model (ASM) or other known methods). Then, a mesh based on the characteristic points is generated for each of the at least one element of the object. This mesh is used in the following stage of tracking the elements of the object in the video stream. In the process of tracking, the mentioned mesh for each element is aligned with a position of each element. Then, additional points are generated on the mesh. A first set of first points is generated for each element based on a request for modification, and a set of second points is generated for each element based on the set of first points and the request for modification. Then, the frames of the video stream can be transformed by modifying the elements of the object on the basis of the sets of first and second points and the mesh. In such method, a background of the modified object can be changed or distorted as well by tracking and modifying the background.

[0089] In some examples, transformations changing some areas of an object using its elements can be performed by calculating characteristic points for each element of an object and generating a mesh based on the calculated characteristic points. Points are generated on the mesh and then various areas based on the points are generated. The elements of the object are then tracked by aligning the area for each element with a position for each of the at least one element, and properties of the areas can be modified based on the request for modification, thus transforming the frames of the video stream. Depending on the specific request for modification, properties of the mentioned areas can be transformed in different ways. Such modifications may involve changing color of areas; removing at least some part of areas from the frames of the video stream; including one or more new objects into areas which are based on a request for modification; and modifying or distorting the elements of an area or object. In various examples, any combination of such modifications or other similar modifications may be used. For certain models to be animated, some

characteristic points can be selected as control points to be used in determining the entire state-space of options for the model animation.

[0090] In some examples of a computer animation model to transform image data using face detection, the face is detected on an image with use of a specific face detection algorithm (e.g., Viola-Jones). Then, an ASM algorithm is applied to the face region of an image to detect facial feature reference points.

[0091] Other methods and algorithms suitable for face detection can be used. For example, in some examples, features are located using a landmark, which represents a distinguishable point present in most of the images under consideration. For facial landmarks, for example, the location of the left eye pupil may be used. If an initial landmark is not identifiable (e.g., if a person has an eyepatch), secondary landmarks may be used. Such landmark identification procedures may be used for any such objects. In some examples, a set of landmarks forms a shape. Shapes can be represented as vectors using the coordinates of the points in the shape. One shape is aligned to another with a similarity transform (allowing translation, scaling, and rotation) that minimizes the average Euclidean distance between shape points. The mean shape is the mean of the aligned training shapes.

[0092] In some examples, a search is started for landmarks from the mean shape aligned to the position and size of the face determined by a global face detector. Such a search then repeats the steps of suggesting a tentative shape by adjusting the locations of shape points by template matching of the image texture around each point and then conforming the tentative shape to a global shape model until convergence occurs. In some systems, individual template matches are unreliable, and the shape model pools the results of the weak template matches to form a stronger overall classifier. The entire search is repeated at each level in an image pyramid, from coarse to fine resolution.

[0093] A transformation system can capture an image or video stream on a client device (e.g., the client device 102) and perform complex image manipulations locally on the client device 102 while maintaining a suitable

user experience, computation time, and power consumption. The complex image manipulations may include size and shape changes, emotion transfers (e.g., changing a face from a frown to a smile), perceived state transfers (e.g., changing perceived age, agender and/or the like), style transfers, graphical element application, and any other suitable image or video manipulation implemented by a convolutional neural network that has been configured to execute efficiently on the client device 102.

[0094] In some examples, a computer animation model to transform image data can be used by a system where a user may capture an image or video stream of the user (e.g., a selfie) using a client device 102 having a neural network operating as part of a messaging client 104 operating on the client device 102. The transformation system operating within the messaging client 104 determines the presence of a face within the image or video stream and provides modification icons associated with a computer animation model to transform image data, or the computer animation model can be present as associated with an interface described herein. The modification icons include changes that may be the basis for modifying the user's face within the image or video stream as part of the modification operation. Once a modification icon is selected, the transformation system initiates a process to convert the image of the user to reflect the selected modification icon (e.g., generate a smiling face on the user). A modified image or video stream may be presented in a GUI displayed on the client device 102 as soon as the image or video stream is captured and a specified modification is selected. The transformation system may implement a complex convolutional neural network on a portion of the image or video stream to generate and apply the selected modification. That is, the user may capture the image or video stream and be presented with a modified result in real-time or near real-time once a modification icon has been selected. Further, the modification may be persistent while the video stream is being captured and the selected modification icon remains toggled. Machine-taught neural networks may be used to enable such modifications.

[0095] The GUI, presenting the modification performed by the transformation system, may supply the user with additional interaction options. Such options may be based on the interface used to initiate the content capture and selection of a particular computer animation model (e.g., initiation from a content creator user interface). In various examples, a modification may be persistent after an initial selection of a modification icon. The user may toggle the modification on or off by tapping or otherwise selecting the face being modified by the transformation system and store it for later viewing or browse to other areas of the imaging application. Where multiple faces are modified by the transformation system, the user may toggle the modification on or off globally by tapping or selecting a single face modified and displayed within a GUI. In some examples, individual faces, among a group of multiple faces, may be individually modified, or such modifications may be individually toggled by tapping or selecting the individual face or a series of individual faces displayed within the GUI.

[0096] A story table 314 stores data regarding collections of messages and associated image, video, or audio data, which are compiled into a collection (e.g., a story or a gallery). The creation of a particular collection may be initiated by a particular user (e.g., each user for which a record is maintained in the entity table 306). A user may create a “personal story” in the form of a collection of content that has been created and sent/broadcast by that user. To this end, the user interface of the messaging client 104 may include an icon that is user-selectable to enable a sending user to add specific content to his or her personal story.

[0097] A collection may also constitute a “live story,” which is a collection of content from multiple users that is created manually, automatically, or using a combination of manual and automatic techniques. For example, a “live story” may constitute a curated stream of user-submitted content from various locations and events. Users whose client devices have location services enabled and are at a common location event at a particular time may, for example, be presented with an option, via a user interface of the

messaging client 104, to contribute content to a particular live story. The live story may be identified to the user by the messaging client 104, based on his or her location. The end result is a “live story” told from a community perspective.

[0098] A further type of content collection is known as a “location story,” which enables a user whose client device 102 is located within a specific geographic location (e.g., on a college or university campus) to contribute to a particular collection. In some examples, a contribution to a location story may require a second degree of authentication to verify that the end user belongs to a specific organization or other entity (e.g., is a student on the university campus).

[0099] As mentioned above, the video table 304 stores video data that, in one example, is associated with messages for which records are maintained within the message table 302. Similarly, the image table 312 stores image data associated with messages for which message data is stored in the entity table 306. The entity table 306 may associate various augmentations from the augmentation table 310 with various images and videos stored in the image table 312 and the video table 304.

DATA COMMUNICATIONS ARCHITECTURE

[0100] **FIG. 4** is a schematic diagram illustrating a structure of a message 400, according to some examples, generated by a messaging client 104 for communication to a further messaging client 104 or the messaging server 118. The content of a particular message 400 is used to populate the message table 302 stored within the database 126 and accessible by the messaging server 118. Similarly, the content of a message 400 is stored in memory as “in-transit” or “in-flight” data of the client device 102 or the application servers 114. A message 400 is shown to include the following example components:

- message identifier 402: a unique identifier that identifies the message 400.

- message text payload 404: text, to be generated by a user via a user interface of the client device 102, and that is included in the message 400.
- message image payload 406: image data, captured by a camera component of a client device 102 or retrieved from a memory component of a client device 102, and that is included in the message 400. Image data for a sent or received message 400 may be stored in the image table 312.
- message video payload 408: video data, captured by a camera component or retrieved from a memory component of the client device 102, and that is included in the message 400. Video data for a sent or received message 400 may be stored in the video table 304.
- message audio payload 410: audio data, captured by a microphone or retrieved from a memory component of the client device 102, and that is included in the message 400.
- message augmentation data 412: augmentation data (e.g., filters, stickers, or other annotations or enhancements) that represents augmentations to be applied to message image payload 406, message video payload 408, or message audio payload 410 of the message 400. Augmentation data for a sent or received message 400 may be stored in the augmentation table 310.
- message duration parameter 414: parameter value indicating, in seconds, the amount of time for which content of the message (e.g., the message image payload 406, message video payload 408, message audio payload 410) is to be presented or made accessible to a user via the messaging client 104.
- message geolocation parameter 416: geolocation data (e.g., latitudinal and longitudinal coordinates) associated with the content payload of the message. Multiple message geolocation parameter 416 values may be included in the payload, each of these parameter values being associated with respect to content items included in the content (e.g., a specific

image within the message image payload 406, or a specific video in the message video payload 408).

- message story identifier 418: identifier values identifying one or more content collections (e.g., “stories” identified in the story table 314) with which a particular content item in the message image payload 406 of the message 400 is associated. For example, multiple images within the message image payload 406 may each be associated with multiple content collections using identifier values.
- message tag 420: each message 400 may be tagged with multiple tags, each of which is indicative of the subject matter of content included in the message payload. For example, where a particular image included in the message image payload 406 depicts an animal (e.g., a lion), a tag value may be included within the message tag 420 that is indicative of the relevant animal. Tag values may be generated manually, based on user input, or may be automatically generated using, for example, image recognition.
- message sender identifier 422: an identifier (e.g., a messaging system identifier, email address, or device identifier) indicative of a user of the client device 102 on which the message 400 was generated and from which the message 400 was sent.
- message receiver identifier 424: an identifier (e.g., a messaging system identifier, email address, or device identifier) indicative of a user of the client device 102 to which the message 400 is addressed.

[0101] The contents (e.g., values) of the various components of message 400 may be pointers to locations in tables within which content data values are stored. For example, an image value in the message image payload 406 may be a pointer to (or address of) a location within an image table 312. Similarly, values within the message video payload 408 may point to data stored within a video table 304, values stored within the message augmentation data 412 may point to data stored in an augmentation table 310, values stored within the message story identifier 418 may point to data stored in a story table 314, and values stored within the message sender

identifier 422 and the message receiver identifier 424 may point to user records stored within an entity table 306.

[0102] FIGS. 5A, 5B, and 5C are block diagrams showing an example implementation of a display mode transition system of the contact lens 103, according to some examples. As shown in FIG. 5A, an eyeball 510 of a user includes a pupil 512. The contact lens 103 (e.g., a smart contact lens) can be placed (put in physical contact) on top of the eyeball 510. The contact lens 103 can be set or placed into one of three display modes. Each of the display modes allows/prevents a different amount of light 540 associated with a real-world environment to be received by the pupil 512.

[0103] In one example, the contact lens 103 includes a display (e.g., a display screen) 520 that is placed on a physical track 530. To place the contact lens 103 into the normal vision mode (e.g., in which light 540 associated with the real-world environment is received by the pupil 512 unobstructed by the display 520), the processor (not shown) of the contact lens 103 moves the display 520 to a first position along the physical track 530. The first position is set such that no portion of the display 520 overlaps or covers the pupil 512. In some cases, the size of the display 520 is determined and a maximum possible size of the pupil 512 is also determined. The first position is set such that none of the edges of the display 520 overlap an edge of the pupil 512 when the pupil 512 is in the maximum possible size. In this way, none of the light 540 associated with a real-world environment is obstructed by the display 520.

[0104] In some examples, the contact lens 103 can detect a condition to transition the contact lens 103 into an AR display mode. In such cases, the display 520 is moved physically (e.g., is electromagnetically slid or slides along the physical track 530) to a second position, as shown in FIG. 5B. Specifically, in the second position, the display 520 obstructs or blocks a portion of light 542 associated with the real-world environment while other portions of light 541 associated with the real-world environment continue to pass through the contact lens 103 and can be received by the pupil 512. The contact lens 103 can generate virtual content (e.g., by receiving the virtual

content from an external device/source or locally generating the virtual content by running an AR/VR experience). The contact lens 103 can instruct the display 520 to display the virtual content (e.g., a visual graphical element). In response, the display 520 generates light 550 representing the virtual content which is received by a portion of the pupil 512. As a result, the pupil 512 receives both light 541 associated with the real-world environment and light 550 associated with the virtual content. This results in a perceived view of the virtual content being part of the real-world environment which provides an AR experience to a user of the eyeball 510. In some cases, the second position corresponds to a center of the pupil 512. Namely, the display 520 in the second position is placed at the center of the pupil 512.

[0105] In some examples, the contact lens 103 can detect a condition to transition the contact lens 103 into an VR display mode. In such cases, the display 520 is moved physically (e.g., is electromagnetically slid or slides along the physical track 530) to a third position, as shown in FIG. 5C. Specifically, in the third position, the display 520 obstructs or blocks a portion of all of the light 543 associated with the real-world environment preventing any light associated with the real-world environment from passing through the contact lens 103 and received by the pupil 512. The contact lens 103 can generate virtual content (e.g., by receiving the virtual content from an external device/source or locally generating the virtual content by running an AR/VR experience). The contact lens 103 can instruct the display 520 to display the virtual content (e.g., a visual graphical element). In response, the display 520 generates light 551 representing the virtual content which is received by a portion of the pupil 512. As a result, the pupil 512 receives only light 551 associated with the virtual content. This provides a VR experience to a user of the eyeball 510. In some cases, the third position corresponds to a center of the pupil 512. Namely, the display 520 in the third position is placed at the center of the pupil 512.

[0106] In some cases, rather than a physical track 530, the display 520 can be moved into the appropriate first, second, and third positions using a

physical arm (or physical lever). In such circumstances, the display can be physically placed on a physical arm. The arm can then be moved into first, second, and third positions to respectively move the display 520 into the first, second, and third positions to selectively pass light from the real-world environment through the contact lens 103. The arm can be electromagnetically controlled to be moved into the respective positions.

[0107] FIG. 6 is a block diagram showing an example implementation of a display mode transition system of the contact lens 103, according to some examples. As shown in the diagram 600 of FIG. 6, instead of physically moving a display into a particular position to implement the different display modes of the contact lens 103, a stationary (or non-stationary) switchable element 610 can be used. The switchable element 610 can electronically operate in one of three modes or states. In a first mode or state of operation, the switchable element 610 can be electronically controlled to be completely transparent to enable a pass through state in which all light 620 associated with a real-world environment is allowed to pass through the contact lens 103 to be received by the pupil 512. This provides the normal vision mode.

[0108] In a second mode or state of operation, the switchable element 610 can be activated to be partially transparent to selectively allow only a certain portion of light 620 associated with a real-world environment to pass through the contact lens 103 to be received by the pupil 512. This provides the AR display mode. In this second mode, a first portion of the switchable element 610 can remain in the first state or mode where the first portion is completely transparent allowing light from the real-world environment to pass through to be received by the pupil 512. In the second mode, a second portion of the switchable element 610 is transitioned to an opaque state in which one or more LEDs are activated to display virtual content. Light from the LEDs is received by the pupil 512 simultaneously with the light from the real-world environment that passes through the first portion to provide the AR display mode.

[0109] In a third mode or state of operation, the switchable element 610 can be activated to be opaque in which one or more LEDs are activated to

display virtual content. Light from the LEDs is received by the pupil 512 while blocking the light from the real-world environment to provide the VR display mode. In this third mode or state of operation, all of the light 620 of the real-world environment is blocked from being received by the pupil 512.

[0110] FIG. 7 is a block diagram 700 showing an example implementation of a display mode transition system of the contact lens 103, according to some examples. As shown in FIG. 7, instead of physically moving a display into a particular position to implement the different display modes of the contact lens 103, a stationary (or non-stationary) mirror element 710 (e.g., a polarized mirror) and a projector 730 can be used to implement the different display modes. Different optical paths can be selected by setting the mirror element 710 into different polarization states. In a first polarization state, a first optical path is selected by setting the mirror element to a polarization state in which unobstructed light 720 associated with a real-world environment is allowed to pass through the contact lens 103 to be received by the pupil 512. This provides the normal vision display mode. In this mode, the projector 730 can be turned ON or can be turned OFF and light associated with the projector is not reflected towards the pupil 512.

[0111] In a second polarization state, a second optical path can be selected (e.g., by the contact lens mode selection system 224). In this case, the mirror element 710 can be polarized allow some of the light 720 associated with the real-world environment to be received by the pupil 512 and reflecting light 732 associated with the virtual content received from the projector 730 by the mirror element 710 towards the pupil 512. In this second polarization state, the projector 730 receives virtual content (e.g., associated with an AR experience) and generates light 732 representing the virtual content. This light 732 is reflected off of the mirror 710 towards the pupil 512 while also allowing some of the light 720 to pass through and be received by the pupil 512. This provides the AR display mode.

[0112] In a third polarization state, a third optical path can be selected (e.g., by the contact lens mode selection system 224). In this case, the mirror element 710 can be polarized to prevent any of the light 720 associated with

the real-world environment from being received by the pupil 512 and reflecting light 732 associated with the virtual content received from the projector 730 by the mirror element 710 towards the pupil 512. In this third polarization state, the projector 730 receives virtual content (e.g., associated with a VR experience) and generates light 732 representing the virtual content. This light 732 is reflected off of the mirror 710 towards the pupil 512 while preventing the light 720 from passing through and being received by the pupil 512. This provides the VR display mode.

[0113] FIG. 8 is a block diagram 800 showing an example implementation of a display mode transition system of the contact lens 103, according to some examples. As shown in FIG. 8, instead of physically moving a display into a particular position to implement the different display modes of the contact lens 103, one or more stationary (or non-stationary) mirror slats 810 and a projector 730 can be used to implement the different display modes. Different optical paths can be selected by rotating the mirror slats 810 into different rotation states 812. In a first rotation state, a first optical path is selected by rotating the mirror slats 810 a first amount to allow unobstructed light 820 associated with a real-world environment to pass through the contact lens 103 to be received by the pupil 512. This provides the normal vision display mode. In this mode, the projector 730 can be turned ON or can be turned OFF and light associated with the projector is not reflected towards the pupil 512.

[0114] In a second rotation state, a second optical path can be selected (e.g., by the contact lens mode selection system 224). In this case, the mirror slats 810 can be rotated by a second amount to allow some of the light 820 associated with the real-world environment to be received by the pupil 512 and reflecting light 732 associated with the virtual content received from the projector 730 by the mirror slats 810 towards the pupil 512. In some examples, in the second rotation state, the mirror slats 810 are rotated to leave a space between end points or edges of adjacent mirrored slats 810. Light 820 from the real-world environment can pass through the space between the adjacent mirrored slats 810 to be received by the pupil 512. In

this second rotation state, the projector 730 receives virtual content (e.g., associated with an AR experience) and generates light 732 representing the virtual content. This light 732 is reflected off of the mirror slats 810 (or a portion of the mirror slats 810) towards the pupil 512 while also allowing some of the light 820 to pass through and be received by the pupil 512. This provides the AR display mode.

[0115] In a third rotation state, a third optical path can be selected (e.g., by the contact lens mode selection system 224). In this case, the mirror slats 810 can be rotated a third amount to prevent any of the light 820 associated with the real-world environment from being received by the pupil 512 and reflecting light 732 associated with the virtual content received from the projector 730 by the mirror element 710 towards the pupil 512. In some examples, in the third rotation state, an end point or edge of one mirrored slat physically touches an end point or edge of another adjacent mirror slat to form a complete mirror that reflects all of the light 822 from the projector 730 towards the pupil 512 and prevents passage of light 820 associated with the real-world environment. In this third rotation state, the projector 730 receives virtual content (e.g., associated with an VR experience) and generates light 732 representing the virtual content. This light 732 is reflected off of the mirror 710 towards the pupil 512 while preventing the light 720 from passing through and being received by the pupil 512. This provides the VR display mode.

[0116] In some cases, the angle at which light 732 is projected from the projector 730 towards the mirrored slats 810 can be adjusted as the mirrored slats 810 are rotated to ensure that the light 732 is reflected towards the pupil 512. Namely, the angle at which light 732 is projected from the projector 730 can be set based on the amount of the rotation of the mirrored slats 810.

[0117] FIG. 9 is a flowchart of a process 900 performed by the contact lens mode selection system 224, in accordance with some example examples. Although the flowchart can describe the operations as a sequential process, many of the operations can be performed in parallel or concurrently. In addition, the order of the operations may be re-arranged. A process is

terminated when its operations are completed. A process may correspond to a method, a procedure, and the like. The steps of methods may be performed in whole or in part, may be performed in conjunction with some or all of the steps in other methods, and may be performed by any number of different systems or any portion thereof, such as a processor included in any of the systems.

[0118] At operation 901, the contact lens mode selection system 224 (e.g., a client device 102 or a server) causes a contact lens to operate in a first display mode, the first display mode allowing unobstructed light associated with a real-world environment to be received by a pupil of a user, as discussed above.

[0119] At operation 902, the contact lens mode selection system 224 detects a condition associated with display of virtual content, as discussed above.

[0120] At operation 903, the contact lens mode selection system 224, in response to detecting the condition, selects between a second display mode and a third display mode as a new display mode in which to operate the contact lens, the second display mode obstructing a portion of the light associated with a real-world environment received by the pupil with the virtual content, and the third display mode obstructing all of the light associated with a real-world environment received by the pupil with the virtual content, as discussed above.

[0121] At operation 904, the contact lens mode selection system 224 transitions the contact lens from operating in the first display mode to operating in the new display mode in response to detecting the condition, as discussed above.

MACHINE ARCHITECTURE

[0122] **FIG. 10** is a diagrammatic representation of the machine 1000 within which instructions 1008 (e.g., software, a program, an application, an applet, an app, or other executable code) for causing the machine 1000 to perform any one or more of the methodologies discussed

herein may be executed. For example, the instructions 1008 may cause the machine 1000 to execute any one or more of the methods described herein. The instructions 1008 transform the general, non-programmed machine 1000 into a particular machine 1000 programmed to carry out the described and illustrated functions in the manner described. The machine 1000 may operate as a standalone device or may be coupled (e.g., networked) to other machines. In a networked deployment, the machine 1000 may operate in the capacity of a server machine or a client machine in a server-client network environment, or as a peer machine in a peer-to-peer (or distributed) network environment. The machine 1000 may comprise, but not be limited to, a server computer, a client computer, a PC, a tablet computer, a laptop computer, a netbook, a STB, a PDA, an entertainment media system, a cellular telephone, a smartphone, a mobile device, a wearable device (e.g., a smartwatch), a smart home device (e.g., a smart appliance), other smart devices, a web appliance, a network router, a network switch, a network bridge, or any machine capable of executing the instructions 1008, sequentially or otherwise, that specify actions to be taken by the machine 1000. Further, while only a single machine 1000 is illustrated, the term “machine” shall also be taken to include a collection of machines that individually or jointly execute the instructions 1008 to perform any one or more of the methodologies discussed herein. The machine 1000, for example, may comprise the client device 102 or any one of a number of server devices forming part of the messaging server system 108. In some examples, the machine 1000 may also comprise both client and server systems, with certain operations of a particular method or algorithm being performed on the server-side and with certain operations of the particular method or algorithm being performed on the client-side.

[0123] The machine 1000 may include processors 1002, memory 1004, and input/output (I/O) components 1038, which may be configured to communicate with each other via a bus 1040. In an example, the processors 1002 (e.g., a CPU, a Reduced Instruction Set Computing (RISC) Processor, a Complex Instruction Set Computing (CISC) Processor, a GPU, a Digital Signal Processor (DSP), an Application Specific Integrated Circuit (ASIC), a

Radio-Frequency Integrated Circuit (RFIC), another processor, or any suitable combination thereof) may include, for example, a processor 1006 and a processor 1010 that execute the instructions 1008. The term "processor" is intended to include multi-core processors that may comprise two or more independent processors (sometimes referred to as "cores") that may execute instructions contemporaneously. Although FIG. 10 shows multiple processors 1002, the machine 1000 may include a single processor with a single-core, a single processor with multiple cores (e.g., a multi-core processor), multiple processors with a single core, multiple processors with multiples cores, or any combination thereof.

[0124] The memory 1004 includes a main memory 1012, a static memory 1014, and a storage unit 1016, all accessible to the processors 1002 via the bus 1040. The main memory 1004, the static memory 1014, and the storage unit 1016 store the instructions 1008 embodying any one or more of the methodologies or functions described herein. The instructions 1008 may also reside, completely or partially, within the main memory 1012, within the static memory 1014, within machine-readable medium 1018 within the storage unit 1016, within at least one of the processors 1002 (e.g., within the processor's cache memory), or any suitable combination thereof, during execution thereof by the machine 1000.

[0125] The I/O components 1038 may include a wide variety of components to receive input, provide output, produce output, transmit information, exchange information, capture measurements, and so on. The specific I/O components 1038 that are included in a particular machine will depend on the type of machine. For example, portable machines such as mobile phones may include a touch input device or other such input mechanisms, while a headless server machine will likely not include such a touch input device. It will be appreciated that the I/O components 1038 may include many other components that are not shown in FIG. 10. In various examples, the I/O components 1038 may include user output components 1024 and user input components 1026. The user output components 1024 may include visual components (e.g., a display such as a plasma display

panel (PDP), a light-emitting diode (LED) display, a liquid crystal display (LCD), a projector, or a cathode ray tube (CRT)), acoustic components (e.g., speakers), haptic components (e.g., a vibratory motor, resistance mechanisms), other signal generators, and so forth. The user input components 1026 may include alphanumeric input components (e.g., a keyboard, a touch screen configured to receive alphanumeric input, a photo-optical keyboard, or other alphanumeric input components), point-based input components (e.g., a mouse, a touchpad, a trackball, a joystick, a motion sensor, or another pointing instrument), tactile input components (e.g., a physical button, a touch screen that provides location and force of touches or touch gestures, or other tactile input components), audio input components (e.g., a microphone), and the like.

[0126] In further examples, the I/O components 1038 may include biometric components 1028, motion components 1030, environmental components 1032, or position components 1034, among a wide array of other components. For example, the biometric components 1028 include components to detect expressions (e.g., hand expressions, facial expressions, vocal expressions, body gestures, or eye-tracking), measure biosignals (e.g., blood pressure, heart rate, body temperature, perspiration, or brain waves), identify a person (e.g., voice identification, retinal identification, facial identification, fingerprint identification, or electroencephalogram-based identification), and the like. The motion components 1030 include acceleration sensor components (e.g., accelerometer), gravitation sensor components, rotation sensor components (e.g., gyroscope).

[0127] The environmental components 1032 include, for example, one or more cameras (with still image/photograph and video capabilities), illumination sensor components (e.g., photometer), temperature sensor components (e.g., one or more thermometers that detect ambient temperature), humidity sensor components, pressure sensor components (e.g., barometer), acoustic sensor components (e.g., one or more microphones that detect background noise), proximity sensor components (e.g., infrared sensors that detect nearby objects), gas sensors (e.g., gas

detection sensors to detection concentrations of hazardous gases for safety or to measure pollutants in the atmosphere), or other components that may provide indications, measurements, or signals corresponding to a surrounding physical environment.

[0128] With respect to cameras, the client device 102 may have a camera system comprising, for example, front cameras on a front surface of the client device 102 and rear cameras on a rear surface of the client device 102. The front cameras may, for example, be used to capture still images and video of a user of the client device 102 (e.g., “selfies”), which may then be augmented with augmentation data (e.g., filters) described above. The rear cameras may, for example, be used to capture still images and videos in a more traditional camera mode, with these images similarly being augmented with augmentation data. In addition to front and rear cameras, the client device 102 may also include a 360° camera for capturing 360° photographs and videos.

[0129] Further, the camera system of a client device 102 may include dual rear cameras (e.g., a primary camera as well as a depth-sensing camera), or even triple, quad, or penta rear camera configurations on the front and rear sides of the client device 102. These multiple cameras systems may include a wide camera, an ultra-wide camera, a telephoto camera, a macro camera, and a depth sensor, for example.

[0130] The position components 1034 may include location sensor components (e.g., a GPS receiver component), altitude sensor components (e.g., altimeters or barometers that detect air pressure from which altitude may be derived), orientation sensor components (e.g., magnetometers), and the like.

[0131] Communication may be implemented using a wide variety of technologies. The I/O components 1038 further include communication components 1036 operable to couple the machine 1000 to a network 1020 or devices 1022 via respective coupling or connections. For example, the communication components 1036 may include a network interface component or another suitable device to interface with the network 1020. In

further examples, the communication components 1036 may include wired communication components, wireless communication components, cellular communication components, Near Field Communication (NFC) components, Bluetooth® components (e.g., Bluetooth® Low Energy), Wi-Fi® components, and other communication components to provide communication via other modalities. The devices 1022 may be another machine or any of a wide variety of peripheral devices (e.g., a peripheral device coupled via a USB).

[0132] Moreover, the communication components 1036 may detect identifiers or include components operable to detect identifiers. For example, the communication components 1036 may include Radio Frequency Identification (RFID) tag reader components, NFC smart tag detection components, optical reader components (e.g., an optical sensor to detect one-dimensional bar codes such as Universal Product Code (UPC) bar code, multi-dimensional bar codes such as Quick Response (QR) code, Aztec code, Data Matrix, Dataglyph, MaxiCode, PDF417, Ultra Code, UCC RSS-2D bar code, and other optical codes), or acoustic detection components (e.g., microphones to identify tagged audio signals). In addition, a variety of information may be derived via the communication components 1036, such as location via Internet Protocol (IP) geolocation, location via Wi-Fi® signal triangulation, location via detecting an NFC beacon signal that may indicate a particular location, and so forth.

[0133] The various memories (e.g., main memory 1012, static memory 1014, and memory of the processors 1002) and storage unit 1016 may store one or more sets of instructions and data structures (e.g., software) embodying or used by any one or more of the methodologies or functions described herein. These instructions (e.g., the instructions 1008), when executed by processors 1002, cause various operations to implement the disclosed examples.

[0134] The instructions 1008 may be transmitted or received over the network 1020, using a transmission medium, via a network interface device (e.g., a network interface component included in the communication components 1036) and using any one of several well-known transfer

protocols (e.g., HTTP). Similarly, the instructions 1008 may be transmitted or received using a transmission medium via a coupling (e.g., a peer-to-peer coupling) to the devices 1022.

SOFTWARE ARCHITECTURE

[0135] FIG. 11 is a block diagram 1100 illustrating a software architecture 1104, which can be installed on any one or more of the devices described herein. The software architecture 1104 is supported by hardware such as a machine 1102 that includes processors 1120, memory 1126, and I/O components 1138. In this example, the software architecture 1104 can be conceptualized as a stack of layers, where each layer provides a particular functionality. The software architecture 1104 includes layers such as an operating system 1112, libraries 1110, frameworks 1108, and applications 1106. Operationally, the applications 1106 invoke API calls 1150 through the software stack and receive messages 1152 in response to the API calls 1150.

[0136] The operating system 1112 manages hardware resources and provides common services. The operating system 1112 includes, for example, a kernel 1114, services 1116, and drivers 1122. The kernel 1114 acts as an abstraction layer between the hardware and the other software layers. For example, the kernel 1114 provides memory management, processor management (e.g., scheduling), component management, networking, and security settings, among other functionality. The services 1116 can provide other common services for the other software layers. The drivers 1122 are responsible for controlling or interfacing with the underlying hardware. For instance, the drivers 1122 can include display drivers, camera drivers, BLUETOOTH® or BLUETOOTH® Low Energy drivers, flash memory drivers, serial communication drivers (e.g., USB drivers), WI-FI® drivers, audio drivers, power management drivers, and so forth.

[0137] The libraries 1110 provide a common low-level infrastructure used by applications 1106. The libraries 1110 can include system libraries 1118

(e.g., C standard library) that provide functions such as memory allocation functions, string manipulation functions, mathematic functions, and the like. In addition, the libraries 1110 can include API libraries 1124 such as media libraries (e.g., libraries to support presentation and manipulation of various media formats such as Moving Picture Experts Group-4 (MPEG4), Advanced Video Coding (H.264 or AVC), Moving Picture Experts Group Layer-3 (MP3), Advanced Audio Coding (AAC), Adaptive Multi-Rate (AMR) audio codec, Joint Photographic Experts Group (JPEG or JPG), or Portable Network Graphics (PNG)), graphics libraries (e.g., an OpenGL framework used to render in 2D and 3D in a graphic content on a display), database libraries (e.g., SQLite to provide various relational database functions), web libraries (e.g., WebKit to provide web browsing functionality), and the like. The libraries 1110 can also include a wide variety of other libraries 1128 to provide many other APIs to the applications 1106.

[0138] The frameworks 1108 provide a common high-level infrastructure that is used by the applications 1106. For example, the frameworks 1108 provide various GUI functions, high-level resource management, and high-level location services. The frameworks 1108 can provide a broad spectrum of other APIs that can be used by the applications 1106, some of which may be specific to a particular operating system or platform.

[0139] In an example, the applications 1106 may include a home application 1136, a contacts application 1130, a browser application 1132, a book reader application 1134, a location application 1142, a media application 1144, a messaging application 1146, a game application 1148, and a broad assortment of other applications such as an external application 1140. The applications 1106 are programs that execute functions defined in the programs. Various programming languages can be employed to create one or more of the applications 1106, structured in a variety of manners, such as object-oriented programming languages (e.g., Objective-C, Java, or C++) or procedural programming languages (e.g., C or assembly language). In a specific example, the external application 1140 (e.g., an application

developed using the ANDROID™ or IOS™ SDK by an entity other than the vendor of the particular platform) may be mobile software running on a mobile operating system such as IOS™, ANDROID™, WINDOWS® Phone, or another mobile operating system. In this example, the external application 1140 can invoke the API calls 1150 provided by the operating system 1112 to facilitate functionality described herein.

[0140] GLOSSARY

[0141] "Carrier signal" refers to any intangible medium that is capable of storing, encoding, or carrying instructions for execution by the machine, and includes digital or analog communications signals or other intangible media to facilitate communication of such instructions. Instructions may be transmitted or received over a network using a transmission medium via a network interface device.

[0142] "Client device" refers to any machine that interfaces to a communications network to obtain resources from one or more server systems or other client devices. A client device may be, but is not limited to, a mobile phone, desktop computer, laptop, PDA, smartphone, tablet, ultrabook, netbook, laptop, multi-processor system, microprocessor-based or programmable consumer electronics, game console, STB, or any other communication device that a user may use to access a network.

[0143] "Communication network" refers to one or more portions of a network that may be an ad hoc network, an intranet, an extranet, a virtual private network (VPN), a local area network (LAN), a wireless LAN (WLAN), a wide area network (WAN), a wireless WAN (WWAN), a metropolitan area network (MAN), the Internet, a portion of the Internet, a portion of the Public Switched Telephone Network (PSTN), a plain old telephone service (POTS) network, a cellular telephone network, a wireless network, a Wi-Fi® network, another type of network, or a combination of two or more such networks. For example, a network or a portion of a network may include a wireless or cellular network and the coupling may be a Code Division Multiple Access (CDMA) connection, a Global System for Mobile communications (GSM) connection, or other types of cellular or

wireless coupling. In this example, the coupling may implement any of a variety of types of data transfer technology, such as Single Carrier Radio Transmission Technology (1xRTT), Evolution-Data Optimized (EVDO) technology, General Packet Radio Service (GPRS) technology, Enhanced Data rates for GSM Evolution (EDGE) technology, third Generation Partnership Project (3GPP) including 3G, fourth generation wireless (4G) networks, Universal Mobile Telecommunications System (UMTS), High Speed Packet Access (HSPA), Worldwide Interoperability for Microwave Access (WiMAX), Long Term Evolution (LTE) standard, others defined by various standard-setting organizations, other long-range protocols, or other data transfer technology.

[0144] "Component" refers to a device, physical entity, or logic having boundaries defined by function or subroutine calls, branch points, APIs, or other technologies that provide for the partitioning or modularization of particular processing or control functions. Components may be combined via their interfaces with other components to carry out a machine process. A component may be a packaged functional hardware unit designed for use with other components and a part of a program that usually performs a particular function of related functions.

[0145] Components may constitute either software components (e.g., code embodied on a machine-readable medium) or hardware components. A "hardware component" is a tangible unit capable of performing certain operations and may be configured or arranged in a certain physical manner. In various examples, one or more computer systems (e.g., a standalone computer system, a client computer system, or a server computer system) or one or more hardware components of a computer system (e.g., a processor or a group of processors) may be configured by software (e.g., an application or application portion) as a hardware component that operates to perform certain operations as described herein.

[0146] A hardware component may also be implemented mechanically, electronically, or any suitable combination thereof. For example, a hardware component may include dedicated circuitry or logic that is permanently

configured to perform certain operations. A hardware component may be a special-purpose processor, such as a field-programmable gate array (FPGA) or an ASIC. A hardware component may also include programmable logic or circuitry that is temporarily configured by software to perform certain operations. For example, a hardware component may include software executed by a general-purpose processor or other programmable processor. Once configured by such software, hardware components become specific machines (or specific components of a machine) uniquely tailored to perform the configured functions and are no longer general-purpose processors. It will be appreciated that the decision to implement a hardware component mechanically, in dedicated and permanently configured circuitry, or in temporarily configured circuitry (e.g., configured by software), may be driven by cost and time considerations. Accordingly, the phrase "hardware component" (or "hardware-implemented component") should be understood to encompass a tangible entity, be that an entity that is physically constructed, permanently configured (e.g., hardwired), or temporarily configured (e.g., programmed) to operate in a certain manner or to perform certain operations described herein.

[0147] Considering examples in which hardware components are temporarily configured (e.g., programmed), each of the hardware components need not be configured or instantiated at any one instance in time. For example, where a hardware component comprises a general-purpose processor configured by software to become a special-purpose processor, the general-purpose processor may be configured as respectively different special-purpose processors (e.g., comprising different hardware components) at different times. Software accordingly configures a particular processor or processors, for example, to constitute a particular hardware component at one instance of time and to constitute a different hardware component at a different instance of time.

[0148] Hardware components can provide information to, and receive information from, other hardware components. Accordingly, the described hardware components may be regarded as being communicatively coupled.

Where multiple hardware components exist contemporaneously, communications may be achieved through signal transmission (e.g., over appropriate circuits and buses) between or among two or more of the hardware components. In examples in which multiple hardware components are configured or instantiated at different times, communications between such hardware components may be achieved, for example, through the storage and retrieval of information in memory structures to which the multiple hardware components have access. For example, one hardware component may perform an operation and store the output of that operation in a memory device to which it is communicatively coupled. A further hardware component may then, at a later time, access the memory device to retrieve and process the stored output. Hardware components may also initiate communications with input or output devices, and can operate on a resource (e.g., a collection of information).

[0149] The various operations of example methods described herein may be performed, at least partially, by one or more processors that are temporarily configured (e.g., by software) or permanently configured to perform the relevant operations. Whether temporarily or permanently configured, such processors may constitute processor-implemented components that operate to perform one or more operations or functions described herein. As used herein, "processor-implemented component" refers to a hardware component implemented using one or more processors. Similarly, the methods described herein may be at least partially processor-implemented, with a particular processor or processors being an example of hardware. For example, at least some of the operations of a method may be performed by one or more processors 1002 or processor-implemented components. Moreover, the one or more processors may also operate to support performance of the relevant operations in a "cloud computing" environment or as a "software as a service" (SaaS). For example, at least some of the operations may be performed by a group of computers (as examples of machines including processors), with these operations being accessible via a network (e.g., the Internet) and via one or more appropriate interfaces (e.g., an API). The performance of certain of the operations may be distributed among the

processors, not only residing within a single machine, but deployed across a number of machines. In some examples, the processors or processor-implemented components may be located in a single geographic location (e.g., within a home environment, an office environment, or a server farm). In other examples, the processors or processor-implemented components may be distributed across a number of geographic locations.

[0150] "Computer-readable storage medium" refers to both machine-storage media and transmission media. Thus, the terms include both storage devices/media and carrier waves/modulated data signals. The terms "machine-readable medium," "computer-readable medium," and "device-readable medium" mean the same thing and may be used interchangeably in this disclosure.

[0151] "Ephemeral message" refers to a message that is accessible for a time-limited duration. An ephemeral message may be a text, an image, a video, and the like. The access time for the ephemeral message may be set by the message sender. Alternatively, the access time may be a default setting or a setting specified by the recipient. Regardless of the setting technique, the message is transitory.

[0152] "Machine storage medium" refers to a single or multiple storage devices and media (e.g., a centralized or distributed database, and associated caches and servers) that store executable instructions, routines, and data. The term shall accordingly be taken to include, but not be limited to, solid-state memories, and optical and magnetic media, including memory internal or external to processors. Specific examples of machine-storage media, computer-storage media and device-storage media include non-volatile memory, including by way of example semiconductor memory devices, e.g., erasable programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), FPGA, and flash memory devices; magnetic disks such as internal hard disks and removable disks; magneto-optical disks; and CD-ROM and DVD-ROM disks. The terms "machine-storage medium," "device-storage medium," and "computer-storage medium" mean the same thing and may be used interchangeably in

this disclosure. The terms "machine-storage media," "computer-storage media," and "device-storage media" specifically exclude carrier waves, modulated data signals, and other such media, at least some of which are covered under the term "signal medium."

[0153] "Non-transitory computer-readable storage medium" refers to a tangible medium that is capable of storing, encoding, or carrying the instructions for execution by a machine.

[0154] "Signal medium" refers to any intangible medium that is capable of storing, encoding, or carrying the instructions for execution by a machine and includes digital or analog communications signals or other intangible media to facilitate communication of software or data. The term "signal medium" shall be taken to include any form of a modulated data signal, carrier wave, and so forth. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. The terms "transmission medium" and "signal medium" mean the same thing and may be used interchangeably in this disclosure.

[0155] Changes and modifications may be made to the disclosed examples without departing from the scope of the present disclosure. These and other changes or modifications are intended to be included within the scope of the present disclosure, as expressed in the following claims.

What is claimed is:

1. A method comprising:
 - causing a wearable lens to operate in a first display mode, the first display mode allowing unobstructed light associated with a real-world environment to be received by a pupil of a user;
 - detecting a condition associated with display of virtual content;
 - in response to detecting the condition:
 - selecting between a second display mode and a third display mode as a new display mode in which to operate the wearable lens, the second display mode obstructing a portion of the light associated with the real-world environment received by the pupil with the virtual content, and the third display mode obstructing all the light associated with the real-world environment received by the pupil with the virtual content; and
 - transitioning the wearable lens from operating in the first display mode to operating in the new display mode.
2. The method of claim 1, wherein detecting the condition comprises:
 - receiving input requesting display of an augmented reality experience;
 - in response to receiving the input, selecting the second display mode as the new display mode; and
 - in response to transitioning the wearable lens from operating in the first display mode to operating in the new display mode, allowing both the light associated with the real-world environment and light associated with the augmented reality experience to be received by the pupil.
3. The method of claim 1, wherein detecting the condition comprises:
 - receiving input requesting display of a virtual reality experience;
 - in response to receiving the input, selecting the third display mode as the new display mode; and
 - in response to transitioning the wearable lens from operating in the first display mode to operating in the new display mode, allowing only light associated with the virtual reality experience to be received by the pupil to prevent passage of the light associated with the real-world environment.

4. The method of claim 1, wherein detecting the condition comprises:
accessing geographical location information associated with the wearable lens;
determining that the geographical location information is associated with an augmented reality experience; and
in response to determining that the geographical location information is associated with the augmented reality experience, selecting the second display mode as the new display mode.
5. The method of claim 1, wherein detecting the condition comprises:
accessing geographical location information associated with the wearable lens;
determining that the geographical location information is associated with a virtual reality experience; and
in response to determining that the geographical location information is associated with the virtual reality experience, selecting the third display mode as the new display mode.
6. The method of claim 5, wherein the geographical location information comprises a room previously designated as a virtual reality room.
7. The method of claim 1, wherein the wearable lens comprises contact lens, and wherein the contact lens comprises a display movable into a plurality of display positions, a first position of the plurality of display positions corresponding to the first display mode, the display in the first position fails to cover any portion of the pupil, a second position of the plurality of display positions corresponding to the second display mode, the display in the second position covers less than all of the pupil, and a third position of the plurality of display positions corresponding to the third display mode, the display in the third position completely covers the pupil.

8. The method of claim 7, wherein the display is placed on a physical track, further comprising sliding the display in the contact lens along the track into a selected one of the plurality of display positions.

9. The method of claim 7, wherein the display is placed on a physical arm, further comprising moving the physical arm including the display in the contact lens into a selected one of the plurality of display positions.

10. The method of claim 7, further comprising applying an electromagnetic force to move the display of the contact lens into a selected one of the plurality of display positions.

11. The method of claim 7, wherein the second position corresponds to a center of the pupil.

12. The method of claim 1, further comprising:
receiving, by a processor of the wearable lens, a video stream depicting the real-world environment;
overlaying the virtual content onto the video stream; and
causing a display of the wearable lens to present the video stream overlaid with the virtual content to transition the wearable lens from operating in the first display mode to operating in the new display mode.

13. The method of claim 12, wherein the video stream is captured by a camera of the wearable lens or glasses worn by the user.

14. The method of claim 1, further comprising:
detecting that a power state of the wearable lens has transgressed a threshold; and
in response to detecting that the power state of the wearable lens has transgressed the threshold, transitioning the wearable lens to a default state comprising the first display mode.

15. The method of claim 1, wherein the wearable lens comprises a switchable element, the switchable element having a first state in which light is prevented from passing through the switchable element, the switchable element having a second state in which the switchable element is partially transparent, and the switchable element having a third state in which the switchable element is completely transparent.

16. The method of claim 1, wherein the wearable lens comprises a polarized mirror positioned in front of the pupil, further comprising:

- selecting a first optical path by setting the polarized mirror to a first polarization state, the first polarization state allowing the unobstructed light associated with the real-world environment to be received by the pupil;

- selecting a second optical path by setting the polarized mirror to a second polarization state, the second polarization state allowing some of the light associated with the real-world environment to be received by the pupil and reflecting light associated with the virtual content from the polarized mirror towards the pupil; and

- selecting a third optical path by setting the polarized mirror to a third polarization state, the third polarization state preventing the light associated with the real-world environment to be received by the pupil and reflecting the light associated with the virtual content from the polarized mirror towards the pupil.

17. The method of claim 16, further comprising projecting the light associated with the virtual content towards the polarized mirror from a projector included in the wearable lens.

18. The method of claim 1, wherein the wearable lens comprises one or more mirrored slats positioned in front of the pupil, further comprising:

- selecting a first optical path by rotating the one or more mirrored slats into a first rotation state, the first rotation state allowing the unobstructed light associated with the real-world environment to be received by the pupil;

- selecting a second optical path by rotating the one or more mirrored slats into a second rotation state, the second rotation state allowing some of the light

associated with the real-world environment to be received by the pupil and reflecting light associated with the virtual content from the one or more mirrored slats towards the pupil; and

selecting a third optical path by rotating the one or more mirrored slats into a third rotation state, the third rotation state preventing the light associated with the real-world environment to be received by the pupil and reflecting the light associated with the virtual content from the one or more mirrored slats towards the pupil.

19. A system comprising:

a processor of a wearable lens; and

a memory component having instructions stored thereon that, when executed by the processor, cause the processor to perform operations comprising:

causing the wearable lens to operate in a first display mode, the first display mode allowing unobstructed light associated with a real-world environment to be received by a pupil of a user;

detecting a condition associated with display of virtual content;
in response to detecting the condition:

selecting between a second display mode and a third display mode as a new display mode in which to operate the wearable lens, the second display mode obstructing a portion of the light associated with the real-world environment received by the pupil with the virtual content, and the third display mode obstructing all the light associated with the real-world environment received by the pupil with the virtual content; and

transitioning the wearable lens from operating in the first display mode to operating in the new display mode.

20. A non-transitory computer-readable storage medium having stored thereon instructions that, when executed by a processor, cause the processor to perform operations comprising:

causing a wearable lens to operate in a first display mode, the first display mode allowing unobstructed light associated with a real-world environment to be received by a pupil of a user;

detecting a condition associated with display of virtual content;

in response to detecting the condition:

selecting between a second display mode and a third display mode as a new display mode in which to operate the wearable lens, the second display mode obstructing a portion of the light associated with the real-world environment received by the pupil with the virtual content, and the third display mode obstructing all the light associated with the real-world environment received by the pupil with the virtual content; and

transitioning the wearable lens from operating in the first display mode to operating in the new display mode.

1/14

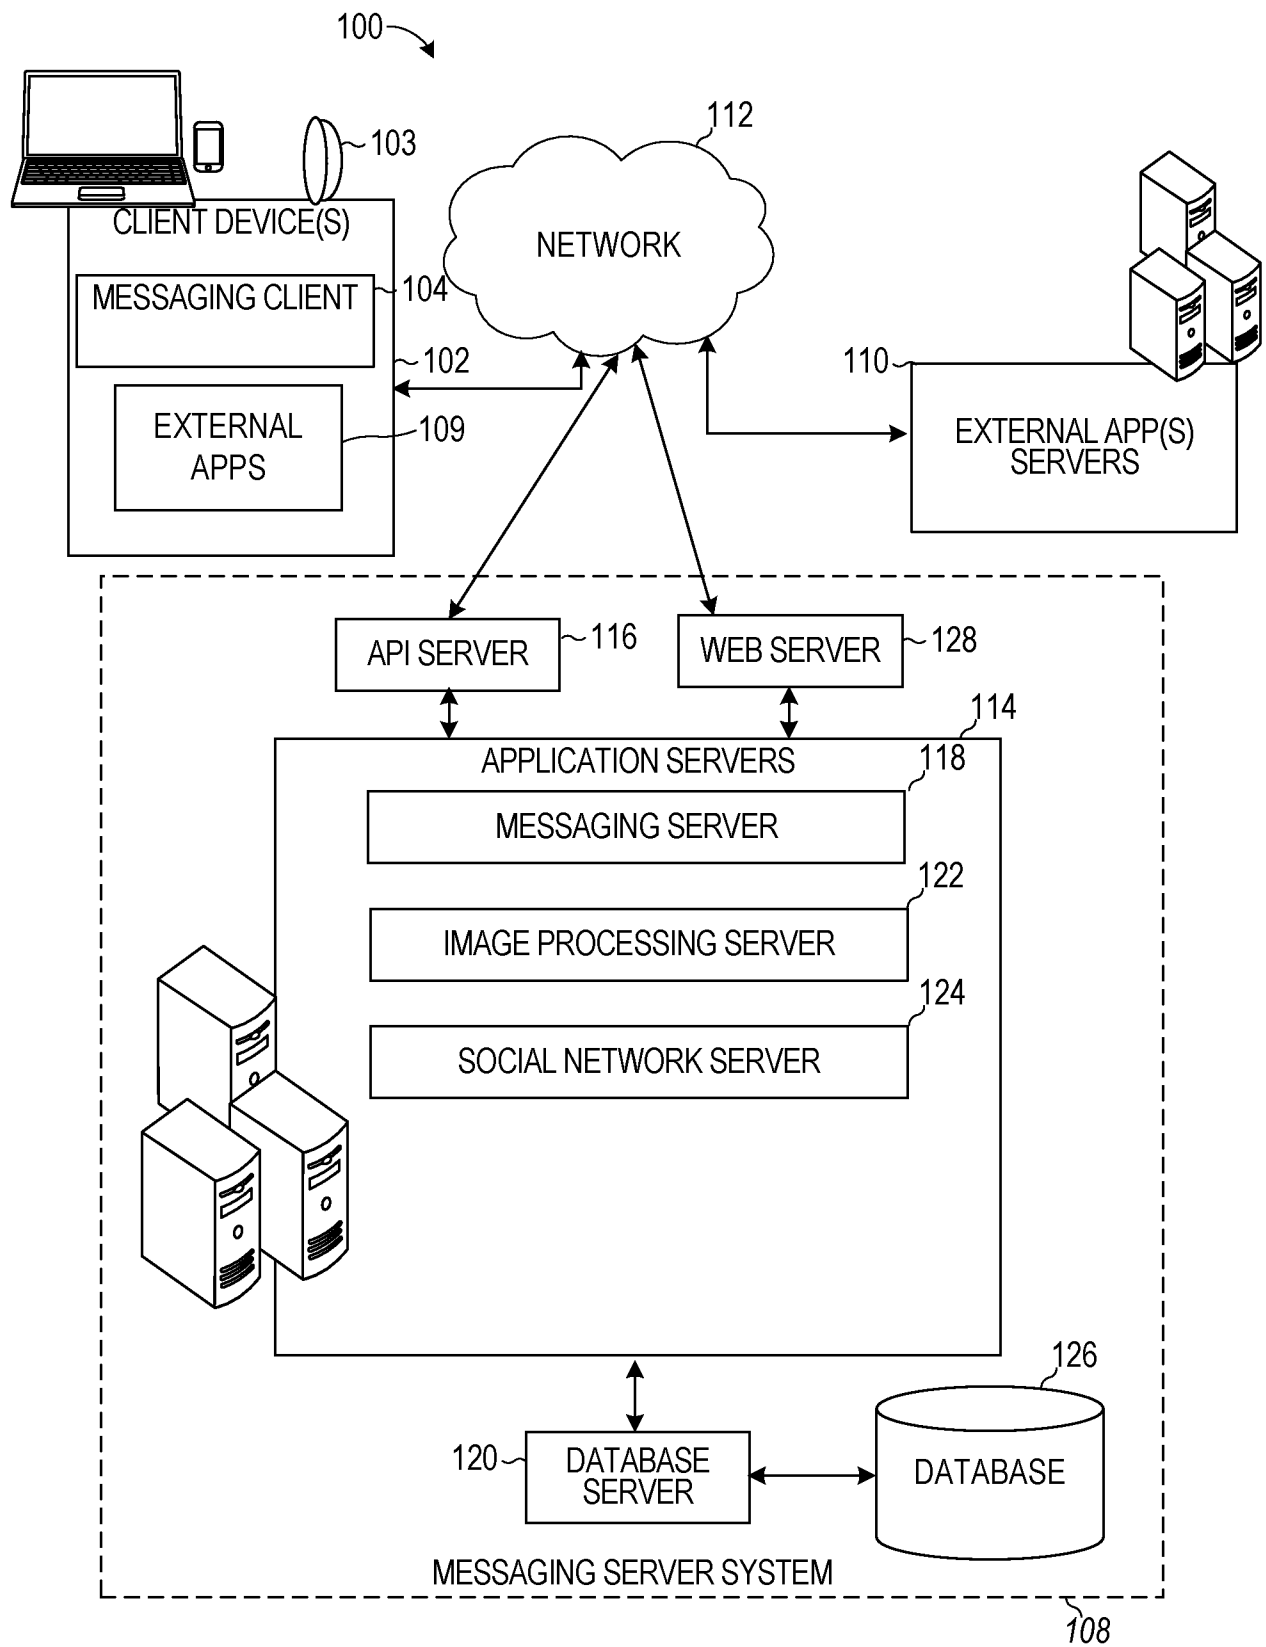


FIG. 1

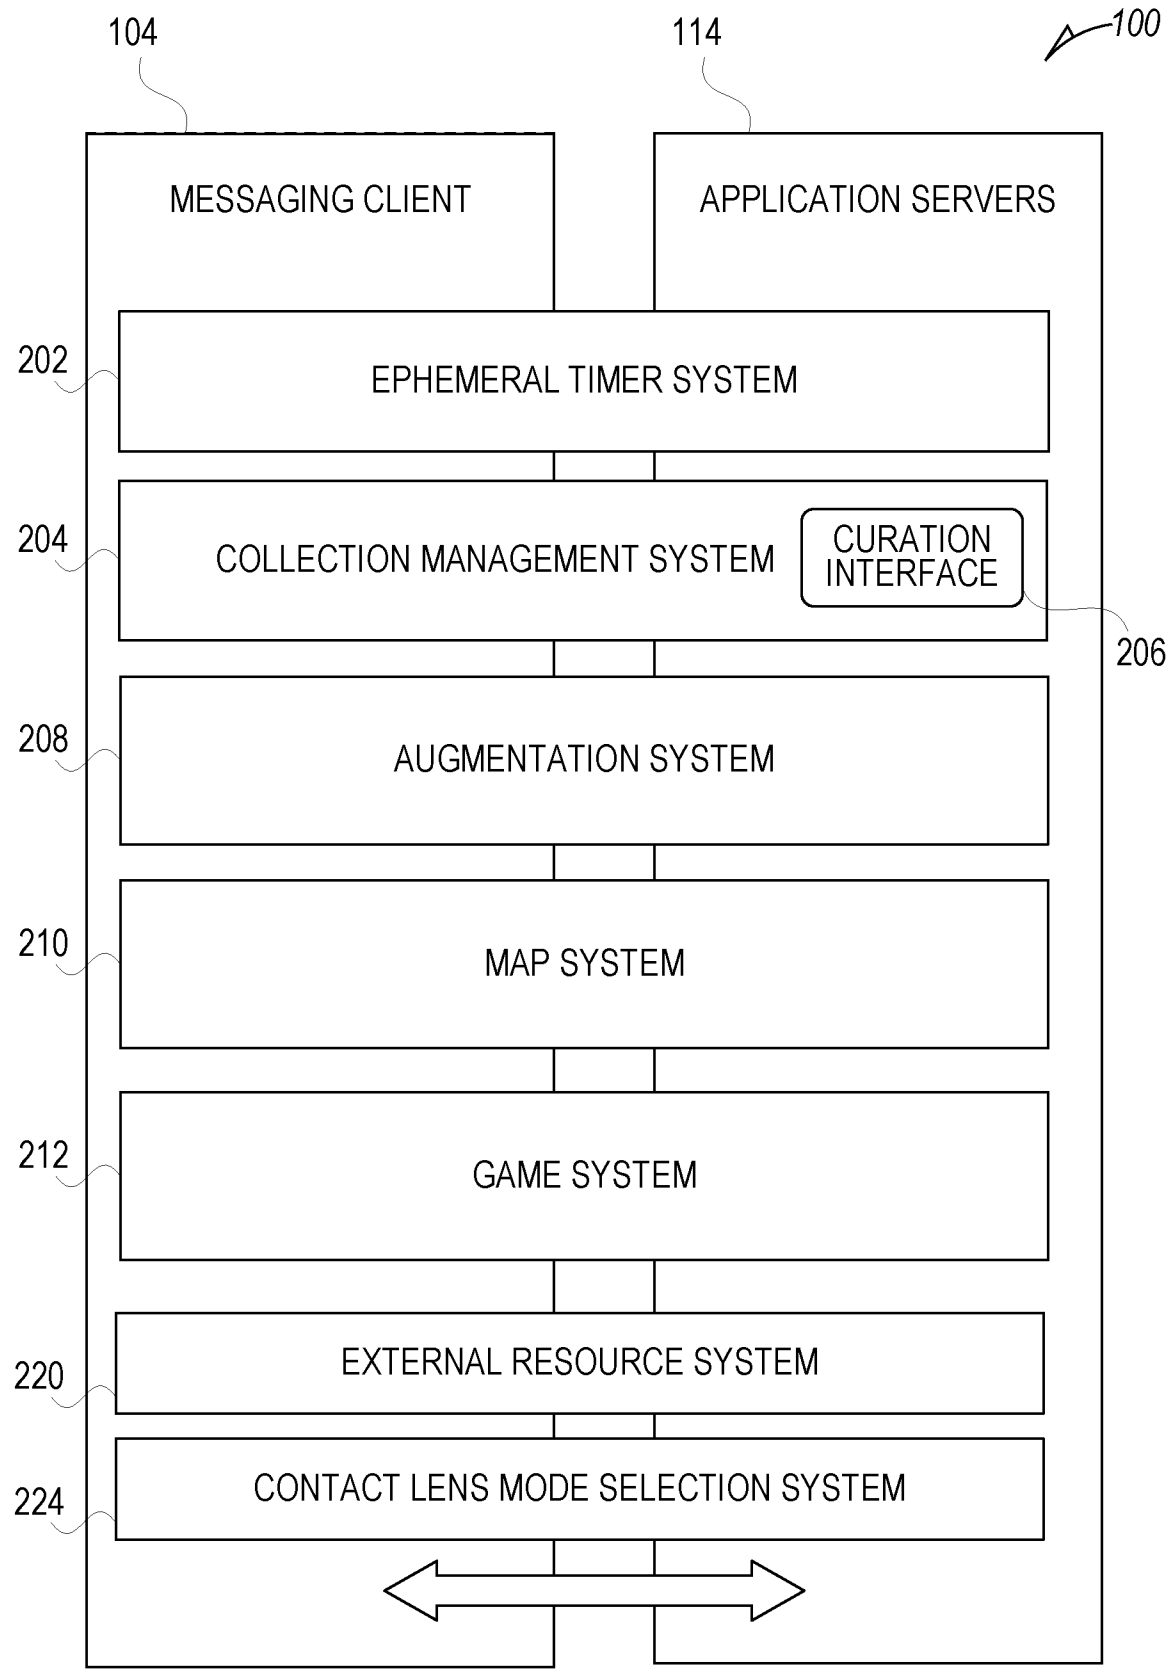


FIG. 2

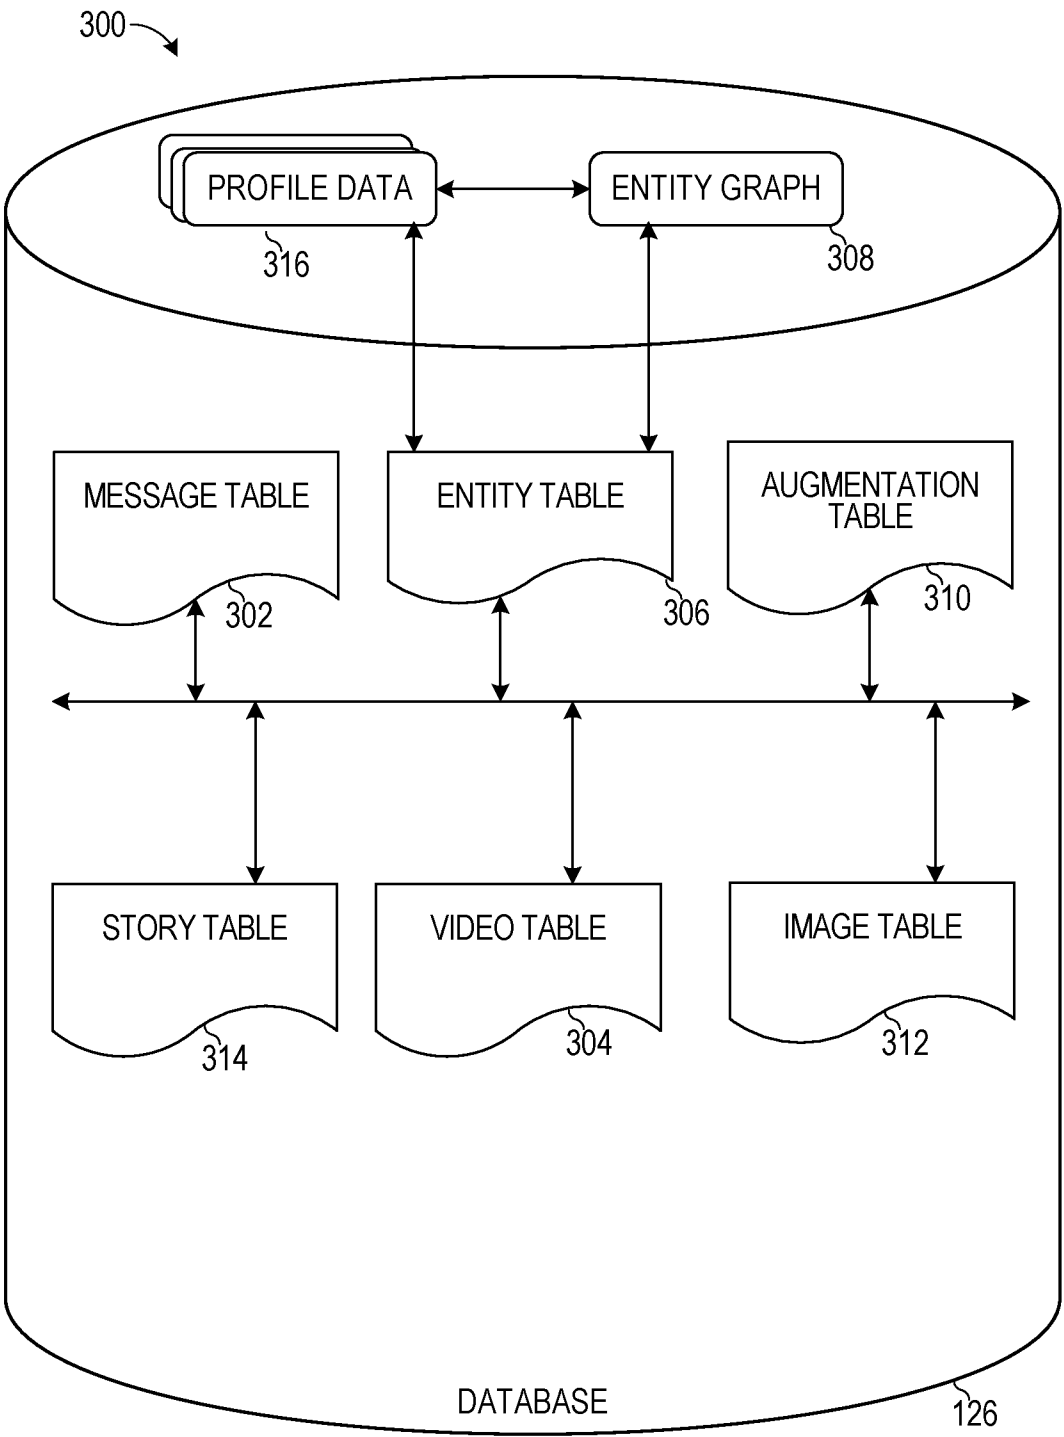


FIG. 3

4 / 14

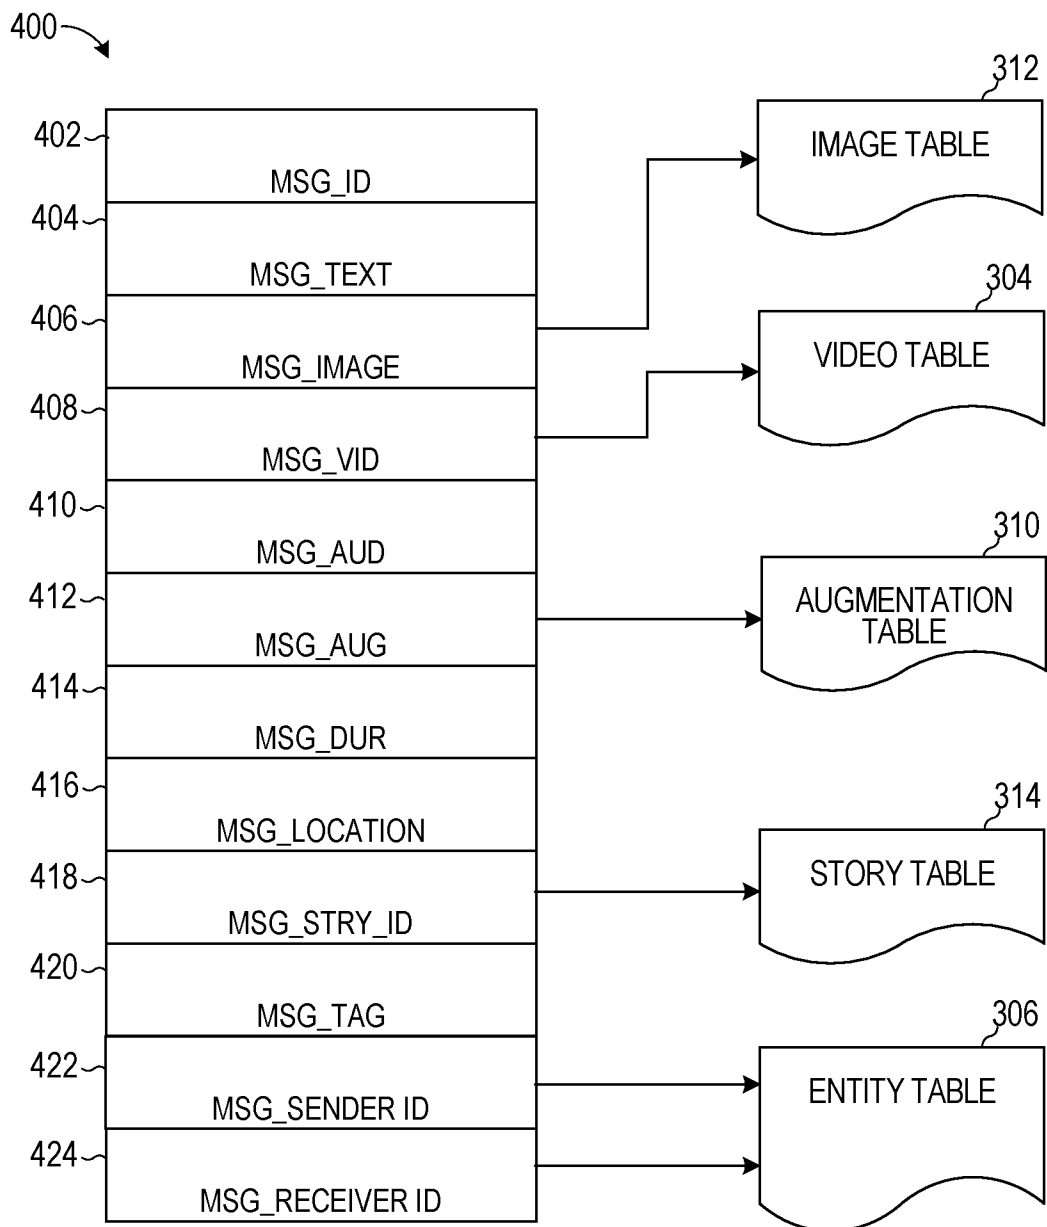


FIG. 4

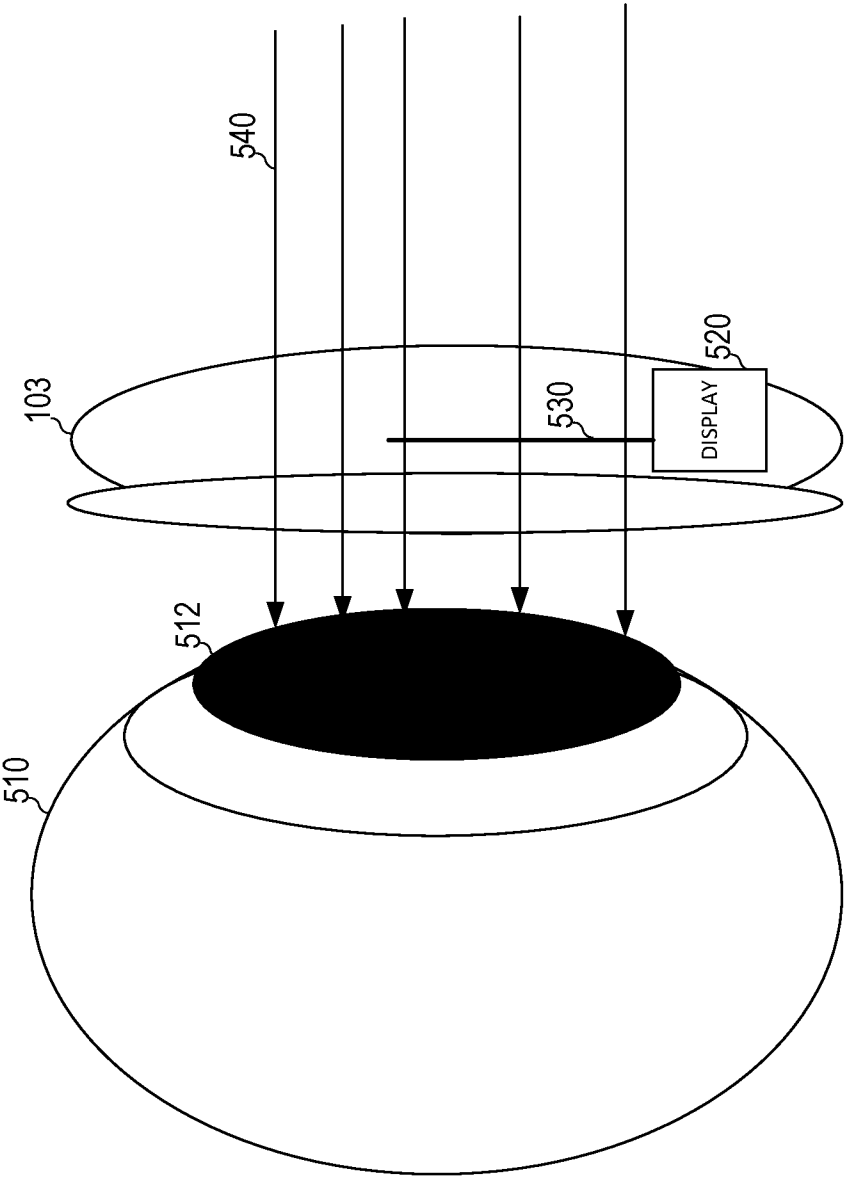


FIG. 5A

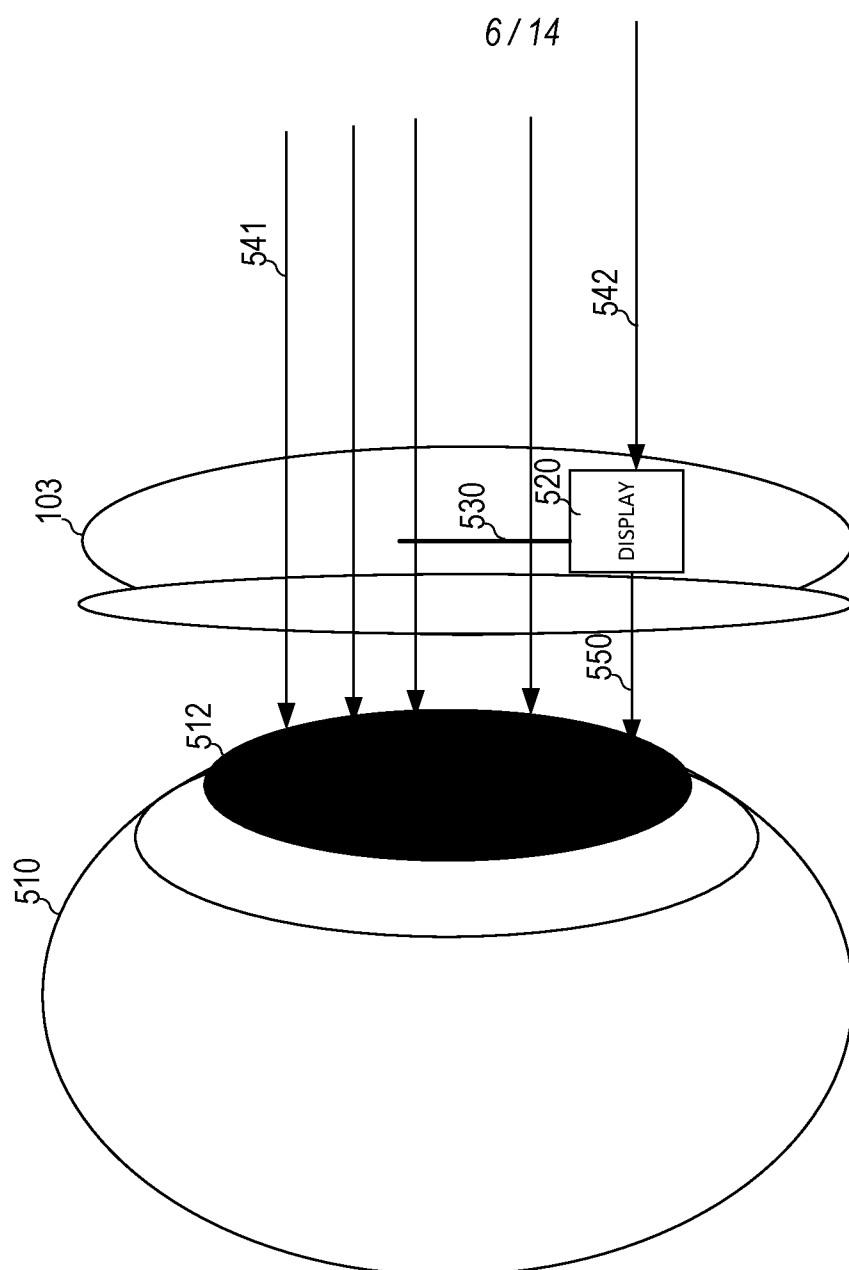


FIG. 5B

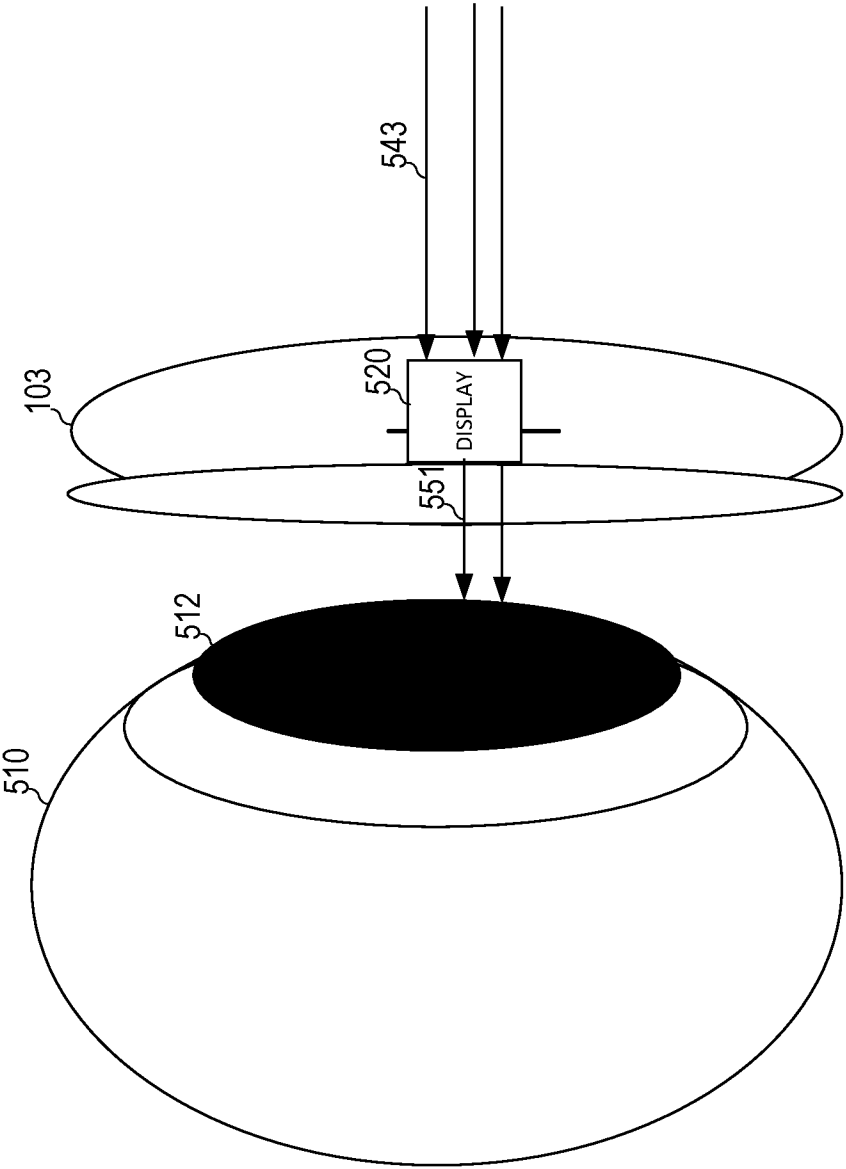


FIG. 5C

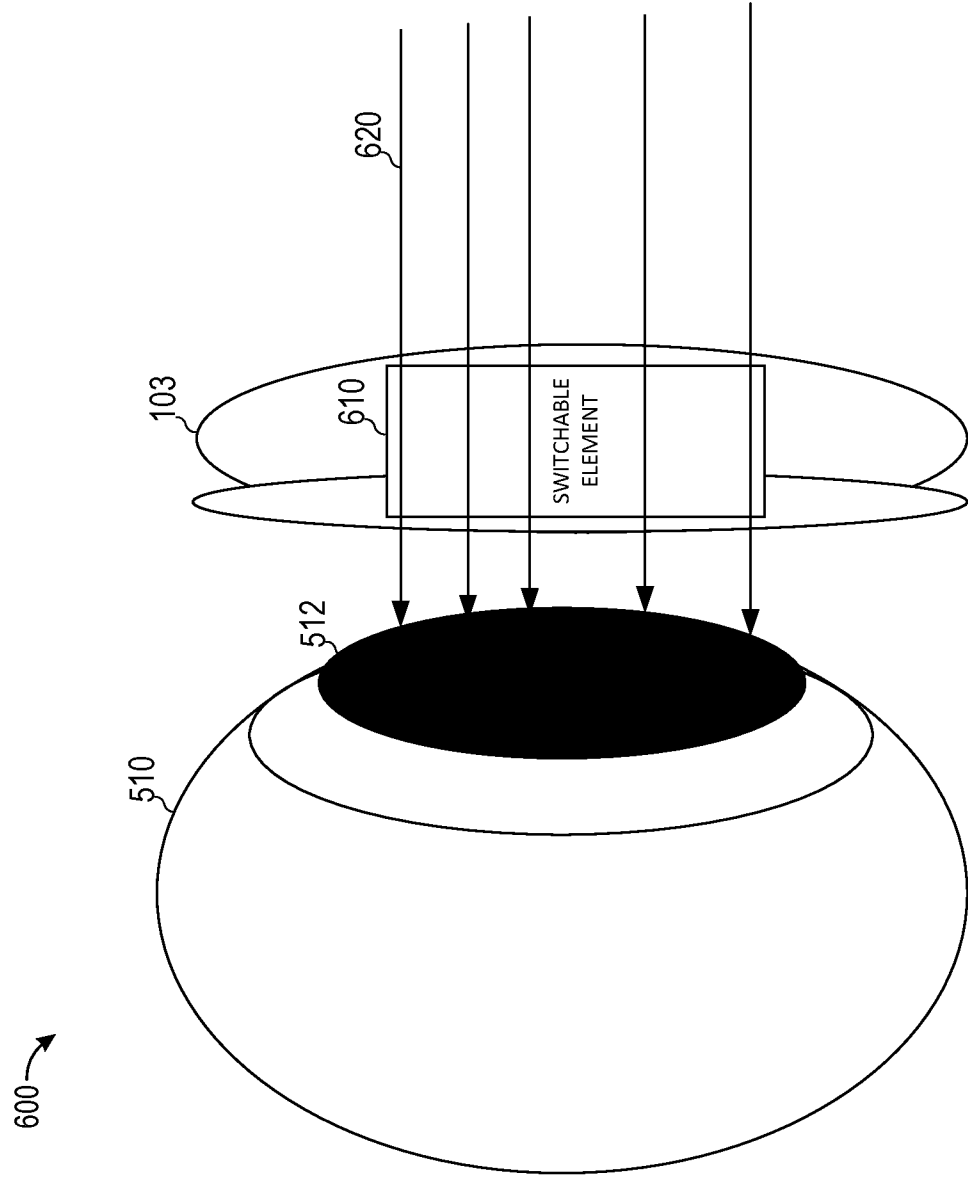


FIG. 6

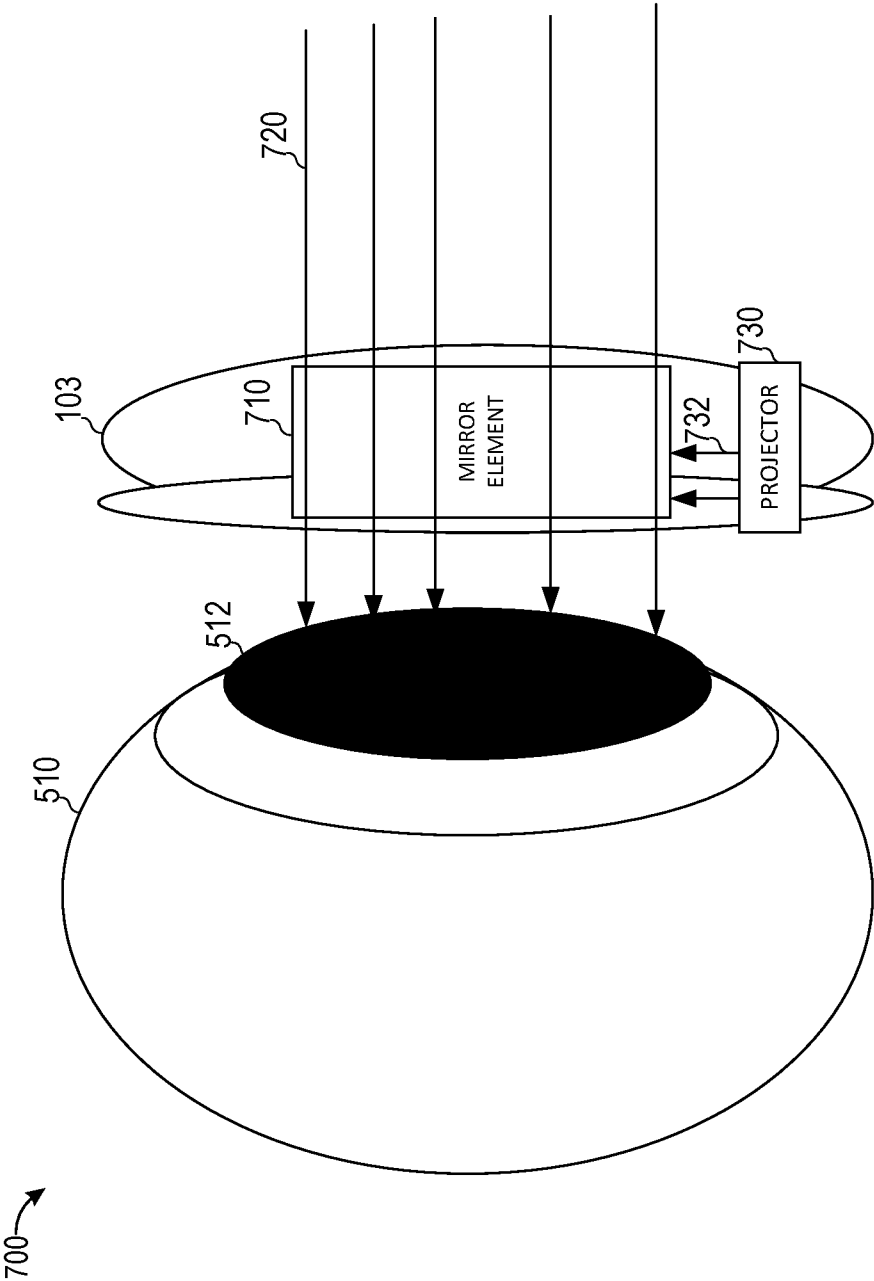


FIG. 7

800

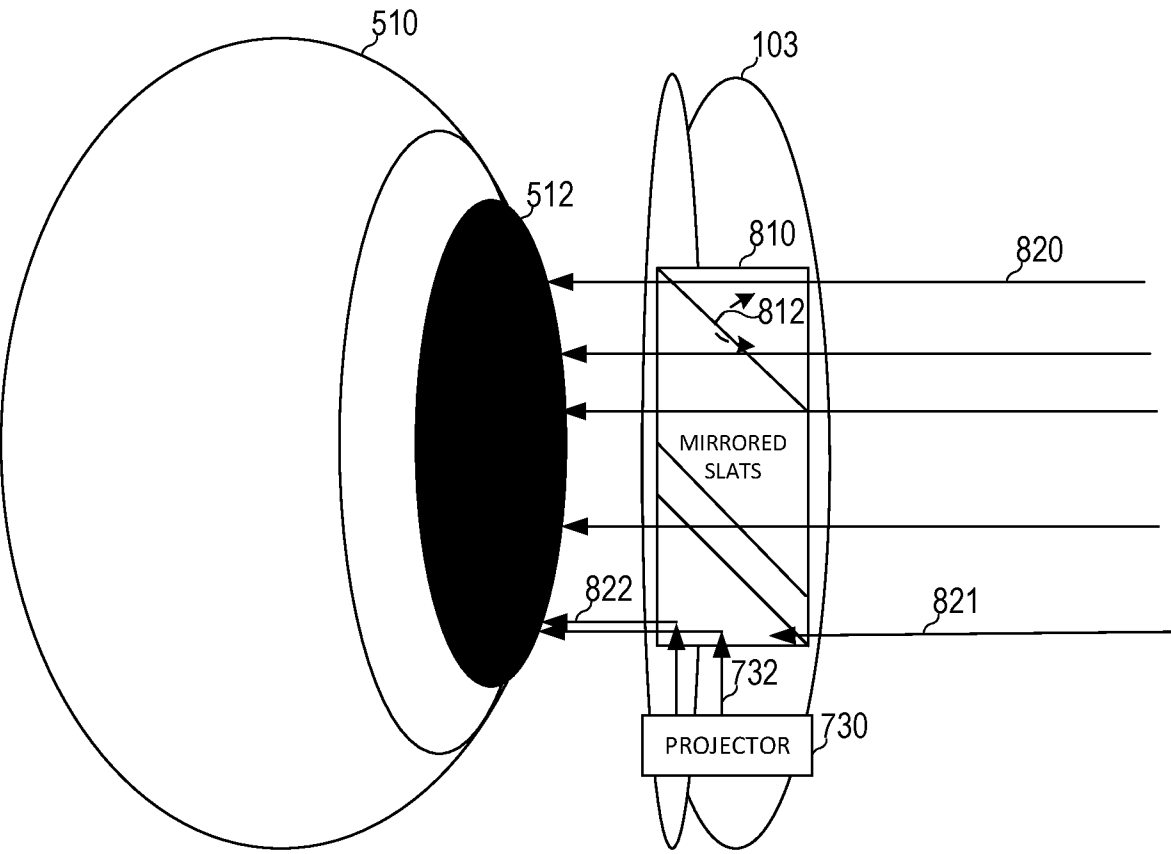


FIG. 8

11 / 14

900

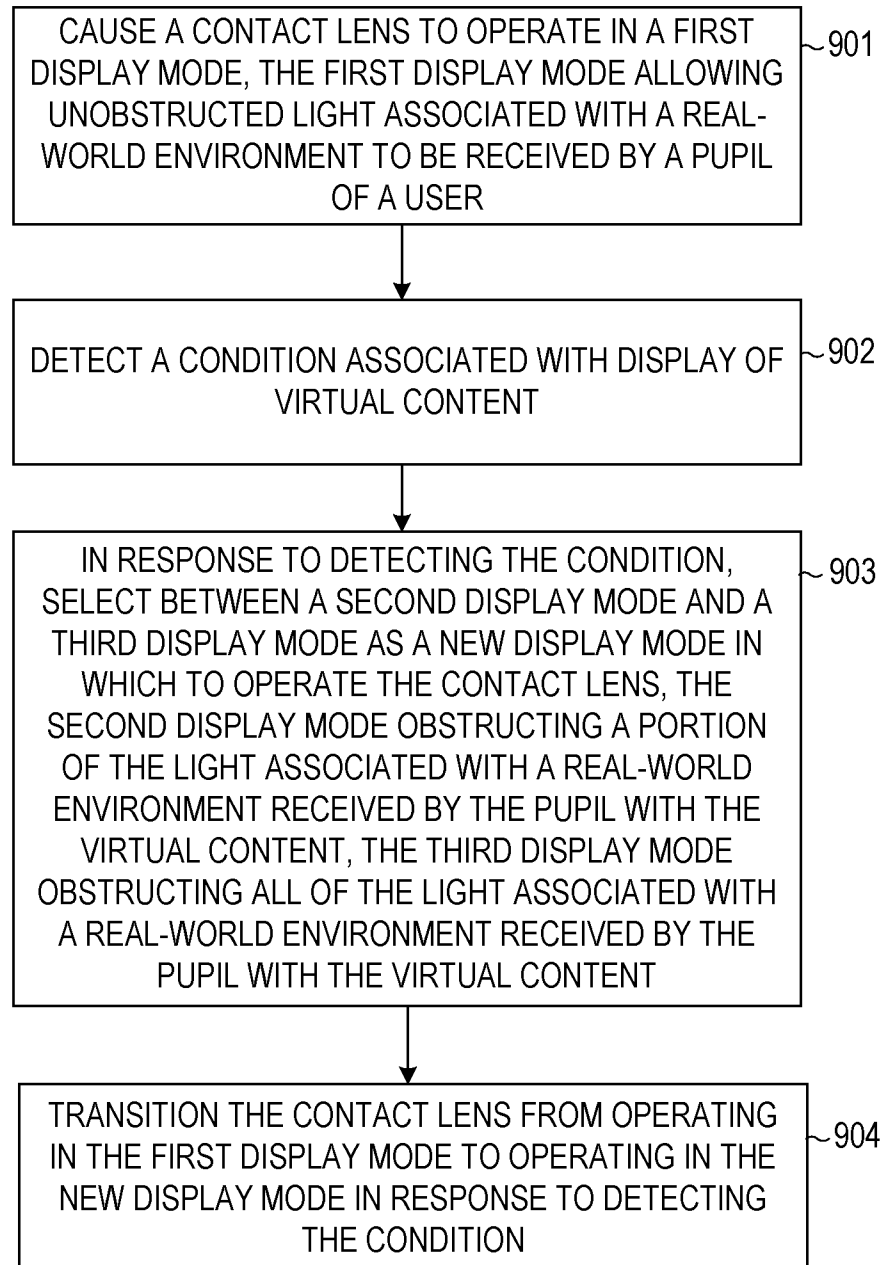


FIG. 9

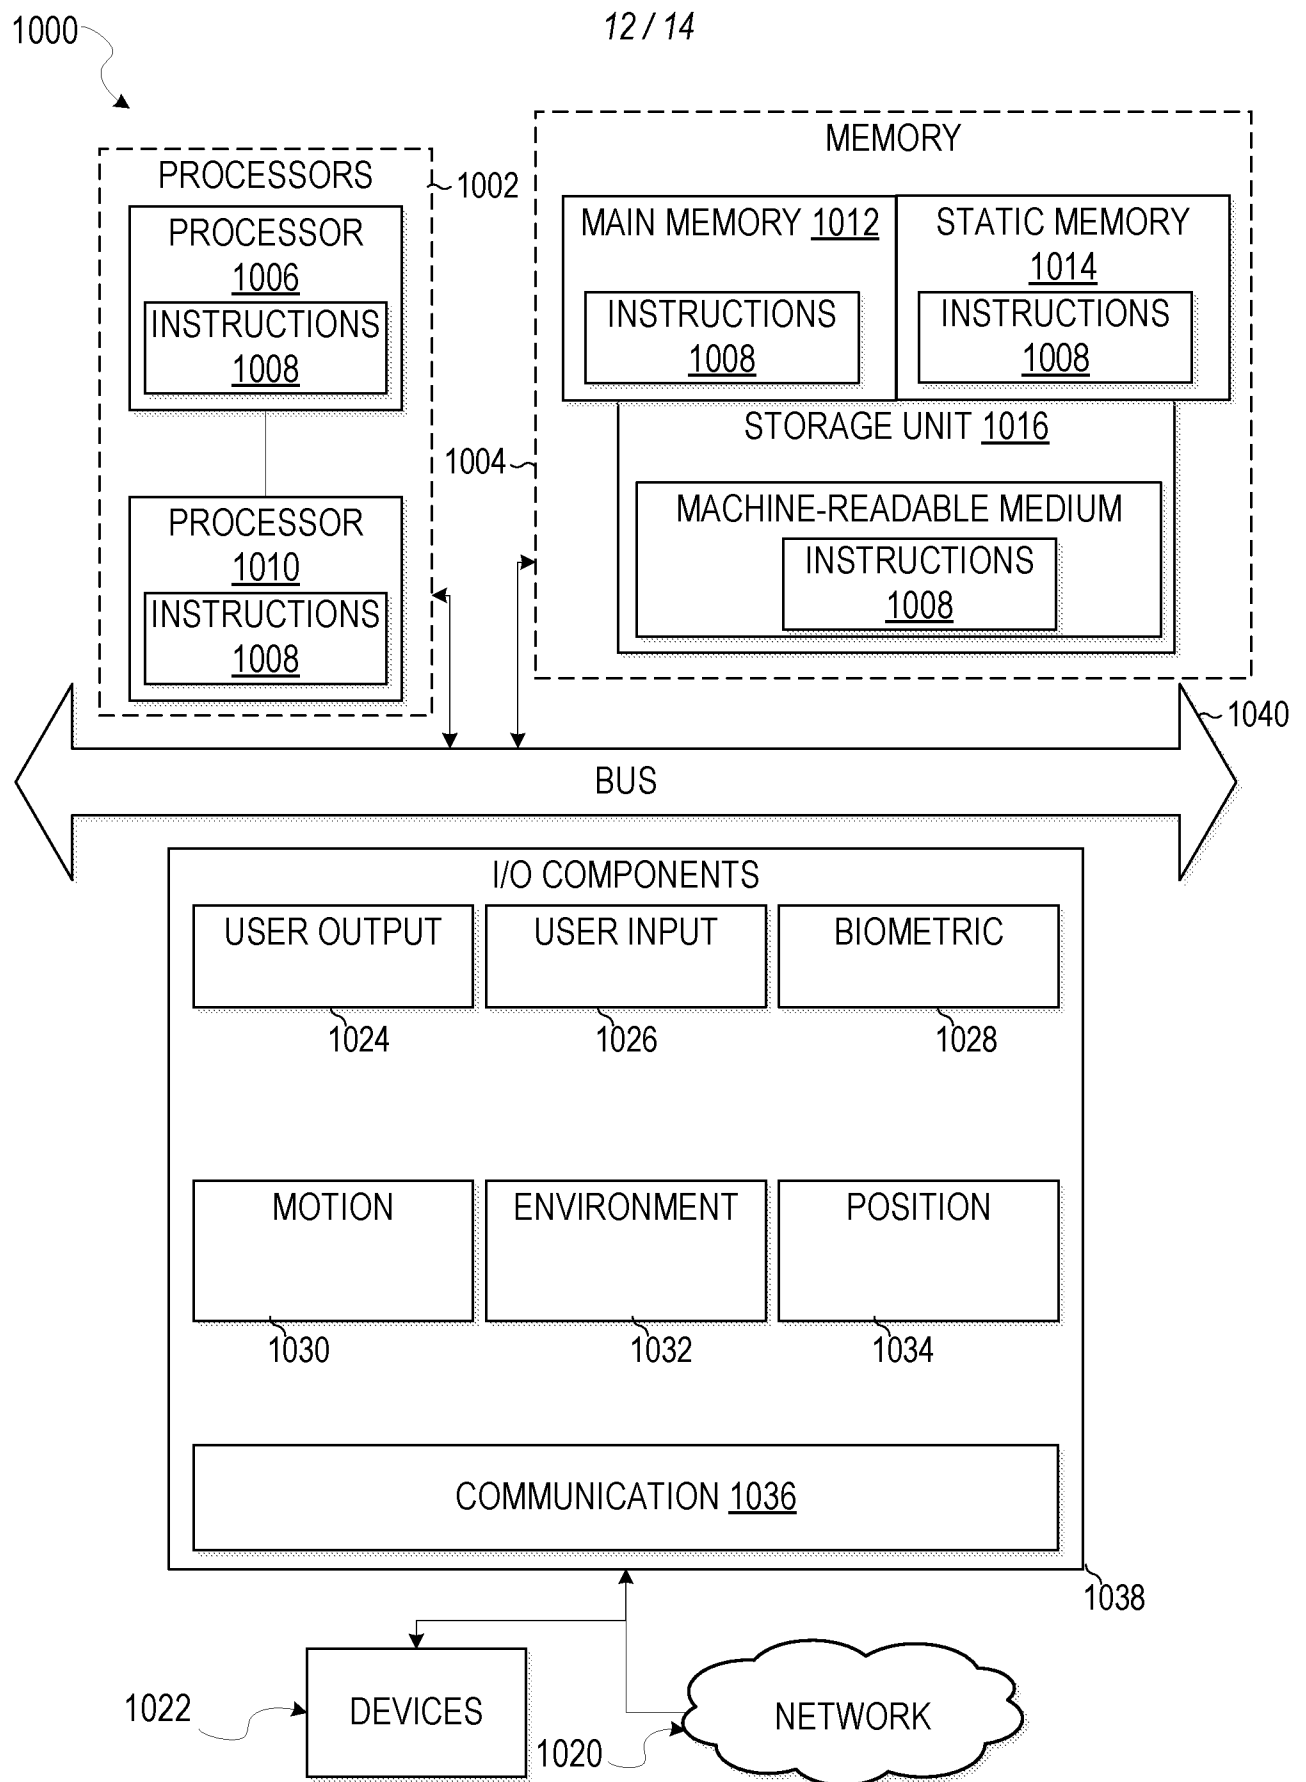


FIG. 10

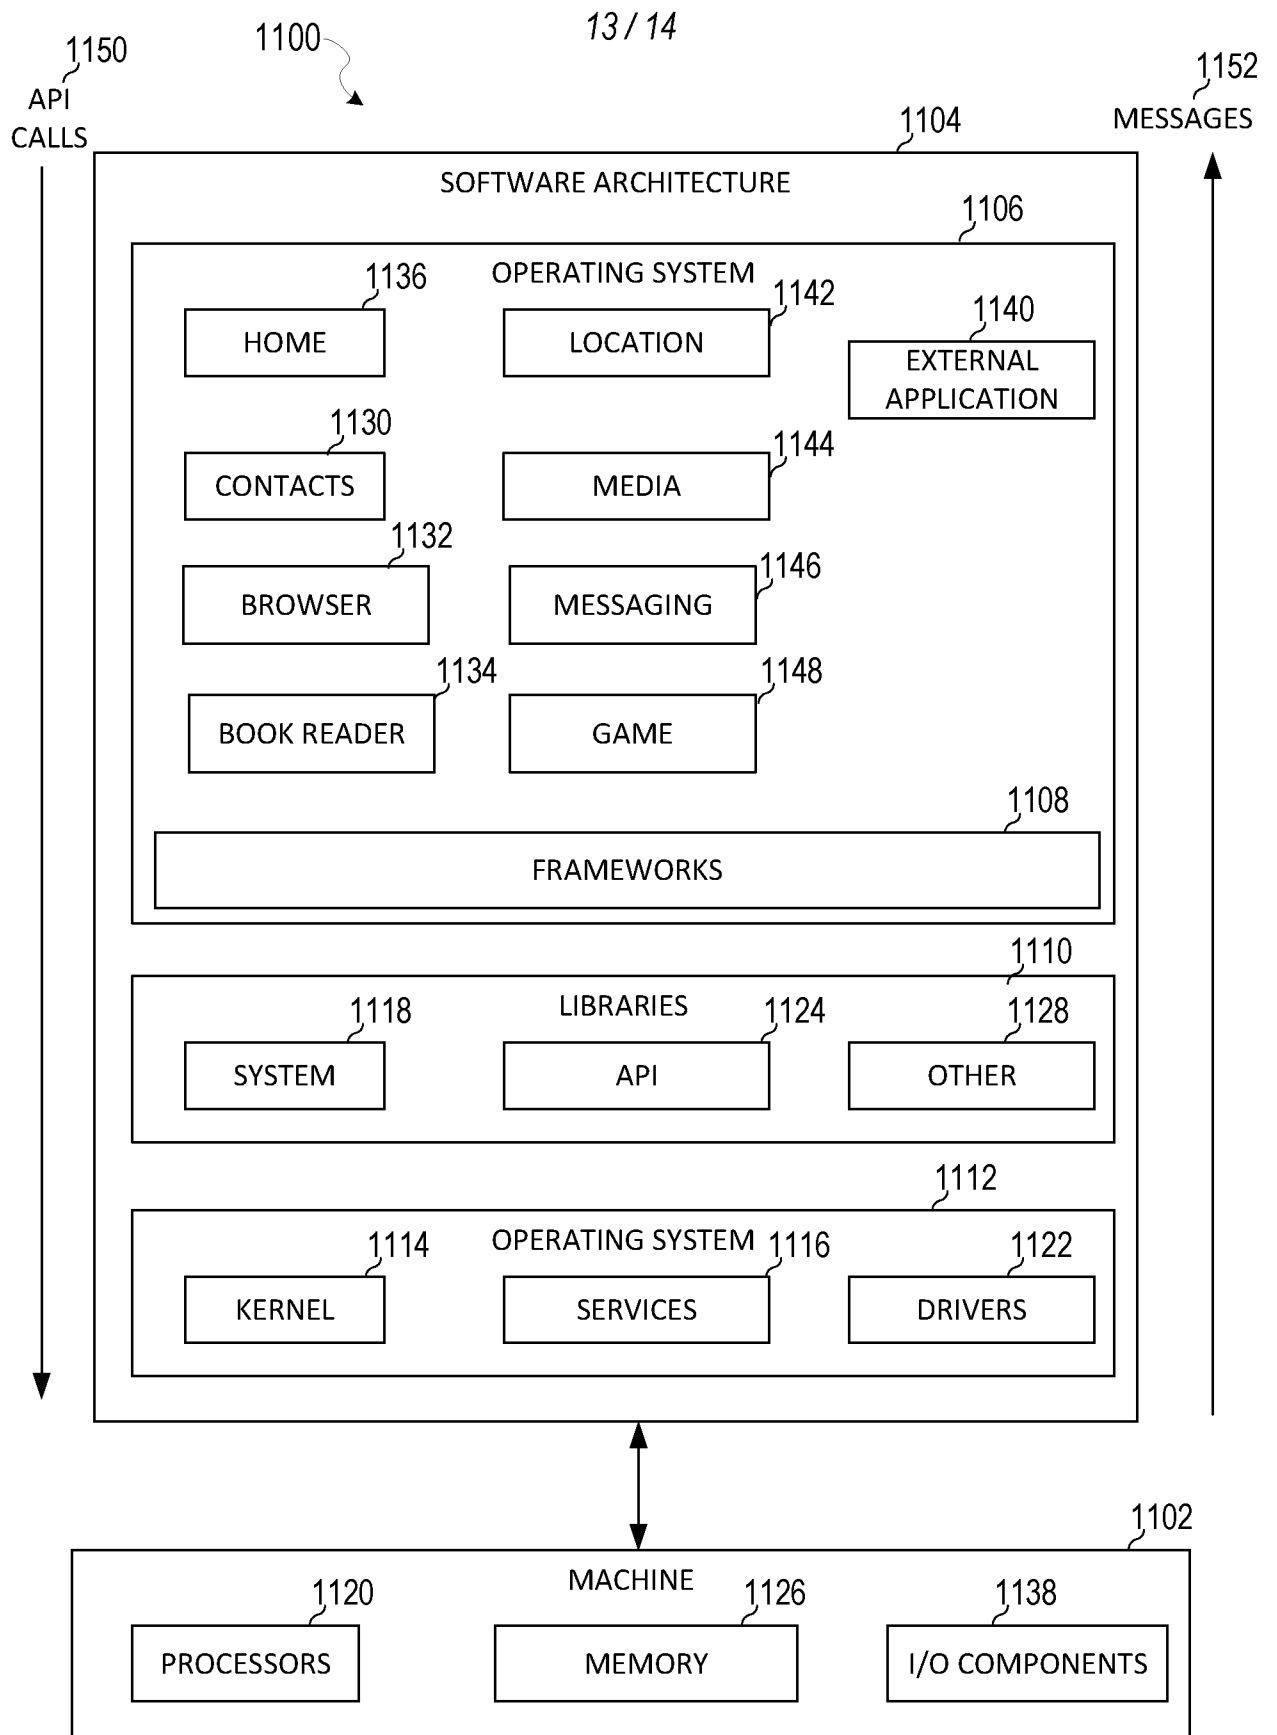


FIG. 11

14 / 14

1200 →

1210



FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2023/019745

A. CLASSIFICATION OF SUBJECT MATTER G06F 3/01(2006.01)i; G02B 27/01(2006.01)i; G06T 19/00(2011.01)i; G06F 1/16(2006.01)i According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G06F 3/01(2006.01); G02B 27/01(2006.01); G02B 27/42(2006.01); G06T 19/00(2011.01); H04N 5/21(2006.01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: real world, VR(virtual reality), AR(augmented reality), transition, wearable lens, geographical location, pupil, power, threshold, mirror, slide				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y A	US 2021-0350631 A1 (ULTRAHAPTICS IP TWO LIMITED) 11 November 2021 (2021-11-11) paragraphs [0024], [0086], [0149], [0184]; claim 7; and figures 11, 15	1-6,12-17,19-20 7-11,18		
Y	US 2021-0303079 A1 (ULTRAHAPTICS IP TWO LIMITED) 30 September 2021 (2021-09-30) paragraphs [0027], [0175]; and figure 8	1-6,12-17,19-20		
Y	US 2020-0192469 A1 (UNIVERSAL CITY STUDIOS LLC) 18 June 2020 (2020-06-18) paragraph [0031]	4-6		
Y	US 2022-0113552 A1 (MAGIC LEAP, INC.) 14 April 2022 (2022-04-14) paragraphs [0052], [0143]; and figures 5A, 14A	15-17		
A	US 2018-0052326 A1 (RICHARD ANDREW WALL et al.) 22 February 2018 (2018-02-22) paragraphs [0025], [0031]; and figures 7-9, 12	1-20		
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;"> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; vertical-align: top; border: none;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search 23 August 2023		Date of mailing of the international search report 24 August 2023		
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer BYUN, SUNG CHEAL Telephone No. +82-42-481-8262		

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2023/019745

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)		Publication date (day/month/year)
US	2021-0350631	A1	11 November 2021	US	10600248 B2	24 March 2020
				US	11080937 B2	03 August 2021
				US	11676349 B2	13 June 2023
				US	2017-0345219 A1	30 November 2017
				US	2020-0286295 A1	10 September 2020
				US	9741169 B1	22 August 2017
US	2021-0303079	A1	30 September 2021	US	10656720 B1	19 May 2020
				US	11036304 B2	15 June 2021
				US	2020-0278756 A1	03 September 2020
US	2020-0192469	A1	18 June 2020	CA	2958285 A1	25 February 2016
				CN	107077209 A	18 August 2017
				CN	115661415 A	31 January 2023
				EP	3183631 A1	28 June 2017
				EP	3183631 B1	26 October 2022
				EP	4145255 A1	08 March 2023
				JP	2017-532825 A	02 November 2017
				JP	2019-166405 A	03 October 2019
				JP	2022-036116 A	04 March 2022
				JP	6995799 B2	17 January 2022
				KR	10-2017-0042363 A	18 April 2017
				KR	10-2023-0071200 A	23 May 2023
				US	10241568 B2	26 March 2019
				US	10606348 B2	31 March 2020
				US	11586277 B2	21 February 2023
				US	2016-0048203 A1	18 February 2016
				US	2017-0364145 A1	21 December 2017
				US	2019-0196581 A1	27 June 2019
				US	2023-0185367 A1	15 June 2023
				US	9690375 B2	27 June 2017
				WO	2016-028531 A1	25 February 2016
US	2022-0113552	A1	14 April 2022	CN	105934902 B	23 November 2018
				CN	107193126 A	22 September 2017
				CN	107193126 B	05 June 2020
				CN	107203045 A	26 September 2017
				CN	107219628 A	29 September 2017
				CN	107219628 B	01 May 2020
				CN	107272199 A	20 October 2017
				CN	107272199 B	07 April 2023
				CN	107300769 A	27 October 2017
				CN	107300769 B	13 December 2019
				CN	107315249 A	03 November 2017
				CN	107315249 B	17 August 2021
				CN	107329259 A	07 November 2017
				CN	107329259 B	11 October 2019
				CN	107329260 A	07 November 2017
				CN	107329260 B	16 July 2021
				CN	109298526 A	01 February 2019
				CN	109298526 B	07 September 2021
				CN	109445095 A	08 March 2019
				CN	109445095 B	23 November 2021

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2023/019745

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		CN 109597202 A	09 April 2019
		CN 109597202 B	03 August 2021
		CN 110542938 A	06 December 2019
		CN 110542938 B	18 April 2023
		CN 113433700 A	24 September 2021
		CN 113568175 A	29 October 2021
		EP 3075090 A2	05 October 2016
		EP 3075090 A4	02 August 2017
		EP 3075090 B1	05 April 2023
		JP 2017-500605 A	05 January 2017
		JP 2018-028703 A	22 February 2018
		JP 2018-032048 A	01 March 2018
		JP 2018-032049 A	01 March 2018
		JP 2018-032050 A	01 March 2018
		JP 2018-060208 A	12 April 2018
		JP 2018-060209 A	12 April 2018
		JP 2018-060210 A	12 April 2018
		JP 2018-060211 A	12 April 2018
		JP 2018-060212 A	12 April 2018
		JP 2018-060213 A	12 April 2018
		JP 2018-060214 A	12 April 2018
		JP 2019-109534 A	04 July 2019
		JP 2019-191611 A	31 October 2019
		JP 2019-191612 A	31 October 2019
		JP 2022-009824 A	14 January 2022
		JP 2023-025048 A	21 February 2023
		JP 6510012 B2	08 May 2019
		JP 6510013 B2	08 May 2019
		JP 6510014 B2	08 May 2019
		JP 6510015 B2	08 May 2019
		JP 6510016 B2	08 May 2019
		JP 6513167 B2	15 May 2019
		JP 6514302 B2	15 May 2019
		JP 6529143 B2	12 June 2019
		JP 6600675 B2	30 October 2019
		JP 6720368 B2	08 July 2020
		JP 6763070 B2	30 September 2020
		JP 6971281 B2	24 November 2021
		JP 7179140 B2	28 November 2022
		KR 10-2016-0091402 A	02 August 2016
		KR 10-2021-0076199 A	23 June 2021
		KR 10-2022-0039849 A	29 March 2022
		KR 10-2023-0016035 A	31 January 2023
		KR 10-2268462 B1	22 June 2021
		KR 10-2378457 B1	23 March 2022
		KR 10-2493498 B1	27 January 2023
		US 10529138 B2	07 January 2020
		US 10629004 B2	21 April 2020
		US 10643392 B2	05 May 2020
		US 10935806 B2	02 March 2021

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2023/019745

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		US 11237403 B2	01 February 2022
		US 11714291 B2	01 August 2023
		US 2015-0205126 A1	23 July 2015
		US 2015-0234190 A1	20 August 2015
		US 2015-0234191 A1	20 August 2015
		US 2015-0234205 A1	20 August 2015
		US 2015-0234254 A1	20 August 2015
		US 2015-0234476 A1	20 August 2015
		US 2015-0235418 A1	20 August 2015
		US 2015-0235419 A1	20 August 2015
		US 2015-0235420 A1	20 August 2015
		US 2015-0235421 A1	20 August 2015
		US 2015-0235431 A1	20 August 2015
		US 2015-0235436 A1	20 August 2015
		US 2015-0235437 A1	20 August 2015
		US 2015-0235438 A1	20 August 2015
		US 2015-0235439 A1	20 August 2015
		US 2015-0235440 A1	20 August 2015
		US 2015-0235442 A1	20 August 2015
		US 2015-0235443 A1	20 August 2015
		US 2015-0235444 A1	20 August 2015
		US 2015-0235445 A1	20 August 2015
		US 2015-0235446 A1	20 August 2015
		US 2015-0235448 A1	20 August 2015
		US 2015-0235454 A1	20 August 2015
		US 2015-0235455 A1	20 August 2015
		US 2015-0235456 A1	20 August 2015
		US 2015-0235457 A1	20 August 2015
		US 2015-0235458 A1	20 August 2015
		US 2015-0235459 A1	20 August 2015
		US 2015-0235460 A1	20 August 2015
		US 2015-0235461 A1	20 August 2015
		US 2015-0235462 A1	20 August 2015
		US 2015-0235463 A1	20 August 2015
		US 2015-0235464 A1	20 August 2015
		US 2015-0235465 A1	20 August 2015
		US 2015-0235466 A1	20 August 2015
		US 2015-0235467 A1	20 August 2015
		US 2015-0235468 A1	20 August 2015
		US 2015-0235469 A1	20 August 2015
		US 2015-0235470 A1	20 August 2015
		US 2015-0235471 A1	20 August 2015
		US 2015-0235472 A1	20 August 2015
		US 2015-0235473 A1	20 August 2015
		US 2015-0241696 A1	27 August 2015
		US 2015-0241697 A1	27 August 2015
		US 2015-0241698 A1	27 August 2015
		US 2015-0241699 A1	27 August 2015
		US 2015-0241700 A1	27 August 2015
		US 2015-0241701 A1	27 August 2015

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2023/019745

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		US 2015-0241702 A1	27 August 2015
		US 2015-0241703 A1	27 August 2015
		US 2015-0241704 A1	27 August 2015
		US 2015-0241706 A1	27 August 2015
		US 2015-0241707 A1	27 August 2015
		US 2015-0243088 A1	27 August 2015
		US 2015-0243089 A1	27 August 2015
		US 2015-0243090 A1	27 August 2015
		US 2015-0243091 A1	27 August 2015
		US 2015-0243092 A1	27 August 2015
		US 2015-0243093 A1	27 August 2015
		US 2015-0243094 A1	27 August 2015
		US 2015-0243095 A1	27 August 2015
		US 2015-0243096 A1	27 August 2015
		US 2015-0243097 A1	27 August 2015
		US 2015-0243098 A1	27 August 2015
		US 2015-0243099 A1	27 August 2015
		US 2015-0243101 A1	27 August 2015
		US 2015-0243102 A1	27 August 2015
		US 2015-0243103 A1	27 August 2015
		US 2015-0243104 A1	27 August 2015
		US 2015-0243107 A1	27 August 2015
		US 2015-0248006 A1	03 September 2015
		US 2015-0248010 A1	03 September 2015
		US 2015-0248011 A1	03 September 2015
		US 2015-0248012 A1	03 September 2015
		US 2015-0248046 A1	03 September 2015
		US 2015-0248158 A1	03 September 2015
		US 2015-0248786 A1	03 September 2015
		US 2015-0248790 A1	03 September 2015
		US 2015-0309315 A1	29 October 2015
		US 2015-0319342 A1	05 November 2015
		US 2016-0109652 A1	21 April 2016
		US 2016-0109705 A1	21 April 2016
		US 2016-0109706 A1	21 April 2016
		US 2016-0109707 A1	21 April 2016
		US 2016-0109708 A1	21 April 2016
		US 2016-0110912 A1	21 April 2016
		US 2016-0110920 A1	21 April 2016
		US 2018-0039084 A1	08 February 2018
		US 2018-0045965 A1	15 February 2018
		US 2018-0252925 A1	06 September 2018
		US 2020-0265650 A1	20 August 2020
		US 2021-0141237 A1	13 May 2021
		US 9791700 B2	17 October 2017
		US 9804397 B2	31 October 2017
		US 9841601 B2	12 December 2017
		US 9846306 B2	19 December 2017
		US 9846967 B2	19 December 2017
		US 9915824 B2	13 March 2018

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2023/019745

Patent document cited in search report				Publication date (day/month/year)			Patent family member(s)			Publication date (day/month/year)		
							US	9939643	B2	10 April 2018		
							US	9946071	B2	17 April 2018		
							WO	2015-081313	A2	04 June 2015		
							WO	2015-081313	A3	12 November 2015		
							WO	2015-081313	A9	09 September 2016		
US	2018-0052326	A1	22 February 2018				CN	109643017	A	16 April 2019		
							EP	3500888	A1	26 June 2019		
							US	10108013	B2	23 October 2018		
							WO	2018-038952	A1	01 March 2018		