

⑫ **EUROPEAN PATENT SPECIFICATION**

- ⑬ Date of publication of patent specification: **25.07.90** ⑮ Int. Cl.⁵: **B 41 J 19/80, B 41 J 2/22**
⑰ Application number: **84307545.8**
⑲ Date of filing: **01.11.84**

⑤④ **Dot matrix printer.**

③① Priority: **18.11.83 IT 6820583**

④③ Date of publication of application:
12.06.85 Bulletin 85/24

④⑤ Publication of the grant of the patent:
25.07.90 Bulletin 90/30

④④ Designated Contracting States:
DE FR GB

⑤⑥ References cited:
US-A-3 394 853
US-A-3 602 355
US-A-3 628 713
US-A-3 826 915
US-A-4 401 391

⑦③ Proprietor: **Ing. C. Olivetti & C., S.p.A.**
Via G. Jervis 77
I-10015 Ivrea (Torino) (IT)

⑦② Inventor: **Berruti, Pierangelo**
via Vittori Veneto 19 bis
I-10034 Chivasso (Torino) (IT)
Inventor: **Cella, Giancarlo**
via Torino 253
I-10015 Ivrea (Torino) (IT)

⑦④ Representative: **Pears, David Ashley et al**
REDDIE & GROSE 16 Theobalds Road
London WC1X 8PL (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

The present invention relates to a dot matrix printer comprising a printing head movable parallel to a writing platen for selectively printing dots on a writing medium disposed on the platen and a line-spacing device comprising a toothed wheel coupled to the platen and a pawl for intermittently rotating the wheel to advance the writing medium between two successive lines of printed dots.

Various printers of the type mentioned are known; in one of these (EP-A 0 036 739) the printing head is moved by a cam rotating about an axis perpendicular to the writing cylinder. Line spacing is obtained by means of a screw with a varying pitch which is solid with the cam and engaged with a toothed wheel coupled to the cylinder by a transmission gear. Such a printer proves to be very cumbersome for use with small computers and, because of the numerous moving parts, it is very noisy. Furthermore the line-spacing device includes a friction clutch for disengaging the line-spacing device to allow the paper tape to be advanced manually.

In another printer in accordance with the pre-characterizing part of claim 1 and known from US-A 3 602 355, a platen advancing device for intermittently advancing a record carrier comprises an operating arm with two cam followers cooperating with respective radial cam profiles.

At one end of the arm there is a gear segment selectively meshing with a gear connected to the platen. The arm is supported by a stationary pivot engaged in a slot of the arm. One cam pushes the arm to bring the gear segment into engagement with the platen gear by a radial displacement of the arm relative to the gear. Then the other cam rotates the arm about the supporting pivot to rotate the platen by an angular displacement.

The object of the present invention is to provide a dot matrix printer which is very compact, and silent, and has few moving parts and is such as to allow the paper to be advanced manually without the use of additional devices.

The dot matrix printer according to the invention meets this object and is characterised in the manner set forth in claim 1.

The invention will be described in more detail, by way of example, with reference to the accompanying drawings, in which:

Fig 1 is a plan view of a printer embodying the invention;

Fig 2 is a vertical section on a larger scale on line II-II of Fig 1;

Fig 3 shows a synchronisation card;

Fig 4 shows the displacement diagrams of the cams;

Fig 5 shows a cam cylinder.

With reference to Fig 1, the printer includes a writing platen roller 10 fitted on a shaft 12 rotatable on a base 14. A paper tape 16 is partly wound on the platen 10 and is advanced during writing operations by means of incremental rotations of the platen 10 onto which it is guided by a guide plate 18. In front of the platen 10 a slide 20 moves

parallel to the axis of the platen 10 on a guide 22. The slide comprises a flat support plate 24 on which a series-parallel thermal head 26 is fixed.

According to a particular version of the printer, the printing head 26 is similar to that described in our Italian Patent No 1,000,641 and is formed by a small plate 29 of ceramic material, on which twenty resistive writing elements are laid aligned along a printing line parallel to the axis of the platen 10, for printing successions of dots on a thermosensitive layer of the paper 16. The small plate 29 is glued at its central region 31 to the plate 24, while at the ends 32, 33 it is simply supported. The small plate is slightly flexible and is kept pressed tangentially against the platen 10 by two elastic laminae 34, 36 fixed to the base 14 by tabs 35 and in sliding contact at one end 37 with two pads 38, 39 retained by forks 40 and 41 of the plate 24 and bearing against the small plate 29.

The slide 20 is moved by means of a peg 21 engaged with a groove 42 in the outer surface of a cylinder 44 having its axis parallel to the writing platen 10, and being rotated by a motor 45 through a reduction gear 43. The groove 42 is formed by two helical arcs having constant slope but opposite directions, each extending for about 180° and being connected together with the points of reversal of the motion of the slide 20 corresponding. Consequently during a complete rotation of the cylinder 44, the slide 24 completes one forward pass and one return pass at constant velocity. The thermal head 26 has a stroke which covers two characters which is equal to about 4 mm.

The cylinder 44 (Fig. 5) includes moreover a face cam 46 and a radial cam 48, which serve to produce the incremental rotation of the cylinder 10 to effect the basic line spacing between two successive lines of printed dots. The face cam 46 and the radial cam 48 include a pair of lobes 47, 47' and 49, 49' respectively which are diametrically opposed and are interposed between zero lift regions. A beam 50 (Figs 1 and 2) having a cam follower arm 52 held against the radial cam 48 by a spring 53 can rotate and slide axially on the shaft 12 of the writing platen. The beam 50 is provided with a peg 54 projecting in the direction parallel to the axis of rotation of the cylinder 44 and cooperating with the face cam 46 by virtue of the action of a helical spring 45 compressed between the beam 50 and a side 15 of the base.

The beam 50 is moreover provided with an appendage 56 projecting parallel to the shaft 12 and having a sector 58 which is toothed at the front and selectively engaged with corresponding face toothing 60 of a wheel 62 fitted on the shaft 12.

The cams 46, 48 are so phased relative to the groove 42 that during the constant velocity portions of the strokes of the slide 20, the face cam 46 keeps the beam 50 spaced from the wheel 62 by overcoming the action of the spring 45. During the phases of reversal of the motion of the slide 20, the cam 46 releases the peg 54 of the beam 50

thereby allowing engagement between the toothed portion 58 of the beam 50 and the toothed wheel 62. At the same time a lobe 49 of the cam 48 (Fig. 2) rotates the beam 50 anticlockwise, and the beam in turn makes the writing platen 10 rotate through an arc corresponding to one basic line spacing of the paper 16.

The timing signals necessary for synchronising with the movement of the slide 20 the printing pulses coming through a cable 19 (Fig. 1) from a logic circuit not shown in the drawings are produced by a synchronisation device comprising a small plate 71 of insulating material (Figs. 2, 3) fixed to the side of the base 14 coaxially with the axis of rotation of the cylinder 64 and on which concentric conducting tracks 72, 73, 74 are deposited by a printed circuit technique. The track 72 is formed by an open ring 72a from which a plurality of inwardly directed radial segments 72b branch off, while the track 73 is formed by an open ring 73a within the track 72, from which a plurality of outwardly directed radial segments 73b branch off. The segments 72b and the segments 73b are regularly interdigitated.

The track 74 is formed by a ring which occupies the central part of the small plate 71 and constitutes the common return for the synchronisation circuit. On the base 67 of the cylinder 44 facing the small plate 71 a metal lamina 78 is fixed which ends in two diametrically opposed resilient contacts 79, 80, of which the contact 79 slides alternately on the segments 72b, 73b, and the contact 80 slides on the ring 74. Consequently during the rotation of the cylinder 44 the contacts 79, 80 short circuit the segments 72b, 73b and the ring 74 in order to generate the timing signals transmitted over a cable 83 to the control logic.

In the interrupted region of the rings 72, 73 an additional radial segment 77 is disposed which is used to give a line start signal when the slide 20 is at one of the ends of the stroke.

The segments 72b, 73b are equidistantly spaced by an arc corresponding to a step between two successive printed dots on the medium 16. In accordance with a first version of the printer the aforesaid arc is $11^{\circ}15'$ and corresponds to a step of 0.26 mm between two dots. According to the printing requirements, the step between two printed dots can be varied in a very simple manner without modifying the mechanical structure of the printer and without altering the logic architecture of the circuit controlling the printing head. To obtain a varied spacing between the printed dots the small plate 71 is interchangeable with others having a different spacing between the segments 72b, 73b. The small plate 71 can be removed by unscrewing a nut 70 (Fig. 1) that holds it fixed to the side 15.

In Fig. 4 the diagram SC shows the profile of the groove 42, which is intended to move the head 26, as a function of the angle of rotation of the cylinder 44, while the diagrams IN and SP relate to the profiles of cams 48 and 46 respectively provided for line spacing and axial displacement of the beam 50. It is clear from these diagrams

that corresponding to the phase INV (diagram SC) of reversal of the movement of the slide 20, the cam 46 has zero lift (diagram SP), and the cam 48 has an increasing lift (diagram IN), through which the beam 50, pushed by the spring 45, is engaged with the wheel 62 while the lobe 49 of the cam 48 rotates the beam 50 to advance the writing medium 16 by one line space.

The separation of the beam 50 from the wheel 62 occurs in a portion DIS of the diagrams IN and SP in which the lift of the cam 48 is constant, while the clockwise rotation reloading the beam 50 occurs in the succeeding portion AV in which the lift of the cam 46 is a maximum, that is, the toothing 58 of the beam 50 is completely separated from the wheel 62.

In such circumstances the angular position reached by the platen 10 after each line spacing is no longer affected by successive movements of the beam, thus ensuring constant spacing between the lines of printed dots.

Furthermore in the portion AV, since the platen 10 is completely disengaged from the line spacing device, can be rotated manually to advance the paper tape 16.

Claims

1. A dot matrix printer comprising a printing head (26) movable parallel to a writing platen (10) for selectively printing dots on a writing medium disposed on the platen and a line-spacing device comprising a toothed wheel (62) coupled to the platen and a pawl (56) for intermittently rotating the wheel to advance the writing medium between two successive lines of printed dots, wherein the pawl (56) is engaged and disengaged with the wheel (62) and is actuated to cause the wheel to advance by a single, cyclically rotatable cam (44), characterized in that the cam (44) has a first profile (48) for oscillating the pawl (56) so as to advance the wheel (62) and a second profile (46) acting in a direction parallel to the axis of the platen (10) for engaging and disengaging the pawl (56) with the wheel by movement of the pawl in the said direction.

2. A printer according to claim 1, characterised in that the pawl (56) is carried by a support (50) which comprises a cam follower (54) cooperating with the second cam profile (46) for translating the pawl (56) axially relative to the wheel (62) from a first position in which the pawl engages with the toothed wheel, to a second position in which the pawl is spaced from the toothed wheel, and another cam follower (52) cooperating with the first cam profile (48) for rotating the pawl in one direction when the pawl support (50) is in the said first position and for rotating the pawl in the opposite direction when the pawl support is in the second position.

3. A printer according to claim 2, characterised in that the second profile (46) comprises a face cam and the first profile (48) comprises a radial cam and in that each of the cams includes a pair of diametrically opposed lobes (47, 49) for rotat-

ing and translating the pawl support (50) in two successive cycles during one complete rotation of the cam (44).

4. A printer according to any of the preceding claims, characterised in that the cam (44) also bears a third cam profile (42) acting to cause transverse displacement of the printing head (26) alternately with the advancing of the wheel (62).

5. A printer according to any of the preceding claims, in which the printing head (26) is energised by a succession of electric pulses synchronised with the movement of the head, characterised by a fixed plate (71) having a plurality of concentric conductive tracks (72-74) and a rotatable contact element (78) supported by the cam (44) and sliding on pairs of the tracks for generating synchronising signals for the pulses.

6. A printer according to claim 5, characterised in that the plurality of tracks comprises a first annular track (74) which is coaxial with the cam member (44), a second and a third track (72, 73) each having radial segments (72b, 73b) which are equidistant and electrically connected together, the segments of the second track being regularly interposed between the segments of the third track so that the contact element (78) connects the annular track alternately with the second and third tracks.

Patentansprüche

1. Punktmatrixdrucker mit einem Druckkopf (26), der parallel zu einer Schreibwalze (10) bewegbar ist, um wählbar Druckpunkte auf einem Aufzeichnungsträger, der auf der Schreibwalze angeordnet ist, aufzudrucken, und einer Zeilenabstandseinstellvorrichtung mit einem Zahnrad (62), das mit der Schreibwalze gekuppelt ist, und einer Klinke (56) zum schrittweisen Drehen des Zahnrads, um den Aufzeichnungsträger zwischen zwei aufeinanderfolgenden Zeilen von Druckpunkten vorzuschieben, wobei die Klinke (56) mit dem Zahnrad (62) in und außer Eingriff gebracht und so betätigt wird, daß es durch eine einzige, zyklisch drehbare Steuerkurve (44) weiterbewegt wird, dadurch gekennzeichnet, daß die Steuerkurve (44) ein erstes Profil (48), durch das die Klinke (56) so verschwenkbar ist, daß das Zahnrad (62) weiterbewegt wird, und ein zweites Profil (46) aufweist, das in einer zur Achse der Schreibwalze (10) parallelen Richtung wirkt, um die Klinke (56) mit dem Zahnrad in und außer Eingriff zu bringen, und zwar durch Verschieben der Klinke in der erwähnten Richtung.

2. Drucker nach Anspruch 1, dadurch gekennzeichnet, daß die Klinke (56) durch einen Träger (50) getragen wird, der aufweist: einen Steuerkurvenfolger (54), der mit dem zweiten Steuerkurvenprofil (46) zusammenwirkt, um die Klinke (56) axial relativ zu dem Zahnrad (62) aus einer ersten Lage, in der die Klinke mit dem Zahnrad in Eingriff steht, in eine zweite Lage zu verschieben, in der die Klinke einen Abstand von dem Zahnrad aufweist, und einen weiteren Steuerkurvenfolger (52), der mit dem ersten Steuerkurvenprofil (48)

zusammenwirkt, um die Klinke in die eine Richtung zu drehen, wenn der Klinkenträger (50) sich in der ersten Lage befindet, und um die Klinke in der entgegengesetzten Richtung zu drehen, wenn sich der Klinkenträger in der zweiten Lage befindet.

3. Drucker nach Anspruch 2, dadurch gekennzeichnet, daß das zweite Profil (46) eine stirnseitige Steuerkurve und das erste Profil (48) eine radiale Steuerkurve aufweist und daß beide Steuerkurven jeweils zwei sich diametral gegenüberliegende Nocken (47, 49) zum Drehen und Verschieben des Klinkenträgers (50) in zwei aufeinanderfolgenden Zyklen während einer vollständigen Umdrehung der Steuerkurve (44) aufweisen.

4. Drucker nach einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Steuerkurve (44) auch ein drittes Steuerkurvenprofil (42) aufweist, das eine Querverschiebung des Druckkopfes (26) abwechselnd mit dem Weiterbewegen des Zahnrads (62) bewirkt.

5. Drucker nach einem der vorstehenden Ansprüche, bei dem der Druckkopf (26) durch eine Folge elektrischer Impulse eingeschaltet wird, die mit der Bewegung des Kopfes synchronisiert sind, gekennzeichnet durch eine feststehende Platte (71) mit mehreren konzentrischen Leiterbahnen (72 - 74) und einem drehbaren Kontaktelement (78), das durch die Steuerkurve (44) getragen wird und auf Paaren der Leiterbahnen gleitet, um Synchronisierungssignale für die Impulse zu erzeugen.

6. Drucker nach Anspruch 5, dadurch gekennzeichnet, daß die Leiterbahnen eine erste ringförmige Leiterbahn (74), die coaxial zu der Steuerkurve (44) ist, eine zweite und eine dritte Leiterbahn (72, 73) mit jeweils radialen Segmenten (72b, 73b), die gleiche Abstände aufweisen und elektrisch miteinander verbunden sind, aufweisen, wobei die Segmente der zweiten Leiterbahn regelmäßig zwischen den Segmenten der dritten Leiterbahn angeordnet sind, so daß das Kontaktelement (78) abwechselnd die ringförmige Leiterbahn mit der zweiten und dritten Leiterbahn verbindet.

Revendications

1. Une imprimante matricielle par points comprenant une tête d'impression (26) déplaçable parallèlement à un cylindre d'impression (10) pour imprimer sélectivement des points sur un support d'impression disposé sur le cylindre, ainsi qu'un dispositif d'espacement de lignes comprenant une roue dentée (62) accouplée avec le cylindre et un cliquet (56) pour faire tourner par intermittence la roue afin d'avancer le support d'impression entre deux lignes successives de points imprimés, où le cliquet (56) est amené en prise avec la roue (62) et dégagé de celle-ci et est actionné pour faire avancer la roue au moyen d'une seule came (44) pouvant tourner cycliquement, caractérisée en ce que la came (44) comporte un premier profil (48) pour faire osciller le cliquet (56) afin de faire avancer la roue (62) et un

second profil (46) agissant dans une direction parallèle à l'axe du cylindre d'impression (10) pour amener en prise le cliquet (56) avec la roue et le désaccoupler de celle-ci par un mouvement du cliquet dans ladite direction.

2. Une imprimante selon la revendication 1, caractérisée en ce que le cliquet (56) est porté par un support (50) qui comprend un toucheau de came (54) coopérant avec le second profil de came (46) pour produire une translation du cliquet (56) axialement par rapport à la roue (62) depuis une première position dans laquelle le cliquet est en prise avec la roue dentée jusqu'à dans une seconde position où le cliquet est espacé de la roue dentée, ainsi qu'un autre toucheau de came (52) coopérant avec le premier profil de came (48) pour faire tourner le cliquet dans une direction quand le support de cliquet (50) se trouve dans ladite première position et pour faire tourner le cliquet dans la direction opposée quand le support de cliquet se trouve dans la seconde position.

3. Une imprimante selon la revendication 2, caractérisée en ce que le second profil (46) comprend une came frontale et le premier profil (48) comprend une came radiale et en ce que chacune des cames comporte une paire de lobes (47, 49) diamétralement opposés pour produire une rotation et une translation du support de cliquet (50) dans deux cycles successifs au cours d'une rotation complète de la came (44).

4. Une imprimante selon une quelconque des revendications précédentes, caractérisée en ce que la came (44) comporte également un troisième profil de came (42) agissant de façon à produire un déplacement transversal de la tête d'impression (26) en alternance avec l'avancement de la roue (62).

5. Une imprimante selon une quelconque des revendications précédentes, dans laquelle la tête d'impression (26) est excitée par une succession d'impulsions électriques synchronisées avec le mouvement de la tête, caractérisée par une plaque fixe (71) pourvue d'une pluralité de pistes conductrices concentriques (72-74) et un élément rotatif de contact (78) supporté par la came (44) et glissant sur des paires de pistes pour produire des signaux de synchronisation pour les impulsions.

6. Une imprimante selon la revendication 5, caractérisée en ce que la pluralité de pistes comprend une première piste annulaire (74) qui est coaxiale à l'élément formant came (44), une seconde et une troisième piste (72, 73) comportant chacune des segments radiaux (72b, 73b) qui sont équidistants et reliés électriquement ensemble, les segments de la seconde piste étant régulièrement interposés entre les segments de la troisième piste de telle sorte que l'élément de contact (78) relie la piste annulaire alternativement avec la seconde et la troisième piste.

35

40

45

50

55

60

65

5

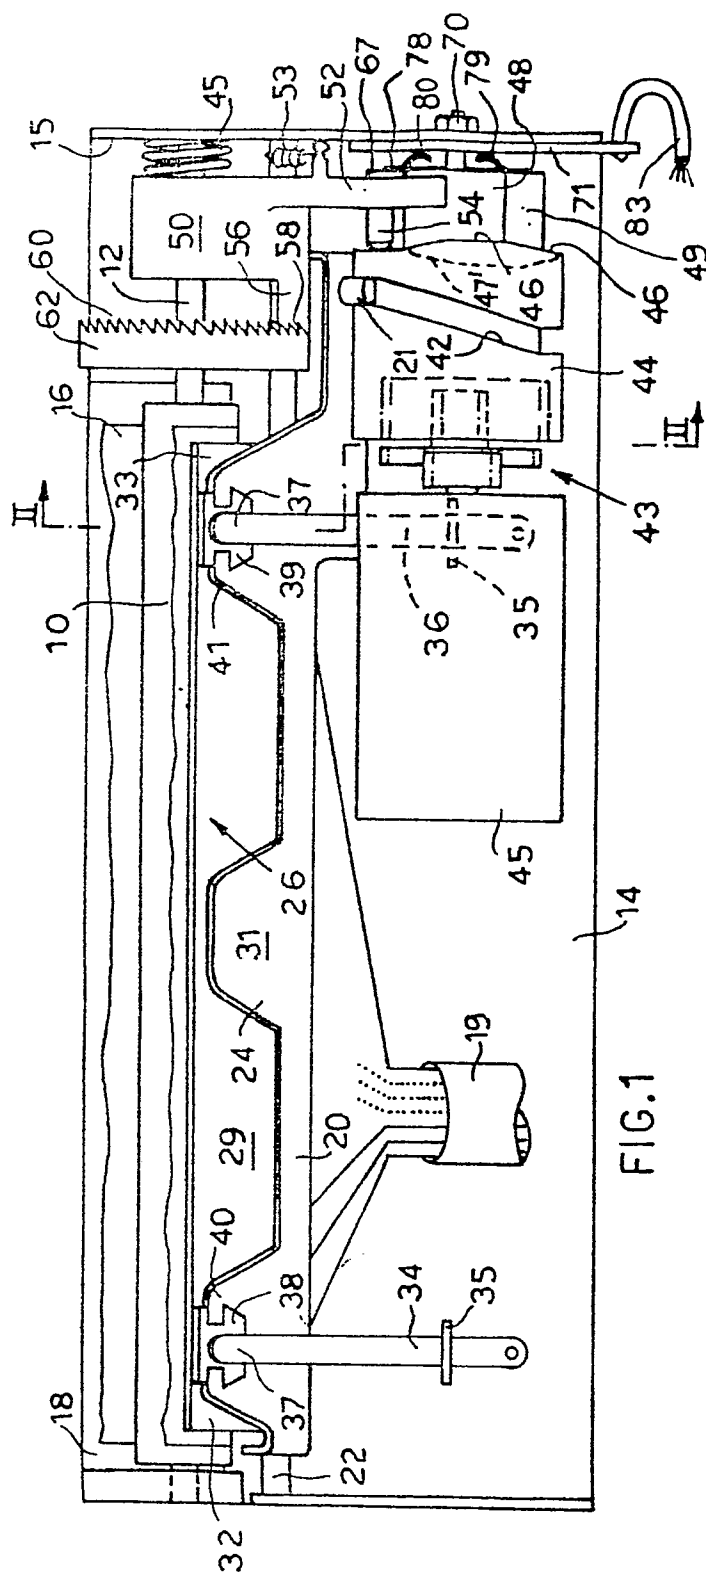


FIG.1

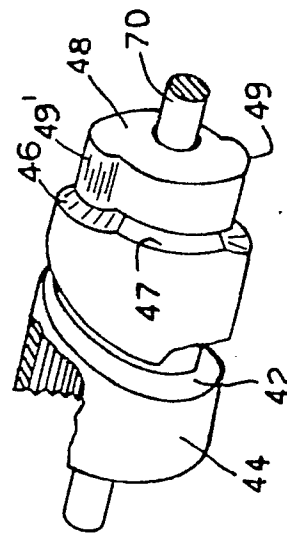


FIG.5

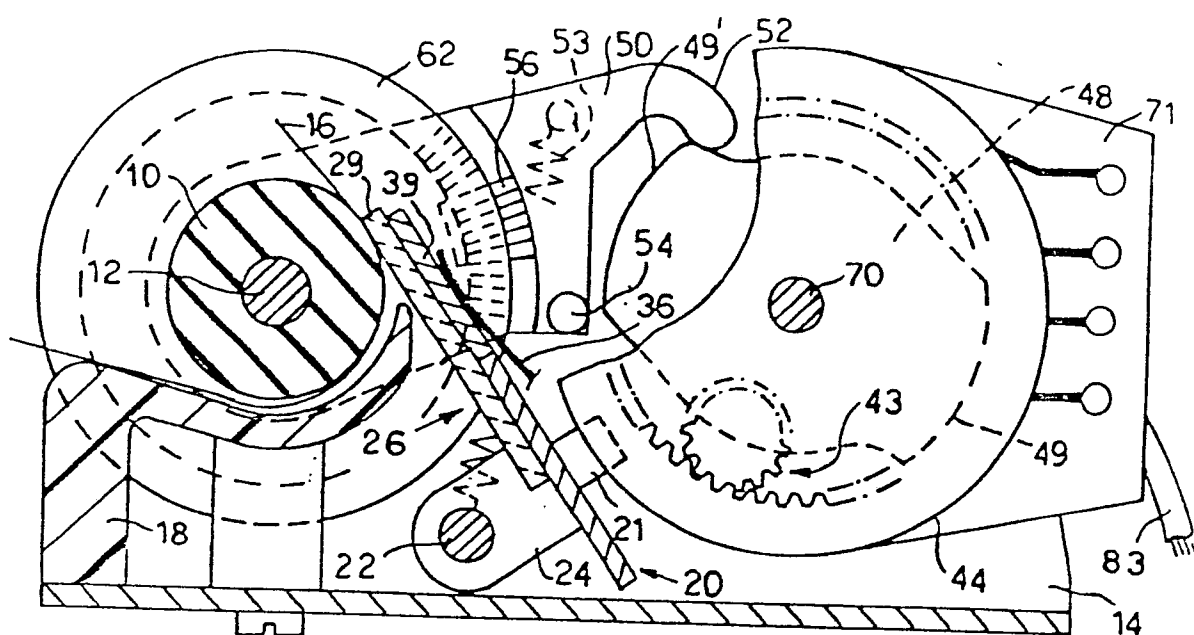


FIG. 2

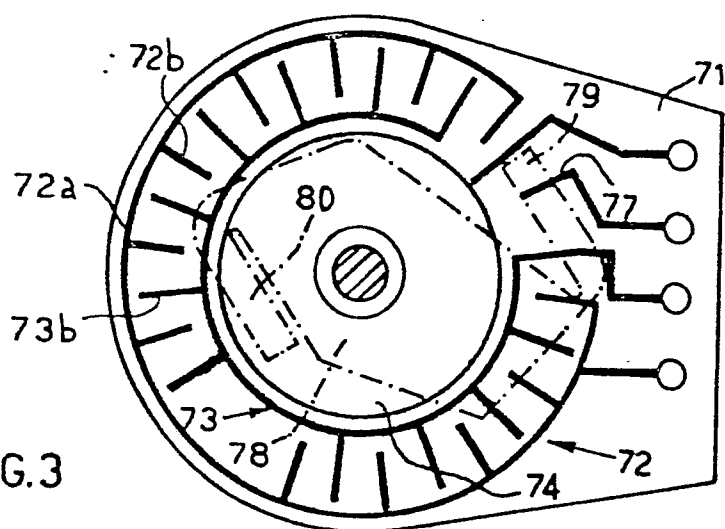


FIG. 3

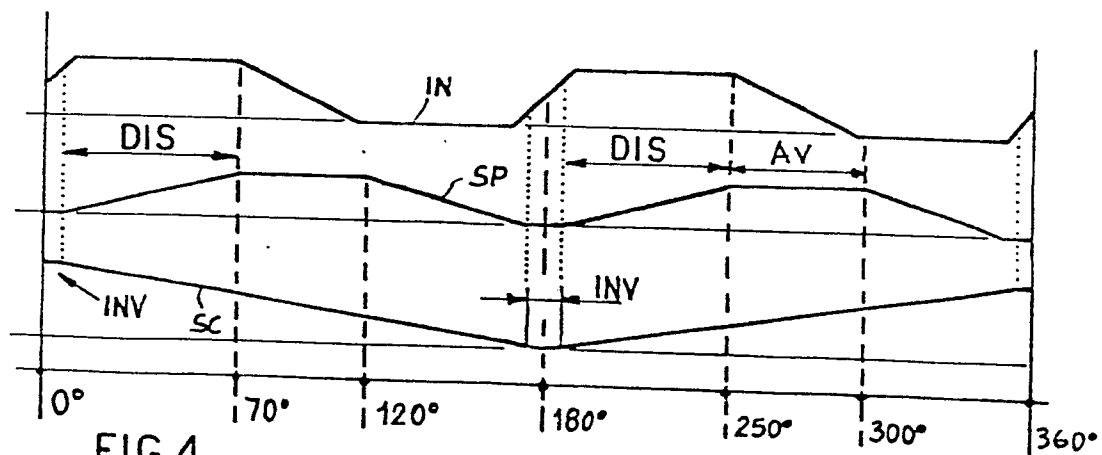


FIG. 4