



(22) Date de dépôt/Filing Date: 2002/07/11

(41) Mise à la disp. pub./Open to Public Insp.: 2003/01/13

(45) Date de délivrance/Issue Date: 2014/03/18

(62) Demande originale/Original Application: 2 714 304

(30) Priorité/Priority: 2001/07/13 (CA2,353,307)

(51) Cl.Int./Int.Cl. *B01D 53/62* (2006.01),
B01D 53/14 (2006.01), *B01J 10/00* (2006.01),
C12M 1/04 (2006.01), *C12M 1/107* (2006.01),
C12M 1/12 (2006.01), *C12M 1/40* (2006.01),
C12N 11/00 (2006.01), *C12N 9/88* (2006.01),
C12P 3/00 (2006.01)


(72) Inventeurs/Inventors:
PARENT, CARMEN, CA;
DUTIL, FREDERIC, CA

(73) Propriétaire/Owner:
CO2 SOLUTIONS INC., CA

(74) Agent: ROBIC


(54) Titre : SYSTÈME D'ANHYDRASES CARBONIQUES ET PROCÉDE POUR TRAITER UN GAZ CONTENANT DU CO₂

(54) Title: CARBONIC ANHYDRASE SYSTEM AND PROCESS FOR TREATING A CO₂-CONTAINING GAS

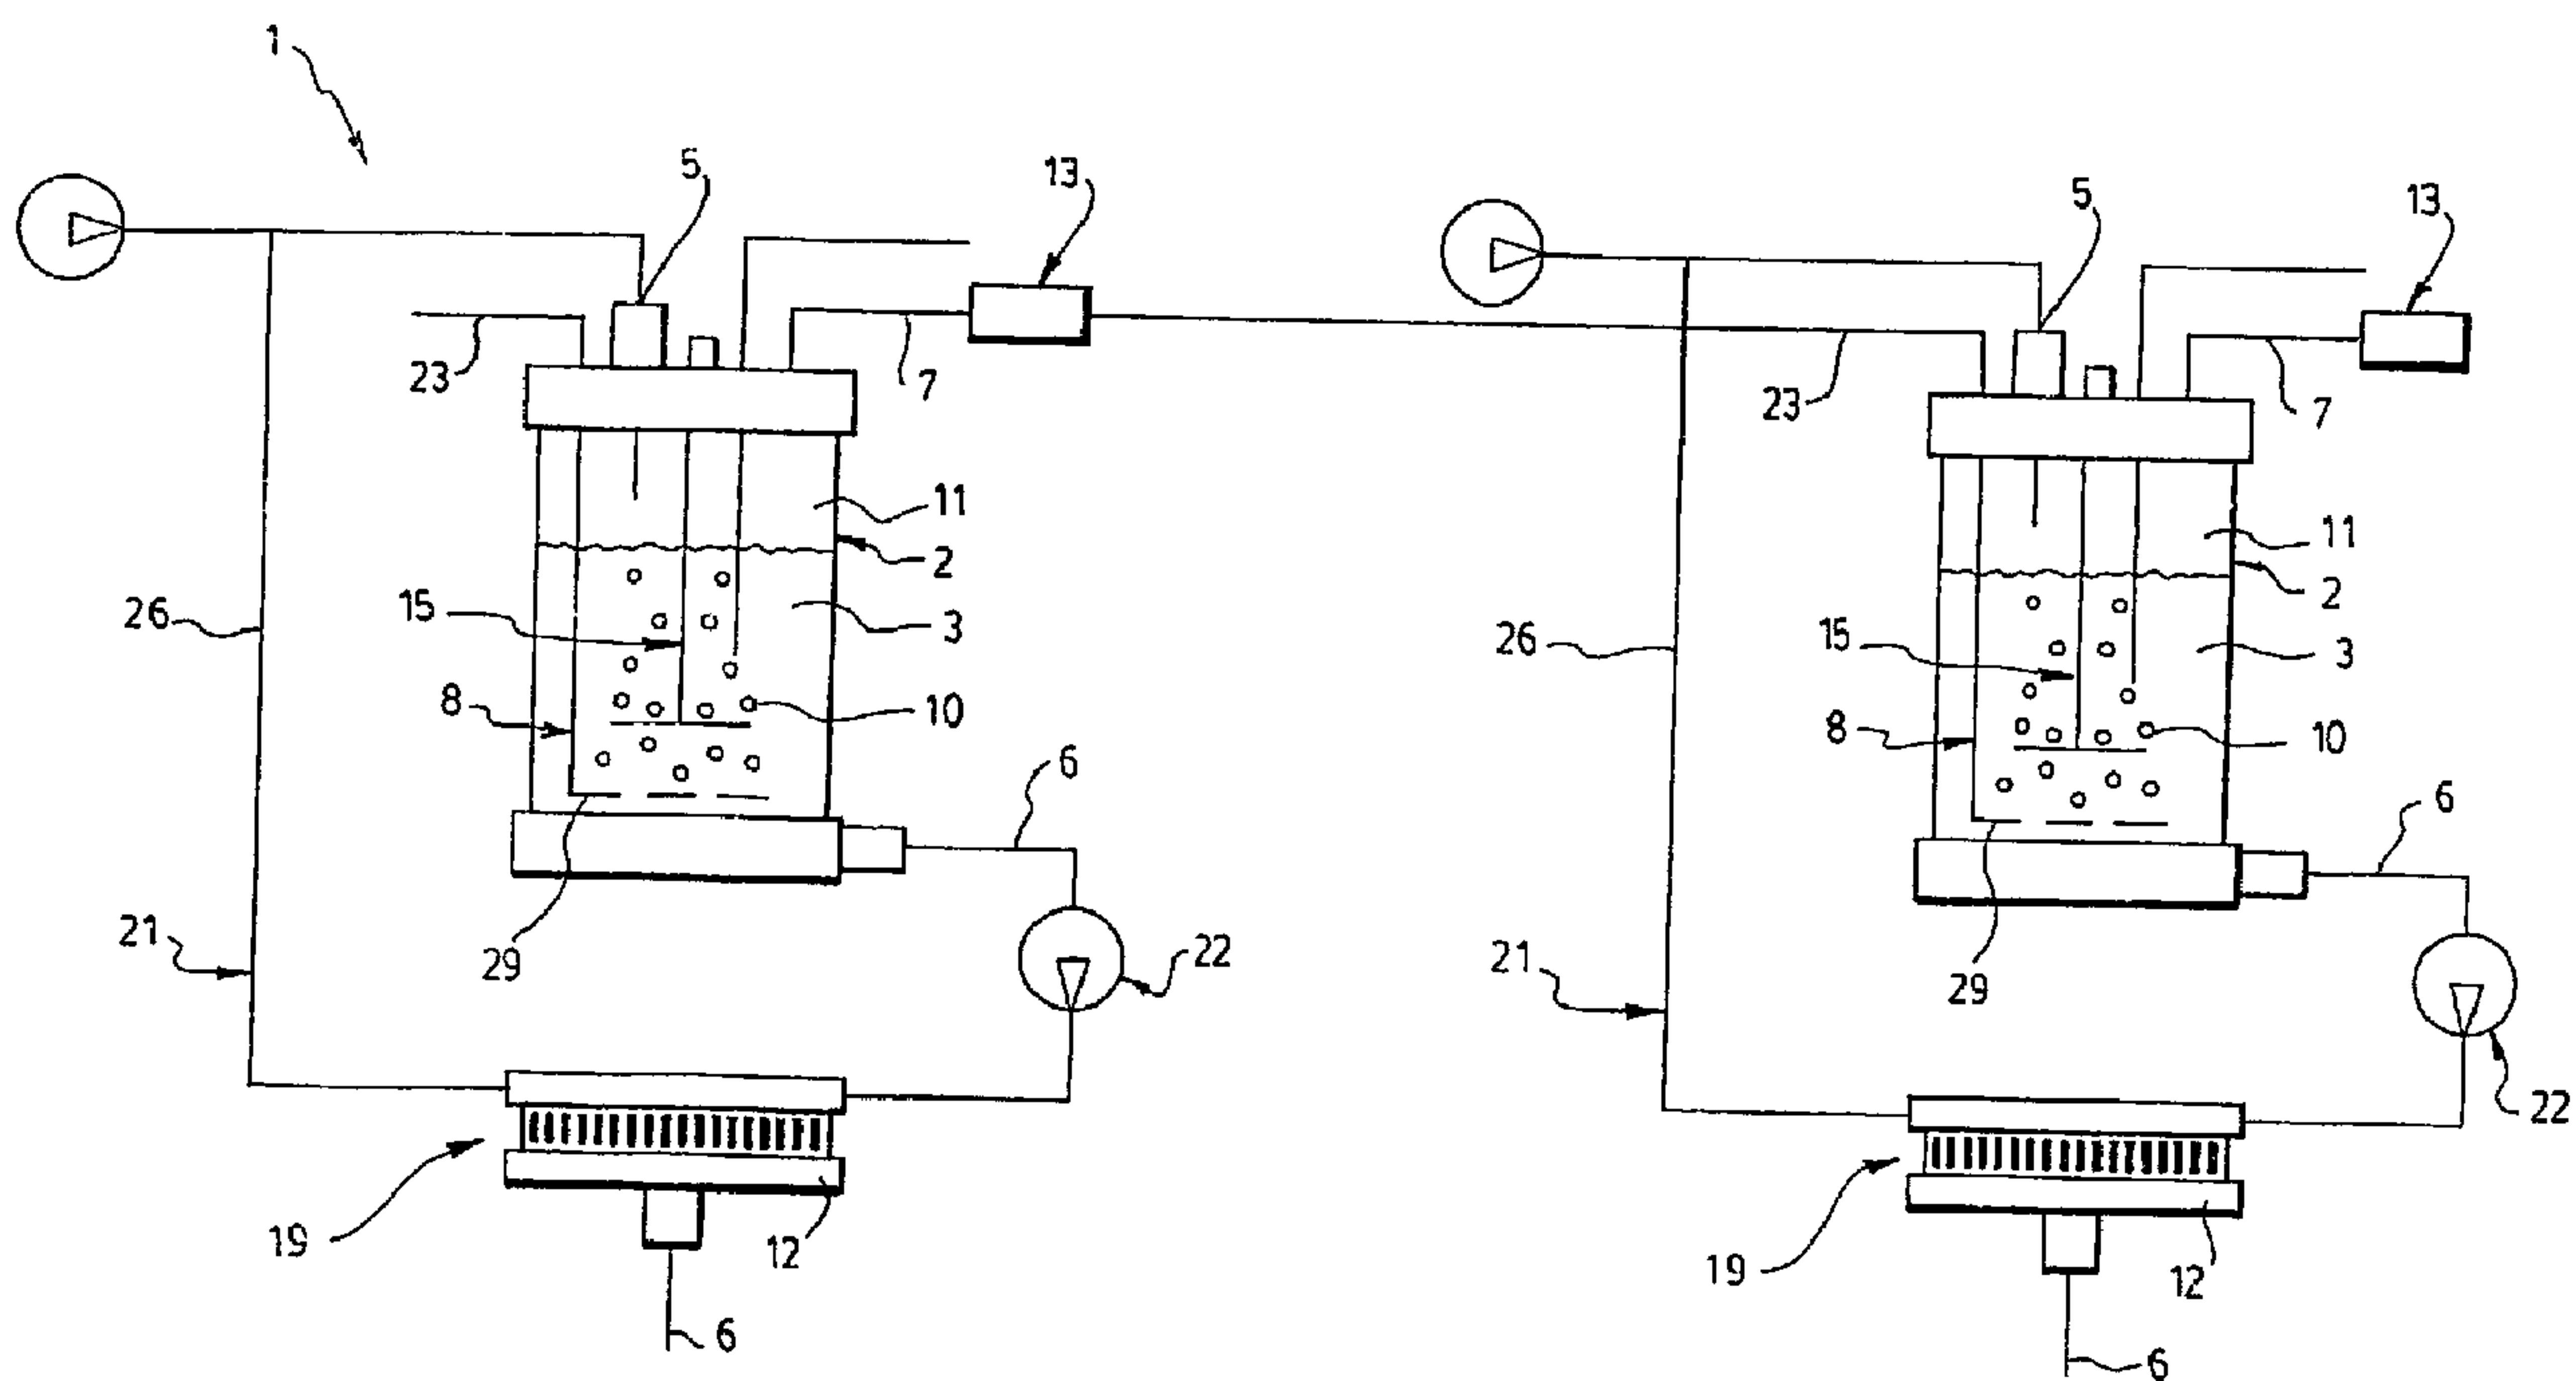

(57) Abrégé/Abstract:

A carbonic anhydrase system and process are disclosed. The system has a reaction chamber, liquid inlet, gas inlet, liquid outlet and gas outlet, and uses carbonic anhydrase for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution.

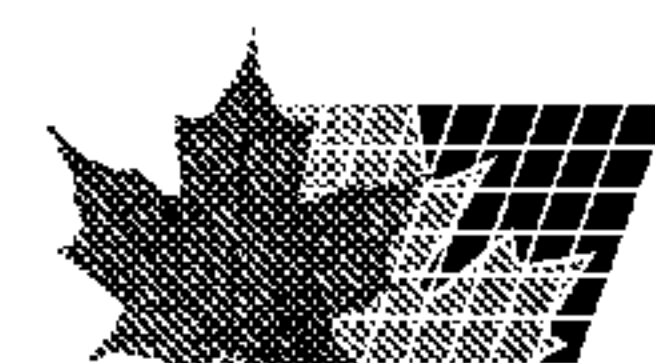

ABSTRACT

A carbonic anhydrase system and process are disclosed. The system has a reaction chamber, liquid inlet, gas inlet, liquid outlet and gas outlet, and uses carbonic anhydrase for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution.

CARBONIC ANHYDRASE SYSTEM AND PROCESS FOR TREATING A CO₂-CONTAINING GAS

FIELD OF THE INVENTION

This invention relates to the field of gas effluent treatment and air purification. More specifically, it concerns a triphasic carbonic anhydrase bioreactor for the biological treatment of gaseous effluent. The invention also concerns a triphasic process for the biological treatment of a CO₂-containing gas effluent.

BACKGROUND

Contemporary industrial activities generate gaseous effluents containing a multitude of chemical compounds and contaminants which interfere with the equilibrium of elements in nature and affect the environment at different levels. Acid rain, the green-house effect, smog and the deterioration of the ozone layer are examples that speak volumes about this problem. Reduction of noxious emissions is therefore not surprisingly the subject of more and more legislation and regulation. Industrial activities and applications which must contend with stricter environmental regulatory standards in order to expect any long term commercial viability, will turn more and more to biological and environmentally safe methods. Consequently, there is a real need for new apparatus and methods aimed at the biological treatment of gaseous waste or effluents.

There already exists a vast array of technologies aimed at the separation and recovery of individual or mixed gases and a number of different biological methods is known to treat gaseous waste or effluents : bacterial degradation (JP 2000-287679 ; JP2000-236870), fermentation by anaerobic bacteria (WO 98/00558), photosynthesis through either plants (CA 2,029,101 A1 ; JP04-190782) or microorganisms (JP 03-216180). Among the more popular are those gained through the harnessing of biological processes such as peat biofilters sprinkled with a flora of

microorganisms in an aqueous phase, or biofilter columns comprising immobilized resident microorganisms (Deshusses *et al.* (1996) *Biotechnol. Bioeng.* 49, 587-598). Although such biofilters have contributed to technological advances within the field of gaseous waste biopurification, the main drawbacks associated with their use are
5 their difficult maintenance and upkeep, lack of versatility, as well as time consuming bacterial acclimation and response to perturbation periods (Deshusses *et al.*).

A number of biological sanitation/purification methods and products is known to use enzymatic processes, coupled or not to filtration membranes (S5250305; US4033822; JP 63-129987). However, these are neither intended nor adequate for
10 the cleansing of gaseous waste or effluents. The main reason for this is that, in such systems, contaminants are generally already in solution (US5,130,237; US4,033,822; US4,758,417; US 5,250,305; WO97/19196; JP 63-129987). Efficient enzymatic conversion and treatability itself of gaseous waste or effluents in liquids therefore depend on adequate and sufficient dissolution of the gaseous phase in the
15 liquid phase. However, the adequate dissolution of gaseous waste or effluents into liquids for enzymatic conversion poses a real problem which constitutes the first of a series of important limitations which compound the problem of further technological advances in the field of gas biopurification.

Although triphasic « Gas-Liquid-Solid » (GLS) reactors are commonly used in a large
20 variety of industrial applications, their utilization remains quite limited in the area of biochemical gas treatment (US6245304; US4743545). Also known in the prior art are the GLS bioprocesses abundantly reported in the literature. A majority of these concerns wastewater treatment (JP09057289). These GLS processes are characterized in that the gaseous intake serves the sole purpose of satisfying the
25 specific metabolic requirements of the particular organism selected for the wastewater treatment process. Such GLS treatment processes are therefore not aimed at reducing gaseous emissions.

As previously mentioned, these systems are neither intended nor adequate for the treatment of gaseous waste or effluents. An additional problem associated with the use of these systems is the non-retention of the solid phase within the reactor. Biocatalysts are in fact washed right out of the reactors along with the liquid phase.

5 Different concepts are, nonetheless, based on this principle for the reduction of gaseous emissions, namely carbon dioxide. Certain bioreactors allow the uptake of CO₂ by photosynthetic organisms (CA229101; JP03-216180) and similar processes bind CO₂ through algae (CA2232707; JP08-116965; JP04-190782; JP04-075537). However, the biocatalyst retention problem remains largely unaddressed and
10 constitutes another serious limitation, along with gaseous effluent dissolution, to further technological advancements.

The main argument against the use of ultrafiltration membranes to solve this biocatalyst retention problem is their propensity to clogging. Clogging renders them unattractive and so their use is rather limited for the retention of catalysts within
15 reactors. However, a photobioreactor for medical applications as an artificial lung (WO9200380; US5614378) and an oxygen recovery system (US4602987; US4761209) are notable exceptions making use of carbonic anhydrase and an ultrafiltration unit.

The patent applications held by the assignee, CO₂ Solution Inc., *via* Les Systèmes
20 Envirobio Inc.(EP0991462 ; WO9855210 ; CA2291785) proposes a packed column for the treatment of carbon dioxide using immobilized carbonic anhydrase without the use of an ultrafiltration membrane. Carbonic anhydrase is a readily available and highly reactive enzyme that is used in other systems for the reduction of carbon dioxide emissions (US4602987; US4743545; US5614378; US6257335). In the
25 system described by Trachtenberg for the carbonic anhydrase treatment of gaseous effluents (US6143556; CA2222030), biocatalyst retention occurs through a porous wall or through enzyme immobilization. However, important drawbacks are associated with the use of enzyme immobilization, as will be discussed below.

Other major drawbacks are associated with the use of enzymatic systems. One of these stems from systems where enzymatic activity is specifically and locally concentrated. This is the case with systems where enzymes are immobilized at a particular site or on a specific part of an apparatus. Examples in point of such systems are those where enzymes are immobilized on a filtration membrane (JP60014900008A2 ; US4033822 ; US5130237 ; US5250305 ; JP54-132291 ; JP63-129987 ; JP02-109986 ; DE3937892) or even, at a gas-liquid phase boundary (WO 96/40414 ; US6,143,556). The limited surface contact area obtainable between the dissolved gas substrate, the liquid and the enzyme's active site poses an important problem. Hence, these systems generate significantly greater waste of input material, such as expensive purified enzymes, because the contact surface with the gaseous phase is far from optimal and limits productive reaction rates. Therefore, as mentioned previously, overcoming the contact surface area difficulty should yield further technological advances.

Other examples of prior art apparatuses or methods for the treatment of gas or liquid effluent are given in the following documents : CA2160311; CA2238323; CA2259492; CA2268641; JP2000-236870; JP2000-287679; JP2000-202239; US4758417; US5593886; US5807722; US6136577; and US6245304.

SUMMARY OF THE INVENTION

In one aspect, the present invention provides a carbonic anhydrase bioreactor for treating a CO₂-containing gas, comprising:

a reaction chamber for receiving a liquid;

carbonic anhydrase provided on or in substrates that are in suspension within the liquid for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution;

a liquid inlet in fluid communication with the reaction chamber for providing the reaction chamber with the liquid;

a gas inlet connected to the reaction chamber for providing the CO₂-containing gas to be treated into the reaction chamber in order to contact the liquid;

a liquid outlet in fluid communication with the reaction chamber for releasing the ion-rich solution; and

a gas outlet in fluid communication with the reaction chamber to release the treated gas.

In another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the substrates comprise supports and the carbonic anhydrase are provided on the supports.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the carbonic anhydrase are immobilized onto the supports.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the carbonic anhydrase are covalently bonded onto the supports.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the supports are solid polymer particles.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the supports are composed of nylon.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the supports are composed of polystyrene, polyurethane, polymethylmethacrylate, or functionalised silica gel.

5 Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the substrates comprise porous substrates and the carbonic anhydrase are entrapped in the porous substrates.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the porous substrates are made of organic or inorganic material.

10 Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the porous substrates comprise particles composed of an insoluble gel.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the porous substrates comprise particles
15 composed of silica.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the porous substrates comprise particles composed of alginate.

Also in another aspect, the present invention provides the carbonic anhydrase
20 bioreactor as described above, wherein the porous substrates comprise particles composed of alginate/chitosan.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the porous substrates comprise particles composed of alginate/carboxymethylcellulose.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the substrates comprise a network and the carbonic anhydrase are chemically linked with the network.

Also in another aspect, the present invention provides the carbonic anhydrase
5 bioreactor as described above, wherein the network is a PEG network.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the network is an albumin network.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the substrates include particles of 0.005 μm
10 to 0.1 μm in size.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the substrates include particles of 1 mm to 9 mm in diameter.

Also in another aspect, the present invention provides the carbonic anhydrase
15 bioreactor as described above, wherein the substrates include particles of 3 mm in diameter.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the particles are composed of alginate.

Also in another aspect, the present invention provides the carbonic anhydrase
20 bioreactor as described above, wherein the gas inlet comprises a gas bubbler for bubbling the CO_2 -containing gas into the liquid.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, comprising a pressure regulating valve to control a pressure created by the gas bubbled within the reaction chamber.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the pressure regulating valve is located in the gas outlet.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, further comprising a filter having pores with a smaller diameter than a diameter of the suspended substrates for separating the substrates from the ion-rich solution.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the filter is constructed to enable ultrafiltration or microfiltration.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein further comprising a retention device for retaining the substrates with reaction chamber.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, further comprising an additional reaction chamber in series with the reaction chamber, hereinafter referred to as the primary reaction chamber, and the additional reaction chamber is downstream from the primary reaction chamber for further treating the treated gas.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the primary reaction chamber and the additional reaction chamber both receive suspended substrates with the carbonic anhydrase provided thereon or therein.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the additional reaction chamber contains a biocatalyst different from the carbonic anhydrase of the primary reaction chamber.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the substrates include particles of sub-micron size.

Also in another aspect, the present invention provides the carbonic anhydrase
5 bioreactor as described above, wherein a mixer is provided within the reaction chamber.

Also in another aspect, the present invention provides the carbonic anhydrase bioreactor as described above, wherein the mixer is an axial propeller.

Also in another aspect, the present invention provides a process using carbonic
10 anhydrase for treating a CO₂-containing gas, comprising:

suspending substrates within a liquid provided to a reaction chamber, carbonic anhydrase being provided on or in the substrates;

contacting the CO₂-containing gas to be treated with the liquid within the reaction chamber in the presence of the carbonic anhydrase, to promote the
15 chemical conversion of the dissolved CO₂ into an ion-rich solution containing hydrogen ions and bicarbonate ions and obtaining a treated gas;

releasing the ion-rich solution from the reaction chamber; and

releasing the treated gas from the reaction chamber.

An object of the present invention is to provide an apparatus that is distinct from and
20 overcomes several disadvantages of the prior art bioreactor for the treatment of gas effluent, as will be discussed in detail below.

In another aspect of the present invention, there is provided a triphasic bioreactor for treating a CO₂-containing gas, comprising:

a reaction chamber containing a liquid;

suspended enzymes provided within the liquid for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution;

a liquid inlet in fluid communication with the reaction chamber for providing the reaction chamber with the liquid;

5 gas bubbling means connected to the reaction chamber for bubbling the CO₂-containing gas to be treated into the liquid thereby dissolving the gas into the liquid;

a liquid outlet in fluid communication with the reaction chamber for releasing the ion-rich solution; and

10 a gas outlet in fluid communication with the reaction chamber to release said treated gas.

The bioreactor may also comprise a retention device for retaining the biocatalysts within the reaction chamber while the liquid outlet allows for the pressure release of the solution containing the reaction product.

15 The triphasic bioreactor of the present invention provides the advantages of biologically treating gaseous waste and effluents while simultaneously providing biocatalysts in liquid suspension, optimizing gas phase dissolution into the liquid phase and thereby optimizing surface contact area between the gas, liquid and solid phases, as well as retaining the biocatalysts within the reactor while allowing the pressure release of liquid containing a reaction product exempt of biocatalysts.

20 In accordance with another aspect of the invention, the bioreactor comprises a pressure regulating valve to control a pressure created by the gas bubbled within the reaction chamber and a sampling means for sampling and analyzing liquid from the reaction chamber.

In other optional aspects there is provided an enzymatic formulation for catalysis of the reaction $\text{CO}_2 + \text{H}_2\text{O} \leftrightarrow \text{HCO}_3^- + \text{H}^+$, the enzymatic formulation comprising:

an aqueous medium;

support particles in suspension in the aqueous medium;

5 carbonic anhydrase supported by the support particles and present in an amount sufficient to catalyze the reaction.

In other optional aspects there is provided an enzymatic composition for catalysis of the reaction $\text{CO}_2 + \text{H}_2\text{O} \leftrightarrow \text{HCO}_3^- + \text{H}^+$, the enzymatic composition comprising:

support particles suspendable in an aqueous medium; and

10 carbonic anhydrase supported by the support particles and present in an amount sufficient to catalyze the reaction within the aqueous medium.

In other optional aspects there is provided a carbonic anhydrase system for treating a CO_2 -containing gas, comprising:

15 a reaction chamber for receiving an absorption liquid comprising carbonic anhydrase for catalyzing a reaction of CO_2 into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution comprising carbonic anhydrase;

20 a liquid inlet in fluid communication with the reaction chamber for receiving the absorption liquid comprising carbonic anhydrase and providing the reaction chamber with the absorption liquid comprising carbonic anhydrase;

a gas inlet connected to the reaction chamber for providing the CO_2 -containing gas to be treated into the reaction chamber in order to contact the absorption liquid comprising carbonic anhydrase;

a liquid outlet in fluid communication with the reaction chamber for releasing the ion-rich solution comprising carbonic anhydrase; and

a gas outlet in fluid communication with the reaction chamber to release the treated gas.

5 In other optional aspects there is provided a process using carbonic anhydrase for treating a CO₂-containing gas, comprising:

providing carbonic anhydrase within an absorption liquid;

feeding the absorption liquid comprising carbonic anhydrase via an inlet into a reaction chamber;

10 contacting the CO₂-containing gas to be treated with the absorption liquid within the reaction chamber in the presence of the carbonic anhydrase, to promote the chemical conversion of the dissolved CO₂ into an ion-rich solution comprising carbonic anhydrase and containing hydrogen ions and bicarbonate ions and obtaining a treated gas;

15 releasing the ion-rich solution comprising carbonic anhydrase from the reaction chamber; and

releasing the treated gas from the reaction chamber.

In other optional aspects there is provided a method for removing carbonic anhydrase from an ion-rich solution comprising hydrogen ions and bicarbonate ions,
20 comprising providing a tangential flow filter comprising a membrane; and flowing the ion-rich solution tangentially with respect to the membrane, so as to produce a carbonic anhydrase depleted ion-rich permeate and a retentate liquid containing the carbonic anhydrase.

In other optional aspects there is provided a carbonic anhydrase bioreactor for treating a CO₂-containing gas, comprising:

a reaction chamber for receiving a liquid;

5 porous particles with carbonic anhydrase entrapped therein provided in the reaction chamber for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution;

a retention device for retaining the porous particles within the reaction chamber;

10 a liquid inlet in fluid communication with the reaction chamber for providing the reaction chamber with the liquid;

a gas inlet connected to the reaction chamber for providing the CO₂-containing gas to be treated into the reaction chamber in order to contact the liquid;

15 a liquid outlet in fluid communication with the reaction chamber for releasing the ion-rich solution; and

a gas outlet in fluid communication with the reaction chamber to release the treated gas.

In other optional aspects there is provided a process using carbonic anhydrase for treating a CO₂-containing gas, comprising:

20 providing porous particles with carbonic anhydrase entrapped therein in a reaction chamber for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution;

retaining the porous particles within the reaction chamber;

contacting the CO₂-containing gas to be treated with the liquid within the reaction chamber in the presence of the carbonic anhydrase entrapped in the porous particles, to promote the chemical conversion of the dissolved CO₂ into an ion-rich solution containing hydrogen ions and bicarbonate ions and obtaining a treated gas;

releasing the ion-rich solution from the reaction chamber; and

releasing the treated gas from the reaction chamber.

In other optional aspects there is provided a carbonic anhydrase bioreactor for treating a CO₂-containing gas, comprising:

a reaction chamber for receiving a liquid;

particles comprising porous material with carbonic anhydrase entrapped in the porous material, the particles being provided in the reaction chamber for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution;

a retention device for retaining the porous particles within the reaction chamber;

a liquid inlet in fluid communication with the reaction chamber for providing the reaction chamber with the liquid;

a gas inlet connected to the reaction chamber for providing the CO₂-containing gas to be treated into the reaction chamber in order to contact the liquid;

a liquid outlet in fluid communication with the reaction chamber for releasing the ion-rich solution; and

a gas outlet in fluid communication with the reaction chamber to release the treated gas.

In other optional aspects there is provided a process using carbonic anhydrase for treating a CO₂-containing gas, comprising:

- 5 providing particles comprising porous material with carbonic anhydrase entrapped in the porous material, in a reaction chamber for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution;
- retaining the particles within the reaction chamber;
- 10 contacting the CO₂-containing gas to be treated with the liquid within the reaction chamber in the presence of the carbonic anhydrase entrapped in the porous particles, to promote the chemical conversion of the dissolved CO₂ into an ion-rich solution containing hydrogen ions and bicarbonate ions and obtaining a treated gas;
- 15 releasing the ion-rich solution from the reaction chamber; and
- releasing the treated gas from the reaction chamber.

The gas bubbling means preferably comprises a gas inlet of the reaction chamber to receive the gas to be treated and a bubbler located in a bottom portion of the reaction chamber. The bubbler has a gas inlet connected to the gas inlet of the
20 reaction chamber and a plurality of gas outlets to diffuse the gas in the reaction chamber. The gas bubbling means further comprises a pipe to connect the gas inlet of the reaction chamber to the gas inlet of the bubbler.

The biocatalysts used in the bioreactor are preferably selected from the group consisting of enzymes, liposomes, microorganisms, animal cells, plant cells and a
25 combination thereof. Most preferably, the biocatalysts are entrapped in porous

substrates pervading the reaction chamber. Alternatively, the biocatalysts may be carried by the liquid that feeds the reaction chamber.

The retention device preferably comprises a filter having pores with a smaller diameter than the diameter of the biocatalysts. More preferably, the filter is a
5 membrane filter.

In accordance with a first preferred embodiment, the membrane filter is located inside the reaction chamber upstream from the liquid outlet.

In accordance with a second preferred embodiment, the membrane filter is located outside the reaction chamber. In such a case, the retention device further comprises
10 a first piping means and a second piping means. The first piping means is for piping liquid, which contains biocatalysts and reaction products, from the liquid outlet of the reaction chamber to the membrane filter where a permeate liquid containing the reaction products is separated from a retentate liquid containing the biocatalysts. The second piping means is for piping the retentate liquid to the liquid inlet of the
15 bioreactor.

In accordance with a preferred aspect of the invention, the triphasic bioreactor is used for reducing carbon dioxide contained in a gas effluent. In such a case, the gas effluent to be treated contains carbon dioxide, the liquid filling the bioreactor is an aqueous liquid and the biocatalysts are enzymes capable of catalyzing the chemical
20 conversion of the dissolved carbon dioxide into an aqueous solution containing hydrogen ions and bicarbonate ions. More preferably, the enzymes are carbonic anhydrase.

In accordance with a still further preferred aspect of the invention, the bioreactor comprises an additional reaction chamber, as defined hereinabove, in series with the
25 reaction chamber, hereinafter referred to as the first reaction chamber, to further treat the previously treated gas. In such a case, the biocatalysts filling the first

reaction chamber are preferably different from the biocatalysts filling the additional reaction chamber.

The present invention also provides a method for the biocatalytic treatment of gas effluent which is basically a three-step process.

- 5 First, a reaction chamber filled with biocatalysts is filled with a liquid thereby suspending the biocatalysts in the liquid. Second, a gas to be treated is bubbled into the liquid thereby dissolving it into the liquid and creating a pressure inside the reaction chamber. The bubbling thereby promotes the biocatalytic reaction between the liquid and the gas to be treated in order to obtain a treated gas and a solution
10 containing a reaction product. Third, the solution containing the reaction product is released by pressure from the reaction chamber whilst retaining the biocatalysts within the reaction chamber. During the second and third steps, the pressure is controlled within the reaction chamber and treated gas is released from the reaction chamber.
- 15 In another aspect of the present invention, there is also provided a triphasic process for treating a CO₂-containing gas, comprising:

- a) suspending enzymes in a liquid within a reaction chamber;
- b) injecting the CO₂-containing gas to be treated into the liquid of the reaction chamber to promote dissolution of the gas into the liquid, and allowing the
20 enzymes to promote the chemical conversion of the dissolved CO₂ into an aqueous solution containing hydrogen ions and bicarbonate ions and obtaining a treated gas;
- c) releasing the solution obtained in step b) from the reaction chamber;
and
- d) releasing the treated gas obtained in step b).

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the invention will become apparent upon reading the detailed description and upon referring to the drawings in which:

Figure 1 is a cross-sectional side view of a triphasic bioreactor according to a first preferred embodiment of the invention.

Figure 2 is a schematic side view of a triphasic bioreactor according to a second preferred embodiment of the invention having an external tangential flow filter.

Figure 3 is a schematic side view of a triphasic bioreactor according to another embodiment of the invention, having an integrated filter.

Figure 4 is a schematic side view of a triphasic bioreactor according to a further embodiment, having an integrated tangential flow filter.

Figure 5 is a schematic side view of a triphasic bioreactor according to a still further embodiment, having a filter cartridge.

Figure 6 is a schematic side view of a series of linked triphasic bioreactors for the treatment of gas effluent.

While the invention will be described in conjunction with example embodiments, it will be understood that it is not intended to limit the scope of the invention to such embodiments. On the contrary, it is intended to cover all alternatives, modifications and equivalents as may be included as defined by the appended claims.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Referring to Figures 1 or 2, the triphasic bioreactor (1) is an apparatus for physico-chemically treating a gas (10). Minimally, it features a reaction chamber (2) filled with biocatalysts (4) in suspension in a liquid (3), a liquid inlet (5) and liquid (6) and

gas (7) outlets in fluid communication with the reaction chamber (2). It is worth noting that the use of the article "a" means "at least one" and hence a triphasic bioreactor according to the invention may advantageously comprise more than one reaction chamber, and/or more than one liquid and gas outlet and inlets. The liquid inlet (5) is for receiving the liquid (3) and filling the reaction chamber (2). The reaction chamber (2) is made of an appropriate material that could be glass, plastic, stainless steel, a synthetic polymer or other suitable material.

A gas bubbling means (8) and a retention device (9) are also provided. The gas bubbling means (8) is for receiving the gas (10), or gases, to be treated inside the reaction chamber (2) and for bubbling it into the liquid (3) thereby both dissolving the gas to be treated (10) into the liquid (3) and creating a pressure within the reaction chamber (2). The biocatalysts (4) are chosen so as to be able to biocatalyze a reaction between the gas (10) to be treated and the liquid (3) in order to obtain a treated gas (11) and a solution (12) containing a reaction product. The liquid outlet (6) is for releasing by pressure the solution (12) containing the reaction product while the retention device (9) retains the biocatalysts (4) within the reaction chamber (2). The gas outlet (7) is for releasing the treated gas (11) from the reaction chamber (2).

The triphasic bioreactor (1) preferably includes a pressure regulating valve (13) to control the pressure created by the gas (10) bubbled into the reaction chamber (2). The pressure regulating valve (13) may be located in the gas outlet (7). The triphasic bioreactor (1) may also include a valve (14) at the liquid outlet (6) and/or at the liquid inlet (5) for regulating the flow of liquid (3) into and out of the reaction chamber (2). As will become more apparent further along in the description, these features are used for both regulating the pressure inside the reaction chamber (2) so as not to exceed the pressure limits the apparatus may withstand, but also to better control the pressure release of the solution (12) containing the reaction product.

As shown in Figure 2, the triphasic bioreactor (1) may include a mixer (15) within the reaction chamber (2) to mix the liquid (3), the biocatalysts (4) and the gas (10). Any

type of mixer known in the art could be used. For example, as shown in Figure 2, the mixer (15) might include an axial propeller (16) operatively connected to a top cover (18) of the reaction chamber (2) by means of a driving shaft (17). In such a case, the bioreactor also comprises a suitable driving means for driving the shaft into rotation.

5 In order to drive forward the reaction between the gas to be treated (10) and the liquid (3), the biocatalysts (4) must comprise a molecule capable of reacting with the substrates, namely the dissolved gas (10) and the liquid (3), so as to yield a treated gas (11) and a solution (12) containing a reaction product. Biocatalysts comprising such a molecule may be selected from a wide variety of biological materials
10 including enzymes, liposomes, microorganisms, animal cells and/or plant cells and the like. Fractions, complexes or combinations thereof may also be used simultaneously. Fractions of enzymes may comprise, for example, specific sub-units of an enzyme, such as its catalytic sub-units. Fractions of a microorganism, animal or plant cell may comprise, for example, specific sub-cellular organelles or
15 compartments such as cellular membranes, ribosomes, mitochondria, chloroplasts or fractions such as cytoplasmic or nuclear extracts. For the purpose of the invention, the biocatalysts may also be entrapped in a porous substrate, for example, an insoluble gel particle such as silica, alginate, alginate/chitosane, alginate/carboxymethylcellulose, etc. For the purpose of the invention, biocatalysts
20 may also be immobilized on solid packing in suspension in the liquid, such as enzymes covalently bound to plastic packing. Alternatively, enzymes might be in a free state, or chemically linked in an albumin or PEG network. All of these biological materials, which may be obtained through routine methods that are well documented in the scientific literature and known to the person skilled in the art, may be made of
25 use with the present invention which is quite versatile.

Retention of the biocatalysts (4) inside the reaction chamber (2) is an important feature of the invention as biological materials are often quite expensive. In order to allow the pressure release of solution (12) containing the reaction product whilst

retaining the biocatalysts (4) within the reaction chamber (2), the retention device (9) must be adapted according to the relative and respective sizes of the reaction products and the biocatalysts (4), as well as co-factors when appropriate.

Pressure release of the solution (11) containing the reaction product may be likened
5 to pressure filtration such as ultrafiltration or microfiltration, which are defined as the action of filtering a solution through a fine membrane by pressure. "Ultrafiltration" is a term which is, in the strict sense, reserved for the physical separation of particles of 0,005 to 0,1 μm in size.

Although, in a variety of its embodiments the present invention may make use of
10 ultrafiltration or microfiltration membranes (19) (20), as shown in Figures 2-6, it is by no means restricted to their use. For instance, depending upon the size of the biocatalysts and reaction product, an appropriate retention device (9) may comprise a simple grid and/or perforated base, at the bottom of the reaction chamber (2), as shown in Figure 1, for slowing the flow of solution (11) containing the reaction
15 product from the reaction chamber (2) whilst retaining the biocatalysts (4) inside the reaction chamber (2).

In the present invention, pressure is generated within the reaction chamber (2) by bubbling the gas to be treated (10) into the liquid (3). This pressure contributes to the dissolution of the gas to be treated (10) inside the liquid (3) containing the
20 biocatalysts (4) and therefore to its further physico-chemical transformation. The partial pressure inside the reaction chamber (2) is greater on one side of the retention device (9). There is consequently greater dissolution of gas to be treated according to the law of dissolution of gases, known as the law of Henry, which states that the concentration of a given dissolved gas is proportional to its partial pressure
25 in the atmosphere at the surface of the liquid. As stated above, the retention device (9) preferably comprises a filter (19). If the biocatalyst materials are sub-microns particles, for example in the range of 0,005 to 0,1 μm in size, a membrane filter is

preferably used. Such a membrane filter may be made of cellulose, nylon, polymethyl methacrylate, PVDF or the like, with pores having a smaller diameter than the diameter of the biocatalysts, and co-factors when appropriate.

As shown in Figures 1, and 3 to 5, the membrane filter (19) may be integrated inside the reaction chamber (2) upstream from the liquid outlet (6). In such an embodiment, the liquid flows perpendicularly to the filter (19) as in classic frontal filtration. Appropriate pore size allows permeate liquid (12) to exit through the filter (19) exempt of biocatalysts (4). The solution (12) containing the reaction product must therefore pass through the filter (19) first in order to be able to exit the reaction chamber (2) via the liquid outlet (6). The permeate liquid (12) or filtrate released may then be discarded or conveyed/piped to other treatment units for further treatment such as decantation, ion exchange, etc.

Alternatively, the bioreactor (1) may include an integrated filter cartridge (20) fixed inside the reaction chamber (2) and positioned at the desired height within the reaction chamber (2), as shown in Figure 5. The filter cartridge (20) is linked directly to the non-pressurized liquid outlet (6) and allows for filtration of the solution (11) containing the reaction product, but not the biocatalysts (4), directly into the liquid outlet (6). As mentioned above, the pore size of the membrane (19) inside the cartridge (20) is dependent upon both the size of the biocatalysts (4) and the reaction product, as well as co-factors when appropriate.

Optionally, the bioreactor (1) may also incorporate a closed loop circuit (21) including a pump (22) to circulate liquid tangentially to the membrane (19), as shown in Figures 2 and 4. This particular embodiment of the invention is different because instead of being perpendicular to the filter, the flow of liquid is "tangential" relatively to the filter membrane (19). Liquid therefore "sweeps" the filter membrane (19) tangentially thereby promoting recirculation of the liquid (3) and the biocatalysts (4). The captive biocatalysts (4) therefore remain in liquid suspension. Clogging of the pores of the membrane filter is consequently considerably reduced.

In accordance with a second preferred embodiment of the invention, the membrane filter (19) may be located outside of the reaction chamber (2), as shown in Figures 2 and 6. According to this particular embodiment, the retention device (9) will further include a first pipe, or any other means adapted to convey a liquid, for piping the solution (12) containing biocatalysts (4) and reaction products from the liquid outlet (6) of the reaction chamber (2) to the membrane filter (19) where a permeate liquid (12) e.g. the solution (12) containing the reaction products, is separated from the retentate liquid (26) containing the biocatalysts (4). In such an embodiment, the retention device (9) further comprises a second pipe for piping the retentate liquid (26) back to the liquid inlet (5) and into the bioreactor's reaction chamber (2). The permeate liquid (12) may be discarded, or conveyed/piped to other treatment units for further treatment such as decantation, ion exchange etc.

An important feature of the invention is the gas bubbling means (8). In one embodiment of the triphasic bioreactor, the gas bubbling means (8) preferably comprises a bubbler (24) or a number of these, as shown in Figure 1, located in the bottom portion of the reaction chamber (2). The bubbler (24) has a gas inlet (29) connected to a gas inlet (23) of the reaction chamber (2) by means of a suitable pipe (27), to receive the gas effluent (10) to be treated. The bubbler (24) also comprises a plurality of gas outlets (28) to diffuse the gas in the reaction chamber (2).


As shown in Figure 1, the gas bubbling means may include a bubbler (24) in the form of a removable cap, made of a foam-like material, covering a gas outlet nozzle, at the bottom portion of the triphasic bioreactor (2). Foam-like material is advantageous as it provides the plurality of gas outlets (28) needed to diffuse very fine bubbles and contributes to their uniform distribution within the liquid (3) containing the biocatalysts (4). The reduction in size of the gas bubbles enhances both gas dissolution and contact surface between gas (10) and liquid (3) phase reactants and the biocatalysts (4). As stated above, the invention may include a

mixer (15) in order to enhance the uniform distribution of gas (10) bubbles and biocatalysts (4) within the liquid (3).

The relative size and dimensions of the reaction chamber (2), as well as the relative porosity of the filter membranes used, if any, is dependent upon particular usage requirements and directly proportional to the liquid flow rates required. As expected, liquid flow rates may vary greatly between different applications. Appropriate dimension adjustments and allowances should therefore be made when passing from one type of application to the other.

In accordance with a preferred aspect of the invention, the triphasic bioreactor is used for removing carbon dioxide from a gas effluent (10) containing carbon dioxide. In such a case, the liquid (3) filling the reaction chamber (2) is an aqueous solution, preferably water, and the biocatalysts (4) are enzymes capable of catalyzing the chemical conversion of the dissolved carbon dioxide into an aqueous solution (12) containing hydrogen ions and bicarbonate ions. The enzymes are, preferably, carbonic anhydrase.

The transformation of CO₂ into bicarbonate ions, usually a slow naturally occurring process, is catalyzed by the enzyme in suspension in the reaction chamber (2). Without catalysis, the equilibrium reaction must undergo an intermediate hydration that slows the transformation of CO₂ into bicarbonate ions. The following equations describe the relevant processes:

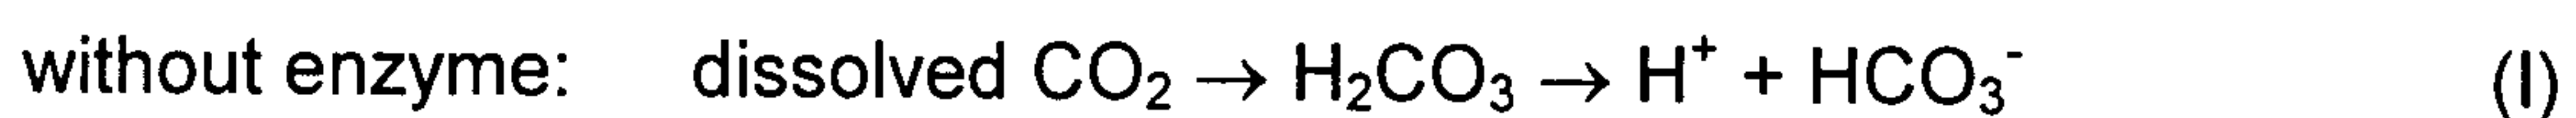

The enzyme carbonic anhydrase, which is of relatively low molecular weight (30,000 daltons), may be made to form part of a complex in order to increase its size. This, in turn, allows the use of membranes with greater porosity and enhances liquid flow rates. Different types of enzyme complexes may be formed. Among these are those

using whole cells such as red blood cells. However, with red blood cells, the enzymes rapidly leak out and are lost. Encapsulation techniques may therefore overcome this problem. Enzymes may be immobilized on solid packing. Packing made of polymers such as nylon, polystyrene, polyurethane, polymethyl methacrylate, functionalized silica gel, etc. may be used. Enzymes may also be entrapped in insoluble gel particles such as silica, alginate, alginate/chitosane or alginate/carboxymethylcellulose, etc. or covalently linked or non-covalently linked in a network of albumin, PEG or other molecule. Such a network constitutes a loose type network. It may appear as a cloudy suspension, "filaments" of which are often visible to the naked eye. For the purpose of the invention, alginate particles should preferably possess a diameter comprised in a range from 1 to 9 mm, and preferably, a diameter inferior to 3 mm.

Thanks to the different features of the triphasic bioreactor, such as the bubbling means and the enclosed reactor filled with the aqueous liquid, the pressure obtained inside the reaction chamber (2) permits the gas effluent containing carbon dioxide to rapidly dissolve into the liquid (3) which contains the carbonic anhydrase biocatalysts (4), thereby optimizing the reaction conditions of reaction (II). A tangential flow filtration system, such as shown in Figures 2, 4 and 6, allows the solution (12) containing the bicarbonate ions to be released from the reaction chamber (2) while part of the liquid containing the carbonic anhydrase biocatalysts (4) is returned to the reaction chamber (2).

In order to better monitor the parameters of the reaction process such as pH, temperature, reaction by-product concentration, etc., the triphasic bioreactor (1) may incorporate a sampling means (25) for sampling and analyzing liquid from inside the reaction chamber, as shown in Figure 2. As well, thermoregulation circuits may be added onto the reaction chamber in order to optimize temperature conditions. Gas composition analyzers may also be provided at the gas inlet (5) and/or outlet (7). Additional valves may also be added onto the liquid and gas inlets and outlets in

order to better regulate the flow rates of the different phases, the level of liquid inside the reaction chamber, the pressure inside the reaction chamber, etc.

In yet another embodiment, the invention may consist in a series of reaction chambers (2), with one or more additional reaction chambers, as shown in Figure 6.

5 These may be linked so as to treat gas simultaneously or sequentially. In reaction chambers linked in succession, as shown in Figure 6, the gas outlet (7) which releases the treated gas from one reaction chamber (2) may be linked in fluid communication to the next reaction chamber (2) through its gas inlet (23). This allows for further or extensive treatment of the gas. The number of reaction
10 chambers therefore depends on the extent of gas treatment required. Extensive or further treatment might entail treating the gas repeatedly in successive reaction chambers, all of which contain the same biocatalysts. However, extensive or further treatment might also entail different treatments in succession, the particular biocatalysts varying from one reaction chamber to the next. Therefore biocatalysts
15 in one reaction chamber may be different from the biocatalysts in the other reaction chamber(s) in such a series.

Another object of the invention is to provide a triphasic process for physico-chemically treating a gas effluent. The process of the invention is basically a three-step process. First, a reaction chamber, filled with the biocatalysts (4) in suspension
20 in the liquid (3), is provided. Second, the gas to be treated (10) is bubbled into the liquid (3) in the reaction chamber (2) in order to dissolve the gas to be treated (10) into the liquid (3) and to increase a pressure within the reaction chamber (2). Bubbling thereby promotes the biocatalytic reaction between the liquid (3) and the gas (10) in order to obtain a treated gas (11) and a solution (12) containing a
25 reaction product. Third, the solution (12) containing a reaction product is pressure released from the reaction chamber (2) whilst retaining the biocatalysts (4) within the reaction chamber (2). All the while during the second and third steps, the pressure is

controlled within the reaction chamber (2) and a treated gas (11) is released from the reaction chamber (2).

In yet another embodiment of the invention, the last step of the process may occur through ultrafiltration. The ultrafiltration may be conducted either inside or outside of
5 the reaction chamber.

Although preferred embodiments of the present invention have been described in detail herein and illustrated in the accompanying drawings, it is to be understood that the invention is not limited to these precise embodiments and that various changes and modifications may be effected therein without departing from the scope or spirit
10 of the present invention.

WHAT IS CLAIMED IS:

1. A carbonic anhydrase system for treating a CO₂-containing gas, comprising:

a reaction chamber for receiving an absorption liquid comprising carbonic anhydrase for catalyzing a reaction of CO₂ into bicarbonate and hydrogen ions to obtain a treated gas and an ion-rich solution comprising carbonic anhydrase;

a liquid inlet in fluid communication with the reaction chamber for receiving the absorption liquid comprising carbonic anhydrase and providing the reaction chamber with the absorption liquid comprising carbonic anhydrase;

a gas inlet connected to the reaction chamber for providing the CO₂-containing gas to be treated into the reaction chamber in order to contact the absorption liquid comprising carbonic anhydrase;


a liquid outlet in fluid communication with the reaction chamber for releasing the ion-rich solution comprising carbonic anhydrase; and

a gas outlet in fluid communication with the reaction chamber to release the treated gas.
2. The carbonic anhydrase system according to claim 1, wherein the reaction chamber, the liquid inlet and the liquid outlet are configured and adapted to accommodate the carbonic anhydrase free in the absorption liquid.
3. The carbonic anhydrase system according to claim 1 or 2, comprising a removal unit for removing the carbonic anhydrase from the ion-rich solution.

4. The carbonic anhydrase system according to claim 3, wherein the removal unit comprises a filter having pores with a smaller diameter than a diameter of the carbonic anhydrase for separating the carbonic anhydrase from the ion-rich solution.
5. The carbonic anhydrase system according to claim 4, wherein the filter comprises a membrane.
6. The carbonic anhydrase system according to claim 4 or 5, further comprising a pump in fluid communication with the liquid outlet and wherein the filter is provided downstream of the pump.
7. The carbonic anhydrase system according to any one of claims 4 to 6, wherein the filter is an ultrafiltration filter.
8. The carbonic anhydrase system according to any one of claims 4 to 7, wherein the filter is a microfiltration filter.
9. The carbonic anhydrase system according to any one of claims 4 to 8, wherein the filter comprises a permeate outlet and a retentate outlet, the permeate outlet releasing a carbonic anhydrase depleted ion-rich solution and the retentate outlet releasing a separated liquid containing the carbonic anhydrase.
10. The carbonic anhydrase system according to claim 8, comprising a recycle line for recycling the separated liquid back into the reaction chamber.
11. The carbonic anhydrase system according to any one of claims 4 to 10, wherein the filter is external of the reaction chamber.
12. The carbonic anhydrase system according to any one of claims 4 to 11, wherein the filter is a tangential flow filter.

13. The carbonic anhydrase system according to any one of claims 1 to 12, comprising further treatment units for receiving the carbonic anhydrase depleted ion-rich solution.
14. The carbonic anhydrase system according to claim 13, wherein the further treatment units are selected from decantation units and ion exchange units.
15. A process using carbonic anhydrase for treating a CO₂-containing gas, comprising:
 - providing carbonic anhydrase within an absorption liquid;
 - feeding the absorption liquid comprising carbonic anhydrase via an inlet into a reaction chamber;
 - contacting the CO₂-containing gas to be treated with the absorption liquid within the reaction chamber in the presence of the carbonic anhydrase, to promote the chemical conversion of the dissolved CO₂ into an ion-rich solution comprising carbonic anhydrase and containing hydrogen ions and bicarbonate ions and obtaining a treated gas;
 - releasing the ion-rich solution comprising carbonic anhydrase from the reaction chamber; and
 - releasing the treated gas from the reaction chamber.
16. The process according to claim 15, wherein the carbonic anhydrase is provided free in the absorption liquid.
17. The process according to claim 15 or 16, further comprising removing the carbonic anhydrase.

18. The process according to claim 17, wherein the step of removing comprises filtering the carbonic anhydrase out of the ion-rich solution.
19. The process according to claim 18, wherein the filtering is performed by a membrane.
20. The process according to claim 18 or 19, further comprising pumping the ion-rich solution from the reaction chamber to the filtering step.
21. The process according to any one of claims 18 to 20, wherein the filtering is performed by ultrafiltration of the carbonic anhydrase.
22. The process according to any one of claims 18 to 20, wherein the filtering is performed by microfiltration of the carbonic anhydrase.
23. The process according to any one of claims 18 to 22, wherein the filtering comprises releasing a carbonic anhydrase depleted ion-rich permeate and a retentate liquid containing the carbonic anhydrase.
24. The process according to claim 23, wherein the retentate liquid containing the carbonic anhydrase is recycled back to the reaction chamber.
25. The process according to any one of claims 18 to 24, wherein the filtering comprises flowing the ion-rich solution through a tangential flow filter.
26. The process according to any one of claims 18 to 25, comprising conveying the carbonic anhydrase depleted ion-rich permeate to further treatments.
27. The process according to claim 26, wherein the further treatments units are selected from decantation and ion exchange.

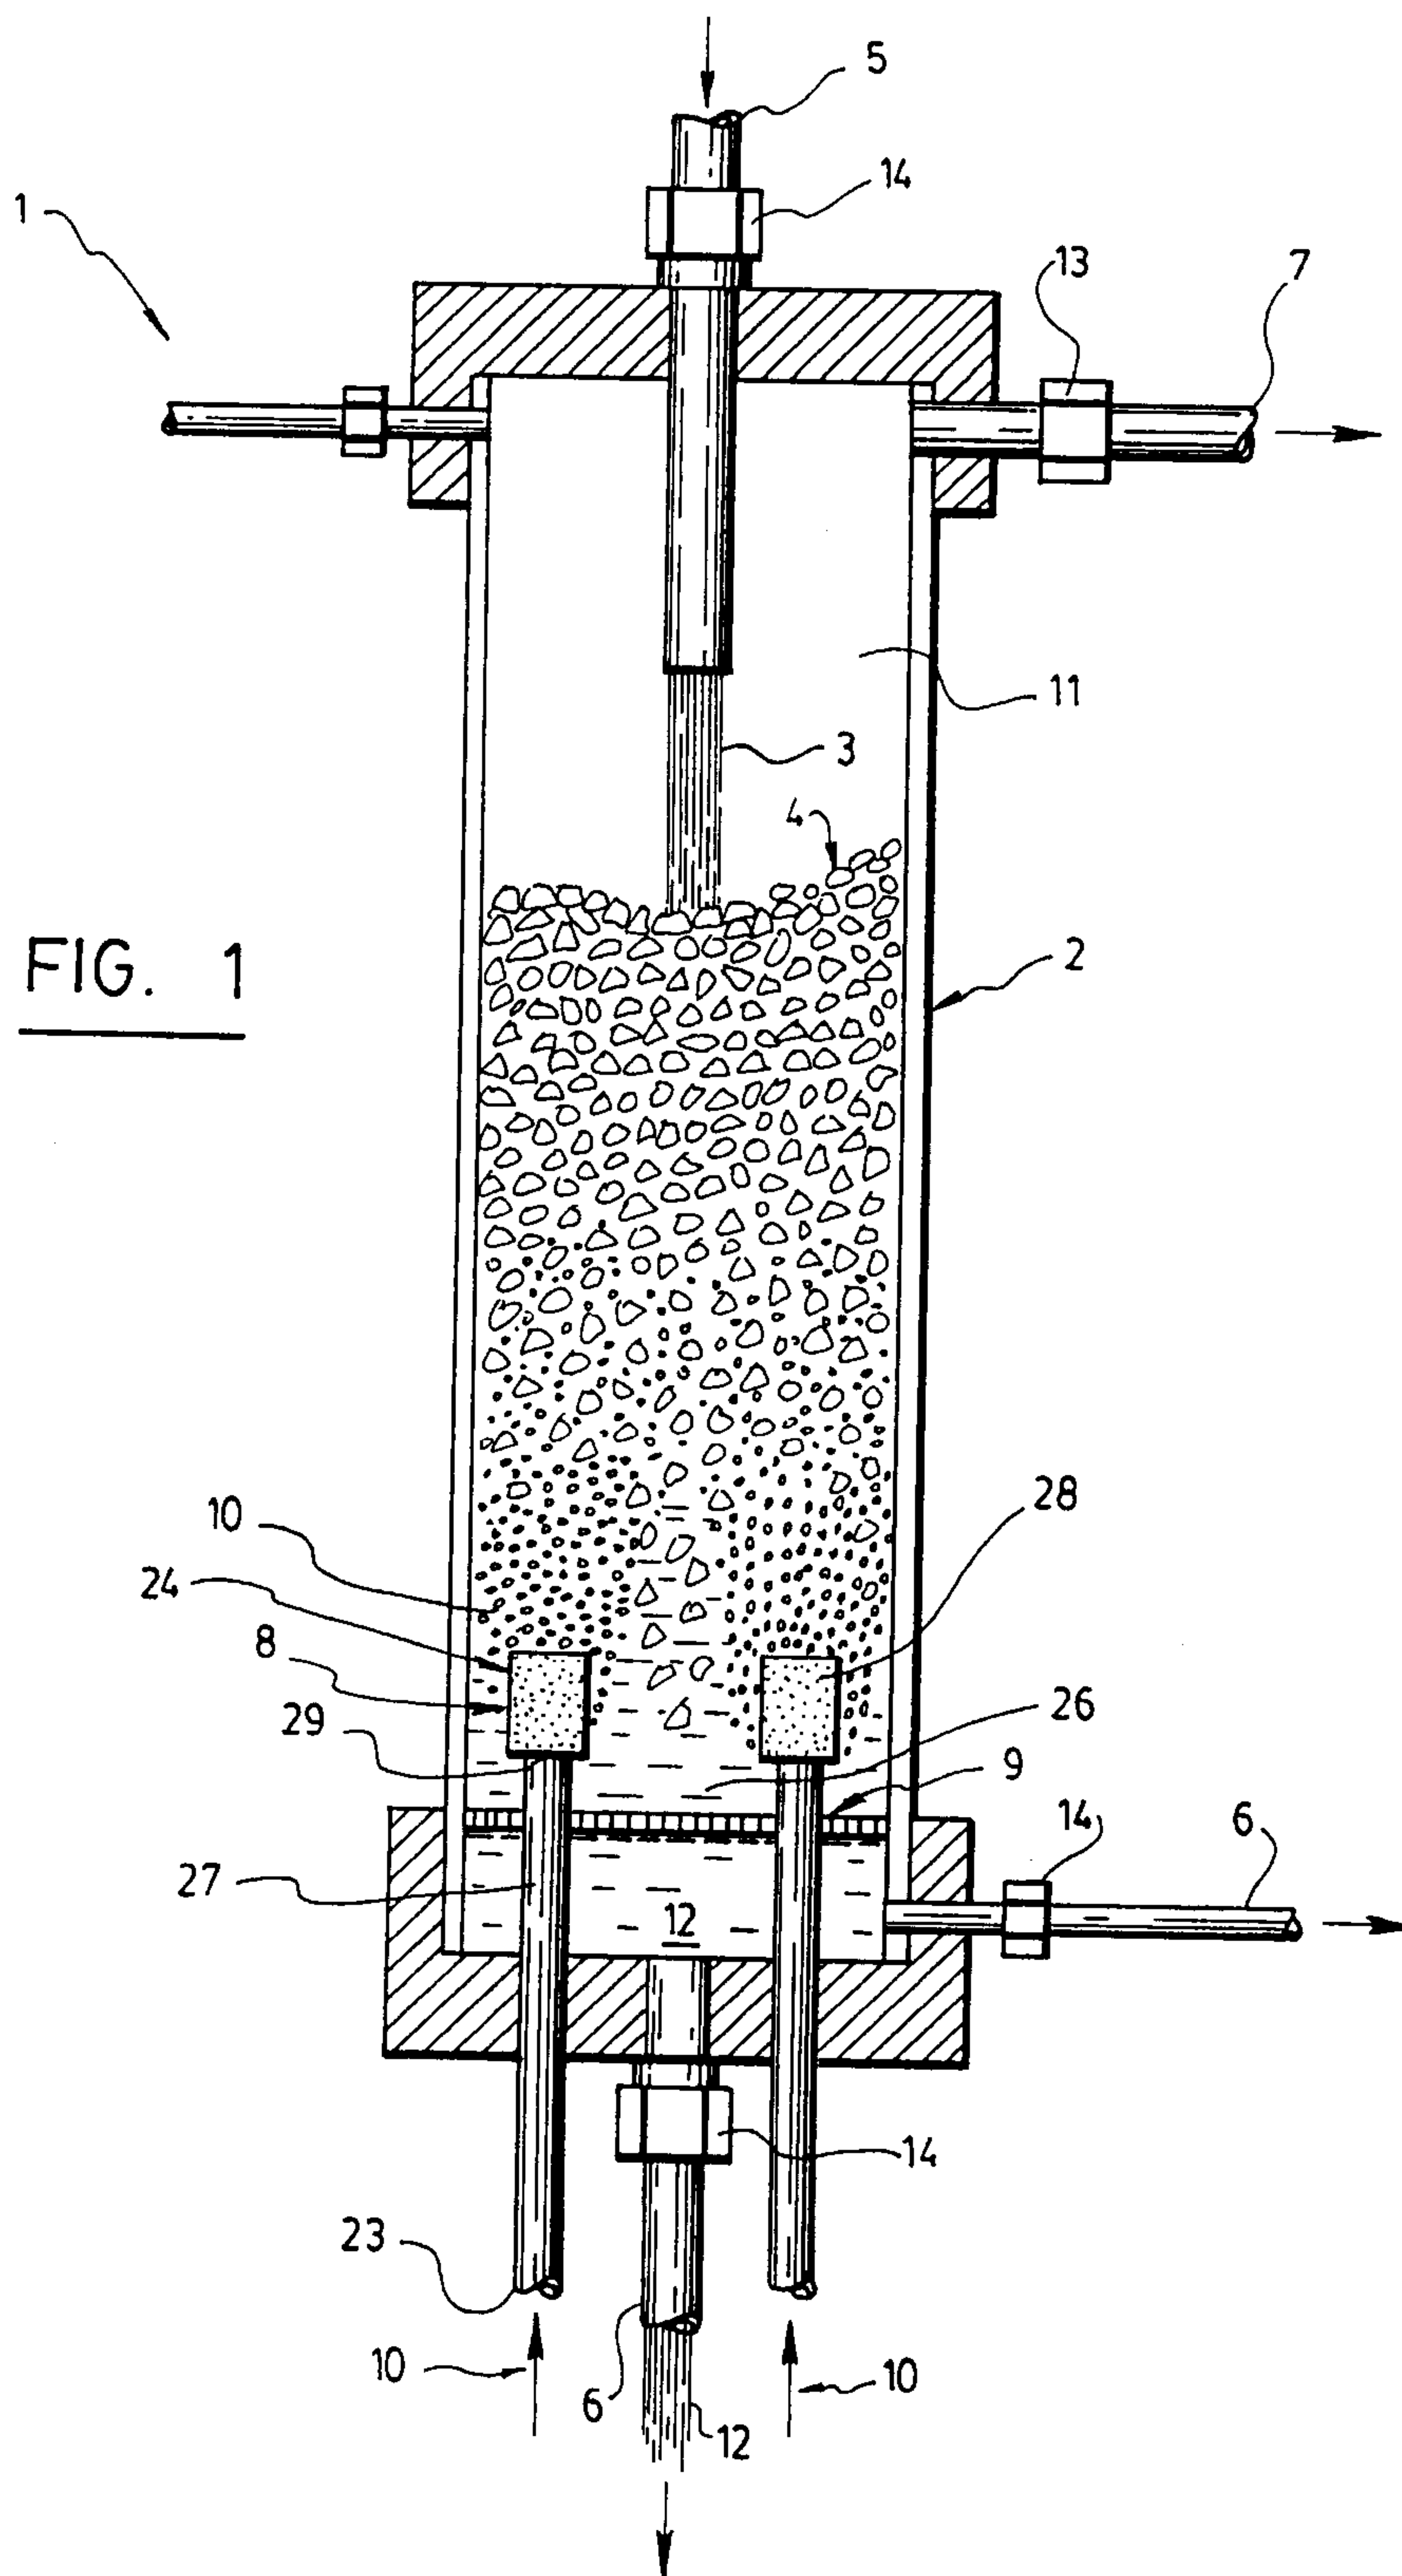

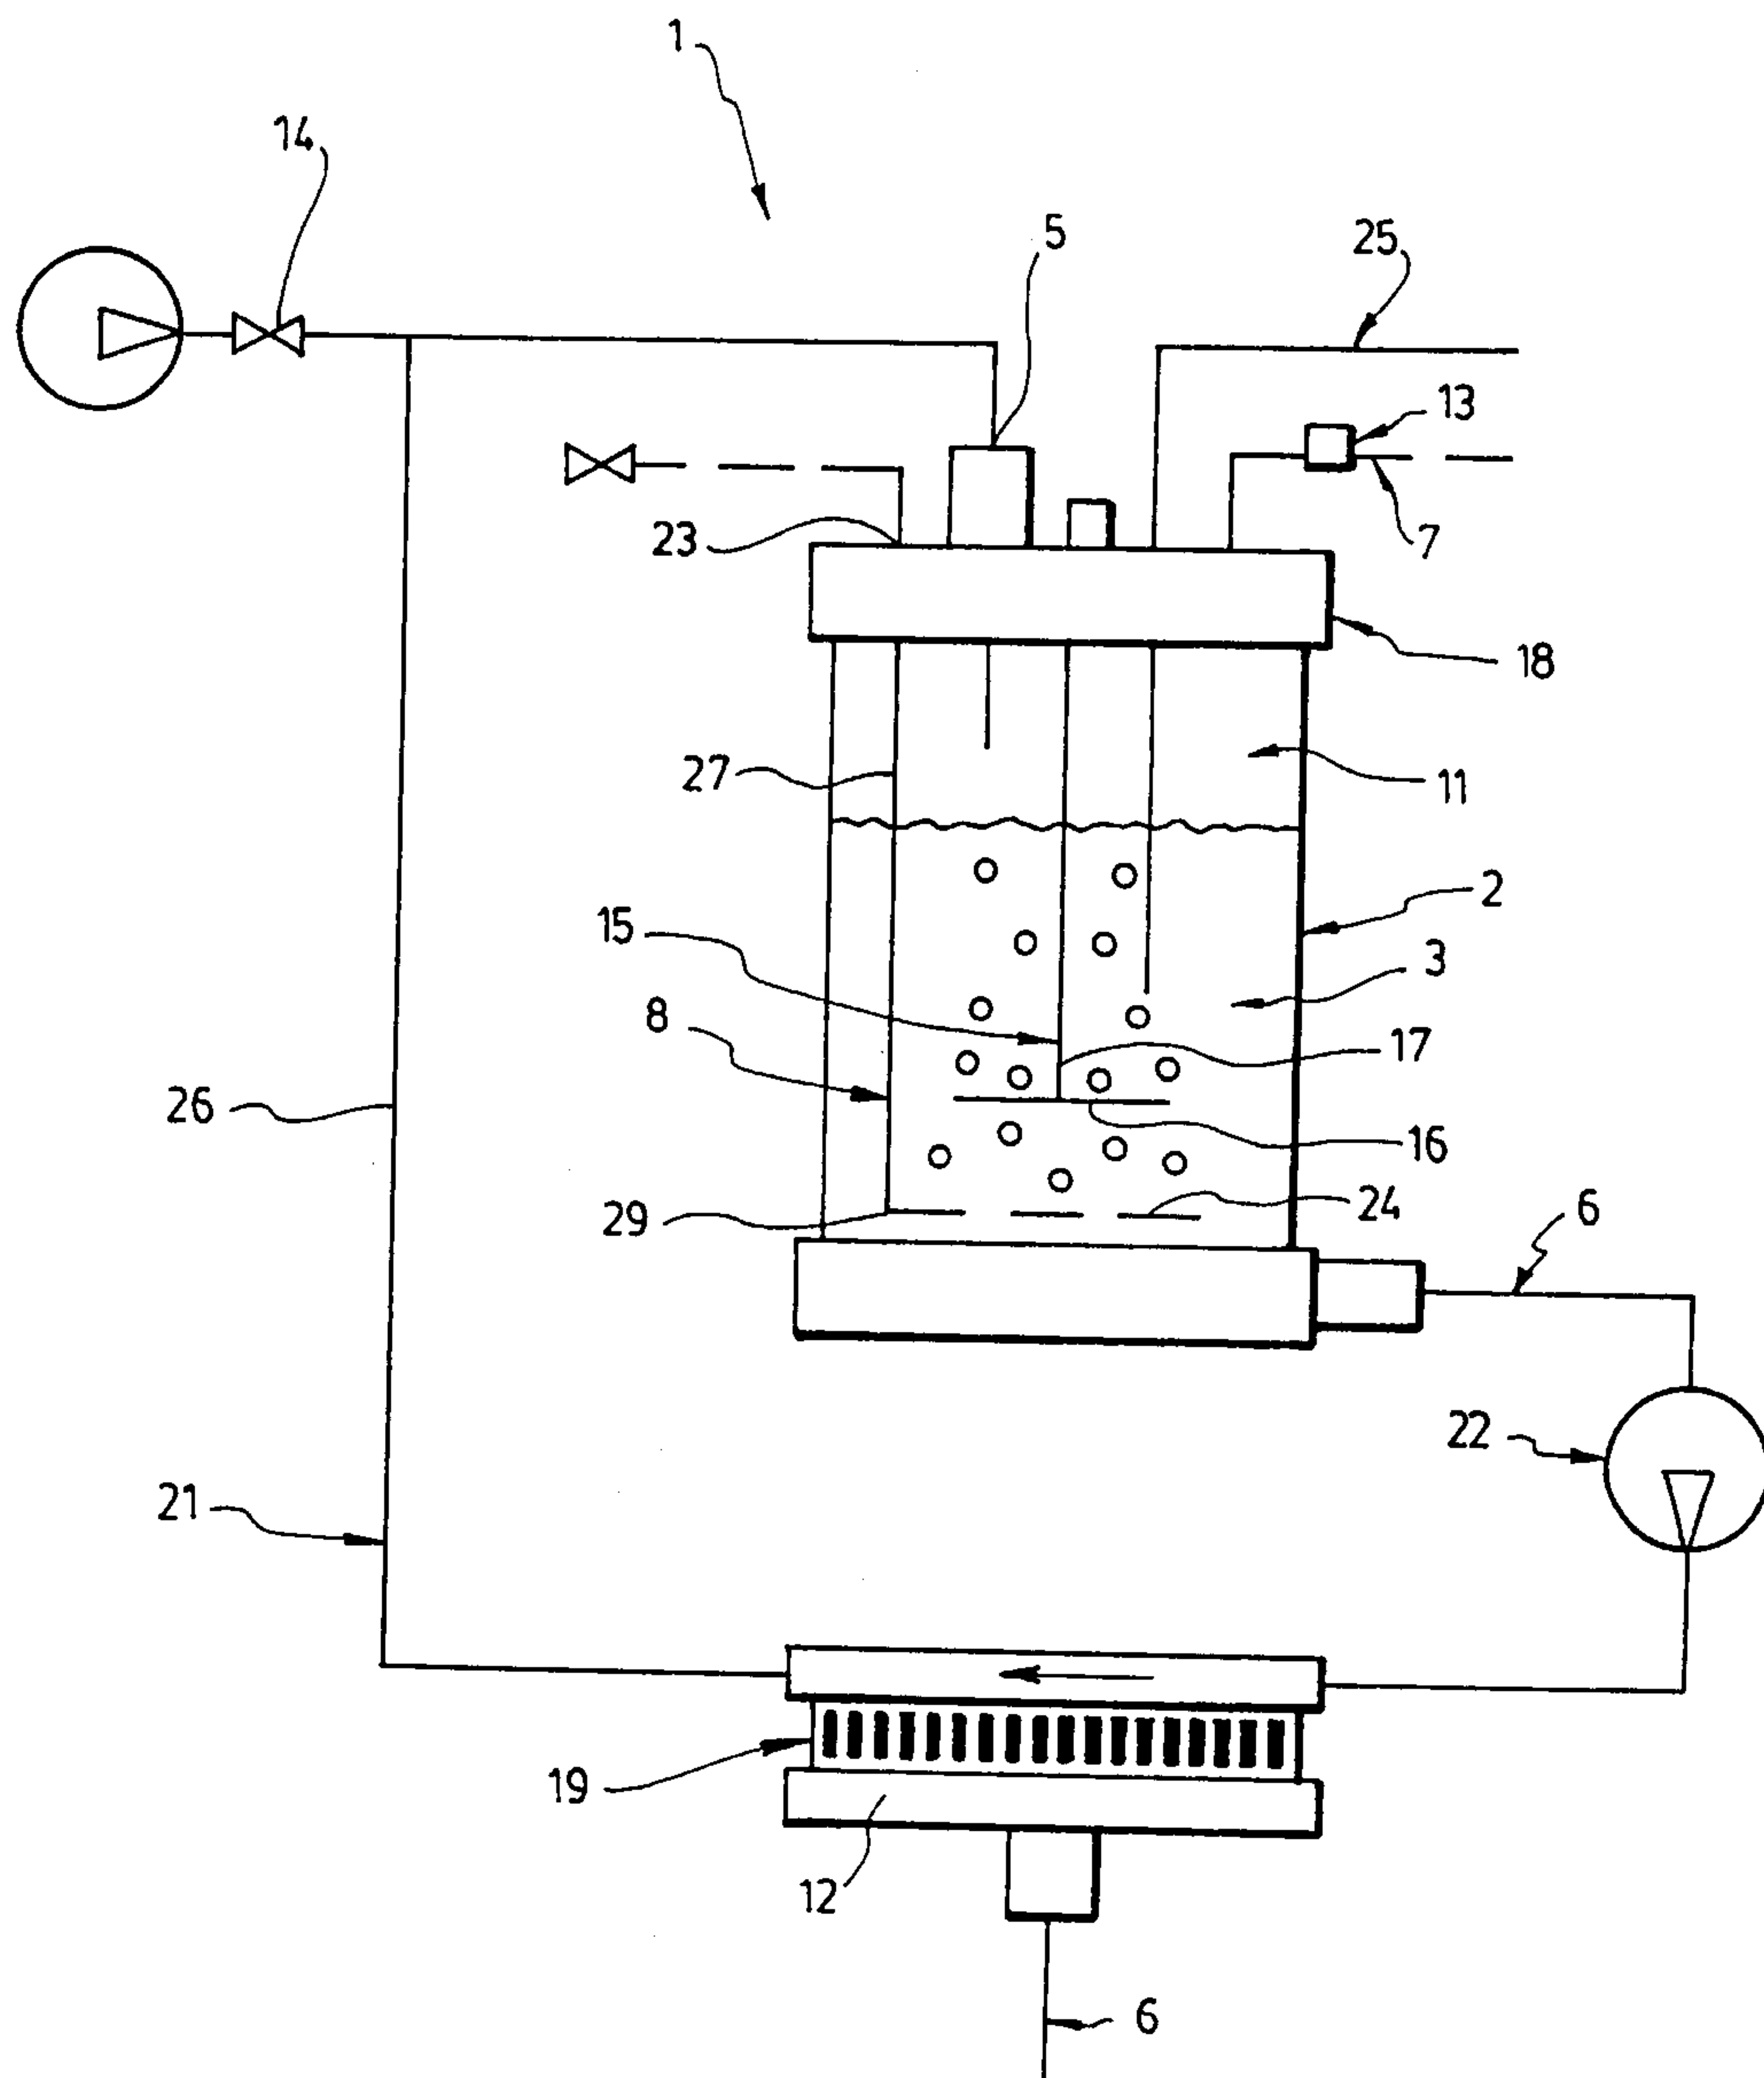
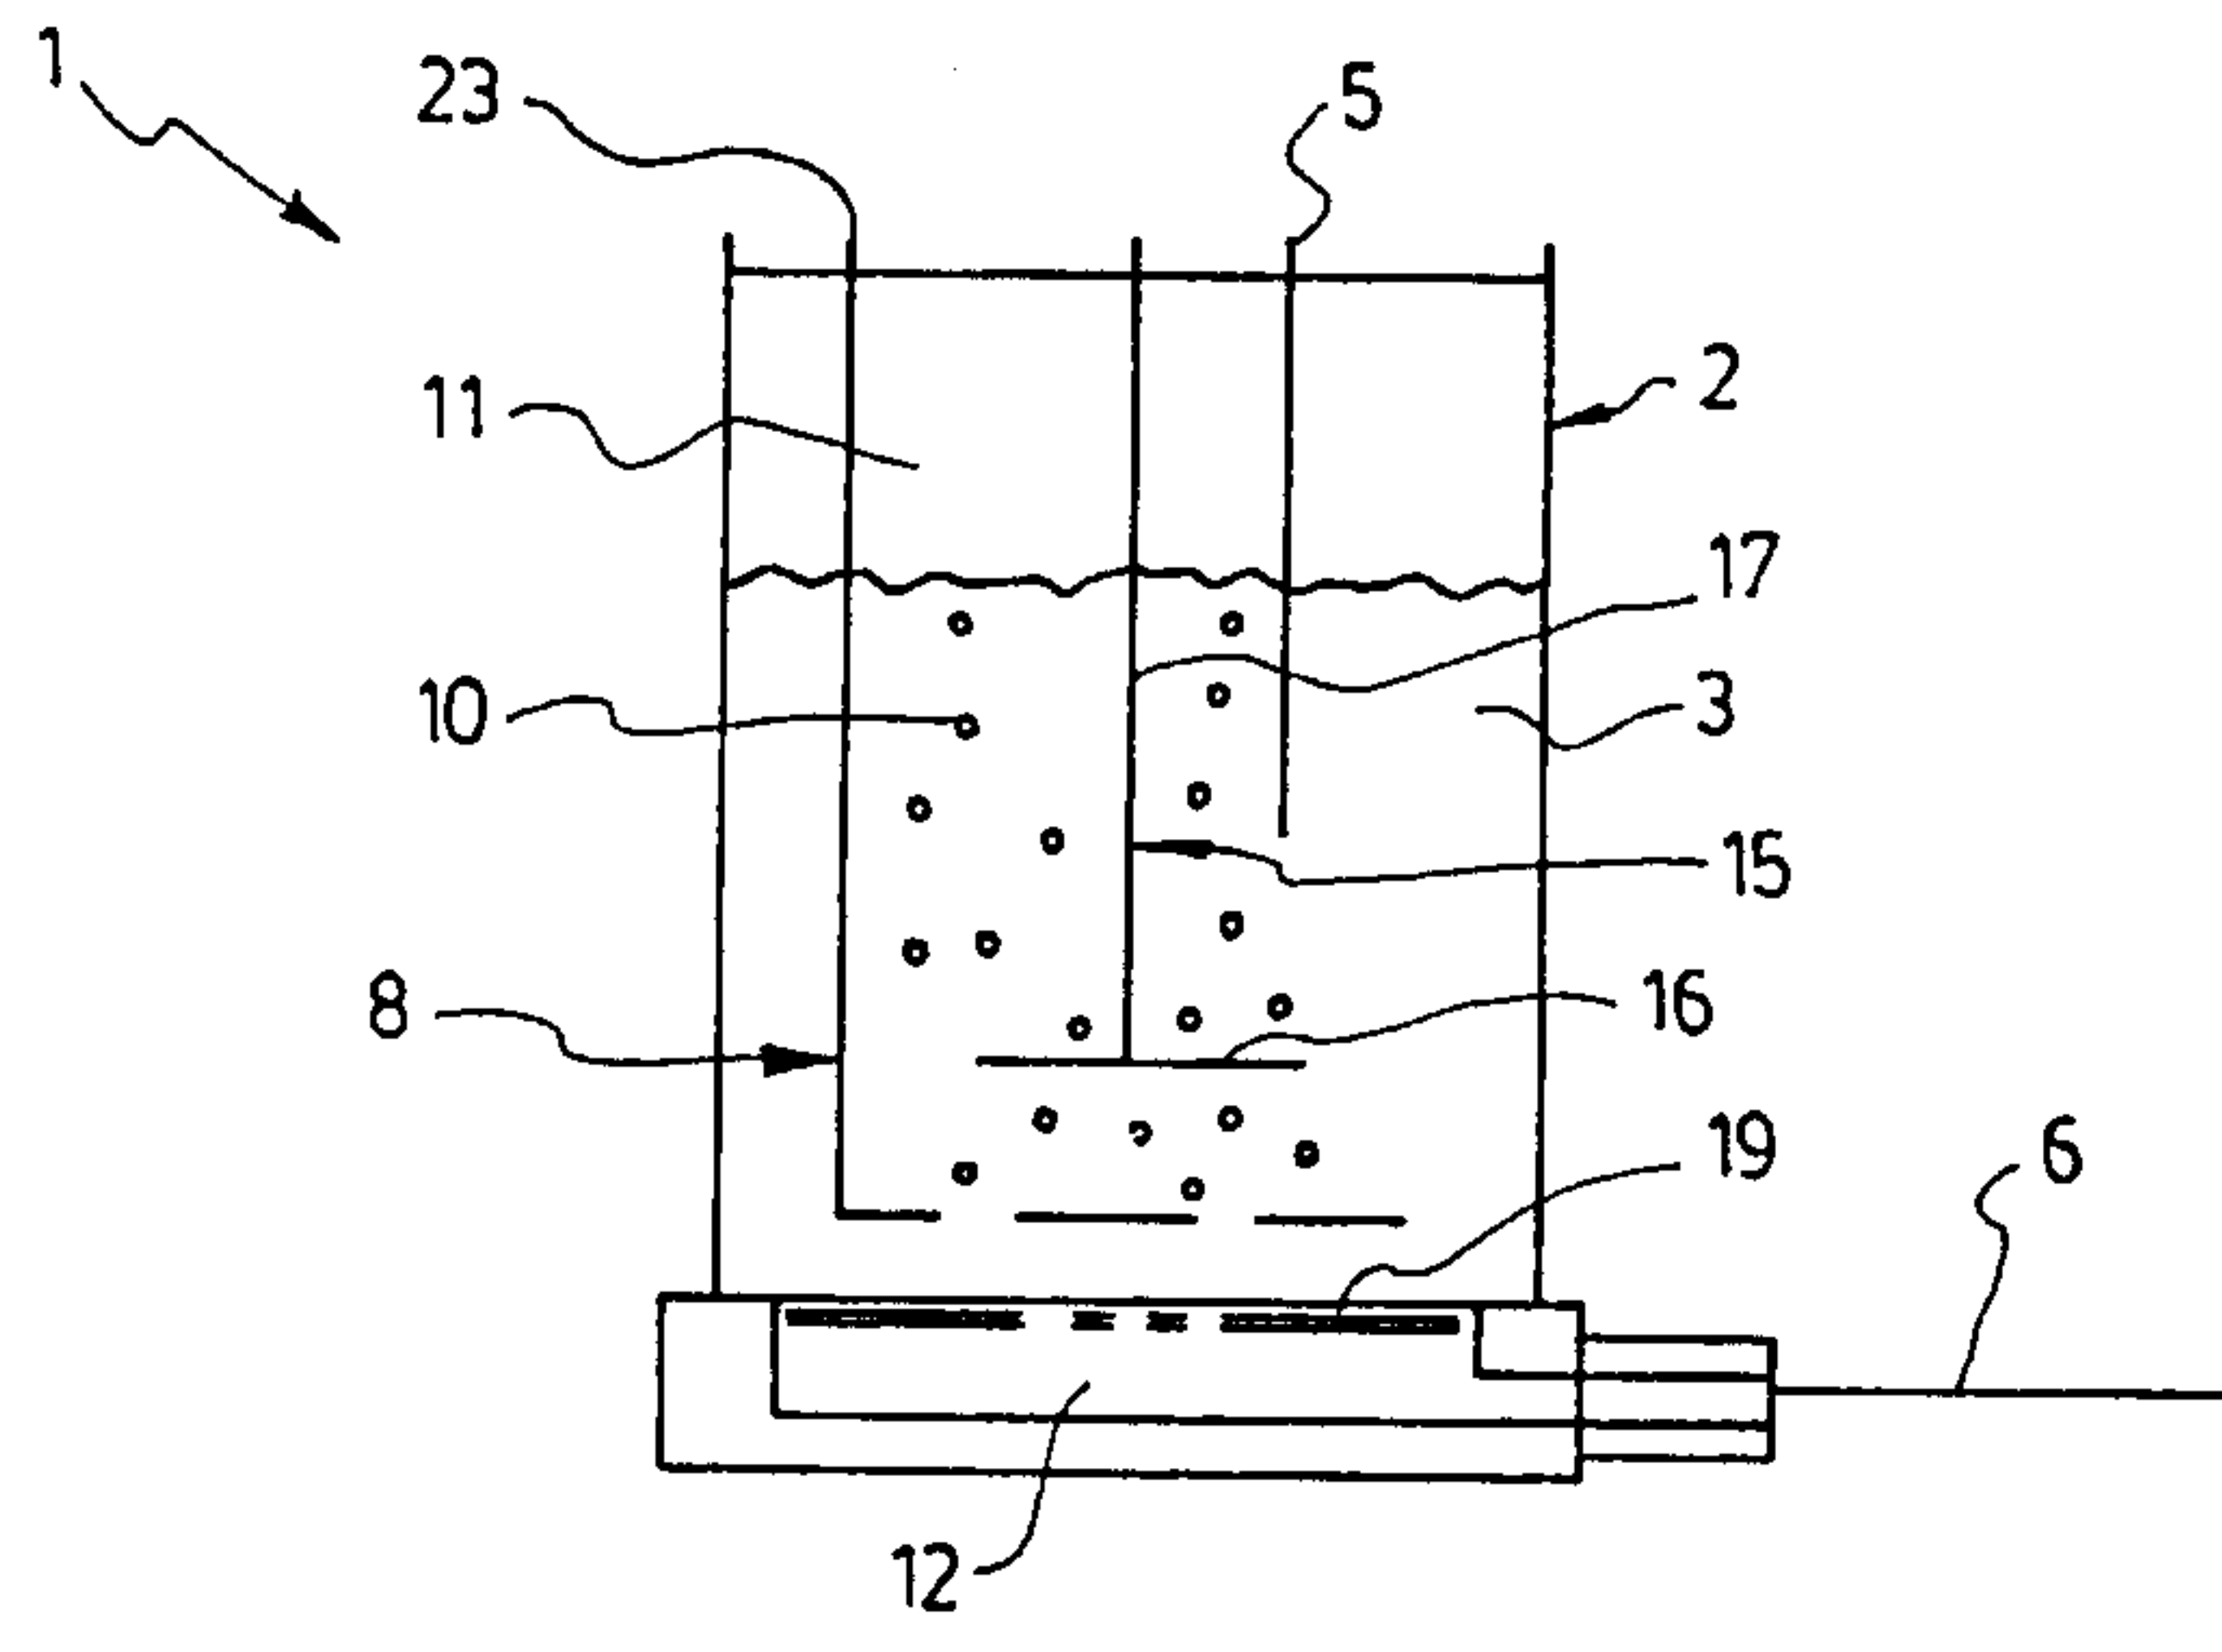
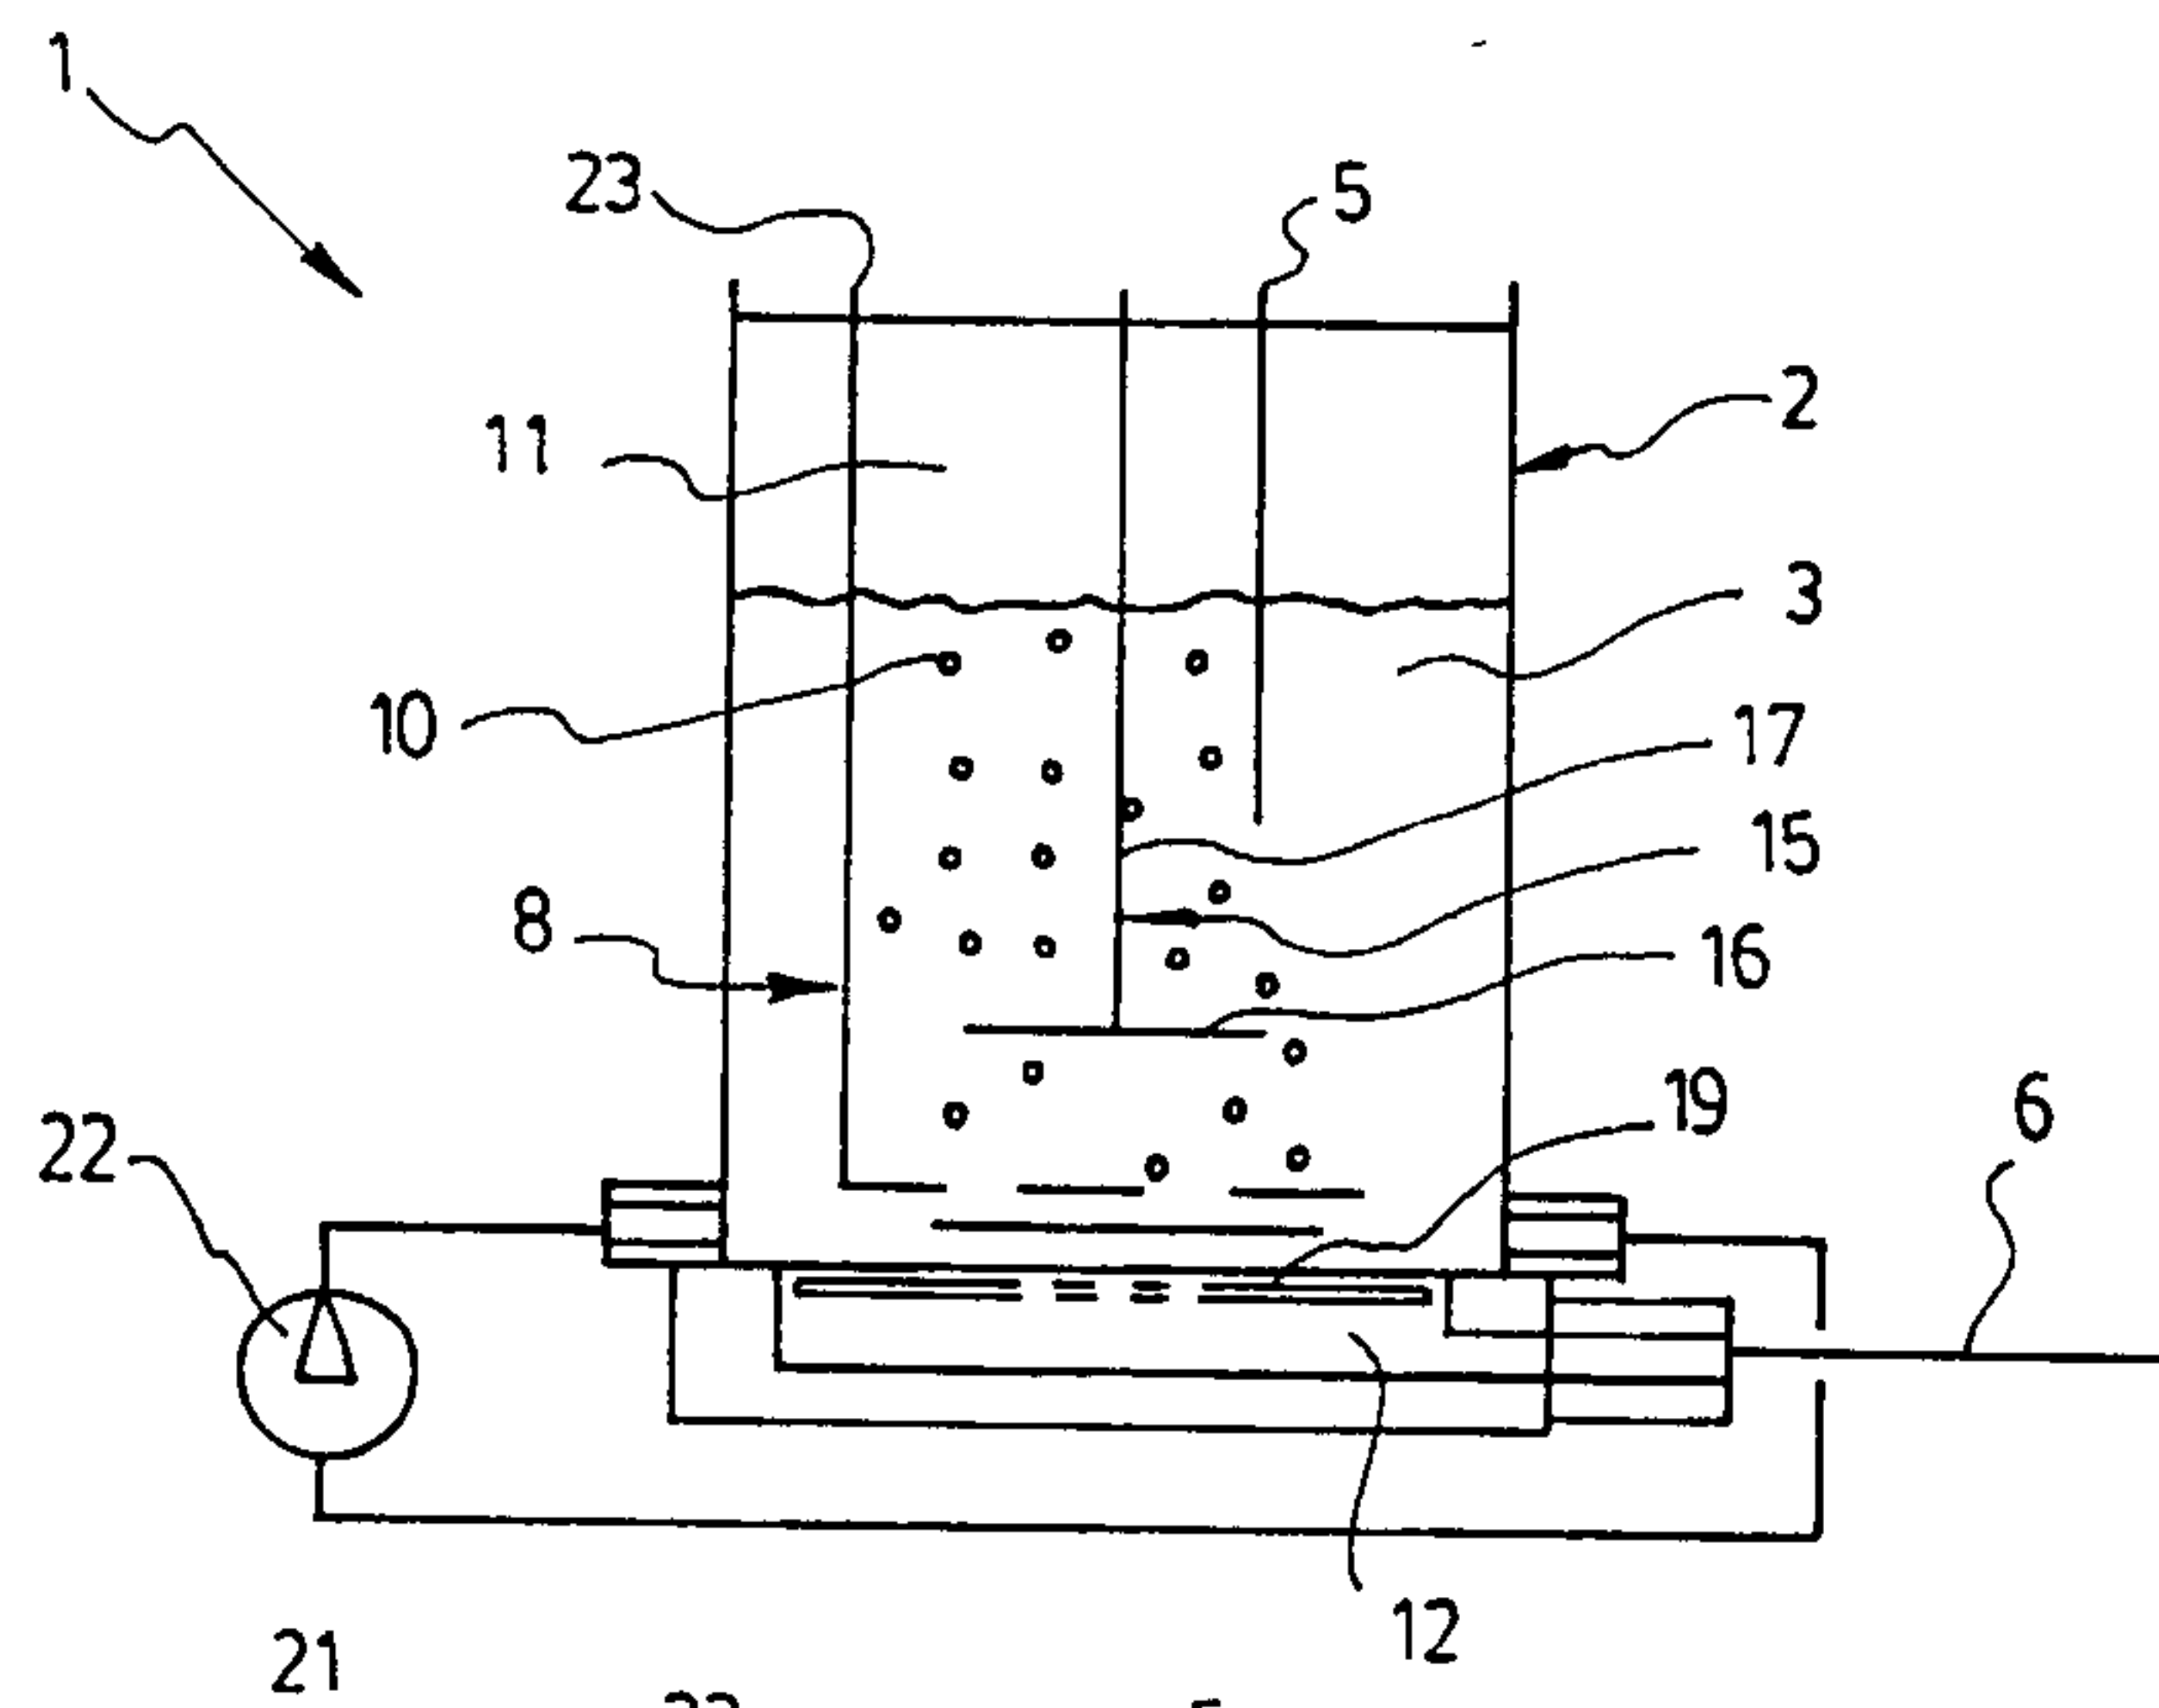
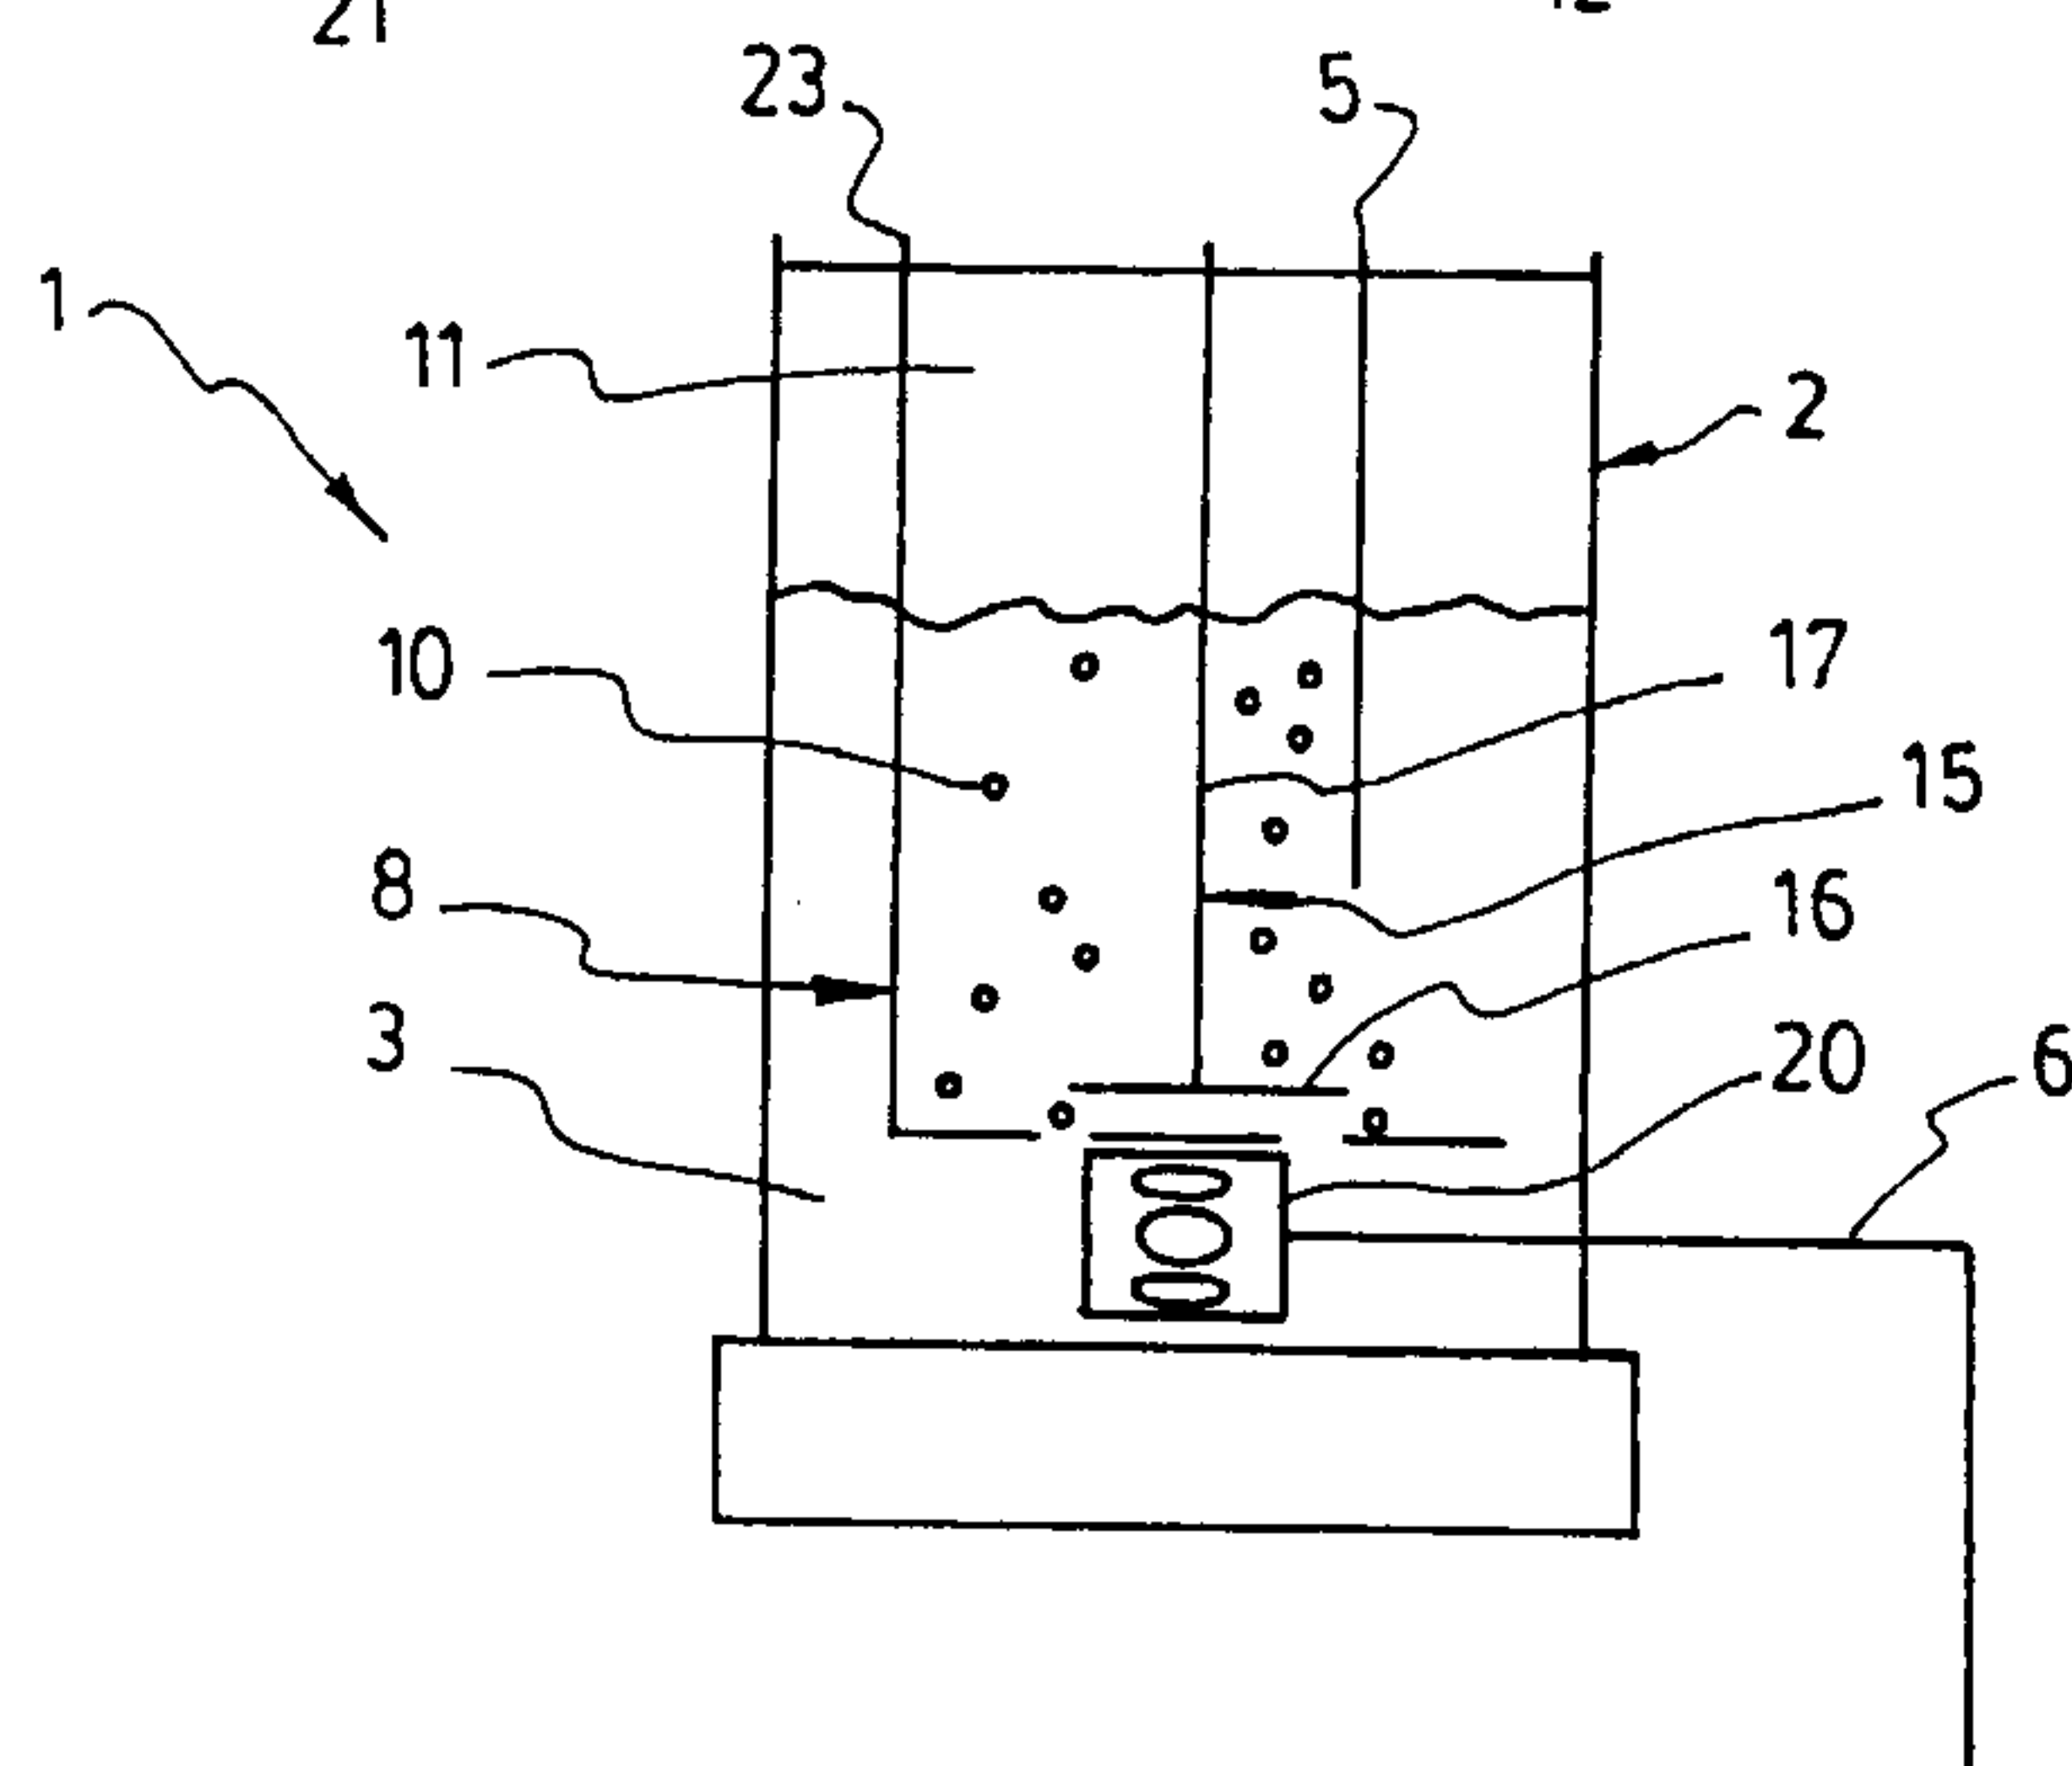
FIG. 2

FIG. 3FIG. 4FIG. 5

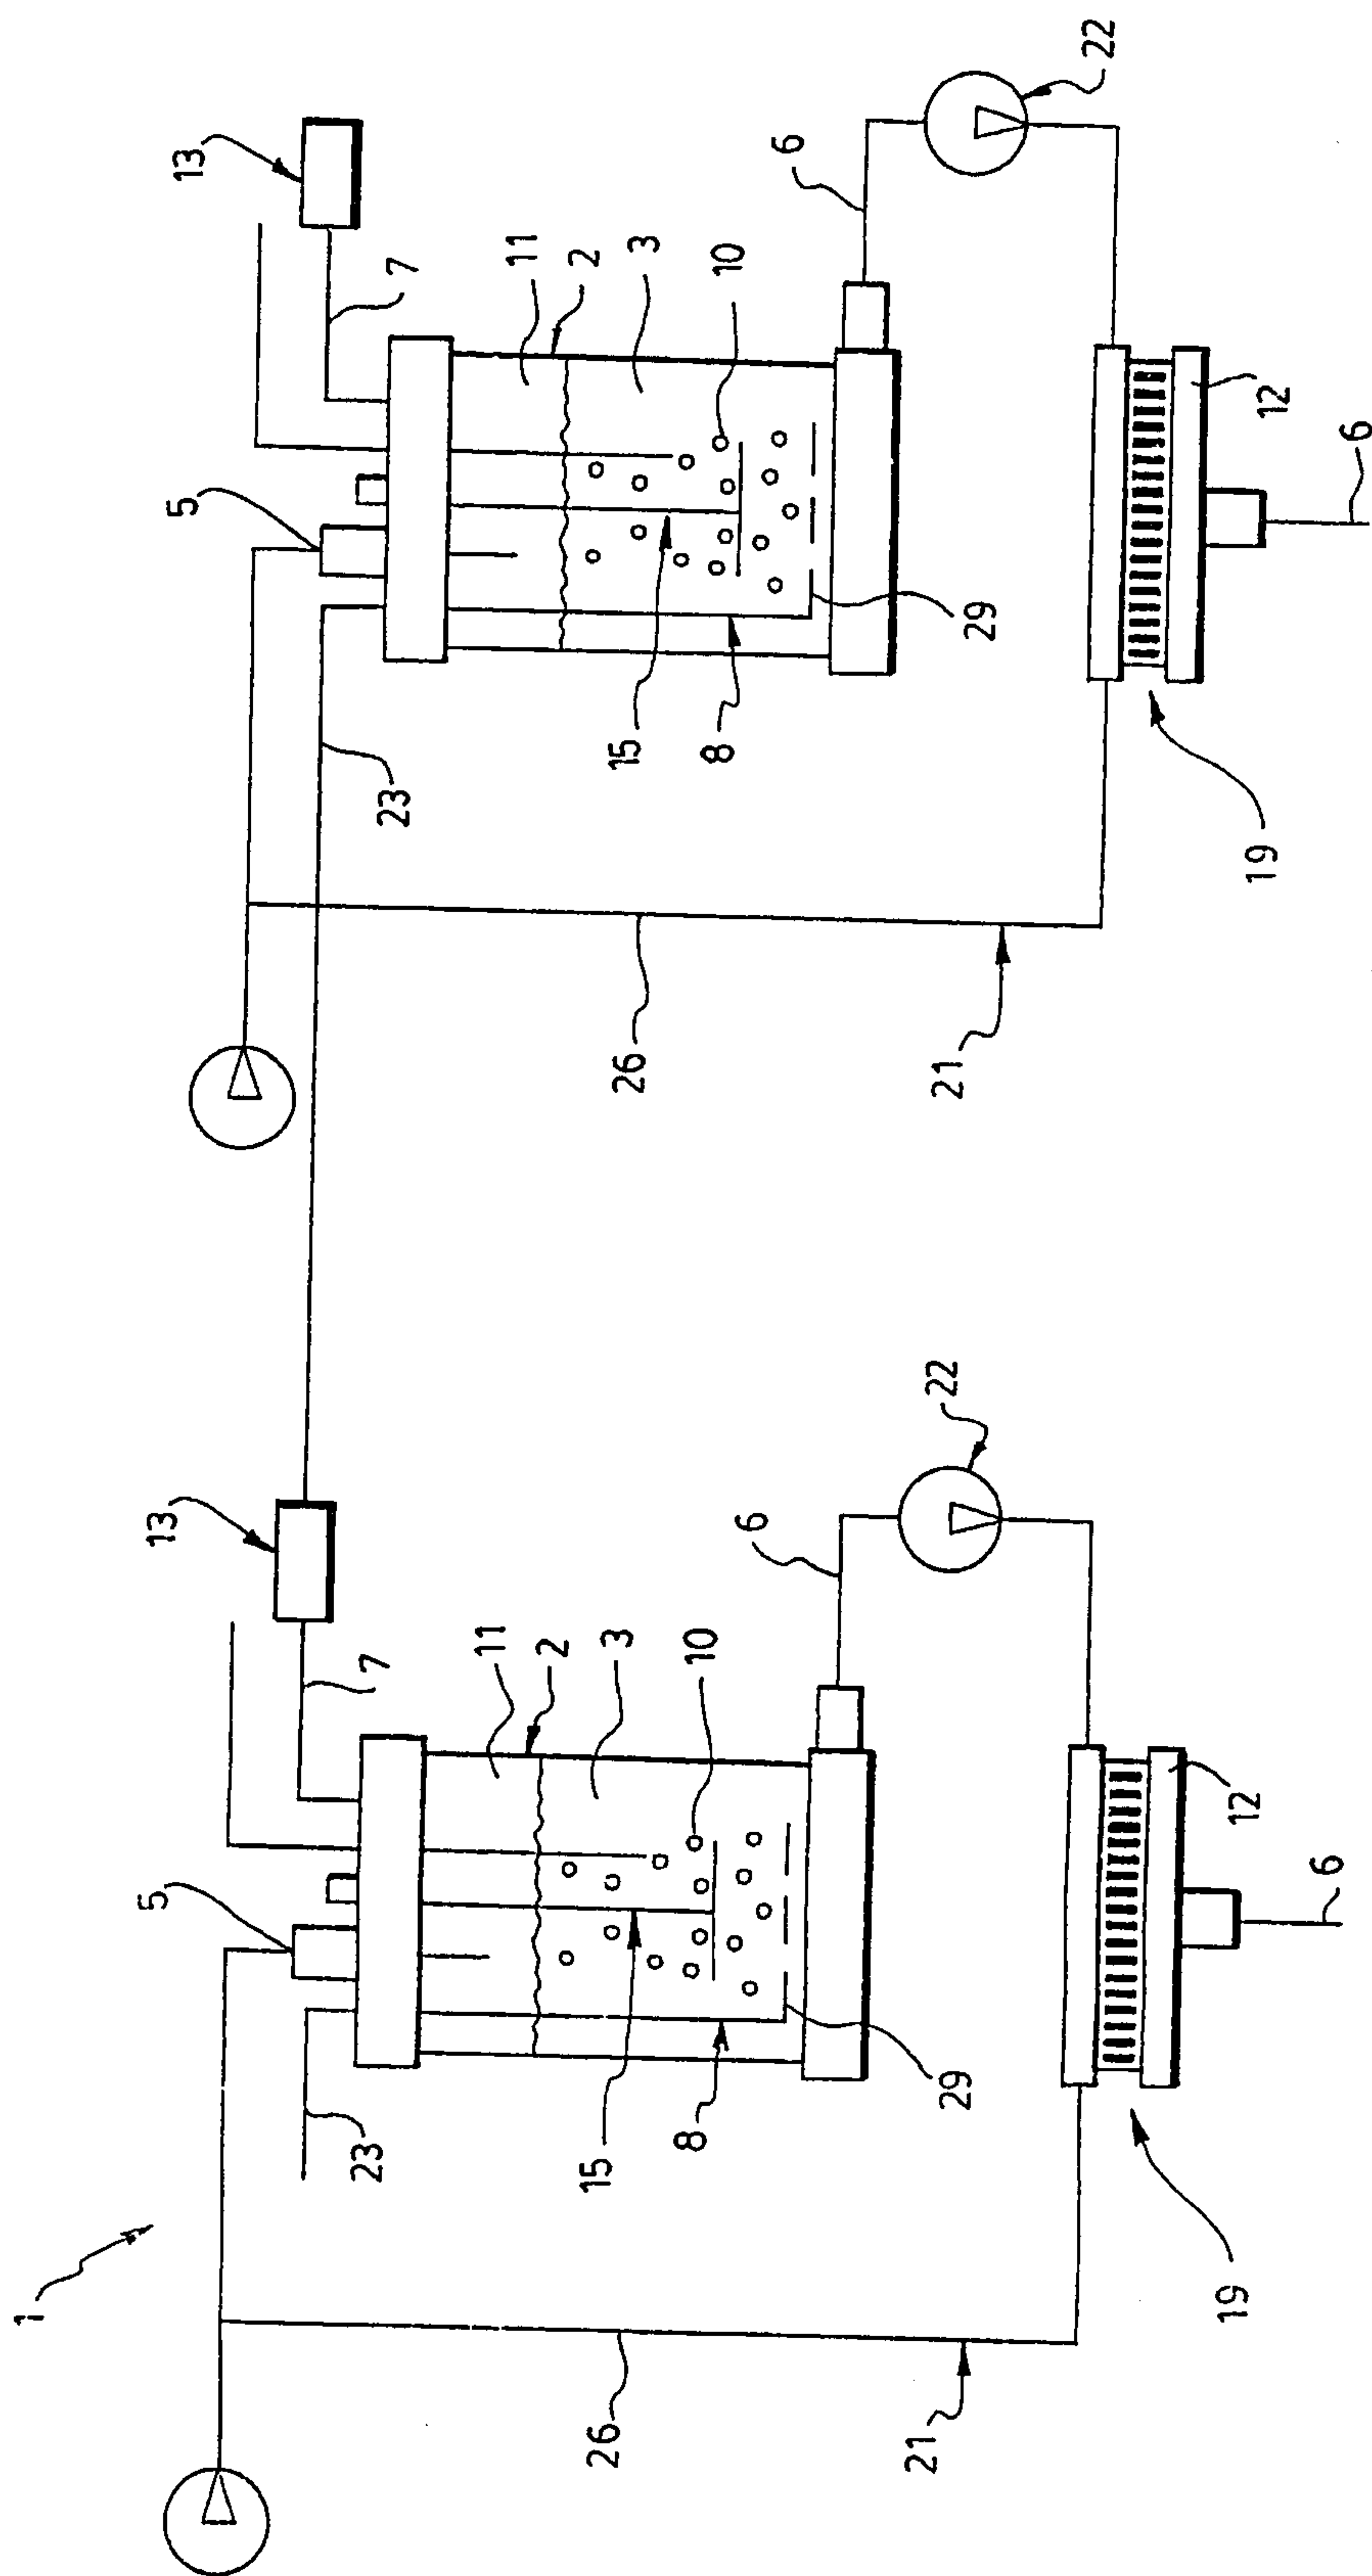


FIG. 6

