



- (51) International Patent Classification:
H02J 7/02 (2006.01)
- (21) International Application Number:
PCT/EP2016/060986
- (22) International Filing Date:
17 May 2016 (17.05.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
15305767.4 21 May 2015 (21.05.2015) EP
- (71) Applicant: **ESSILOR INTERNATIONAL (COMPAGNIE GÉNÉRALE D'OPTIQUE)** [FR/FR]; 147 rue de Paris, 94220 Charenton-le-Pont (FR).
- (72) Inventor: **ROUSSEAU, Denis**; c/o Essilor International (Compagnie Générale d'Optique), 147 rue de Paris, 94227 Charenton-le-Pont Cedex (FR).
- (74) Agents: **CABINET NOVITECH et al.**; 188 Grande Rue Charles de Gaulle, 94130 Nogent-sur-Marne (FR).

- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A HEAD MOUNTED DEVICE INTENDED TO BE WORN BY A WEARER

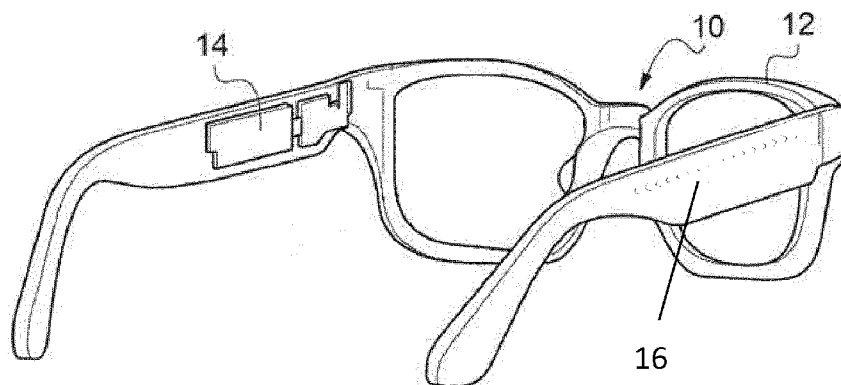


Fig. 1

(57) Abstract: A head mounted device intended to be worn by a wearer comprising: - a battery, and - a flexible wireless power system receiver connected to the battery through at least one electrical connection mean, the flexible wireless power system receiver being arranged to receive an electromagnetic field so as to allow charging of the battery through the electrical connection means.

A head mounted device intended to be worn by a wearer

FIELD OF THE INVENTION

5 The invention relates to a head mounted device intended to be worn by a wearer and to a maintaining device for maintaining such head mounted device. The invention further relates to an optical lens member and to a method for charging the battery of a head mounted device.

10 BACKGROUND OF THE INVENTION

 More and more head mounted devices comprise electronic devices requiring to be powered by a battery.

 Such battery requires being charged periodically. Since the weight is an issue
15 for head mounted devices the batteries comprised in such devices cannot be too heavy, thus limiting the capacity of such batteries.

 The existing head mounted devices comprise a connector device allowing the user to charge the battery of the head mounted device by connecting the device to a power source.

20 Wireless charging system exists for smart phones. Such wireless charging system comprises a transmitter connected to a power source that transmits the power to a receiver via an electromagnetic field. For the receiver to efficiently receive the electromagnetic field and convert such electromagnetic field into electrical power it is required that the diameter of the receiver be of at least 30 mm.

25 Although, such dimension requirement is general acceptable for a smart phone or a connected watch, head mounted device usually do not comprise a 30 mm diameter surface for receiving such wireless power system receiver.

 Reducing the dimensions of the wireless power system receiver reduces dramatically the performance of the power system.

30 Thus there is a need for a head mounted device whose battery can be charged via a wireless power system receiver.

 One object of the present invention is to provide such a head mounted device.

SUMMARY OF THE INVENTION

To this end, the invention proposes a head mounted device intended to be worn by a wearer comprising:

- 5 - a battery, and
 - a flexible wireless power system receiver connected to the battery through at least one electrical connection mean, the flexible wireless power system receiver being arranged to receive an electromagnetic field so as to allow charging of the battery through the electrical connection means.

10 Advantageously, having a wireless power system receiver that is flexible allows reducing the overall size of the wireless power system receiver. Indeed, the wireless power system receiver can be arranged between a deployed position in which the receiver can effectively receive an electromagnetic field so as to allow charging of the battery and a stored position in which the wireless power system
15 receiver has a reduced overall size so as to reduce the dimension of the head mounted device.

More particularly, the invention proposes a head mounted device intended to be worn by a wearer comprising:

- a battery, and
20 - a wireless power system receiver connected to the battery through at least one electrical connection mean, the wireless power system receiver being arranged to receive an electromagnetic field so as to allow charging of the battery through the electrical connection means,

 wherein the wireless power system receiver is flexible and can be arranged
25 between

- a deployed position in which the receiver can effectively receive an electromagnetic field so as to allow charging of the battery, and
 - a stored position in which the wireless power system receiver has a reduced overall size so as to reduce the dimension of the head mounted device.

30 In particular, the receiver is sufficiently flexible to move from the deployed position to the stored position.

More particularly, the receiver is moved from the deployed position to the stored position by pressing a resilient receiver, folding the receiver and/or rolling the receiver.

5 According to further embodiments which can be considered alone or in combination:

- the flexible wireless power system receiver comprises an electrical circuit printed on a flexible support; and/or
- the wireless power system receiver is configured for inductive coupling; and/or
- 10 - the wireless power system receiver comprises at least an inductive coil; and/or
- the wireless power system receiver comprises at least a spring inductive coil and/or a rollable inductive coil and/or a foldable inductive coil; and/or
- 15 - the head mounted device comprise at least an optical lens mounted and the wireless power system receiver is arranged in the optical lens.

The invention also related to an optical lens member comprising a wireless power system receiver arranged to be electrically connected to a charge.

20 Advantageously, the optical lens member according to the invention may be mounted to a head mounted device and electrically connected to a battery charging circuit so as to provide a wireless power system receiver.

25 More particularly, the invention also relates to an optical lens member comprising a wireless power system receiver arranged to be electrically connected to a battery charging device, wherein the optical lens member is an optical lens blank, a semi-finished optical lens, a finished optical lens with or without coating or an edged optical lens.

According to further embodiments which can be considered alone or in combination:

- 30
- the wireless power system receiver comprises a conductor arranged at least in one of the following ways:
 - o on the front surface of the optical lens member,

- on the rear surface of the optical lens member,
 - on a surface of the optical lens member comprised between the front and rear surfaces,
 - around the edge of the optical lens member; and/or
- 5 - the wireless power system receiver is configured for inductive coupling; and/or
- the wireless power system receiver comprises at least an inductive coil; and/or
- the wireless power system receiver is made of a transparent conductive, for example indium tin oxyde and/or graphene and/or silver nanowires ; and/or
- 10 - the optical lens member is a finished optical lens and the wireless power system receiver is positioned so that when the finished optical lens is edged to be mounted in a spectacle frame, the wireless power system receiver remains on the edged optical lens without causing any
- 15 discomfort to the wearer of the optical lens ; and/or
- the optical lens member is a semi-finished optical lens or a lens blank and the wireless power system receiver is positioned so that when an optical lens is manufactured from the optical lens member, the wireless
- 20 power system receiver remains on the optical lens without causing any discomfort to the wearer of the optical lens ; and/or
- the optical lens member is an edged optical lens edged so to be mounted in a spectacle frame and the wireless power system receiver is positioned around the edge of the edged optical lens.

25

The invention further relates to maintaining device arranged to maintain a head mounted device according to the invention in a position allowing the flexible wireless power system receiver to receive an electromagnetic field so as to charge the battery of the head mounted device.

30

The invention also relates to a method for charging the battery of a head mounted device according to the invention, comprising:

- a positioning step, during which the head mounted device is positioned at a charging distance from a wireless power system transmitter device comprising a power source and a transmitter configured to convert the power provided by the power source to a time-varying electromagnetic field,
- 5 - a receiving configuration step, during which the flexible wireless power system receiver of the head mounted device is configured so as to receive an electromagnetic field from a wireless power system transmitter.

The charging distance may be smaller than or equal to the larger diameter of the flexible wireless power system receiver.

10 The invention further relates to an optical equipment comprising at least:

- a spectacle frame,
- a battery, and
- an optical lens member according to the invention,

wherein the optical lens member is mounted in the spectacle frame and the wireless
15 power system receiver is electrically connected to the battery.

The invention also relates to a method for manufacturing an optical lens member according to the invention, comprising:

- an edged optical lens providing step during which a edged optical lens is provided,
- a wireless power system receiver providing step during which an inductive coil is
20 arranged around the edge of the edged optical lens.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Embodiments of the invention will now be described, by way of example only, and with reference to the following drawings in which:

- Figure 1 is a schematic representation of head mounted device according to the invention,
- Figures 2a and 2b are schematic representation of a flexible wireless power
30 system receiver according to an embodiment of the invention,
- Figures 3a and 3b are schematic representation of a flexible wireless power system receiver according to an embodiment of the invention,

- Figure 4 illustrates an optical lens according to an embodiment of the invention,
- Figure 5 is a flow chart representing a method according to the invention, and
- 5 - Figure 6 is a schematic representation of a wireless power system.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Elements in the figures are illustrated for simplicity and clarity and have
10 not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figure may be exaggerated relative to other elements to help improve the understanding of the embodiments of the present invention.

Figure 1 represents an example of head-mounted device 10 comprising a spectacle frame 12, a battery 14 and a flexible wireless power system receiver 16
15 connected to the battery 14 through at least one electrical connection mean not represented on figure 1.

The flexible wireless power system receiver 16 may be connected to the battery via an electronic circuit managing the battery charge.

The battery may be a Lithium Ion type battery or any other technology
20 like super-capacitor or similar technology allowing storing electrical energy.

Although not represented the head mounted device 10 may further comprises a processing unit and/or other electronics arranged for example to receive and process data collected by the sensors mounted on the spectacle frame. The processing unit and/or other electronics may be arranged in one of the sides of the
25 spectacle frame.

Advantageously, such head mounted device being included in a spectacle frame the wearer may use the device over long periods without being hindered.

Although, in figure 1 the wireless power system receiver 16 is represented on the opposite side from the battery 14, the battery 14 and the wireless power
30 system receiver 16 may be on the same side so as to facilitate the electrical connection between them.

The flexible wireless power receiver 16, may be arranged between a deployed position and a stored position.

In the deployed position the wireless power receiver can effectively receive an electromagnetic field so as to allow charging of the battery and in the
5 stored position the wireless power system receiver has a reduced overall size so as to reduce the dimension of the head mounted device.

According to an embodiment of the invention, the flexible wireless power system receiver comprises an electrical circuit printed on a flexible support.

The flexible wireless power system receiver is preferably configured for
10 inductive coupling, for example the flexible wireless power system receiver comprises an inductive coil.

Typically, in inductive coupling power is transferred between inductive coils via a magnetic field. The transmitter and receiver coils form together a transformer. An alternating current is generated through the transmitter coil and
15 creates a magnetic field. The magnetic field passes through the receiving coil, where it creates a current in the receiver. The induced current may be used to charge a battery.

As illustrated on figure 2a and 2b, the wireless power system receiver may comprise at least a spring conductive coil arranged between a relaxed position
20 illustrated in figure 2a and a compressed position illustrated in figure 2b.

The wireless power system receiver comprises two contact points 20, 22 electrically connected to the charging circuits of the battery of the head mounted device.

As illustrated in figure 2a, in the relaxed position, the wireless power
25 system receiver has a shape allowing the wireless power system receiver to receive an electromagnetic field.

In the compressed position illustrated in figure 2b, the wireless power system receiver is compressed so as to reduce the size of the wireless power system receiver and receive an electromagnetic field in a non-efficient way.

30 As illustrated on figure 3a and 3b, the wireless power system receiver may comprise at least a foldable conductive coil arranged between an unwrapped position illustrated in figure 3a and a wrapped position illustrated in figure 3b.

The wireless power system receiver comprises two contact points 20, 22 electrically connected to the charging circuit of the battery of the head mounted device.

As illustrated in figure 3a, in the unwrapped position, the wireless power system receiver has a shape allowing the wireless power system receiver to receive an electromagnetic field.

In the wrapped position illustrated in figure 3b, the wireless power system receiver is compressed so as to reduce the size of the wireless power system receiver and receive an electromagnetic field in a non-efficient way.

As illustrated on figure 1, the head mounted device comprises optical lenses mounted.

According to an embodiment of the invention the wireless power system receiver may be arranged in the optical lens.

The invention further relates to an optical lens member comprising a wireless power system receiver arranged to be electrically connected to a charge.

In the sense of the invention, an "optical lens member" may refer to optical lens blank, a semi-finished optical lens, a finished optical lens with or without coating or an edged optical lens.

According to one aspect of the invention, the head mounted device comprises at least an optical lens mounted and the wireless power system receiver is arranged in the optical lens.

Advantageously, such a flexible receiver enables to bend the receiver to cooperate with a curved surface of the optical member.

As illustrated on figure 4, an optical lens member 30 comprises a first optical surface 32, a second optical surface 34 and an external periphery surface 36 connecting the first 32 and second 34 optical surfaces.

While in figure 4, the first optical surface is the front surface of the optical lens and the second optical surface is the back surface, it will be understood, that in alternative embodiments of the invention the first optical surface may be the back surface of the optical lens and the second optical surface may be the front surface.

Furthermore, although the first optical surface 32 is represented in figure 4 as convex and the second optical surface 34 as concave, it will be appreciated that the first optical surface 32 could equally well be concave or any other curved surface and that the second optical surface 34 could equally well be convex or any other curved surface.

So as to get the best out of the surface of the optical lens, the wireless power system receiver may comprises a conductor arranged at least in one of the following ways:

- on the front surface of the optical lens member,
- 10 - on the rear surface of the optical lens member,
- on a surface of the optical lens member comprised between the front and rear surfaces,
- around the edge of the optical lens member, for example around the external periphery surface.

15 Preferably, the wireless power system receiver is configured for inductive coupling, for example the wireless power system receiver comprises at least an inductive coil.

Typically, the wireless power system receiver is made of a transparent conductive, for example indium tin oxyde and/or grapheme and/or silver nanowires.

20 According to an embodiment of the invention, the optical lens member may be a finished optical lens and the wireless power system receiver is positioned so that when the finished optical lens is edged to be mounted in a spectacle frame, the wireless power system receiver remains on the edged optical lens without causing any discomfort to the wearer of the optical lens.

25 According to a further embodiment of the invention, the optical lens member is a semi-finished optical lens or a lens blank and the wireless power system receiver is positioned so that when an optical lens is manufactured from the optical lens member, the wireless power system receiver remains on the optical lens without causing any discomfort to the wearer of the optical lens.

30 According to a further embodiment of the invention, the optical lens member is an edged optical lens, i.e. edged so to be mounted in a spectacle frame,

and the wireless power system receiver is positioned around the edge of the edged optical lens.

As illustrated on figure 5, the invention further relates to a method for charging the battery of a head mounted device according to the invention. The method comprises:

- a positioning step S1,
- a receiving configuration step S2, and
- a charging step S3.

Figure 6 is a schematic representation of a head mounted device 10 when charging the battery using a wireless power transmitter device 18.

During the positioning step S1, the head mounted device 10 is positioned at a charging distance from a wireless power system transmitter device 18. Typically, the wireless power system transmitter device 18 comprises a power source 40 and a transmitter 42 configured to convert the power provided by the power source to a time-varying electromagnetic field. When the wireless power system receiver is configured for inductive coupling, the transmitter typically comprises an inductive coil.

So as to assure a good efficiency of the charging of the battery, the charging distance may be smaller than or equal to the larger diameter of the flexible wireless power system receiver.

During the positioning step S2, the flexible wireless power system receiver 16 of the head mounted device is configured to as to receive an electromagnetic field from a wireless power system transmitter. Typically, a battery charging protocol management 44 manages the battery charging circuits 46 that connect the wireless power system receiver 16 with the battery 14.

For example the Qi or iQi wireless charging protocol defined by the Wireless Power Consortium can be applied to charge the head mounting device, and standard charging devices used for mobile phones can be used to charge the head mounting device. Other protocol defined by the Alliance for Wireless Power could also be used.

During the charging step S3, the wireless power system receiver receives a time-varying electromagnetic field that generates a current that is received by the battery charging circuits 46 so as to charge the battery 14.

5 The invention also relates to a maintaining device arranged to maintain a head mounted device according to the invention in a position allowing the flexible wireless power system receiver to receive an electromagnetic field so as to charge the battery of the head mounted device.

The invention has been described above with the aid of embodiments without limitation of the general inventive concept; in particular the mounted sensing
10 device is not limited to a head mounted device.

Many further modifications and variations will suggest themselves to those skilled in the art upon making reference to the foregoing illustrative embodiments, which are given by way of example only and which are not intended to limit the scope of the invention, that being determined solely by the appended
15 claims.

In the claims, the word “comprising” does not exclude other elements or steps, and the indefinite article “a” or “an” does not exclude a plurality. The mere fact that different features are recited in mutually different dependent claims does not indicate that a combination of these features cannot be advantageously used. Any
20 reference signs in the claims should not be construed as limiting the scope of the invention.

CLAIMS

1. A head mounted device intended to be worn by a wearer comprising:
 - a battery, and
- 5 - a flexible wireless power system receiver connected to the battery through at least one electrical connection mean, the flexible wireless power system receiver being arranged to receive an electromagnetic field so as to allow charging of the battery through the electrical connection means.
- 10 2. The head mounted device according to claim 1, wherein the wireless power system receiver is configured for inductive coupling.
3. The head mounted device according to the preceding claim, wherein the wireless power system receiver comprises at least a spring inductive coil and/or a rollable
- 15 inductive coil and/or a foldable inductive coil.
4. The head mounted device according to any of the preceding claims, wherein the head mounted device comprise at least an optical lens mounted and the wireless power system receiver is arranged in the optical lens.
- 20 5. An optical lens member comprising a wireless power system receiver arranged to be electrically connected to a battery charging device.
6. The optical lens member according to claim 5, wherein the wireless power system
- 25 receiver comprises a conductor arranged at least in one of the following ways:
 - on the front surface of the optical lens member,
 - on the rear surface of the optical lens member,
 - on a surface of the optical lens member comprised between the front and rear surfaces,
 - 30 - around the edge of the optical lens member.

7. The optical lens member according to claim 5 or 6, wherein the wireless power system receiver is configured for inductive coupling.

5 8. The optical lens member according to any of claims 5 to 7, wherein the optical lens member is a finished optical lens and the wireless power system receiver is positioned so that when the finished optical lens is edged to be mounted in a spectacle frame, the wireless power system receiver remains on the edged optical lens without causing any discomfort to the wearer of the optical lens.

10 9. The optical lens member according to any of claims 5 to 7, wherein the optical lens member is a semi-finished optical lens or a lens blank and the wireless power system receiver is positioned so that when an optical lens is manufactured from the optical lens member, the wireless power system receiver remains on the optical lens without causing any discomfort to the wearer of the optical lens.

15

10. The optical lens member according to any of claims 5 to 7, wherein the optical lens member is an edged optical lens edged so to be mounted in a spectacle frame and the wireless power system receiver is positioned around the edge of the edged optical lens.

20

11. Maintaining device arranged to maintain a head mounted device according to any of claims 1 to 4 in a position allowing the flexible wireless power system receiver to receive an electromagnetic field so as to charge the battery of the head mounted device.

25

12. Method for charging the battery of a head mounted device according to any of claims 1 to 4, comprising:

- a positioning step, during which the head mounted device is positioned at a charging distance from a wireless power system transmitter device comprising a power source and a transmitter configured to convert the power provided by the power source to a time-varying electromagnetic field,

30

- a receiving configuration step, during which the flexible wireless power system receiver of the head mounted device is configured to as to receive an electromagnetic field from a wireless power system transmitter.

5 13. The method according to claim 12, wherein the charging distance is smaller than or equal to the larger diameter of the flexible wireless power system receiver.

14. An optical equipment comprising at least:

- a spectacle frame,
- 10 - a battery, and
- an optical lens member according to any of claims 5 to 10,

wherein the optical lens member is mounted in the spectacle frame and the wireless power system receiver is electrically connected to the battery.

15 15. Method for manufacturing an optical lens member according to claim 10, comprising:

- an edged optical lens providing step during which a edged optical lens is provided,
- a wireless power system receiver providing step during which an inductive coil is arranged around the edge of the edged optical lens.

20

1/4

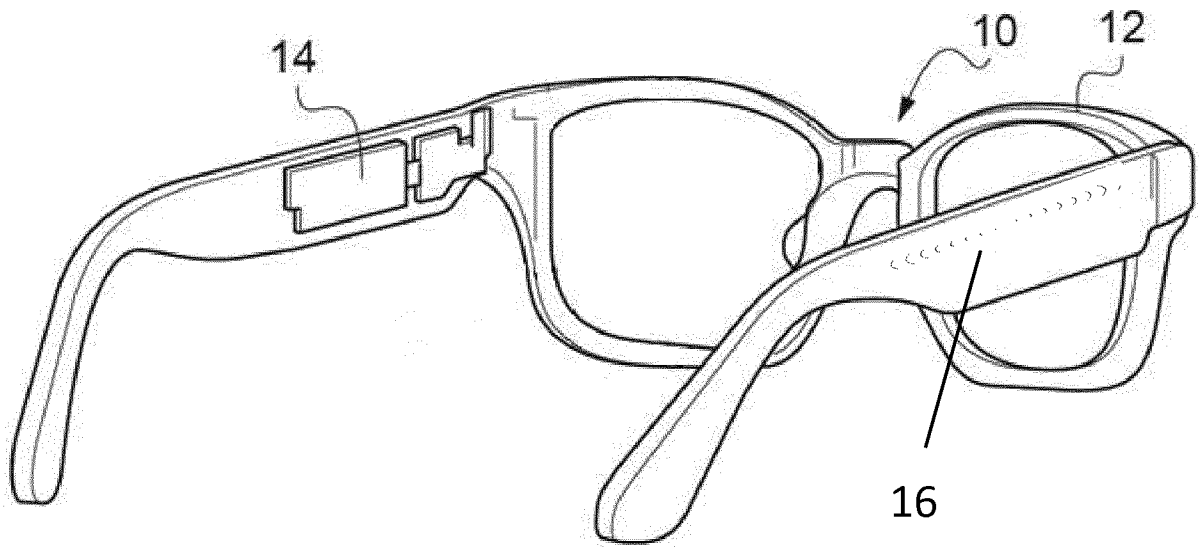


Fig. 1

2/4

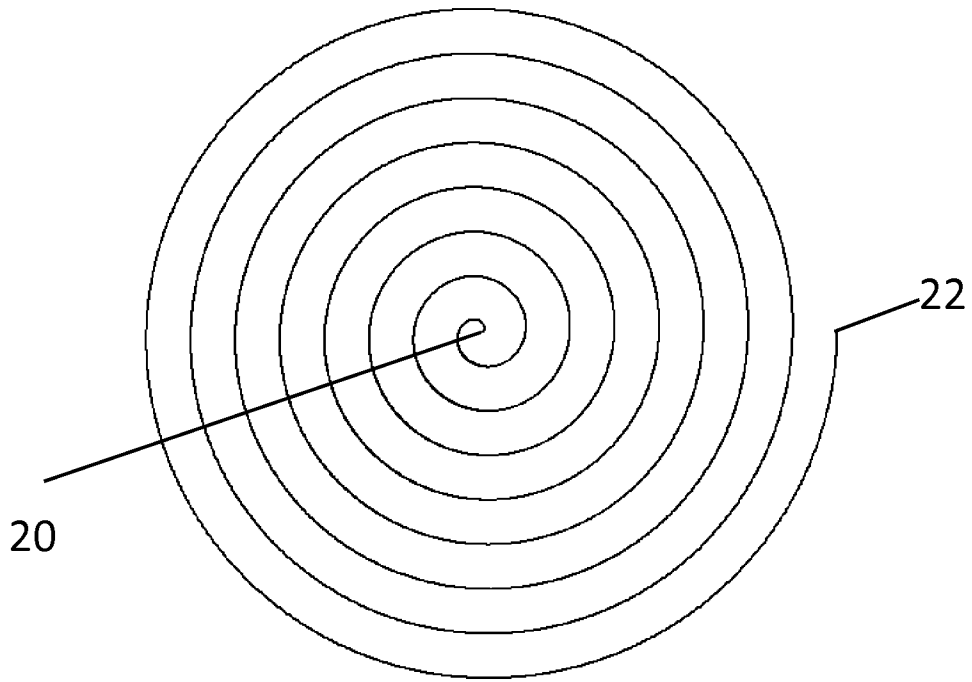


Fig. 2a

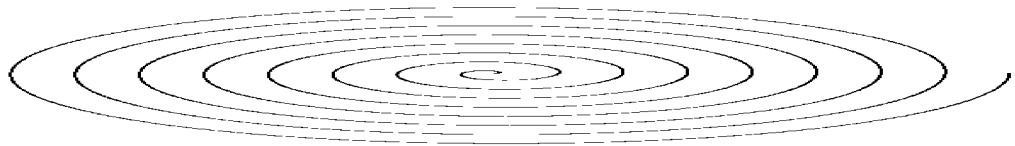


Fig. 2b

3/4

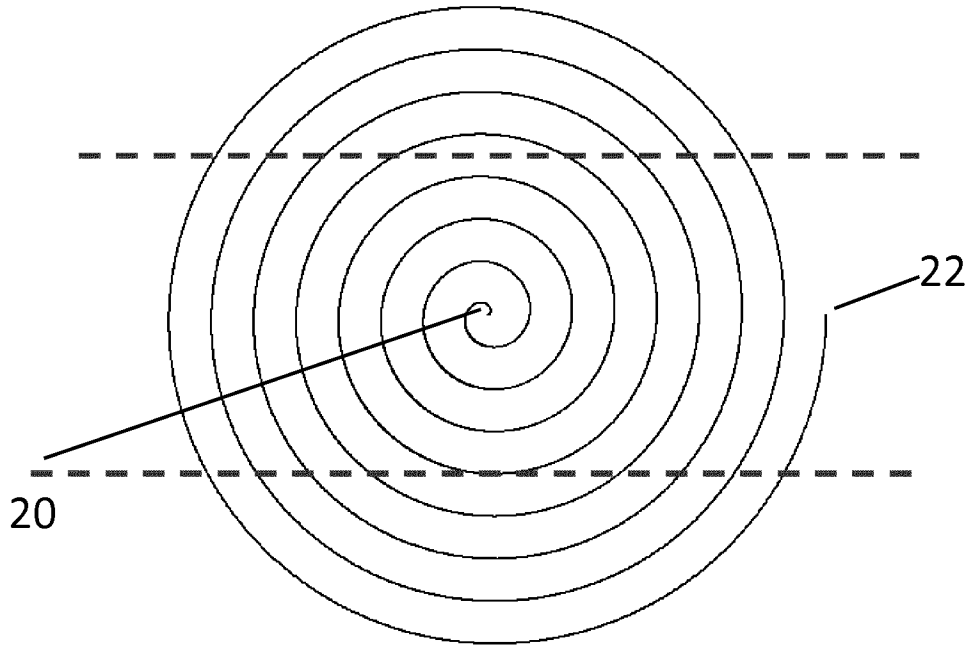


Fig. 3a

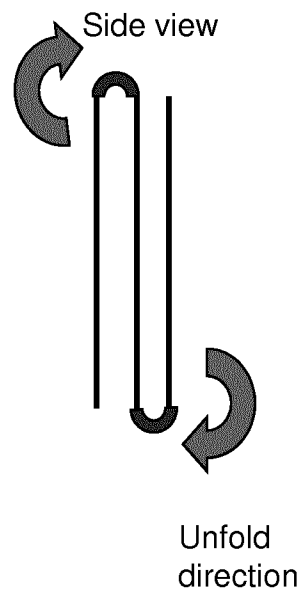


Fig. 3b

4/4

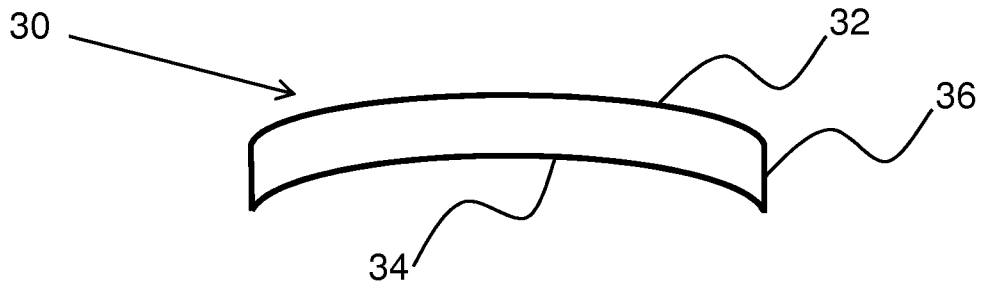


Fig. 4




Fig. 5

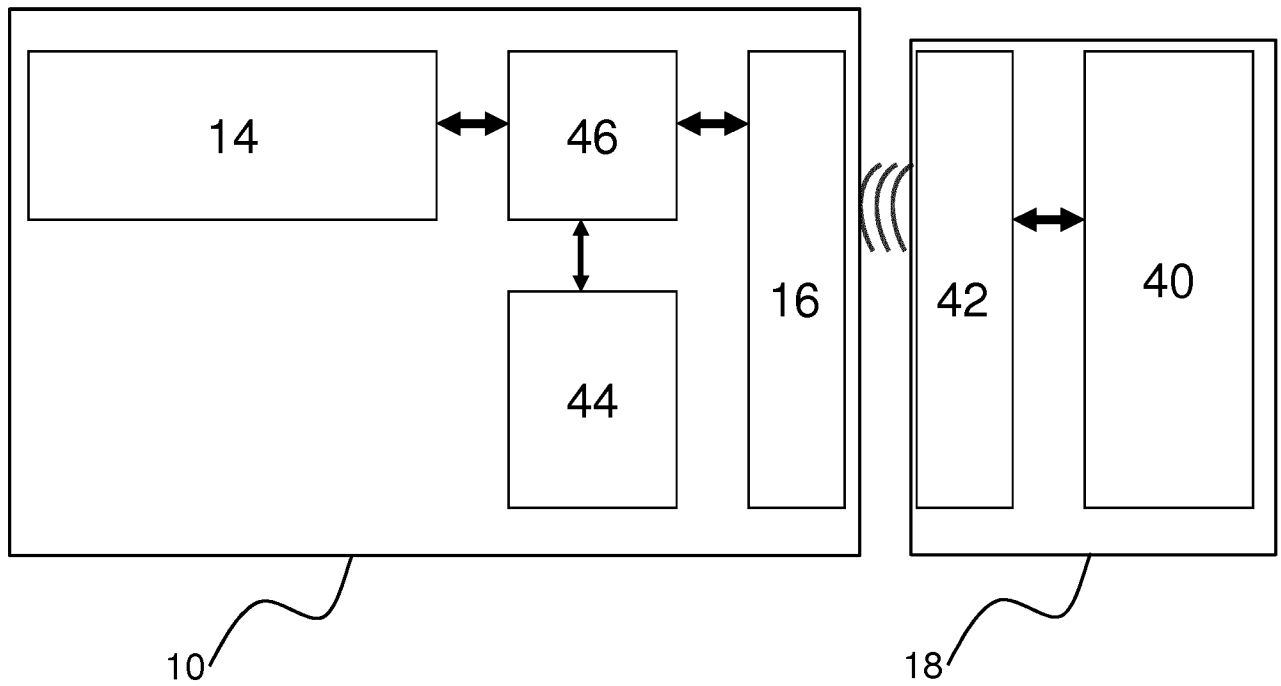


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/060986

A. CLASSIFICATION OF SUBJECT MATTER
INV. H02J7/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
G02B G02C H04N G06F H02J H01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/141037 A1 (JENWATANAVET JATUPUM [US] ET AL) 6 June 2013 (2013-06-06)	1,3, 11-13
Y	abstract paragraphs [0027] - [0029], [0063] figure 7	2,4,7
Y	----- US 2011/141357 A1 (PRICE PAT WILLIAM [US] ET AL) 16 June 2011 (2011-06-16) abstract figure 7 paragraph [0040]	2,4,7
X	----- EP 2 387 129 A2 (SAMSUNG ELECTRONICS CO LTD [KR]) 16 November 2011 (2011-11-16) abstract figure 5	5,6, 8-10,14, 15
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 27 July 2016	Date of mailing of the international search report 01/09/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Lauri, Lauro

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/060986

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011/050164 A1 (PARTOVI AFSHIN [US] ET AL) 3 March 2011 (2011-03-03) abstract paragraph [0100] -----	2
A	EP 2 429 058 A2 (SAMSUNG ELECTRONICS CO LTD [KR]) 14 March 2012 (2012-03-14) the whole document -----	1-15
A	WO 2014/174067 A1 (ESSILOR INT [FR]) 30 October 2014 (2014-10-30) the whole document -----	1-15
A	US 8 217 856 B1 (PETROU DAVID [US]) 10 July 2012 (2012-07-10) the whole document -----	1-15
A	WO 97/24638 A1 (LICHTENFIELD LOUIS [US]; TRUMBULL DONALD E [US]) 10 July 1997 (1997-07-10) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2016/060986

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 2013141037	A1	06-06-2013	CN 104081616 A EP 2789070 A2 JP 2015501124 A KR 20140098239 A US 2013141037 A1 WO 2013085892 A2	01-10-2014 15-10-2014 08-01-2015 07-08-2014 06-06-2013 13-06-2013
US 2011141357	A1	16-06-2011	NONE	
EP 2387129	A2	16-11-2011	CN 102243379 A EP 2387129 A2 JP 2011239673 A KR 20120119927 A US 2012223674 A1	16-11-2011 16-11-2011 24-11-2011 01-11-2012 06-09-2012
US 2011050164	A1	03-03-2011	US 2011050164 A1 US 2013093388 A1 US 2013260677 A1	03-03-2011 18-04-2013 03-10-2013
EP 2429058	A2	14-03-2012	EP 2429058 A2 JP 2012060875 A KR 20120026789 A US 2012062173 A1	14-03-2012 22-03-2012 20-03-2012 15-03-2012
WO 2014174067	A1	30-10-2014	CN 105164576 A EP 2989502 A1 JP 2016520206 A KR 20160000457 A US 2016070105 A1 WO 2014174067 A1	16-12-2015 02-03-2016 11-07-2016 04-01-2016 10-03-2016 30-10-2014
US 8217856	B1	10-07-2012	US 8217856 B1 US 2013027572 A1	10-07-2012 31-01-2013
WO 9724638	A1	10-07-1997	NONE	