



- (51) International Patent Classification:  
H04W 36/00 (2009.01)
- (21) International Application Number:  
PCT/EP2012/071033
- (22) International Filing Date:  
24 October 2012 (24.10.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
11290513.8 4 November 2011 (04.11.2011) EP
- (71) Applicant: ALCATEL LUCENT [FR/FR]; 3 avenue Octave Gréard, F-75007 Paris (FR).
- (72) Inventors: GODIN, Philippe; Alcatel-Lucent France, Centre de Villarceaux, Route de Villejust, F-91620 Nozay (FR). PALAT, Sudeep; Alcatel-Lucent Telecom Ltd, The Quadrant Stonehill Green, Westlea, Swindon Wiltshire WI SN5 7DJ (GB).
- (74) Agent: EL MANOUNI, Josiane; Alcatel-Lucent International, 32 avenue Kléber, F-92700 Colombes (FR).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report (Art. 21(3))

WO 2013/064401 A1

(54) Title: ENHANCED INDICATION OF NETWORK SUPPORT OF SRVCC AND/OR VOICE-OVER-IMS FOR AN USER EQUIPMENT IN AN EPS NETWORK

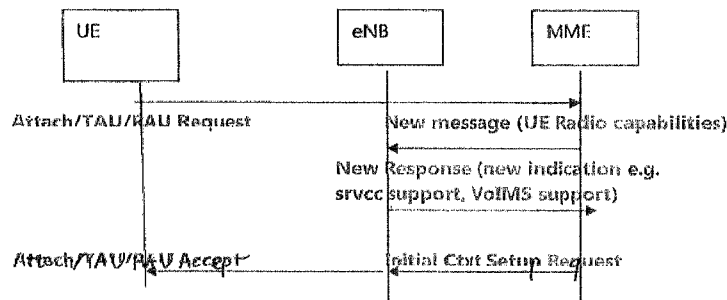


FIG.2

(57) Abstract: Embodiments of the present invention include a method for enhanced indication of network support of SRVCC and/or Voice-over-IMS for an User Equipment UE in an Evolved Packet System EPS network, said method comprising at least one step based on taking into account support of SRVCC and/or Voice-over-IMS by Radio Access Network RAN nodes and/or by Radio Access Technologies RATs available for SRVCC for said UE in said EPS network.

## **ENHANCED INDICATION OF NETWORK SUPPORT OF SRVCC AND/OR VOICE-OVER-IMS FOR AN USER EQUIPMENT IN AN EPS NETWORK**

The present invention generally relates to mobile communication networks  
5 and systems.

Detailed descriptions of mobile communication networks and systems can be found in the literature, in particular in Technical Specifications published by standardization bodies such as in particular 3GPP (3<sup>rd</sup> Generation Partnership Project).

10 In such systems a mobile terminal (or User Equipment) has access, via an Access Network, to a Core Network providing communication services.

An example of 3GPP system is 3G-LTE system, also called Evolved Packet System EPS, specified in particular in 3GPP TS 23.401. EPS includes Evolved Packet Core EPC providing IP connectivity services to an User Equipment UE. EPC can be  
15 accessed by different Access Networks, including 3GPP Radio Access Networks (such as E-UTRAN or GERAN/UTRAN) and non-3GPP Access Networks.

In EPS, CS (Circuit-Switched) services (such as in particular voice services) can be delivered as IP-based services, via PS (Packet-Switched) domain EPC providing IP connectivity to an operator's IMS network. Such functionality is also referred to as  
20 "Voice-over-IMS" (VoIMS), or "IMS voice over PS session".

On the contrary, in systems such as 2G-GSM or 3G-UMTS, CS services (such as for example voice services) can be delivered via CS (Circuit-Switched) domain.

Single Radio Voice Call Continuity SRVCC provides voice call continuity between IMS over Packet Switched PS access and Circuit Switched CS access for calls  
25 that are anchored in IMS when the User Equipment UE is capable of transmitting/receiving on only one of those access networks at a given time. SRVCC functionality is specified in particular in 3GPP TS 23.216. SRVCC can be performed from E-UTRAN to different Radio Access Networks RANs or Radio Access Technologies RATs, such as in particular 3GPP GERAN or UTRAN.

30 As specified in particular in 3GPP 23.216, an SRVCC-capable UE includes an SRVCC capability indication in an Attach Request message sent to a Mobility Management Entity (MME) in EPC during an Attach or mobility management procedure, and the MME includes a "SRVCC operation possible" indication in a Initial

Context Setup Request sent to the eNode B (in E-UTRAN), meaning that both UE and MME are SRVCC-capable. As specified in particular in 3GPP TS 23.401 and 24.301, the MME also informs the UE about network support of IMS voice over PS session, with an IMS voice over PS session indicator.

5 As recognized by the inventor, and as will be explained with more detail later, there is a need to improve such indication of Voice-over-IMS and/or SRVCC network support. More generally, there is a need to improve voice services support in EPS.

Embodiments of the present invention in particular addresses such needs.

10 These and other objects are achieved, in one aspect, by a method for enhanced indication of network/UE support of SRVCC and/or Voice-over-IMS for an User Equipment UE in an Evolved Packet System EPS network.

In an embodiment, said method comprises at least one step based on taking into account support of SRVCC and/or Voice-over-IMS by Radio Access Network RAN  
15 nodes and/or by Radio Access Technologies RATs available for SRVCC for said UE in said EPS network.

These and other objects are achieved, in other aspects, by entities for performing such method, said entities including, in particular E-UTRAN entity (eNodeB), and EPC entity (Mobility Management Entity MME).

20 Some embodiments of apparatus and/or methods in accordance with embodiments of the present invention are now described, by way of example only, and with reference to the accompanying drawings, in which:

- Figure 1 is intended to illustrate in a simplified way an Attach or Tracking Area Update procedure, enhanced according to a first embodiment of the  
25 present invention,
- Figure 2 is intended to illustrate in a simplified way an Attach or Tracking Area Update procedure, enhanced according to a second embodiment of the present invention.

As recalled above, currently the UE sends its global UTRAN/GERAN srvc  
30 capability to the MME at NAS level. This capability is used by the MME together with the EPC srvc support in order to decide whether to indicate "VoIMS possible" or "VoIMS not supported" back to the UE over NAS in the Attach/TAU/RAU Accept message. This indication is also provided to the eNB in the S1 Initial Context Request

message within the SRVCC indication Information element so that whenever an SRVCC is necessary the eNB knows whether MME and UE supports it.

In case the srvc is from lte to umts, one problem comes if the target RAN node doesn't support SRVCC. Indeed, the support of incoming srvc by an RNC  
5 requires some specific function. Since the MME is not necessarily aware of this target RNC capability but the source eNB is e.g. by configuration, the "VoIMS possible" or "VoIMS not supported" indication currently sent to the UE over NAS may not take it into account. Thus the MME can perfectly indicate "VoIMS possible" to the UE, leading to VoIMS call being established while the target UTRAN doesn't support srvc. As a  
10 result, at time of handover the eNB cannot perform this srvc which likely leads to release the call so that the UE can catch up 3g again. Another problem is also when the UE has indicated its general UTRAN/GERAN SRVCC capability to the MME but has not been tested for one of the two (either GERAN or UTRAN). The source eNB would be aware of it (so called FGI bits received by eNB from UE) but not the MME  
15 again. To solve these two problems it is necessary to send some information from source eNB to MME before the MME does decide to send to the UE over the NAS the "VoIMS possible" or "VoIMS not supported" indication.

Embodiments of the present invention in particular enable to solve such problems and/or avoid such drawbacks.

20 Embodiments of the present invention in particular take advantage of the fact that the source LTE eNB is aware e.g. by configuration whether a target RNC supports srvc or not.

Embodiments of the present invention include providing the target RNC srvc capability from eNB to the MME (for the lte to umts srvc case).

25 The sending of the capability from the eNB to the MME must be early enough so that the MME is made aware before making the decision "VoIMS possible" or not to be sent to the UE. The target RNC srvc capability can be sent from eNB to MME over a UE-dedicated message such as the UE Capability Info Indication message or the Initial Context Response message or any new UE-  
30 dedicated uplink S1AP message.

Embodiments of the invention can be extended to the case where the target RNC capability is provided from eNB to MME in a non-UE dedicated uplink S1 message such S1 Setup Request or a new non-UE dedicated uplink message.

Embodiments of the invention can be extended to cover other RATs i.e. to provide any target RAT RAN srvc capability from eNB to MME e.g. for GERAN, CDMA including capability concerning multiple RATs at the same time.

Embodiments of the invention can also be extended to cover any Access  
5 Stratum (AS) information that the eNB has which would be needed/useful by the MME in its decision to allow the UE for "VoIMS possible" or not. For example, one such information may be related to the FGI bit i.e. the eNB is made aware by the UE whether the srvc support towards a given RAT has been implemented and tested or not.

10 Embodiments of the invention can also be extended to cover the sending from the eNB to the MME of the support of "VoIMS capability" on the target RAN and RAT: this one would be useful in the context of a full VoIMS deployment scenario because the MME could decide to allow the UE to start VoIMS calls knowing the wide support of VoIMS on all RATs and RAN nodes even though srvc  
15 is not supported. The sending of this VoIMS capability support could also be per UE to cover cases such as the eNB checks per UE if the frequency band where the target RAT supports VoIMS is a frequency band also supported by the UE. By further extension to cover any case where the operation of the VoIMS by the UE on the target RAN/RAT node depends on some radio capabilities of the UE which are  
20 known by the eNB.

In embodiments of the present invention providing a sending by the eNB to the MME of either "srvc support" or "VoIMS support" on a target RAT/RAN node which depends on a per UE radio capability of the involved UE, two embodiments may be envisioned:

25 In a first embodiment, since the eNB receives the UE Radio Capabilities within the Initial Context Setup Request message or later, the new indication from eNB to MME would be sent after that e.g. in Initial Context Setup Response or in a new message, and the Attach Accept/TAU/RAU Accept towards the UE would be sent only after that, embedded in anS1AP Downlink NAS Transport.

30 In a second embodiment, after receiving the Initial UE Message, the MME could trigger a new class 1 procedure where a new S1 downlink message first sends the UE Radio capabilities to the eNB, then eNB responds with the new indication from eNB to MME, then the MME sends the Attach/TAU/RAU Accept towards the UE within the S1AP Initial Context Setup Request message.

The first embodiment is illustrated in a simplified way in figure 1. In the scenario in Figure 1, the first embodiment is represented whereby the Attach/TAU/RAU Accept message would be sent after and separate of Initial Context Setup Request.

5 The second embodiment is illustrated in a simplified way in figure 2. In figure 2 the second embodiment is represented allowing MME to send the Attach/TAU/RAU Accept message within the Initial Context Setup Request.

Embodiments of the invention allow the MME to make the right decision whether to authorize a UE to use VoIMS or not depending on the target RAT or  
10 target RAN nodes capabilities (wrt "srvcc support" or "VoIMS support") or even depending on some specific radio characteristics supported by the UE and known by eNB (FGI bits, supported frequency bands, etc..).

On the contrary, in the prior art, the MME may decide to send "VoIMS possible" to a UE in the Attach/TAU/RAU Accept message allowing the UE to start  
15 VoIMS calls which are likely to get dropped whenever handover to target RAT/RAN node becomes necessary due to non support of "srvcc" or non support of "VoIMS" at this target RAT/RAN node.

In one aspect, there is provided a method for enhanced indication of network support of SRVCC and/or Voice-over-IMS for an User Equipment UE in an  
20 Evolved Packet System EPS network.

In an embodiment, said method comprises at least one step based on taking into account support of SRVCC and/or Voice-over-IMS by Radio Access Network RAN nodes and/or by Radio Access Technologies RATs available for SRVCC for said UE in said EPS network.

25 In an embodiment, said method comprises a step of:

- an eNodeB serving said UE signalling to a Mobility Management Entity MME serving said UE, information as to said Voice-over-IMS and/or SRVCC support by Radio Access Network RAN nodes and/or Radio Access Technologies RATs available for SRVCC for said UE in said EPS network, referred to as Radio Access  
30 Network RAN-level-support information.

In an embodiment, said method comprises a step of:

- said eNodeB signalling said RAN-level-support information to said MME during an Attach procedure or a mobility management procedure for said UE.

In an embodiment, said method comprises a step of:

- said eNodeB signalling said RAN-level support information to said MME, in a message Initial Context Setup Response.

In an embodiment, said method comprises a step of:

5 - said eNodeB signalling said RAN-level support information to said MME, in a dedicated message.

In an embodiment, said method comprises a step of:

10 - said eNodeB determining information as to said Voice-over-IMS and/or SRVCC support by RAN nodes and/or Radio Access Technologies RATs available for SRVCC for said UE in said EPS network, referred to as Radio Access Network RAN-level-support information.

In an embodiment, said method comprises a step of:

- said eNodeB determining said RAN-level-support information, using information as to radio capabilities of said UE, and/or RAN configuration information.

15 In an embodiment, said method comprises a step of:

- a Mobility Management MME serving said UE signalling said information as to radio capabilities of said UE to said eNodeB.

In an embodiment, said method comprises a step of:

20 - said MME signalling said information as to radio capabilities of said UE to said eNodeB during an Attach procedure or a mobility management procedure for said UE.

In an embodiment, said method comprises a step of:

- said MME signalling said information as to radio capabilities of said UE to said eNodeB in a message Initial Context Setup Request.

25 In an embodiment, said method comprises a step of:

- said MME signalling said information as to radio capabilities of said UE to said eNodeB in a dedicated message.

In an embodiment, said method comprises a step of:

30 - a Mobility Management Entity MME serving said UE sending a Voice-over-IMS support indication to said UE, indicating Voice-over-IMS supported, if Voice-over-IMS is supported by Evolved Packet Core EPC, and if either Voice-over-IMS or SRVCC is supported by at least one of said available RAN nodes and/or RATs.

In an embodiment, said method comprises a step of:

- a Mobility Management Entity MME serving said UE sending an SRVCC support indication to an eNodeB serving said UE, indicating SRVCC supported, if SRVCC is supported by Evolved Packet Core EPC and by at least one of said available RAN nodes and/or RATs.

5 Other aspects relate to entities comprising means for performing such method, said entities including, in particular E-UTRAN entity (eNodeB), and EPC entity (Mobility Management Entity MME).

In one aspect, there is provided an eNode B serving an UE in an EPS network, said eNodeB comprising:

10 - means for signalling to a Mobility Management Entity MME serving said UE, information as to Voice-over-IMS and/or SRVCC support by RAN nodes and/or Radio Access Technologies RATs available for SRVCC for said UE in said EPS network, referred to as Radio Access Network RAN-level-support information.

In an embodiment, said eNode B comprises:

15 - means for signalling said RAN-level-support information to a Mobility Management MME serving said UE, during an Attach procedure or a mobility management procedure for said UE.

In an embodiment, said eNode B comprises:

20 - means for signalling said RAN-level support information to said MME, in a message Initial Context Setup Response.

In an embodiment, said eNode B comprises:

- means for signalling said RAN-level support information to said MME, in a dedicated message.

In an embodiment, said eNode B comprises:

25 - means for determining information as to said Voice-over-IMS and/or SRVCC support by RAN nodes and/or Radio Access Technologies RATs available for SRVCC for said UE in said EPS network, referred to as Radio Access Network RAN-level-support information.

In an embodiment, said eNode B comprises:

30 - means for determining said RAN-level-support information, using information as to radio capabilities of said UE, and/or RAN configuration information.



In another aspect, there is provided a Mobility Management Entity MME serving an UE in an EPS network, said MME comprising:

- means for signalling information as to radio capabilities of said UE to an eNodeB serving said UE.

5 In an embodiment, said MME comprises:

- means for signalling said information as to radio capabilities of said UE to said eNodeB during an Attach procedure or a mobility management procedure for said UE.

In an embodiment, said MME comprises:

10 - means for signalling said information as to radio capabilities of said UE to said eNodeB in a message Initial Context Setup Request.

In an embodiment, said MME comprises:

- means for signalling said information as to radio capabilities of said UE to said eNodeB in a dedicated message.

15 In another aspect, there is provided a Mobility Management Entity MME serving an UE in an EPS network, said MME comprising:

- means for sending a Voice-over-IMS support indication to said UE, indicating Voice-over-IMS supported, if Voice-over-IMS is supported by Evolved Packet Core EPC, and if either Voice-over-IMS or SRVCC is supported by at least one  
20 of RAN nodes and/or RATs available for SRVCC for said UE in said EPS network.

In another aspect, there is provided a Mobility Management Entity MME serving an UE in an EPS network, said MME comprising:

- means for sending an SRVCC support indication to an eNodeB serving said UE, indicating SRVCC supported, if SRVCC is supported by Evolved Packet Core  
25 EPC and by at least one of said available RAN nodes and/or RATs available for SRVCC for said UE in said EPS network.

The detailed implementation of the above-mentioned means does not raise any special problem for a person skilled in the art, and therefore such means do not need to be more fully disclosed than has been made above, by their function, for a  
30 person skilled in the art.

A person of skill in the art would readily recognize that steps of various above-described methods can be performed by programmed computers. Herein, some embodiments are also intended to cover program storage devices, e.g., digital

data storage media, which are machine or computer readable and encode machine-executable or computer-executable programs of instructions, wherein said instructions perform some or all of the steps of said above-described methods. The program storage devices may be, e.g., digital memories, magnetic storage media such as a  
5 magnetic disks and magnetic tapes, hard drives, or optically readable digital data storage media. The embodiments are also intended to cover computers programmed to perform said steps of the above-described methods.

**CLAIMS**

1. A method for enhanced indication of network support of SRVCC and/or Voice-over-IMS for an User Equipment UE in an Evolved Packet System EPS network,  
5 said method comprising at least one step based on taking into account support of SRVCC and/or Voice-over-IMS by Radio Access Network RAN nodes and/or by Radio Access Technologies RATs available for SRVCC for said UE in said EPS network.
2. A method according to claim 1, comprising a step of:  
10 - an eNodeB serving said UE signalling to a Mobility Management Entity MME serving said UE, information as to said Voice-over-IMS and/or SRVCC support by RAN nodes and/or Radio Access Technologies RATs available for SRVCC for said UE in said EPS network, referred to as Radio Access Network RAN-level-support information.
- 15 3. A method according to claim 2, comprising a step of:  
- said eNodeB signalling said RAN-level-support information to said MME during an Attach procedure or a mobility management procedure for said UE.
- 20 4. A method according to claim 2 or 3, comprising a step of:  
- said eNodeB signalling said RAN-level support information to said MME, in a message Initial Context Setup Response.
5. A method according to claim 2 or 3, comprising a step of:  
25 - said eNodeB signalling said RAN-level support information to said MME, in a dedicated message.
6. A method according to any of claims 1 to 5, comprising a step of:  
- said eNodeB determining information as to said Voice-over-IMS and/or  
30 SRVCC support by RAN nodes and/or Radio Access Technologies RATs available for SRVCC for said UE in said EPS network, referred to as Radio Access Network RAN-level-support information.

7. A method according to claim 6, comprising a step of:  
- said eNodeB determining said RAN-level-support information, using information as to radio capabilities of said UE, and/or RAN configuration information.
- 5
8. A method according to claim 7, comprising a step of:  
- a Mobility Management MME serving said UE signalling said information as to radio capabilities of said UE to said eNodeB.
- 10
9. A method according to claim 8, comprising a step of:  
- said MME signalling said information as to radio capabilities of said UE to said eNodeB during an Attach procedure or a mobility management procedure for said UE.
- 15
10. A method according to claim 9, comprising a step of:  
- said MME signalling said information as to radio capabilities of said UE to said eNodeB in a message Initial Context Setup Request.
- 20
11. A method according to claim 9, comprising a step of:  
- said MME signalling said information as to radio capabilities of said UE to said eNodeB in a dedicated message.
- 25
12. A method according to any of claims 1 to 11, comprising a step of:  
- a Mobility Management Entity MME serving said UE sending a Voice-over-IMS support indication to said UE, indicating Voice-over-IMS supported, if Voice-over-IMS is supported by Evolved Packet Core EPC, and if either Voice-over-IMS or SRVCC is supported by at least one of said available RAN nodes and/or RATs.
- 30
13. A method according to any of claims 1 to 12, comprising a step of:  
- a Mobility Management Entity MME serving said UE sending an SRVCC support indication to an eNodeB serving said UE, indicating SRVCC supported, if SRVCC is supported by Evolved Packet Core EPC and by at least one of said available RAN nodes and/or RATs.

14. An eNodeB, comprising means for performing a method according to any of claims 1 to 13.

5           15. A Mobility Management Entity MME, comprising means for performing a method according to any of claims 1 to 13.

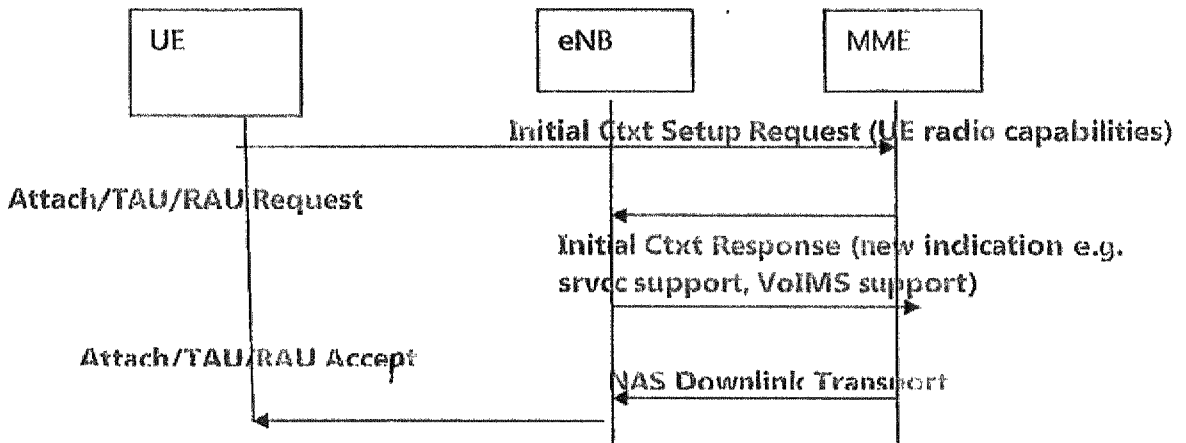


FIG.1

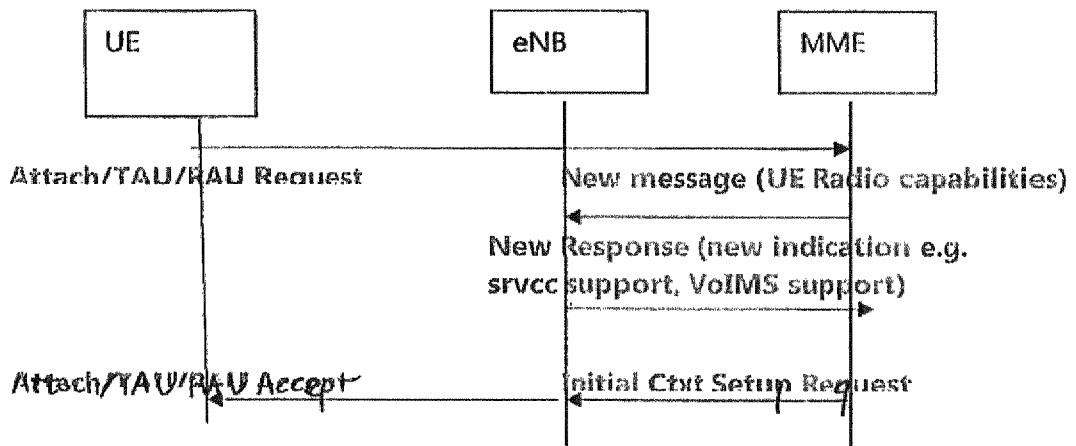


FIG.2

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/EP2012/071033

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H04W36/00  
ADD.  
  
According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
Minimum documentation searched (classification system followed by classification symbols)  
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal, COMPENDEX, INSPEC, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009/121745 A1 (NOKIA SIEMENS NETWORKS OY [FI]; HWANG WOONHEE [FI]; MADEMANN FRANK [DE] 8 October 2009 (2009-10-08) page 3, line 32 - page 4, line 8 page 8, line 15 - line 36 page 11, line 36 - page 12, line 37 page 16, line 29 - page 17, line 10 page 18, line 30 - line 34 figures 2, 3	1-3,6-9, 13-15
X	WO 2010/044730 A2 (ERICSSON TELEFON AB L M [SE]; RUNE GOERAN [SE]) 22 April 2010 (2010-04-22) page 4, line 1 - line 7 page 5, line 6 - line 17 page 7, line 29 - page 8, line 4 figure 6	1-3,14, 15
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
---	---

Date of the actual completion of the international search <b>9 January 2013</b>	Date of mailing of the international search report <b>16/01/2013</b>
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  <b>Rosenauer, Hubert</b>
--	--

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2012/071033

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 2010/040020 A1 (CHEN BONNIE [US]) 18 February 2010 (2010-02-18) paragraphs [0002], [0004], [0011] paragraph [0014] - paragraph [0015] paragraph [0020] - paragraph [0021] paragraphs [0026], [0032], [0037] claim 1 figures 1, 3</p> <p style="text-align: center;">-----</p>	1,14,15
A	<p>"3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access (Release 10)", 3GPP STANDARD; 3GPP TS 23.401, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. V10.3.0, 18 March 2011 (2011-03-18), pages 1-278, XP050476358, cited in the application page 25, paragraph 4.3.5.8 - page 26, paragraph 4.3.5.9</p> <p style="text-align: center;">-----</p>	1,14,15
A	<p>"3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Single Radio Voice Call Continuity (SRVCC); Stage 2 (Release 9)", 3GPP STANDARD; 3GPP TS 23.216, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. V9.2.0, 10 December 2009 (2009-12-10), pages 1-41, XP050400590, cited in the application page 9, paragraph 4.2.2 - page 10, paragraph 4.2.2 page 17, line 5.3.3.2 page 22, paragraph 6.2.1 - page 26, paragraph 6.2.2.1 figures 4.2.2-1</p> <p style="text-align: center;">-----</p>	1-15



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/071033

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009121745	A1	08-10-2009	CN 101983525 A
			EP 2263404 A1
			KR 20100132995 A
			US 2011013597 A1
			WO 2009121745 A1
-----			
WO 2010044730	A2	22-04-2010	EP 2338299 A2
			US 2011200011 A1
			WO 2010044730 A2
-----			
US 2010040020	A1	18-02-2010	NONE
-----			