

(19)



(11)

**EP 4 385 383 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**30.04.2025 Bulletin 2025/18**

(51) International Patent Classification (IPC):  
**A47L 5/24 (2006.01) A47L 9/28 (2006.01)**  
**A47L 9/32 (2006.01)**

(21) Application number: **24168003.2**

(52) Cooperative Patent Classification (CPC):  
**A47L 9/2857; A47L 9/28; A47L 9/2842;**  
**A47L 9/322; A47L 9/325; A47L 9/327**

(22) Date of filing: **20.06.2017**

(54) **VACUUM CLEANER**

STAUBSAUGER

ASPIRATEUR

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(30) Priority: **25.08.2016 KR 20160108310**

(43) Date of publication of application:  
**19.06.2024 Bulletin 2024/25**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**22184939.1 / 4 104 736**  
**17843793.5 / 3 485 780**

(73) Proprietor: **LG Electronics Inc.**  
**Yeongdeungpo-gu**  
**Seoul 07336 (KR)**

(72) Inventors:  
• **HWANG, Philjae**  
**08592 Seoul (KR)**

- **HWANG, Mantae**  
**08592 Seoul (KR)**
- **HWANG, Jungbae**  
**08592 Seoul (KR)**
- **SUNG, Eunji**  
**08592 Seoul (KR)**
- **LEE, Taekgi**  
**08592 Seoul (KR)**

(74) Representative: **Vossius & Partner**  
**Patentanwälte Rechtsanwälte mbB**  
**Siebertstrasse 3**  
**81675 München (DE)**

(56) References cited:  
**EP-A1- 2 811 885 EP-A1- 2 961 305**  
**EP-B1- 2 811 885 EP-B1- 2 961 305**  
**WO-A1-2016/008049**

**EP 4 385 383 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****TECHNICAL FIELD**

[0001] The present disclosure relates to a cleaner.

**BACKGROUND ART**

[0002] Cleaners may be classified into a manual cleaner that a user moves in person for cleaning and an automatic cleaner that automatically moves for cleaning.

[0003] Manual cleaners may fall into, depending on the types, a canister cleaner, an upright cleaner, a handy cleaner, and a stick cleaner.

[0004] Handy cleaners, generally, may include a suction unit, a body, and a handle.

[0005] Meanwhile, in the related art, a handheld vacuum cleaner has been disclosed in Korean Patent No. 10-1127088 (registered on 8 March, 2012).

[0006] The handheld vacuum cleaner includes a suction pipe, an airflow generator, a cyclone, a power supply, and a handle.

[0007] A trigger switch for turning on or off the airflow generator is disposed at the handle.

[0008] According to this prior art document, however, since the airflow generator is turned on or off by the trigger switch, it is impossible to control the intensity of airflow with the airflow generator turned on.

[0009] Further, according to this prior art document, since the trigger switch is positioned on the handle with which a user's palm comes in contact, the user may unexpectedly operate the trigger switch while cleaning with the handle in his/her hand.

[0010] EP 2 811 885 A1, US 5 884 358 A and US 3 766 347 A are related prior art documents.

**DISCLOSURE OF THE INVENTION****TECHNICAL PROBLEM**

[0011] The present disclosure provides a cleaner that allows a user to input an instruction to turn on or off a suction motor using an operation unit, and to control the intensity of suction force of the suction motor with the suction motor turned on.

[0012] The present disclosure provides a cleaner of which an operation unit is not unexpectedly operated during cleaning.

[0013] The present disclosure provides a cleaner that allows a user to input an instruction to turn on or off a suction motor using an operation unit, and to control the intensity of suction force of the suction motor through one operation button.

[0014] The present disclosure provides a cleaner in which a push part for turning on and off a suction motor and a push part for adjusting the intensity of the suction force are not simultaneously pressed when an operation unit is operated.

**TECHNICAL SOLUTION**

[0015] A cleaner includes: a suction motor that generates a suction force; and an operation unit that is configured to input control instructions for the suction motor, wherein the operation unit has: a support frame; a first push part that is rotatably seated on the support frame and allows an instruction to turn on or off the suction motor to be input when being rotated in a first direction; and a second push part that allows the intensity of the suction force of the suction motor to be adjusted when being rotated in a second direction.

[0016] A cleaner includes: a suction unit that guides air and dust; a main body that has a dust separator separating dust from air guided by the suction unit; and an operation unit that is configured to input control instructions for a suction motor, wherein the operation unit is positioned higher than a longitudinal axis of the suction unit and has a first push part that allows a first instruction to be input when being rotated in a first direction and a second push part that allows a second instruction to be input when being rotated in a second direction.

**ADVANTAGEOUS EFFECTS**

[0017] According to the present embodiment, it is possible to not only input instructions to turn on and off the suction motor, but adjust the intensity of the suction force of the suction motor that has been turned on through the operation unit, so a user can adjust the suction force while cleaning.

[0018] For example, when the intensity of the suction force is large, the available cleaning time may be reduced, but the cleaning effect can be improved. In contrast, when the intensity of the suction force is small, the cleaning effect may be reduced, but the available cleaning time is increased.

[0019] Further, according to the present embodiment, since the operation unit is positioned higher than the grip of the handle, it is possible to prevent a user from unexpectedly operate the operation unit with the grip in his/her hand.

[0020] Further, according to the present embodiment, since it is possible to not only input instructions to turn on and off the suction motor, but adjust the intensity of the suction force of the suction motor through one operation button, a user can more conveniently use the cleaner.

[0021] Further, according to the present embodiment, since operation instructions can be input by rotation of the operation unit, it is possible to prevent the switch that receives instructions to turn on and off the suction motor and the switch that receives instructions to adjust the intensity of the suction force from being simultaneously pressed when operating the operation button.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0022]

FIG. 1 is a perspective view of a cleaner according to an embodiment of the present invention.

FIG. 2 is a side view of the cleaner according to an embodiment of the present invention.

FIG. 3 is a plan view of the cleaner according to an embodiment of the present invention.

FIG. 4 is a perspective view of the cleaner according to an embodiment of the present invention when seen from under the cleaner.

FIG. 5 is a vertical cross-sectional view of the cleaner according to an embodiment of the present invention.

FIG. 6 is a view showing a handle unit according to an embodiment of the present invention with an operation unit separated.

FIG. 7 is an exploded perspective view of the operation unit according to an embodiment of the present invention.

FIG. 8 is a perspective view of a support frame according to an embodiment of the present invention.

FIG. 9 is a perspective view of an operation button according to an embodiment of the present invention.

FIG. 10 is a cross-sectional view showing the operation unit of the present invention combined with the handle.

FIG. 11 is a view showing a hinge of the operation unit seated in a hinge seat of the support frame.

FIG. 12 is a view showing the operation button with a first push part pressed.

FIG. 13 is a view showing the positional relationship between the operation button and the support frame in the state shown in FIG. 12.

FIG. 14 is a view showing the operation button with a second push part pressed.

FIG. 15 is a view showing the positional relationship between the operation button and the support frame in the state shown in FIG. 14.

### **DETAILED DESCRIPTION OF THE EMBODIMENTS**

**[0023]** Hereinafter, some embodiments of the present disclosure will be described in detail with reference to the accompanying drawings. It should be noted that when components in the drawings are designated by reference numerals, the same components have the same reference numerals as far as possible even though the components are illustrated in different drawings. Further, in description of embodiments of the present disclosure, when it is determined that detailed descriptions of well-known configurations or functions disturb understanding of the embodiments of the present disclosure, the detailed descriptions will be omitted.

**[0024]** Also, in the description of the embodiments of the present disclosure, the terms such as first, second, A, B, (a) and (b) may be used. Each of the terms is merely used to distinguish the corresponding component from

other components, and does not delimit an essence, an order or a sequence of the corresponding component. It should be understood that when one component is "connected", "coupled" or "joined" to another component, the former may be directly connected or joined to the latter or may be "connected", coupled" or "joined" to the latter with a third component interposed therebetween.

**[0025]** FIG. 1 is a perspective view of a cleaner according to an embodiment of the present invention, FIG. 2 is a side view of the cleaner according to an embodiment of the present invention, FIG. 3 is a plan view of the cleaner according to an embodiment of the present invention, FIG. 4 is a perspective view of the cleaner according to an embodiment of the present invention when seen from under the cleaner, and FIG. 5 is a cross-sectional view of the cleaner according to an embodiment of the present invention.

**[0026]** Referring to FIGS. 1 to 5, a cleaner 1 according to an embodiment of the present invention may include a main body 2.

**[0027]** The cleaner 1 may further include a suction unit 5 coupled to the front of the main body 2. The suction unit 5 can guide air containing dust into the main body 2.

**[0028]** The cleaner 1 may further include a handle unit 3 coupled to the main body 2. The handle unit 3 may be positioned opposite to the suction unit 5 on the main body 2.

**[0029]** That is, the main body 2 may be disposed between the suction unit 5 and the handle unit 3.

**[0030]** The main body 2 may include a first body 10 and a second body 12 on the first body 10. The first body 10 and the second body 12 may be directly combined or may be indirectly combined through an intermediate member.

**[0031]** The first body 10 and the second body 12 may be, though not limited thereto, formed in a cylindrical shape.

**[0032]** The first body 10 and the second body 12 are open at the top and the bottom, respectively. That is, the bodies 10 and 12 may have a top opening and a bottom opening, respectively.

**[0033]** The suction unit 5 may be coupled to the main body 2 such that the center of the suction unit 5 is positioned approximately at the boundary between the first body 10 and the second body 12.

**[0034]** The main body 2 may further include a dust separation unit that separates dust from air sucked through the suction unit 5.

**[0035]** The dust separation unit may include a first cyclone unit 110 that can separate dust, for example, using cyclonic flow. The first body 10 includes the first cyclone unit 110 in this configuration.

**[0036]** The air and dust sucked through the suction unit 5 helically flow along the inner side of the first cyclone unit 110.

**[0037]** The axis of the cyclonic flow in the first cyclone unit 110 may vertically extend.

**[0038]** The dust separation unit may further include a second cyclone unit 130 that secondarily separates dust

from the air discharged out of the first cyclone unit 110. The second cyclone unit 130 may be disposed inside the first cyclone unit 110 to minimize the size of the dust separation unit. The second cyclone unit 130 may include a plurality of cyclone bodies arranged in a row.

**[0039]** As another example, the dust separation unit may include one cyclone unit, in which the axis of the cyclonic flow may also vertically extend.

**[0040]** The first body 10 functions as a dust container that stores dust separated by the cyclone units 180 and 190.

**[0041]** The main body 2 may further include a body cover 16 for opening/closing the bottom of the first body 10. The body cover 16 can open/close the first body 10 by being rotated. A button 18 for rotating the body cover 16 may be disposed on the first body 10. A hinge 162 of the body cover 16 may be coupled to hinge coupling portions 620 of the battery housing 60.

**[0042]** At least a portion of the second cyclone unit 130 may be positioned inside the first body 10.

**[0043]** A dust storage guide 184 that guides the dust separated by the second cyclone unit 130 to be stored may be disposed in the first body 10. The dust storage guide 184 may be coupled to the bottom of the second cyclone unit 130 in contact with the top of the body cover 16.

**[0044]** The dust storage guide 184 may divide the internal space of the first body 10 into a first dust storage part 181 where the dust separated by the first cyclone unit 110 is stored and a second dust storage part 183 where the dust separated by the second cyclone unit 130 is stored.

**[0045]** The internal space of the dust storage guide 184 is the second dust storage part 183 and the space between the dust storage guide 184 and the first body 10 is the first dust storage part 181.

**[0046]** The body cover 16 can open/close both of the first dust storage part 181 and the second dust storage part 183.

**[0047]** The cleaner 1 may further include a suction motor 20 for generating suction force and a battery 40 for supplying power to the suction motor 20.

**[0048]** The suction motor 20 may be disposed in the second body 12. At least a portion of the suction motor 20 may be disposed over the dust separation unit. Accordingly, the suction motor 20 is disposed over the first body 10.

**[0049]** The suction motor 20 may communicate with an outlet of the second cyclone unit 130.

**[0050]** To this end, the main body 2 may further include a discharge guide 28 connected to the second cyclone unit 130 and a flow guide 22 that communicates with the discharge guide 28.

**[0051]** For example, the discharge guide 28 is disposed on the second cyclone unit 130 and the flow guide 22 is disposed over the discharge guide 28.

**[0052]** Further, at least a portion of the suction motor 20 is positioned inside the flow guide 22.

**[0053]** Accordingly, the axis of the cyclonic flow in the first cyclone unit 110 may pass through the suction motor 20.

**[0054]** When the suction motor 20 is disposed over the second cyclone unit 130, the air discharged from the second cyclone unit 130 can flow directly to the suction motor 20, so the channel between the dust separation unit and the suction motor 20 can be minimized.

**[0055]** The suction motor 20 may include a rotary impeller 200. The impeller 200 may be fitted on a shaft 202. The shaft 202 is vertically disposed.

**[0056]** An extension line from the shaft 202 (which may be considered as the rotational axis of the impeller 200) may pass through the first body 10. The rotational axis of the impeller 200 and the axis of the cyclonic flow in the first cyclone unit 110 may be on the same line.

**[0057]** According to the present embodiment, there is the advantage that the path through which the air discharged from the dust separation unit, that is, the air discharged upward from the second cyclone unit 130 flows to the suction motor 20 can be reduced and a change in direction of air can be decreased, so a loss of airflow can be reduced.

**[0058]** As the loss of airflow is reduced, suction force can be increased and the lifetime of the battery 40 for supplying power to the suction motor 20 can be increased.

**[0059]** The cleaner 1 may further include an upper motor housing 26 covering a portion of the top of the suction motor 20 and a lower motor housing 27 covering a portion of the bottom of the suction motor 20. The lower motor housing 27 may be integrally formed with the second body 12 or may be coupled to the second body 12.

**[0060]** The suction motor 20 may be disposed inside the motor housings 26 and 27 and the flow guide 22 may be disposed to cover the upper motor housing 26.

**[0061]** At least a portion of the flow guide 22 may be spaced apart from the upper motor housing 26. Further, at least a portion of the flow guide 22 may be spaced apart from the second body 12.

**[0062]** Accordingly, a first air passage 232 is defined by the inner side of the flow guide 22 and the outer side of the upper motor housing 26 and a second air passage 234 is defined by the outer side of the flow guide 22 and the inner side of the second body 12.

**[0063]** The air discharged from the second cyclone unit 130 flows to the suction motor 20 through the first air passage 232 and the air discharged from the suction motor 20 flows through the second air passage 234 and is then discharged outside. Accordingly, the second air passage 234 functions as an exhaust channel.

**[0064]** The handle unit 3 may include a handle 30 for a user to hold and a battery housing 60 under the handle 30.

**[0065]** The handle 30 may be disposed behind the suction motor 20.

**[0066]** As for directions, with respect to the suction

motor 20 in the cleaner 1, the direction in which the suction unit 5 is positioned is the front direction and the direction in which the handle 30 is positioned is the rear direction.

**[0067]** The battery 40 may be disposed behind the first body 10. Accordingly, the suction motor 20 and the battery 40 may be arranged not to vertically overlap each other and may be disposed at different heights.

**[0068]** According to the present embodiment, since the suction motor 20 that is heavy is disposed ahead of the handle 30 and the battery 40 that is heavy is disposed behind the handle 30, so weight can be uniformly distributed throughout the cleaner 1. It is possible to prevent injuries to the user's wrist when a user cleans with the handle 30 in his/her hand. That is, since the heavy components are distributed at the front and rear portions and at different heights in the cleaner 1, it is possible to prevent the center of gravity of the cleaner 1 from concentrating on any one side.

**[0069]** Since the battery 40 is disposed under the handle 30 and the suction motor 20 is disposed in front of the handle 30, there is no component over the handle 30. That is, the top of the handle 30 forms a portion of the external appearance of the top of the cleaner 1.

**[0070]** Accordingly, it is possible to prevent any component of the cleaner 1 from coming in contact with the user's arm while the user cleans with the handle 30 in his/her hand.

**[0071]** The handle 30 may include a first extension 310 extending vertically to be held by a user and a second extension 320 extending toward the suction motor 20 over the first extension 310. The second extension 320 may at least partially horizontally extend.

**[0072]** In the present embodiment, the first extension 310, which is a portion that a user can hold (a portion that a user's palm can come in contact with), may be referred to as a grip.

**[0073]** A stopper 312 for preventing a user's hand holding the first extension 310 from moving in the longitudinal direction of the first extension 310 (vertically in FIG. 2) may be formed on the first extension 310. The stopper 312 may extend toward the suction unit 5 from the first extension 310.

**[0074]** The stopper 312 is spaced apart from the second extension 320. Accordingly, a user is supposed to hold the first extension 310, with some of the fingers over the stopper 312 and the other fingers under the stopper 312.

**[0075]** For example, the stopper 312 may be positioned between the index finger and the middle finger.

**[0076]** According to this arrangement, when a user holds the first extension 310, the longitudinal axis A1 of the suction unit 5 may pass through the user's wrist.

**[0077]** When the longitudinal axis A1 of the suction unit 5 passes through the user's wrist and the user's arm is stretched, the longitudinal axis A1 of the suction unit 5 may be substantially aligned with the user's stretched arm. Accordingly, there is the advantage in this state that

the user uses minimum force when pushing or pulling the cleaner 1 with the handle 30 in his/her hand.

**[0078]** The handle 30 may include an operation unit 350. For example, the operation unit 350 may be disposed on an inclined surface of the second extension 320. It is possible to input instructions to turn on/off the cleaner (suction motor) through the operation unit 350. Further, it is possible to control the intensity of the suction force of the suction motor 20 that has been turned on through the operation unit 350.

**[0079]** The operation unit 350 may be disposed to face a user. The operation unit 350 may be disposed opposite to the stopper 312 with the handle 30 therebetween.

**[0080]** The operation unit 350 is positioned higher than the stopper 312. Accordingly, a user can easily operate the operation unit 350 with his/her thumb with the first extension 310 in his/her hand.

**[0081]** Further, since the operation unit 350 is positioned outside the first extension 310, it is possible to prevent the operation unit 350 from being unexpectedly operated when a user cleans with the first extension 310 in his/her hand.

**[0082]** A display unit 322 for showing operational states may be disposed on the second extension 320.

The display unit 322 may be, for example, disposed on the top of the second extension 320. Accordingly, a user can easily check the display unit 322 on the top of the second extension 320 while cleaning. The display 322, for example, can show the remaining capacity of the battery 40 and the intensity of the suction motor.

**[0083]** The display unit 322, though not limited, may include a plurality of light emitting devices. The light emitting devices may be spaced from each other in the longitudinal direction of the second extension 320.

**[0084]** The battery housing 60 may be disposed under the first extension 310.

**[0085]** The battery 40 may be detachably combined with the battery housing 60. For example, the battery 40 may be inserted into the battery housing 60 from under the battery housing 60.

**[0086]** The rear side of the battery housing 60 and the rear side of the first extension 310 may form a continuous surface. Accordingly, the battery housing 60 and the first extension 310 can be shown like a single unit.

**[0087]** When the battery 40 is inserted in the battery housing 60, the bottom of the battery 40 may be exposed to the outside. Accordingly, when the cleaner 1 is placed on the floor, the battery 40 can be in contact with the floor.

**[0088]** According to this structure, there is the advantage that the battery 40 can be directly separated from the battery housing 60.

**[0089]** Further, since the bottom of the battery 40 is exposed to the outside, the bottom of the battery 40 can come in direct contact with the air outside the cleaner 1, so the battery 40 can be more efficiently cooled.

**[0090]** Referring to FIG. 3, the cleaner 1 may further include a filter unit 50 having air exits 522 for discharging the air that has passed through the suction motor 20. For

example, the air exits 522 may include a plurality of openings and the openings may be circumferentially arranged. Accordingly, the air exits 522 may be arranged in a ring shape.

**[0091]** The filter unit 50 may be detachably coupled to the top of the main body 2. The filter unit 50 may be detachably inserted in the second body 12.

**[0092]** When the filter unit 50 is combined with the main body 2, a portion of the filter unit 50 is positioned outside the second body 12. Accordingly, a portion of the filter unit 50 is inserted in the main body 2 through the open top of the main body 2 and the other portion protrudes outside from the main body 2.

**[0093]** The height of the main body 2 may be substantially the same as the height of the handle 30. Accordingly, the filter unit 50 protrudes upward from the main body 2, so a user can easily hold and separate the filter unit 50.

**[0094]** When the filter unit 50 is combined with the main body 2, the air exits 522 are positioned at the upper portion of the filter unit 50. Accordingly, the air discharged from the suction motor 20 is discharged upward from the main body 2.

**[0095]** According to this embodiment, it is possible to prevent the air discharged from the air exits 522 from flowing to a user while the user cleans using the cleaner 1.

**[0096]** The main body 2 may further include a pre-filter 29 for filtering the air flowing into the suction motor 20. The pre-filter 29 may be disposed inside the flow guide 22. Further, the pre-filter 29 is seated over the upper motor housing 16 and may surround a portion of the upper motor housing 26. That is, the upper motor housing 26 may include a filter support for supporting the pre-filter 29.

**[0097]** FIG. 6 is a view showing a handle unit according to an embodiment of the present invention with an operation unit separated, FIG. 7 is an exploded perspective view of the operation unit according to an embodiment of the present invention, FIG. 8 is a perspective view of a support frame according to an embodiment of the present invention, and FIG. 9 is a perspective view of an operation button according to an embodiment of the present invention.

**[0098]** Referring to FIGS. 6 to 9, the external shape of the handle 30 according to this embodiment may be formed by a handle body 330 and a handle cover 340 coupled to the handle body 330.

**[0099]** When the handle cover 340 is coupled to the handle body 330, the handle cover 340 and the handle body 330 form the first extension 310 and the second extension 320.

**[0100]** The handle body 330 may include a first handle body 331 and a second handle body 332 disposed over the first handle body 331.

**[0101]** The handle cover 340 may include a first cover 341 and a second cover 342 disposed over the first cover 341.

**[0102]** When the first cover 341 is coupled to the first handle body 331, the first handle body 331 and the first

cover 341 form the first extension 310. Further, when the second cover 342 is coupled to the second handle body 332, the second handle body 332 and the second cover 342 form the second extension 320.

**[0103]** Though not limited, the operation unit 350 may be coupled to the second cover 342.

**[0104]** When the handle body 330 and the handle cover 340 are separately formed, a structure for installing a circuit board in the handle body 330 and coupling the operation unit 350 to the handle cover 340 may be formed.

**[0105]** The second cover 342 may have a seat 343 that can keep a portion of the operation unit 350. The seat 343 may be formed by recessing a portion of the second cover 342.

**[0106]** The handle 30 may further include a first switch 382 and a second switch 384 for receiving operation instructions from the operation unit 350. The first switch 382 and the second switch 384 may be positioned at different heights.

**[0107]** Though not limited, it is possible to receive instructions to turn on and off the suction motor 20 (or they may be referred to as a "first instruction" and a "third instruction", respectively) through the first switch 382 and instructions to control the intensity of the suction force of the suction motor 20 (it may be referred to as a "second instruction") through the second switch 384.

**[0108]** A pair of holes 344 for receiving a portion of the operation unit 350 may be formed at the second cover 342. The holes 344 may be arranged to face the first switch 382 and the second switch 384, respectively.

**[0109]** The holes 344 may be formed, for example, through the seat 343.

**[0110]** The operation unit 350 may include an operation button 360 and a support frame 370 supporting the operation button 360.

**[0111]** The operation button 360 may be movably coupled to the support frame 370 and the support frame 370 may be coupled to the second cover 342.

**[0112]** The operation button 360 may include a button body 361. A separation slit 362 for dividing the button body 361 into two parts may be formed substantially at the center of the button body 361.

**[0113]** The button body 361 may have a first push part 361a and a second push part 361b separated by the separation slit 362.

**[0114]** The button body 361 may further has cut grooves at both sides from the separation slit 362. The cut grooves 369 make the push parts 361a and 361b be visually distinguished.

**[0115]** The button body 361 may be formed in an elliptical shape so that a user can operate the two push parts 361a and 361b and the contact area with a finger is improved.

**[0116]** When the operation unit 350 is coupled to the handle 30, the first push part 361a and the second push part 361b may be arranged up and down. That is, the first push part 361a and the second push part 361b may be

positioned at different heights.

**[0117]** The first push part 361a may have a first push projection 366a for pressing the first switch 382 and the second push part 361b may have a second push projection 366b for pressing the second switch 384.

**[0118]** The first push part 361a and the second push part 361b may have reinforcing ribs 364a and 364b for improving strength, respectively.

**[0119]** The reinforcing ribs 364a and 364b may be bent at several portions to increase the reinforcing effect by the reinforcing ribs 364a and 364b.

**[0120]** Further, the push projections 366a and 366b may be integrally formed with the reinforcing ribs 364a and 364b to prevent breakage of the push projections 366a and 366b.

**[0121]** The operation button 360 may further have one or more button hooks 365a and 365b to be coupled to the support frame 370.

**[0122]** The operation button 360 may have a plurality of button hooks 365a and 365b to stably retain the operation button 360 inside the support frame 370.

**[0123]** The button hooks 365a and 365b may be arranged up and down on the operation button 360 so that the coupling force to the support frame 370 at the first push part 361a and the coupling force to the support frame 370 at the second push part 361b are substantially the same.

**[0124]** That is, the first button hook 365a may be formed on the first push part 361a and the second button hook 365b may be formed on the second push part 361b.

**[0125]** The first push projection 366a and the second push projection 366b may be disposed between the first button hook 365a and the second button hook 365b.

**[0126]** For example, the first button hook 365a, the first push projection 366a, the second push projection 366b, and the second button hook 365b may be arranged in a line.

**[0127]** The operation button 360 may further have hinges 363 for preventing the first push part 361a and the second push part 361b from simultaneously pressing the first switch 382 and the second switch 384 when a user operates the operation button 360.

**[0128]** For example, the hinges 363 provide pivots protruding on the button body 361 so that the entire operation button 360 is rotated when any one of the first push part 361a and the second push part 361b is pressed.

**[0129]** The hinges 363 may be disposed at both sides from the separation slit 362 so that the entire button body 361 is stably rotated by the hinges 363.

**[0130]** That is, a pair of hinges 363 may protrude from the button body 361 and the separation slit 362 may be disposed between the hinges 363.

**[0131]** The support frame 370 may have a frame body 371 on which the operation button 360 is seated.

**[0132]** The frame body 371 may have a recession 372 to receive at least the reinforcing ribs 364a and 364b of the operation button 360.

**[0133]** The frame body 371 may further have a separator 375 inserted through the separation slit 362 of the operation button 360. The separator 375 may protrude from the bottom 372a of the recession 372.

5 **[0134]** The frame body 371 may have one or more hook holes 378 for locking the button hooks 365a and 365b of the operation button 360.

**[0135]** When the operation button 360 has a plurality of button hooks 365a and 365b, the frame body 371 may also have a plurality of hook holes 378.

10 **[0136]** The frame body 371 may further have projection holes 376 through which the push projections 366a and 366b of the operation button 360 are inserted.

**[0137]** The projection holes 376, for example, may be formed through the bottom 372a of the recession 372.

15 **[0138]** The frame body 371 may have one or more frame hooks 377 to be coupled to the handle cover 340. FIG. 8 shows an example in which the frame body 371 has a plurality of frame hooks 377.

20 **[0139]** A plurality of coupling holes 345 for coupling the frame hooks 377 may be formed at the second cover 342.

**[0140]** The frame body 371 may further have hinge seats 374 in which the hinges 363 of the operation button 360 are seated. For example, a pair of hinge seats 374 may be formed on the frame body 371. Further, the separator 375 may be positioned between the pair of hinge seats 374.

25 **[0141]** The hinge seats 374 may be recessed on the frame body 371 and may have a rounded surface so that the hinges 363 can be rotated.

**[0142]** The heights of the hinge 373 from the button body 360 may be larger than the depths of the hinge sets 374 so that the operation button 360 can be rotated without interference with the frame body 371, with the hinges 363 in the hinge seats 374.

30 **[0143]** That is, the hinges 363 of the operation button 360 may be partially seated in the hinge seats 374.

**[0144]** When the hinge seats 374 are formed on the frame body 371, the portions, which correspond to the hinge seats 374, of the frame body 371 protrude outward. Grooves 346 for receiving the portions protruding outward from the frame body 371 may be formed at the second cover 342.

**[0145]** The hook holes 378 may be larger in size than the button hooks 365a and 365b so that the operation button 360 can be rotated on the hinges 363 with the button hooks 365a and 365b of the operation button 360 fitted in the hook holes 378 of the support frame 370.

35 **[0146]** However, the maximum gap between the button hooks 365a and 365b may be made substantially the same as the maximum gap between the hook holes 378 to keep the button hooks 365a and 365b in the hook holes 378.

40 **[0147]** The minimum gap between the hook holes 378 may be made smaller than the minimum gap between the button hooks 365a and 365b. Accordingly, when the button hooks 365a and 365b are fitted in the hook holes 378, respectively, spaces in which the button hooks 365a

and 365b can move when the operation button 360 is rotated can be formed in the hook holes 378.

**[0148]** The support frame 370 may further have an outer rib 373 protruding along the edge of the frame body 371. When the operation button 360 is coupled to the support frame 370, the outer rib 373 surrounds the outer edge of the operation button 360.

**[0149]** FIG. 10 is a cross-sectional view showing the operation unit of the present invention combined with the handle and FIG. 11 is a view showing a hinge of the operation unit seated in a hinge seat of the support frame.

**[0150]** Referring to FIGS. 6 to 10, the first switch 382 and the second switch 384 may be disposed on a power PCB 380. The power PCB 380 may be electrically connected to a main PCB 390 disposed in the handle 30. The main PCB 390 can supply power to the suction motor 20 and generate control signal for the suction motor 20.

**[0151]** The power PCB 380 may be seated in the second handle body 332 and covered with the handle cover 340 when the handle cover 340 is coupled to the handle body 330.

**[0152]** The first switch 382 and the second switch 384 may be respectively aligned with the holes 344 of the handle cover 340. Further, the switches 382 and 384 are arranged to respectively face the projection holes 376 of the support frame 370.

**[0153]** When the operation unit 350 is combined with the handle cover 340, the push projections 366a and 366b of the operation button 360 may pass through the holes 344 or may be positioned in the holes 344.

**[0154]** However, the push projections 366a and 366b may be spaced from the switches 382 and 384.

**[0155]** Further, when the operation button 360 is coupled to the support frame 370, the hinges 363 of the operation button 360 are seated in the hinge seats 374 of the support frame 370.

**[0156]** As described above, since the heights of the hinges 363 from the button body 360 are larger than the depths of the hinge seats 374, the button body 361 is spaced from the frame body 371 with the hinges 363 seated in the hinge seats 374.

**[0157]** Further, the reinforcing ribs 364a and 364b of the operation button 360 are spaced from the bottom 372a of the recession 372 of the frame body 371 with the hinges 363 seated in the hinge seats 374.

**[0158]** FIG. 12 is a view showing the operation button with the first push part pressed and FIG. 13 is a view showing the positional relationship between the operation button and the support frame in the state shown in FIG. 12.

**[0159]** Referring to FIGS. 2, 12, and 13, a user can push the first push part 361a of the operation button 360 with the first extension 310 of the handle 30 in his/her hand in order to turn on or off the suction motor 20.

**[0160]** When the first push part 361a is pushed, the operation button 360 is rotated counterclockwise about the hinges 363 in the drawings, so the first push projection 366a presses the first switch 382. Accordingly, the

suction motor 20 can be turned on or off.

**[0161]** The first push part 361a may be pressed, for example, by a thumb. Since the first push part 361a and the second push part 361b are arranged up and down, when a user holds the first extension 310 with a hand, the user's thumb may be positioned up and down. In this case, when the user presses the first push part 361a in this state, a portion of his/her thumb may come in contact with the second push part 361b.

**[0162]** However, since the hinges 363 are disposed between the first push part 361a and the second push part 361b in this embodiment, even if a force is independently applied to the first push part 361a and the second push part 361b, when the force applied to the first push part 361a is larger than the force applied to the second push part 361b, the push parts 361a and 361b cannot be simultaneously rotated and the operation button 360 is rotated counterclockwise in the drawings by the force applied to the first push part 361a.

**[0163]** Therefore, according to the present embodiment, it is possible to prevent the push parts 361a and 361b from simultaneously pressing the switches 382 and 384.

**[0164]** FIG. 14 is a view showing the operation button with the second push part pressed and FIG. 15 is a view showing the positional relationship between the operation button and the support frame in the state shown in FIG. 14.

**[0165]** Referring to FIGS. 2, 14, and 15, a user can push the second push part 361b of the operation button 360 with the first extension 310 of the handle 30 in his/her hand in order to adjust the intensity of the suction force the suction motor 20.

**[0166]** When the second push part 361b is pushed, the operation button 360 is rotated clockwise about the hinges 363 in the drawings, so the second push projection 366b presses the second switch 384. Accordingly, the intensity of the suction force of the suction motor 20 can be increased or decreased.

**[0167]** The second push part 361b may be pressed by a thumb, and the first push part 361a and the second push part 361b are arranged up and down, so it is possible to prevent the first push part 361a from being pushed when the second push part 361b is pushed.

**[0168]** Therefore, it is possible to prevent the push parts 361a and 361b from simultaneously pressing the switches 382 and 384.

**[0169]** Further, according to the present embodiment, since the operation button has the first push part and the second push part, it is possible not only to input instructions to turn on and off the suction motor with one finger, but to adjust the intensity of the suction force of the suction motor, so a user can more conveniently use the cleaner.

**[0170]** Further, according to the present embodiment, the operation button is coupled to the support frame with the support frame coupled to the handle cover, and the operation button that has been coupled to the support

frame can be rotated.

**[0171]** Accordingly, the support frame is coupled to the handle cover even if there is a gap between the operation button and the support frame, it is possible to prevent foreign substances flowing inside through the gap between the support frame and the operation button from flowing into the handle. That is, the support frame blocks foreign substances flowing inside, in addition to supporting the operation frame.

## Claims

### 1. A cleaner (1) comprising:

a main body (2);  
 a suction unit (5) coupled to a front of the main body (2) and configured to guide air containing dust into the main body (2);  
 a suction motor (20) having an impeller (200) to generate suction force in the suction unit (5);  
 a handle (30), positioned opposite to the suction unit (5) with respect to the suction motor (20), holding by a user; and  
 a battery housing (60) disposed below the handle (30) to which a battery (40) is detachably coupled,  
 wherein the handle (30) includes a first extension (310) extending upward from the battery housing (60) to be inclined with respect to a longitudinal axis (A1) of the suction unit (5),  
**characterized in that** the handle (30) further includes:

a second extension (320) extending from an upper part the first extension (310) toward the suction motor (20) and having an inclined surface at rear of the second extension (320) inclined with respect to the longitudinal axis (A1) of the suction unit (5); and  
 an operation unit (350) disposed on the inclined surface of the second extension (320) for inputting user instructions, wherein, an air exit (522) is disposed in front of the second extension (320), arranged in a circumferential direction with respect to a rotational axis of the impeller (200), and discharging air that has passed through the suction motor (20) to an outside.

2. The cleaner (1) of claim 1, wherein the suction motor (20) is positioned between the suction unit (5) and the handle (30), and  
 wherein the inclined surface of the second extension (320) is disposed to be inclined with respect to the rotational axis of the impeller (200).

3. The cleaner (1) of claim 1 or 2, wherein a virtual

straight line extending along a slope of the inclined surface of the second extension (320) extends to intersect the rotational axis of the impeller (200) and/or the longitudinal axis (A1) of the suction unit (5).

4. The cleaner (1) of any one of claims 1 to 3, wherein, with respect to the longitudinal axis (A1) of the suction unit (5), the slope of the inclined surface of the second extension (320) is different from a slope extending along a center line of the first extension (310).

5. The cleaner (1) of any one of claims 1 to 4, wherein, with respect to the longitudinal axis (A1) of the suction unit (5), the slope of the inclined surface of the second extension (320) has a smaller angle than the slope extending along the center line of the first extension (310).

6. The cleaner (1) of any one of claims 1 to 5, wherein the suction unit (5), the air exit (522) and the operation unit (350) are sequentially arranged in a front and rear direction of cleaner (1).

7. The cleaner (1) of any one of claims 1 to 6, wherein the handle (30) further includes a stopper (312) extending from the first extension (310) toward the suction unit (5).

8. The cleaner (1) of claim 7, wherein the operation unit (350) is disposed opposite to the stopper (312) with the handle 30 therebetween, and/or wherein the operation unit (350) is positioned higher than the stopper (312).

9. The cleaner (1) of claim 7 or 8, wherein the stopper (312) is spaced apart from the second extension (320).

10. The cleaner of any one of claims 1 to 9, wherein an end portion of the stopper (312) is spaced apart from the main body (2).

11. The cleaner (1) of any one of claims 1 to 10, wherein the handle (30) further includes display unit (322) disposed on the second extension (320) for showing operational state, and wherein the display unit (322) includes a plurality of light emitting devices configured to show an intensity of the suction motor (20).

12. The cleaner (1) of any one of claims 1 to 11, wherein the battery (40) is inserted into the battery housing (60).

13. The cleaner (1) of any one of claims 1 to 12, wherein the battery housing (60) and the first extension (310)

form a continuous surface.

14. The cleaner (1) of any one of claims 1 to 13, wherein, when the battery (40) is coupled to the battery housing (60), a bottom of the battery (40) is configured to be exposed to the outside.

### Patentansprüche

1. Reiniger (1), der aufweist:

einen Hauptkörper (2);  
 eine Saugereinheit (5), die mit einer Vorderseite des Hauptkörpers (2) gekoppelt ist und so konfiguriert ist, dass sie staubhaltige Luft in den Hauptkörper (2) leitet;  
 einen Saugmotor (20) mit einem Laufrad (200) zur Erzeugung einer Saugkraft in der Saugereinheit (5);  
 einen Griff (30), der in Bezug auf den Saugmotor (20) gegenüber der Saugereinheit (5) positioniert ist und von einem Benutzer gehalten wird, und ein Batteriegehäuse (60), das unterhalb des Griffs (30) angeordnet ist und an das eine Batterie (40) abnehmbar gekoppelt ist, wobei der Griff (30) eine erste Verlängerung (310) aufweist, die sich von dem Batteriegehäuse (60) nach oben erstreckt, um in Bezug auf eine Längsachse (A1) der Saugereinheit (5) geneigt zu sein,  
**dadurch gekennzeichnet, dass** der Griff (30) ferner aufweist:

eine zweite Verlängerung (320), die sich von einem oberen Teil der ersten Verlängerung (310) in Richtung des Saugmotors (20) erstreckt und eine geneigte Fläche an der Rückseite der zweiten Verlängerung (320) aufweist, die in Bezug auf die Längsachse (A1) der Saugereinheit (5) geneigt ist; und eine Bedieneinheit (350), die auf der geneigten Fläche der zweiten Verlängerung (320) angeordnet ist, um Benutzeranweisungen einzugeben, wobei ein Luftauslass (522) vor der zweiten Verlängerung (320) angeordnet ist, in einer Umfangsrichtung in Bezug auf eine Rotationsachse des Laufrads (200) angeordnet ist und Luft, die durch den Saugmotor (20) hindurchgeströmt ist, nach außen ausleitet.

2. Reiniger (1) nach Anspruch 1, wobei der Saugmotor (20) zwischen der Saugereinheit (5) und dem Griff (30) positioniert ist, und wobei die geneigte Fläche der zweiten Verlängerung (320) so angeordnet ist, dass sie in Bezug auf die Rotationsachse des Laufrads (200) geneigt ist.

3. Reiniger (1) nach Anspruch 1 oder 2, wobei eine virtuelle gerade Linie, die sich entlang einer Neigung der geneigten Oberfläche der zweiten Verlängerung (320) erstreckt, so verläuft, dass sie die Rotationsachse des Laufrads (200) und/oder die Längsachse (A1) der Saugereinheit (5) schneidet.

4. Reiniger (1) nach einem der Ansprüche 1 bis 3, wobei in Bezug auf die Längsachse (A1) der Saugereinheit (5) die Neigung der geneigten Fläche der zweiten Verlängerung (320) anders ist als eine Neigung, die sich entlang einer Mittellinie der ersten Verlängerung (310) erstreckt.

5. Reiniger (1) nach einem der Ansprüche 1 bis 4, wobei in Bezug auf die Längsachse (A1) der Saugereinheit (5) die Neigung der geneigten Fläche der zweiten Verlängerung (320) einen kleineren Winkel aufweist als die Neigung, die sich entlang der Mittellinie der ersten Verlängerung (310) erstreckt.

6. Reiniger (1) nach einem der Ansprüche 1 bis 5, wobei die Saugereinheit (5), der Luftauslass (522) und die Bedieneinheit (350) hintereinander in einer Vorne-Hinten-Richtung des Reinigers (1) angeordnet sind.

7. Reiniger (1) nach einem der Ansprüche 1 bis 6, wobei der Griff (30) ferner einen Stopper (312) aufweist, der sich von der ersten Verlängerung (310) in Richtung der Saugereinheit (5) erstreckt.

8. Reiniger (1) nach Anspruch 7, wobei die Bedieneinheit (350) gegenüber dem Stopper (312) angeordnet ist und der Griff (30) dazwischenliegt, und/oder wobei die Bedieneinheit (350) höher positioniert ist als der Stopper (312).

9. Reiniger (1) nach Anspruch 7 oder 8, wobei der Stopper (312) von der zweiten Verlängerung (320) beabstandet ist.

10. Reiniger nach einem der Ansprüche 1 bis 9, wobei ein Endabschnitt des Stoppers (312) von dem Hauptkörper (2) beabstandet ist.

11. Reiniger (1) nach einem der Ansprüche 1 bis 10, wobei der Griff (30) ferner eine Anzeigeeinheit (322) aufweist, die an der zweiten Verlängerung (320) angeordnet ist, um den Betriebszustand anzuzeigen, und wobei die Anzeigeeinheit (322) mehrere lichtemittierende Vorrichtungen umfasst, die so konfiguriert sind, dass sie eine Intensität des Saugmotors (20) anzeigen.

12. Reiniger (1) nach einem der Ansprüche 1 bis 11, wobei die Batterie (40) in das Batteriegehäuse (60)

eingesetzt ist.

13. Reiniger (1) nach einem der Ansprüche 1 bis 12, wobei das Batteriegehäuse (60) und die erste Verlängerung (310) eine durchgehende Fläche bilden. 5
14. Reiniger (1) nach einem der Ansprüche 1 bis 13, wobei, wenn die Batterie (40) mit dem Batteriegehäuse (60) gekoppelt ist, ein Boden der Batterie (40) so konfiguriert ist, dass er nach außen freiliegt. 10

## Revendications

1. Aspirateur (1) comprenant : 15

un corps principal (2) ;  
 une unité d'aspiration (5) couplée à l'avant du corps principal (2) et configurée pour guider l'air contenant de la poussière dans le corps principal (2) ;  
 un moteur d'aspiration (20) ayant une turbine (200) pour générer une force d'aspiration dans l'unité d'aspiration (5) ;  
 une poignée (30), positionnée à l'opposé de l'unité d'aspiration (5) par rapport au moteur d'aspiration (20), que tient un utilisateur ; et  
 un logement de batterie (60) disposé sous la poignée (30) auquel une batterie (40) est couplée de manière amovible, 20  
 dans lequel la poignée (30) comprend une première extension (310) s'étendant vers le haut depuis le logement de batterie (60) pour être inclinée par rapport à un axe longitudinal (A1) de l'unité d'aspiration (5), 25  
**caractérisé en ce que** la poignée (30) comprend en outre : 30

une deuxième extension (320) s'étendant à partir d'une partie supérieure de la première extension (310) vers le moteur d'aspiration (20) et ayant une surface inclinée à l'arrière de la deuxième extension (320) inclinée par rapport à l'axe longitudinal (A1) de l'unité d'aspiration (5) ; et 40  
 une unité de commande (350) disposée sur la surface inclinée de la deuxième extension (320) pour entrer les instructions de l'utilisateur, 45  
 dans lequel une sortie d'air (522) est disposée devant la deuxième extension (320), agencée dans une direction circonférentielle par rapport à un axe de rotation de la turbine (200), et évacuant vers l'extérieur l'air qui a traversé le moteur d'aspiration (20). 50

2. Aspirateur (1) de la revendication 1, dans lequel le

moteur d'aspiration (20) est positionné entre l'unité d'aspiration (5) et la poignée (30), et dans lequel la surface inclinée de la deuxième extension (320) est disposée de manière à être inclinée par rapport à l'axe de rotation de la turbine (200).

3. Aspirateur (1) des revendications 1 et 2, dans lequel une ligne droite virtuelle s'étendant le long d'une pente de la surface inclinée de la deuxième extension (320) s'étend pour couper l'axe de rotation de la turbine (200) et/ou l'axe longitudinal (A1) de l'unité d'aspiration (5).
4. Aspirateur (1) de l'une quelconque des revendications 1 à 3, dans lequel, par rapport à l'axe longitudinal (A1) de l'unité d'aspiration (5), la pente de la surface inclinée de la deuxième extension (320) est différente d'une pente s'étendant le long d'une ligne centrale de la première extension (310).
5. Aspirateur (1) de l'une quelconque des revendications 1 à 4, dans lequel, par rapport à l'axe longitudinal (A1) de l'unité d'aspiration (5), la pente de la surface inclinée de la deuxième extension (320) a un angle plus petit que la pente s'étendant le long de la ligne centrale de la première extension (310).
6. Aspirateur (1) de l'une quelconque des revendications 1 à 5, dans lequel l'unité d'aspiration (5), la sortie d'air (522) et l'unité de commande (350) sont disposées de manière séquentielle dans une direction avant et arrière de l'aspirateur (1).
7. Aspirateur (1) de l'une quelconque des revendications 1 à 6, dans lequel la poignée (30) comprend en outre une butée (312) s'étendant depuis la première extension (310) vers l'unité d'aspiration (5).
8. Nettoyeur (1) de la revendication 7, dans lequel l'unité de commande (350) est disposée à l'opposé de la butée (312) avec la poignée (30) entre les deux, et/ou dans lequel l'unité de commande (350) est positionnée plus haut que la butée (312).
9. Aspirateur (1) selon les revendications 7 et 8, dans lequel la butée (312) est espacée de la deuxième extension (320).
10. Aspirateur de l'une quelconque des revendications 1 à 9, dans lequel une partie d'extrémité de la butée (312) est espacée du corps principal (2).
11. Aspirateur (1) selon l'une quelconque des revendications 1 à 10, dans lequel la poignée (30) comprend en outre une unité d'affichage (322) disposée sur la deuxième extension (320) pour indiquer l'état de fonctionnement, et

dans lequel l'unité d'affichage (322) comprend une pluralité de dispositifs électroluminescents configurés pour indiquer l'intensité du moteur d'aspiration (20).

5

**12.** Aspirateur (1) de l'une quelconque des revendications 1 à 11, dans lequel la batterie (40) est insérée dans le logement de batterie (60).

**13.** Aspirateur (1) de l'une quelconque des revendications 1 à 12, dans lequel le logement de batterie (60) et la première extension (310) forment une surface continue.

10

**14.** Aspirateur (1) de l'une quelconque des revendications 1 à 13, dans lequel, lorsque la batterie (40) est couplée au logement de batterie (60), un fond de la batterie (40) est configuré pour être exposé à l'extérieur.

15

20

25

30

35

40

45

50

55

Fig.1

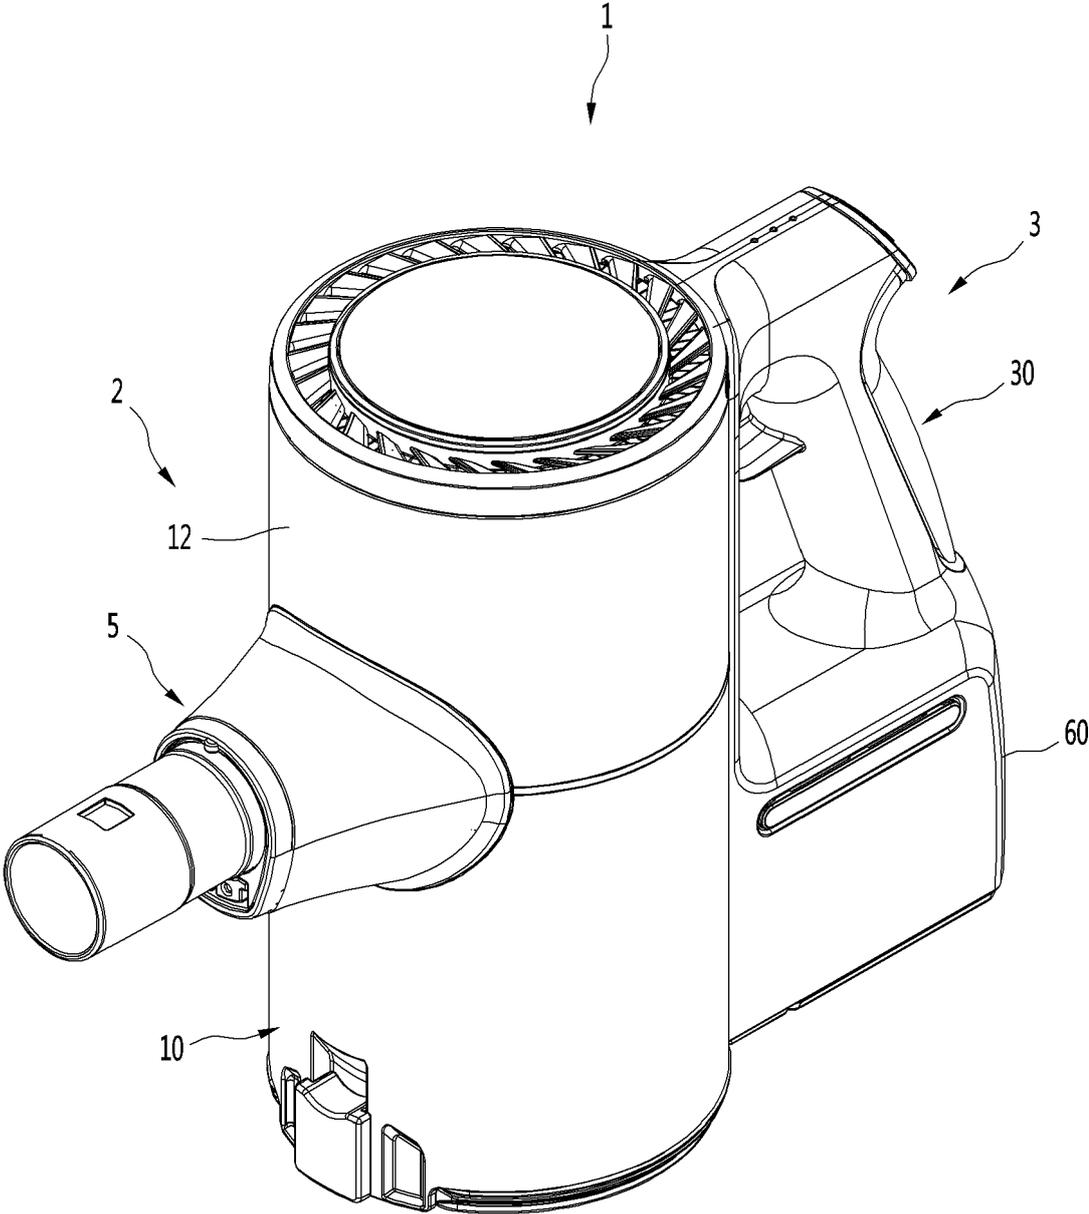


Fig.2

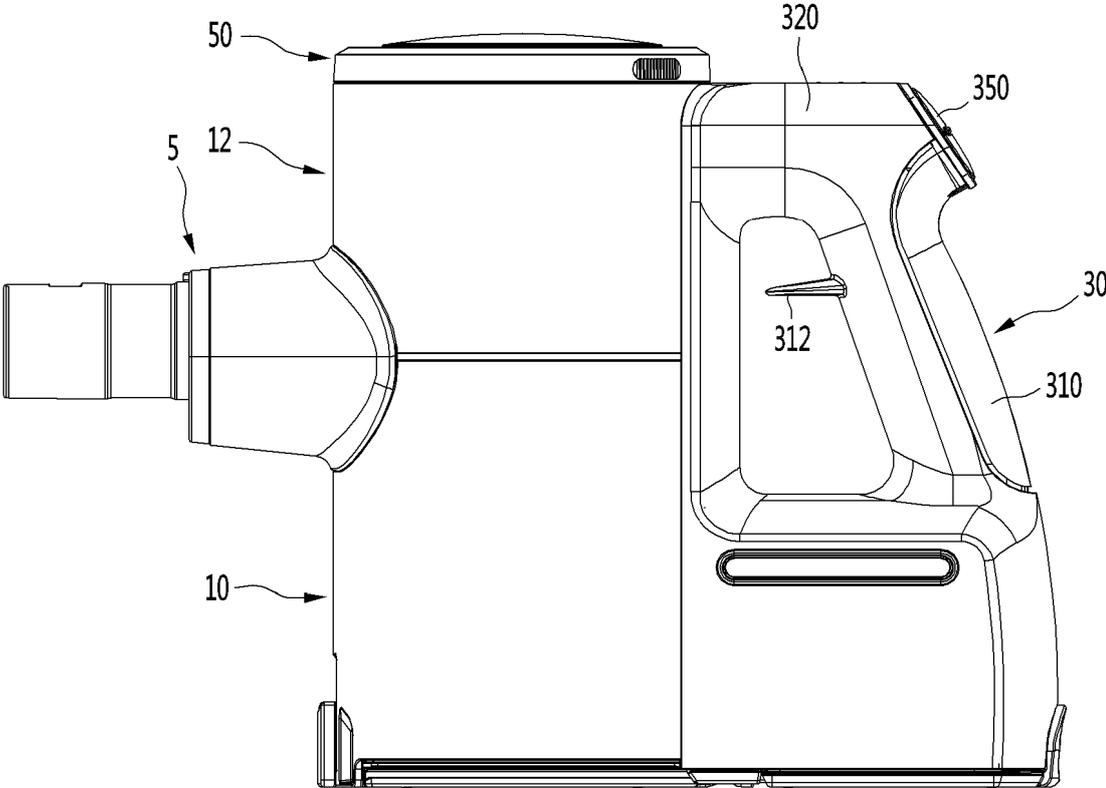


Fig.3

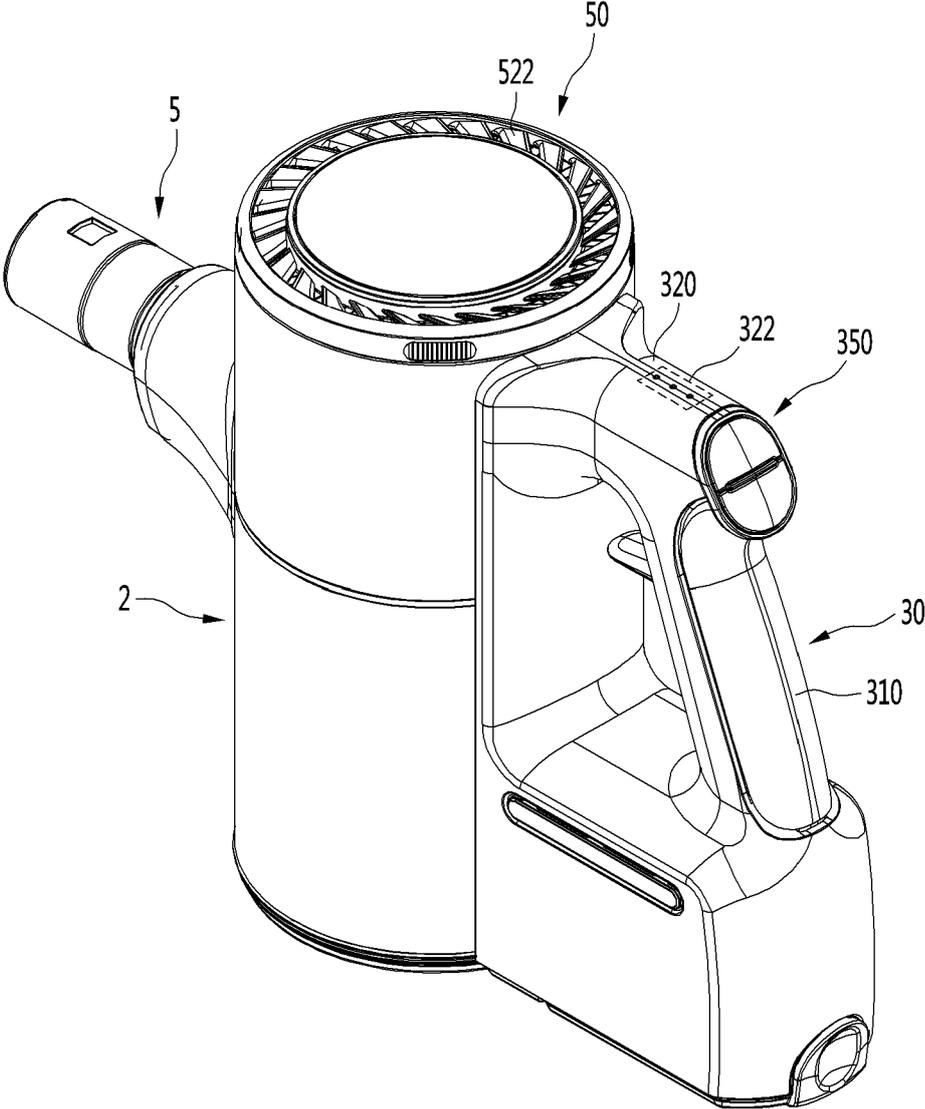


Fig.4

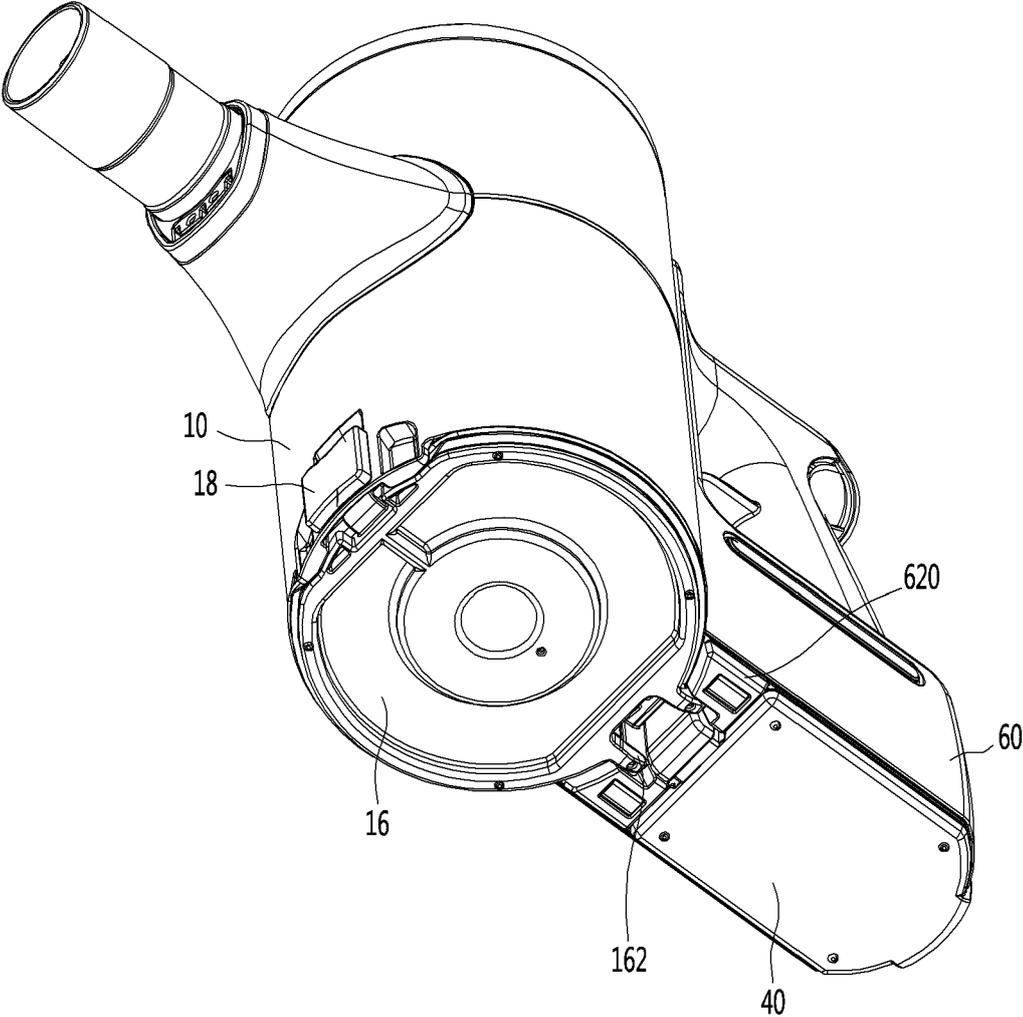


Fig.5

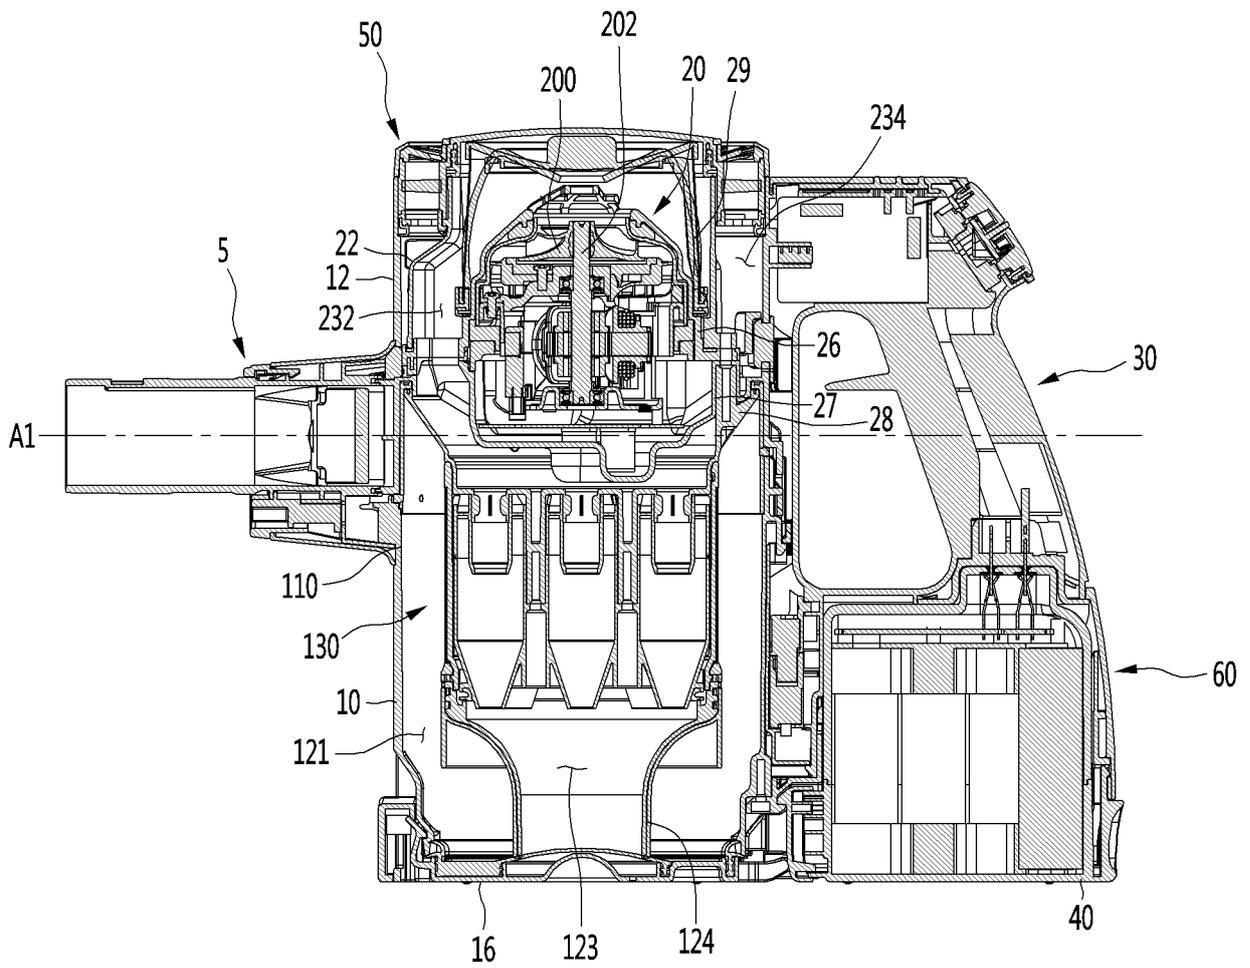


Fig.6

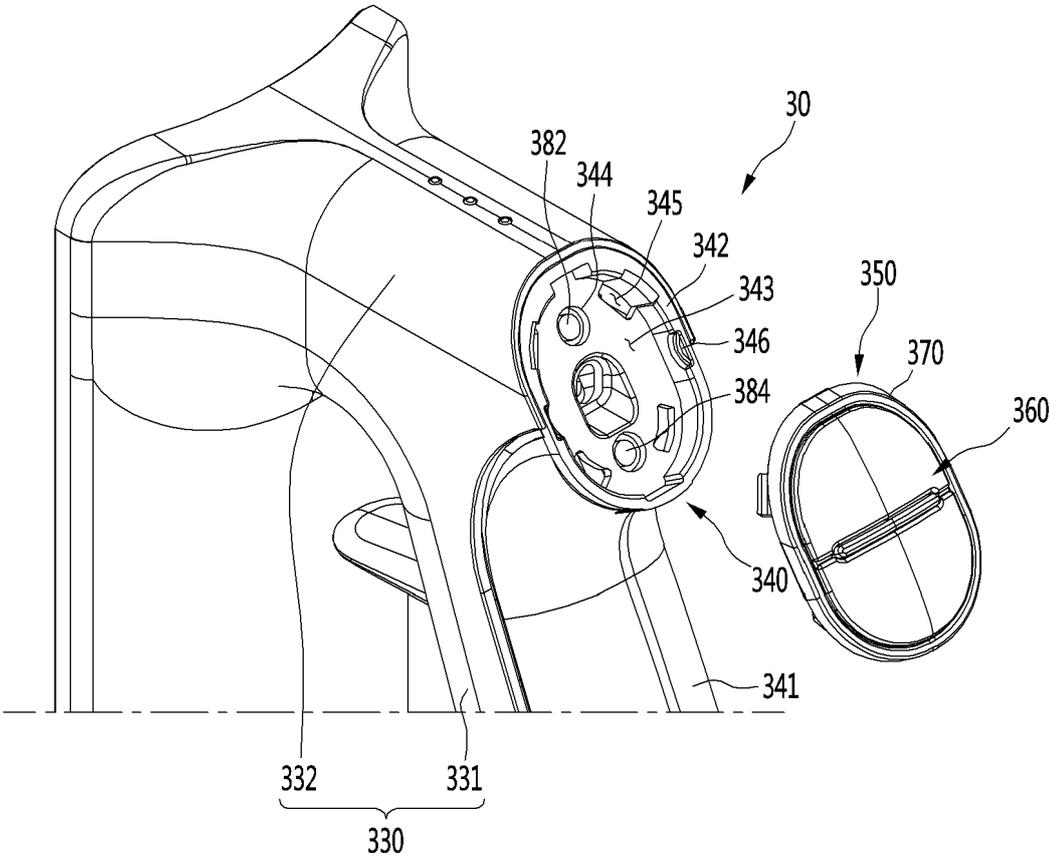


Fig.7

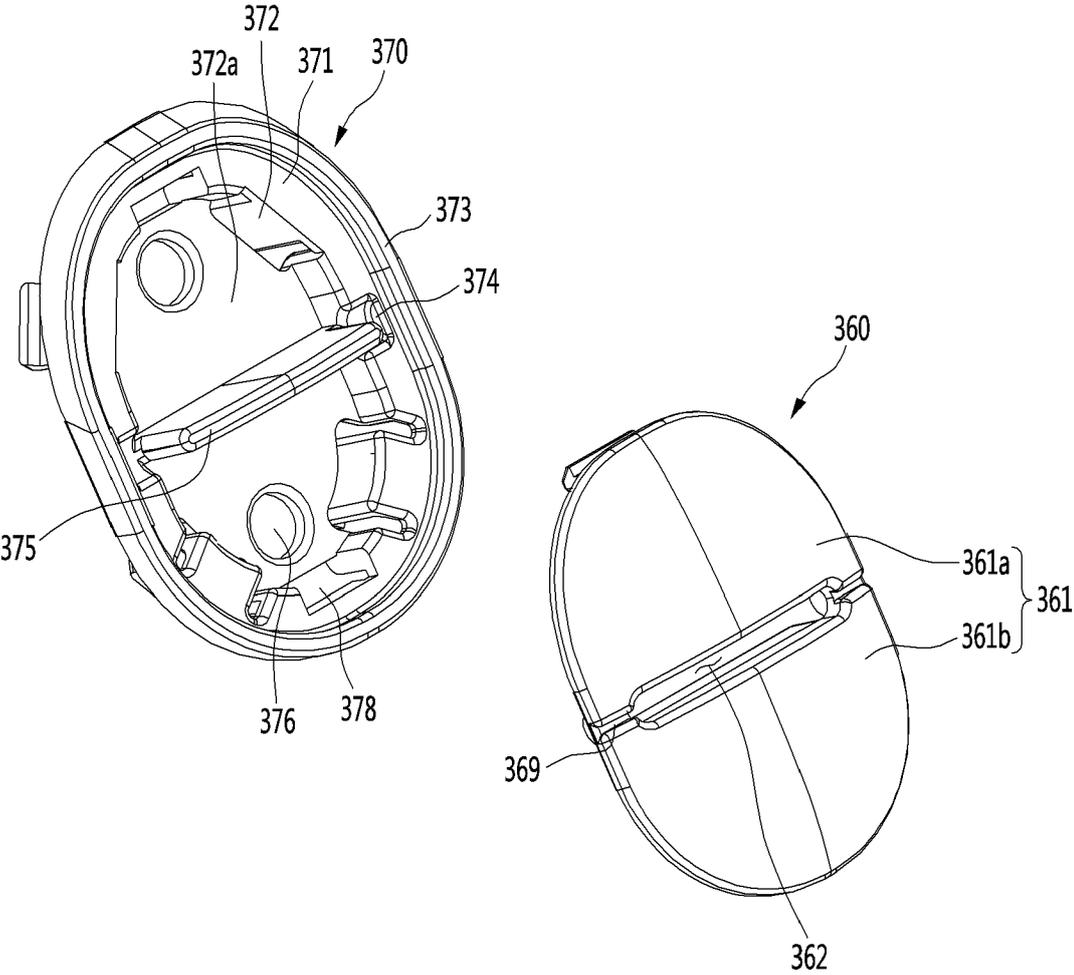


Fig.8

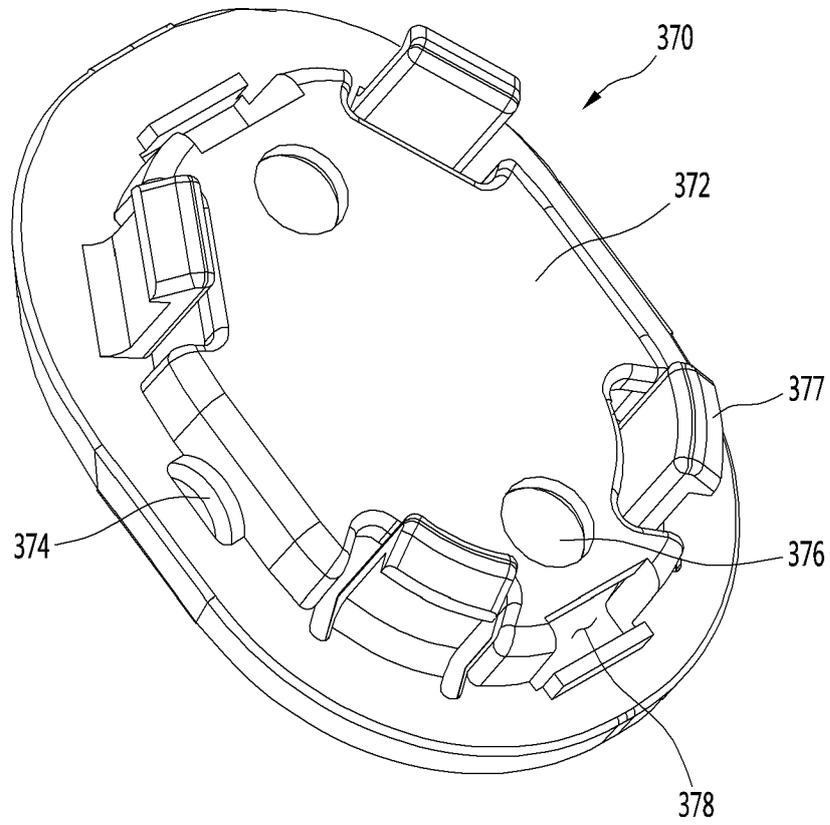


Fig.9

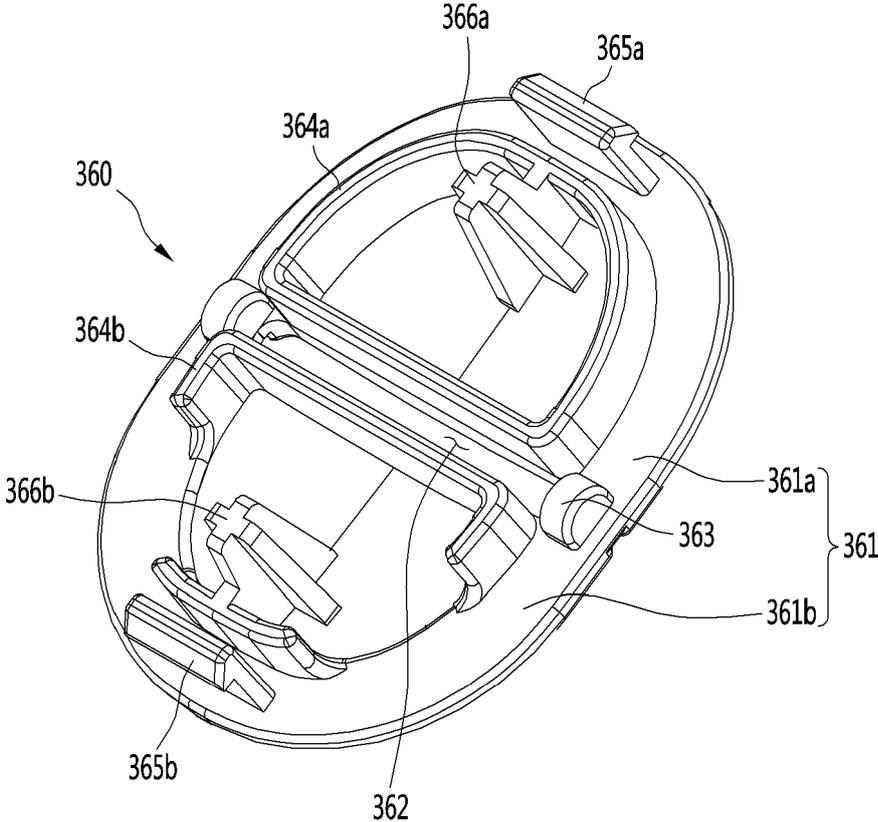


Fig.10

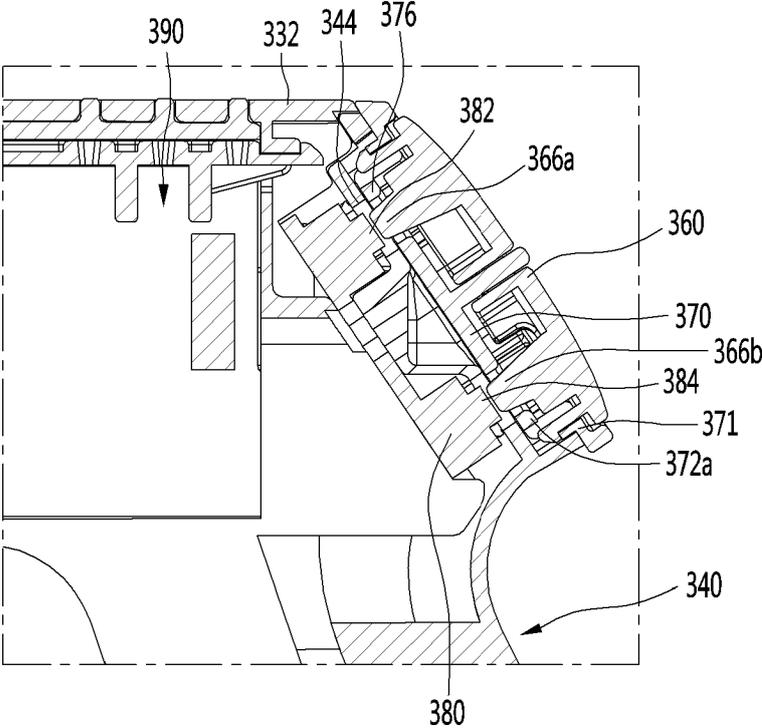


Fig. 11

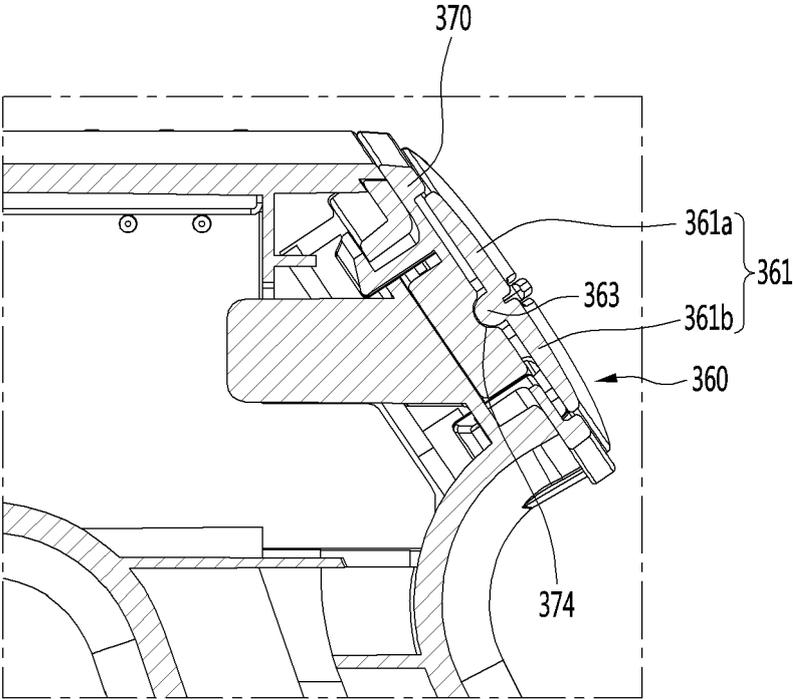


Fig.12

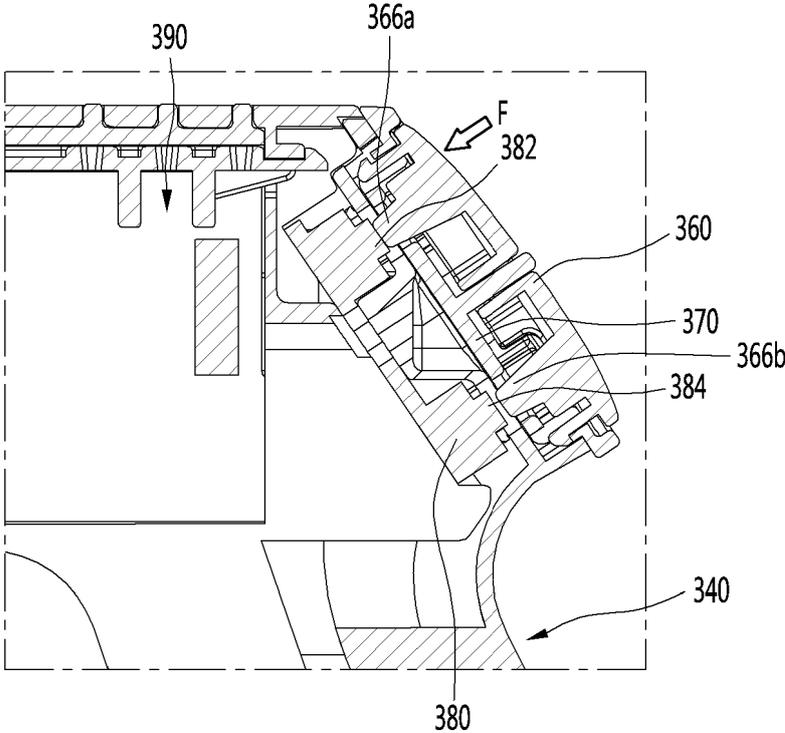


Fig. 13

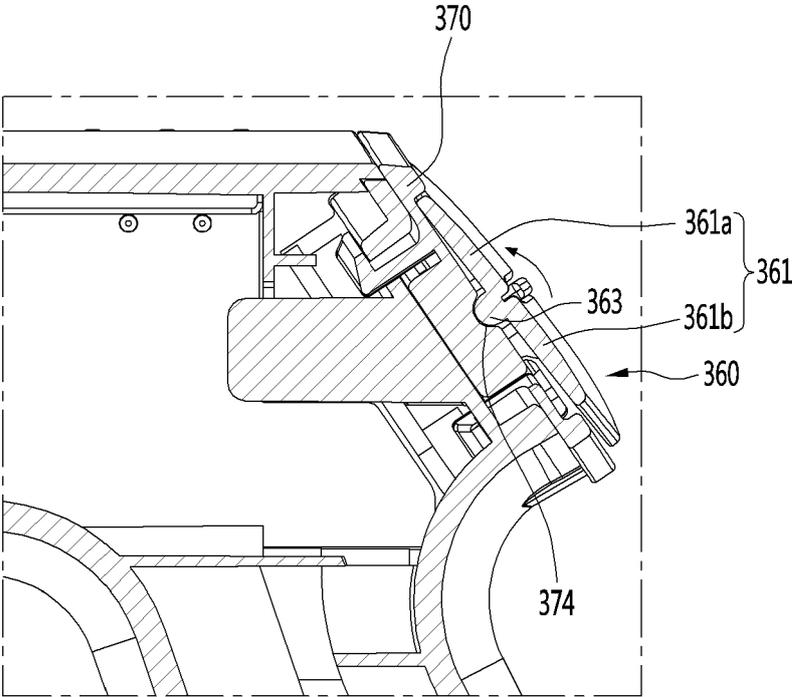


Fig.14


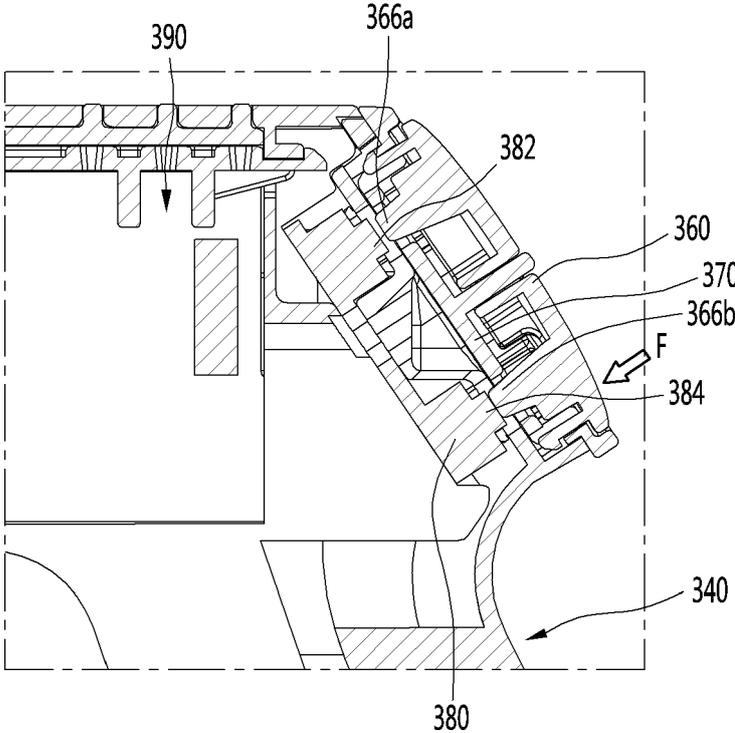


Fig.15

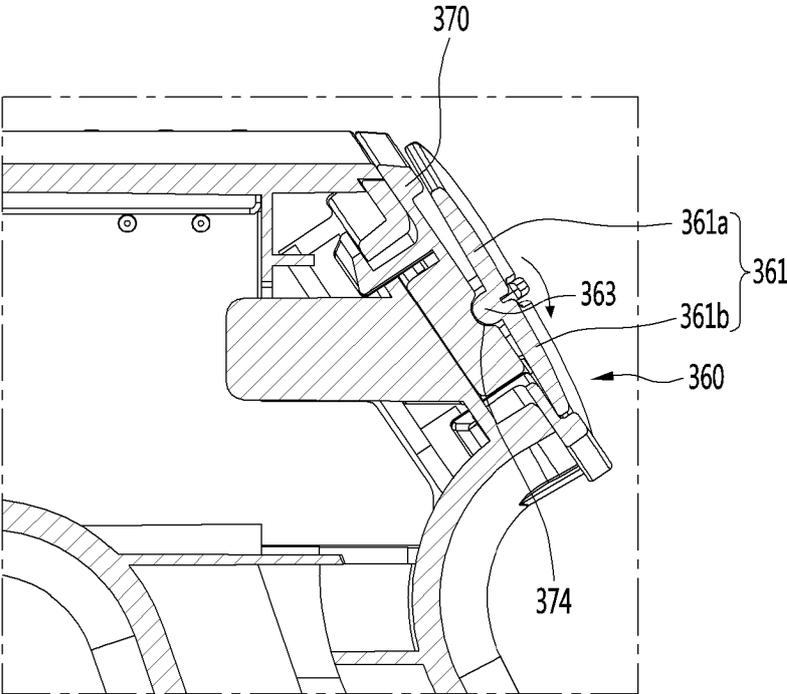

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- KR 101127088 [0005]
- EP 2811885 A1 [0010]
- US 5884358 A [0010]
- US 3766347 A [0010]