



(86) Date de dépôt PCT/PCT Filing Date: 2003/02/20

(87) Date publication PCT/PCT Publication Date: 2003/08/28

(45) Date de délivrance/Issue Date: 2010/06/22

(85) Entrée phase nationale/National Entry: 2004/08/19

(86) N° demande PCT/PCT Application No.: GB 2003/000754

(87) N° publication PCT/PCT Publication No.: 2003/071178

(30) Priorité/Priority: 2002/02/20 (GB0204003.8)

(51) Cl.Int./Int.Cl. *F16L 21/06* (2006.01)

(72) Inventeurs/Inventors:

WEBB, IAN RICHARD, GB;

TAYLOR, NEIL JOHN THORNTON, GB


(73) Propriétaire/Owner:

TAYLOR KERR (COUPLINGS) LIMITED, GB

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : DISPOSITIF D'ANCRAGE POUR RACCORD

(54) Title: ANCHORING DEVICE FOR PIPE COUPLING

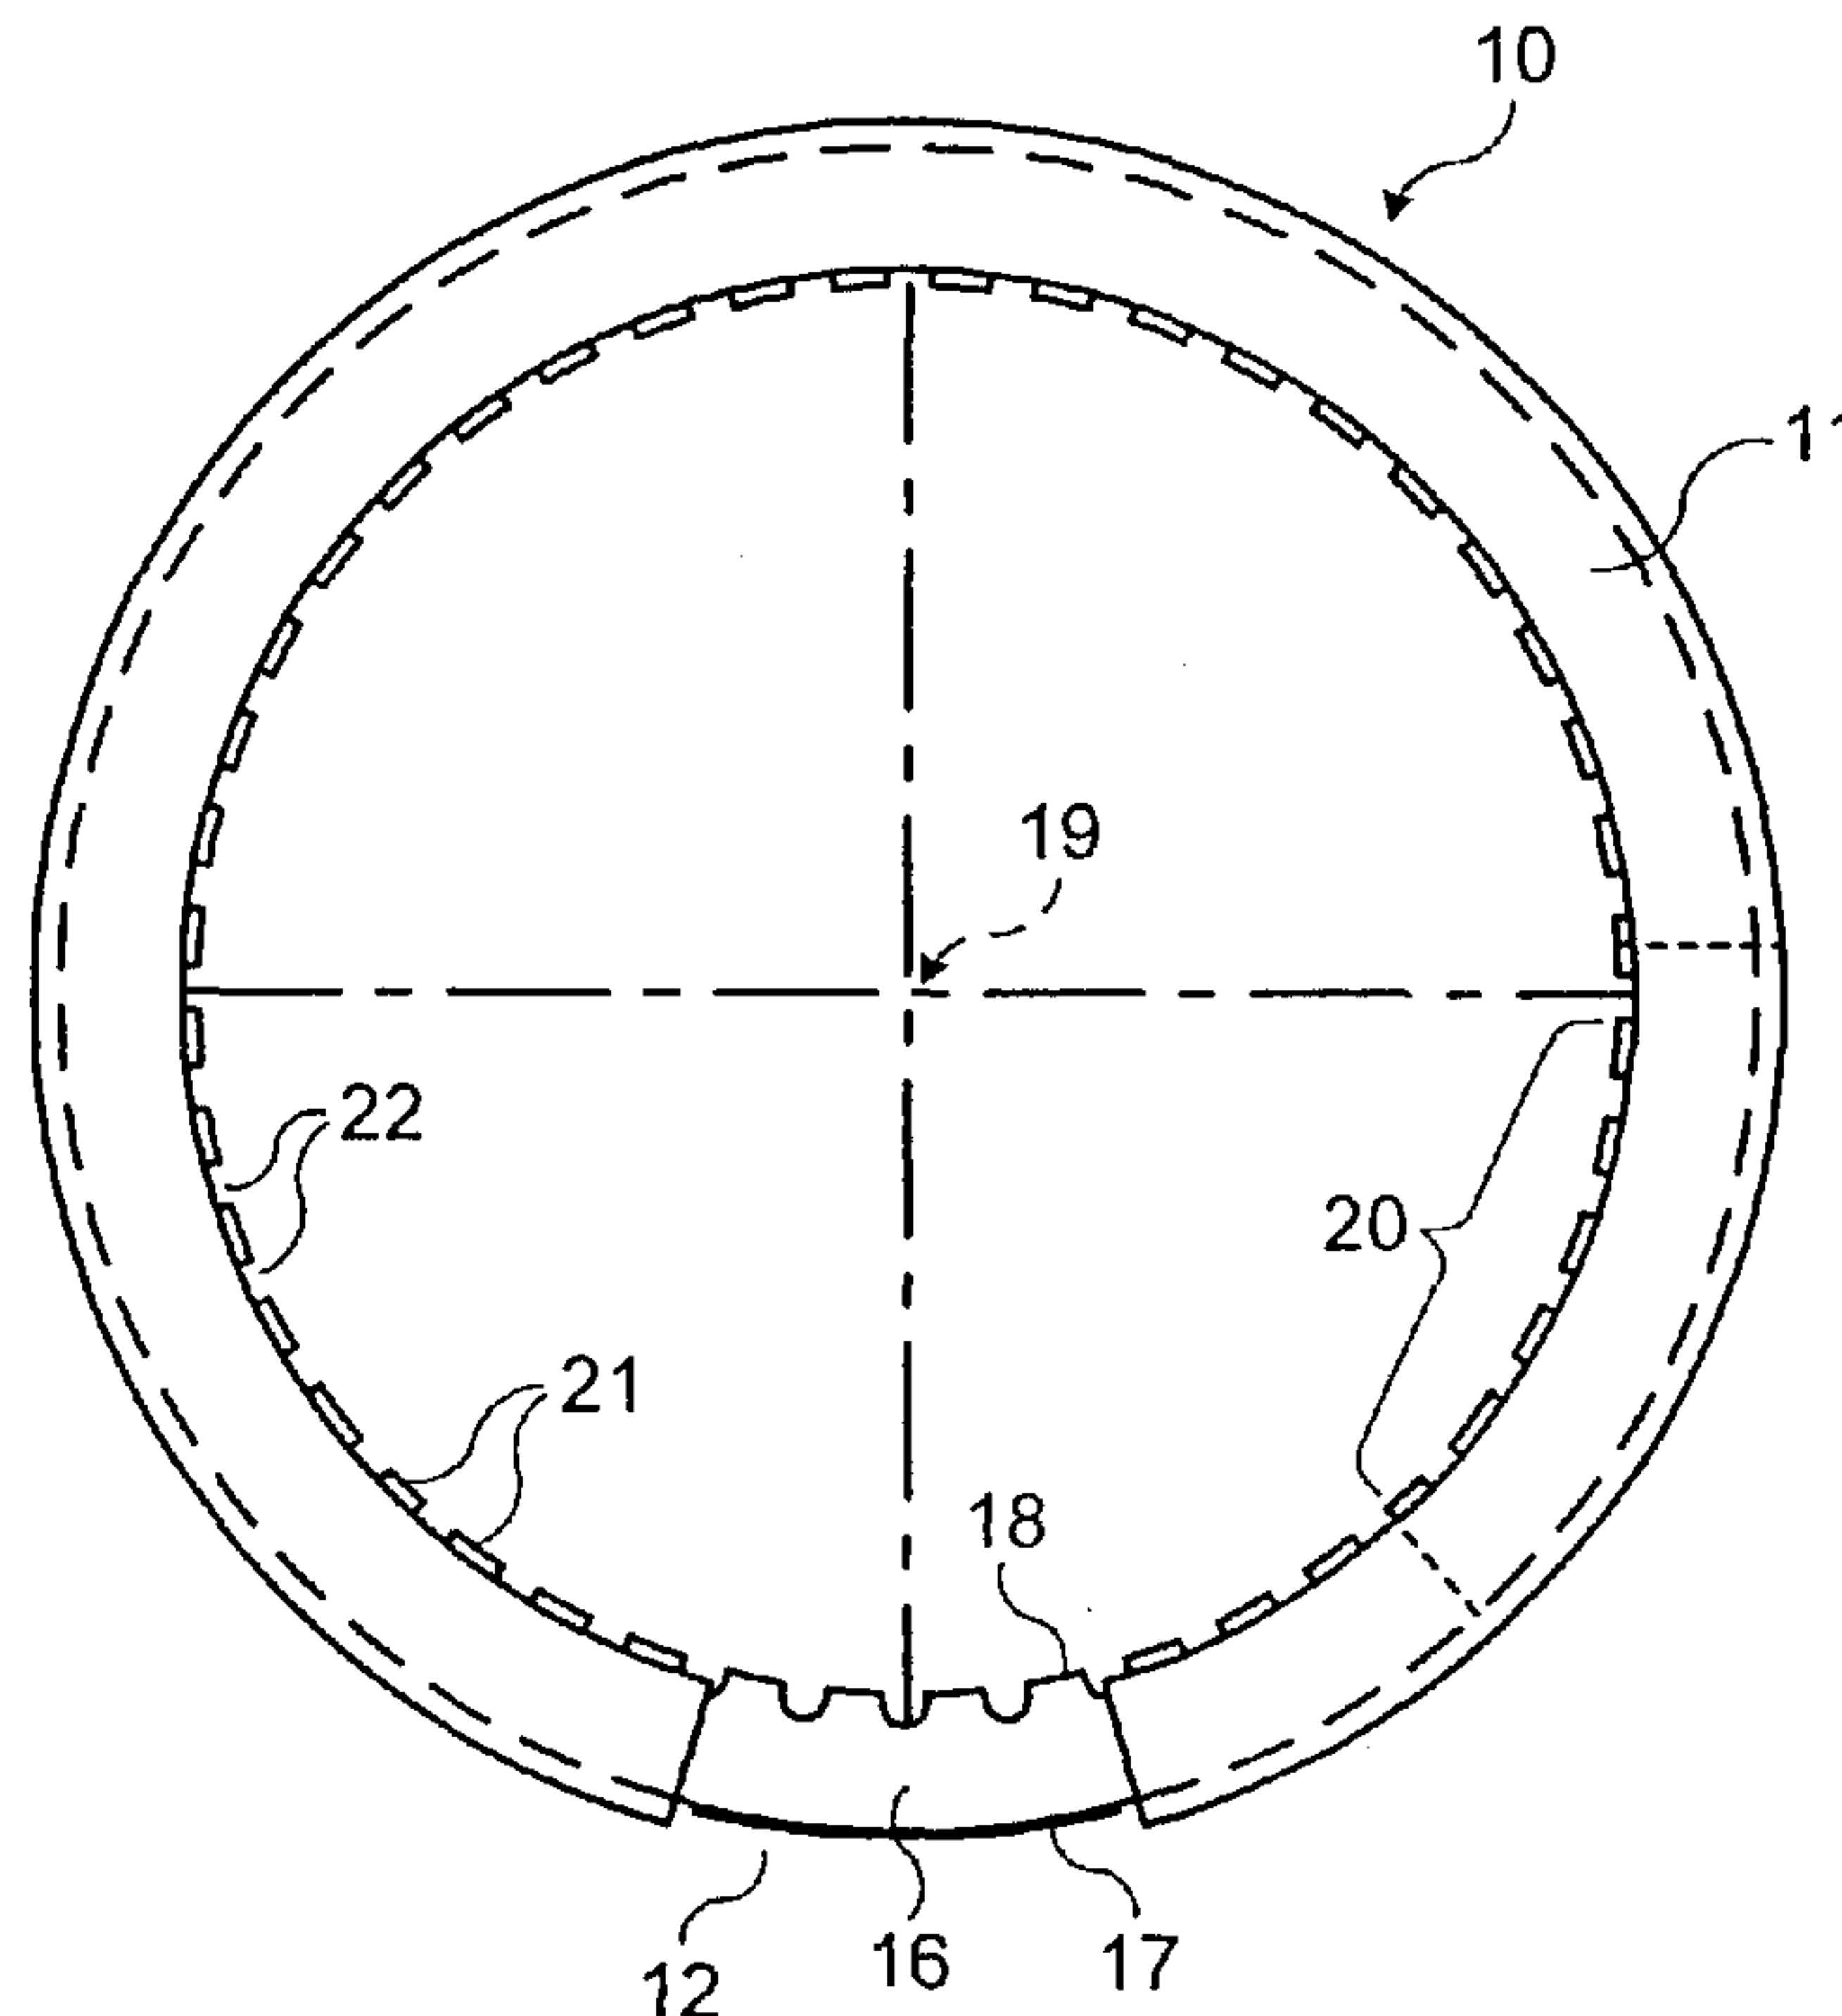

(57) Abrégé/Abstract:

An anchoring device (10) for a pipe coupling comprises an annular channel (11) of generally U-shaped cross-section. The channel has a web portion (13) with flanges (14) and (15) projecting radially inwardly for its circumferential edges. A frusto-conical gripping ring (16) is located in the channel (11) with its outer edge (17) inside the web portion (13) adjacent one of the flanges (14) and its inner edge (18) adjacent the other flange (15) and projecting inwardly beyond the said other flange. The annular channel forms an incomplete ring and is compressible circumferentially. The anchoring device is fitted inside a clamping device (40), which fits around a pipe coupling. The clamping device (40) has tensioning means (50) which tighten the clamping device around the pipe, compressing the annular channel (11) and causing the inner edge (18) of the frusto-conical gripping ring (16) to engage the outer surface of the pipe and thus grip the pipe.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 03/071178 A1

(51) International Patent Classification⁷: **F16L 21/06**

(74) Agent: **BRERETON, Paul, Arthur**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(21) International Application Number: PCT/GB03/00754

(22) International Filing Date: 20 February 2003 (20.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0204003.8 20 February 2002 (20.02.2002) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **TAYLOR KERR (COUPLINGS) LIMITED** [GB/GB]; Disraeli House, 12 Aylesbury End, Old Beaconsfield, Buckinghamshire HP9 1LW (GB).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **WEBB, Ian, Richard** [GB/GB]; 57 The Uplands, Gerrards Cross, Buckinghamshire SL9 7JQ (GB). **TAYLOR, Neil, John, Thornton** [GB/GB]; 44 Pheasants Way, Rickmansworth, Hertfordshire WD3 2HA (GB).

Published:


— with international search report

[Continued on next page]

(54) Title: ANCHORING DEVICE FOR PIPE COUPLING

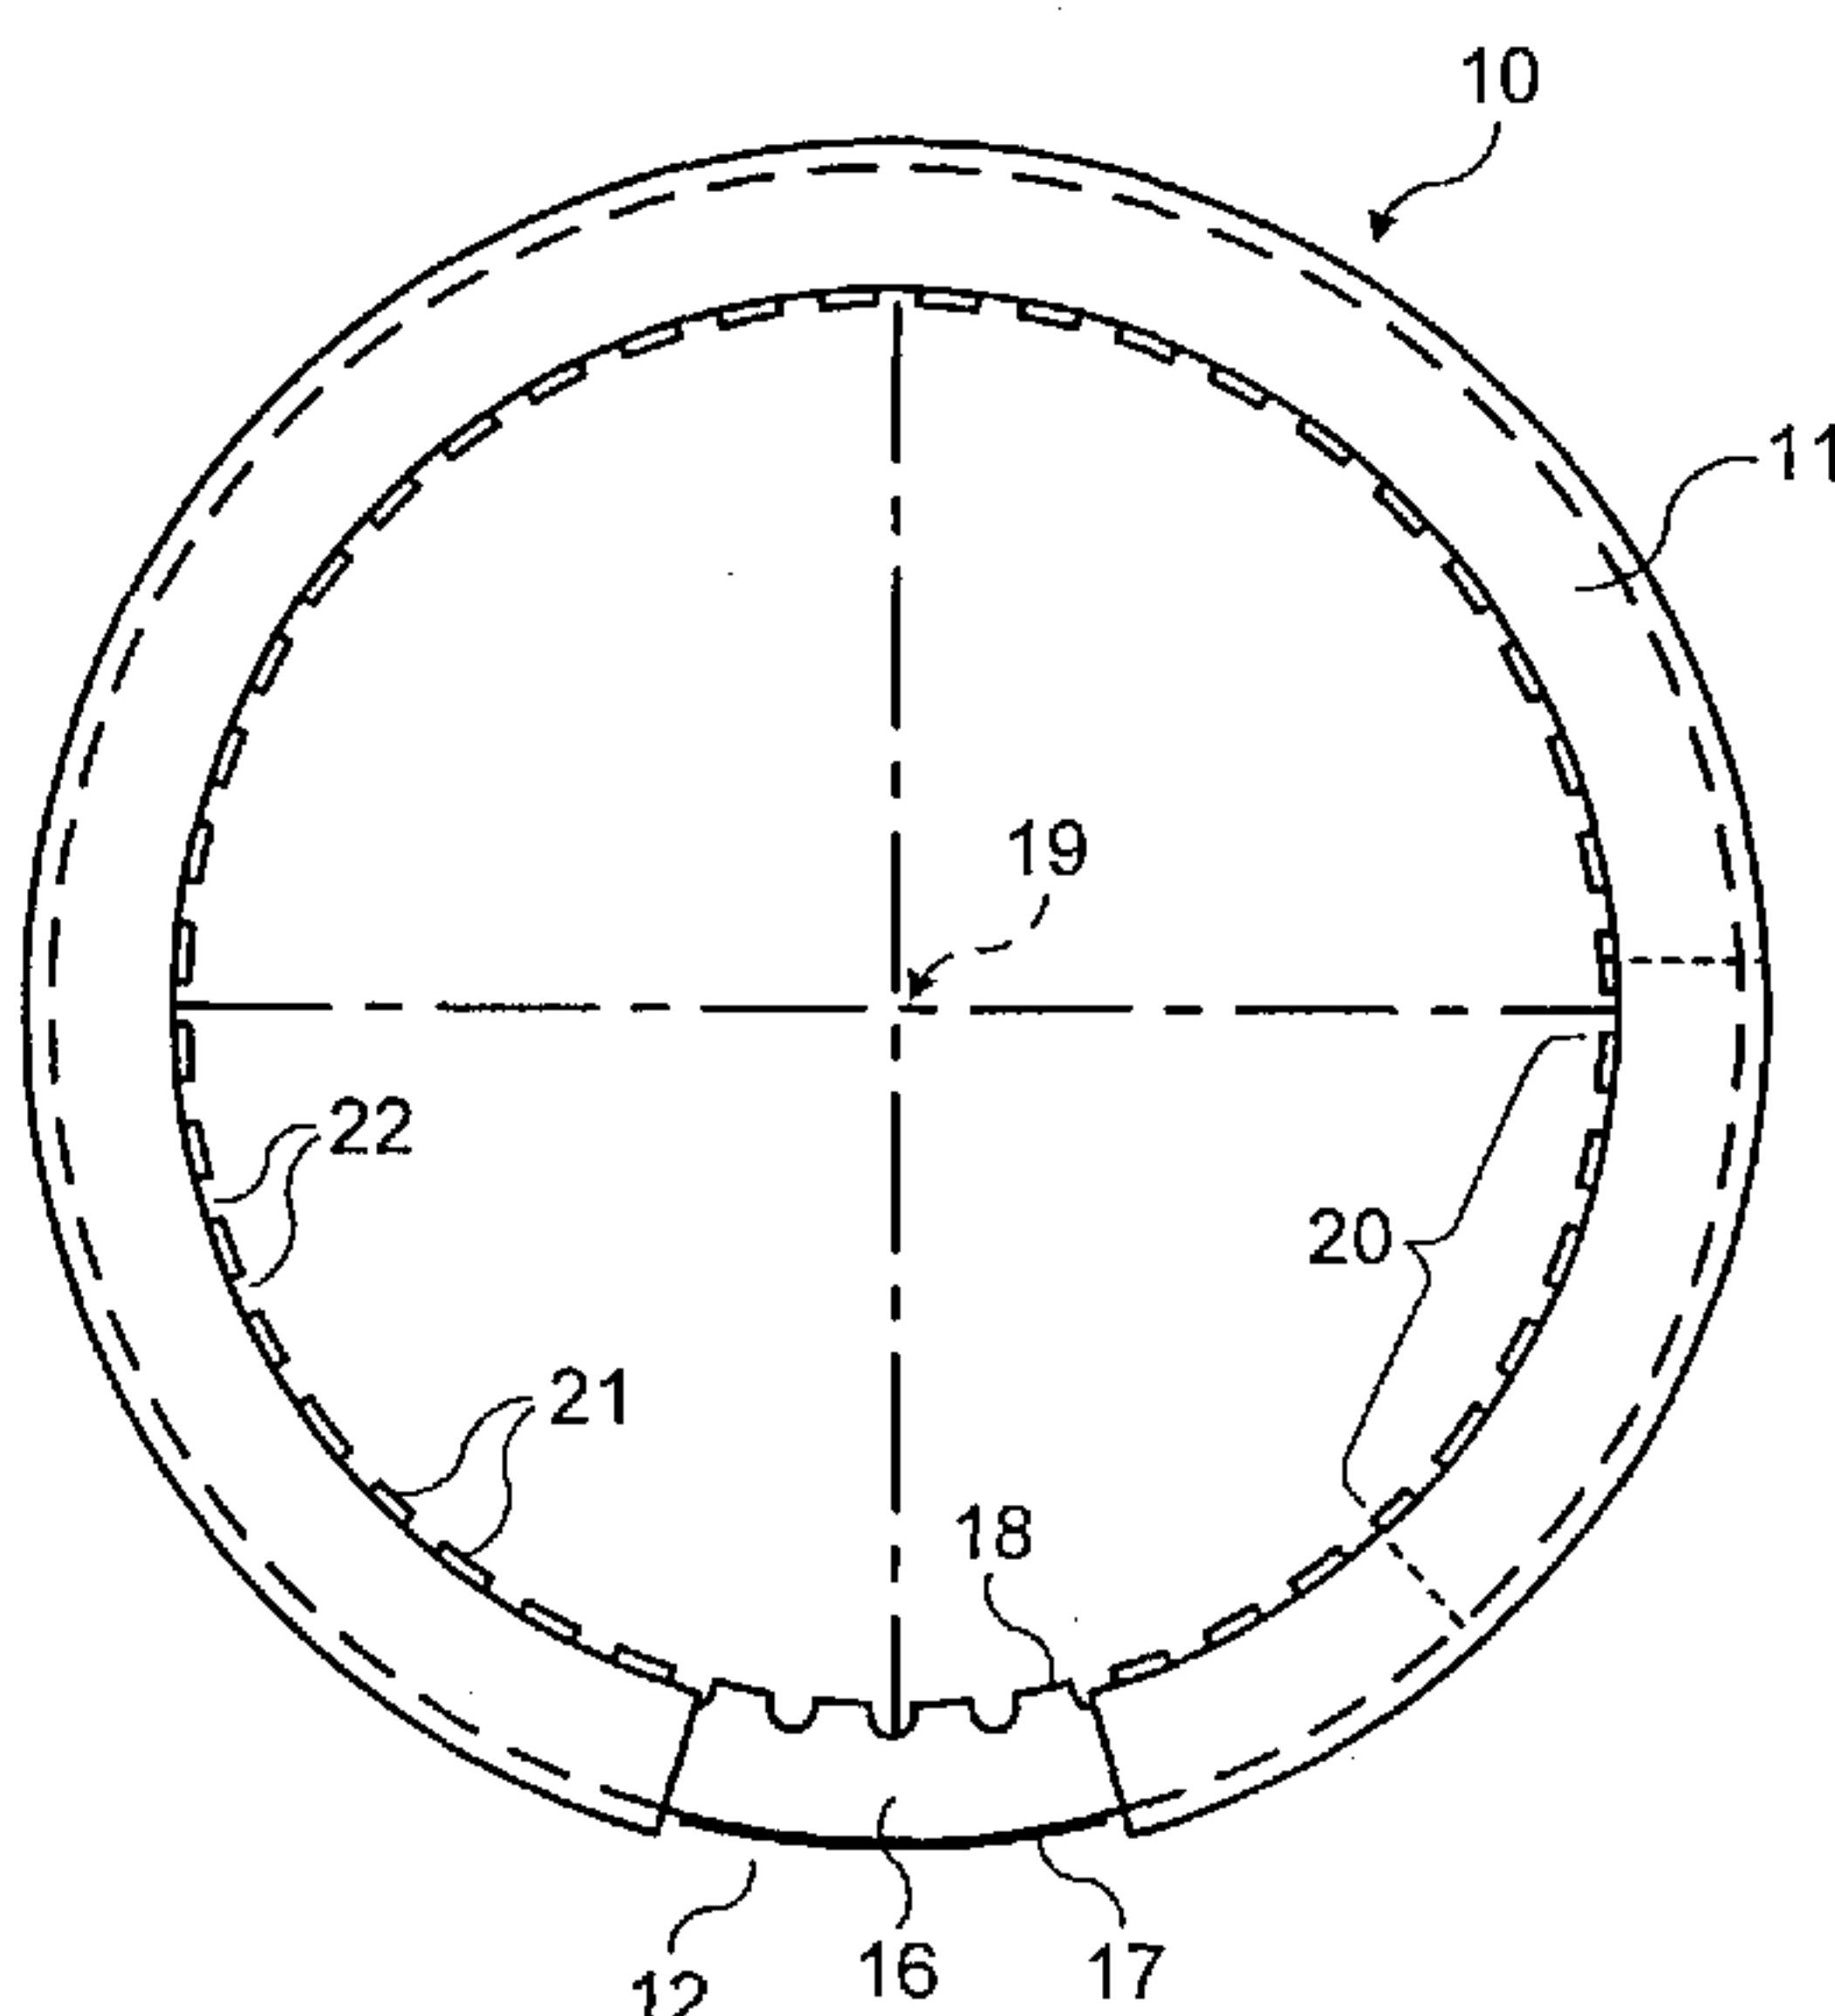

(57) Abstract: An anchoring device (10) for a pipe coupling comprises an annular channel (11) of generally U-shaped cross-section. The channel has a web portion (13) with flanges (14) and (15) projecting radially inwardly for its circumferential edges. A frusto-conical gripping ring (16) is located in the channel (11) with its outer edge (17) inside the web portion (13) adjacent one of the flanges (14) and its inner edge (18) adjacent the other flange (15) and projecting inwardly beyond the said other flange. The annular channel forms an incomplete ring and is compressible circumferentially. The anchoring device is fitted inside a clamping device (40), which fits around a pipe coupling. The clamping device (40) has tensioning means (50) which tighten the clamping device around the pipe, compressing the annular channel (11) and causing the inner edge (18) of the frusto-conical gripping ring (16) to engage the outer surface of the pipe and thus grip the pipe.



WO 03/071178 A1

WO 03/071178 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- 1 -

Anchoring Device for Pipe Coupling

The present invention relates to pipe couplings and is concerned with a system for anchoring pipes to lock them axially together. It has particular application where it is necessary to adapt existing pipe joining methods, such as clamps, collars or bell ends, to accommodate means for axially restraining them.

Some known pipe couplings have been designed which have no provision for axial restraint. Changes in circumstances may require such couplings to perform to a higher specification than that of the original design. This leads to a requirement for axial locking of the pipes to be added to the coupling. Attempts to envelope the existing coupling by an external gripping means have been expensive, clumsy, bulky and heavy and aesthetically displeasing which is unacceptable in applications such as drainage pipes for buildings where the pipework is often visible.

There is a need for a self-contained anchoring device which can be employed with various different existing designs of pipe joining systems to enable the pipes to be axially restrained.

According to the present invention there is provided an anchoring device for a pipe coupling comprising an annular channel of generally U-shaped cross-section having a web portion with flanges projecting radially inwardly from the longitudinal ends of the web portion, and a frusto-conical gripping ring located in the channel, the outer edge of the gripping ring being located inside the web portion of the annular channel adjacent one of the radially inwardly projecting flanges, the inner edge of the gripping ring being adjacent the other radially inwardly projecting

- 2 -

flange and projecting radially inwardly beyond the said other flange, the annular channel being compressible circumferentially so that when the anchoring device is placed around a pipe of appropriate size and the annular
5 channel is compressed, the inner edge of the frusto-conical gripping ring engages the outer surface of the pipe.

The annular gripping ring of the present invention provides a self-contained means for gripping a pipe. It
10 is independent of the other prime function of a pipe joint, namely sealing. It will resist end load and will resist internal pressure.

Most known pipe couplings which have axial restraint are in the form of a cast iron or sheet metal housing with a
15 flange at 90° to the pipe surface which either itself engages a corresponding groove or shoulder on the pipe surface or provides a surface against which an anchoring device is placed that will grip the pipe end surface. In either case, the strength of the material of the housing
20 is critical in determining the strength of the actual restraint. Thus, in many cases, the known clamping device can be disproportionately bulky in relation to the pipework it connects.

In the present invention, the forces generated by the
25 axial restraint system where the gripping ring engages the pipe on its inner periphery and is supported by the flange and web portion on its outer periphery are entirely contained by the channelled ring which encapsulates the gripping ring except on the inside of the channel where
30 the channel is open to allow the inner edge of the gripping ring to project out of the channel to grip the pipe surface.

- 3 -

An anchoring device according to the invention may be used, for example, in conjunction with lightweight pipe joining clamps previously designed purely for gravity applications such as drainage pipes to convert them into a system capable of withstanding working pressures such as 16 bar and test pressures up to 64 bar. Jointing systems such as push-fit spigot and socket systems can now be converted to axial restraint systems by means of a simple sheet metal clamp that contains an anchoring device in accordance with the invention. Previously, it would have been necessary to cut off the ends of the pipe to enable a straight plain ended connector to be used, or to have a special clamp substantially larger than the profile of the push-fit joint that would clamp over the top and hold the pipes in place. Due to the bulk and varying length of such systems, a simple conversion of such pipe joints from non-restrained to restrained across a range of pipe diameters required by the piping industry has proved impossible in an economically viable way.

Preferably, the annular channel is an incomplete ring. The interior diameter of the web portion of the annular channel is smaller than the external diameter of the gripping ring in the unstressed condition so that the gripping ring is a tight fit in the channel. The annular channel has a circumferential gap so as to allow it to be compressed in use in order to allow the inner edge of the gripping ring to engage the pipe. The internal radial height of the flanges from the web portion is less than the overall width of the gripping ring measured in the radial direction so that the gripping ring projects inwardly beyond the flanges.

The inner edge of the gripping ring may be formed with a series of teeth to bite into the outer surface of the pipe when the ring is compressed. The gripping ring may extend more than 360° around the axis of the anchoring device so

- 4 -

that the ends of the gripping ring overlap. The teeth may be flat in the conical plane of the gripping ring so as not to interfere with one another where they overlap when the anchoring device is compressed.

- 5 The anchoring device may be fitted into any suitable clamping device which fits over the pipe coupling. When the clamping device is tightened, the gap in the annular channel is reduced tightening the gripping ring around the pipe and causing it to engage the pipe surface.
- 10 When pressure is applied to the pipes, either in the form of a dead weight or by hydrostatic pressure, the pipe attempts to pull from the fitting causing the gripping ring to attempt to rotate or flatten inside the annular channel. It has been found that such rotational or
- 15 flattening forces may easily be resisted by conventional clamping means used for clamping pipes intended for use in gravity pipe systems.

An embodiment of the invention will now be described by way of example with reference to the accompanying drawings of which:

20

Figure 1 shows a side view of an anchoring device in accordance with the invention;

Figure 2 shows an underneath plan view of the pipe anchoring device of Figure 1;

25 Figure 3 shows a front view, partly in section of the anchoring device of Figures 1 and 2; and

Figure 4 shows a perspective view of an anchoring device in accordance with Figures 1, 2 and 3 fitted in a clamping device with a spigot and socket push-fit pipe coupling.

30

Referring to Figure 1, an anchoring device 10 comprises an annular channel 11 formed as an incomplete ring with a circumferential gap 12. The channel has a web portion 13 with flanges 14 and 15 projecting radially inwardly from the axial ends of the web portion. The channel 11 is formed from sheet steel.

An annular gripping ring 16 is of frusto-conical form with an outer edge 17 and an inner edge 18, the outer edge 17 and the inner edge 18 defining a conical plane of the gripping ring 16 therebetween. The ring 16 subtends an angle of greater than 360° at the axis 19 of the device so as to overlap in the region 20. The inner edge of the gripping ring 16 is formed with teeth 21 which are separated from one another by gaps 22. The inner edges of the teeth are machined to provide sharp edges which can bite into the outer surface of a pipe. The teeth are not bent but flat so as to lie in the conical plane of the gripping ring so that they can pass smoothly over one another as the ring is compressed. The annular gripping ring is of steel.

As can be seen particularly in Figure 3, the gripping ring 16 is snapped into the annular channel and fits with its outer edge 17 in the angle formed between the web portion 13 and the flange 14. The overall radial dimension h of the gripping ring 16 is greater than the radial dimension r of the flanges 14 and 15 so that the inner edge 18 of the annular ring with its gripping teeth 21 projects inwardly beyond the flanges 14 and 15. The inner edge 18 of the gripping ring is adjacent and supported by the flange 15.

Figure 4 shows a spigot and socket push-fit pipe coupling comprising a pipe 30 with a socket end 31 and a pipe 32 with a plain spigot end 33. A rubber seal 35 is inserted in the socket end 31 and the spigot end 33 of the pipe 32 can be pushed inside the seal 35 of the pipe 32 to form a push-fit sealed pipe coupling.

An anchoring device 10 in accordance with Figures 1 to 3 is located in a clamping device 40 formed of pressed metal which fits around the spigot and socket coupling. The anchoring device is arranged so that the inner edge of the gripping ring faces towards the middle of the clamping ring. The clamping device is formed in two parts separated along a diametral plane and is generally cylindrical with a portion of reduced diameter 41 which fits around the pipe 30 a portion of enlarged diameter 42 which fits around the enlarged diameter socket portion 31 of the pipe 30 and a further enlarged portion 43 which receives the anchoring device 10. Tensioning means in the form of nuts and bolts 50 pass through flanges 51 along the edges of the two parts of the clamping device 40 and can be tightened to clamp the clamping device with the anchoring device around the pipe coupling. When the clamping device is tightened, the teeth 21 on the gripping ring bite into the surface of the pipe 32 so that the anchoring device grips the plain end of the pipe 32 to lock it against axial displacement. The shoulder 44 formed between the portion of enlarged diameter 42 and the portion of reduced diameter 41 engages the shoulder between the socket portion 31 and the rest of the pipe 30 to hold the pipe 30 against axial displacement. Thus the clamping device locks the two pipes together against axial displacement.

The inner edge of the gripping ring faces towards the end of the pipe 32 so that when axial force is applied to the pipes tending to pull them apart, the gripping ring tends to flatten and the teeth bite further into the pipe surface gripping it more firmly.

CLAIMS

1. An anchoring device for a pipe coupling comprising an annular channel of generally U-shaped cross-section having a web portion with flanges projecting radially inwardly from the circumferential edges of the web portion, and a frusto-conical gripping ring located in the channel, the outer edge of the gripping ring being located inside the web portion of the annular channel adjacent one of the radially inwardly projecting flanges, the inner edge of the gripping ring being adjacent the other radially inwardly projecting flange and projecting radially inwardly beyond the said other flange, the annular channel being compressible circumferentially so that when the anchoring device is placed around a pipe of appropriate size and the annular channel is compressed, the inner edge of the frusto-conical gripping ring engages the outer surface of the pipe.

2. An anchoring device according to claim 1 in which the annular channel is an incomplete ring.

3. An anchoring device according to claim 2 in which the interior diameter of the web portion of the annular channel is smaller than external diameter of the gripping ring in the unstressed condition so that the gripping ring is a tight fit in the channel.

4. An anchoring device according to any one of claims 1 to 3 in which the internal radial height of the flanges from the web

portion is less than the overall width of the gripping ring measured in the radial direction so that the gripping ring projects inwardly beyond the flanges.

5. An anchoring device according to any one of claims 1 to 4 in which the inner edge of the gripping ring is formed with a series of teeth to bite into the outer surface of the pipe when the ring is compressed.

6. An anchoring device according to any one of claims 1 to 5 in which the gripping ring extends more than 360° around the axis of the anchoring device so that the ends of the gripping ring overlap.

7. An anchoring device according to claim 5, wherein the inner edge and outer edge of the gripping ring define a conical plane therebetween, and in which the gripping ring extends more than 360° around the axis of the anchoring device so that the ends of the gripping ring overlap, and in which the teeth are flat in the conical plane of the gripping ring so as not to interfere with one another where they overlap when the anchoring device is compressed.

8. An anchoring device according to any one of claims 1 to 7 in which the flanges project substantially at right angles to the web portion.

9. An anchoring device according to any one of claims 1 to 8 in which the annular channel is formed of sheet material.

10. An anchoring device according to any one of claims 1 to 9 in which the anchoring device consists of the annular channel and the gripping ring.

11. An assembly for fitting around a pipe coupling comprising a clamping device which fits around the coupling and has a portion which receives an anchoring device according to any one of claims 1 to 10, and tensioning means for tightening the clamping device with the anchoring device around the pipe coupling.

1 / 2

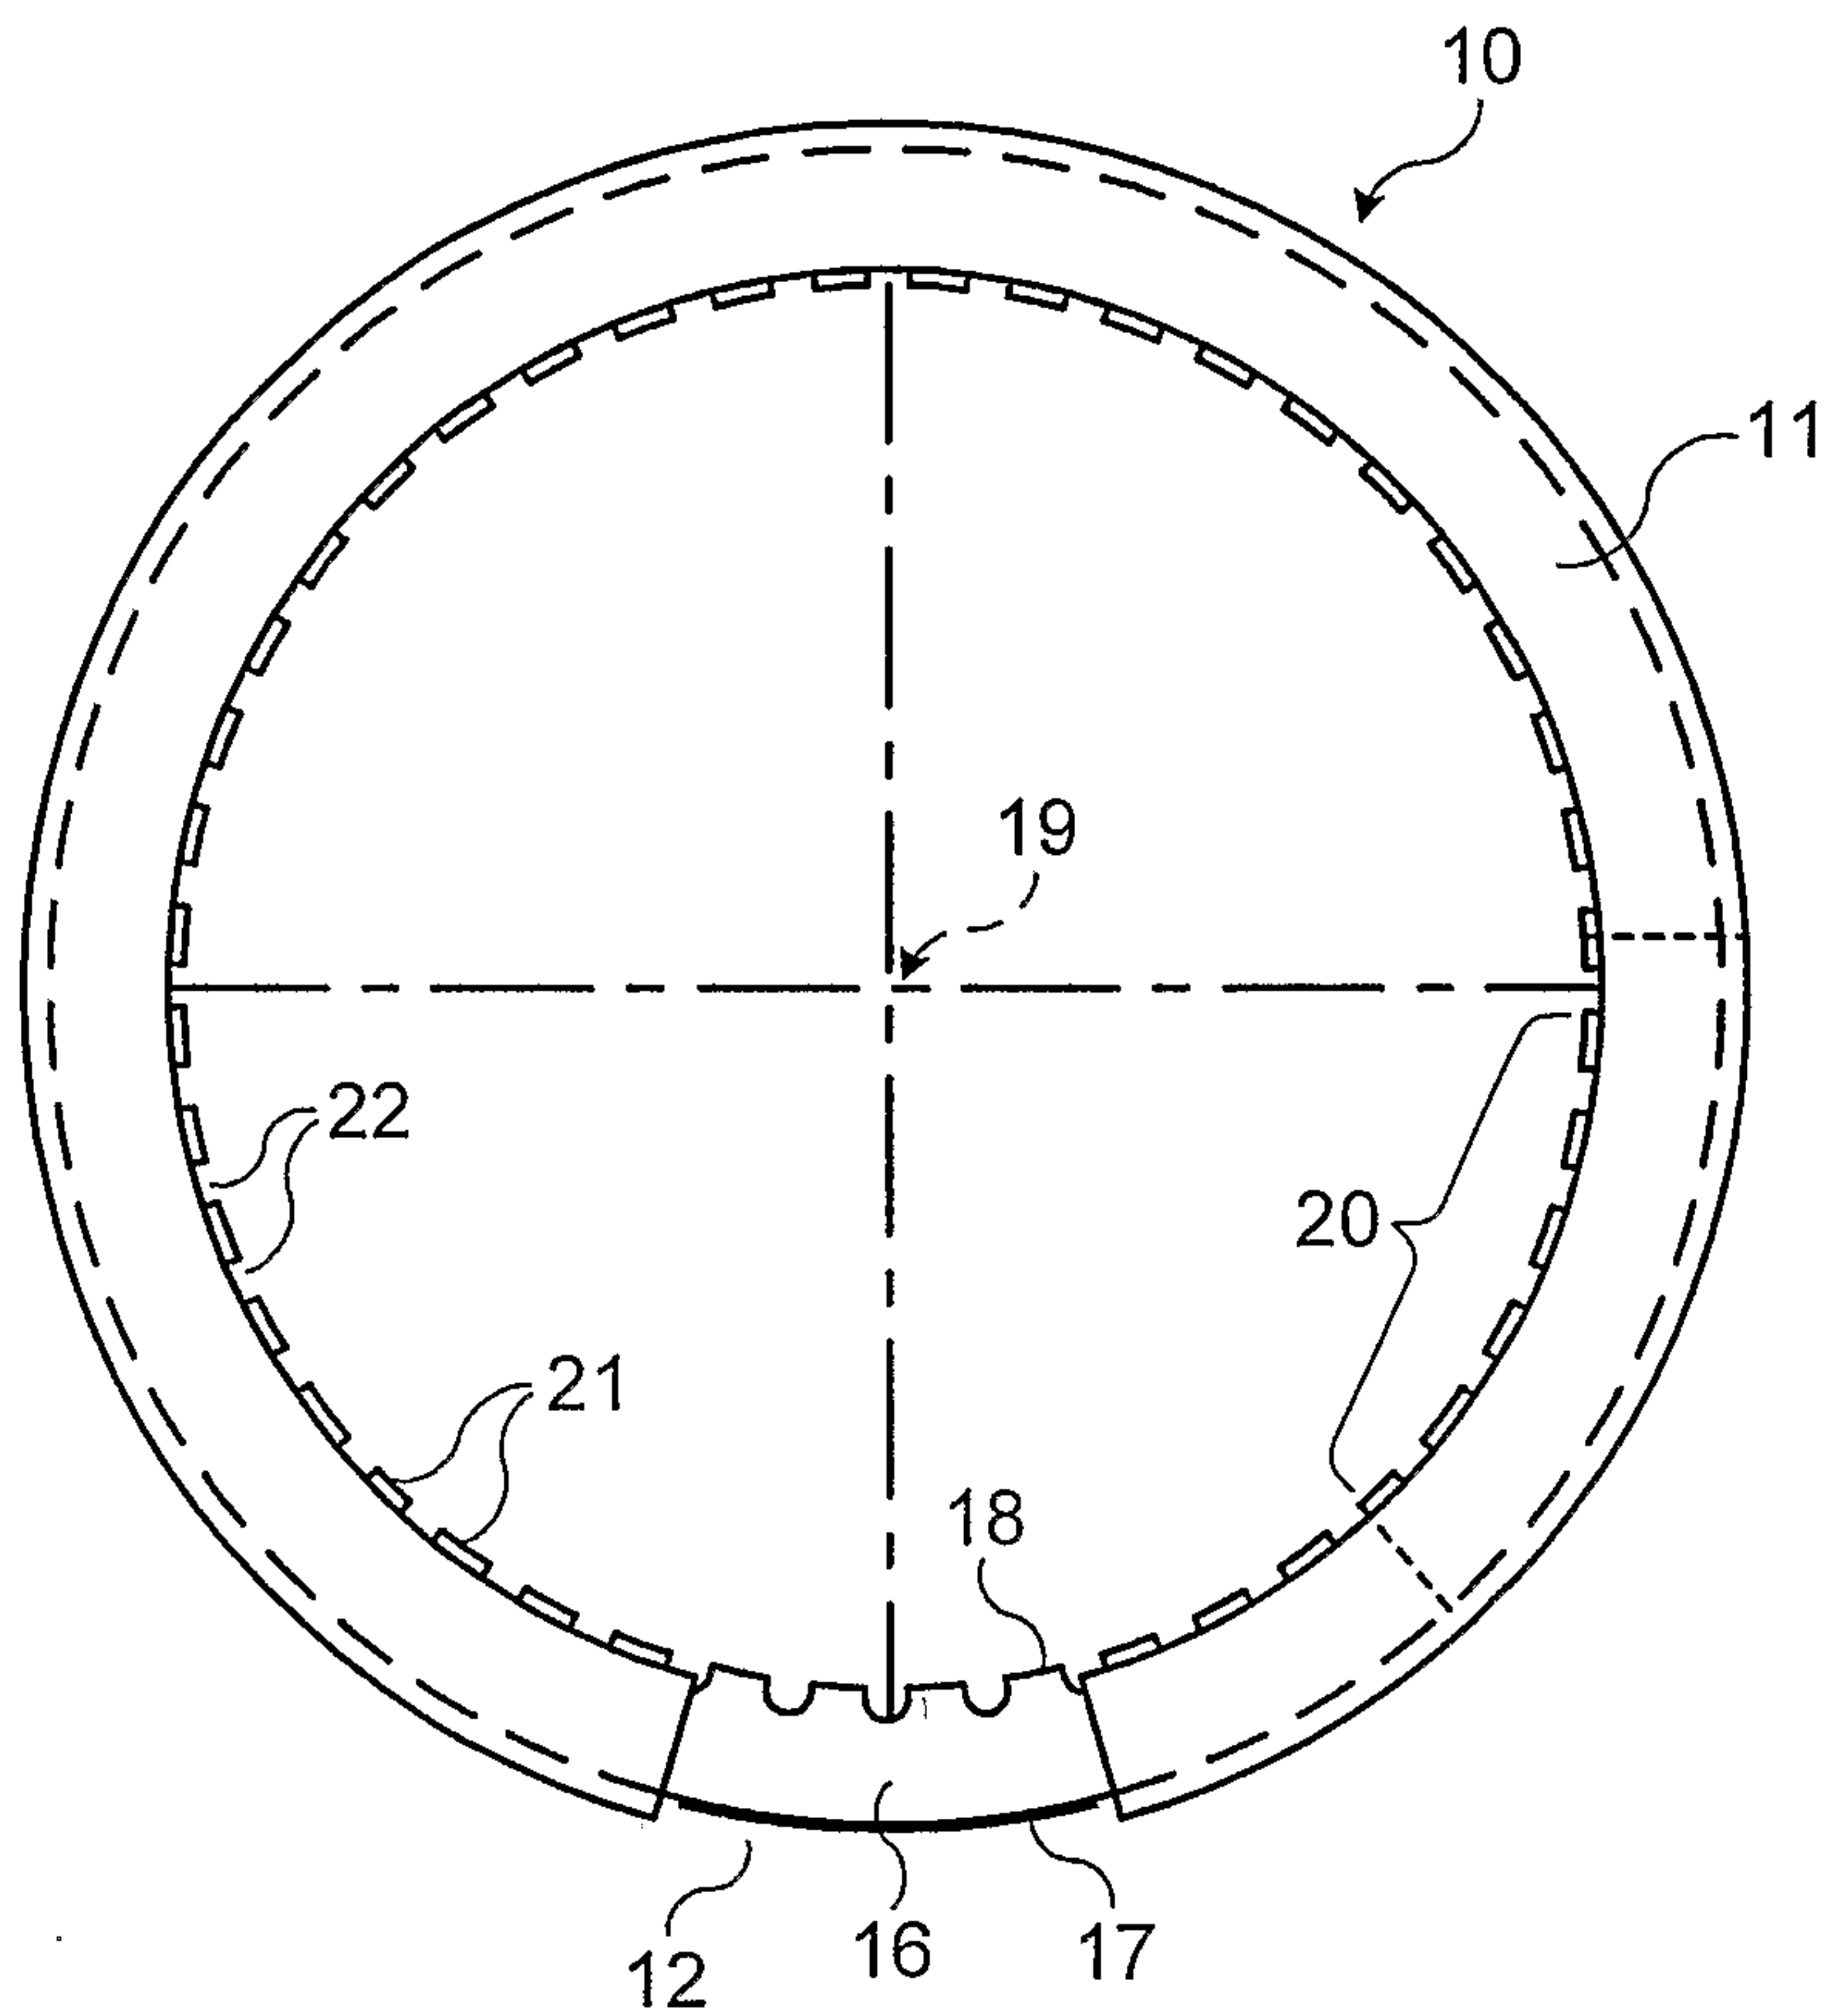


FIG. 1

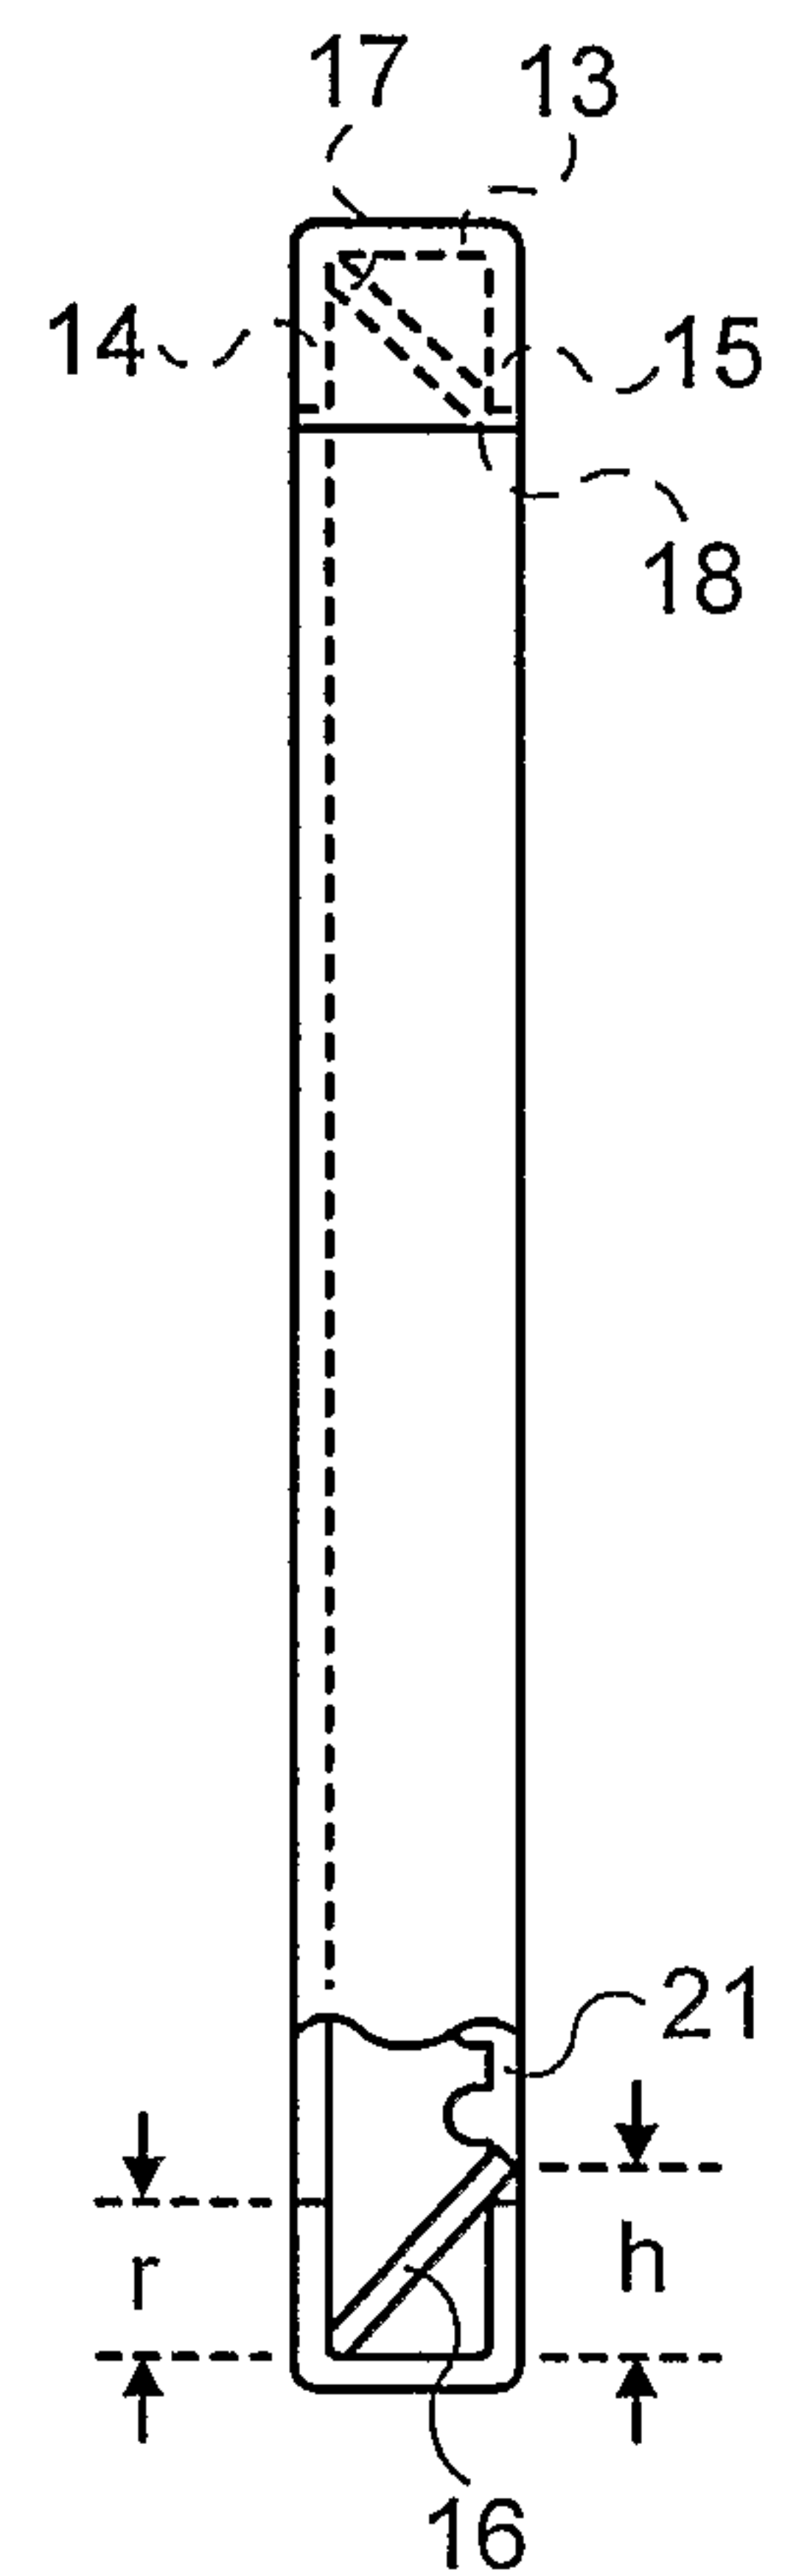


FIG. 3

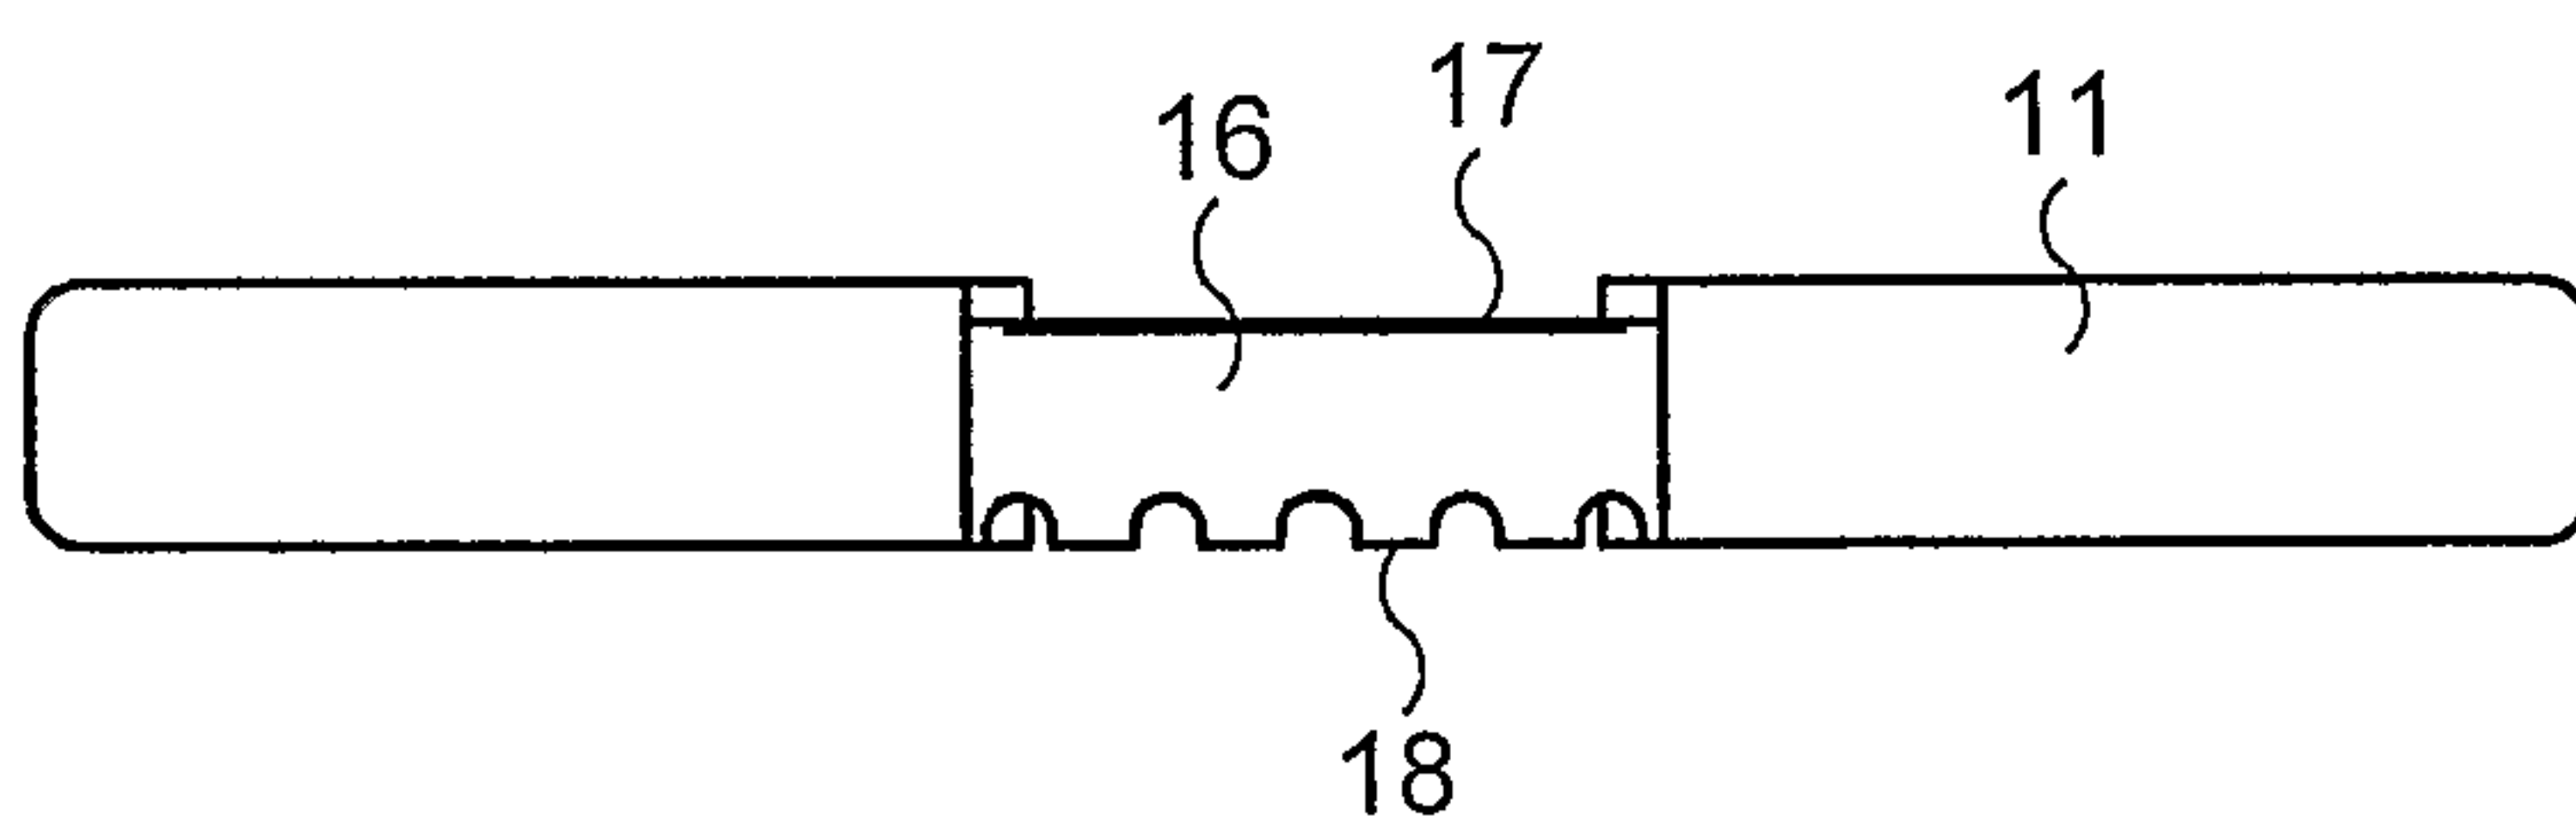


FIG. 2

212

FIG. 4.

