

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 May 2003 (08.05.2003)

PCT

(10) International Publication Number  
**WO 03/037706 A1**

(51) International Patent Classification<sup>7</sup>: **B63B 35/28**

(21) International Application Number: PCT/US02/34004

(22) International Filing Date: 24 October 2002 (24.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/020,485 30 October 2001 (30.10.2001) US

(71) Applicant: **ALBANY INTERNATIONAL CORP.**  
[US/US]; 1373 Broadway, Albany, NY 12204 (US).

(72) Inventor: **DAVENPORT, Francis, L.**; 29 North Hill  
Road, Ballston Lake, NY 12019 (US).

(74) Agent: **SANTUCCI, Ronald, R.**; Frommer Lawrence &  
Haug, LLP, 745 Fifth Avenue, New York, NY 10151 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: FABRIC STRUCTURE FOR A FLEXIBLE FLUID CONTAINMENT VESSEL

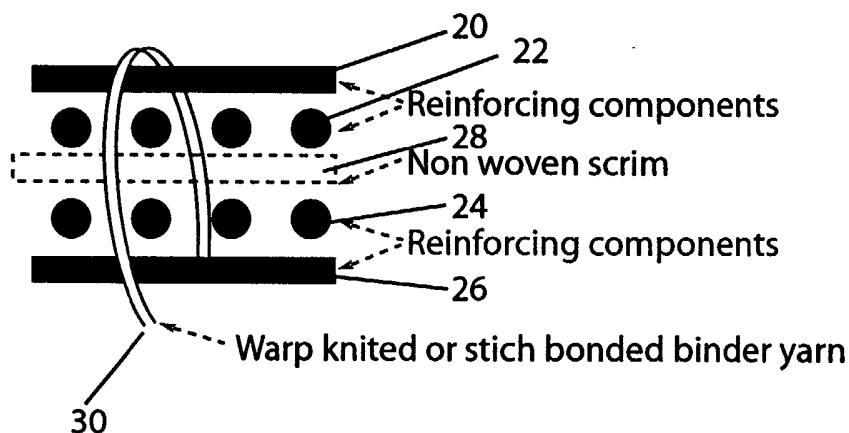

(57) Abstract: A flexible fluid containment vessel (10) or vessels for transporting and containing a large volume of fluid, particularly fresh water which is fabricated out of a fabric (40) made out of a plurality of separately formed layers which are bound together.



WO 03/037706 A1

FABRIC STRUCTURE FOR A FLEXIBLE FLUID CONTAINMENT  
VESSEL

Field of the Invention

5           The present invention relates to a flexible fluid containment vessel (sometimes hereinafter referred to as "FFCV") for transporting and containing a large volume of fluid, particularly fluid having a density less than that of salt water, more particularly, fresh water, and the method of making the same.

10

Background of the Invention

          The use of flexible containers for the containment and transportation of cargo, particularly fluid or liquid cargo, is well known. It is well known to use containers to transport fluids in water, particularly, salt water.

15           If the cargo is fluid or a fluidized solid that has a density less than salt water, there is no need to use rigid bulk barges, tankers or containment vessels. Rather, flexible containment vessels may be used and towed or pushed from one location to another. Such flexible vessels have obvious advantages over rigid vessels. Moreover, flexible vessels, if constructed  
20           appropriately, allow themselves to be rolled up or folded after the cargo has been removed and stored for a return trip.

          Throughout the world there are many areas which are in critical need of fresh water. Fresh water is such a commodity that harvesting of the ice cap and icebergs is rapidly emerging as a large business. However, wherever  
25           the fresh water is obtained, economical transportation thereof to the intended destination is a concern.

          For example, currently an icecap harvester intends to use tankers having 150,000 ton capacity to transport fresh water. Obviously, this involves, not only the cost in using such a transport vehicle, but the added  
30           expense of its return trip, unloaded, to pick up fresh cargo. Flexible

container vessels, when emptied can be collapsed and stored on, for example, the tugboat that pulled it to the unloading point, reducing the expense in this regard.

5 Even with such an advantage, economy dictates that the volume being transported in the flexible container vessel be sufficient to overcome the expense of transportation. Accordingly, larger and larger flexible containers are being developed. However, technical problems with regard to such containers persist even though developments over the years have occurred. In this regard, improvements in flexible containment vessels or  
10 barges have been taught in U.S. Patents 2,997,973; 2,998,973; 3,001,501; 3,056,373; and 3,167,103. The intended uses for flexible containment vessels is usually for transporting or storing liquids or fluidisable solids which have a specific gravity less than that of salt water.

The density of salt water as compared to the density of the liquid or  
15 fluidisable solids reflects the fact that the cargo provides buoyancy for the flexible transport bag when a partially or completely filled bag is placed and towed in salt water. This buoyancy of the cargo provides flotation for the container and facilitates the shipment of the cargo from one seaport to another.

20 In U.S. Patent 2,997,973, there is disclosed a vessel comprising a closed tube of flexible material, such as a natural or synthetic rubber impregnated fabric, which has a streamlined nose adapted to be connected to towing means, and one or more pipes communicating with the interior of the vessel such as to permit filling and emptying of the vessel. The buoyancy is  
25 supplied by the liquid contents of the vessel and its shape depends on the degree to which it is filled. This patent goes on to suggest that the flexible transport bag can be made from a single fabric woven as a tube. It does not teach, however, how this would be accomplished with a tube of such magnitude. Apparently, such a structure would deal with the problem of  
30 seams. Seams are commonly found in commercial flexible transport bags, since the bags are typically made in a patch work manner with stitching or

other means of connecting the patches of water proof material together. See e.g. U.S. Patent 3,779,196. Seams are, however, known to be a source of bag failure when the bag is repeatedly subjected to high loads. Seam failure can obviously be avoided in a seamless structure. However, since a seamed structure is an alternative to a simple woven fabric and would have different advantages thereto, particularly in the fabrication thereof, it would be desirable if one could create a seamed tube that was not prone to failure at the seams.

In this regard, U.S. Patent No. 5,360,656 entitled "Press Felt and Method of Manufacture", which issued November 1, 1994 and is commonly assigned, the disclosure of which is incorporated by reference herein, discloses a base fabric of a press felt that is fabricated from spirally wound fabric strips. The fabric strip of yarn material, preferably being a flat-woven fabric strip, has longitudinal threads which in the final base fabric make an angle in what would be the machine direction of the press felt.

During the manufacture of the base fabric, the fabric strip of yarn material is wound or placed spirally, preferably over at least two rolls having parallel axes. Thus, the length of fabric will be determined by the length of each spiral turn of the fabric strip of yarn material and its width determined by the number of spiral turns.

The number of spiral turns over the total width of the base fabric may vary. The adjoining portions of the longitudinal edges of the spirally-wound fabric strip are so arranged that the joints or transitions between the spiral turns can be joined in a number of ways.

An edge joint can be achieved, e.g. by sewing, melting, and welding (for instance, ultrasonic welding as set forth in U.S. Patent No. 5,713,399 entitled "Ultrasonic Seaming of Abutting Strips for Paper Machine Clothing" which issued February 3, 1998 and is commonly assigned, the disclosure of which is incorporated herein by reference) of material or of non-woven material with melting fibers. The edge joint can also be obtained by providing the fabric strip of yarn material along its two longitudinal edges

with seam loops of a known type, which can be joined by means of one or more seam threads. Such seam loops may for instance be formed directly of the weft threads, if the fabric strip is flat-woven.

5 While that patent relates to creating a base fabric for a press felt such technology may have application in creating a sufficiently strong tubular structure for a transport container. Moreover, with the intended use being a transport container, rather than a press fabric where a smooth transition between fabric strips is desired, this is not a particular concern and different joining methods (overlapping and sewing, bonding, stapling, etc.) are possible. Other types of joining may be apparent to one skilled in the art.

10 It should be noted that U.S. Patent No. 5,902,070 entitled "Geotextile Container and Method of Producing Same" issued May 11, 1999 and assigned to Bradley Industrial Textiles, Inc. does disclose a helically formed container. Such a container is, however, intended to contain fill and to be stationary rather than a transport container.

15 It should also be noted that in the papermaking art it is known to create a fabric for use in the papermaking industry having a knitted substrate. In this regard, U.S. Patent No. 4,948,658 issued August 14, 1990 discloses a fabric which is made from a core filament comprised of a bundle of threads, whose composition may vary, enclosed by a loop thread on a knitting machine. Machine filling threads or yarns transverse the core filament and the loops of the loop threads to create the base fabric. Such a fabric may then be subject to further processing.

20 Also, it is well known in the papermaking art to create fabric which is impermeable to fluids, a characteristic required for an FFCV. Such fabrics involve a base substrate which may be woven of reinforcing yarns and then impregnated with a suitable resin. Examples of such structures are U.S. Patent No. 6,290,818 B1 and 5,238,537.

25 With this in mind, the construction or make up of the fabric or tube of the FFCV, whether formed as a single piece or in segments, has to take into account various factors including flexibility, durability, tear and puncture

resistance, whilst of course, as aforesaid, being impermeable to sea water. Also, in the absence of flotation devices, the buoyancy of the FFCV, particularly when being emptied and empty is also a consideration. Moreover, the construction or make up of the fabric used should be cost effective. Accordingly, depending upon the application, alternative forms of fabric construction is desirable.

#### Summary of the Invention

It is therefore a principal object of the invention to provide for a fabric construction for an FFCV which provides for the various characteristics required.

It is a further object of the invention to provide for a fabric construction for an FFCV which may be readily varied to meet possible changing requirements for the FFCV.

A yet further object of the invention is to provide for a fabric construction which facilitates the coating thereof, or avoids or minimizes the need for the separate coating altogether.

A still further object of the invention is to provide for a fabric construction which is an alternative to a woven fabric.

Accordingly, the present invention is directed towards providing a construction of the fabric used for the tube of an FFCV. In this regard, the fabric is constructed of a number of layers of components, like that of a laminate. The layers may comprise reinforcing components, buoyancy layer or layers, layers that are impermeable or that facilitate later coating, all of which may be bound together by warp knit or stitch bonded binder yarns. The fabric may be made in strips and then assembled into a tube as set forth in U.S. Patent No. 5,713,399 or in segments and joined together in any number of ways, including that set forth in co-pending U.S. patent application entitled "Segment Formed Flexible Fluid Containment Vessel" filed contemporaneously herewith which is commonly assigned. In addition, the fabric may be manufactured as a flat roll of cloth and joined endless

using either a spiral winding technique, splice or other means suitable for the purpose.

#### Brief Description of the Drawings

5           Thus by the present invention, its objects and advantages will be realized the description of which should be taken in conjunction with the drawings wherein:

Figure 1 is a somewhat general perspective view of a prior art FFCV which is cylindrical having a pointed bow or nose;

10           Figure 2 is a somewhat general perspective view of an FFCV which is formed in segments, incorporating the teachings of the present invention;

Figure 3 is a side sectional view of the fabric structure incorporating the teachings of the present invention; and

15           Figure 4 is a perspective view of the fabric structure incorporating the teachings of the present invention.

#### Detailed Description of the Preferred Embodiment

20           The proposed FFCV 10 is intended to be constructed of an impermeable textile tube. The tube's configuration may vary. For example, as shown in Figure 2, it would comprise a tube 12 having a substantially uniform diameter (perimeter) and sealed on each end 14 and 16. The respective ends 14 and 16 may be closed, pinched, and sealed in any number of ways. A means for loading and unloading cargo (e.g. fresh water) would be provided. The resulting impermeable structure which is fabricated out of  
25 segments or strips of material 18 will be flexible enough to be folded or wound up for transportation and storage.

30           In designing the FFCV to withstand the loads placed thereon, certain factors should be considered. In this regard, in co-pending U.S. Patent Application Serial No. 09/832,739 filed April 11, 2001 entitled "Flexible Fluid Containment Vessel" such factors are set forth in detail, along with possible materials for the fabric, their construction and possible coatings and

methodology to apply to it to render the fabric impermeable, in addition to other features which may be desirable with regard to the FFCV. Accordingly, further discussion thereof will not be repeated herein rather reference is made to said application.

5           Also, the present device may have application with regard to the spiral formed FFCV as disclosed in co-pending U.S. Patent Application Serial No. 09/908,877 filed July 18, 2001 entitled "Spiral Formed Flexible Fluid Containment Vessel". While there is discussed therein means and methods for joining the wound strips together to form an FFCV, an  
10           alternative thereto is disclosed in the aforesaid first mentioned patent application for all or part of the joining process. For example, in high load portions of the FFCV, typically the front and rear, one methodology may be used. For less stressful locations another methodology may be used.

          In addition, reference is made to U.S. Patent Application Serial No.  
15           09/921,617 filed August 3, 2001 entitled "End Portions for a Flexible Fluid Containment Vessel and a Method of Making the Same" which relates to possible construction of the end portions of the FFCV and U.S. Patent Application Serial No. 09/923,936 filed August 7, 2001 entitled "Coating for a Flexible Fluid Containment Vessel and a Method of Making the Same"  
20           which discloses additional construction for the fabric, in addition to possible coatings therefor.

          The fabric 18 can be that of a patchwork to create the FFCV, wound strip or of other configuration suitable for the purpose. For example, it may be made in segments of flat fabric that has one of its dimensions equal to that  
25           of the circumference of the FFCV which is formed into a tube and joined with other so formed segments. The variations are endless.

          Turning now more particularly to Figure 3, there is shown the side view of one embodiment of fabric 18. The fabric 18 includes layers 20, 22, 24 and 26 of reinforcing components. These components are typically  
30           multifilament or monofilament yarns which may be of the type set forth in the aforesaid applications. Positioned between the reinforcement layers 22-26 is



a scrim layer 28. This layer can be woven or non-woven, spun bonded, wet laid or air laid non-woven web, impermeable, semi-impermeable or permeable depending upon how the fabric 18 is to be processed further. For example, as noted in the aforesaid applications, the fabric making up the FFCV must be impermeable to salt water and salt water ions. One of the ways to render the fabric impermeable is to coat it. Suggested coatings and methods of doing it are set forth in certain of the aforesaid application. One of the problems envisioned in coating the fabric is bleed through. In other words, if an endless fabric is coated while laid flat, the coating may pass through the fabric and cause it to stick to the layer of fabric below it. Several methods of avoiding this problem are suggested in the aforesaid applications.

With, however, the present structure of the fabric, the scrim layer 28 can be impermeable at least with regard to the coating being applied. Accordingly, one or both sides of the fabric can be coated without concern for bleed through or sticking. In addition, if the scrim 28 is impermeable to salt water and salt water ions, it might minimize or eliminate the need for coating altogether, since it will act as a barrier. Of course, there may be other reasons for coating as will be later discussed herein.

In addition, the properties of the scrim layer 28 may address other concerns with regard to the FFCV. For example, it is desirable that the FFCV be buoyant when empty so that, for example, it does not sink when empty or otherwise impede the loading and unloading of the cargo. Accordingly, the scrim layer 28 can be made of a buoyant structure or material, for example, it may be made of a reticulated or non-reticulated foam of polyurethane. Other examples in this regard are disclosed in the aforesaid applications

Also, the scrim layer 28 may be so formed so as to add structural integrity to the fabric. For example, it may comprise a woven base substrate impregnated with a resin to render it impermeable which is then incorporated as a layer of fabric 18. As to such incorporation, as illustrated in Figure 3,

the reinforcing layers 20-26 and scrim layer 28 are warp knitted or stitch bonded together. Binder yarn 30 is illustrated for this purpose.

Turning now to Figure 4, there is shown for illustrative purposes a multi-component fabric 40 having layers 42-50 which is being stitch bonded (via binder yarns 52) together. The layers may be woven or non-woven with the scrim layer positioned at the center of the structure or it may comprise any one of the layers. By using a multi-component structure, variations in the design to meet desired characteristics are numerous.

Also, if the structure was not buoyant, it may be desirable to provide a foamed coating on the inside, outside, or both surfaces of the fabric or otherwise coat it in a manner set forth in the aforesaid applications to render the fabric buoyant.

In view of the closed nature of the FFCV, if it is intended to transport fresh water, as part of the coating process of the inside thereof, it may provide for a coating which includes a germicide or a fungicide so as to prevent the occurrence of bacteria or mold or other contaminants.

In addition, since sunlight also has a degradation effect on fabric, the FFCV may include as part of its coating, or the fiber used to make up the fabric, a UV protecting ingredient in this regard.

Although a preferred embodiment has been disclosed and described in detail herein, its scope should not be limited thereby; rather its scope should be determined by that of the appended claims.

What Is Claimed Is:

1. A flexible fluid containment vessel for the transportation of cargo comprising a fluid or fluidisable material, said vessel comprising:  
an elongated flexible tubular structure comprised of fabric having a plurality of separate layers formed independently and joined together with at least one of said layers comprised of reinforcement yarns and said layers being joined together by being warp knitted or stitch bonded;  
means for rendering said tubular structure impervious;  
said tubular structure having a front end and a rear end;  
means for sealing said front end and said rear end; and  
means for filling and emptying said vessel of cargo.
2. A vessel in accordance with claim 1 wherein at least one of said layers is impervious to fluid.
3. A vessel in accordance with claim 2 wherein said fluid is a resin.
4. A vessel in accordance with claim 2 wherein said fluid is salt water.
5. A vessel in accordance with claim 1 wherein said fabric comprises a plurality of reinforcing layers and at least one scrim layer.
6. A vessel in accordance with claim 2 wherein said fabric has an inside and an outside and is coated on said inside or outside or both to render the fabric impervious.
7. A vessel in accordance with claim 6 wherein said fabric is formed in segments or strips which are joined together to form said tubular structure.
8. A vessel in accordance with claim 1 wherein the cargo is fresh water.

9. A method of forming a fabric for a tubular structure for a flexible fluid containment vessel for the transportation of cargo comprising a fluid or fluidisable material comprising the steps of:
- 5 forming separately at least two layers of material;
- 10 joining two layers of material together by warp knitting or stitch bonding; and
- forming said fabric into the tubular structure.
10. The method in accordance with claim 9 wherein at least one layer is impermeable to fluid.
11. The method in accordance with claim 10 wherein said fluid is a resin.
12. The method in accordance with claim 10 wherein said fluid is salt water.
- 15
13. The method in accordance with claim 9 wherein said fabric comprises at least a plurality of reinforcing layers and at least one scrim layer.
- 20
14. The method in accordance with claim 13 which includes the step of coating the fabric on a first side or a second side or both to render the fabric impervious.
- 25
15. The method in accordance with claim 9 which includes the step of forming said fabric in segments or strips and joining the segments or strips together to create the tubular structure.
16. The method in accordance with claim 9 which includes the step of
- 30 using said vessel for the transportation of fresh water.

1/2

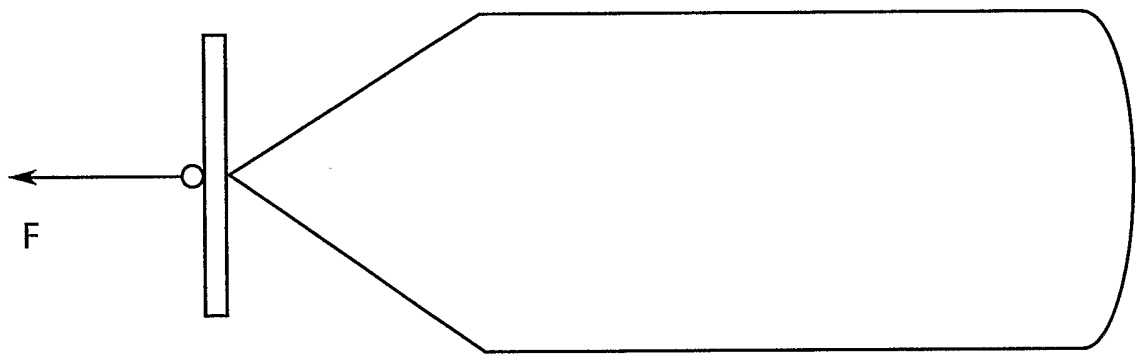


FIG. 1  
(PRIOR ART)

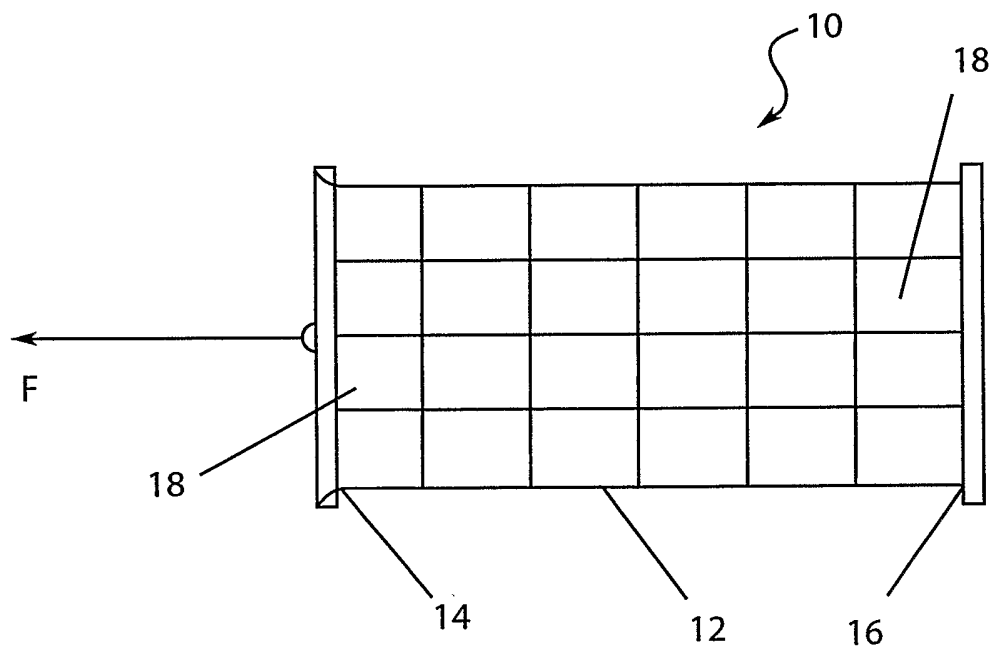


FIG. 2

2/2

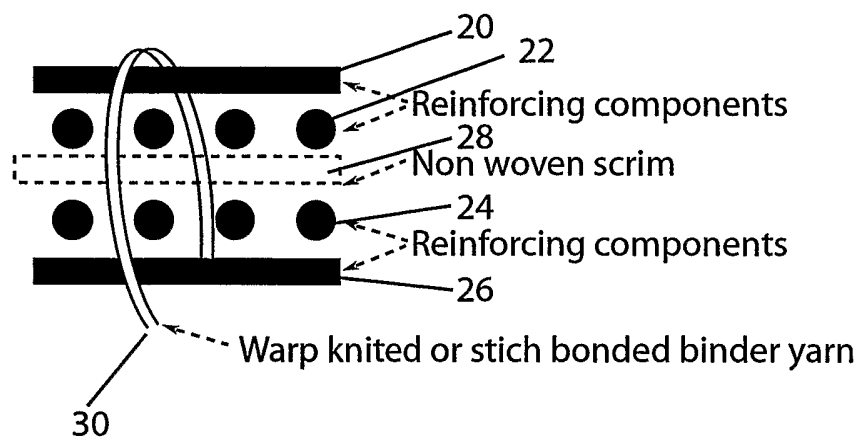


FIG. 3

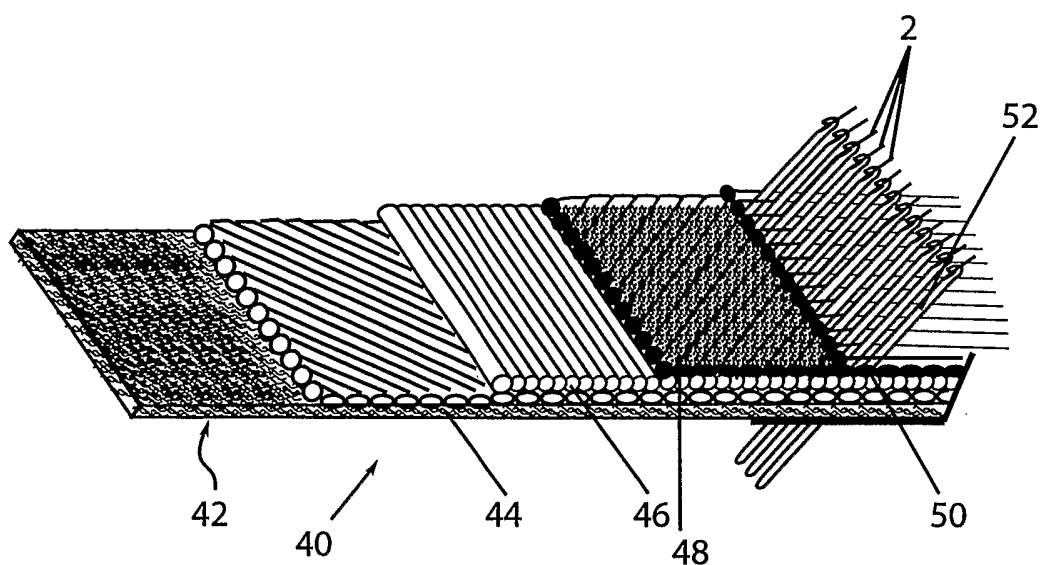


FIG. 4

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/34004

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B63B35/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63B D04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 907 266 A (CONTAINER PATENT COMPANY G M B) 3 October 1962 (1962-10-03) page 2, line 104 - line 121 ---	1-16
Y	WO 01 63033 A (HOMMA KIYOSHI ;NISHIMURA AKIRA (JP); TORAY INDUSTRIES (JP)) 30 August 2001 (2001-08-30) figure 3 -& US 2002/160146 A1 (HOMMA KIYOSHI ET ALL) 31 October 2002 (2002-10-31) paragraph '0011! - paragraph '0038! ---	1-16
A	US 2 997 973 A (REDE HAWTHORNE WILLIAM ET AL) 29 August 1961 (1961-08-29) cited in the application --- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

4 March 2003

Date of mailing of the international search report

12/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

van Rooij, M

## INTERNATIONAL SEARCH REPORT

In International Application No

PCT/US 02/34004

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 779 196 A (KNAUS E ET AL) 18 December 1973 (1973-12-18) cited in the application ----	
A	US 4 948 658 A (HAELKER HELMUT) 14 August 1990 (1990-08-14) cited in the application ----	
A	US 5 238 537 A (DUTT WILLIAM H) 24 August 1993 (1993-08-24) cited in the application ----	
A	US 5 360 656 A (REXFELT JAN ET AL) 1 November 1994 (1994-11-01) cited in the application ----	
A	US 5 713 399 A (JONASSON BODIL ET AL) 3 February 1998 (1998-02-03) cited in the application ----	
A	US 5 902 070 A (BRADLEY ANTHONY S) 11 May 1999 (1999-05-11) cited in the application ----	
A	US 6 290 818 B1 (ROMANSKI ERIC R) 18 September 2001 (2001-09-18) cited in the application -----	



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International Application No  
PCT/US 02/34004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 907266	A	03-10-1962	DE 1170312 B	14-05-1964
			US 3178050 A	13-04-1965
WO 0163033	A	30-08-2001	AU 3598201 A	03-09-2001
			EP 1174533 A1	23-01-2002
			WO 0163033 A1	30-08-2001
			NO 20015248 A	26-10-2001
			US 2002160146 A1	31-10-2002
US 2997973	A	29-08-1961	NONE	
US 3779196	A	18-12-1973	NONE	
US 4948658	A	14-08-1990	EP 0290653 A1	17-11-1988
			AT 51907 T	15-04-1990
			CA 1322121 A1	14-09-1993
			DE 3762246 D1	17-05-1990
			FI 882245 A ,B,	15-11-1988
US 5238537	A	24-08-1993	AT 384049 B	25-09-1987
			AT 343282 A	15-02-1987
			AU 558794 B2	12-02-1987
			AU 8837682 A	24-03-1983
			BE 894392 A1	03-01-1983
			BR 8205122 A	09-08-1983
			CA 1188556 A1	11-06-1985
			CA 1205335 A2	03-06-1986
			CH 656654 A5	15-07-1986
			DE 3231039 A1	24-03-1983
			FI 823016 A ,B,	16-03-1983
			FR 2512856 A1	18-03-1983
			GB 2106555 A ,B	13-04-1983
			IT 1196552 B	16-11-1988
			NL 8203490 A ,B,	05-04-1983
			NO 822903 A ,B,	16-03-1983
			NZ 201889 A	14-03-1986
			SE 457541 B	09-01-1989
			SE 8205283 A	15-09-1982
US 5360656	A	01-11-1994	SE 468602 B	15-02-1993
			AT 129536 T	15-11-1995
			AT 167536 T	15-07-1998
			AU 654165 B2	27-10-1994
			AU 9098691 A	22-07-1992
			BR 9107186 A	03-11-1993
			CA 2119784 A1	09-07-1992
			DE 69114144 D1	30-11-1995
			DE 69114144 T2	04-04-1996
			DE 69129639 D1	23-07-1998
			DE 69129639 T2	15-10-1998
			EP 0563150 A1	06-10-1993
			EP 0665329 A1	02-08-1995
			ES 2078730 T3	16-12-1995
			ES 2117311 T3	01-08-1998
			FI 932608 A ,B,	08-06-1993
			FI 951522 A	31-03-1995
			JP 3027414 B2	04-04-2000
			JP 6503385 T	14-04-1994

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/34004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5360656	A		NO 932162 A	11-06-1993
			NO 972476 A	30-05-1997
			SE 9004009 A	18-06-1992
			WO 9211411 A1	09-07-1992
			SE 469335 B	21-06-1993
			SE 9203442 A	17-11-1992
US 5713399	A	03-02-1998	AT 186087 T	15-11-1999
			AU 719982 B2	18-05-2000
			AU 2361297 A	13-08-1998
			BR 9705079 A	13-07-1999
			CA 2206087 A1	07-08-1998
			DE 69700691 D1	02-12-1999
			DE 69700691 T2	06-04-2000
			EP 0861939 A1	02-09-1998
			ES 2137770 T3	16-12-1999
			JP 10226978 A	25-08-1998
			KR 270845 B1	01-11-2000
			NO 975241 A	10-08-1998
			TW 396114 B	01-07-2000
			ZA 9706699 A	10-02-1998
US 5902070	A	11-05-1999	AU 742307 B2	20-12-2001
			AU 7803998 A	21-12-1998
			EP 0986677 A1	22-03-2000
			WO 9855703 A1	10-12-1998
			US 6056438 A	02-05-2000
US 6290818	B1	18-09-2001	AU 2768700 A	23-11-2000
			BR 0007880 A	05-02-2002
			CA 2308682 A1	18-11-2000
			CN 1274027 A	22-11-2000
			EP 1054099 A2	22-11-2000
			JP 2000355894 A	26-12-2000
			NO 20002519 A	20-11-2000
			TW 475022 B	01-02-2002
			ZA 200002168 A	07-11-2000