



- (51) **International Patent Classification:**
E21B 47/12 (2012.01) *E21B 47/14* (2006.01)
- (21) **International Application Number:**
PCT/US2013/077382
- (22) **International Filing Date:**
23 December 2013 (23.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventor:** RICHARDS, William, Mark; 1525 Shadywood Lane, Flower Mound, Texas 75028 (US).
- (74) **Agents:** PRATT, John, S. et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** DOWNHOLE SIGNAL REPEATER

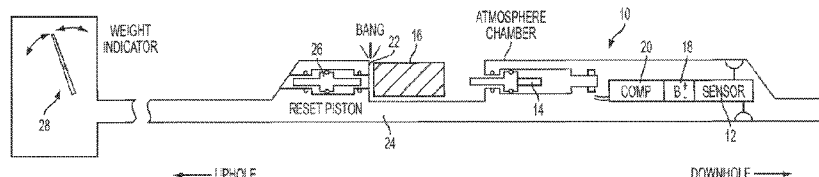


FIG. 1

(57) **Abstract:** A repeater for use downhole in an oil or other well for detecting a sound or other signal that originates further downhole and generating a signal or indication perceptible uphole or at or above the rig floor. The signal may be a change in the weight of the rig measured at the rig floor caused by driving a counterweight against a stop at the repeater.

DOWNHOLE SIGNAL REPEATER

TECHNICAL FIELD

[0001] This disclosure relates to deep water and other oil wells and the communication of information from the wells to the surface.

BACKGROUND

[0002] Drilling, preparing for extraction and extraction of hydrocarbons from wells require awareness of location, condition or other information from the bottom and other intermediate points in the well. Some of such data may be provided by listening to sound traveling to the surface, but sounds from deep wells often do not reach the surface or are so attenuated as to be inaudible at the surface. Other signals or forms of data transfer likewise may not reach the surface.

[0003] Signals can be transmitted from a point in a well to the surface or another location on electrical or optical fiber cable, but in some situations such alternatives are prohibitively expensive or otherwise impractical or impossible.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Illustrative embodiments of the present disclosure are described in detail below with reference to the following drawing figures:

[0005] Figure 1 is a schematized diagram of a repeater for use in a well.

[0006] Figure 2 is a schematized diagram of a repeater for use in a well that includes an array of transmission units.

[0007] Figure 3 is a side view of a signal receiving apparatus above a rig floor.

[0008] Figure 4 is an enlarged, schematized view of the signal receiving apparatus shown in Figure 3.

DETAILED DESCRIPTION

[0009] The subject matter of embodiments of this disclosure is described here with specificity to meet statutory requirements, but this description is not necessarily intended to limit the scope of the claims. The claimed subject matter may be embodied in other ways, may include different elements or steps, and may be used in conjunction with other existing or future technologies. This description should not be interpreted as implying any particular order or arrangement among or between various steps or elements except when the order of individual steps or arrangement of elements is explicitly described.

[0010] A relatively inexpensive repeater may be positioned in a well to detect events or conditions deeper in the well such as sounds, vibrations, pressure conditions, or changes or other events or conditions perceptible with a sensor. The repeater then transmits a signal or signals to the rig floor or another desired uphole location.

[0011] Figure 1 depicts a repeater 10 having a sensor 12 that generates a signal that actuates a pushing device such as an actuator, solenoid or piston 14 that pushes a mass such as a shuttle or counterweight 16. The counterweight 16 is driven into a stop 22 coupled to a mandrel 24 or other well structure with sufficient force to cause a discernible event at the well surface, such as a “bobble” of a weight indicator gauge 28.

[0012] Actuation of the piston 14 may involve, in addition to the sensor 12, a power source such as a battery 18 and optional computational circuitry 20 for outputting a signal that will actuate the piston 14 or another driver to cause the counterweight 16 to impact stop 22 with sufficient force to be detected uphole. A second device for moving the

counterweight 16 such as a solenoid or reset piston 26 may be utilized to automatically return the counterweight 16 to its rest position to prepare it for repetition of another signal.

[0013] The sensor 12 may be a microphone or other sound sensor if the signal to be repeated is a sound. Other sensors such as strain gauges, pressure gauges, temperature gauges, hydrophones, accelerometers or other sensors that detect events or conditions may also be usable with the other components described here, depending on the signal desired to be communicated through the well.

[0014] The repeater 10 may be controlled by an operator on the rig floor. The sensor 12 may detect a control signal from the surface to turn the repeater 10 on, turn the repeater 10 off, change the strength of the return signal or otherwise control the repeater 10. For instance, the operator may send a control signal down the tubing to the sensor 12. The operator may also or alternatively send a control signal down the annulus to the sensor 12. Among other alternatives, the control signal may be an acoustic signal, a pressure signal (a pulse or series of sustained pressure holds), a series of tension and compression read by strain gauges in the mandrel, up and down motion read by accelerometers, or a dropped ball from surface with an RFID tag or magnet.

[0015] The simplest operation of the repeater 10 of Figure 1 involves receipt of a sound or other signal that is treated as a single event or pulse and actuation once of the piston 14 to drive the counterweight 16 against the stop 22.

[0016] Rather than a single large counterweight 16, multiple weights in tracks can be used to create a distinctive pattern of signals that may be more easily recognized at the surface because of the pattern. Figure 2 depicts such an embodiment in schematized form.

[0017] Such multi-track repeater 40 uses a sensor or sensors 42 coupled to power and control circuitry 44 that triggers pistons 46 that strike or drive counterweights 48 that travel in tracks 50 to strike a stop 52 or multiple stops (not shown).

[0018] In this embodiment 40, a downhole sound or other event or condition detected by sensor 42 is received by the powered control circuit 44 that actuates multiple pistons 46 to drive counterweights 48 in tracks 50 simultaneously or in a pattern. Such a pattern may be, for example, two strikes closely spaced in time followed by a third strike after a time interval greater than the interval between the first two impacts. Numerous other “firing patterns” of pistons 44 driving counterweights 48 can be used, for instance, (1) in order to communicate more about the received sound (or other detected event or condition) than just its receipt, or (2) in order to send a signal uphole that can be more easily differentiated from “noise.”

[0019] The signal transmitted to the surface or other area above the rig floor (not shown in Figures 1 and 2) may be heard by workers or may be received on existing equipment such by causing a “bobble” on a weight indicator 28 (Figure 1). Alternatively, such a signal may be received by a dedicated receiver, an exemplary one of which is depicted in Figures 3 and 4.

[0020] Such a receiver 60 may be located at the top of a work string 62. As shown in Figure 3, the receiver 60 may include a power source such as a battery 64, a sensor 66 and a light, flag or sound production device 68 that is perceptible by a rig operator or detectable by another means at or near the rig floor 29. Alternatively, or additionally, receiver 60 may include a power source such as a battery 64, a sensor 65 and computational circuitry 67, including a data link port or Wi-Fi capability 69 so that data can be monitored contemporaneously or stored for later analysis or both.

[0021] In situations where the depth of the sound or other signal source means that one repeater 10 or 40 cannot or may not produce a sufficiently strong repeated signal for the repeated signal to be reliably detected at or near the rig floor 29, one or more additional repeaters may be utilized at intervals within the well over which repeated signals can be reliably transmitted.

[0022] Different arrangements of the components depicted in the drawings or described here, as well as components and steps not shown or described are possible. Similarly, some features and subcombinations are useful and may be employed without reference to other features and subcombinations. Embodiments of the disclosure have been described for illustrative and not restrictive purposes, and alternative embodiments will become apparent to readers of this patent. Accordingly, the present disclosure is not limited to the embodiments described here or depicted in the drawings, and various embodiments and modifications can be made without departing from the scope of the claims below.

[0023] For instance, if a repeater 10 (Figure 1) or 40 (Figure 2) is positioned generally vertically with the sensor 12 at the bottom (the downhole end of the repeater 10 or 40), gravity alone may return the counterweight 16 or counterweights 48 to their rest positions. However, the repeater 10 or 40 may be oriented relatively horizontally, or there may be other structures or conditions, so that gravity may not return the counterweights 16 or 48 to their rest positions. Moreover, while the repeater 10 or 40 may be oriented so that the counterweights 16 or 48 travel uphole when actuated, in some instances it may be desirable for the counterweights 16 or 48 to move downhole when actuated because, for instance, it is desired that the weight indicator 28 (Figure 1) register a greater weight when the repeater 10 is actuated and the counterweight 16 strikes the stop 22.

[0024] Other means for “resetting” the positions of counterweights 16 or 48 are also possible, including one or more springs such as a helical spring (not shown) that permits counterweight 16 or counterweights 48 travel until impact with the stop 22 or stop 52 but that then pulls the counterweights back to their rest positions.

[0025] Other configurations of the piston 14 and counterweight 16 are also possible. For instance, it may be possible in some circumstances to use a piston 14 (Figure 1) or pistons 46 (Figure 2) with sufficient mass and stroke that separate counterweights are not

needed. In such a configuration, actuation of piston 14 or 46 travel alone or actuation of the piston and direct impact of piston 14 with stop 22 or of pistons 46 with stop 52 may cause an adequate “bobble” or other event at the rig floor 29 or at an uphole repeater to achieve the desired repetition of a downhole signal or event.

[0026] Similarly, different means may be used to cause counterweights 16 and 48 to impact their respective stops 22 and 52, such as, but not limited to, compressed or pressurized fluid, electromagnetic field propulsion, and gravitational attraction.

[0027] In some aspects, a downhole repeater, method or system receives, amplifies, repeats or transmits according to one or more of the following examples.

[0028] Example #1: A repeater or downhole system for use in a well to detect a sound, condition or signal in the well and communicate that detection uphole can include a sensor, actuator and control circuitry. The sensor can detect an in-well sound, condition or signal. The actuator can generate a perceptible signal or physical change. The control circuitry for detecting the in-well sound, condition or signal can be coupled to the sensor and can actuate the actuator in response to the in-well sound, condition or signal.

[0029] Example #2: The repeater or system of Example #1 may feature a stop and a counterweight to be driven by the actuator against the stop from a rest position.

[0030] Example #3: The repeater or system of Examples #1-2 may feature an actuator that includes a drive piston.

[0031] Example #4: The repeater or system of Examples #1-2 may feature a reset piston for returning the counterweight to the rest position after it has been driven by the drive piston.

[0032] Example #5: The repeater or system of Examples #1-4 may feature control circuitry that turns the repeater or system on and off, or that otherwise controls the repeater or system, in response to control signals.

[0033] Example #6: The repeaters or systems of Examples #1-5 may feature a sensor that is a microphone.

[0034] Example #7: The repeaters or systems of Examples #1-6 may feature sensor that is capable of sensing pressure.

[0035] Example #8: The repeaters or systems of Examples #1-7 may feature a sensor that is or includes an accelerometer.

[0036] Example #9: The repeaters or systems of Examples #1-8 may feature a sensor that is or includes a strain gauge.

[0037] Example #10: The repeaters or systems of Examples #1-9 may feature a sensor that is or includes a hydrophone.

[0038] Example #11: A repeater for use in a well to detect a sound, condition or signal in the well and communicate that detection uphole may include a sensor, multiple actuators and control circuitry. The sensor may detect the in-well sound, condition or signal. The actuators can generate a perceptible signal or physical change. The control circuitry can be coupled to the sensor and the actuators and can actuate the actuators when the in-well sound, condition or signal is received by the sensor.

[0039] Example #12: The repeater of Example #11 can actuate the actuators so that each of the actuators drives one counterweight against one stop. The control circuitry can control the time intervals between the activation of the actuators according to a predetermined pattern.

[0040] Example #13. The repeater of Examples #11 and 12 may feature one or more actuators that are drive pistons.

[0041] Example #14: The repeater of Examples #11-13 may feature for each counterweight a reset piston for returning the counterweight to a rest position after it has been driven by a drive piston.

[0042] Example #15: The repeater of Examples #1-14 may feature a power source for the sensor, circuitry and actuators.

[0043] Example #16: The repeaters of Examples #1-4 and 11-14 may also feature control circuitry for controlling operation of the repeater in response to control signals received by the sensor.

[0044] Example #17: The repeaters of Examples #1-16 may feature a sensor that is one or more of a microphone, pressure sensor, accelerometer, strain gauge or hydrophone.

[0045] Example #18: The repeaters or systems of Examples #1-17 may feature a receiver for use proximate a rig floor, and the receiver may include a receiver sensor, a power source, and an output device.

[0046] Example #19: The repeater or systems of Example #18 may feature a receiver sensor that is one or more of a microphone, pressure sensor, accelerometer, strain gauge or hydrophone.

[0047] Example # 20: The repeaters or systems of Example #18 may feature an output device generates a signal that is visible or audible. Such a visible signal may be produced, without limitation, by a meter, a light-emitting component such as a laser, a LED, or an incandescent, florescent or other lamp. Such an audible signal may be produced by a bell, a buzzer, a speaker or any other device capable of generating sound.

[0048] Example #21: A method of receiving at a rig floor information from deep within a well may utilize a repeater and well equipment. The repeater may be positioned in the well intermediate the rig floor and a location deeper in the well about which information is desired. The well equipment may be manipulated in the well to cause a first signal to emanate from the location deeper in the well about which information is desired. The repeater then may receive the first signal and transmit a second signal to the rig floor.

CLAIMS

That which is claimed is:

1. A repeater for use in a well to detect a sound, condition or signal in the well and communicate that detection uphole, the repeater comprising:
 - a. a sensor for detecting the in-well sound, condition or signal,
 - b. an actuator for generating a perceptible signal or physical change, and
 - c. control circuitry coupled to the sensor and the actuator to actuate the actuator when the in-well sound, condition or signal is received by the sensor.
2. The repeater of claim 1, further comprising a stop and a counterweight to be driven by the actuator against the stop from a rest position.
3. The repeater of claim 2, wherein the actuator comprises a drive piston.
4. The repeater of claim 2, further comprising a reset piston for returning the counterweight to the rest position after it has been driven by the drive piston.
5. The repeater of claim 1, wherein the control circuitry turns the repeater on and off in response to control signals.
6. The repeater of claim 1, wherein the sensor comprises a microphone or other sound sensor.
7. The repeater of claim 1, wherein the sensor comprises a pressure sensor.

8. The repeater of claim 1, wherein the sensor comprises an accelerometer.
9. The repeater of claim 1, wherein the sensor comprises a strain gauge.
10. The repeater of claim 1, wherein the sensor comprises a hydrophone.
11. A repeater for use in a well to detect a sound, condition or signal in the well and communicate that detection uphole, the repeater comprising:
 - a. a sensor for detecting the in-well sound, condition or signal,
 - b. a plurality of actuators for generating a perceptible signal or physical change,and
 - c. control circuitry coupled to the sensor and the actuators to actuate the actuators when an in-well sound, condition or signal is received by the sensor.
12. The repeater of claim 11, wherein each of the plurality of actuators drives one counterweight against one stop and the control circuitry controls the time intervals between the activation of the actuators according to a predetermined pattern.
13. The repeater of claim 12, wherein each actuator comprises a drive piston.
14. The repeater of claim 13, further comprising a reset piston for returning the each of the counterweights to the rest position after it has been driven by each drive piston.

15. The repeater of claim 11, further comprising a power source for the sensor, circuitry and actuators and wherein the control circuitry controls operation of the repeater in response to control signals received by the sensor.
16. The repeater of claim 11, wherein the sensor comprises one of a microphone, pressure sensor, accelerometer, strain gauge or hydrophone.
17. The repeater of claim 1, further comprising a receiver for use proximate a rig floor, the receiver comprising a receiver sensor, a power source, and an output device.
18. The repeater of claim 17, wherein the receiver sensor comprises one of a microphone, pressure sensor, accelerometer, strain gauge or hydrophone.
19. The repeater of claim 17, wherein the output device generates a signal that is visible or audible.
20. A method of receiving at a rig floor information from deep within a well, comprising:
 - a. providing a repeater in the well intermediate the rig floor and a location deeper in the well about which information is desired,
 - b. manipulating a portion of well equipment in the well to cause a first signal to emanate from the location deeper in the well about which information is desired, and
 - c. receiving the first signal with the repeater and transmitting a second signal to the rig floor.

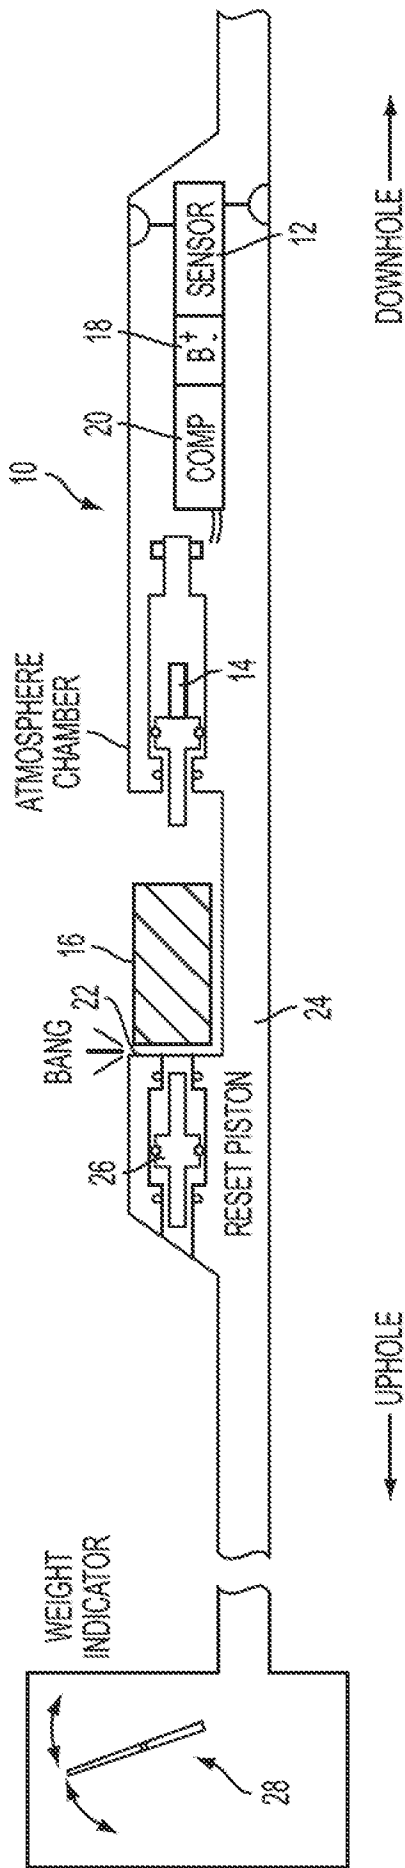


FIG. 1

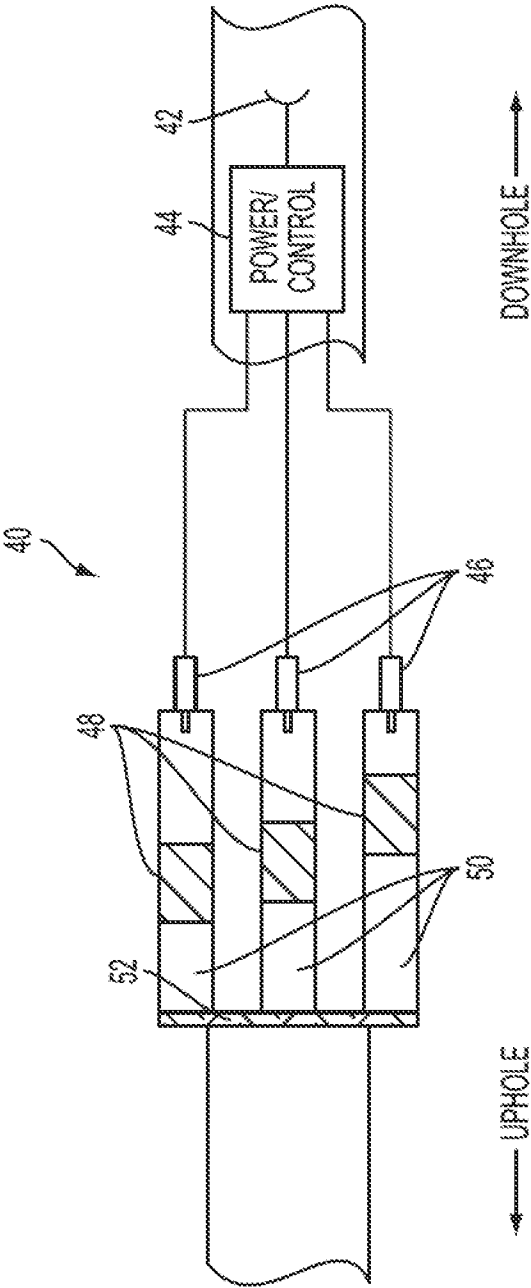


FIG. 2

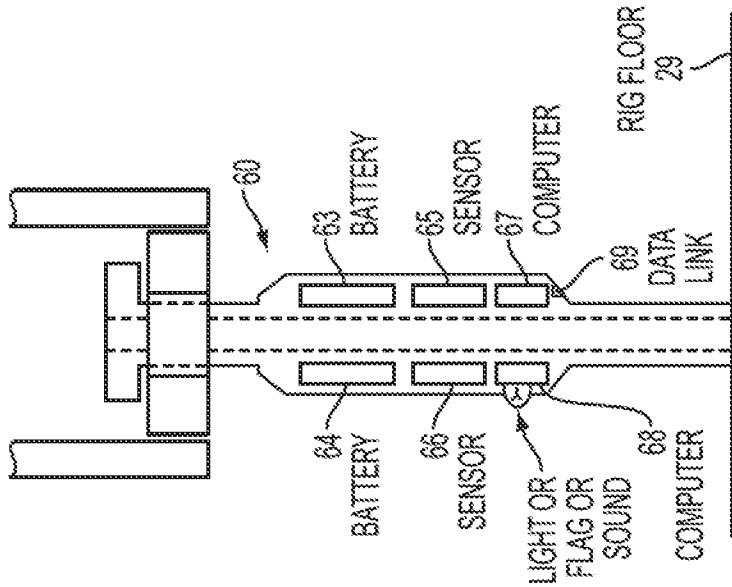


FIG. 3

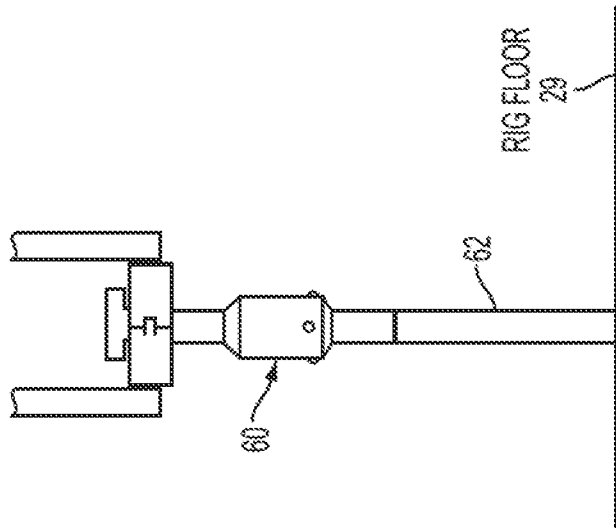


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/077382**A. CLASSIFICATION OF SUBJECT MATTER****E21B 47/12(2006.01)i, E21B 47/14(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 47/12; G01V 3/00; E21B 47/14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: well, rig floor, receiver, repeater, sensor, actuator, control circuitry, stop, counterweight and reset piston

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6177882 B1 (RINGGENBERG et al.) 23 January 2001 See column 4, line 16 - column 5, line 37, column 8, lines 8-20 and figures 1A-1C.	1, 5-11, 15-20
A		2-4, 12-14
A	US 2010-0309019 A1 (SHAH et al.) 09 December 2010 See paragraphs [0028]-[0029], [0039] and figures 1-2.	1-20
A	US 6018501 A (SMITH et al.) 25 January 2000 See column 4, line 22 - column 5, line 21 and figure 1.	1-20
A	US 2010-0013663 A1 (CAVENDER et al.) 21 January 2010 See paragraphs [0039]-[0040] and figure 1.	1-20
A	US 6075461 A (SMITH, HARRISON C.) 13 June 2000 See column 6, line 20 - column 7, line 48 and figures 2-5B.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 September 2014 (24.09.2014)

Date of mailing of the international search report

24 September 2014 (24.09.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/077382

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6177882 B1	23/01/2001	EP 0919697 A2	02/06/1999
		EP 0919697 A3	16/05/2001
		NO 985278 A	02/06/1999
		NO 985278 D0	12/11/1998
US 2010-0309019 A1	09/12/2010	AU 2005-262362 A1	19/01/2006
		BR PI0512694 A	01/04/2008
		CA 2576003 A1	19/01/2006
		CA 2576003 C	10/06/2014
		CA 2847633 A1	19/01/2006
		CA 2847634 A1	19/01/2006
		CN 1997916 A	11/07/2007
		CN 1997916 B	27/10/2010
		US 2006-0002232 A1	05/01/2006
		US 2008-0219097 A1	11/09/2008
		US 7339494 B2	04/03/2008
		US 7777645 B2	17/08/2010
		US 8040249 B2	18/10/2011
		WO 2006-007572 A2	19/01/2006
		WO 2006-007572 A3	02/03/2006
US 6018501 A	25/01/2001	DE 69834015 D1	18/05/2006
		EP 0922836 A1	16/06/1999
		EP 0922836 B1	29/03/2006
US 2010-0013663 A1	21/01/2010	US 2012-0218119 A1	30/08/2012
US 6075461 A	13/06/2000	EP 0927812 A2	07/07/1999
		EP 0927812 A3	27/06/2001
		EP 0927812 B1	26/04/2006
		US 6018301 A	25/01/2000