

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

27 August 2020 (27.08.2020)



(10) International Publication Number

WO 2020/170193 A1

(51) International Patent Classification:

F15B 13/04 (2006.01) G05D 7/01 (2006.01)

F16K 3/08 (2006.01) F15B 13/02 (2006.01)

F16K 17/30 (2006.01)

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/IB2020/051434

(22) International Filing Date:

20 February 2020 (20.02.2020)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

102019000002529 21 February 2019 (21.02.2019) IT

(71) Applicant: GIACOMINI S.P.A. [IT/IT]; Via per Alzo, 39, 28017 San Maurizio d'Opaglio (NO) (IT).

(72) Inventors: MOLINA, Samuele; c/o Giacomini S.P.A., Via per Alzo, 39, 28017 San Maurizio d'Opaglio (NO) (IT). ZUFFELLATO, Andrea; c/o Giacomini S.P.A., Via per Alzo, 39, 28017 San Maurizio d'Opaglio (NO) (IT). ROSA BRUSIN, Marco; c/o Giacomini S.P.A., Via per Alzo, 39, 28017 San Maurizio d'Opaglio (NO) (IT). ARRUS, Paolo; c/o Giacomini S.P.A., Via per Alzo, 39, 28017 San Maurizio d'Opaglio (NO) (IT).

(74) Agent: MAZZOCCHI, Stefano et al.; c/o Praxi Intellectual Property S.P.A., Via Mario Pagano n° 69/A, 20145 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: VALVE FOR HYDRAULIC CONTROL AND BALANCING OF FLUID FLOW RATE

(57) Abstract: A valve (10, 10') for hydraulic control of fluid flow rate, comprising: a body (12) provided with an inlet opening (14), an outlet opening (14') and an actuating opening (16); a rotating hollow shutter (20) rotatively housed inside said body, said rotating shutter (20) being configured to be crossed by a fluid and to change the passage cross-section inside the valve (10, 10'), in which the rotating shutter (20) comprises at least one first opening (22') rotatively cooperating with at least one mated second eccentric opening (15'), said rotating shutter (20) being configured to be manually actuatable inside the body (12) so that a rotation of said first opening (22') with respect to said second opening (15') is matched by a variation of the fluid passage cross-section in a direction substantially coinciding with the rotation axis (11).



WO 2020/170193 A1

"VALVE FOR HYDRAULIC CONTROL AND BALANCING OF
FLUID FLOW RATE"

..*.*.*

D E S C R I P T I O N

TECHNICAL FIELD

The present invention relates to a valve for hydraulic control and balancing of fluid flow rate.

More particularly, the present invention refers to a new technical approach to a valve or hydraulic device for static control and dynamic balancing of the fluid flow rate in a conduit, particularly and in a non-limiting way, to the use in hydronic plants and thermotechnical plants for heating and cooling residential or industrial environments.

PRIOR ART

Valves for hydraulic control and balancing of a fluid flow rate, known also as PICVs (Pressure Independent Control Valves) are typically used in hydraulic and thermotechnical applications in which the availability at the inlet of a constant flow rate of a liquid fluid, generally water, independently from the upstream and downstream fluid pressure variations, is required.

Said known types of valves for hydraulic control and balancing of the flow rate enable a more

versatile and simplified design and implementation of hydronic plants in which it is required to keep constant the flow rate of a fluid thermal carrier to the inlets of one or more users, such as for example heat exchangers, radiators, fan convectors or similar, independently from the fluid pressure conditions present upstream towards the thermal source and downstream towards the user circuit or in branches or sections thereof, in order to meet the design thermal requirements of each single user and in order to prevent thermal or fluid dynamic unbalances, energy waste and the use of further control devices.

A conventional example of a flow rate control valve is implemented by a simple ball shutter valve provided with a through opening. The rotating ball aligns or misaligns the ball opening with the valve inlet and outlet ports consequently varying the fluid passage cross-section between a minimum and maximum values.

A further example of valves for dynamic control and balancing of the fluid flow rate is described in the European patent EP 3 201 500 (B1) in the name of the same Applicant and regarding a valve comprising means for static control of the fluid

flow rate configured to vary the cross-section of a passage port between the valve inlet and outlet and flow rate dynamic balancing means configured to regulate the flow rate of a fluid exiting the valve as a function of a flow rate variation of an entering fluid. The dynamic balancing means comprise a perforated element interposed between the inlet port and an intermediate chamber in order to enable a fluid to flow only through at least one opening of the perforated element. Moreover, an elastic element is placed at a face of the perforated element facing the fluid inlet port in the valve body so that an increase of the pressure difference between the valve inlet and outlet is matched by an enlargement of the elastic element in order to shrink the passage area of the perforated element opening and to ensure a constant flow rate.

Present small and large plants of thermotechnical and hydronic, residential or industrial plants, can operate both for heating by piping to the user circuit plant a "hot" fluid thermal carrier and for cooling by piping to the same circuit of the user plant a "cold" fluid thermal carrier, said hot and cold fluid thermal carriers being both supplied by different thermal sources. Generally, the

alternate delivery of a hot fluid thermal carrier and cold fluid thermal carrier in circuits of hydronic plants combined for heating and cooling, known also as "four pipes" circuits, is typically switched by conventional multiway valves, typically "six way" valves (three plus three ways), configured to pipe and control inside the same circuit the fluid delivery and return, alternatively, between a hot thermal source for heating or a cold thermal source for cooling, according to the requirements of a user.

Moreover, nowadays in many applications the circuits of some users or some sections of the same plants can be required to operate in a heating mode while other can be required to simultaneously operate in a cooling mode. Using a six-way hydraulic valve installed at the ends of each user or (delivery and return) circuit section of a plant enables to alternatively switch the same users or sections from the heating mode to the cooling mode and viceversa, independently from each other.

Some examples of multi-way diverter valves used in the state of the art are the known six ways valves obtained for example by combining two conventional three ways diverter valves generally used

in the "four pipes" plants for managing a same area with two distinct thermal sources.

A typical example of multiway diverter valves is described in the Italian patent application IT 201700010534 in the name of the same Applicant and regarding a multiway valve comprising a valve body with a first and second diverter valves cooperating with each other and each provided with a first and second diverter members and with a triad of opening orifices in the valve body, wherein said multiway valve comprises a tubular cartridge integrating said first and second diverter member. The tubular cartridge is housed inside the valve body and can be displaced inside the valve body and is provided with command members for causing said displacement.

Other examples of these types of multiway diverter valves are described in the following prior art documents US 2011/0303863 (A1), CN 2402891 (Y) and CN 103133444 (A).

The above-mentioned cited known control-balancing valves, or PICVs, have however disadvantages and operating limitations, particularly when they are used in combined circuits and hydronic plants for heating and cooling, provided with diverter valves.

A serious drawback of these cited types of control/balancing valves, particularly in combined heating-cooling hydronic plants, is due to the size thereof and to the lack of room available for mounting them, and due to the fact that in both the delivery-return connecting manifolds of the user and the diverter valve connecting manifolds, there is a great number of hydraulic connecting conduits and pipes which must be often arranged and placed in small and narrow spaces, such as cassettes or junction boxes. Particularly, in plants made and configured to already existing buildings and houses, rooms are further cramped or unavailable.

A further typical limit and drawback of conventional combined heating-cooling hydronic plants provided with diverter multi-way valves is due on that nominal flow rates of the fluid thermal carrier required by the user in heating mode are generally different from flow rates in cooling mode, consequently it is required to use flow rate control means or valves configured to change the amount of the fluid thermal carrier flow entering the diverter valve, depending on whether flow comes from a hot or a cold source.

Therefore, it is extremely difficult for an op-

erator to have enough rooms in which easily install said conventional valves for hydraulic control and balancing of the flow rate and for connecting them to conduits and delivery manifolds at the inlet of the diverter valve from different thermal sources.

Moreover, it is also difficult or even impossible to ensure the further handling room or convenience required to actuate the control/balancing valve itself, both if it's of a manual type by means of a lever, knob, wheel or tap, or it's of an automatic type by means of electric or electromechanical actuators or servomechanisms; therefore, even though it were possible to physically install a valve, the required room for manual handling or housing of remotely controlled electromechanical actuators or servomechanisms, will be still cramped or uncomfortable.

Still, a further limit of the conventional control balancing valves, is due to the fact that said handling room or convenience and space for housing an actuator or servomechanism increase proportionally to the fluid passage cross-section of the valve itself. Indeed, as the valve size increases also the lever or hand command element configured to apply the torque required to move the shutter

increases, otherwise the size and dimension of the analogous mechanical or electromechanical servo-mechanism have to be increased in order to generate the torque required to maneuver the shutter itself. Moreover, a further drawback of small-sized and geometrically simple dynamic balancing valves which are not provided with membranes or other types of means configured to measure inlet and outlet pressure, is due to the fact that they regulate the fluid flow rate generally only as a function of the inlet momentum applied to regulating members instead of control the flow rate also as a function of the fluid pressure difference between the valve inlet and outlet ports.

A still further limit of the conventional control balancing valves is due to their low ratio of the fluid passage cross-section to the outer size of the valve, and due to the fact that the presence of inner members, their size and sudden changes of direction they impose to the fluid, limits the outlet maximum flow rate so that an user is forced to choose larger valves.

The required provision of different control of the nominal flow rate of a fluid thermal carrier supplied from different sources to the diverter

valve, an essential feature for securing the planned thermal exchange inside the user circuit, is typically met, in the presence of narrow rooms, by using of calibrated washers provided on pipe connecting manifolds, on the delivery openings orifices of the diverter valves. Said washers are provided with a calibrated sized central hole in order to generate a concentrated head loss of the flow which, under designed nominal pressure conditions, ensures the required nominal fluid flow rate.

This conventional technical approach, despite being suitable in installation narrow rooms and volumes, has also limits and drawbacks because nor it makes possible further regulating due, for example, to changed conditions of a user plant after modifications or expansion, neither enables an operator to visually check the calibrated diameter of a beforehand installed washer.

Indeed, in up-to-date engineering type implementations, it is sought the capability of a plant to be easily adaptable and modifiable as a function of changed needs of a user, for example caused by future extensions or modifications, which is not possible in the above cited examples except for disconnecting, disassembling or opening the mani-

folds, connecting conduits between the ports of the diverter valve for replacing or recalibrating of control means, such as calibrated washers, such operation, besides being disadvantageous and uncomfortable, entails costs and the requirement of a skilled technical operator.

OBJECTS OF THE INVENTION

An object of the present invention consists of overcoming, at least partially, the operative drawbacks and limits of the above discussed prior art. More specifically, object of the present invention consists of providing to an operator a valve for hydraulic control and balancing of fluid flow rate capable of being installed in extremely narrow rooms, typically cabinets or general manifold boxes provided with a high number of interconnected pipes or conduits.

A further object of the invention consists of providing a valve for hydraulic control and balancing of fluid flow rate which can be easily arranged, adjustable, and manoeuvrable by an operator in extremely narrow rooms typical of cabinets and manifold general boxes containing a high number of interconnecting pipes or conduits, without using levers, taps, wheels or other handling servomecha-

nisms outside the body of the valve itself.

A further object of the invention consists of providing a valve for hydraulic control and balancing of fluid flow rate , capable of being easily arranged and adaptably paired with a multiway diverter valve or capable of being associated to already existent plants.

Last but not least object of the present invention is to provide a small-sized valve, a multiway diverter valve assembly or a six-way valve simultaneously allowing hydraulic independent control and/or balancing of fluid flow rate at inlet or outlet ports.

A still further object of the present invention consists of providing an operator a valve for dynamically balancing a flow rate capable to control a fluid flow rate as a function of the momentum of the entering fluid and also as a function of the pressure difference between the valve inlet port and outlet port.

A still further object of the present invention consists of providing to an operator a valve for control and balancing of fluid flow rate having a greater ratio between the fluid passage cross-section and therefore the flow rate and the exter-

nal size of the valve.

Lastly, a further object of the present invention consists of providing a valve for hydraulic control and balancing of fluid flow rate capable of ensuring a high level of strength and reliability in the long term, and such to be easily and economically manufacturable.

These and other objects are met by the valve for hydraulic control and balancing of fluid flow rate object of the present invention according to the independent claim.

The structural and functional characteristics of the valve for hydraulic control and balancing of fluid flow rate can be better understood from the following detailed description in which it is made reference to the attached drawings representing some preferred non-limiting embodiments, wherein:

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 is a schematic illustration of an axonometric view of a first simplified embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention, clearly showing the manual regulating control step performed by an operator acting on the outer surface of the shutter through an opening made in the

valve body;

Figure 2 is a schematic illustration of a further axonometric view, from a different point of view, of a first embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figure 3 is a schematic illustration of an exploded axonometric view of the first embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figure 4 is a schematic representation of an axonometric view of a second embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention, clearly showing the manual regulating control step performed by an operator acting on the external surface of the shutter through an opening made on the valve body;

Figure 5 is a schematic illustration of a further axonometric view, from a different point of view, of a second embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figure 6 is a schematic illustration of an exploded axonometric view of the second embodiment of

the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figures 7 and 8 are schematic illustrations respectively of a front view and lateral view of the first embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figures 9 and 10 are schematic illustrations respectively of a longitudinal cross-section view along the plane B-B in Figure 7 and of a longitudinal cross-section view along the plane A-A of Figure 9 of the first embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figures 11 and 12 are schematic illustrations respectively of a front view and lateral view of the second embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention;

Figures 13 and 14 are schematic illustrations respectively of a longitudinal cross-section view along the plane B-B of Figure 11 and a longitudinal cross-section view along the plane A-A of Figure 13 of the second embodiment of the valve for hydraulic control and balancing of fluid flow rate object of

the present invention;

Figure 15 is a schematic illustration of a front view of a known multiway hydraulic diverter valve provided with two valves for hydraulic control and balancing of fluid flow rate object of the present invention, disposed on the inlet openings from thermal sources;

DETAILED DESCRIPTION OF THE INVENTION

With preliminary reference to Figures from 1 to 3, and particularly to Figures from 7 to 10, which show a first simplified embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention, indicated by 10, and only suitable to statically control or pre-regulate fluid flow rate.

Moreover, it is made reference to Figures from 4 to 6 and from 11 to 14, which show a second embodiment of the valve for hydraulic control and balancing of fluid flow rate object of the present invention, generally indicated by 10' and both configured to statically control or pre-regulate and dynamically balance a fluid flow rate.

Said valves 10, 10' comprise:

- a body 12 generally having a substantially tubular cylindrical shape provided with an inlet

opening 14, outlet opening 14' disposed at the ends of said body 12 and having at least one actuating opening 16 radially formed on the body 12 itself;

- a hollow rotating shutter 20 rotatively housed inside said body 12, with respect to a rotation axis 11, said rotating shutter 20 being configured to be crossed by a fluid and to rotatively change the passage cross-section of a fluid inside the body 12 itself of the valve 10, 10'.

Referring in particular to Figures 9 and 10 and 13 and 14, the valve 10, 10' comprises the novel characteristics of a rotating shutter 20 having a glass or cup shape comprising at least one first opening 22', developing along the rotation axis 11 of said rotating shutter 20 and eccentric to the same rotation axis 11, said first opening 22' cooperatively rotating with at least one mated second opening 15', eccentric to the same rotation axis 11 of the rotating shutter 20, said second opening 15' being formed on an inner wall 15 of said body 12, so that a rotation of said first opening 22' with respect to said second opening 15' is matched by a variation of the fluid passage cross-section. Said rotating shutter 20 is configured to be further directly manually rotatively actuated, inside said

body 12, by the exposed diametral surface thereof, through said actuating opening 16, so that a rotation of said first opening 22' with respect to said second opening 15' is matched by a variation of the fluid passage cross-section in a direction substantially coinciding with the rotation axis 11 of the same rotating shutter 20.

Still referring to the preferred embodiment in the figures, the body 12 can advantageously comprise two actuating openings 16 radially and diametrically formed oppositely to each other, so that it is possible to easily gain access to diametrically opposite portions of the outer diametral surface of the rotating shutter 20 from the outside of the body 12 so that an operator will be capable of gripping the rotating shutter 20 by his/her two opposite fingers.

The first opening 22' is through and can be shaped in a different way and is formed on a bottom wall 22 of said rotating shutter 20, said shutter rotatively facing to seatback against said inner wall 15 of the body 12.

The second mated opening 15' is also through and can be differently shaped, preferably coinciding with a first opening 22. The number of said

first and second openings 22' and 15' can be more than one, as in the embodiments shown in Figures 3 and 6 and they enable by rotating the first with respect to the second, by to the rotation of the rotating shutter 20, to alternatively increase or decrease the fluid passage cross-section.

Said inner wall 15 can be made and formed directly in the body 12 or can be advantageously defined by a perforated disk-shaped element removably housed inside the body 12. Said inner wall 15 can be further provided with at least one lobed portion 17 mated to a corresponding mated recess formed inside the body 12, said lobed portion 17 being such to prevent the same inner wall 15 from rotating and to hold the second opening 15' in a stationary position with respect to the first rotatively mated opening 22' of the rotating shutter 20.

Said body 12 and said rotating shutter 20 are preferably made of a metal material, typically, copper alloys or iron alloys, however, can be also advantageously made of plastic polymeric materials and thermoplastic materials, or of materials obtained by sinterizing metal or ceramic powders or of materials obtained by additive manufacturing processes.

The body 12 can be also preferably provided, at its ends, with known connecting means 24, 24' configured to connect the valve 10 to conventional elements for connecting pipes and conduits, such as for example threads, connectors, fittings or equivalent, both of a male and female types.

Advantageously, one or more clamping profiles 25, such as collars or hex key profiles configured to be mated with conventional assembling hex keys and tools, can be also further made on the outer surface of the body 12.

The rotating shutter 20 can be advantageously provided with an irregular surface portion 26 formed on an annular portion of the outer surface itself and exposed through the actuating opening 16 of the body 12, for example obtained by knurling the metal surface and configured to easily enable an operator to manually actuate it.

Referring particularly only to Figures 8 and 12, advantageously said rotating shutter 20 can be also provided with a graduated scale 27 formed again on an exposed annular portion of the outer surface thereof at the actuating opening 16 of the body 12, said graduated scale 27 being obtained by silk screen printing or stamping the metal surface

and being configured, cooperatively with a nick or reference 19 formed on the body 12, to indicate to the operator, outside the body 12, the angular position of the second opening 22' of the rotating shutter 20 with respect to the stationary second opening 15' of the inner wall 15 and corresponding to a greater or smaller extension of the fluid passage opening.

Referring to Figures 3, 9, and 10, in the first embodiment, the valve 10 comprises a spacer 82 housed in said body 12 having substantially an annular shape, said spacer 82 being

configured to close the opening 14 in order to prevent the inner elements to be extracted from the body 12 of the valve 10.

Valve 10, 10' can also comprise conventional first fluid sealing elements 90 disposed between the body 12 and rotating shutter 20 and second fluid sealing elements 90' disposed between said rotating shutter 20 and said spacer 82. Said first and second sealing elements 90, 90' can be further fit and housed in mated seats or recesses formed on the same rotating shutter 20 and spacer 82 or, alternatively, formed on the body 12 inner surface.

Valve 10, 10' can comprise also conventional

third fluid sealing elements 95 disposed between the body 12 and other connecting elements, hydraulic devices or valves, not shown, said third fluid sealing elements 95 being generally fit and housed in suitable seats or recesses.

Referring now to Figures from 4 to 6 and from 11 to 14, and particularly to Figs 6, 13 and 14, in a second embodiment, the valve 10' further comprises:

- a sleeve 30 having a substantially tubular shape, housed inside the rotating shutter 20 and defining with it a substantially toroidal annular chamber 50, said sleeve 30 being provided with at least one first through radial opening 32 formed in the lateral wall of the sleeve itself 30 and being disposed, at an end thereof, in contact with the bottom wall 22 of said rotating shutter 20 and with the opposite end facing the inlet opening 14;

- a floating piston or shutter 40, slidably housed inside the sleeve 30, having a substantially tubular glass or cup shape, with a bottom 42 and provided with at least one second radial through opening 43 made on the lateral wall, cooperating and mated to said first radial opening 32, said floating shutter 40 defining a first inner chamber

41 and a second inner chamber 52 comprised and delimited between the bottom 42 of the floating shutter 40 itself, the sleeve 30 and the bottom wall 42 of the rotating shutter 20;

so that an axial translation motion of said second radial opening 43 of the floating shutter 40 with respect to said first radial opening 32 of the sleeve 30, is matched by a variation of the fluid passage cross-section proportional to the axial sliding of the floating shutter 40.

Said fluid passage cross-section, defined between said first and second radial openings 32, 43, is configured to fluidically connect said annular chamber 50 to the inlet opening 14 of the valve 10', through the first chamber 41. In contrast, said second inner chamber 52 is fluidically connected to the outlet opening 14' by at least one passage 55 made through the bottom wall 22 of the rotating shutter 20 and inner wall 15, so that a force determined by a pressure difference between the inlet opening 14 and outlet opening 14' acts on the bottom 42 of the floating shutter 40.

Preferably, said passage 55 is coaxially made with the rotation axis 11, so that it does not change the passage cross-section thereof or is not

obstructed by the rotation motion of the rotating shutter 20 with respect to the inner wall 15.

With reference to the preferred embodiment of valve 10' of the figures, a plurality of said first and second radial openings 32, 43 are diametrically made and distributed on the lateral walls of said sleeve 30 and said floating shutter 40, so that the relative rotation between sleeve 30 and floating shutter 40 with respect to the rotation axis 11 determines a negligible variation of the fluid passage cross-section with respect to the axial sliding motion of the floating shutter 40.

Valve 10' can be also provided with an elastic return element 60 disposed inside the second inner chamber 52 between the bottom 42 of the floating shutter 40 and the bottom wall 22 of the rotating shutter 20, and configured to hold the floating shutter 40 itself in a monostable position with the first radial opening 32 and second radial opening 43, in a position corresponding to the maximum fluid flow passage.

Advantageously, said sleeve 30 can be also stably coaxially housed in the rotating shutter 20 by a mouthpiece 21 formed on the bottom wall 22 of the rotating shutter 20 itself in order to improve the

fluid sealing between the annular chamber 50 and second inner chamber 52.

Advantageously, the elastic element 60 can be also housed, at the ends thereof, inside a first recess 21' formed on the bottom wall 22 of the rotating shutter 20 and inside a second recess 42' made at the bottom end 42 of the floating shutter 40, in order to be firmly held in position with respect to the sleeve 30 and the floating shutter 40 itself.

Specifically, it is made reference to the preferred embodiment of Figures 9 and 13, in which the sleeve 30 and floating shutter 40 can be advantageously formed in a "goblet" shape having a diametral increased cross-section at the corresponding ends facing the inlet opening 14, in order to enable a greater structural size of the first and second mated radial openings 32, 43 and first and second mated openings 22', 15', with respect to a structural size obtainable by a simpler cylindrical tubular shape.

The goblet shape of the sleeve 30 and floating shutter 40 defines between them a further third chamber 53 having a volume varying with the axial sliding of the floating shutter. Said third chamber

can also act as an elastic element upon compressing the air trapped inside the chamber.

One or more drain holes 44 for draining a possible incompressible liquid being trapped between the walls of said third chamber 53 can be provided, and such to prevent the floating shutter 40 from freely sliding inside the sleeve 30.

Referring again to the preferred embodiment of the figures, said sleeve 30 can comprise a diametral increased portion 35 with a shoulder formed at the open end thereof facing the inlet opening 14, said diametral increased portion 35 being configured to enable the sleeve 30 to be stably housed inside the body 12. In a further alternative embodiment, the diametral increased portion 35 can be separated from and be in contact with the sleeve 30 or can be replaced, for example, by the spacer 82 of the first simplified embodiment of the valve 10.

Referring in particular also to Figures 13 and 14, the valve 10' can comprise one or more conventional first fluid sealing elements 90 disposed between the body 12 and rotating shutter 20 and one or more fluid sealing elements 90' disposed between said rotating shutter 20 and said sleeve 30. Said first and second sealing elements 90, 90' can be

fit and housed in mated seats or recesses formed on the rotating shutter 20 and diametral increased portion 35 of the sleeve 30 or alternatively formed on the inner surface of the body 12.

Sleeve 30 and floating shutter 40 can be also preferably made of a metal material, typically copper alloys or iron alloys, however they can also be advantageously made of plastic polymeric materials or thermoplastic materials or materials obtained by sinterizing metal or ceramic powders or of materials obtained by additive manufacturing process.

Referring again to all the Figures from 1 to 14, said valve 10, 10' can be advantageously provided with conventional stop elements 80, such as for example elastic retaining rings, snap rings also known as Seeger, washers and similar, housed in an annular recess formed on the inlet opening 14 of the body 12, said stop elements 80 being configured to prevent said spacer 82 and/or shutter 30 from axially sliding and being extracted.

Referring now just to Figures 6, 13 and 14, in the second embodiment, the valve 10' can further comprise at least one third fluid sealing element 92, such as for example gaskets or O-rings, disposed between the sleeve 30 and floating shutter 40

and configured to maintain the fluid sealing between said first inner chamber 41 and said second inner chamber 52. Advantageously, said third sealing element 92 can be also fit and housed in a seat or recess 45 formed on the outer diametral surface of the floating shutter 40.

Said first and second sealing elements 90, and 90' and said other sealing elements 95 can be of the gasket type or O-ring type, preferably made of polymeric and elastomeric materials.

Referring just to Figure 15, part of the object of the present invention is also a device comprising a valve 10, 10' attached to a conventional multiway hydraulic valve or diverter valve 100, such as for example a six way (3+3) valve, provided with a valve body 102 and a plurality of openings 104 formed on the valve body 102 itself and actuating inner members 106 capable of selectively piping the flow rate of the fluid entering the inlet openings from two distinct thermal sources to a single outlet opening towards the thermal user circuit and returning from the return opening from the user circuit selectively towards the two outlet openings returning to the sources.

The multiway valve or diverter valve 100 com-

prises at least one valve 10, 10' for hydraulic control and balancing of fluid flow rate stabilized at one of the openings of the multiway valve or diverter valve 100 itself, preferably, but in a non-limiting way, at the openings 104 connected by the thermal sources, for example hot and cold, to the multiway valve or diverter valve 100.

From the description of the valve 10, 10' for hydraulic control and balancing of fluid flow rate object of the present invention, it is understood the operation described in the following.

Referring to Figures from 1 to 3 and from 7 to 10, in the first simplified embodiment, the valve 10 is capable of providing only one static control or pre-regulation of the fluid flow rate. The static control of the fluid flow rate is the same also in the second embodiment of the valve 10', in the same way to what is hereinbefore described with reference to the first embodiment of the valve 10.

In the valve 10, 10' of the present invention, the rotating shutter 20, for example unlike a conventional hollow ball shutter, is configured to rotate and to be crossed by a fluid with respect to an axis substantially coinciding with the fluid flow direction, between the inlet opening 14 and

outlet opening 14', without the requirement of using levers, knobs, taps, or wheels, and when the outer diametral surface of the shutter itself operates as an actuating means.

The operator, by acting with one or more fingers on the irregular surface portion 26 through the actuating opening 16 of the body 12, puts in rotation the rotating shutter 20 with respect to the body 12 itself of the valve 10, 10'. A rotation of the rotating shutter 20 aligns the first openings 22' so that they are cooperatively oriented with the mated second openings 15' of the inner wall 15, in order to consequently vary the port or fluid flow cross-section passage inside the valve 10, 10' between a minimum or null value and a maximum value respectively corresponding to the obtainable maximum and minimum limit values of the flow rate.

The valve 10, 10' can be configured to interrupt the fluid flow in a position wherein the first openings 22' and second openings 15' do not overlap, not even partially, or the valve 10, 10' can be configured in order to always ensure a minimum fluid flow passage by always leaving a minimum overlapping surface between the first and second

openings 22', 15' themselves. When the shapes of the first opening 22' of the rotating shutter 20 coincide with each other, by overlapping the shapes of the second openings 15' of the inner wall 15, the maximum opening of the fluid flow passage is obtained. The greater the offset angle between the first openings 22' and second openings 15' is, the smaller the fluid flow passage opening will be. The graduated scale 27, present on the external surface of the rotating shutter 20, shows the operator the offset angle of the openings 22' and 15'; when the offset angle is about 0° , in other words the openings completely overlap on each other, the maximum value of the graduated scale is positioned at the nick or reference 19. Viceversa, when the maximum offset angle between the first openings 22' and second openings 15' is the greatest and corresponds to a minimum or null passage port of the fluid, the minimum value of the graduated scale is in correspondence of the nick or reference 19.

Once the opening of the passage port or cross-section is adjusted by rotating the rotating shutter 20 in order to take the numeric value selected on the graduated scale 27 to the nick or reference 19 corresponding to the desired nominal flow rate,

the flow rate exiting the valve 10, 10' therefore remains constant if there are not upstream and downstream pressure variations.

With reference to Figures from 4 to 6 and from 11 to 14, the valve 10' of the second embodiment is capable of providing, besides a static control or pre-regulation, also a flow rate dynamic balancing, in other words the valve 10' is capable of self-balancing and maintaining constant the fluid flow rate set by the graduated scale 27 by rotating the rotating shutter 20, also as a result of a variation of the upstream and downstream fluid pressure conditions.

In an initial transient phase, the pressurized fluid flow enters the valve 10' through the inlet opening 14 and flows in proximity of the first inner chamber 41 of the floating shutter 40, striking the floating shutter 40 itself floods the annular chamber 50 by flowing through the passage cross-section defined by the first radial openings 32 of the sleeve 30 and by the second radial openings 43 of the floating shutter 40, said openings being completely overlapped.

Referring particularly to Figures 13 and 14, the increasing momentum of the entering liquid flow

rate causes an increased pressure in the first inner chamber 41 and such to produce a force, proportional to its strength, on the bottom 42 of the floating shutter causing it to axially translate and overcoming the force of the elastic element 60. The increasing flow rate through the first and second radial openings 32, 43, determined by a pressure increase in the first inner chamber 41, increases also the thrusting force on the floating shutter 40 which is consequently caused led to translate towards the outlet opening 14' with the second radial openings 43 translating with respect to the first radial openings 32 of the sleeve 30, consequently reducing their overlapping and the passage cross-section of the liquid flow in the annular chamber 50, so that a flow rate reduction is caused.

The rigidity of the elastic element 50 determines also a pressure range in which the floating shutter 40 is capable of compensating the pressure difference.

Still referring to the same figures, if the fluid pressure and the momentum thereof decrease, causing a reduction of the liquid flow rate through the valve 10', the elastic element 60 overcomes the

opposite force exerted by the fluid on the bottom 22, translating the floating shutter 40 in an opposite direction and increasing the fluid passage cross-section from the first inner chamber 41 to the annular chamber 50, in order to always maintain constant the flow rate about the desired nominal value.

If the momentum of the entering fluid increases, and also the pressure difference between the inlet and outlet increases, they also cause an increase of the fluid flow rate so that the floating shutter 40 is moved to the left and the fluid passage cross-section is shrank so that the increased pressure at the inlet is compensated and the preset flow rate is maintained constant.

If the upstream fluid momentum decreases and/or the downstream pressure increases at the outlet opening 14' of the valve 10', the fluid flow rate decreases. The fluid pressure at the outlet opening 14' is the same as the one inside the second inner chamber 52, since said second inner chamber 52 is always in fluid communication with the outlet opening 14' through the passage 55 (Figures 13 and 14).

The fluid pressure in the outlet opening 14' is consequently transmitted into the second inner

chamber 52 so that the floating shutter 40 with the elastic element 60 is thrust to the right in order to increase the fluid cross-section at the first and second radial openings 32, 43, so that a greater amount of fluid is retrieved in the valve 10' and the pressure difference is reduced.

The first sealing elements 90 ensure the operation of the valve 10, 10' by fluidically sealing the rotating shutter 20 from the body 12, while the third sealing element 92 fluidically seals the first and second inner chambers 41, 52.

Still referring to the same figures, the operation of the present valve is innovative with respect to the traditional valves because a force determined by the fluid pressure in the second inner chamber 52 operates on the bottom 42 of the floating shutter 40. Said force determined by the pressure downstream the valve in the outlet opening 14' is added to the force of the elastic element 60 and together they thrust the floating shutter 40 in order to increase the fluid passage cross-section in the annular chamber 50 and a greater amount of liquid is retrieved in the outlet opening 14' from the annular chamber 50, through the first and second openings 22', 15'.

In this configuration, the valve 10' besides operating in dependence of the momentum of the entering fluid flow, also advantageously operates as a function of the pressure difference Δp measured between the pressure of the fluid entering the first inner chamber 41 and pressure of the fluid exiting the second inner chamber 52.

Referring again just to Figure 15, valve 10, 10' paired with a traditional hydraulic multiway valve or diverter valve 100, such as for example a six way (3+3) valve, enables to manage, by means of a single compact device, the static control and dynamic balancing, at the inlet of a user hydraulic circuit, from two distinct thermal inlet sources, for example hot and cold, which generally require fluid flow rates different from each other.

The valve 10, 10', besides being easily installed and placed on the opening 104 of the multiway valve 100, and having a compact size, enables the operator to pre-regulate the flow rate from distinct thermal sources without disconnecting delivery conduits and manifolds from the openings 104 of the valves. Moreover, the valve 10, 10' enables the operator to advantageously see on the graduated scale 27 of the valve 10, 10' itself, the pre-

regulated set of the flow rate through the different openings 104 of the multiway valve 100.

The valve 10, 10', object of the present invention, can be advantageously installed on the openings 104 configured as an inlet from the thermal sources, independently from their position on the multiway valve 100.

The preceding illustration makes clear the advantages obtained by the valve for hydraulic control and balancing of fluid flow rate object of the present invention.

The valve for hydraulic control and balancing of fluid flow rate object of the present invention is particularly advantageous since can be easily installed in very narrow rooms and in general boxes where a high number of conduits and pipes are received, because said valve is geometrically simplified into the shape of a segment or piece of a cylindrical pipe.

Specifically, the easier and smoother installation in narrow rooms of the valve of the present invention makes it particularly convenient when is installed paired with a traditional multiway diverter valve or "six way" valve.

The valve for hydraulic control and balancing

of fluid flow rate object of the present invention is also particularly advantageous because enables a user to check it from the outside and adjust the flow rate, for example as a function of changed conditions or extensions of the user plant, without disassembling connecting manifolds and pipes and without the presence of a skilled operator.

A further relevant advantage of the valve for hydraulic control and balancing of fluid flow rate is that it does not have actuating members projecting or protruding above the valve body itself, such as levers, knobs, screw down taps or electromechanical actuators which decrease the available installation space.

A consequent further advantage of the valve for hydraulic control and balancing of fluid flow rate consists of requiring less room or space for maneuvering the control members, levers, knobs, taps, etcetera, because this valve can be easily actuated by acting on only with one finger of the operator.

A further advantage of the valve for hydraulic control and balancing of fluid flow rate of the present invention is that during the hydraulic balancing step, the valve is capable to control the flow rate as a function of the pressure difference

between the inlet and outlet openings of the same and not only as a function of the momentum of the liquid fluid which moves the inner balancing members.

Another important advantage due to the valve for hydraulic control and balancing of fluid flow rate is that the same enables a substantial fluid flow rate in comparison with the small outer size due to the low load losses and the c obtained by maintaining the linear direction of the fluid without sudden changes of direction.

A still further advantage of the valve for hydraulic control and balancing of fluid flow rate object of the present invention is due to the fact that while the manoeuver members and maneuvering rooms of a traditional valve increase proportionally to the size of the valve, in the valve object of the present invention the same remain constant because it can be easily actuated by only one finger of the operator independently from the size and proportion of the same.

A further advantage of the valve for hydraulic control and balancing of fluid flow rate is due to the fact that the longitudinal size of the valve can remain substantially unchanged even though the

valve radial size increases. Further, while in a traditional valve the force required for actuating the control members increases as the valve size increases, by the valve for hydraulic control and balancing of fluid flow rate object of the present invention the force remains constant and the valve can be easily actuated by only one finger of the operator because the lever arm of the operator acting on the irregular surface portion 26 increases as the diametral size of the rotating shutter 20 increases.

While the beforehand described invention was described referring particularly to some preferred embodiments, given in an exemplifying non-limiting way, many modifications and variants will be understood by a person skilled in the art in light of the above discussed description. Therefore, the present invention intends to encompass all the modifications and variants falling in the scope of the attached claims.

C L A I M S

1. A valve (10, 10') for hydraulic control of fluid flow rate, comprising:

- a body (12) provided with an inlet opening (14), an outlet opening (14') and an actuating opening (16);

- a rotating hollow shutter (20) rotatively housed inside said body (12), with respect to a rotation axis (11), said rotating shutter (20) being adapted to be crossed by a fluid and to change the passage cross-section inside the valve (10, 10'),

characterized by the fact said rotating shutter (20) comprises at least one first eccentric opening (22') rotatively cooperating with at least one mating second eccentric opening (15') formed on an inner wall (15) of said body (12), said rotating shutter (20) being configured to be manually actuable inside the body (12) through said actuating opening (16), so that a rotation of said first opening (22') with respect to said second opening (15') is matched by a variation of the fluid passage cross-section in a direction substantially coinciding with the rotation axis (11) of the shutter (20) itself.

2. The valve (10, 10') according to claim 1, wherein said at least one first opening (22') is formed on a bottom wall (22) of said rotating shutter (20), said rotating shutter (20) rotatively facing against said inner wall (15) of the body (12).

3. The valve (10, 10') according to claim 1, wherein said inner wall (15) is defined by a disk-shaped perforated removable element housed inside the body (12).

4. The valve (10, 10') according to claim 3, wherein said inner wall (15) is provided with at least one lobed portion (17) mated to a corresponding recess formed inside the body (12), said lobed portion (17) being such to prevent the inner wall (15) from rotating.

5. The valve (10, 10') according to claim 1, wherein said rotating shutter (20) is provided with a rough surface portion (26) formed on an annular portion of the outer surface thereof at the actuating opening (16) of the body (12).

6. The valve (10, 10') according to claim 1, wherein said rotating shutter (20) is provided with a scale (27) formed on an annular portion of the outer surface thereof at the actuating opening (16)

of the body (12), in cooperation with a nick or reference (19) formed on the body (12).

7. The valve (10, 10') according to claim 1, comprising a first spacer (82) housed in said body (12) and having a substantially annular shape, said spacer (82) being adapted to close the inlet opening (14) in order to prevent the inner elements to be extracted from the body (12) of the valve (10, 10').

8. The valve (10') according to claim 1, comprising:

- a sleeve (30) housed inside the rotating shutter (20) and defining with it an annular chamber (50), said sleeve (30) being provided with at least one first radial opening (32) made on the lateral wall of the sleeve (30) itself, and said sleeve (40) being disposed at an end thereof in contact with the bottom (22) of said rotating shutter (20), and the opposite end thereof facing the inlet opening (14);

- a floating shutter (40), slidably housed inside the sleeve (30), being in a substantially tubular shape with a bottom (42) and provided with at least one second through radial opening (43) made on the lateral wall thereof, cooperating and being

mated with said first radial opening (32), said floating shutter (40) defining a first inner chamber (41) and a second inner chamber (52), so that a rotation movement of said second radial opening (43) of the floating shutter (40) with respect to said first radial opening (32) of the sleeve (30), is matched by a variation of the fluid passage cross-section proportional to the axial slide of the floating shutter (40); said fluid cross-section is configured to fluidically connect said annular chamber (50) to the inlet opening (14) of the valve (10') through the first chamber (41), said second inner chamber (52) being fluidically connected to the outlet opening (14) by a passage (55) made through the bottom wall (22) and inner wall (15).

9. The valve (10') according to claim 8, wherein a plurality of said first and second radial openings (32, 43) are formed on the lateral walls of said sleeve (30) and of said floating shutter (40).

10. The valve (10') according to claim 8, comprising an elastic element (60) disposed in the second inner chamber (52) between the bottom (42) of the floating shutter (40) and the bottom wall (22) of the rotating shutter (20), said elastic el-

ement (60) being configured to hold the floating shutter (40) itself in a monostable position.

11. The valve (10') according to claim 8, wherein said sleeve (30) is firmly and coaxially housed in the rotating shutter (20) by a mouthpiece (21) formed on the bottom wall (22) of the rotating shutter (20) itself, in order to improve the fluid sealing between the annular chamber (50) and second inner chamber (52).

12. The valve (10') according to claim 10, wherein said elastic element (60) is housed, at the ends thereof, in a first recess (21') made on the bottom wall (22) itself of the rotating shutter (20) and in a second recess (42') made on the end of the bottom (42) of the floating shutter (40), in order to be stably positioned with respect to the sleeve (30) and floating shutter (40).

13. The valve (10') according to claim 8, wherein said sleeve (30) and floating shutter (40) are formed with a goblet shape having a diametral increased cross-section at the corresponding ends facing the inlet opening (14).

14. The valve (10') according to claim 8, wherein said goblet shape of the sleeve (30) and floating shutter (40) defines a third chamber (53)

having a volume adapted to change as the floating shutter (40) axially slides.

15. The valve (10') according to claim 14, comprising one or more drain holes (44) for draining a possible incompressible liquid being trapped between the walls of said third chamber (53).

16. A multiway hydraulic valve or diverter valve (100) comprising a valve body (102) and a plurality of connecting openings (104), and comprising at least one valve (10, 10') according to one of the preceding claims from 1 to 15.

FIG.1

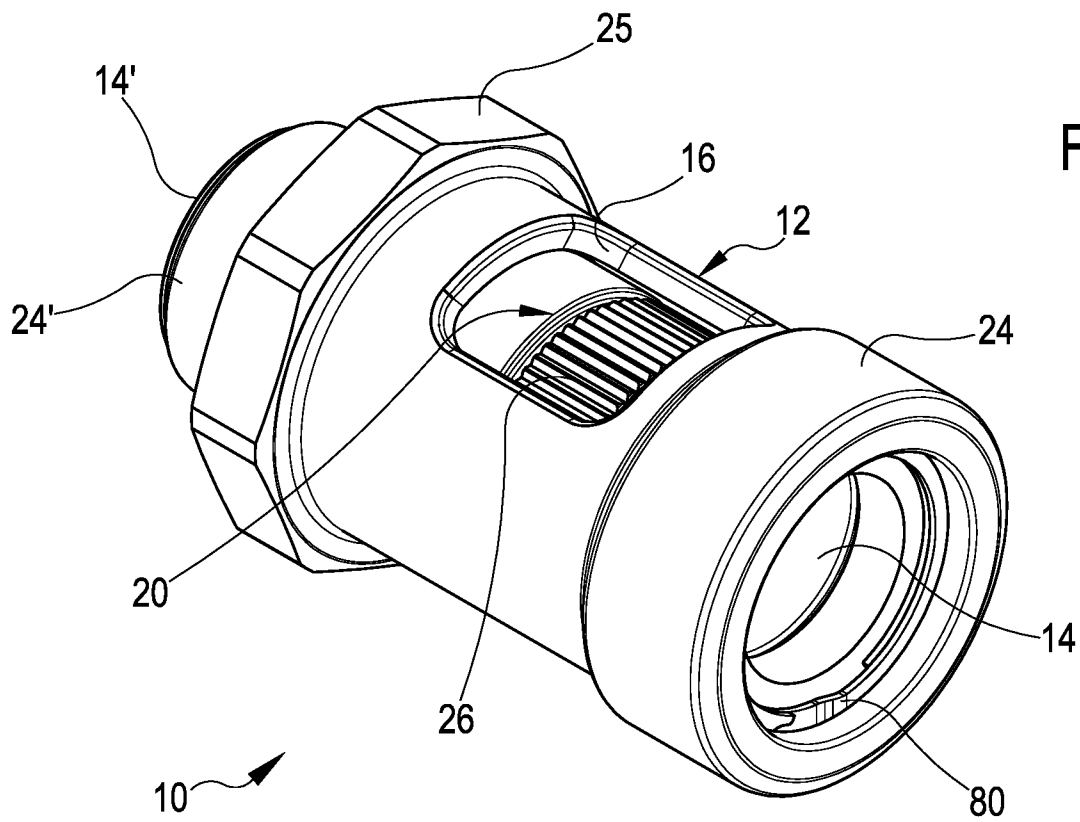
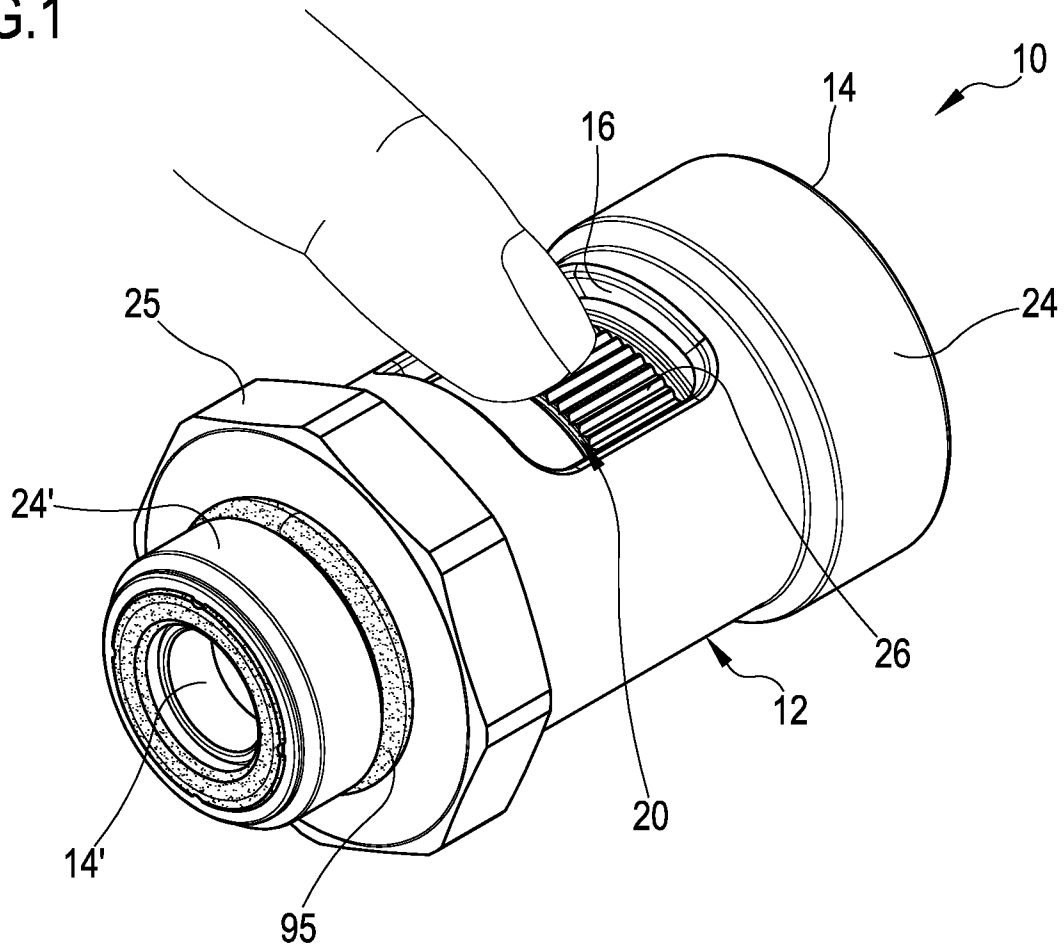


FIG.2

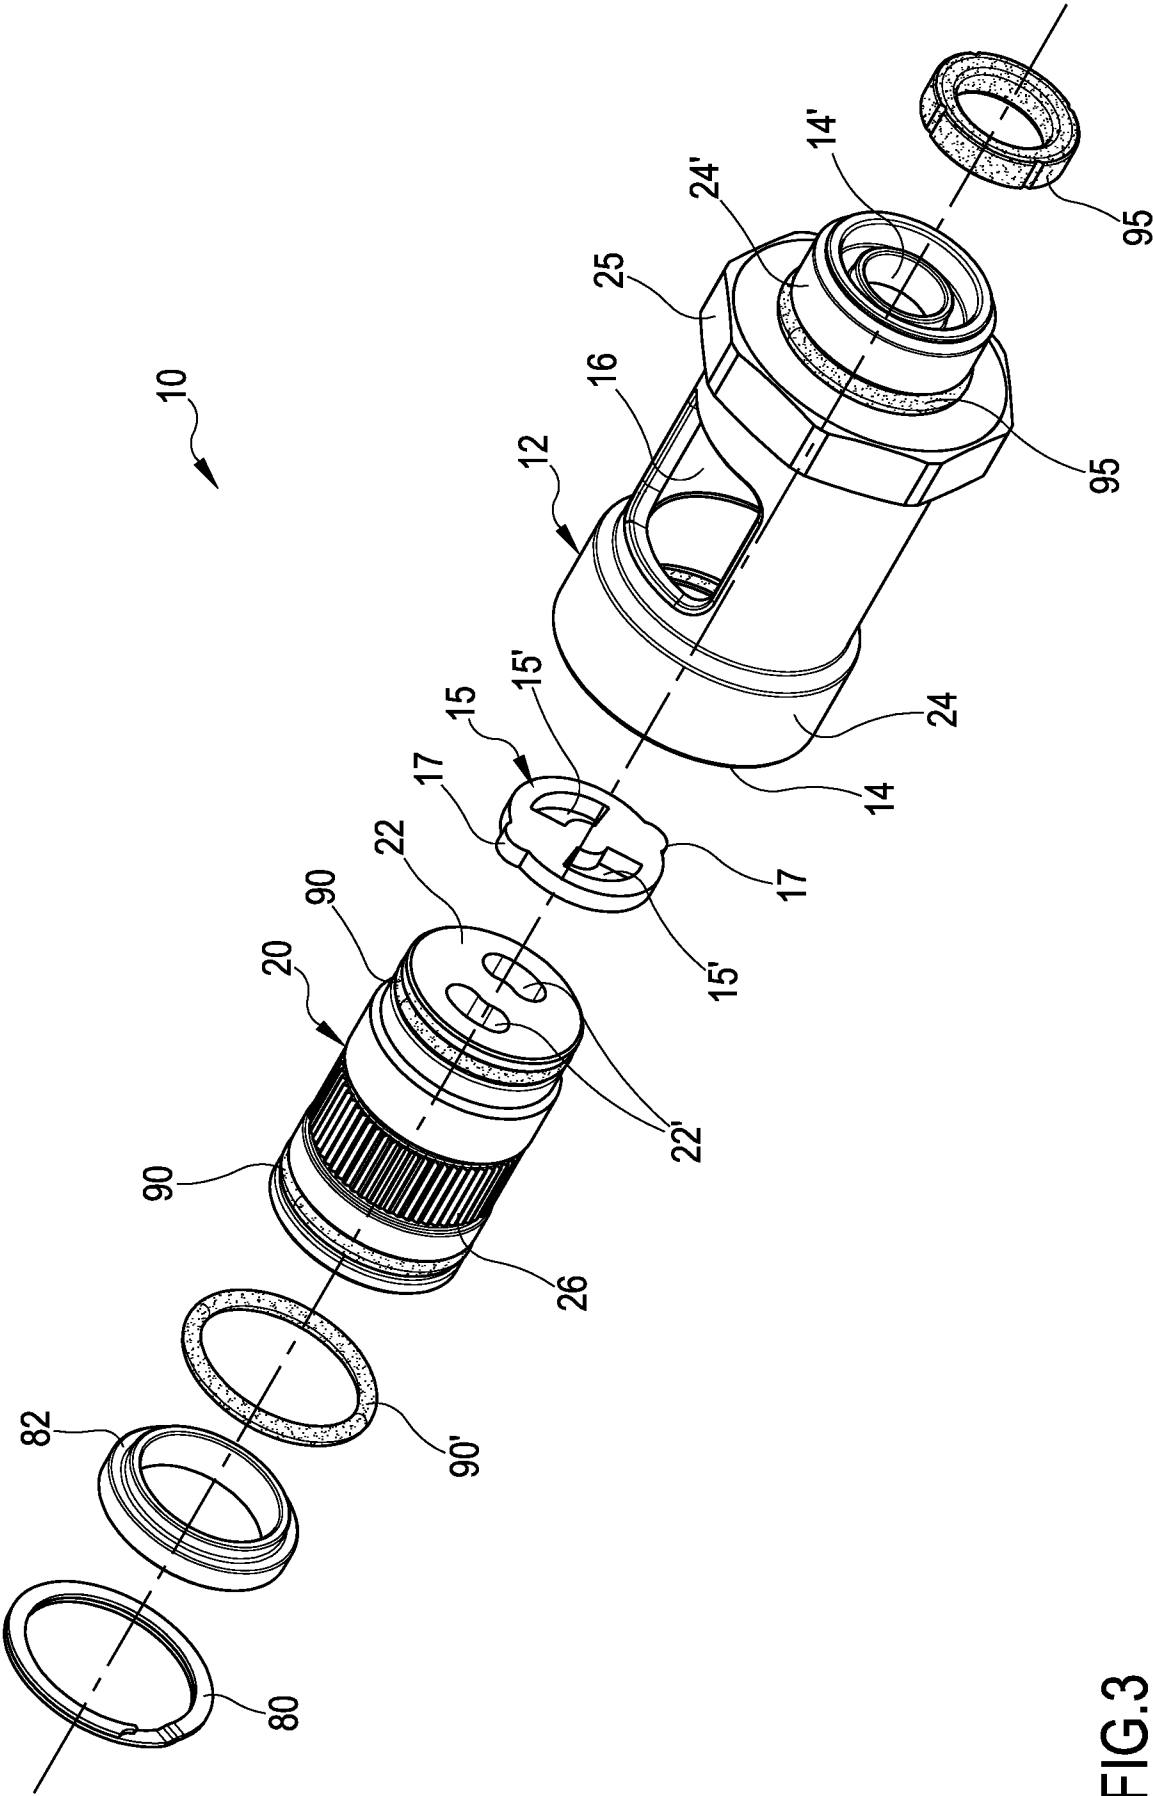


FIG.3

FIG.4

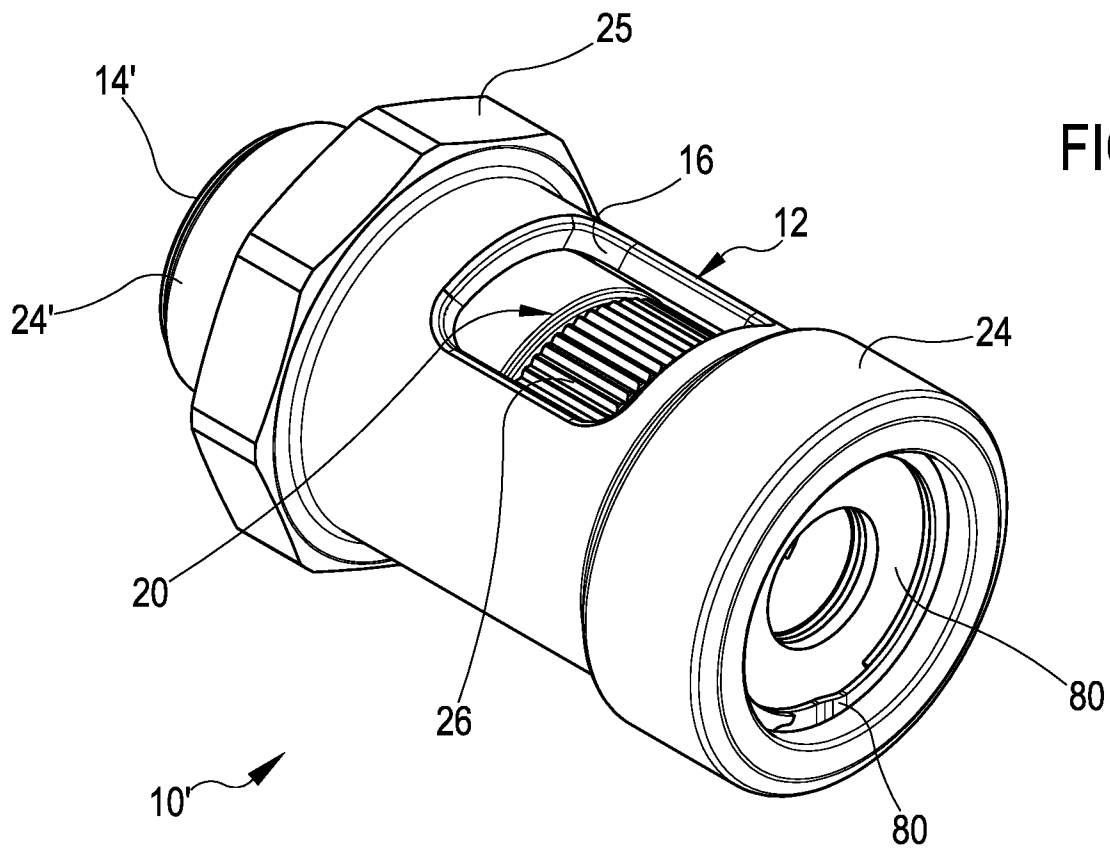
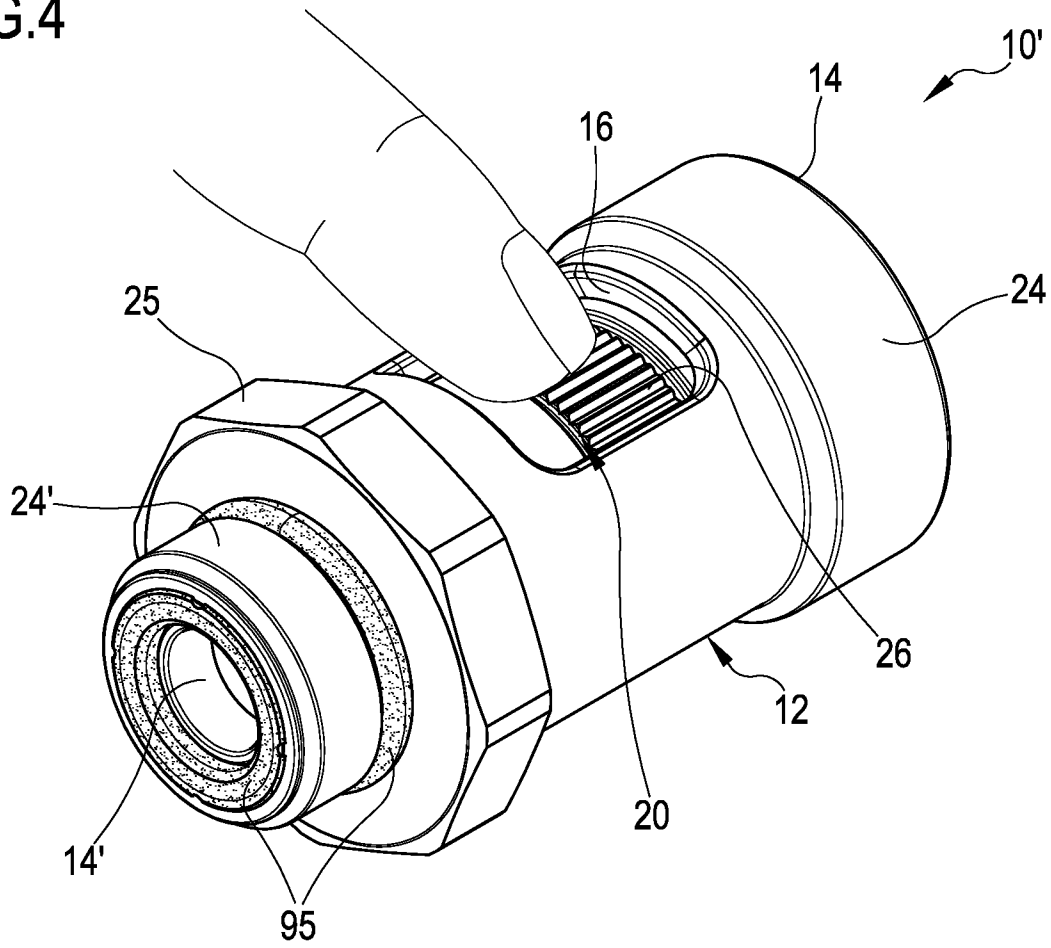


FIG.5

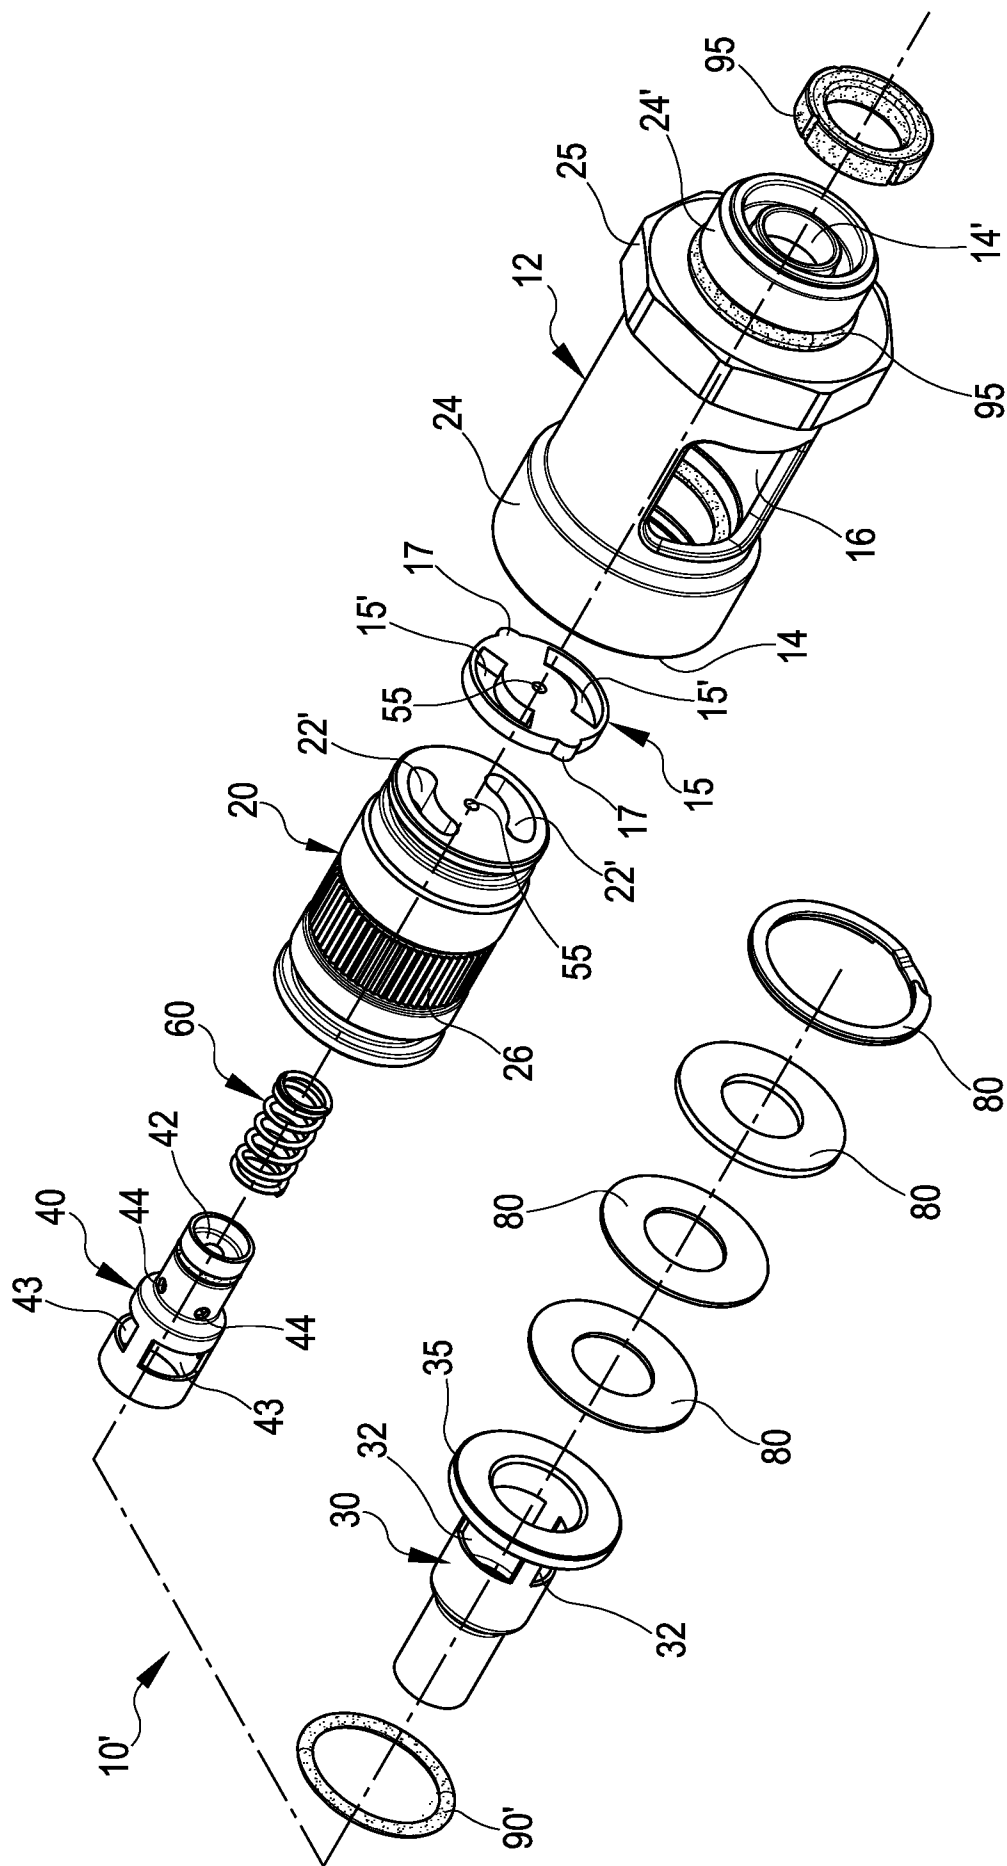


FIG.6

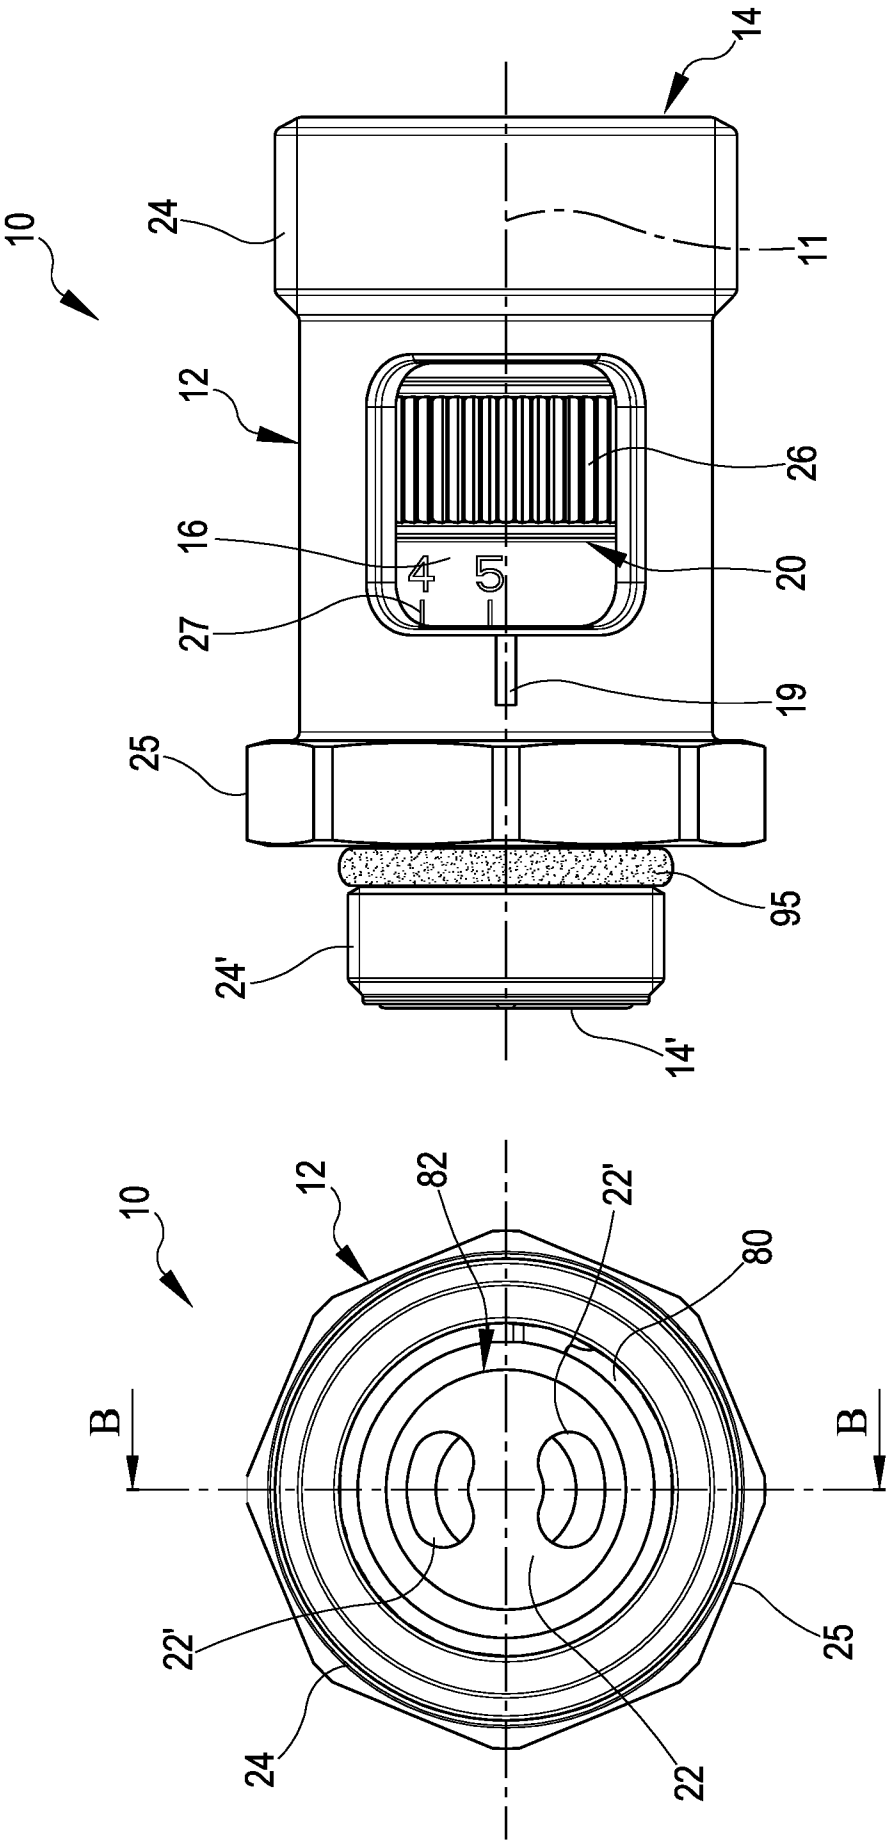
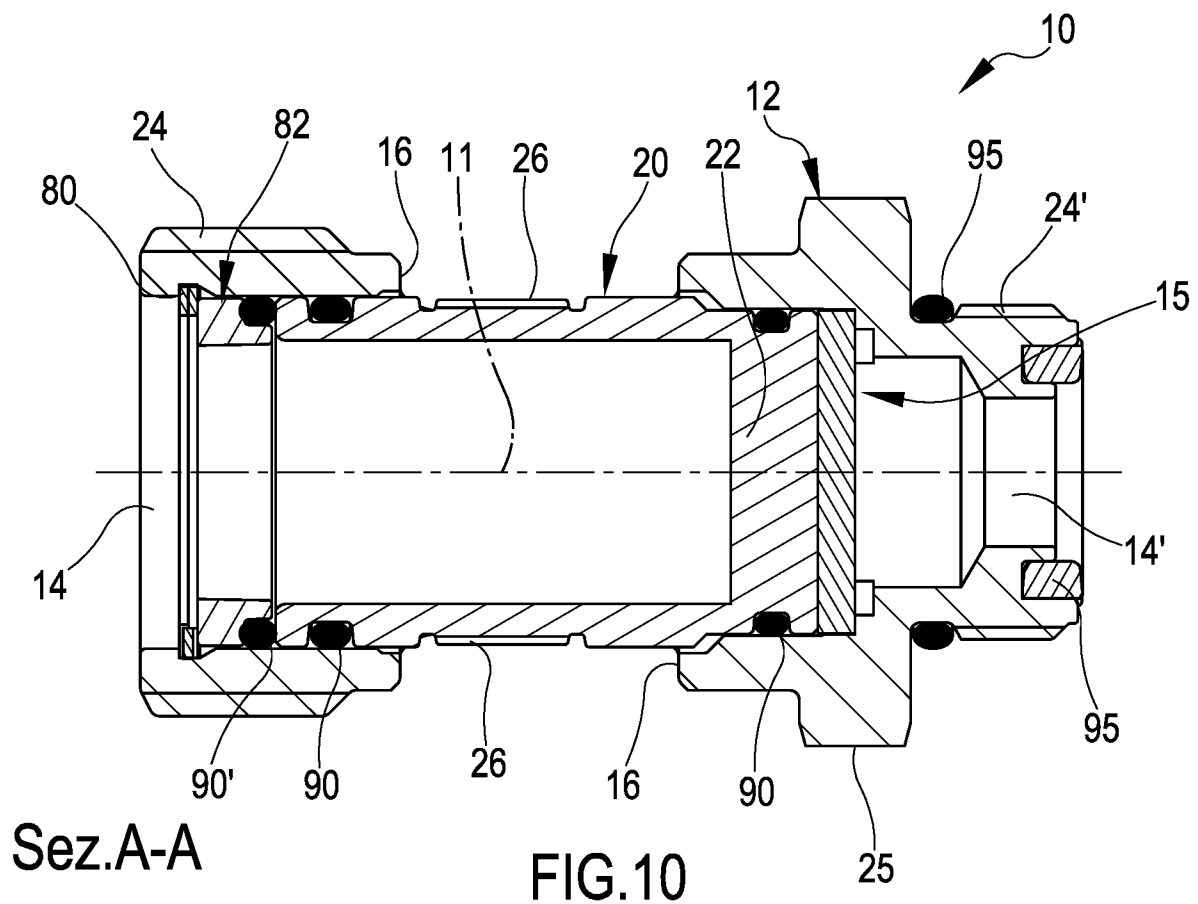
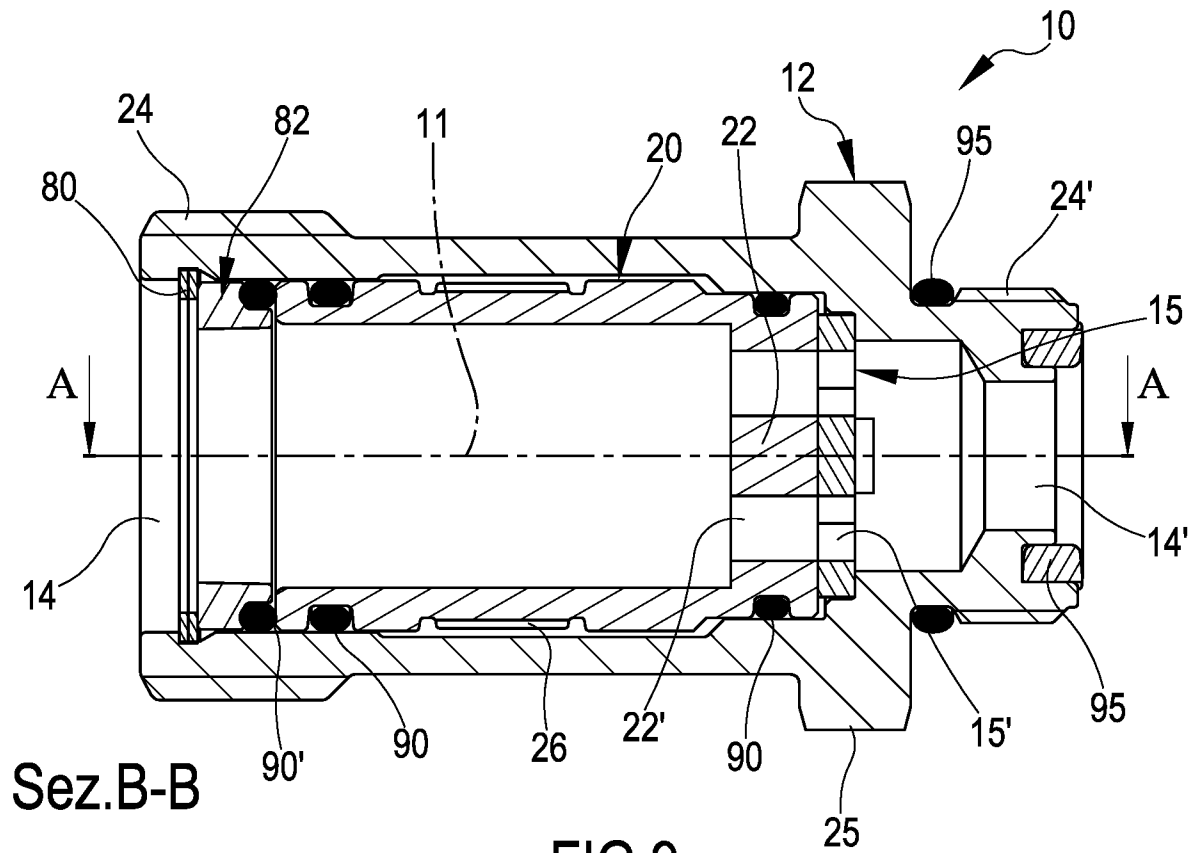


FIG.8

FIG.7



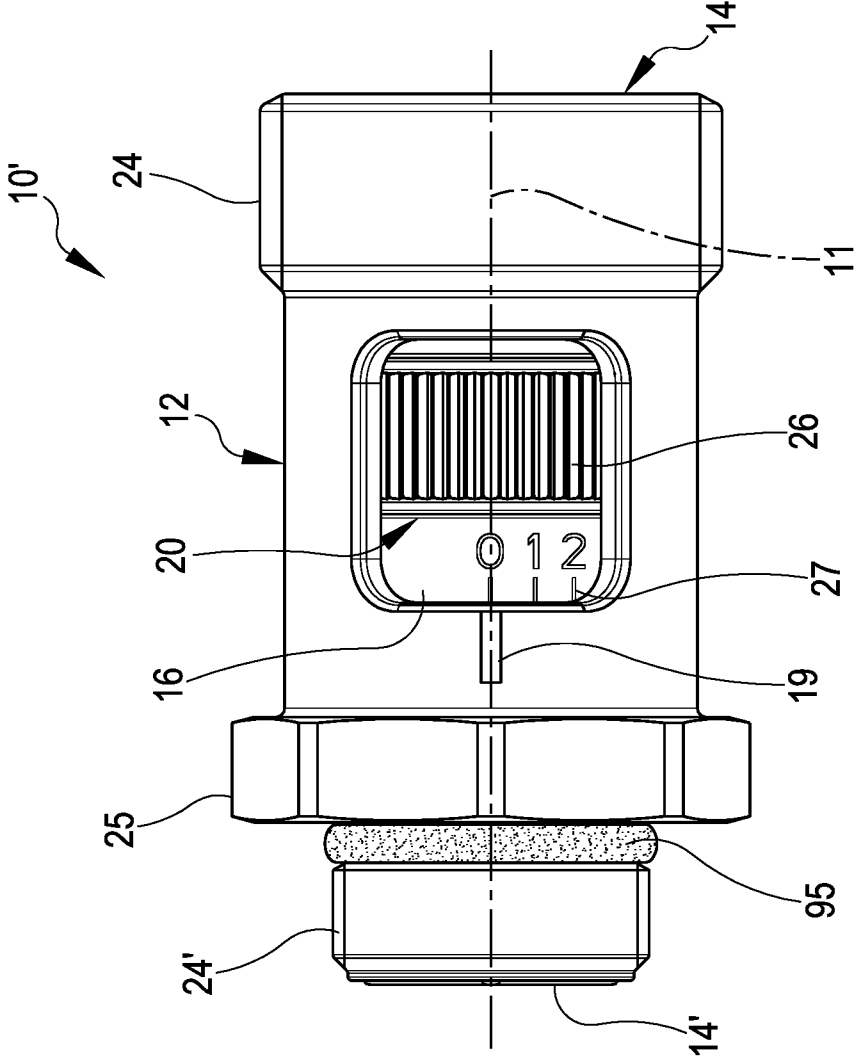


FIG.12

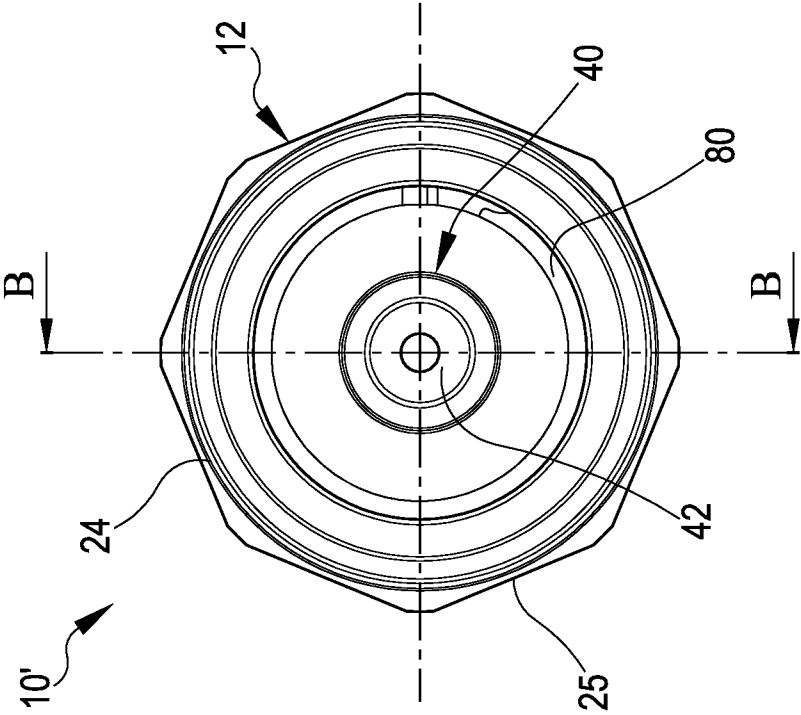


FIG.11

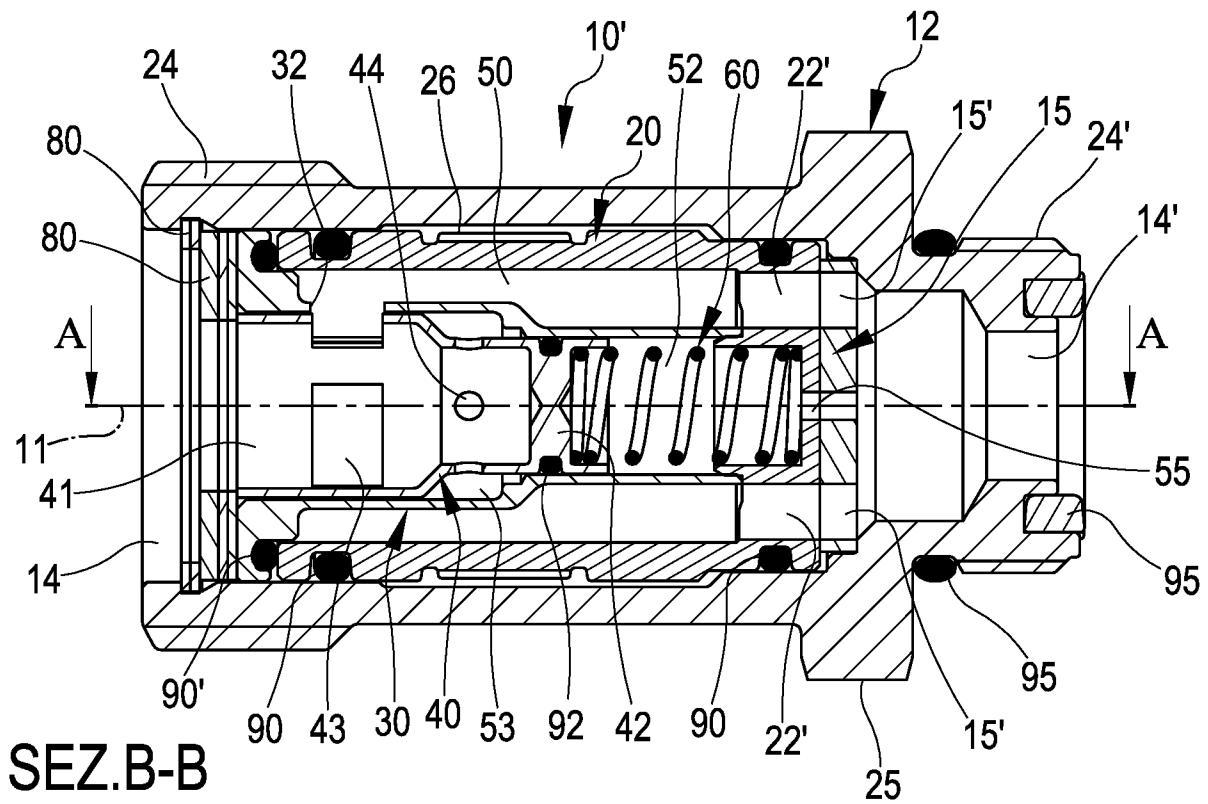


FIG.13


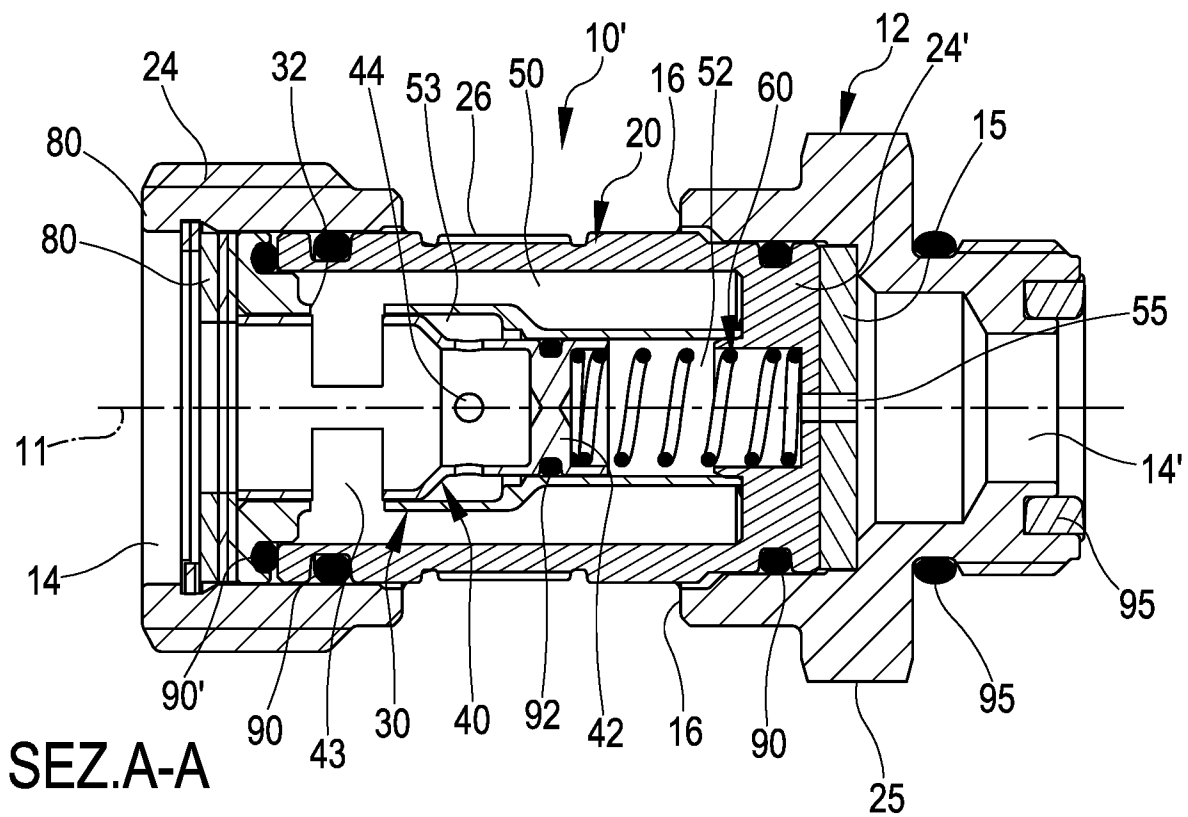


FIG.14

FIG.15

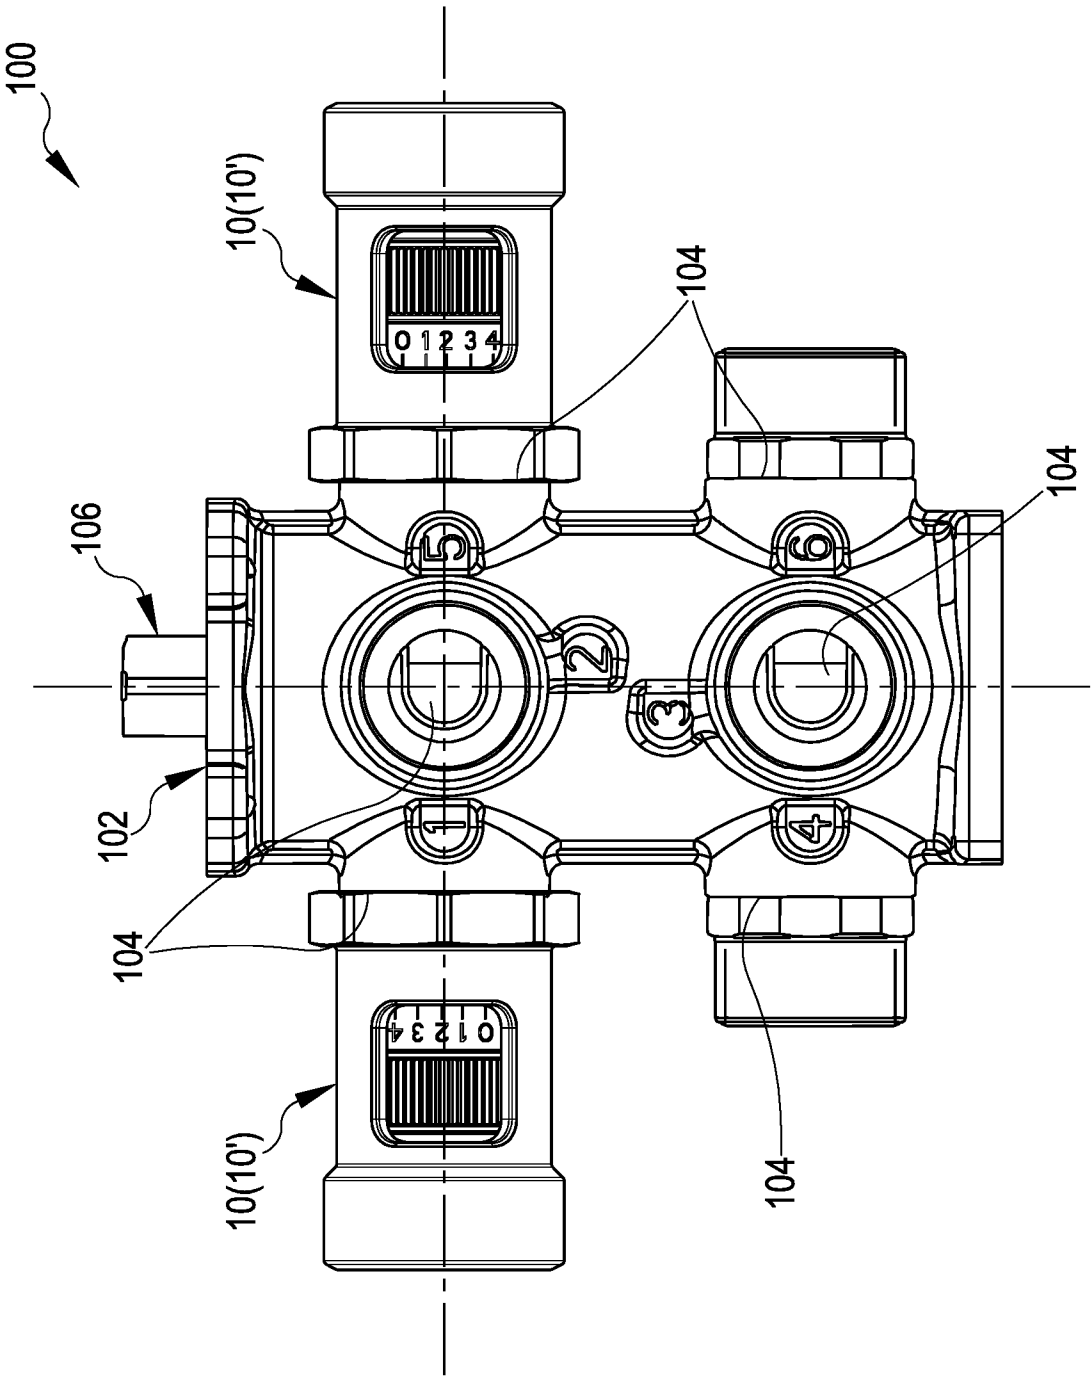

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2020/051434

A. CLASSIFICATION OF SUBJECT MATTER INV. F15B13/04 F16K3/08 F16K17/30 G05D7/01 ADD. F15B13/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) F15B F16K G05D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 3 201 500 A1 (GIACOMINI SPA [IT]) 9 August 2017 (2017-08-09) paragraph [0045] - paragraphs [0047], [0056]; figures 4,5,5a,6,7a,7c; examples 35b,352b,63,6,35,101,102,103 -----	1-4,6,7, 16 8-15
X A	DE 42 28 565 A1 (DANFOSS AS [DK]) 10 March 1994 (1994-03-10) figures 1,2; examples 1,2,3,4,12,18,9,28 -----	1,2,5,6, 16 3,4,7-15
X A	US 4 848 403 A (PILOLLA JOSEPH J [US] ET AL) 18 July 1989 (1989-07-18) figures 2,1,3,4,5,6,7 -----	1-4,7,16 5,6,8-15
X A	DE 34 21 653 A1 (SOL SPA [IT]) 19 September 1985 (1985-09-19) page 10 - page 11; figures 2,3; examples 2,3,5,6,10,20,9,19,9',10' -----	1-4,16 5-15
-/-		
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 20 July 2020	Date of mailing of the international search report 28/07/2020	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Deligiannidis, N	

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2020/051434

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2016/162848 A1 (GIACOMINI SPA [IT]) 13 October 2016 (2016-10-13) figures 1,2; examples 11,1011-1013,1021-1023 -----	16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2020/051434

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 3201500	A1	09-08-2017	CA 2961149 A1 09-02-2017
			CN 107076324 A 18-08-2017
			DK 3201500 T3 17-12-2018
			EP 3201500 A1 09-08-2017
			RU 2017114024 A 24-10-2018
			US 2018231132 A1 16-08-2018
			WO 2017021789 A1 09-02-2017
DE 4228565	A1	10-03-1994	AT 144596 T 15-11-1996
			CZ 284973 B6 14-04-1999
			DE 4228565 A1 10-03-1994
			DE 69305648 T2 15-01-1998
			DK 0657003 T3 01-04-1997
			EP 0657003 A1 14-06-1995
			ES 2093978 T3 01-01-1997
			FI 950855 A 24-02-1995
			GR 3022099 T3 31-03-1997
			PL 307679 A1 12-06-1995
			RU 2102646 C1 20-01-1998
			SK 25195 A3 11-07-1995
			US 5580029 A 03-12-1996
			WO 9405937 A1 17-03-1994
US 4848403	A	18-07-1989	AU 3121489 A 14-09-1989
			CA 1311461 C 15-12-1992
			EP 0333015 A2 20-09-1989
			JP H01283481 A 15-11-1989
			KR 890014931 A 25-10-1989
			US 4848403 A 18-07-1989
DE 3421653	A1	19-09-1985	DE 3421653 A1 19-09-1985
			IT 1180326 B 23-09-1987
WO 2016162848	A1	13-10-2016	CA 2980682 A1 13-10-2016
			CN 107690543 A 13-02-2018
			EP 3280937 A1 14-02-2018
			HK 1248793 A1 19-10-2018
			WO 2016162848 A1 13-10-2016