



(86) Date de dépôt PCT/PCT Filing Date: 2014/12/02  
(87) Date publication PCT/PCT Publication Date: 2015/06/11  
(45) Date de délivrance/Issue Date: 2018/03/13  
(85) Entrée phase nationale/National Entry: 2016/04/14  
(86) N° demande PCT/PCT Application No.: US 2014/068052  
(87) N° publication PCT/PCT Publication No.: 2015/084786  
(30) Priorité/Priority: 2013/12/04 (US61/911,549)

(51) Cl.Int./Int.Cl. *C08F 220/24* (2006.01),  
*C08F 220/18* (2006.01), *C08F 222/10* (2006.01)  
(72) Inventeurs/Inventors:  
JIANG, XUWEI, US;  
SCHLUETER, DOUGLAS, US  
(73) Propriétaire/Owner:  
NOVARTIS AG, CH  
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : **MATERIAUX ACRYLIQUES HYDROPHOBES DOUX**  
(54) Title: **SOFT HYDROPHOBIC ACRYLIC MATERIALS**

(57) **Abrégé/Abstract:**

Soft hydrophobic acrylic materials with improved resistance to fluid diffusion and suitable mechanical properties that allow deformation upon application of force are disclosed. The acrylic materials are particularly suitable for use in fluid-based accommodating intraocular lenses and comprises combination of a perfluoro-substituted alkyl (meth)acrylate and an alkyl (meth)acrylate, and a cross-linking agent.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



WIPO | PCT



(10) International Publication Number  
**WO 2015/084786 A8**

(43) International Publication Date  
11 June 2015 (11.06.2015)

**(51) International Patent Classification:**

*C08F 220/24* (2006.01) *C08F 222/10* (2006.01)  
*C08F 220/18* (2006.01)

**(21) International Application Number:**

PCT/US2014/068052

**(22) International Filing Date:**

2 December 2014 (02.12.2014)

**(25) Filing Language:**

English

**(26) Publication Language:**

English

**(30) Priority Data:**

61/911,549 4 December 2013 (04.12.2013) US

**(71) Applicant (for all designated States except US): NO-VARTIS AG [CH/CH]; Lichtstrasse 35, 4056 Basel (CH).****(72) Inventors; and**

**(71) Applicants (for US only): JIANG, Xuwei [CN/US];** 7805  
Pirate Point Cove, Arlington, TX 76016 (US).  
**SCHLUETER, Douglas [US/US];** 138 Ranch Creek  
Drive, Azle, TX 76020 (US).

**(74) Agents: ZHOU, Jian, S. et al.;** Alcon Research, Ltd., Pat-  
ent Department, 11460 Johns Creek Parkway, Johns Creek,  
GA 30097 (US).

**(81) Designated States (unless otherwise indicated, for every  
kind of national protection available):** AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,  
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,  
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,  
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available):** ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,  
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,  
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,  
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— *as to the applicant's entitlement to claim the priority of the  
earlier application (Rule 4.17(iii))*

**Published:**

— *with international search report (Art. 21(3))*

**(48) Date of publication of this corrected version:**

7 January 2016

**(15) Information about Correction:**  
see Notice of 7 January 2016

**(54) Title:** SOFT HYDROPHOBIC ACRYLIC MATERIALS

**(57) Abstract:** Soft hydrophobic acrylic materials with improved resistance to fluid diffusion and suitable mechanical properties that allow deformation upon application of force are disclosed. The acrylic materials are particularly suitable for use in fluid-based accommodating intraocular lenses and comprises combination of a perfluoro-substituted alkyl (meth)acrylate and an alkyl (meth)acrylate, and a cross-linking agent.



WO 2015/084786 A8

### **Soft Hydrophobic Acrylic Materials**

This invention relates generally to soft hydrophobic acrylic materials having improved resistance to fluid diffusion and suitable mechanical properties that allow deformation upon application of force, which are desirable as biocompatible materials for fluid-based accommodating intraocular lenses (IOLs).

#### **BACKGROUND OF THE INVENTION**

The human eye in its simplest terms functions to provide vision by transmitting light through a clear outer portion called the cornea, and focusing the image by way of a crystalline lens onto a retina. The quality of the focused image depends on many factors including the size and shape of the eye, and the transparency of the cornea and the lens.

In the natural lens, bifocality of distance and near vision is provided by a mechanism known as accommodation. The natural lens is contained within the capsular bag and is soft early in life. The bag is suspended from the ciliary muscle by the zonules. Relaxation of the ciliary muscle tightens the zonules, and stretches the capsular bag. As a result, the natural lens tends to flatten. Tightening of the ciliary muscle relaxes the tension on the zonules, allowing the capsular bag and the natural lens to assume a more rounded shape. In this way, the natural lens can focus alternatively on near and far objects.

As the lens ages, it becomes harder and is less able to change its shape in reaction to the tightening of the ciliary muscle. This makes it harder for the lens to focus on near objects, a medical condition known as presbyopia. Presbyopia affects nearly all adults over the age of 45 or 50.

When age or disease causes the crystalline lens to become less transparent, vision deteriorates because of the diminished light which can be transmitted to the retina. This deficiency in the lens of the eye is medically known as a cataract. An accepted treatment for this condition is surgical removal of the lens and replacement of the lens function by an artificial intraocular lens (IOL).

In the United States, the majority of cataractous lenses are removed by a surgical technique called phacoemulsification. During this procedure, an opening is made in the anterior capsule and a thin phacoemulsification cutting tip is inserted into the diseased lens and ultrasonically vibrated. The vibrating cutting tip liquifies or emulsifies the lens so that the lens may be aspirated out of the eye. The diseased lens, once removed, is replaced by an artificial lens. Implantation of conventional IOLs may restore vision in cataract patients, but cannot alleviate presbyopia.

Extensive research efforts have been contributed to develop accommodating IOLs which could have the capability to either change its optical power as the natural crystalline lens in response to contraction of the ciliary muscle. One of the active research areas for accommodating IOLs is fluid-based accommodating IOLs that can undergo curvature change upon contraction/relaxation of ciliary muscle (e.g., U.S. patent Nos. 4,787,903, 4,816,031, 4,932,966, 5,066,301, 5,443,506, 6,117,171, 6,730,123, 7,122,053, 7,217,288, 7,247,168, 7,261,737, 7,438,723, 7,485,144, 7,753,953, 7,776,088, 8,038,711, 8,048,155, 8,158,712, 8,197,541, 8,361,145, 8,398,709, 8,454,688, 8,475,529, and U.S. patent application publication No. 2013/02668070 A1). US 8,158,712 described biocompatible polymers which comprise trifluoroethyl methacrylate (or its alternative), butyl acrylate (or its alternative), and phenyl ethylacrylate (or its alternative), and have a modulus of elasticity between about 0.1 MPa and about 0.6 MPa and a refractive index between about 1.44 and about 1.52, and is substantially resistant to the diffusion of fluid, such as silicone oil, water or saline. According to US 8,158,712, those biocompatible polymers may be useful for making accommodating IOLs, which comprise a deformable optics front surfaces and soft deformable haptics that rely on fluid driving changes in the shape of the deformable optics's front surface.

#### SUMMARY

Soft hydrophobic acrylic materials which are particularly suited for use as fluid-based accommodating IOLs, but which are also useful as other ophthalmic or otorhinolaryngological devices, such as contact lenses, keratoprotheses, corneal rings or inlays, otological ventilation tubes and nasal implants, have been discovered. These polymeric materials comprise a selected combination of a perfluoro acrylic monomer and a hydrocarbon acrylic monomer.

Among other factors, the present invention is based on the finding that proper combination of perfluoro acrylic monomers and hydrocarbon acrylic monomers results in soft hydrophobic materials that showed desirable mechanical properties, (e.g., a storage modulus of from about 1 MPa to about 3 MPa) and very low silicone uptake after accelerated aging in high refractive index silicone oil. The subject materials are particularly suitable for making fluid-based accommodating IOLs.

In one particular embodiment there is provided a soft hydrophobic acrylic material, being characterized by having a storage modulus of from 0.75 MPa to 2.5 MPa measured by dynamic mechanical analysis under compression mode at 35°C and a silicone uptake of less than 1.5% by weight after accelerated aging in a silicone fluid for 32 days at 70°C, wherein the acrylic material is obtained from a

polymerizable composition comprising: a) from 55% to 90% by weight of at least one perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate; b) from 10% to 45% by weight of at least one C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate; and c) at least one cross-linking agent, provided that the polymerizable composition comprises less than 2% by weight of any aryl acrylic monomer.

#### DETAILED DESCRIPTION OF THE INVENTION

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. Generally, the nomenclature used herein and the laboratory procedures are well known and commonly employed in the art. Conventional methods are used for these procedures, such as those provided in the art and various general references. Where a term is provided in the singular, the inventors also contemplate the plural of that term. The nomenclature used herein and the laboratory procedures described below are those well known and commonly employed in the art.

"About" as used herein means that a number referred to as "about" comprises the recited number plus or minus 1-10% of that recited number.

"Optional" or "optionally" means that the subsequently described event or circumstance can or cannot occur, and that the description includes instances where the event or circumstance occurs and instances where it does not.

Unless indicated otherwise, all component amounts are presented on a % (w/w) basis ("wt. %").

The term "alkyl" refers to a monovalent radical obtained by removing a hydrogen atom from a linear or branched alkane compound. An alkyl group (radical) forms one bond with one other group in an organic compound.

The term "perfluoro-substituted alkyl" refers to an alkyl radical comprising at least three fluorine atoms each of which replaces one hydrogen atom of the alkyl.


The term "alkylene divalent group" or "alkylene diradical" or "alkyl diradical" interchangeably refers to a divalent radical obtained by removing one hydrogen atom from an alkyl. An alkylene divalent group forms two bonds with other groups in an organic compound.

The term "alkoxy" or "alkoxyl" refers to a monovalent radical obtained by removing the hydrogen atom from the hydroxyl group of a linear or branched alkyl alcohol. An alkoxy group (radical) forms one bond with one other group in an organic compound.

In this application, the term “substituted” in reference to an alkyl diradical or an alkyl radical means that the alkyl diradical or the alkyl radical comprises at least one substituent which replaces one hydrogen atom of the alkyl diradical or the alkyl radical and is selected from the group consisting of hydroxy (-OH), carboxy (-COOH), -NH<sub>2</sub>, sulfhydryl (-SH), C<sub>1</sub>-C<sub>4</sub> alkyl, C<sub>1</sub>-C<sub>4</sub> alkoxy, C<sub>1</sub>-C<sub>4</sub> alkylthio (alkyl sulfide), C<sub>1</sub>-C<sub>4</sub> acylamino, C<sub>1</sub>-C<sub>4</sub> alkylamino, di-C<sub>1</sub>-C<sub>4</sub> alkylamino, halogen atom (Br or Cl), and combinations thereof.

The term “(meth)acrylate” refers to a monomer containing a radical of -O-C(=O)-CH=CH<sub>2</sub> or -O-C(=O)-C(CH<sub>3</sub>)=CH<sub>2</sub>.

The term “aryl acrylic monomer” refers to a monomer of the following formula

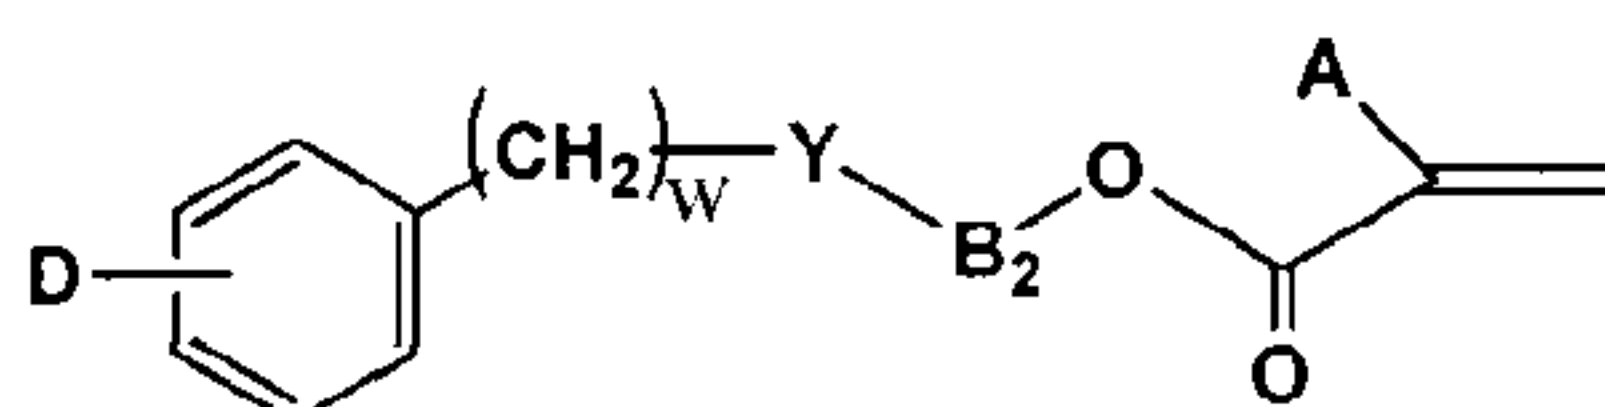

wherein: A is H or CH<sub>3</sub>; B<sub>2</sub> is (CH<sub>2</sub>)<sub>m</sub> or [O(CH<sub>2</sub>)<sub>2</sub>]<sub>z</sub>; m is 2-6; z is 1-10; Y is a direct bond, O, S, or NR', provided that if Y is O, S, or NR', then B is (CH<sub>2</sub>)<sub>m</sub>; R' is H, CH<sub>3</sub>, C<sub>n</sub>H<sub>2n+1</sub>, iso-OC<sub>3</sub>H<sub>7</sub>, C<sub>6</sub>H<sub>5</sub>, or CH<sub>2</sub>C<sub>6</sub>H<sub>5</sub>; n'=1-10; w is 0-6, provided that m+w≤8; and D is H, Cl, Br, C<sub>1</sub>-C<sub>4</sub> alkyl, C<sub>1</sub>-C<sub>4</sub> alkoxy, C<sub>6</sub>H<sub>5</sub>, or CH<sub>2</sub>C<sub>6</sub>H<sub>5</sub>. Examples of aryl acrylic monomers include, but are not limited to: 2-ethylphenoxy acrylate; 2-ethylphenoxy methacrylate; phenyl acrylate; phenyl methacrylate; benzyl acrylate; benzyl methacrylate; 2-phenylethyl acrylate; 2-phenylethyl methacrylate; 3-phenylpropyl acrylate; 3-phenylpropyl methacrylate; 4-phenylbutyl acrylate; 4-phenylbutyl methacrylate; 4-methylphenyl acrylate; 4-methylphenyl methacrylate; 4-methylbenzyl acrylate; 4-methylbenzyl methacrylate; 2,2-methylphenylethyl acrylate; 2,2-methylphenylethyl methacrylate; 2,3-methylphenylethyl acrylate; 2,3-methylphenylethyl methacrylate; 2,4-methylphenylethyl acrylate; 2,4-methylphenylethyl methacrylate; 2-(4-propylphenyl)ethyl acrylate; 2-(4-propylphenyl)ethyl methacrylate; 2-(4-(1-methylethyl)phenyl)ethyl acrylate; 2-(4-(1-methylethyl)phenyl)ethyl methacrylate; 2-(4-methoxyphenyl)ethyl acrylate; 2-(4-methoxyphenyl)ethyl methacrylate; 2-(4-cyclohexylphenyl)ethyl acrylate; 2-(4-cyclohexylphenyl)ethyl methacrylate; 2-(2-chlorophenyl)ethyl acrylate; 2-(2-chlorophenyl)ethyl methacrylate; 2-(3-chlorophenyl)ethyl acrylate; 2-(3-chlorophenyl)ethyl methacrylate; 2-(4-chlorophenyl)ethyl acrylate; 2-(4-chlorophenyl)ethyl methacrylate; 2-(4-bromophenyl)ethyl acrylate; 2-(4-bromophenyl)ethyl methacrylate; 2-(3-phenylphenyl)ethyl acrylate; 2-(3-phenylphenyl)ethyl methacrylate; 2-(4-phenylphenyl)ethyl acrylate; 2-(4-phenylphenyl)ethyl methacrylate; 2-(4-benzylphenyl)ethyl acrylate; 2-(4-benzylphenyl)ethyl methacrylate; 2-(phenylthio)ethyl acrylate; 2-(phenylthio)ethyl

methacrylate; 2-benzyloxyethyl acrylate; 3-benzyloxypropyl acrylate; 2-benzyloxyethyl methacrylate; 3-benzyloxypropyl methacrylate; 2-[2-(benzyloxy)ethoxy]ethyl acrylate; 2-[2-(benzyloxy)ethoxy]ethyl methacrylate; or combinations thereof.

In general, the invention is directed to soft, hydrophobic acrylic materials having improved resistance to fluid diffusion and suitable mechanical properties that allow deformation upon application of force. A soft hydrophobic acrylic material of the invention is characterized by having a storage modulus of from about 0.5 MPa to about 3.0 MPa (preferably from about 0.75 MPa to about 2.5 MPa, more preferably from about 1.0 MPa to about 2.0 MPa) measured by dynamic mechanical analysis (DMA) under compression mode at about 35°C and a silicone uptake of less than about 2.0% by weight (preferably less than about 1.5% by weight, more preferably less than about 1.0% by weight or less, even more preferably about 0.8% by weight or less, most preferably about 0.5% by weight or less) after accelerated aging in a silicone fluid for 32 days at 70°C, and is obtained from a polymerizable composition comprising from about 55% to about 90% by weight (preferably from about 60% to about 85% by weight, more preferably from about 65% to about 80% by weight) of at least one perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate; from about 10% to about 45% by weight (preferably from about 15% to about 40% by weight, more preferably from about 20% to about 35% by weight) of at least one C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate; and at least one cross-linking agent, provided that the polymerizable composition is substantially free (i.e., less than about 2% by weight, preferably less than about 1% by weight, more preferably about 0.5% by weight or less, even more preferably about 0.1% by weight or less, most preferably totally) of any aryl acrylic monomer.

Any suitable C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylates can be used in the invention. Examples of preferred C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylates include without limitation, ethyl acrylate, ethyl methacrylate, n-propyl acrylate, n-propyl methacrylate, n-butyl acrylate, n-butyl methacrylate, n-pentyl acrylate, n-pentyl methacrylate, n-hexyl acrylate, n-hexyl methacrylate, n-heptyl acrylate, n-heptyl methacrylate, n-octyl acrylate, n-octyl methacrylate, n-nonyl acrylate, n-nonyl methacrylate, n-decyl acrylate, n-decyl methacrylate, n-undecyl acrylate, n-undecyl methacrylate, lauryl acrylate, lauryl methacrylate, 2-ethylhexyl acrylate, 2-ethylhexyl methacrylate, 2,2-dimethylpropyl acrylate, 2,2-dimethylpropyl methacrylate, trimethylcyclohexyl acrylate, trimethylcyclohexyl methacrylate, isobutyl acrylate, isobutyl methacrylate, isopentyl acrylate, isopentyl methacrylate, and mixtures thereof.

Any suitable perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylates can be used in the invention. Examples of perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylates include

without limitation 2,2,2-trifluoroethyl methacrylate, 2,2,2-trifluoroethyl acrylate, tetrafluoropropyl methacrylate, tetrafluoropropyl acrylate, hexafluoro-iso-propyl methacrylate, hexafluoro-iso-propyl acrylate, hexafluorobutyl methacrylate, hexafluorobutyl acrylate, heptafluorobutyl methacrylate, heptafluorobutyl acrylate, octafluoropentyl methacrylate, octafluoropentyl acrylate, dodecafluoropheptyl methacrylate, heptadecafluorodecyl acrylate, heptadecafluorodecyl methacrylate, pentafluorophenyl acrylate, pentafluorophenyl methacrylate, and combinations thereof.

The cross-linking agent may be any terminally ethylenically unsaturated compound having more than one unsaturated groups. Suitable cross-linking agents include, for example: ethylene glycol dimethacrylate; diethylene glycol dimethacrylate; triethylene glycol dimethacrylate, tetraethylene glycol dimethacrylate, allyl methacrylate; 1,3-propanediol dimethacrylate; 2,3-propanediol dimethacrylate; 1,6-hexanediol dimethacrylate; 1,4-butanediol dimethacrylate;  $\text{CH}_2=\text{C}(\text{CH}_3)\text{C}(=\text{O})\text{O}-(\text{CH}_2\text{CH}_2\text{O})_p-\text{C}(=\text{O})\text{C}(\text{CH}_3)=\text{CH}_2$  where  $p=1-50$ ; and  $\text{CH}_2=\text{C}(\text{CH}_3)\text{C}(=\text{O})\text{O}(\text{CH}_2)_t\text{O}-\text{C}(=\text{O})\text{C}(\text{CH}_3)=\text{CH}_2$  where  $t=3-20$ ; their corresponding acrylates; and combinations thereof. A preferred cross-linking monomer is  $\text{CH}_2=\text{C}(\text{CH}_3)\text{C}(=\text{O})\text{O}-(\text{CH}_2\text{CH}_2\text{O})_p-\text{C}(=\text{O})\text{C}(\text{CH}_3)=\text{CH}_2$  where  $p$  is such that the number-average molecular weight is about 400, about 600, or about 1000. Other preferred cross-linking monomers are ethylene glycol dimethacrylate (EGDMA), diethylene glycol dimethacrylate, triethylene glycol dimethacrylate, triethylene glycol diacrylate, and 1,4-butanediol diacrylate (BDDA).

Generally, the total amount of the cross-linking component is at least 0.1% by weight and, depending on the identity and concentration of the remaining components and the desired physical properties of the acrylic material, can range up to about 20% by weight. The preferred concentration range for the cross-linking component is 1-5% for small compounds with molecular weights typically less than 500 Daltons, and 5-17% (w/w) for larger compounds (with molecular weights typically greater than 500 Daltons).

In addition to one or more perfluoro-substituted- $\text{C}_2$ - $\text{C}_{12}$  (meth)acrylates, one or more  $\text{C}_2$ - $\text{C}_{12}$  alkyl (meth)acrylates, and one or more cross-linking agents, the acrylic materials of the present invention may also contain other ingredients, including, but not limited to, polymerizable UV-absorbers (or UV-absorbing agents), polymerizable colored dyes, additives to reduce tack, and combinations thereof.

A polymerizable ultraviolet (UV) absorbing agent can also be included in the materials of the present invention. The polymerizable UV-absorbing agent can be any compound which absorbs UV light (i.e., light having a wavelength shorter than

about 380 nm) and optionally high-energy-violet-light (HEVL) (i.e., light having a wavelength between 380 nm and 440 nm), but does not absorb any substantial amount of visible light having a wavelength greater than 440 nm. The UV-absorbing compound is incorporated into the monomer mixture and is entrapped in the polymer matrix when the monomer mixture is polymerized. Any suitable polymerizable UV-absorbing agents can be used in the invention. A polymerizable UV-absorbing agent used in the invention comprises a benzophenone-moiety or preferably a benzotriazole-moiety. Polymerizable benzophenone-containing UV-absorbing agents can be prepared according to procedures described in U.S. Pat. Nos. 3,162,676 and 4,304,895 or can be obtained from commercial suppliers. Polymerizable benzotriazole-containing UV-absorbing agents can be prepared according to procedures described in US patent Nos. 3,299,173, 4,612,358, 4,716,234, 4,528,311, 8,153,703, and US 8,232,326 or can be obtained from commercial suppliers.

Examples of preferred polymerizable benzophenone-containing UV-absorbing agents include without limitation 2-hydroxy-4-acryloxy alkoxy benzophenone, 2-hydroxy-4-methacryloxy alkoxy benzophenone, allyl-2-hydroxybenzophenone, 4-acryloylethoxy-2-hydroxybenzophenone (UV2), 2-hydroxy-4-methacryloyloxybenzophenone (UV7), or combinations thereof.

Examples of preferred polymerizable benzotriazole-containing UV-absorbing and UV/HEVL-absorbing agents include without limitation: 2-(2-hydroxy-5-vinylphenyl)-2H-benzotriazole, 2-(2-hydroxy-5-acryloyloxyphenyl)-2H-benzotriazole, 2-(2-hydroxy-3-methacrylamido methyl-5-tert octylphenyl) benzotriazole, 2-(2'-hydroxy-5'-methacrylamidophenyl)-5-chlorobenzotriazole, 2-(2'-hydroxy-5'-methacrylamidophenyl)-5-methoxybenzotriazole, 2-(2'-hydroxy-5'-methacryloxypropyl-3'-t-butyl-phenyl)-5-chlorobenzotriazole, 2-(2'-hydroxy-5'-methacryloxypropylphenyl) benzotriazole, 2-hydroxy-5-methoxy-3-(5-(trifluoromethyl)-2H-benzo[d][1,2,3]triazol-2-yl)benzyl methacrylate (WL-1), 2-hydroxy-5-methoxy-3-(5-methoxy-2H-benzo[d][1,2,3]triazol-2-yl)benzyl methacrylate (WL-5), 3-(5-fluoro-2H-benzo[d][1,2,3]triazol-2-yl)-2-hydroxy-5-methoxybenzyl methacrylate (WL-2), 3-(2H-benzo[d][1,2,3]triazol-2-yl)-2-hydroxy-5-methoxybenzyl methacrylate (WL-3), 3-(5-chloro-2H-benzo[d][1,2,3]triazol-2-yl)-2-hydroxy-5-methoxybenzyl methacrylate (WL-4), 2-hydroxy-5-methoxy-3-(5-methyl-2H-benzo[d][1,2,3]triazol-2-yl)benzyl methacrylate (WL-6), 2-hydroxy-5-methyl-3-(5-(trifluoromethyl)-2H-benzo[d][1,2,3]triazol-2-yl)benzyl methacrylate (WL-7), 4-allyl-2-(5-chloro-2H-benzo[d][1,2,3]triazol-2-yl)-6-methoxyphenol (WL-8), 2-{2'-Hydroxy-3'-tert-5'[3"-(4"-vinylbenzyloxy)propoxy]phenyl}-5-methoxy-2H-benzotriazole, phenol, 2-(5-chloro-2H-benzotriazol-2-yl)-6-(1,1-dimethylethyl)-4-ethenyl- (UVAM),

2-(2'-hydroxy-5'-methacryloxyethylphenyl) benzotriazole (2-Propenoic acid, 2-methyl-, 2-[3-(2*H*-benzotriazol-2-yl)-4-hydroxyphenyl]ethyl ester, Norbloc), 2-{2'-Hydroxy-3'-*tert*-butyl-5'-[3'-methacryloyloxypropoxy]phenyl}-5-methoxy-2*H*-benzotriazole (UV13), 2-[2'-Hydroxy-3'-*tert*-butyl-5'-(3'-acryloyloxypropoxy)phenyl]-5-trifluoromethyl-2*H*-benzotriazole (CF<sub>3</sub>-UV13), 2-(2'-hydroxy-5-methacrylamidophenyl)-5-methoxybenzotriazole (UV6), 2-(3-allyl-2-hydroxy-5-methylphenyl)-2*H*-benzotriazole (UV9), 2-(2-Hydroxy-3-methyl-5-methylphenyl)-2*H*-benzotriazole (UV12), 2-3'-*t*-butyl-2'-hydroxy-5'-(3"-dimethylvinylsilylpropoxy)-2'-hydroxy-phenyl)-5-methoxybenzotriazole (UV15), 2-(2'-hydroxy-5'-methacryloylpropyl-3'-*tert*-butylphenyl)-5-methoxy-2*H*-benzotriazole (UV16), 2-(2'-hydroxy-5'-acryloylpropyl-3'-*tert*-butylphenyl)-5-methoxy-2*H*-benzotriazole (UV16A), 2-Methylacrylic acid 3-[3-*tert*-butyl-5-(5-chlorobenzotriazol-2-yl)-4-hydroxyphenyl]-propyl ester (16-100, CAS#96478-15-8), 2-(3-(*tert*-butyl)-4-hydroxy-5-(5-methoxy-2*H*-benzo[d][1,2,3]triazol-2-yl)phenoxy)ethyl methacrylate (16-102); Phenol, 2-(5-chloro-2*H*-benzotriazol-2-yl)-6-methoxy-4-(2-propen-1-yl) (CAS#1260141-20-5); 2-[2-Hydroxy-5-[3-(methacryloyloxy)propyl]-3-*tert*-butylphenyl]-5-chloro-2*H*-benzotriazole; Phenol, 2-(5-ethenyl-2*H*-benzotriazol-2-yl)-4-methyl-, homopolymer (9CI) (CAS#83063-87-0).

More preferably, a polymerizable UV-absorbing agent is 2-(2*H*-benzo[d][1,2,3]triazol-2-yl)-4-methyl-6-(2-methylallyl)phenol (oNTP), 3-[3-*tert*-butyl-4-hydroxy-5-(5-methoxy-2-benz[d][1,2,3]triazol-2-yl)phenoxy]propyl methacrylate (UV13), and 2-[3-(2*H*-benzotriazol-2-yl)-4-hydroxyphenyl]ethyl methacrylate (Norbloc 7966), or combinations thereof.

In addition to ultraviolet absorbing materials, the acrylic materials of the present invention may include colored dyes, such as the yellow dyes disclosed in U.S. Pat. No. 5,470,932.

The device materials of the present invention may also contain additives to reduce or eliminate tack. Examples of such additives include those disclosed in U.S. Pat. Nos. 7,585,900 and 7,714,039.

In a more preferred embodiment, the acrylic material of the invention comprises heptadecafluorodecyl methacrylate as the perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate, butyl acrylate as the C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate, and ethylene glycol dimethacrylate as the cross-linking agent.

The acrylic materials of this invention are prepared by conventional polymerization methods. For example, a mixture of a perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate, a C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate, a cross-linking agent in the desired proportions, and a free-radical initiator, together with any other polymerizable

components (such as a polymerizable UV-absorber, polymerizable yellow dye, and/or additive to reduce tack), is prepared. The mixture can then be introduced into a mold of desired shape, and the polymerization carried out thermally (i.e., by heating) or photochemically (i.e., by actinic radiation, e.g., UV radiation and/or visible radiation) to activate the initiator.

Examples of suitable thermal initiators include: but are not limited to, azonitriles, such as 2,2'-azobis (2,4-dimethylpentanenitrile), 2,2'-azobis (2-methylpropanenitrile), 2,2'-azobis (2-methylbutanenitrile), 2,2'-azobis(isobutyronitrile) (AIBN); peroxides, such as benzoyl peroxide; peroxyarbonates, such as bis-(4-*t*-butylcyclohexyl) peroxydicarbonate, and the like. A preferred initiator is AIBN.

Where the polymerization is carried out photochemically, a mold should be transparent to actinic radiation of a wavelength capable of initiating polymerization. Conventional photoinitiator compounds, e.g., a benzophenone-type or bisacylphosphine oxide (BAPO) photoinitiator, can also be introduced to facilitate the polymerization. Suitable photoinitiators are benzoin methyl ether, diethoxyacetophenone, a benzoylphosphine oxide, 1-hydroxycyclohexyl phenyl ketone, Darocur and Irgacur types photoinitiators (preferably Darocur 1173®, Darocur 2959® and Irgacure 819®), and Germane-based Norrish Type I photoinitiators which are capable of initiating a free-radical polymerization under irradiation with a light source including a light in the region of about 400 to about 550 nm. Examples of benzoylphosphine initiators include 2,4,6-trimethylbenzoyldiphenylphosphine oxide; bis-(2,6-dichlorobenzoyl)-4-*N*-propylphenylphosphine oxide; and bis-(2,6-dichlorobenzoyl)-4-*N*-butylphenylphosphine oxide. Examples of Germane-based Norrish Type I photoinitiators are acylgermanium compounds described in US 7,605,190.

Regardless of the chosen initiator or curing method, the curing process should be controlled to avoid rapid polymerization, which may yield polymerized materials having more tack than the same materials polymerized more slowly.

Once the acrylic materials of the present invention have been cured, they are extracted in a suitable solvent to remove as much of the unreacted components of the materials as possible. Examples of suitable solvents include acetone, methanol, and cyclohexane. A preferred solvent for extraction is acetone.

Fluid-based accommodating IOLs constructed of the disclosed acrylic materials can be of any design capable of changing optical power as the natural crystalline lens in response to contraction of the ciliary muscle. Examples of such accommodating IOLs include without limitation those described in US 8361145, US 8254034, US 8034106, and US 6730123.

In addition to IOLs, the acrylic materials of the present invention are also suitable for use in other devices, including contact lenses, keratoprotheses, intracorneal lenses, corneal inlays or rings, and glaucoma filtration devices.

The previous disclosure will enable one having ordinary skill in the art to practice the invention. In order to better enable the reader to understand specific embodiments and the advantages thereof, reference to the following non-limiting examples is suggested. However, the following examples should not be read to limit the scope of the invention.

### EXAMPLES

The formulation components are shown in Table 1 and Table 2. Test samples measuring 0.9 mm in thickness were photo-cured by pre-heating the formulation-filled molds in a nitrogen filled glove box for 10 minutes at 55 °C and then irradiating with a Philips TLK 40W/03 24-inch fluorescent lamp for 60 minutes. Cured samples were continuously extracted in acetone for 3 days and then dried slowly at ambient temperature for 20 hours, followed by vacuum (0.1 mm Hg) for a minimum of 20 hours at 70°C. The weight of each sample was then recorded and each sample was placed into a 5 mL glass vial containing 5.0 g of poly(phenylmethylsiloxane) [Mn: ~2600, free of low molecular weight fraction (<1000) ]. Steps were taken to make sure the sample was completely submerged in the liquid. The vial was then sealed with PTFE-faced butyl stopper and placed into a 70°C convection oven. Samples were removed from the oven at pre-determined time intervals, carefully wiped with Kimwipes to removal any residual silicone fluid on the surface, and weighed.

Table 1

Component	EXAMPLE IDs				
	(% w/w)				
	32A	32B	32C	32D	45B
BA	44.65	53.82	44.64	54.03	47.00
TFEMA	23.47	23.59	--	--	--
PEA	30.83	20.99	30.83	20.73	--
HFIPA	--	--	23.48	23.66	--
HFBMA	--	--	--	--	50.00
EGDMA	1.05	1.60	1.05	1.58	3.00
Irgacure 819	0.30	0.30	0.30	0.30	0.31

TABLE 2

Component	EXAMPLE IDs				
	(% w/w)				
	36E	36F	36G	36H	36I
HFMA	65.00	50.02	34.99	65.01	65.01
BA	32.00	46.49	61.01	32.99	34.00
EGDMA	3.00	3.50	4.00	2.00	1.00
Irgacure 819	0.30	0.30	0.30	0.30	0.30

BA = n-butyl acrylate

TFEMA = 2,2,2-trifluoroethyl methacrylate

PEA = 2-phenylethyl acrylate

HFIPA = 1,1,1,3,3,3-hexafluoroisopropyl acrylate

HFBMA=2,2,3,3,4,4,4-heptafluorobutyl methacrylate

EGDMA = ethylene glycol dimethacrylate

Irgacure 819 = phenylbis(2,4,6-trimethylbenzoyl)phosphine oxide

HFMA = 1 H, 1 H, 2H, 2H-heptafluorodecyl methacrylate

Weight percent extractables, mechanical properties, and weight percent silicone uptakes are shown in Table 3.


Table 3

Sample ID	% Extractables (N≥8)	Storage Modulus at 35°C (MPa)	% silicone uptake after 28 days in silicone oil at 70°C	% silicone uptake after 32 days in silicone oil at 70°C
32A	4.1±0.2	0.55±0.02	11.7±0.3	--
32B	3.0±0.1	0.71±0.02	15.4±0.2	--
32C	8.2±0.5	0.32±0.02	16.4±0.4	--
32D	7.0±0.2	0.42±0.02	26.4±2.6	--
45B	2.5±0.1	1.61±0.08	--	0.88±0.08
36E	3.3±0.1	2.07±0.08	--	0.24±0.02
36F	4.0±0.1	1.28±0.03	--	2.68±0.29
36G	4.1±0.1	1.23±0.08	--	13.11±0.50
36H	3.8±0.1	--	--	0.46±0.06
36I	4.9±0.3	--	--	0.86±0.07

We claim:

1. A soft hydrophobic acrylic material,  
being characterized by having a storage modulus of from 0.75 MPa to 2.5 MPa measured by dynamic mechanical analysis under compression mode at 35°C and a silicone uptake of less than 1.5% by weight after accelerated aging in a silicone fluid for 32 days at 70°C,  
wherein the acrylic material is obtained from a polymerizable composition comprising:
  - a) from 55% to 90% by weight of at least one perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate;
  - b) from 10% to 45% by weight of at least one C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate;  
and
  - c) at least one cross-linking agent, provided that the polymerizable composition comprises less than 2% by weight of any aryl acrylic monomer.
2. The acrylic material of claim 1, wherein the acrylic material has a storage modulus of from 1.0 MPa to 2.0 MPa as measured by dynamic mechanical analysis under compression mode at 35°C.
3. The acrylic material of claim 1 or 2, wherein the acrylic material has a silicone uptake of less than 0.8% by weight or less after accelerated aging in a silicone fluid for 32 days at 70°C.
4. The acrylic material of any one of claims 1 to 3, wherein the polymerizable composition comprises:
  - a) from 60% to 85% by weight of at least one perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate;
  - b) from 15% to 40% by weight of at least one C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate; and
  - c) a cross-linking agent, provided that the polymerizable composition is less than 1% by weight of any aryl acrylic monomer,  
provided that the sum of components a) to c) and other polymerizable components is 100% by weight.
5. The acrylic material of claim 4, wherein the polymerizable composition comprises from 65% to 80% by weight of at least one perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate.
6. The acrylic material of claim 5, wherein the polymerizable composition comprises from 20% to 35% by weight of at least one C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate.

7. The acrylic material of claim 4, wherein the polymerizable composition comprises 0.5% by weight or less of any aryl acrylic monomer.
8. The acrylic material of claim 4, wherein the polymerizable composition comprises 0.1% by weight or less of any aryl acrylic monomer.
9. The acrylic material of any one of claims 1 to 8, wherein said at least one perfluoro-substituted-C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate is selected from the group consisting of 2,2,2-trifluoroethyl methacrylate, 2,2,2-trifluoroethyl acrylate, tetrafluoropropyl methacrylate, tetrafluoropropyl acrylate, hexafluoro-iso-propyl methacrylate, hexafluoro-iso-propyl acrylate, hexafluorobutyl methacrylate, hexafluorobutyl acrylate, heptafluorobutyl methacrylate, heptafluorobutyl acrylate, octafluoropentyl methacrylate, octafluoropentyl acrylate, dodecafluoropentyl methacrylate, heptadecafluorodecyl acrylate, heptadecafluorodecyl methacrylate, pentafluorophenyl acrylate, pentafluorophenyl methacrylate, and combinations thereof.
10. The acrylic material of any one of claims 1 to 9, wherein said at least one C<sub>2</sub>-C<sub>12</sub> alkyl (meth)acrylate is selected from the group consisting of ethyl acrylate, ethyl methacrylate, n-propyl acrylate, n-propyl methacrylate, n-butyl acrylate, n-butyl methacrylate, n-pentyl acrylate, n-pentyl methacrylate, n-hexyl acrylate, n-hexyl methacrylate, n-heptyl acrylate, n-heptyl methacrylate, n-octyl acrylate, n-octyl methacrylate, n-nonyl acrylate, n-nonyl methacrylate, n-decyl acrylate, n-decyl methacrylate, n-undecyl acrylate, n-undecyl methacrylate, lauryl acrylate, lauryl methacrylate, 2-ethylhexyl acrylate, 2-ethylhexyl methacrylate, 2,2-dimethylpropyl acrylate, 2,2-dimethylpropyl methacrylate, trimethylcyclohexyl acrylate, trimethylcyclohexyl methacrylate, isobutyl acrylate, isobutyl methacrylate, isopentyl acrylate, isopentyl methacrylate, and mixtures thereof.
11. The acrylic material of any one of claims 1 to 10, wherein said at least one cross-linking agent is selected from the group consisting of ethylene glycol dimethacrylate; diethylene glycol dimethacrylate; triethylene glycol dimethacrylate, tetraethylene glycol dimethacrylate, allyl methacrylate; 1,3-propanediol dimethacrylate; 2,3-propanediol dimethacrylate; 1,6-hexanediol dimethacrylate; 1,4-butanediol dimethacrylate;

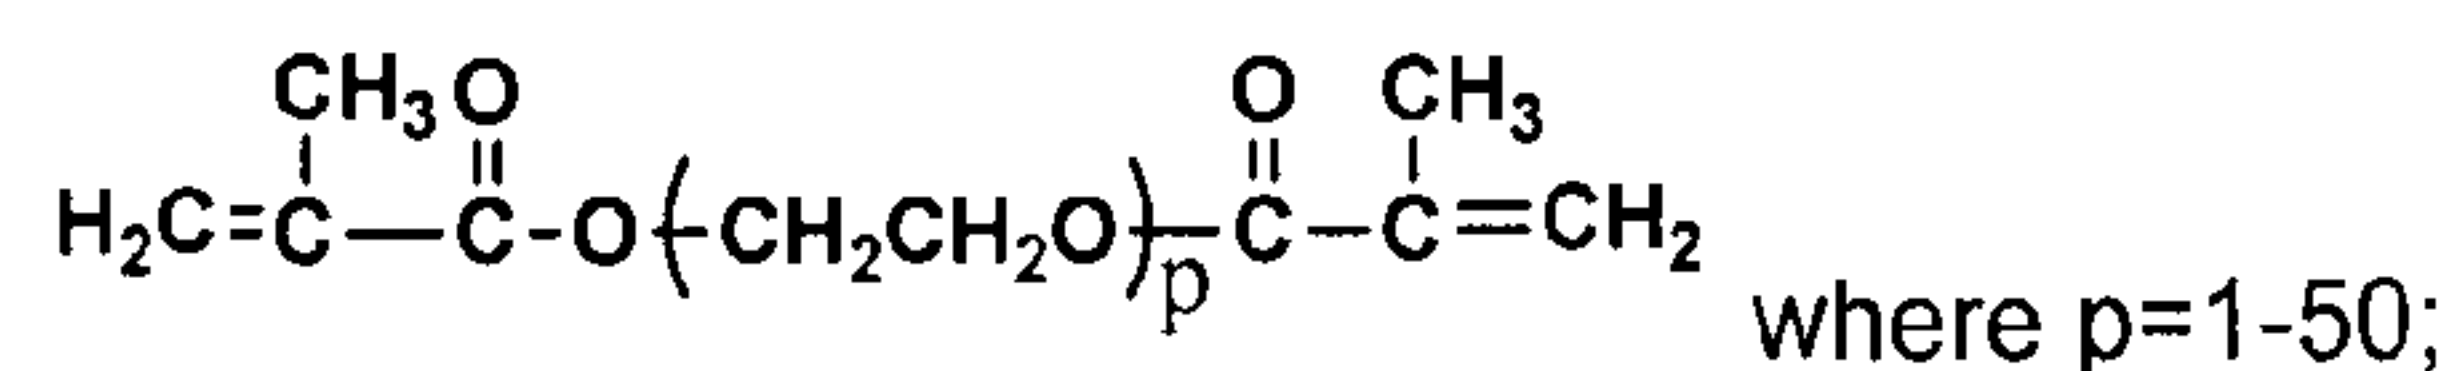

and combinations thereof.

12. The acrylic material of any one of claims 1 to 11, wherein the amount of said at least one cross-linking agent in the polymerizable composition is 1-5% if the molecular weight of the crosslinking agent is less than 500 Daltons, or is 5-17% if the molecular weight of the crosslinking agent is greater than 500 Daltons.
13. The acrylic material of any one of claims 1 to 12, wherein the polymerizable composition further comprises one or more polymerizable components selected from the group consisting of a polymerizable UV-absorber, a polymerizable colored dye, a siloxane monomer, and combinations thereof.
14. The acrylic material of any one of claims 1 to 13, wherein polymerizable composition comprises heptadecafluorodecyl methacrylate, butyl acrylate, and ethylene glycol dimethacrylate.
15. An accommodating intraocular lens comprising a soft hydrophobic acrylic material of any one of claims 1 to 14.