



(51) International Patent Classification:

A62C3/02 (2006.01) B64F 1/00 (2006.01)
B64C 39/02 (2006.01) A62C 27/00 (2006.01)

(21) International Application Number:

PCT/IT20 17/000 106

(22) International Filing Date:

26 May 2017 (26.05.2017)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

102016000056273 31 May 2016 (31.05.2016) IT

(71) Applicant: **INSPIRE S.R.L.** [IT/IT]; Via XX Settembre, 33/10, 16121 Genova (GE) (IT).

(72) Inventor: **GHIO, Marco**; Via Gian Battista Monti, 27, 1615 1 Genova (GE) (IT).

(74) Agent: **PERIPIMENO, Angelo**; Via Parma, 183, 16043 Chiavari (GE) (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,

KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(H))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: METHODS AND APPARATUS FOR THE EMPLOYMENT OF DRONES IN FIREFIGHTING ACTIVITIES


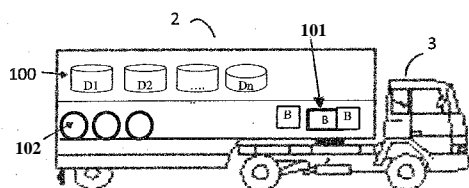


FIG. 1



(57) Abstract: Drones have reached technological maturity and very affordable costs, but their direct use in firefighting applications is still largely limited by problems concerning their range, their limited load capacity and their flight autonomy. Such drawbacks are overcome by means of a coordinated support system for drones (100) in order to carry out missions for the drop of specific quantities of firefighting liquid (102), i.e. based on the rainfall system. Said support units have the shape and size of a common container (2) and can be easily moved by using common road tractors (3). This allows not only the positioning of a drone fleet (100) close to the fire and the possible recovery of the aircraft at the end of the mission, but also any transfer during the mission to areas of strategic interest or priority importance to effectively fight in real time the spreading of the fire fronts. The coordination and control of the above-mentioned operations is carried out through a control unit (1). In addition to the transfer of the employed units, the proposed system also allows the automated replacement and recharging of the batteries (101) the drones (100) are equipped with, in order to extend their flight autonomy. Finally, the system allows for the initial filling and subsequent multiple refills of drones (100) with the appropriate extinguishing liquid contained in small dispersible containers (102), that can be hooked and unhooked from drones by remote control to allow them to perform multiple missions.



Method and apparatus for the employment of drones in firefighting activities.

Technical field

The object of the present invention is a method and apparatus for the employment of
5 drones in firefighting activities.

Background art

In the past decades, the issue concerning fighting fires, in particular forest fires, has become more and more important because of the increase in the frequency, incidence
10 and magnitude of these phenomena and their dangerous consequences involving people, things and natural environment.

Forest fires fighting is carried out through a variety of air/ground interventions and thanks to the coordination of various actors, such as the fire brigade, civil protection, police forces and volunteers.

15 Ground interventions usually involve indirect actions, such as targeted deforestation in certain areas in order to eliminate potential combustible for fires (vegetation) and also the so-called burning out actions aimed at strategically limiting and deviating the spreading of flames. There are also the so-called direct actions involving the use of hydrants and similar means in order to spread water and/or extinguishing liquids onto
20 the fire front, e.g. ammonium phosphate-based mixtures. Air interventions, which are the object of the present invention, include the use of large aircraft, such as helicopters, planes or other aircraft equipped with containers for picking up water from special reserves and dropping it both on the fire front and on the central part of the fire to counteract its development.

25 The above-mentioned technique has several drawbacks. Ground interventions, for example, are little effective because of their limited effect on large fires. Another problem is the high cost of aerial firefighting due to the purchase, the use and the maintenance of the aircrafts and of the training of staff. This is the reason why, today it is still noticeable that said aircraft fleets (e.g. the known aircraft, generally known as
30 Canadair) are much fewer than what it would be really needed and cannot meet the demands for firefighting interventions, both in terms of rapidity and geographical

coverage of the national territory. Finally, it should be reminded that, for safety reasons, aerial firefighting can only be carried out during the day and that, due to the need to pick up water after each intervention and to refuel on a regular basis, the firefighting aircraft are able to perform only a limited number of water drops, and
5 even more importantly, such water drops can be done and are really useful only if there is at least one nearby dedicated place to pick up water from (lake, calm sea, basin, etc.) that is able to easily and quickly provide the extinguishing liquid (water drops must be very frequent to be effective).

Another problem is that the currently performed interventions do not guarantee an
10 optimal water spraying. During ground interventions, the distance at which the extinguishing liquid is dropped is limited and does not reach the heart of the fire, whereas during aerial interventions the water drop is instantaneous and precisely located, thus covering a relatively small surface, which reduces its effects.

Considered the above-mentioned problems and with particular reference to aerial
15 solutions, what has been noticed over the past few years is the ever increasing use of drones and, in general, of the so-called Unmanned Aerial Vehicle (UAV) for firefighting purposes. The use of drones has partially solved some of the above mentioned critical issues and, in particular, the fire monitoring and, in particular, its temporal and spatial developments. This led to significant consequences on the
20 management of the problem, the coordination of ground initiatives, as well as on the safety of employed staff and of people and properties close to the affected areas. Up to now, however, it is observed that the use of drones in firefighting applications, useful for the above-mentioned reasons and despite their increasing fame because of their commercial deployment, is fundamentally limited to the field of control, analysis,
25 logistical support and, more generally, supervision, whereas there is no evidence of direct use of said devices to actively fight fires: in particular for the drop of water or extinguishing liquids. This is true in spite of the fact that the state of the art envisages many solutions, and in particular patents, suggesting the use of small aircraft for the strategic drop of small quantities of water.

30 Such solutions are all based on the same idea, the so-called rain effect, i.e. dropping small quantities of firefighting liquid or drizzling it over the fire, and its subsequent

spreading on a large area instead of in a concentrated manner. This method, both theoretically and experimentally, is acknowledged as being particularly effective, whereas, on a practical level, it is effectively used in domestic and/or industrial firefighting systems.

- 5 The use of the rain effect on large-scale fires has been assumed for a long time (FR2624750A1-KAIDONIS ARISTIDE[FR], 23/06/1989).

This patent was then followed by a number of derivative patents constituted by implementation variants of said rainfall effect, among which, for example, water drops from aircraft (EP2163279A1 - LONESTARS INVENTIONS [US],

- 10 17/03/2010), water drops from helicopters or drones (DE20315789U1-BETKE FRIEDRICH[DE], 10/10/2003), water drops from aerostats or similar aircraft directed at the fire by using predictive methods (IT0000 141 1012 - MARCO GHIO, 12/04/2012).

- These solutions, though ingenious, have not been applied to a real and effective use in
15 firefighting interventions by the authorities and the bodies in charge because of a number of problems, including the limited number of missions that can be carried out and hence the limited amount of liquid that can be dropped on to the flames; the impossibility, in some cases, of recovering the extinguishing liquid containers (which causes pollution) or the means used (e.g. the aerostats). Moreover, it must be
20 considered the high cost of the assumed aircraft or of helium (in the case of aerostats), the difficulty of controlling drone fleets in such complex environments, the limited autonomy of drones that, being equipped with batteries, only allow short missions. To these issues, it is necessary to consider the above-mentioned problems related to the traditional methods, and not yet solved (pick up of water or liquid, impossibility of
25 operating beyond given distances, etc.).

Disclosure of the invention

- Drones have reached a technological maturity and very affordable costs, but their
30 direct use in direct firefighting applications is still largely limited by the aforementioned problems.

This patent aims to realize a system which is able to overcome said issues, and in particular the limited autonomy due to the presence of batteries on board the drones, the limited capacity of dropping the extinguishing liquid due to the inherent load limits of these devices, the difficulties related to their transport to the burning areas
5 and their subsequent recovery at the end of the intervention. Moreover, the aim is to strategically position them with respect to the fire, its development and any areas of priority interest, as well as the efficient use of the smallest possible number of said means and their intelligent coordination during missions, even by night use, contrary to the generally used aircraft operated by pilots.

10 This goal is achieved by creating a coordinated system of control and support units for drones, in order to carry out missions for the drop of small quantities of firefighting liquid (i.e. based on the rain system). Said support units have the shape and size of a common container and can be easily moved by using common road tractors or equivalent vehicles. This allows not only the positioning of a drone fleet close to the
15 fire and the possible recovery of the aircraft at the end of the mission, but also any transfer during the mission to areas of strategic interest or priority importance to effectively fight the spreading of the fire fronts in real time. In addition to the transfer of the employed units, the proposed system also allows the automated replacement and recharging of the batteries the drones are equipped with, in order to extend their
20 flight autonomy. Finally, the system allows for the initial filling and subsequent multiple refills of drones with the appropriate firefighting liquid contained in small, replaceable and dispersible containers, that can be hooked and unhooked from drones by remote control to allow them to perform multiple missions. Finally, the system according to the present invention includes a control unit (that might also be
25 transferred and housed within a container unit) for the coordination of missions, the flight paths to be followed, the selection of the ideal drop points optimized according to the environmental conditions and the interventions scenario, the coordination of the refilling interventions and the ideal management of the available units, as well as the selection and, if necessary, dynamic remodelling of the areas where to position and, if
30 necessary move to, the support and refilling containers of the drones and the interventions areas according to the variant-time priorities.

Brief description of the drawings

Further characteristics and advantages of the proposed technical solution will appear more evident in the following description of a preferred but not exclusive embodiment
5 shown by way of example and not of limitation in the accompanying no. 4 drawings, in which:

- Figure 1 indicates the system control unit which, by means of radio signals, controls and monitors the positions of the drone support units in the form of
10 containers (e.g. intermodal containers) and loaded on road tractors. Said unit communicates, monitors and controls the action of drones.
- Figure 2 shows the general structure of a drone support unit for storing and refilling and its internal subdivision into functional areas.
- Figure 3 shows the specification of the storage system for containers containing
15 the fire extinguishing liquid.
- Figure 4 shows a lateral perspective view of the dynamics of a drone fleet and the subsequent steps of landing, refilling on the support container, take-off and subsequent drop of extinguishing liquids containers onto the burning area.
- Figure 5 shows the same dynamics as in figure 4, illustrated in top view.

20

Best mode for carrying out the invention

With reference to the accompanying drawings and in particular to figure 1 thereof, the components of the control communication system are schematically identified, comprising a controller (1) suitable to manage and plan the use of a drone (100) fleet
25 that in their rest condition are housed together with back-up batteries (101) and containers containing firefighting liquid (102) within one or more containers (2) of a size and shape suitable for easy handling by, for example, a standard road tractor (3). Said containers can then be positioned nearby and depending on the burning area and might be possibly moved according to the spreading of the fire, as it will be better
30 described below. Preferably, but not necessarily, the controller (1) is a computer that is

physically separated from the drones (100) and connected to them by means of a wireless connection (4).

Drones (100), housed inside the container (2), are possibly characterized by the presence of dual feeding, i.e. at least two power supply batteries, one of which is used
5 as a backup battery, and one is used to supply power to engines, navigation systems, on board sensors and equipment, such as the equipment dedicated to communication and remote control. Drones (100) are also equipped with a hooking system allowing them to load and carry containers containing extinguishing liquid (102). One or possibly more containers (2) containing said drone (100) fleet are positioned by the
10 road tractors (3) nearby the burning areas at the ideal locations identified and selected by the controller (1) following a preliminary analysis of orographic characteristics, vehicular accessibility, environmental parameters such as wind, temperature, humidity and relevant information from the context, and taking into account strategic factors such as the presence of priority targets to be protected and/or data related to the recent
15 spreading of the fire.

The wireless connection system (4) is designed to allow a bidirectional transfer of data between drones (100), controller (1), and any firefighters in the area, thus allowing the creation of a collaborative system made of a swarm of drones, which are able of self-management by using specific algorithms and the exchange of
20 information, such as telemetry, position, movement, information coming from on board sensors, environmental data and, of course, command, control, navigation and coordination signals from the fire fighting forces, means and aircraft.

The controller (1) is in turn housed in a movable physical unit, which is functionally similar to the container (2) and is therefore also potentially movable by means of road
25 tractors (3), or equivalent vehicles, to be transferred close to the area affected by the fire, and further transferred according to the spreading of the fire. The controller (1) is also equipped with connection devices to geographical networks in order to be safely controlled, if needed, from remote stations (5) in order to keep the operators safe, and they will be able both to work next to the containers (2) and use remote control
30 applications, i.e. at a safe distance from the means and the fire front. The same safety

considerations apply to firefighting operators in charge of driving road tractors (3), who may, after positioning the containers (2), drive away from the burning areas.

With reference to the accompanying drawings, and in particular to figure 2 thereof, those parts of the container units that are functionally significant, are schematically
5 identified and they are dedicated to support the firefighting missions of the drones and, in particular, to their transfer, to the storage, replacement and charge of the batteries, and, eventually, to the storage and replacement of the containers containing the firefighting liquid. In particular, a support container (2) comprises a space (6) for
10 accommodating the drones for them to be transported, a storage area (7) of suitable containers containing firefighting liquid and a storage area (8) for storing and recharging the batteries (101) of the drones.

The container (2) is also equipped with an electric generator/charger (10) and a fuel tank (11) or equivalent functional devices, said devices being remotely controllable and designed to guarantee the energy independence and the autonomy of the
15 container, and above all the charge of batteries (101) regardless of the presence of a road tractor (3).

Finally, the container (2) includes a number of automatic mechanisms that can be remotely controlled by the controller (1), which allow the automatic launch/retrieval of the drones in the take-off/landing area (9) and the ejection at predetermined
20 positions of the containers containing the firefighting liquid stored in the area (7) and the batteries housed in the area (8). The landing, replacing and taking-off area of the container (9) is then equipped with automated exchange and hook systems that allow the employed drones to land, unload the empty batteries, if necessary, for them to be recharged and automatically load new batteries and a container containing an
25 extinguishing liquid for their next missions.

With reference to the accompanying drawings and in particular to figure 3 of the drawings, the shelves (12) inside the container (2) are schematically identified and positioned in space (7) and designed to accommodate the containers containmg firefighting extinguishing liquid (102), said containers being anchored to a series of
30 connectors (13) which secure them and keep them in a fixed and predetermined position and facilitate their loading, thanks to an automated system, onto the equipped

area (9) allowing drones to land, be reloaded and take off. It should also be noted that said connectors (13) will be equipped with occupancy sensors to allow the automated control of the stocks of firefighting containers (102).

With reference to the accompanying drawings, and in particular figures 4 and 5 thereof, the container (2) is schematically identified, safely positioned in functionally strategic areas and close to the fire front (14), said areas being anyway compatible with the orographic situation of the territory, the availability of vehicular accessibility around the area of intervention and the presence of very important targets that need to be protected, all of this is based on strategic analyses and processing carried out by the control unit (1) based on a specific intervention management algorithm. Figures 4 and 5 show drones (100) which follow a cyclic path and land on the equipped and automated exchange area, on the landing and take-off area (9) for the necessary reloading, recharging/replacing interventions of the firefighting liquid containers and, if necessary, of the batteries. Said equipped area (9) is equipped with automated control, management and automatic routing mechanisms to facilitate the landing of the drones, the hooking to a restraining and translation mechanism which, while the drones slide along that same area (9), unhooks the empty container and hook to the drone a new container filled with firefighting liquid (102), which will be used during the next. If the battery used by the drone is almost empty, it is disconnected from the drone and replaced with a new charged battery (101) taken from those available in the dedicated area (8) and made available on the surface of the equipped area (9) by using an automatic lifting and ejection system. At the same time, the system allows the empty battery to be moved to the lower level of the container (2), and in the area (8) designed for storage and especially for recharging the empty batteries.

The drone, refilled with the firefighting liquid, and possibly reloaded with a new charged battery that is needed to fly, can then take off again and fly towards the concerned area and drop the extinguishing liquid contained in the new firefighting liquid container (102) on the concerned area (14) according to information related to target, trajectory, and coordination with other aircraft provided by the control unit (1) and the by mutual cooperation and communication between them. In such a way, the

explained procedure can be cyclically repeated in a virtually infinite manner, in order to contribute to the continuous control and containment of the fire.

Industrial Applicability

5 The invention can be realized with technical equivalents other than the currently envisaged drones and systems, by using supplementary materials or devices fit for the purpose. By way of example and not of limitation, it is noted that the geometric shapes of the elements may be varied while maintaining the functionality. The containers (2) for the drone support may for example be integrated by further
10 additional containers that only contain refills for containers and/or batteries to supply power to the drones. At the same time, the current base housing the drones (12) could be equipped with nozzles for refilling containers to develop a system that recycles the used containers instead of scattering or storing them as empty containers in their respective containers. Lastly, it could be developed a system where containers are
15 filled only when actually used and containers are positioned next to dedicated tank containers where large quantities of extinguishing liquid are kept. Finally, it should be noted that the proposed solution can be modified with known changes to allow for the use of drones for missions and technological environments that are completely different from the primarily assumed firefighting scenario. By way of example, and
20 not of limitation, potential uses are mentioned, such as the dispersion or spread of different materials, either solid, liquid materials or powders, for industrial or agricultural purposes (fertilization, disinfection, irrigation and similar processes). Last but not least, depending on the size of the fleet, on the employed means and on the material to be transported, an expandable area (9) equipped for landing, taking-off
25 and refilling might be needed or, depending on the specificities of the intervention, the area might be different and separated from the container unit (2).

CLAIMS

1. Coordination, control and logistics support system for the optimal employment of
5 fleets of drones in firefighting missions aimed at launching small amount of
extinguishing fluid characterized by:
- a) a fleet of drones (100) equipped with a coupling and ejection system of containers
of extinguishing fluid (102);
 - 10 b) at least one logistics support unit in the form of container (2) or functional
equivalent able to house drones (100), drone batteries (101) and containers of
extinguishing fluid (102), said unit being transportable by means of road tractors
(103) or similar means;
 - c) a control unit (1), transportable by means of road tractors (103) or similar means
15 which communicates via radio signals (4) and controls, coordinates and monitors all
the constituent parts of the system as well as the operators on the ground also allowing
communication towards remote users (5);
 - d) an equipped area (9) for landing and take-off of the drones (100), for the automated
replacement of their batteries (101) and for the automated loading of containers of
20 extinguishing fluid (102).
2. System according to claim 1, wherein said logistics support unit in the form of
containers (2) is characterized by:
- 25 a) an automatic ejection system of the drones (100) from the inner space dedicated to
the drones (6) towards the equipped area (9);
 - b) an automatic ejection and collection system for the batteries (101) operating
between the inner space of storage and recharge (8) and the equipped area (9);
 - c) an automatic ejection system of the containers of extinguishing fluid (102) from the
30 inner space of storage (7) towards the equipped area (9);

d) an electric generator/battery charger (10) or functional equivalent means to allow the recharging of the exhausted batteries of the drones (100);

e) a fuel tank (11) or a primary energy storage system useful for the operation of the unit (9).

5

3. System according to claims 1) and 2) wherein said storage space (7) has a series of connectors (13) which allow to couple and hold in fixed positions the containers of extinguishing fluid (102).

10 4. System according to claims 1), 2), 3), wherein said connectors (13) are provided with presence sensors or similar systems to allow the control of the stocks of the fire containers (102).

5. System according to claim 1), wherein said control unit (1) is provided with
15 geographical network connection equipment and can be driven from remote locations (5).

6. System according to claim 1) wherein said equipped area for landing and take-off (9) may be realized at the upper part of the container (2) and provided with any
20 expansion mechanisms to facilitate the landing and take-off of the drones.

7. System according to claim 1) wherein said equipped area for landing and take-off (9) may be positioned in an area distinct and contiguous to the container (2).

25 8. System according to claim 1) wherein said fleet of drones (100) may be equipped with coupling and ejection systems which allow the transport of different materials from the containers of extinguishing fluid (102).

30


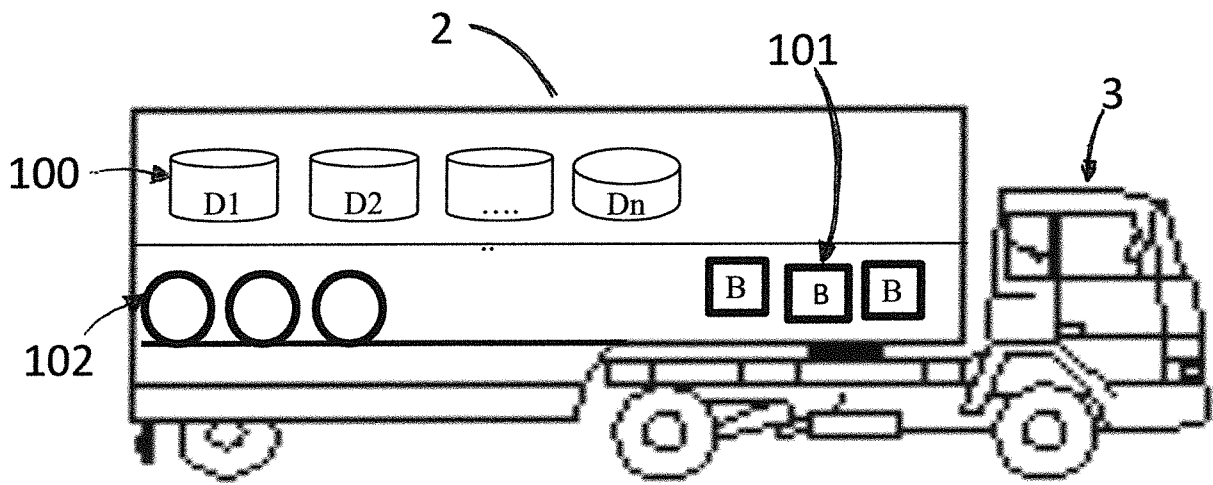
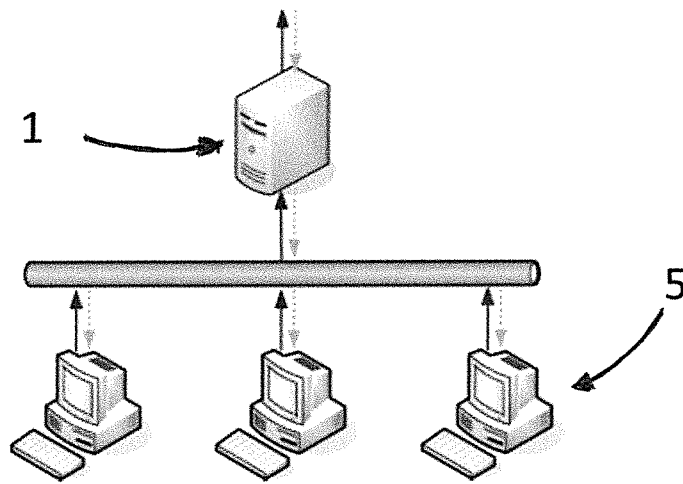


FIG. 1






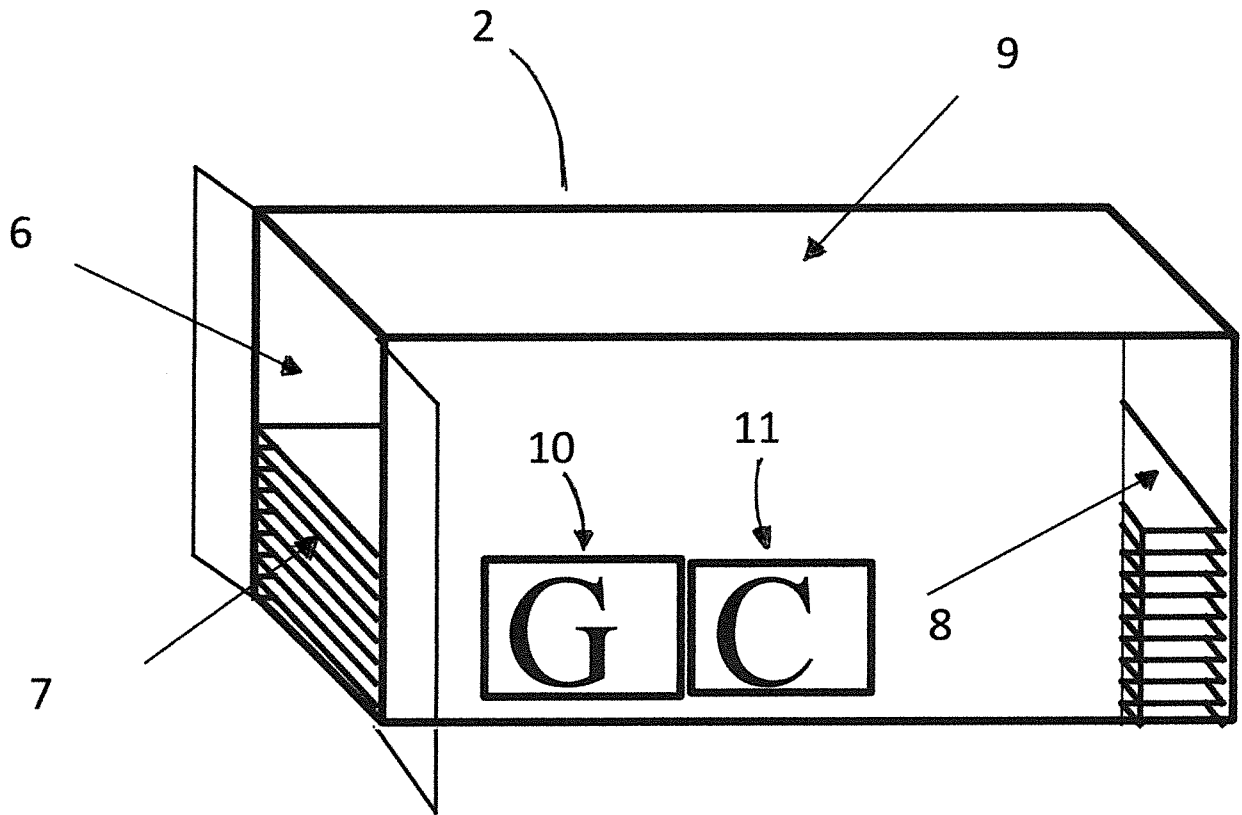


Fig. 2

FIG. 3

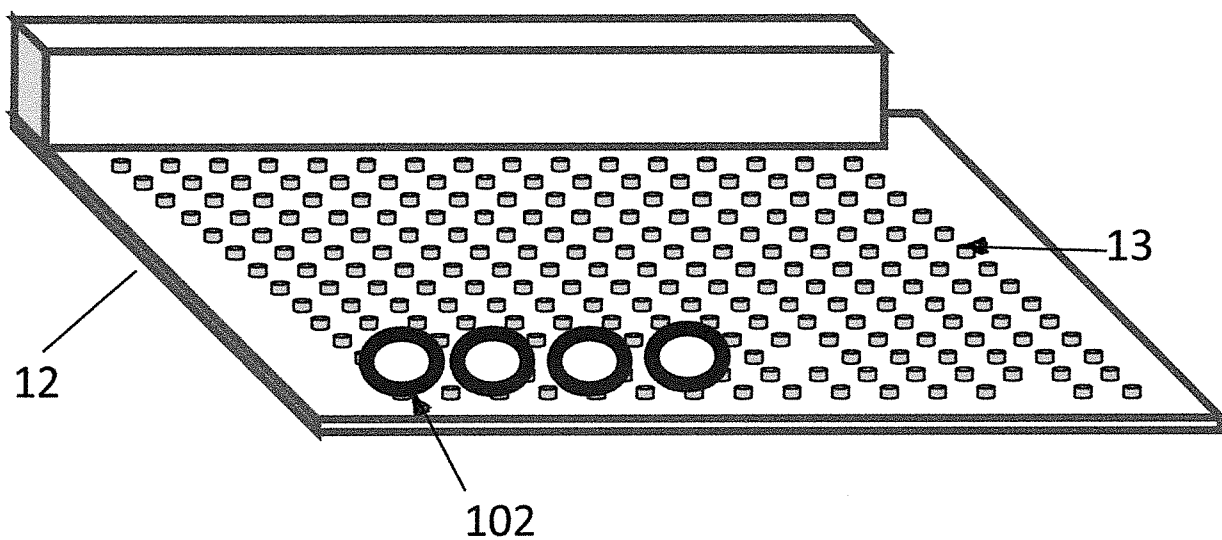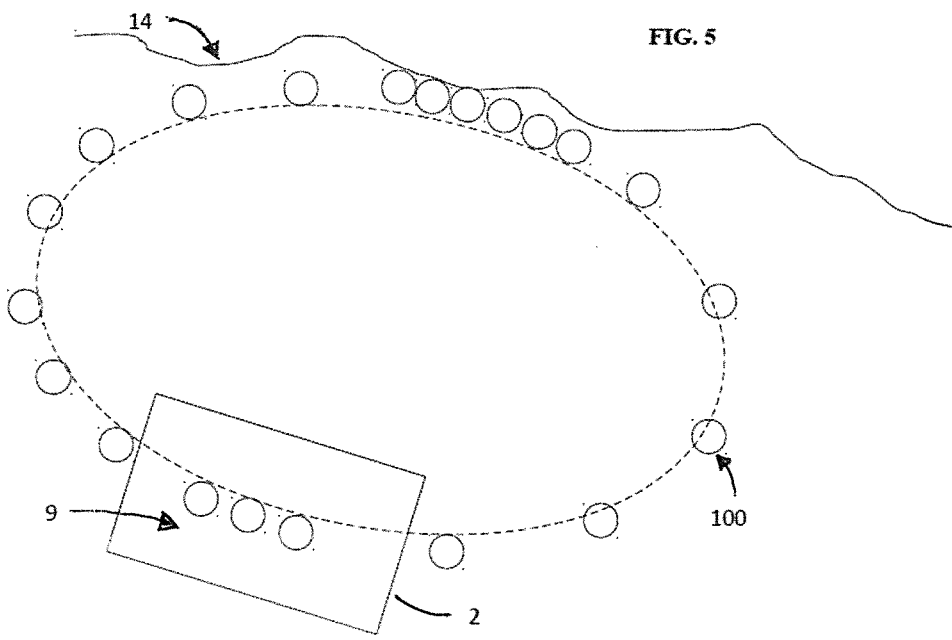

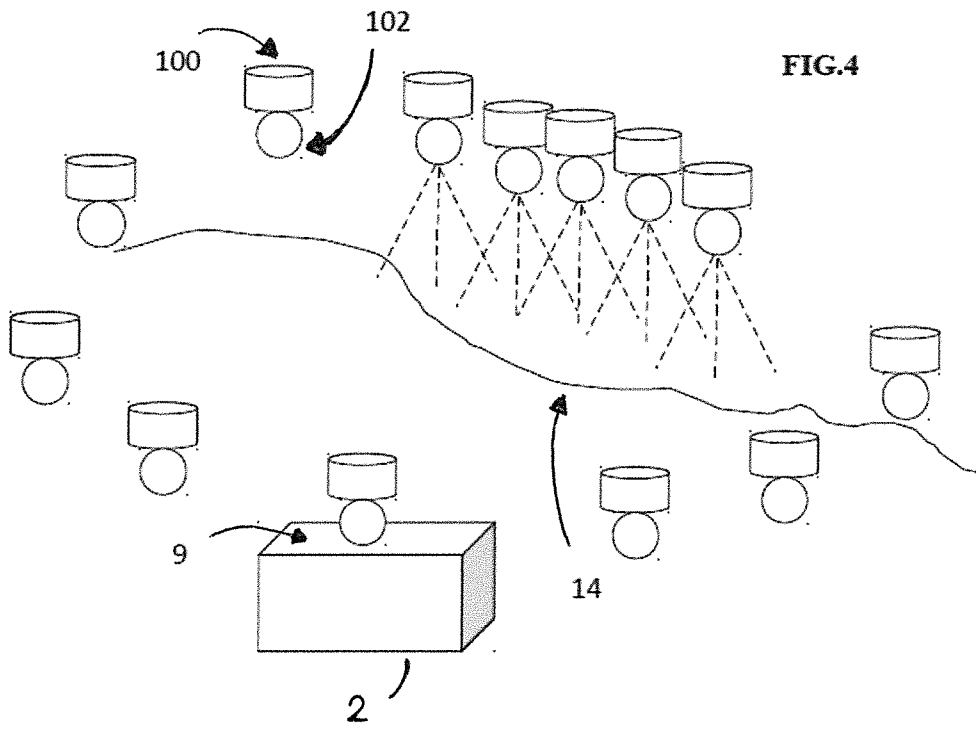

INTERNATIONAL SEARCH REPORT

| |
|---|
| International application No PCT/IT2017/000106 |
|---|

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A62C3/02 B64C39/02 B64F1/00
 ADD. A62C27/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 A62C B64C B64F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| A | wo 2014/080385 A2 (ALSHDAI FAT WASFI [AE] ; ALMUHAI RBI EI DA [AE] ; KASSAB FARAH AFI F [AE]) 30 May 2014 (2014-05-30) the whole document ----- | 1-8 |
| X,P | wo 2016/205415 AI (IMAGEKEEPER LLC [US]) 22 December 2016 (2016-12-22) paragraphs [0041] - [0053] , [0091] figures 1-4, 12 ----- | 1-8 |
| A | GB 2 530 626 A (CARRICONDE GUSTAVO [AE]) 30 March 2016 (2016-03-30) abstract figures page 2, line 4 - line 24 ----- | 1-8 |
| A | KR 101 566 341 BI (WON GI YEON [KR] ; CHOI DAE KYU [KR]) 5 November 2015 (2015-11-05) abstract; figures ----- | 1-8 |

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

| | |
|---|---|
| <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> |
|---|---|

| | |
|--|--|
| Date of the actual completion of the international search 29 September 2017 | Date of mailing of the international search report 09/10/2017 |
|--|--|

| | |
|--|--|
| Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016 | Authorized officer Nehrdi ch, Marti n |
|--|--|

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IT2017/000106

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|-------------------------|-----------------------------|
| WO 2014080385 | A2 | 30-05-2014 | NONE |
| ----- | | | |
| WO 2016205415 | A1 | 22-12-2016 | US 2016364989 A1 15-12-2016 |
| | | | WO 2016205415 A1 22-12-2016 |
| ----- | | | |
| GB 2530626 | A | 30-03-2016 | NONE |
| ----- | | | |
| KR 101566341 | B1 | 05-11-2015 | KR 101566341 B1 05-11-2015 |
| | | | WO 2016195320 A1 08-12-2016 |
| ----- | | | |