

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Exercise device to prevent DVT

(51)⁶ International Patent Classification(s)
A63B 22/08 (2006.01) **OBMJP** **A63B**
A63B 22/16 (2006.01) 22/16
A63B 22/08 20060101ALI2005100
20060101AFI2005122 **8BMEP**
PCT/GB02/04944

(21) Application No: 2002339079

(22) Application Date: 2002 .10 .31

(87) WIPO No: W003/037446

(30) Priority Data

(31) Number	(32) Date	(33) Country
0126063.7	2001 .10 .31	GB

(43) Publication Date : 2003 .05 .12

(43) Publication Journal Date : 2003 .07 .10

(71) Applicant(s)
Noel McKenzie

(72) Inventor(s)
McKenzie, Noel Robertson

(74) Agent/Attorney
Davies Collison Cave, 1 Nicholson Street, Melbourne, VIC, 3000

(56) Related Art
JP S57-42831 A
US 2468327 A
US2080208 A
US 3341196 A

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 May 2003 (08.05.2003)

PCT

(10) International Publication Number
WO 03/037446 A1

(51) International Patent Classification⁷: A63B 23/04,
A61H 1/02

(21) International Application Number: PCT/GB02/04944

(22) International Filing Date: 31 October 2002 (31.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0126063.7 31 October 2001 (31.10.2001) GB

(71) Applicant and
(72) Inventor: MCKENZIE, Noel, Robertson [GB/GB]; P.O.
Box 4039, Worthing, West Sussex BN11 4DX (GB).

(74) Agent: LAMB, Martin, John, Carstairs; Marks & Clerk,
57-60 Lincoln's Inn Fields, London WC2A 3LS (GB).

(81) Designated States (national): AB, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,


CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:
with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EXERCISE DEVICE TO PREVENT DVT

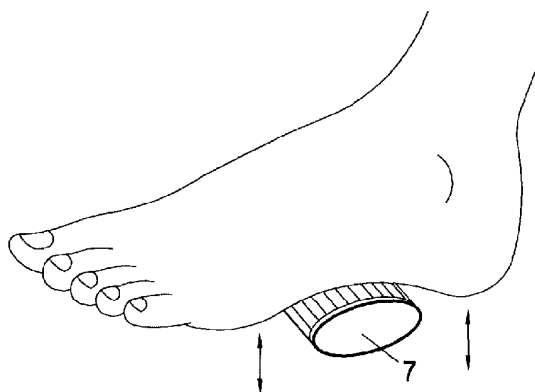

(57) Abstract: In order to provide an exercise device to give movement of the calf muscles to help pump blood from the legs to the heart and thereby reduce the risk of DVT, an oval or elliptical shaped oscillator is provided which can be used by a seated person by rocking the device backwards and forward underneath the foot. Lift is provided by the dual can effect of the rocking device, reacting with the floor, which increases the angle of the foot so as to flex the calf muscles.

WO 03/037446 A1

1

M&C Folio: WPP86486

EXERCISE DEVICE

This invention relates to devices for exercising the human body, and the legs in particular.

Recently, it has become more widely understood that seated and inactive persons, such as aircraft passengers, may be prone to deep-vein thrombosis (DVT), occurring in the main over longer journey times and affecting the legs in particular. Normally, movement of the calf muscles helps to pump blood from the legs to the heart. However, if the legs are rested or inactive for extended periods, such as in the case of long haul air travel, there is a risk of blood clots forming in the legs, although these may be dispersed through exercise that activate the calf muscles to increase the flow of blood. Whilst seated, this can be best achieved by rocking the foot at the ankle which, primarily, generates movement in the calf muscle group.

Certain exercise devices for the legs are produced that may be operated whilst seated for the relief of DVT. However, these devices need setting up and may not always fully exercise the calf muscles due to imprecise action through not being operated correctly. The present invention sets out to provide improvements in these respects.

The present inventor has realised that a simple and highly effective exercise device may be provided in the form of a rigid body comprising a foot-contacting surface and a floor-contacting surface which are configured so that rolling the floor-contacting surface over a floor surface will cause the foot-contacting surface to rise above the floor surface. Surprisingly, the action of lifting the foot causes the calf muscles to contract in a way which helps to pump blood through the veins in the leg. Repeated operation of the device in a rocking, oscillating or rolling motion causes a repeated contraction and relaxing of the calf muscles and can help resist the formation of clots and deep vein thrombosis.

AMENDED SHEET

2003-08-22

2002339079 02 Mar 2009

1a

In accordance with the invention, there is provided an exercise device for use under the instep of the foot to provide lift for the foot and rotation of the ankle when rocked in either direction, comprising a solid or hollow
5 body having a first surface for contacting the instep of the foot of a user and a second surface for contacting a floor surface wherein the outer profile of the device corresponds to a substantially symmetrical ellipse, an asymmetrical ellipse, an ovoid, an oblong in which the first and second
10 surfaces are curved or a round edged polygon in which the first and second surfaces are curved, the first and second surfaces being configured so that rocking the second surface over a floor surface causes at least a part of the first surface to rise with respect to the floor surface, wherein
15 the first and second surfaces are textured to improve grip, the exercise device being capable of bearing the weight of at least the leg of a fully-grown adult.

The present invention further provides an oscillating device
20 that functions under the instep that employs an elliptical shape or offset motion, to provide an increase in height or lift for the foot when rocked or rotated in either direction, and wherein a cross section of a foot contacting zone of the device has a greatest dimension and a least
25 dimension, the ratio between the least dimension and the greatest dimension being in the range 1.0:1.05 to 1.0:2.0, 1.0:1.15 to 1.0:2.0.

According to the present invention, an oblong length of material is shaped to act as a support and fulcrum for the foot whilst seated. The oscillator is located under the instep, just forward of the ankle, so that it can be rocked, or oscillated, backwards and forwards by the foot which, primarily, requires the effort of the calf muscles, thus increasing blood flow in the leg concerned.

Preferably, the second surface is a smoothly curving surface or a surface defined by a plurality of small stepped surface segments whose edges lie on a smooth curve. Suitably, if the surface comprises small surface segments, each surface segment is no wider than 2cm, preferably no wider than 1.5 cm and preferably no wider than .8 cm. Preferably, the first surface is also curved, being defined by a smooth curve or a series of stepped surface segments in a similar way to the second curved surface. Suitably, the first and second surfaces define a closed body.

The necessary rising action is achieved because the body is generally non-circular, being elliptical, ovoid, oblong or polygonal with rounded edges.

All of these figures have the advantage that, when they are pushed, pulled, rocked, oscillated or rolled across a floor surface, using the foot, a rising action is generated in the foot, causing the calf muscles to contract.

The first and second curved surfaces may have substantially the same form so that the device can be used with either surface in contact with the floor or with the foot.

The device may comprise a section of a cylinder or prism whose cross section has the shape described above. Alternatively, it may be a section of a conoid, a pair of conoids meeting at their bases, or a cylindroid, having outwardly bowed side walls in a manner of a barrel, or inwardly bowed side walls.

The body may even be in a form of a distorted ball:

The body may be formed of any suitable material, for example, metal, synthetic material such as thermoplastic or composite material, wood, paper, papier maché or any other suitable material. A suitable material is polystyrene. The device may be formed by any suitable technique, such as moulding. It may be formed as a solid body or it may comprise a hollow body.

Where the body is in form of a hollow body, it may be open at at least one end, so that items may be stored inside the body. Removable closure means may be provided for at least one end of the body.

The body may be symmetrical about at least one and preferably two planes of symmetry, suitably, the planes of symmetry intersect one another at right angles.

Where the device comprises a symmetrical body, it can be placed any way round or anyway up and will still function.

The shape of the body is further defined by defining the shape of the cross section of a foot-contacting zone of the device. In the foot contacting zone, a cross section, extending between a foot contacting portion and ground contacting portion will have a greatest dimension and a least dimension. For example, if the shape were elliptical, these would be the distance along the minor axis and the distance along the major axis.

Suitably, the greatest dimension is in the range 50-150mm more preferably 50-100 mm. Preferably, the least dimension is in the range 20-10mm, more preferably 25-60mm. The ratio between the least and the greatest dimension is in the range of 1.0: 1.05 to

2002339079 02 Mar 2009

1.0:2.0, preferably 1.0:1.15 to 1.0:2.0 more preferably 1.0:1.2 to 1.0:1.9 most preferably around 1.0:1.5 to 1.0:1.8.

- 5 The textured first and second surfaces may be roughened, matt, ridged, stepped or grooved to improve contact and friction.

- 10 Where the shape comprises an ellipse or at least approximates to an ellipse, the shape may be defined with reference to a plane dissecting a circular section cylinder at an angle. The angle between the plane and a plane which is perpendicular to the axis of the cylinder is referred to. In this case, the shape of the foot-contacting portion is suitably defined by a 20-60 ellipse or ellipsoid, preferably a 35-40 ellipse or ellipsoid.

- 15 If the difference between the greatest and least dimension is not sufficiently large, an insufficient lifting action is obtained. Suitably, a lift in the range 10-25mm is obtained when rolling the device over a distance of about 5cm.

- 20 If, however, the difference between the greatest dimension and the least dimension is too much, the device becomes difficult to operate. Further, if the difference is too small, the object will tend to approximate too much to a smooth cylinder and may roll around floor in an uncontrolled fashion, providing a hazard to other people.

- 25 The body may comprise at least two parts which fit together for use. The parts may define between them a space for enclosing objects. The shape must be constructed in a way, known to the person skilled in the art, so that it can bear the weight of at least the leg of a fully grown adult.
- 30

Alternatively, the body may comprise two geometrically similar parts, one of which is slidably mounted in the other, so that the device may be opened like a telescope.

- 35 The present invention further provides a method of exercising the foot, comprising placing an exercise device according to the invention

between the instep of the foot and a floor surface and rocking, oscillating or rolling the foot and the device backward and forwards.

It is a particular advantage of the present invention that it may be used while the user is in a seated position. For example, it may be used by a passenger in an aircraft or other vehicle whilst at their seat, allowing for use with minimal interference. It employs a natural foot action. The device may be used substantially silently, as it does not require hinges or other moving parts. The device may

be prepared for use simply by placing it on the ground, making it easy to operate.

Preferably, the device is formed of material, thickness and size which allow its weight to be small. Preferably, the weight is in the range 50-250gms more preferably 100-150 gms.

Optional feature of the invention may include a timer device for setting off a warning, for example a flashing light, buzzer or other device for alerting a user that it is time to exercise.

The lifting motion imparted to the leg may be taken up by movement of the foot or movement of the whole leg, according to the preference of the user.

In either case, the calf muscles will be contracted, with the accompanying beneficial effect.

By way of example, a specific embodiment of the invention, referred to in the description as an oscillator, will now be described with reference to the accompanying drawings in which:-

Figure 1 shows in perspective, the general configuration of the oscillator.

Figure 2 shows in perspective, the oscillator in position under the instep.

Figure 3 illustrates in end view, the alternating positions of the oscillator.

Figure 4 illustrates the top and underside details of the oscillator.

Figure 5 shows the oscillator in two parts.

Referring to Figure 1, an oblong, oval-shaped oscillator 7, which may be of solid or hollow construction, is designed to function under and across the instep of the foot whilst supporting the full weight of the leg and foot on its upper surface, as indicated by the arrows, and

with the underside being in contact with the floor at 8. The oscillator and foot may then be rocked backwards and forwards on the spot by applying alternate pressure with the ball of the foot and heel, with shoes on or off. The oscillator 7 is symmetrical in design so that either surface may provide the floor-contacting surface or the foot-contacting surface.

According to Figure 2, the oscillator 7 is shown in position with the leg near vertical and arrows indicating the rocking motion of the foot.

Referring to Figure 3, the central principle employed in the oscillator is that the dual cam effect of the rocking ellipsoid, reacting with the floor, lifts either the front or back of the foot as it is progressively rotated so that the following occurs. Diagram A shows the oscillator rocked forwards by pressure on the ball of the foot so that the rear lobe of the ellipse has risen, giving an increase in height shown at C which is lifting the heel and increasing the angle of the foot to the horizontal plane so as to fully flex the calf muscles. Diagram B shows the oscillator rocked backwards by downward pressure of the heel which is lifting the front of the foot and also increasing its angle to the horizontal plane so as to fully flex the calf muscles in reverse. The 'pumping' effect of the calf muscles can thus be controlled and varied depending on the degree of effort applied to the rocking action, affecting the angle of the foot.

The oscillator may also have an asymmetrical, or egg-shaped, outer profile which provides a variation in lift characteristics, if

required.

According to Figure 4, the plan view of the upper and lower surfaces of the oscillator shows lateral ridges 9 which improve grip and control slippage at the foot and floor interfaces when in use. If the oscillator is of hollow construction, end cap(s) 10 may be removable to access items that may be kept within.

Referring to Figure 5, the oscillator may be constructed of two separate halves with the horizontal join surfaces shown at 11. The oscillator may function as a single unit if the halves are joined together, or it may be separated to provide two units that may be used with the flat surfaces uppermost in contact with the feet.

The oscillator 7 shown in Figures 1 and 5 of the drawings comprises an elliptical sectioned prism.

When seen in cross section, the width along the major axis is 57mm and the depth along the minor axis is 33mm, corresponding to a 36° ellipse.

The prism section is preferably of length of 106mm. The device is formed of thermoplastic material and weighs 120gms.

In order to determine the effectiveness of the device according to figure 1 for increasing blood flow and for resisting DVT, live tests were carried out at a leading Medical Centre.

Ten healthy subjects of both sexes were individually tested at half hourly intervals to evaluate how using the device of figure 1 affected blood flow in the legs. A standard economy class aircraft seat was provided in which each subject remained for the duration of the test. A sensor was attached to each leg to monitor venous outflow V_o in the femoral region. The left leg (LT) was kept static as a control throughout the test while the right (RT) foot and leg were exercised. the object being to determine blood flow differential in the legs as a result of right leg activity alone, thus indicating blood flow improvement directly attributable to the exercise device of figure 1.

2002339079 02 Mar 2009

The subjects were seated and totally inactive for the initial two hours so that the fall off in venous outflow could be monitored in both legs. Thereafter, at half hourly intervals, the right foot were exercised for one minute duration using the device of figure 1 and the Vo readings were taken 15 minutes after cessation of exercise. Exercise was conducted every 30 minutes for one minute only.

The following results were obtained.

After two hours, venous outflow from the unexercised left leg was reduced by 43.5%. In contrast, venous outflow in the right leg, 15 minutes after exercise was ceased had only reduced by 19.57%. Further, venous capacitance was measured. The venous capacitance of the left leg after two hours had increased by 34.66% whereas it has only increased by 30.1% in the right leg.

It can be seen that there is 55% improvement in blood flow produced by just one minute of exercise. This value compares directly with blood flow improvements obtained by normal walking action for the same time in a similar test environment.

The present invention has been described above by way of example only. Modification can be made within the spirit of the invention which extends to equivalents of the features described. The invention also consists in any individual features described or implicit herein or shown or implicit in the drawings or any combination of any such features or any generalisation of any such features or combination.

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as, an acknowledgement or admission or any form of suggestion that that prior publication (or

2002339079 02 Mar 2009

8a

information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

- 5 Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or
- 10 step or group of integers or steps.

CLAIMS

1. An exercise device for use under the instep of the foot to provide lift for the foot and rotation of the ankle when
5 rocked in either direction, comprising a solid or hollow body having a first surface for contacting the instep of the foot of a user and a second surface for contacting a floor surface wherein the outer profile of the device corresponds to a substantially symmetrical ellipse, an asymmetrical
10 ellipse, an ovoid, an oblong in which the first and second surfaces are curved or a round edged polygon in which the first and second surfaces are curved, the first and second surfaces being configured so that rocking the second surface over a floor surface causes at least a part of the first
15 surface to rise with respect to the floor surface, wherein the first and second surfaces are textured to improve grip, the exercise device being capable of bearing the weight of at least the leg of a fully-grown adult.
- 20 2. A device according to claim 1, wherein the cross section of the device corresponds to a 20° to 60° ellipse or ellipsoid, preferably a 35-40° ellipse or ellipsoid.
3. A device according to claim 1 or 2, wherein a cross
25 section of a foot contacting zone of the device has a greatest dimension and a least dimension, the ratio between the least dimension and the greatest dimension is in the range 1.0:1.05, preferably 1.0:1.15 to 1.0:2.0, more preferably 1.0:1.2 to 1.0:1.9, most preferably 1.0:1.4 to
30 1.0:1.8.

02 Mar 2009

2002339079

10

4. A device according to any preceding claim, comprising two halves which may be releasably fixed together.

5 5. A device according to claim 1, wherein the device is in the form of a round edged polygon in which the first and second surfaces are curved and the ratio between the least dimension and the greatest dimension is in the range 1:1.15-1.0:2.0.

10

6. A device according to claim 1, wherein the solid or hollow body corresponds to a substantially symmetrical ellipse, an asymmetrical ellipse or an ovoid, wherein the cross section of the device corresponds to a 20° to 60°




15 ellipse or ellipsoid.

7. A device according to claim 1, being hollow and having removable closure means for at least one end of the body.

20 8. A device according to claim 1, wherein the first and second curved surfaces have substantially the same form so that the device can be used with either surface in contact with the floor or with the foot.

25 9. An exercise device, substantially as described with reference to the drawings and/or examples.

1/2

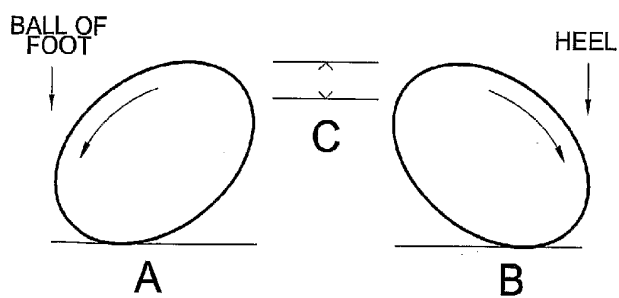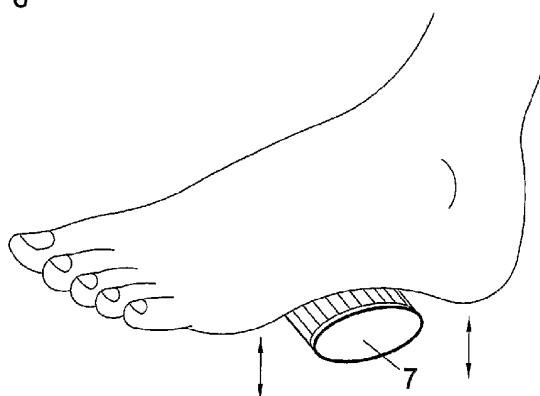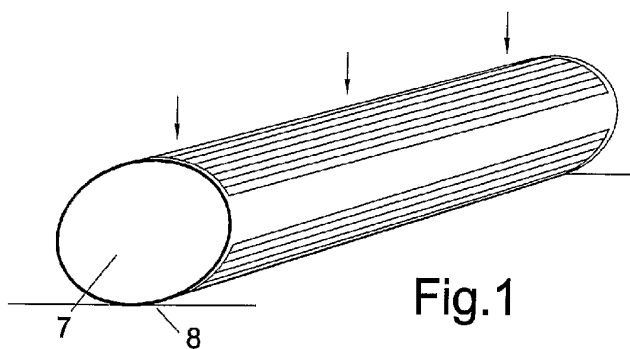

SUBSTITUTE SHEET (RULE 26)

2/2

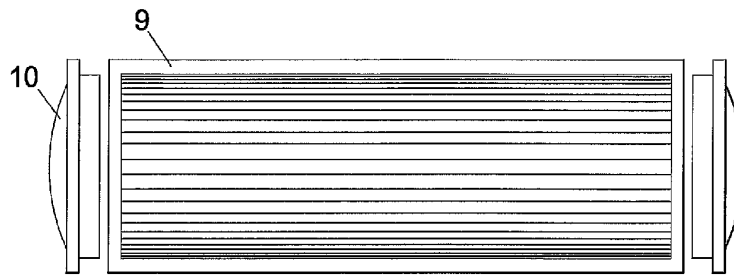


Fig. 4

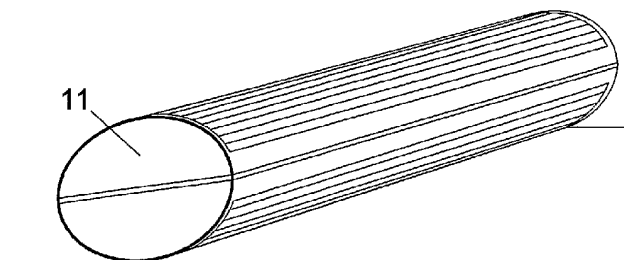


Fig. 5

SUBSTITUTE SHEET (RULE 26)